

1 USER'S MANUAL

This is a copy of the 2 first pages of the user's manuals, where the FCC statement is included :

1.1 PCX822np user's manual



Information for the user

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions contained in this data sheet, may cause harmful interference to radio and television communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- reorient or relocate the receiving antenna
- increase the separation between the equipment and the receiver
- connect the equipment into an outlet on a circuit different from that of the receiver
- consult the dealer or an experienced audio television technician.

NOTE: Connecting this device to peripheral devices that do not comply with CLASS B requirements or using an unshielded peripheral data cable will increase the risk of harmful interference to radio or television reception. The user is cautioned that any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. To ensure that the use of this product does not contribute to interference, it is necessary to use shielded I/O cables.

Important notice

This card has been tested and found to comply with the following standards :

- International : CISPR22 Class B
- Europe : EMC 89/336/CEE (1992) specifications.
- United States : FCC Rules-Part 15-Class B (digital device).

In order to guarantee compliance with the above standards in an installation, the following must be done :

- Connectors must have a conductive shell.
- Cables must be shielded and their shield must be tightly connected to the shell of the connectors.
- A good contact must exist between the bracket and the PC frame.

Overview

- Audio card for PCI bus
- 2 analog mono inputs
- 1 digital stereo input
- 1 digital sync input
- 8 analog mono outputs
- 4 digital stereo outputs
- 1 Word Clock sync input
- 1 LTC (SMPTE) input


Hardware requirements

- One card slot, PCI 2.1 compliant.
- One available IRQ line (level sensitive).
- 256 bytes of available I/O space.

Software requirements

- np driver V5.50 or higher

1.2 PCX442np user's manual

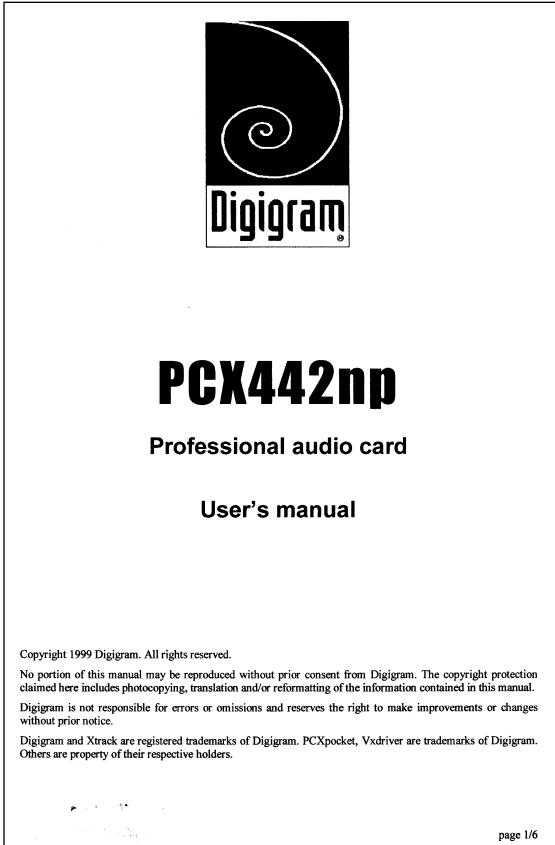

Information for the user

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions contained in this data sheet, may cause harmful interference to radio and television communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- reorient or relocate the receiving antenna
- increase the separation between the equipment and the receiver
- connect the equipment into an outlet on a circuit different from that of the receiver
- consult the dealer or an experienced audio television technician.

NOTE: Connecting this device to peripheral devices that do not comply with CLASS B requirements or using an unshielded peripheral data cable could also result in harmful interference to radio or television reception. The user is cautioned that any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. To ensure that the use of this product does not contribute to interference, it is necessary to use shielded I/O cables.

Important notice

This card has been tested and found to comply with the following standards :

- International : CISPR22 Class B.
- Europe : EMC 89/336/CEE (1992) specifications.
- United States : FCC Rules-Part 15-Class B (digital device).

In order to guarantee compliance with the above standards in an installation, the following must be done :

- Connectors must have a conductive shield.
- Cables must be shielded and their shield must be tightly connected to the shell of the connectors.
- A good contact must exist between the bracket and the PC frame.

Overview

- Audio card for PCI bus
- 4 analog mono inputs
- 2 digital stereo input
- 1 digital sync input
- 4 analog mono outputs
- 2 digital stereo outputs
- 1 digital sync input
- 1 Word Clock sync input
- 1 LTC (SMPTE) input

Hardware requirements

- One card slot, PCI 2.1 compliant.
- One available IRQ line (level sensitive).
- 256 bytes of available I/O space.

Software requirements

- TBD

1.3 VX822 user's manual



Information for the user

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions contained in this data sheet, may cause harmful interference to radio and television communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- reorient or relocate the receiving antenna
- increase the separation between the equipment and the receiver
- connect the equipment into an outlet on a circuit different from that of the receiver
- consult the dealer or an experienced audio television technician.

NOTE: Connecting this device to peripheral devices that do not comply with CLASS B requirements or using an unshielded peripheral data cable could also result in harmful interference to radio or television reception. The user is cautioned that any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. To ensure that the use of this product does not contribute to interference, it is necessary to use shielded I/O cables.

Important notice

This card has been tested and found to comply with the following standards :

- International : CISPR22 Class B
- Europe : EMC 89/336/CEE (1992) specifications
- United States : FCC Rules-Part 15-Class B (digital device).

In order to guarantee compliance with the above standards in an installation, the following must be done :

- Connectors must have a conductive shell.
- Cables must be shielded and their shield must be tightly connected to the shell of the connectors.
- A good contact must exist between the bracket and the PC frame.

Overview

- Audio card for PCI bus
- 2 analog mono inputs
- 1 digital stereo input
- 1 digital sync input
- 8 analog mono outputs
- 4 digital stereo outputs
- 1 Word Clock sync input

Hardware requirements

- One card slot, PCI 2.1 compliant.
- One available IRQ line (level sensitive).
- 256 bytes of available I/O space.

Software requirements

- Wave for VX driver