

BLOCK DIAGRAM OF EQUIPMENT

1.1 Clock list of equipments

- LX-IP RAVENNA with MADI option
- LX-IP RAVENNA
- LX-IP MADI
- LX6464ESe / LX1616ESe

Cristal oscillators:

Q1 = 25 MHz

Q2 = 24.576 MHz

Q3 = 28.224 MHz


Q4 = 66 MHz

Q5 = 24 MHz


PCI Express data rate: 2.5 GHz

1.2 Block diagram


LX-IP RAVENNA with MADI option:

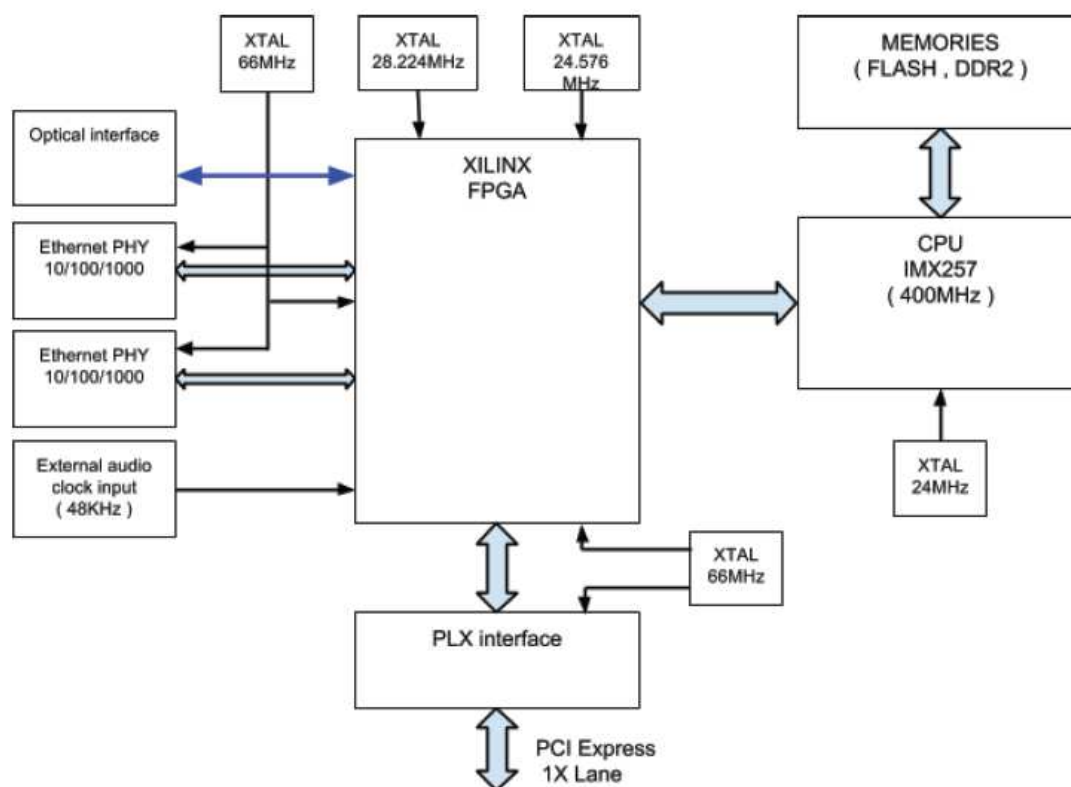

LX-IP RAVENNA:

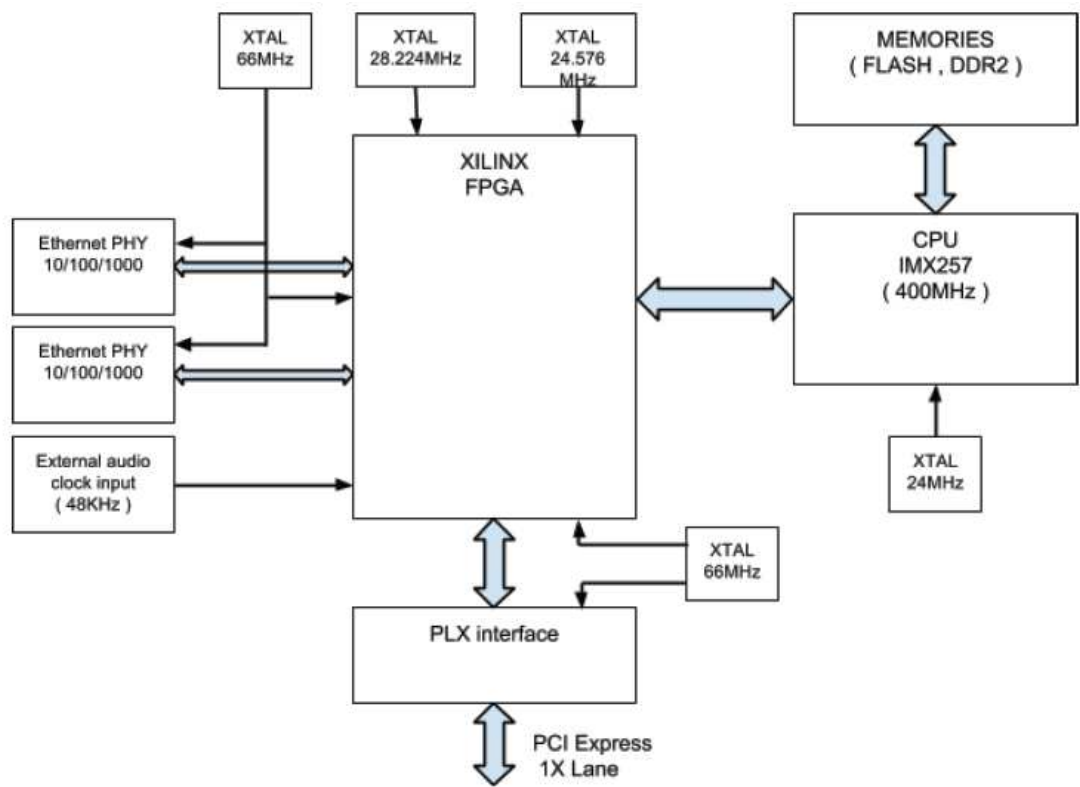

LX-IP MADI:

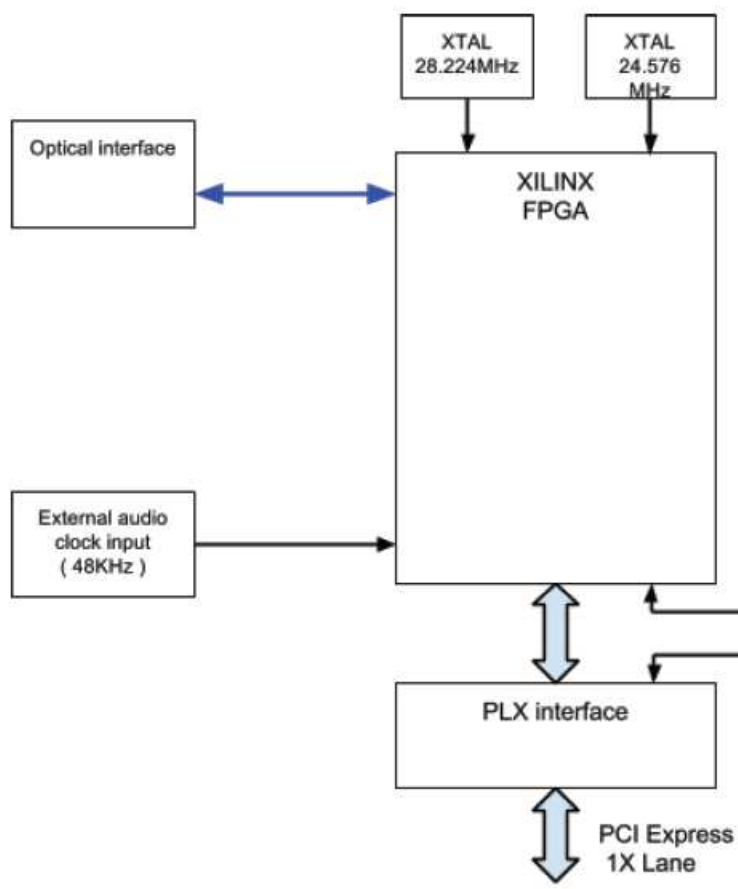

LX 6464ESe & LX 1616ESe:

