



MOTOROLA

Portable Cellular Phone SAR Test Report

Test Report #: 22015-1F
Date of Report: Jun-18-2008
Date of Test: Oct-11-2007 to Oct-29-2007, May-27-2008 to Jun-03-2008
FCC ID #: **IHDP56HA2**
Generic Name: **MRQ6-334411B12**

Laboratory: Motorola Mobile Devices Business Product Safety & Compliance Laboratory
600 N. US Highway 45
Libertyville, Illinois 60048

Report Author: Thomas Knipple
Senior RF Engineer 

This laboratory is accredited to ISO/IEC 17025-2005 to perform the following tests:

Accreditation:



TESTING CERT #2518-02

<u>Tests:</u> Electromagnetic Specific Absorption Rate	<u>Procedures:</u> IEC 62209-1 RSS-102 IEEE 1528 - 2003 FCC OET Bulletin 65 (<i>including Supplement C</i>) Australian Communications Authority Radio Communications (Electromagnetic Radiation – Human Exposure) Standard 2003 CENELEC EN 50360 (2001) CENELEC EN 50361 (2001) ARIB Std. T-56 (2002)
---	---

On the following products or types of products:
Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

Statement of Compliance:

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with IEEE 1528 / CENELEC EN62209-1 (2006), as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2008

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. Introduction	2
2. Description of the Device Under Test	2
2.1 Antenna description	2
2.2 Device description	2
3. Test Equipment Used	3
3.1 Dosimetric System	3
3.2 Additional Equipment	3
4. Electrical parameters of the tissue simulating liquid	4
5. System Accuracy Verification	5
6. Test Results	6
6.1 Head Adjacent Test Results	7
6.2 Body Worn Test Results	14
References	18
Appendix 1: SAR distribution comparison for system accuracy verification	19
Appendix 2: SAR distribution plots for Phantom Head Adjacent Use	20
Appendix 3: SAR distribution plots for Body Worn Configuration	21
Appendix 4: Probe Calibration Certificate	22
Appendix 5: Measurement Uncertainty Budget	23
Appendix 6: Dipole Characterization Certificate	25

1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4] and [5]. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1 g average set in [3] and 2.0 W/kg in a 10 g average set in [2].

For ANSI / IEEE C95.1 (1 g), the final SAR reading for this phone is 0.94 W/kg for head adjacent use and 0.64 W/kg for body worn use. These measurements were performed using a Dasy4™ v4.7 system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich Switzerland.

2. Description of the Device Under Test

2.1 Antenna description

Type	Internal	
Location	Bottom of Phone	
Dimensions	Length	49 mm
	Width	17.5 mm
Configuration	FICA	

2.2 Device description

Serial Number	LCS04E001, LCS04E002, TA5340002O								
Mode(s) of Operation	GSM 850	GSM 900	GSM 1800	GSM 1900			WCDMA 850	WCDMA 1900	Bluetooth
Modulation Mode(s)	GMSK	GMSK	GMSK	GMSK			QPSK	QPSK	GFSK
Maximum Output Power Setting	32.50 dBm	33.00 dBm	30.00 dBm	Ch. 512 30.20 dBm	Ch. 661 30.00 dBm	Ch. 810 29.50 dBm	24.00 dBm	24.00 dBm	6.5 dBm
Duty Cycle	1:8	1:8	1:8	1:8			1:1	1:1	1:1
Transmitting Frequency Range(s)	824.2 - 848.8 MHz	880.2 - 914.8 MHz	1710.2 - 1784.8 MHz	1850.2 - 1909.8 MHz			826.4 - 846.6 MHz	1920.3 - 1979.7 MHz	2400.0 - 2483.5 MHz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype								
Device Category	Portable								
RF Exposure Limits	General Population / Uncontrolled								

Mode(s) of Operation	GPRS 850		GPRS 900		GPRS 1800		GPRS 1900	
Modulation	GMSK		GMSK		GMSK		GMSK	
Maximum Output Power Setting	32.50 dBm	30.60 dBm	33.00 dBm	31.10 dBm	30.00 dBm	28.30 dBm	30.00 dBm	28.30 dBm
Duty Cycle	1:8	2:8	1:8	2:8	1:8	2:8	1:8	2:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz		880.2 - 914.8 MHz		1710.2 - 1784.8 MHz		1850.2 - 1909.8 MHz	

Mode(s) of Operation	EDGE 850		EDGE 900		EDGE 1800		EDGE 1900	
Modulation	8PSK		8PSK		8PSK		8PSK	
Maximum Output Power Setting	27.50 dBm	25.60 dBm	27.50 dBm	25.60 dBm	26.50 dBm	24.70 dBm	26.50 dBm	24.70 dBm
Duty Cycle	1:8	2:8	1:8	2:8	1:8	2:8	1:8	2:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz		880.2 - 914.8 MHz		1710.2 - 1784.8 MHz		1850.2 - 1909.8 MHz	

Note: Bolded entries indicate data mode of highest time-average power per band and data mode type.

3. Test Equipment Used

3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall 10 g RSS uncertainty of the measurement system is $\pm 10.8\%$ (K=1) with an expanded uncertainty of $\pm 21.6\%$ (K=2). The overall 1 g RSS uncertainty of the measurement system is $\pm 11.1\%$ (K=1) with an expanded uncertainty of $\pm 22.2\%$ (K=2). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg.

The list of calibrated equipment used for the measurements is shown in the following table.

Description	Serial Number	Cal Due Date
DASY4™ DAE V1	378	Apr-13-2008
E-Field Probe ET3DV6R	1397	Apr-24-2008
DASY4™ DAE V1	376	Mar-18-2009
E-Field Probe ET3DV6	1514	Jul-11-2008
S.A.M. Phantom used for 800/900 MHz	TP-1005	
S.A.M. Phantom used for 1800/1900/2450 MHz	TP-1139	
Dipole Validation Kit, DV900V2	91	May-01-2008
Dipole Validation Kit, DV1800V2	259TR	May-01-2008
Dipole Validation Kit, DV1800V2	259TR	Apr-22-2009
Dipole Validation Kit, DV2450V2	740	May-01-2008

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04843	Jul-10-2008
Power Meter E4419B	US39250622	Jun-07-2009
Power Sensor #1 – E9301A	US39211006	Jun-20-2008
Power Sensor #2 - E9301A	US39211007	Jun-11-2008
Signal Generator HP8648C	3847A04810	Jun-13-2009
Power Meter E4419B	GB39510961	Jan-24-2010
Power Sensor #1 – E9301A	US39210917	Sep-10-2008
Power Sensor #2 - E9301A	US39210918	Sep-10-2008
Network Analyzer HP8753ES	US39171846	Jul-19-2008
Dielectric Probe Kit HP85070C	US99360070	

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with a HP85070 Dielectric Probe Kit. These values, along with the temperature of the simulated tissue are shown in the table below. The recommended limits for permittivity and conductivity are also shown. A mass density of $\rho = 1 \text{ g/cm}^3$ was entered into the system in all the cases. It can be seen that the measured parameters are within tolerance of the recommended limits specified in [1] and [5].

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (C)
835	Head	Measured, Oct-11-2007	42.0	0.92	20.0
		Measured, Oct-12-2007	41.2	0.91	19.8
		Measured, Oct-22-2007	40.3	0.90	19.6
		Measured, Oct-25-2007	41.2	0.90	19.0
		Recommended Limits	41.5 ±5%	0.90 ±5%	18-25
	Body	Measured, Oct-16-2007	53.1	0.98	19.6
		Measured, Oct-22-2007	53.4	0.98	20.0
	Recommended Limits	55.2 ±5%	0.97 ±5%	18-25	
900	Head	Measured, Oct-11-2007	41.3	0.98	20.0
		Measured, Oct-21-2007	40.3	0.96	20.0
		Recommended Limits	41.5 ±5%	0.97 ±5%	18-25
	Body	Measured, Oct-16-2007	52.4	1.05	19.6
		Recommended Limits	55.0 ±5%	1.05 ±5%	18-25
1750	Head	Measured, Oct-11-2007	40.5	1.33	19.7
		Measured, Oct-16-2007	39.2	1.33	19.7
		Measured, Oct-22-2007	39.6	1.36	19.5
		Recommended Limits	40.1 ±5%	1.37 ±5%	18-25
	Body	Measured, Oct-18-2007	52.1	1.43	19.8
		Recommended Limits	53.4 ±5%	1.49 ±5%	18-25
		Measured, Oct-14-2007	39.9	1.47	19.7
1880	Head	Measured, May-27-2008	39.2	1.46	19.3
		Recommended Limits	40.0 ±5%	1.40 ±5%	18-25
		Measured, Oct-17-2007	51.5	1.58	19.8
	Body	Measured, Jun-02-2008	51.4	1.59	20.0
		Recommended Limits	53.3 ±5%	1.52 ±5%	18-25
		Measured, Oct-26-2007	37.9	1.89	20.9
2450	Head	Measured, Oct-29-2007	36.8	1.88	20.9
		Recommended Limits	39.2 ±10%	1.80 ±5%	18-25
		Measured, Oct-29-2007	55.9	1.89	20.5
	Body	Recommended Limits	52.7 ±10%	1.95 ±5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	835 MHz / 900 MHz Head	835 MHz / 900 MHz Body	1800 MHz / 1900 MHz Head	1800 MHz / 1900 MHz Body	2450 MHz Head	2450 MHz Body
Sugar	57	44.9	--	--	--	--
DGBE	--	--	47	30.8	--	30
Diacetin	--	--	--	--	51	--
Water	40.45	53.06	52.62	68.8	48.75	70
Salt	1.45	0.94	0.38	0.4	0.15	--
HEC	1	1	--	--	--	--
Bact.	0.1	0.1	--	--	0.1	--

5. System Accuracy Verification

A system accuracy verification of the DASY4™ was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within ±10% from the target SAR indicated Appendix 6. These frequencies are within ±10% of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted on the same days as the measurement of the DUT. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1 W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0 cm ± 0.5 cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

f (MHz)	Description	SAR (W/kg), 1 gram	Dielectric Parameters		Ambient Temp (C)	Tissue Temp (C)
			ε _r	σ (S/m)		
900	Measured, Oct-11-2007	11.20	41.3	0.98	20.8	20.0
	Measured, Oct-12-2007	11.075	40.4	0.97	20.7	19.1
	Measured, Oct-16-2007	10.875	39.9	0.96	20.8	19.8
	Measured, Oct-21-2007	10.90	40.3	0.96	20.8	20.8
	Measured, Oct-22-2007	11.00	39.6	0.96	21.0	19.6
	Measured, Oct-25-2007	10.975	40.4	0.97	20.7	19.0
	Recommended Limits	11.24	41.5 ±5%	0.97 ±5%	18-25	18-25
1800	Measured, Oct-11-2007	36.375	40.2	1.39	20.8	19.7
	Measured, Oct-14-2007	37.225	40.3	1.38	20.7	19.7
	Measured, Oct-16-2007	37.40	38.9	1.38	20.8	19.7
	Measured, Oct-17-2007	36.00	39.2	1.36	20.8	20.0
	Measured, Oct-18-2007	36.25	39.2	1.37	20.8	20.0
	Measured, Oct-19-2007	36.20	39.0	1.38	20.7	20.0
	Measured, Oct-22-2007	36.475	39.6	1.39	21.0	19.5
	Recommended Limits	37.5	40.0 ±5%	1.4 ±5%	18-25	18-25
	Measured, May-27-2008	36.575	39.6	1.37	20.8	19.3
	Measured, Jun-02-2008	35.625	39.3	1.38	20.6	20.0
Recommended Limits	37.7	40.0 ±5%	1.4 ±5%	18-25	18-25	
2450	Measured, Oct-26-2007	58.00	37.9	1.89	21.0	20.9
	Measured, Oct-29-2007	57.75	36.8	1.88	20.8	20.7
	Recommended Limits	58.0	39.2 ±10%	1.80 ±5%	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1397	900	6.25	8 of 9
		1810	5.17	8 of 9
		2450	4.56	8 of 9
E-Field Probe ET3DV6R	1514	900	5.98	8 of 9
		1810	4.92	8 of 9

6. Test Results

The test sample was operated using an actual transmission through a base station simulator. The base station simulator was setup to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in [1], [4] and [5]. The phone was positioned into these configurations using the device holder supplied with the DASY4™ SAR measurement system. The measured dielectric constant of the material used for the device holder is less than 2.9 and the loss tangent is less than 0.02 (± 30%) at 850 MHz. The default settings for the “coarse” and “cube” scans were chosen and used for measurements. The grid spacing of the course scan was set to 15 cm as shown in the SAR plots included in Appendix 2 and 3. Please refer to the DASY4™ manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone model covered by this report has the following battery options:

Model SNN5807A – 920 mAh Battery

Model SNN5805A – 740 mAh Battery

The battery with the highest capacity is the model SNN5807A. This battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configuration that resulted in the highest SAR values were tested using the other batteries listed above.

Per the “Preliminary Guidance for Reviewing Applications for Certifications of 3G Devices” released on May 9, 2006, 12.2 kbps RMC and 12.2 kbps AMR modes were considered. The conducted power measurements (per 3GPP TS 34.121) for each mode are shown in the table below.

Conducted power (dBm) for WCDMA modes			
	Channel	RMC	AMR
WCDMA 850	4132	23.97	23.96
	4180	23.97	23.95
	4233	23.88	23.91
WCDMA 1900	9262	23.94	24.00
	9400	23.94	24.00
	9538	23.82	23.83

Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes				
Channel	Sub test 1	Sub test 2	Sub test 3	Sub test 4
4132	23.88	23.88	23.89	23.86
4180	23.86	23.86	23.87	23.88
4233	23.83	23.85	23.85	23.81
9262	24.04	24.05	24.04	24.03
9400	24.01	24.01	24.04	24.03
9538	24.02	24.06	24.02	24.02

6.1 Head Adjacent Test Results

The SAR results shown in tables 1 through 13 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. Note that 800 MHz digital mode SAR measurements were performed in accordance with [4].

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0 cm ± 0.5 cm.

The following probe conversion factors were used on the E-Field probe(s) used for head-adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1397	900	6.25	8 of 9
		1810	5.17	8 of 9
		2450	4.56	8 of 9
E-Field Probe ET3DV6R	1514	900	5.98	8 of 9
		1810	4.92	8 of 9

Left Head Cheek Position, Slider Extended								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.012	0.302	0.30	0.388	0.39
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.3	0.017	0.136	0.14	0.232	0.23
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.045	0.208	0.21	0.277	0.28
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.7	-0.059	0.393	0.40	0.657	0.67
	Channel 9538	23.83						

Table 1: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head Cheek Position, Slider Retracted								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.025	0.235	0.24	0.305	0.31
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.3	0.021	0.261	0.26	0.443	0.44
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.048	0.226	0.23	0.295	0.30
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00	19.7	-0.049	0.411	0.42	0.660	0.67
	Channel 9400	24.00	19.7	-0.086	0.487	0.50	0.790	0.81
	Channel 9538	23.83	19.7	-0.193	0.540	0.56	0.895	0.94

Table 2: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position, Slider Extended								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.039	0.316	0.32	0.405	0.41
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.3	0.030	0.0716	0.07	0.111	0.11
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.150	0.32	0.33	0.408	0.42
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.8	-0.093	0.186	0.19	0.279	0.29
	Channel 9538	23.83						

Table 3: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position, Slider Retracted								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.082	0.231	0.24	0.297	0.30
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	18.8	0.013	0.0968	0.10	0.15	0.15
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.038	0.214	0.22	0.273	0.28
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.8	0.019	0.330	0.33	0.494	0.49
	Channel 9538	23.83						

Table 4: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head Cheek Position with Battery SNN5805A, Slider Extended</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz <i>Right Cheek</i>	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.085	0.331	0.34	0.424	0.43
	Channel 251	32.43						
GSM 1900 MHz <i>Left Cheek</i>	Channel 512	30.14						
	Channel 661	29.92	18.8	-0.058	0.0762	0.08	0.123	0.123
	Channel 810	29.50						
WCDMA 850 MHz <i>Right Cheek</i>	Channel 4123	23.96						
	Channel 4180	23.95	19.6	0.320	0.341	0.34	0.437	0.44
	Channel 4233	23.91						
WCDMA 1900 MHz <i>Left Cheek</i>	Channel 9262	24.00						
	Channel 9400	24.00	20.0	-0.081	0.373	0.38	0.629	0.64
	Channel 9538	23.83						

Table 5: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head Cheek Position with Battery SNN5805A, Slider Retracted</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz <i>Left Cheek</i>	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.034	0.240	0.24	0.313	0.32
	Channel 251	32.43						
GSM 1900 MHz <i>Left Cheek</i>	Channel 512	30.14						
	Channel 661	29.92	18.8	-0.084	0.153	0.16	0.252	0.26
	Channel 810	29.50						
WCDMA 850 MHz <i>Left Cheek</i>	Channel 4123	23.96						
	Channel 4180	23.95	20.0	0.012	0.216	0.22	0.276	0.28
	Channel 4233	23.91						
WCDMA 1900 MHz <i>Left Cheek</i>	Channel 9262	24.00						
	Channel 9400	24.00						
	Channel 9538	23.83	19.6	-0.108	0.46	0.47	0.771	0.79

Table 6: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position, Slider Extended								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.072	0.188	0.19	0.251	0.26
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.3	0.090	0.0763	0.08	0.117	0.12
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.041	0.219	0.22	0.290	0.29
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.7	-0.021	0.196	0.20	0.304	0.31
	Channel 9538	23.83						

Table 7: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position, Slider Retracted								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	0.010	0.172	0.17	0.23	0.23
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.3	0.030	0.103	0.10	0.163	0.16
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	0.030	0.180	0.18	0.237	0.24
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.8	-0.027	0.222	0.22	0.343	0.35
	Channel 9538	23.83						

Table 8: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position, Slider Extended								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	10 g SAR value		1 g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.027	0.200	0.20	0.268	0.27
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.3	0.088	0.079	0.08	0.126	0.13
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.051	0.209	0.21	0.278	0.28
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.8	0.058	0.210	0.21	0.339	0.34
	Channel 9538	23.83						

Table 9: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position, Slider Retracted								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	10 g SAR value		1 g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.025	0.167	0.17	0.222	0.22
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	18.8	-0.010	0.102	0.10	0.168	0.17
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	19.1	-0.027	0.172	0.17	0.229	0.23
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.8	-0.028	0.238	0.24	0.387	0.39
	Channel 9538	23.83						

Table 10: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head 15° Tilt Position with Battery SNN5805A, Slider Extended</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz <i>Right Tilt</i>	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.137	0.208	0.21	0.278	0.29
	Channel 251	32.43						
GSM 1800 MHz <i>Right Tilt</i>	Channel 512	30.14						
	Channel 661	29.92	18.8	-0.137	0.0747	0.08	0.122	0.13
	Channel 810	29.50						
WCDMA 850 MHz <i>Left Tilt</i>	Channel 4123	23.96						
	Channel 4180	23.95	20.0	0.006	0.201	0.20	0.266	0.27
	Channel 4233	23.91						
WCDMA 1900 MHz <i>Right Tilt</i>	Channel 9262	24.00						
	Channel 9400	24.00	20.0	-0.056	0.200	0.20	0.312	0.32
	Channel 9538	23.83						

Table 11: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head 15° Tilt Position with Battery SNN5805A, Slider Retracted</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz <i>Left Tilt</i>	Channel 128	32.50						
	Channel 190	32.42	19.3	-0.078	0.186	0.19	0.247	0.25
	Channel 251	32.43						
GSM 1900 MHz <i>Right Tilt</i>	Channel 512	30.14						
	Channel 661	29.92	18.8	-0.003	0.104	0.10	0.174	0.17
	Channel 810	29.50						
WCDMA 850 MHz <i>Left Tilt</i>	Channel 4123	23.96						
	Channel 4180	23.95	20.0	-0.097	0.168	0.17	0.223	0.23
	Channel 4233	23.91						
WCDMA 1900 MHz <i>Right Tilt</i>	Channel 9262	24.00						
	Channel 9400	24.00	20.0	-0.046	0.239	0.24	0.378	0.38
	Channel 9538	23.83						

Table 12: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

6.2 Body Worn Test Results

The SAR results shown in tables 13 through 19 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. Note that 800 MHz digital mode SAR measurements were performed in accordance with [4].

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 4. All other test conditions measured lower SAR values than those included in Appendix 4.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0 mm. It measures 52.7 cm(long) x 26.7 cm(wide) x 21.2 cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184 GHz.

The tissue stimulant depth was verified to be 15.0 cm ± 0.5 cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. In addition to accessory testing, the cellular phone was tested with the front and back of the phone facing the phantom. For voice mode and data mode operation, the phone was placed at a distance of 25 mm from the phantom. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There is one Body-Worn Accessories available for this phone:
A Plastic Holster and Belt Clip: SYN2314A

The plastic holster causes closer proximity and does differ in metal components, and was used for the SAR measurements where noted.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1397	900	6.04	8 of 9
		1810	4.83	8 of 9
		2450	4.18	8 of 9
E-Field Probe ET3DV6R	1514	900	5.75	8 of 9
		1810	4.59	8 of 9

Body-Worn; Front of Phone 25 mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	10 g SAR value		1 g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.1	-0.076	0.0929	0.09	0.123	0.13
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.2	-0.051	0.0352	0.04	0.0532	0.05
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	20.0	-0.064	0.114	0.12	0.151	0.15
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.6	-0.087	0.0776	0.08	0.117	0.12
	Channel 9538	23.83						
Bluetooth 2450 MHz	N/A	6.5	20.8	1.42	0.000799	0.00	0.000143	0.00

Table 13: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Back of Phone 25 mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	10 g SAR value		1 g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.7	-0.044	0.14	0.14	0.186	0.19
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	19.2	-0.028	0.133	0.13	0.223	0.22
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	20.0	-0.053	0.211	0.21	0.283	0.29
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.9	-0.118	0.296	0.30	0.487	0.50
	Channel 9538	23.83						
Bluetooth 2450 MHz	N/A	6.5	20.5	-1.60	0.00022	0.00	0.00125	0.00

Table 14: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn with GPRS Class 10 Mode; Back of Phone 25 mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	30.67						
	Channel 190	30.60	19.7	-0.031	0.245	0.25	0.321	0.32
	Channel 251	30.61						
GSM 1900 MHz	Channel 512	28.70						
	Channel 661	28.31	21.0	-0.024	0.14	0.14	0.228	0.23
	Channel 810	27.79						

Table 15: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn with EDGE Class 10 Mode; Back of Phone 25 mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	25.58						
	Channel 190	25.57	19.1	-0.046	0.0743	0.08	0.0994	0.10
	Channel 251	25.62						
GSM 1900 MHz	Channel 512	24.75						
	Channel 661	24.58	21.0	-0.007	0.0742	0.07	0.123	0.12
	Channel 810	24.63						

Table 16: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Highest-SAR Configuration with Battery SNN5805A								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.1	-0.107	0.363	0.37	0.489	0.50
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	28.70						
	Channel 661	28.31	21.0	0.010	0.188	0.19	0.313	0.31
	Channel 810	27.79						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	20.0	-0.049	0.213	0.22	0.285	0.29
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	19.6	-0.205	0.281	0.29	0.461	0.48
	Channel 9538	23.83						

Table 17: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn with Plastic Holster SYN2314A								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GSM 850 MHz	Channel 128	32.50						
	Channel 190	32.42	19.8	-0.080	0.391	0.40	0.53	0.54
	Channel 251	32.43						
GSM 1900 MHz	Channel 512	30.14						
	Channel 661	29.92	20.0	0.011	0.291	0.29	0.541	0.54
	Channel 810	29.50						
WCDMA 850 MHz	Channel 4123	23.96						
	Channel 4180	23.95	20.0	0.039	0.449	0.45	0.607	0.61
	Channel 4233	23.91						
WCDMA 1900 MHz	Channel 9262	24.00						
	Channel 9400	24.00	20.0	-0.139	0.368	0.38	0.621	0.64
	Channel 9538	23.83						
Bluetooth 2450 MHz	N/A	6.5	20.5	-0.937	0.000263	0.00	0.00108	0.00

Table 18: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Highest of Extrapolated SAR Values (including Bluetooth summation)							
<i>f</i> (MHz)	Description	<i>10 g SAR value</i>			<i>1 g SAR value</i>		
		Original Measurement (W/kg)	Bluetooth Measurement (W/kg)	Summation (W/kg)	Original Measurement (W/kg)	Bluetooth Measurement (W/kg)	Summation (W/kg)
GSM 850 MHz	Body Worn with Holster SYN2314A	0.40	0.00	0.40	0.54	0.00	0.54
GSM 1900 MHz	Body Worn with Holster SYN2314A	0.29	0.00	0.29	0.54	0.00	0.54
WCDMA 850 MHz	Body Worn with Holster SYN2314A	0.45	0.00	0.45	0.61	0.00	0.61
WCDMA 1900 MHz	Body Worn with Holster SYN2314A	0.38	0.00	0.38	0.64	0.00	0.64

Table 19: SAR measurement results at the highest possible output power, calculated for the body position against the ICNIRP and ANSI SAR Limit.

References

- [1] CENELEC, en62209-1:2006 “Human Exposure to Radio Frequency Fields From Hand - Held and Body - Mounted Wireless Communication Devices – Human Models, Instrumentation, and Procedures”
- [2] CENELEC, en50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)”.
- [3] ANSI / IEEE, C95.1 1999 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 10/11/2007 8:02:31 AM

Test Laboratory: Motorola - 101107 900MHz Good at -.4%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 91; FCC ID: IHDP56HA2

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 91; Input Power = 200 mW

Sim.Temp@meas = 20 C; Sim.Temp@SPC = 20 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.51 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.6 V/m; Power Drift = -0.038 dB; Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.3 mW/g; SAR(10 g) = 1.5 mW/g; Maximum value of SAR (measured) = 2.49 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.6 V/m; Power Drift = -0.038 dB; Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 2.18 mW/g; SAR(10 g) = 1.41 mW/g; Maximum value of SAR (measured) = 2.37 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.50 mW/g

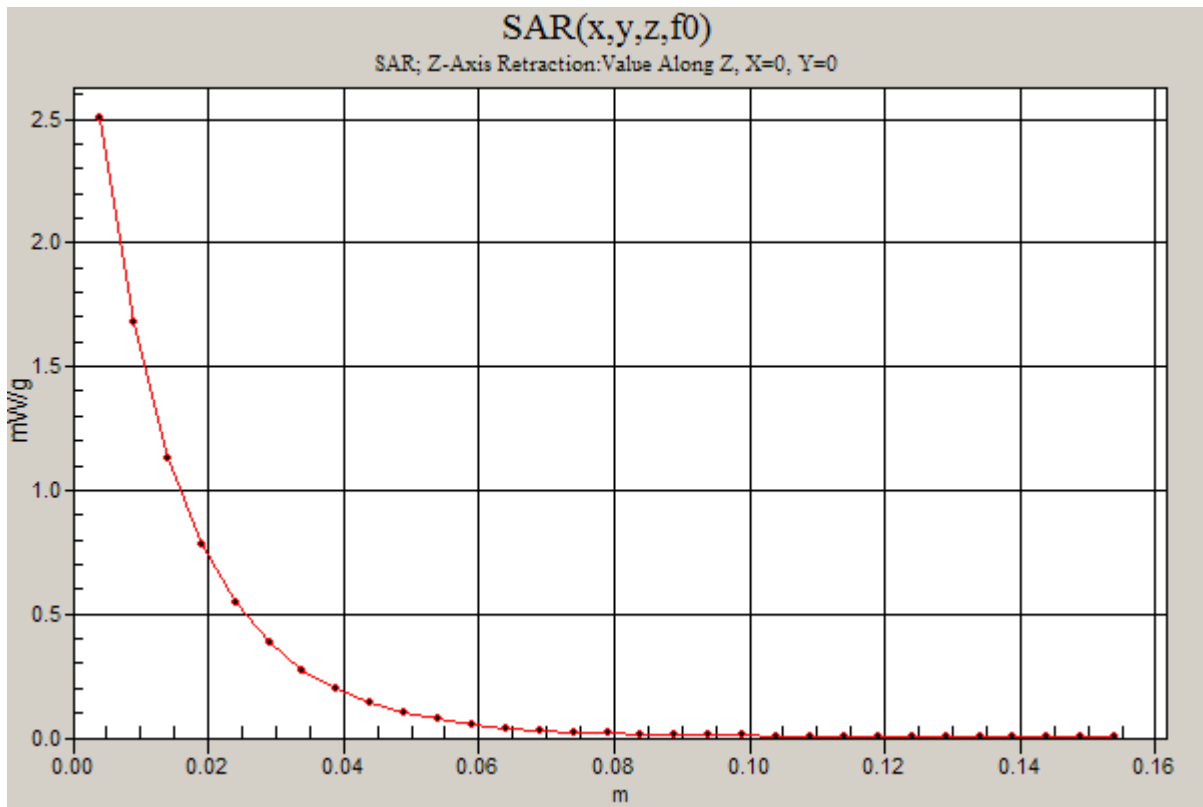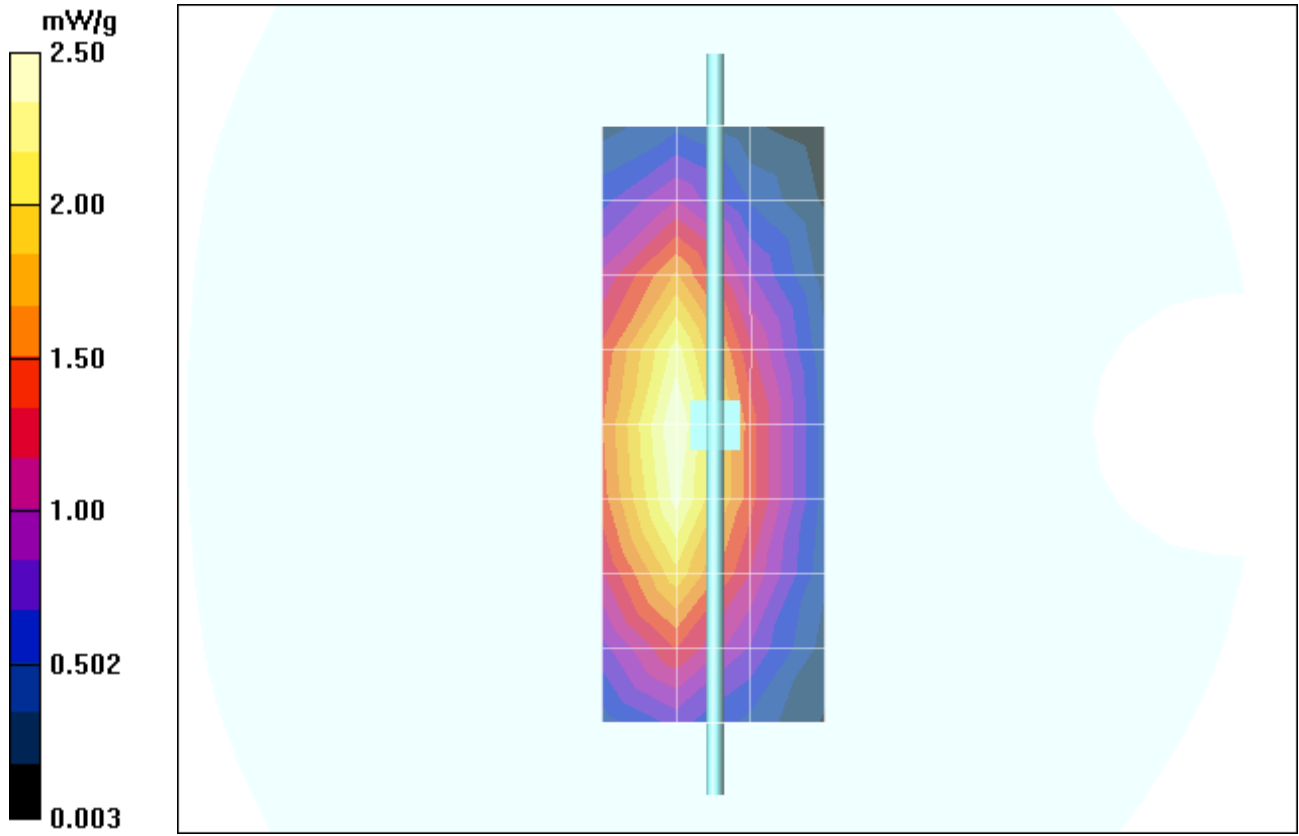

Date/Time: 10/12/2007 5:32:18 PM

Test Laboratory: Motorola - 101207 900MHz Good at -1.5%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 91; FCC ID: IHDP56HA2

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 091; Input Power = 200 mW

Sim.Temp@meas = 19.8 C; Sim.Temp@SPC = 19.1 C; Room Temp @ SPC = 20.7 C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.45 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.1 V/m; Power Drift = -0.052 dB; Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.28 mW/g; SAR(10 g) = 1.48 mW/g; Maximum value of SAR (measured) = 2.44 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.1 V/m; Power Drift = -0.052 dB; Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 2.15 mW/g; SAR(10 g) = 1.4 mW/g; Maximum value of SAR (measured) = 2.28 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.47 mW/g

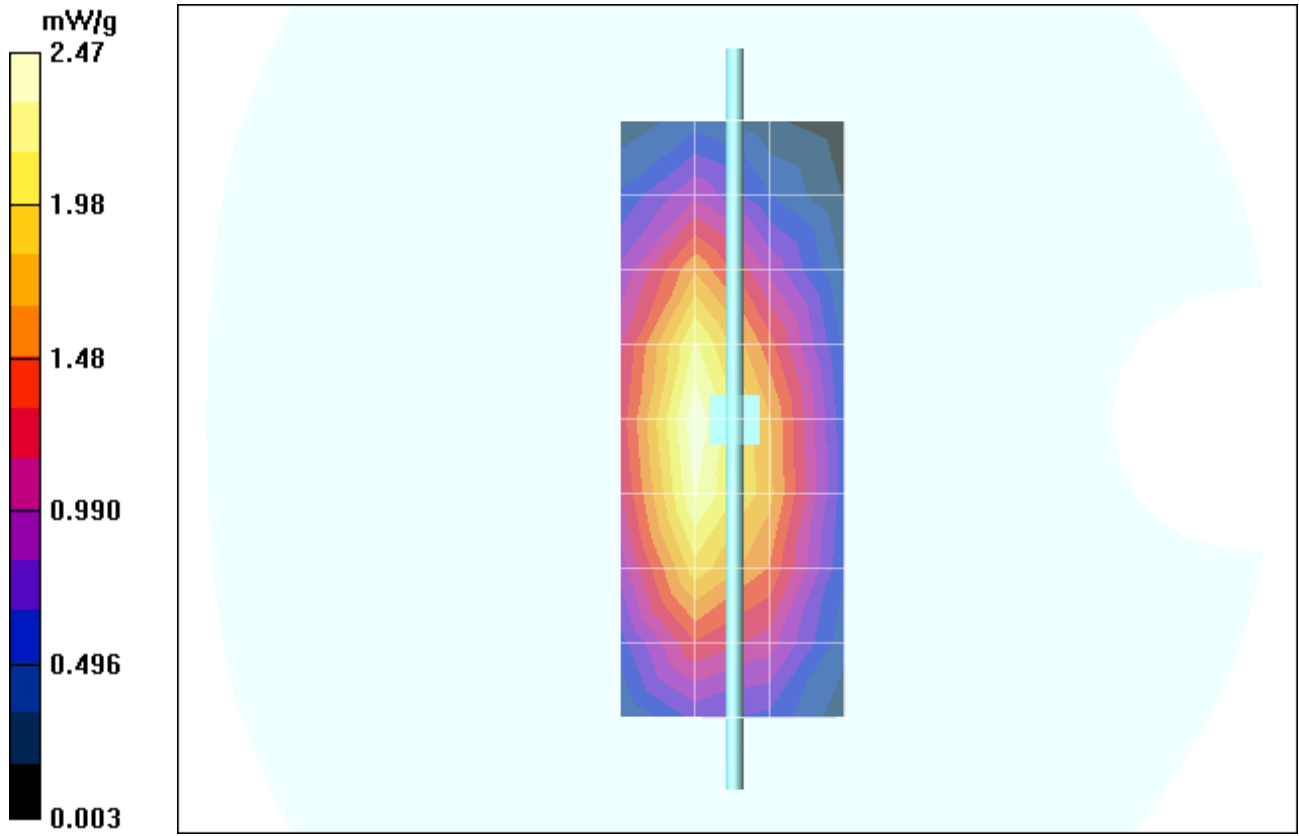

Date/Time: 10/16/2007 7:44:52 AM

Test Laboratory: Motorola - 101607 900MHz Good at -3.2%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 91; FCC ID: IHDP56HA2

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 91; Input Power = 200 mW

Sim.Temp@meas = 19.8 C; Sim.Temp@SPC = 19.8 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.45 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.8 V/m; Power Drift = -0.061 dB; Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.25 mW/g; SAR(10 g) = 1.46 mW/g; Maximum value of SAR (measured) = 2.44 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.8 V/m; Power Drift = -0.061 dB; Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 2.1 mW/g; SAR(10 g) = 1.36 mW/g; Maximum value of SAR (measured) = 2.28 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.43 mW/g

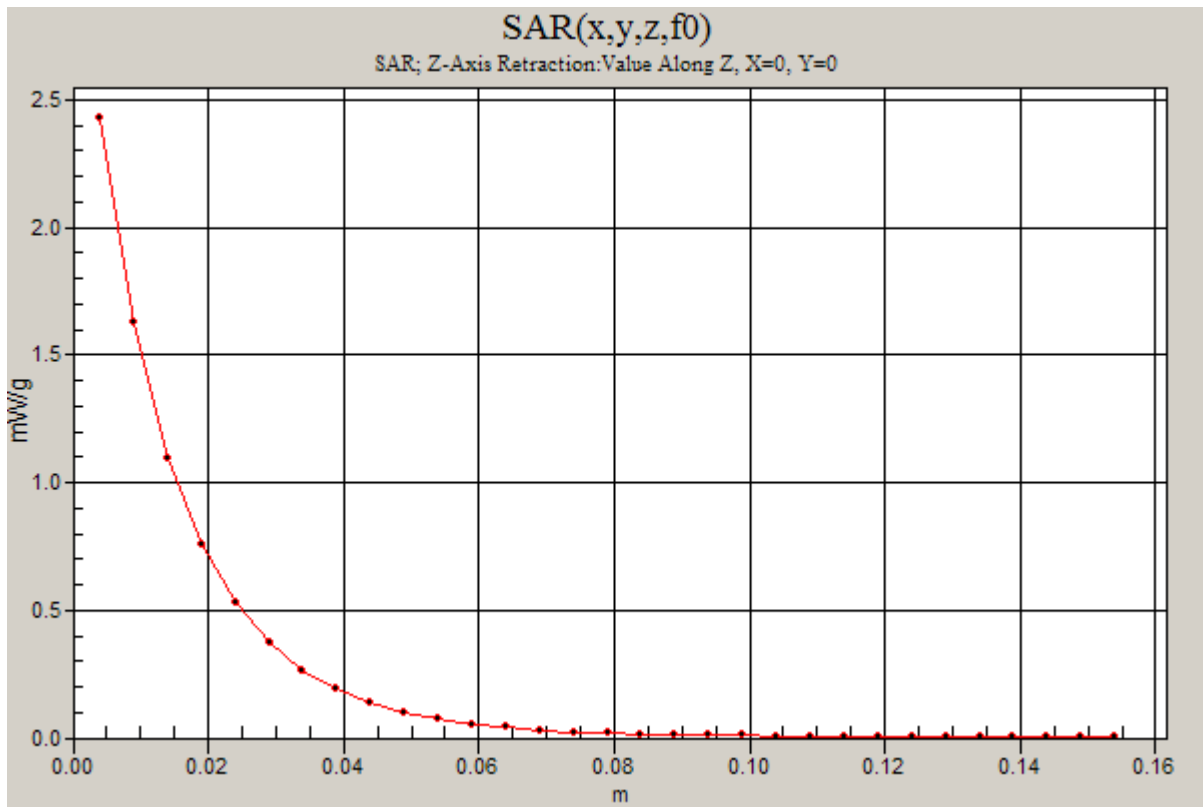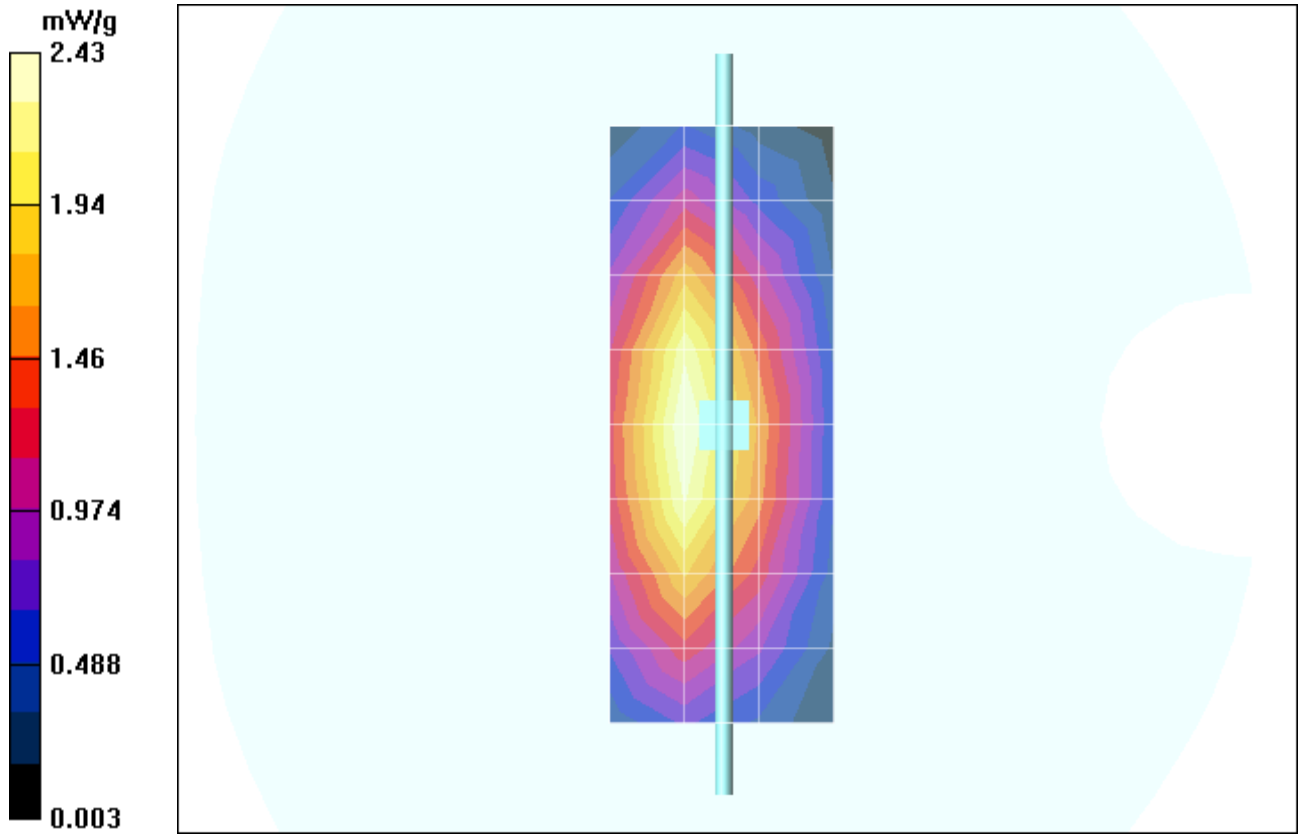

Date/Time: 10/21/2007 6:50:29 PM

Test Laboratory: Motorola - 102107 900MHz Good at -3.0%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 91; FCC ID: IHDP56HA2

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 91; Input Power = 200 mW

Sim.Temp@meas = 20.8 C; Sim.Temp@SPC = 20.8 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.32 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.8 V/m; Power Drift = -0.026 dB; Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 2.24 mW/g; SAR(10 g) = 1.46 mW/g; Maximum value of SAR (measured) = 2.41 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.8 V/m; Power Drift = -0.026 dB; Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 2.12 mW/g; SAR(10 g) = 1.37 mW/g; Maximum value of SAR (measured) = 2.30 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.43 mW/g

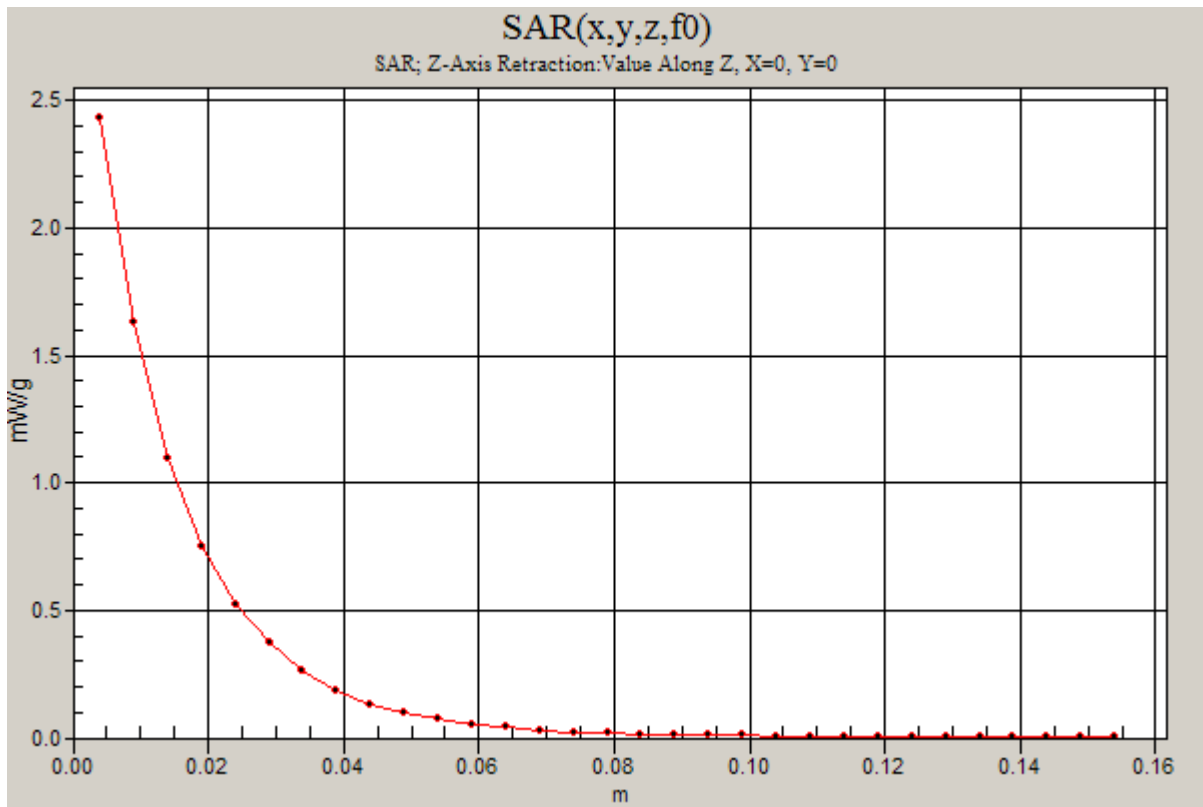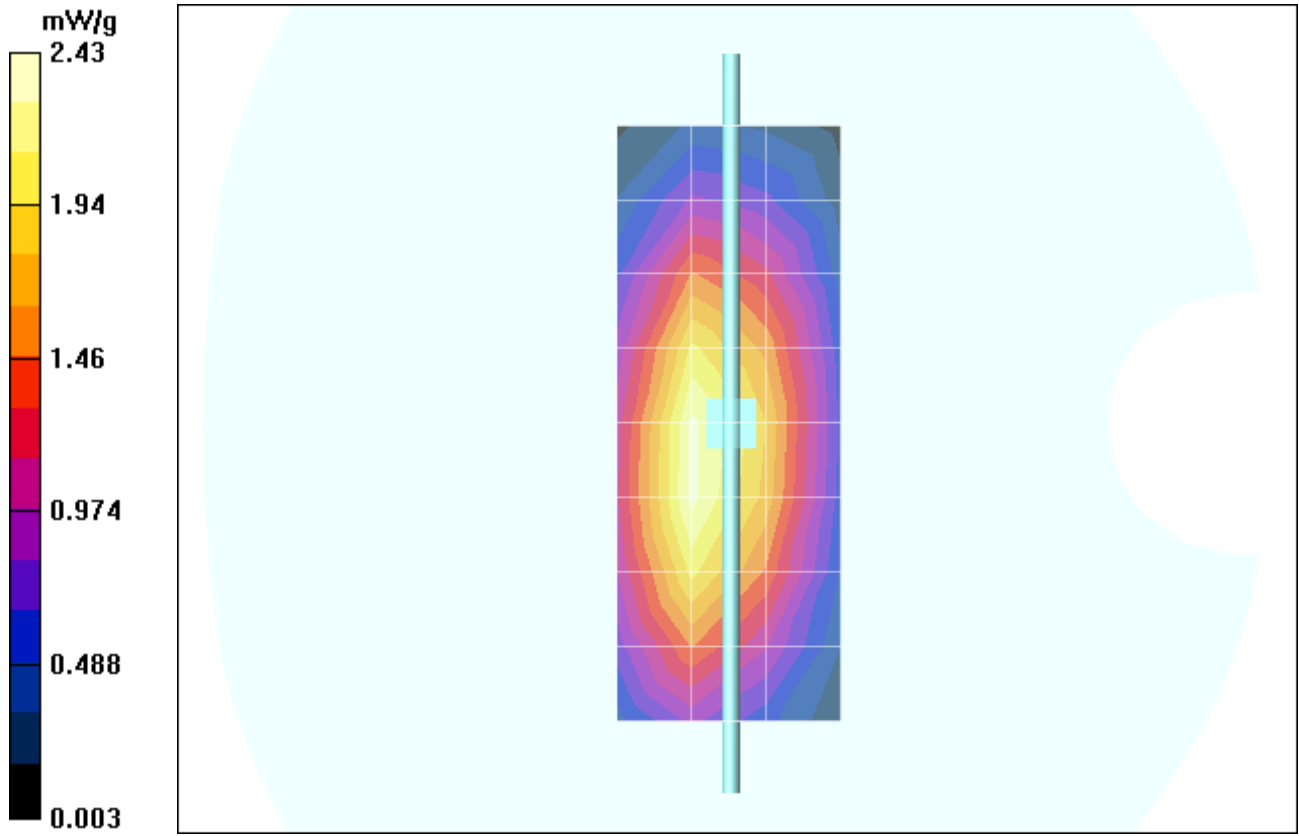

Date/Time: 10/22/2007 8:38:49 AM

Test Laboratory: Motorola - 102207 900MHz Good at -2.1%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 91; FCC ID: IHDP56HA2

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 91; Input Power = 200 mW

Sim.Temp@meas = 19.6 C; Sim.Temp@SPC = 19.6 C; Room Temp @ SPC = 21 C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.23 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.1 V/m; Power Drift = -0.031 dB; Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.47 mW/g; Maximum value of SAR (measured) = 2.44 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.1 V/m; Power Drift = -0.031 dB; Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 2.14 mW/g; SAR(10 g) = 1.4 mW/g; Maximum value of SAR (measured) = 2.28 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.45 mW/g

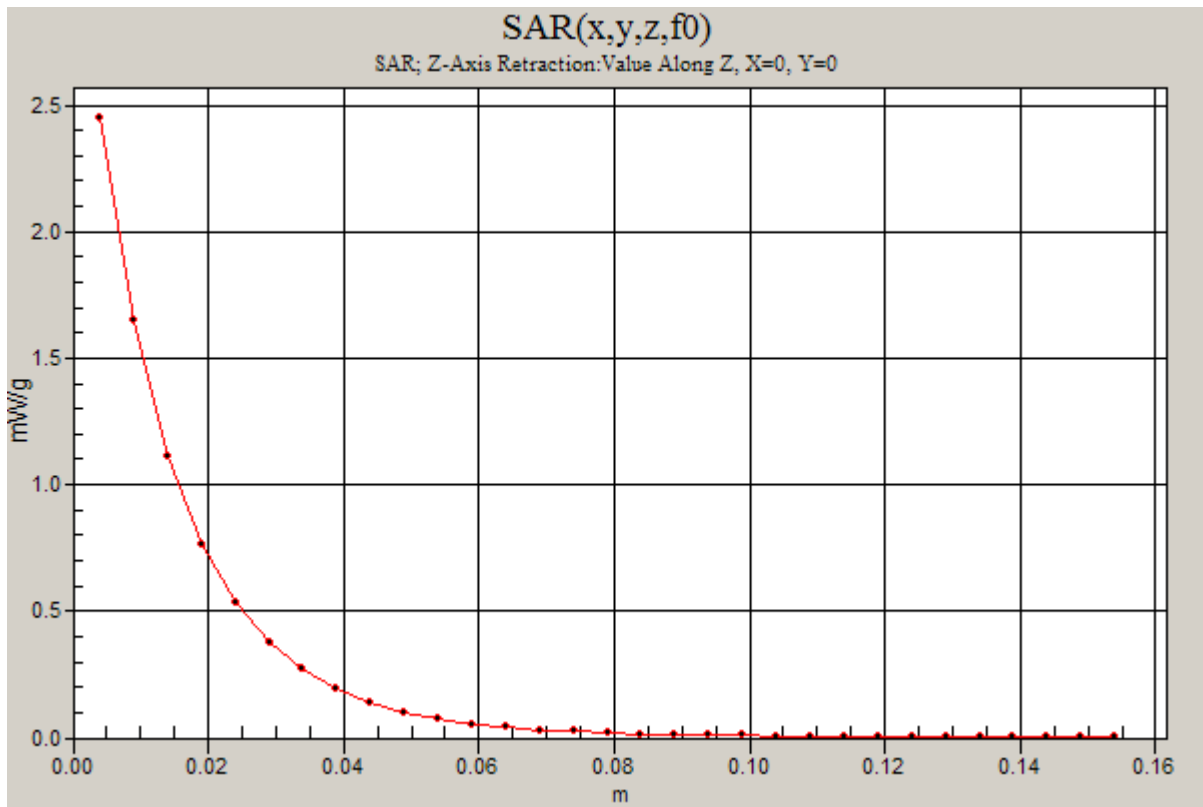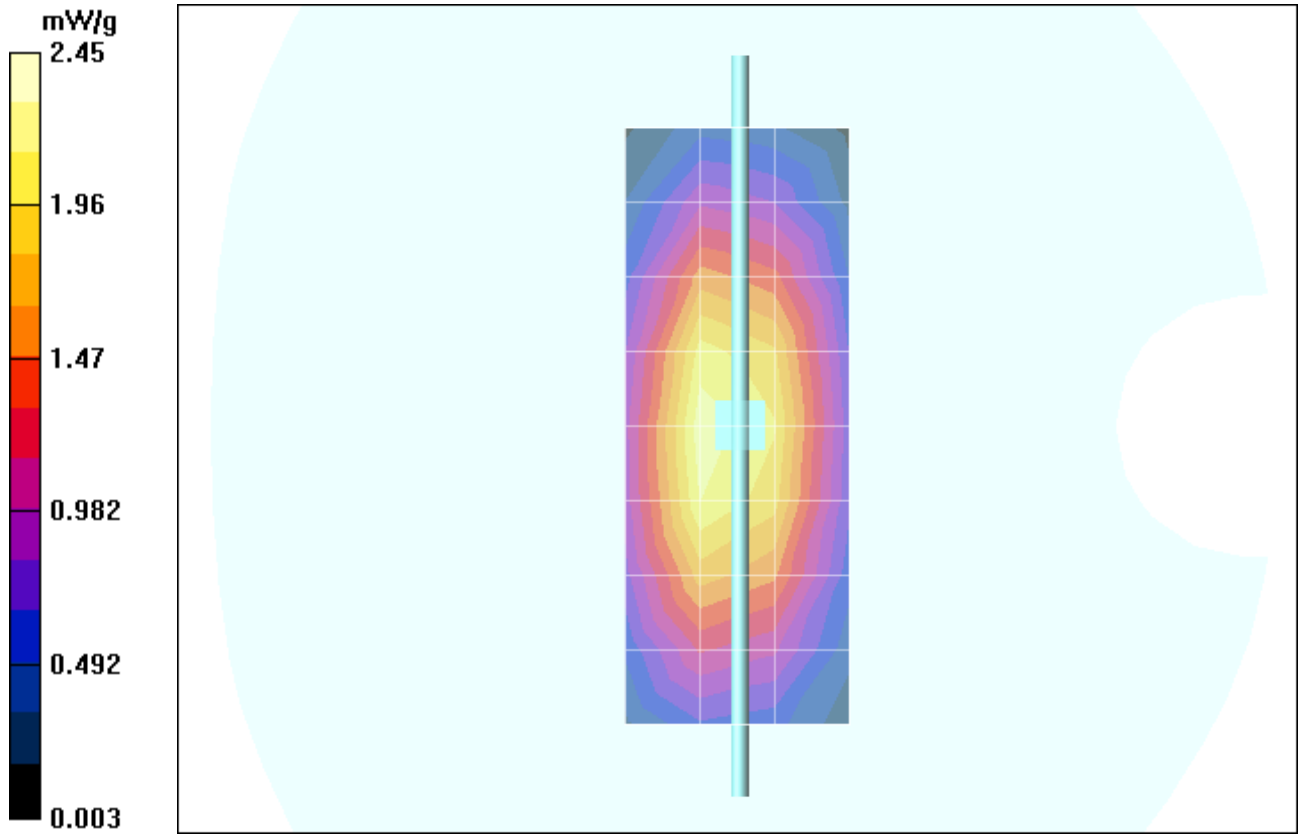

Date/Time: 10/25/2007 7:38:24 AM

Test Laboratory: Motorola - 102507 900MHz Good at -2.4%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 91; FCC ID: IHDP56HA2

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 91; Input Power = 200 mW

Sim.Temp@meas = 19 C; Sim.Temp@SPC = 19 C; Room Temp @ SPC = 20.7 C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.31 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.3 V/m; Power Drift = -0.034 dB; Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.47 mW/g; Maximum value of SAR (measured) = 2.45 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.3 V/m; Power Drift = -0.034 dB; Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 2.13 mW/g; SAR(10 g) = 1.39 mW/g; Maximum value of SAR (measured) = 2.28 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.46 mW/g

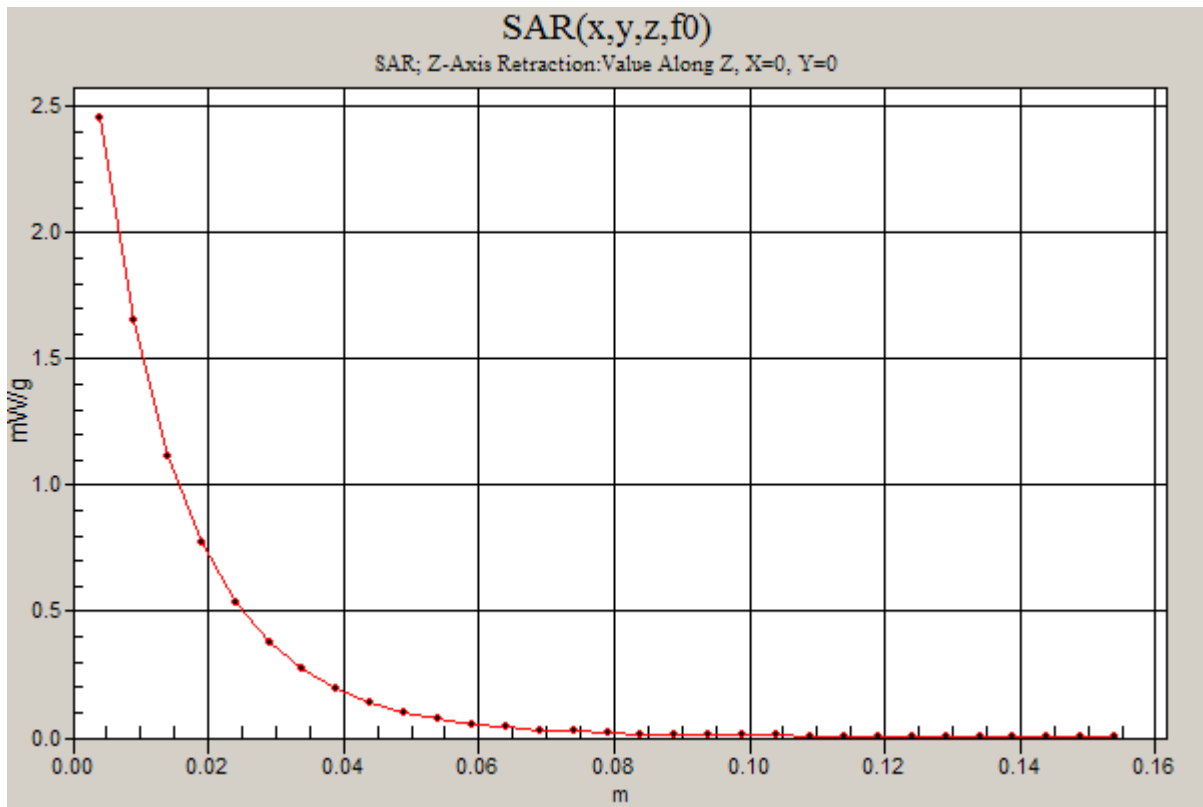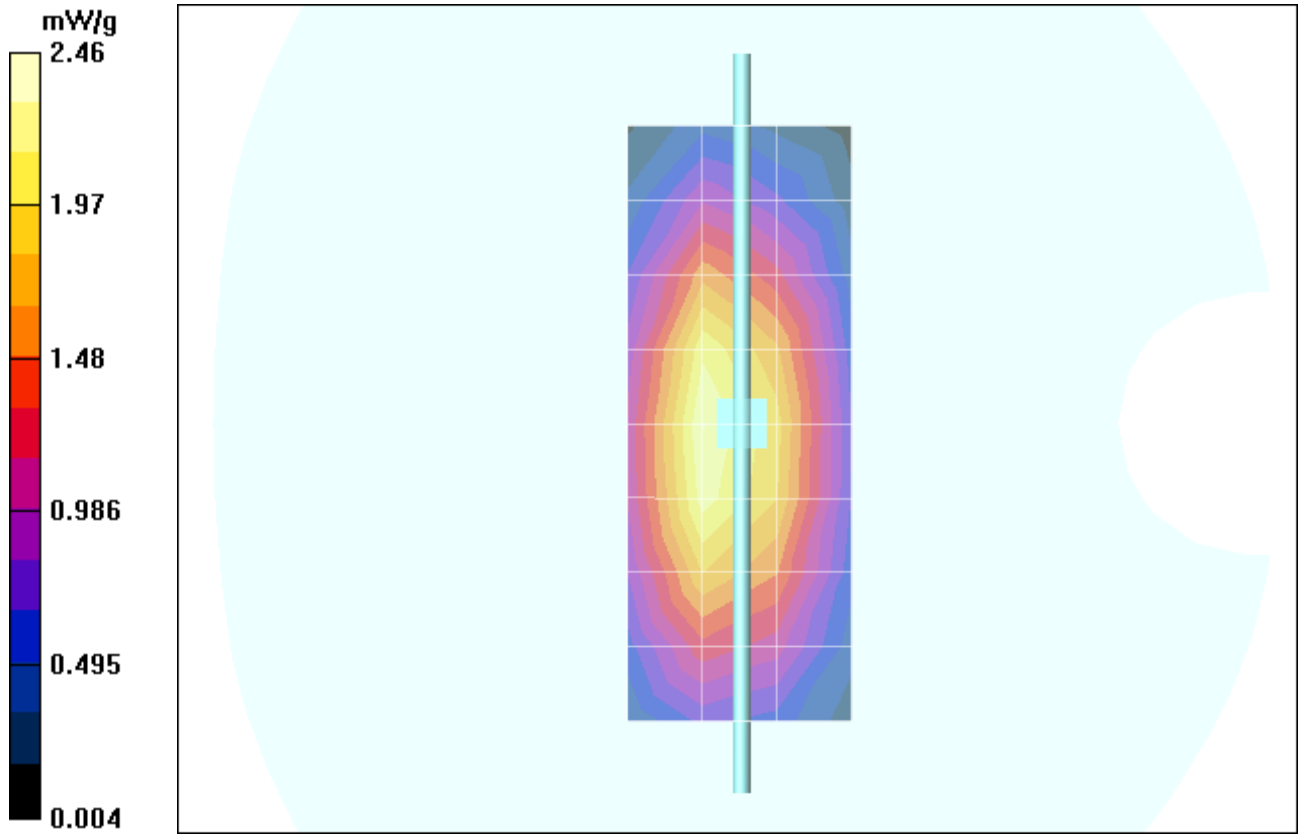

Date/Time: 10/11/2007 7:20:55 AM

Test Laboratory: Motorola - 101107 1800MHz Good at -3.0%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259tr; Input Power = 200 mW

Sim.Temp@meas = 19.7 C; Sim.Temp@SPC = 19.7 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 7.02 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.2 V/m; Power Drift = -0.034 dB; Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.48 mW/g; SAR(10 g) = 4.11 mW/g; Maximum value of SAR (measured) = 8.33 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.2 V/m; Power Drift = -0.034 dB; Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 7.07 mW/g; SAR(10 g) = 3.89 mW/g; Maximum value of SAR (measured) = 7.27 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.55 mW/g

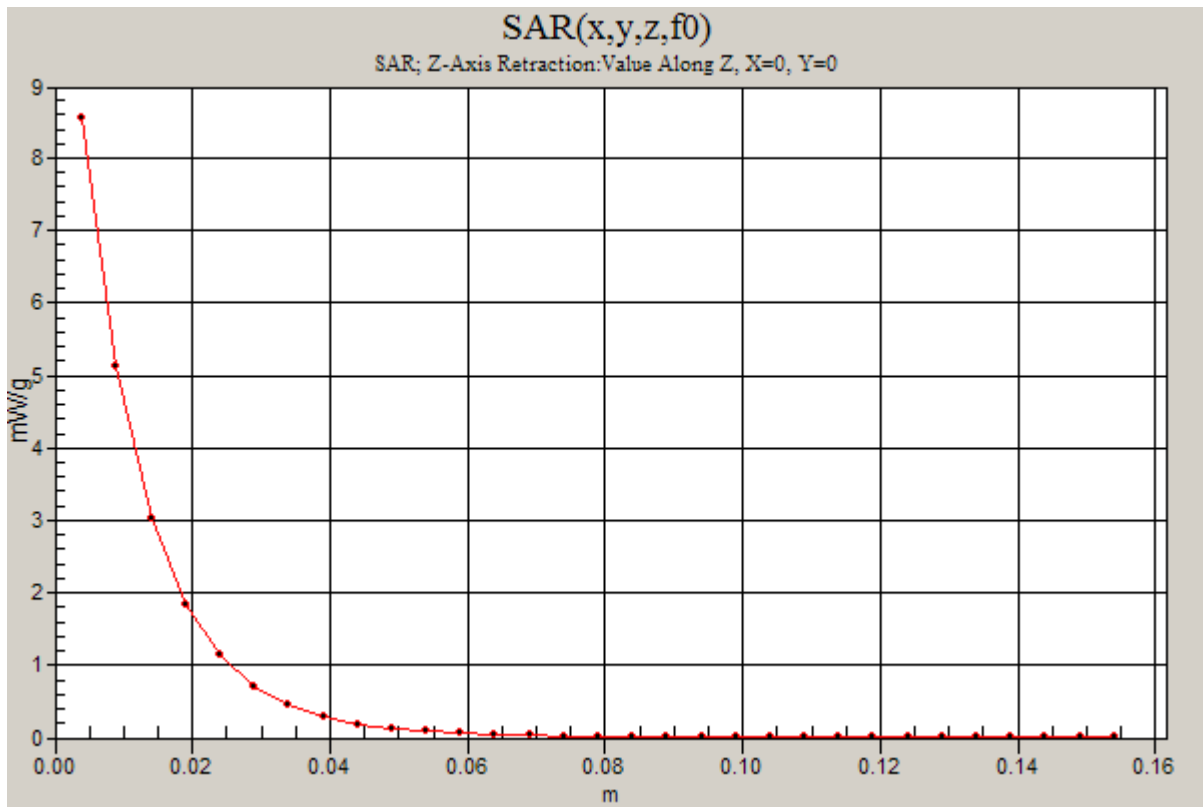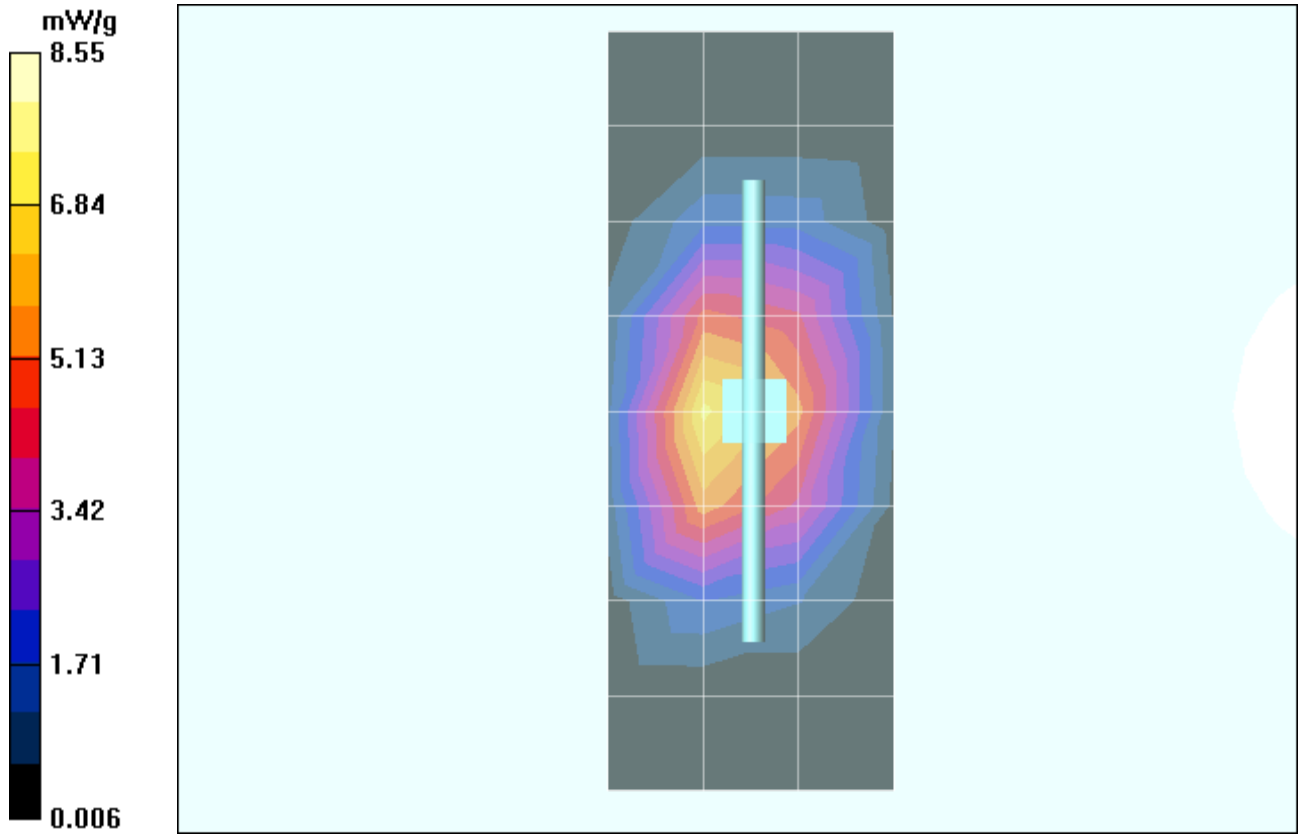

Date/Time: 10/14/2007 4:16:39 PM

Test Laboratory: Motorola - 101407 1800MHz Good at -.7%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259tr; Input Power = 200 mW

Sim.Temp@meas = 19.7 C; Sim.Temp@SPC = 19.7 C; Room Temp @ SPC = 20.7 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 6.77 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.3 V/m; Power Drift = -0.073 dB; Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 7.65 mW/g; SAR(10 g) = 4.14 mW/g; Maximum value of SAR (measured) = 8.59 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.3 V/m; Power Drift = -0.073 dB; Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 7.24 mW/g; SAR(10 g) = 3.93 mW/g; Maximum value of SAR (measured) = 7.54 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.62 mW/g

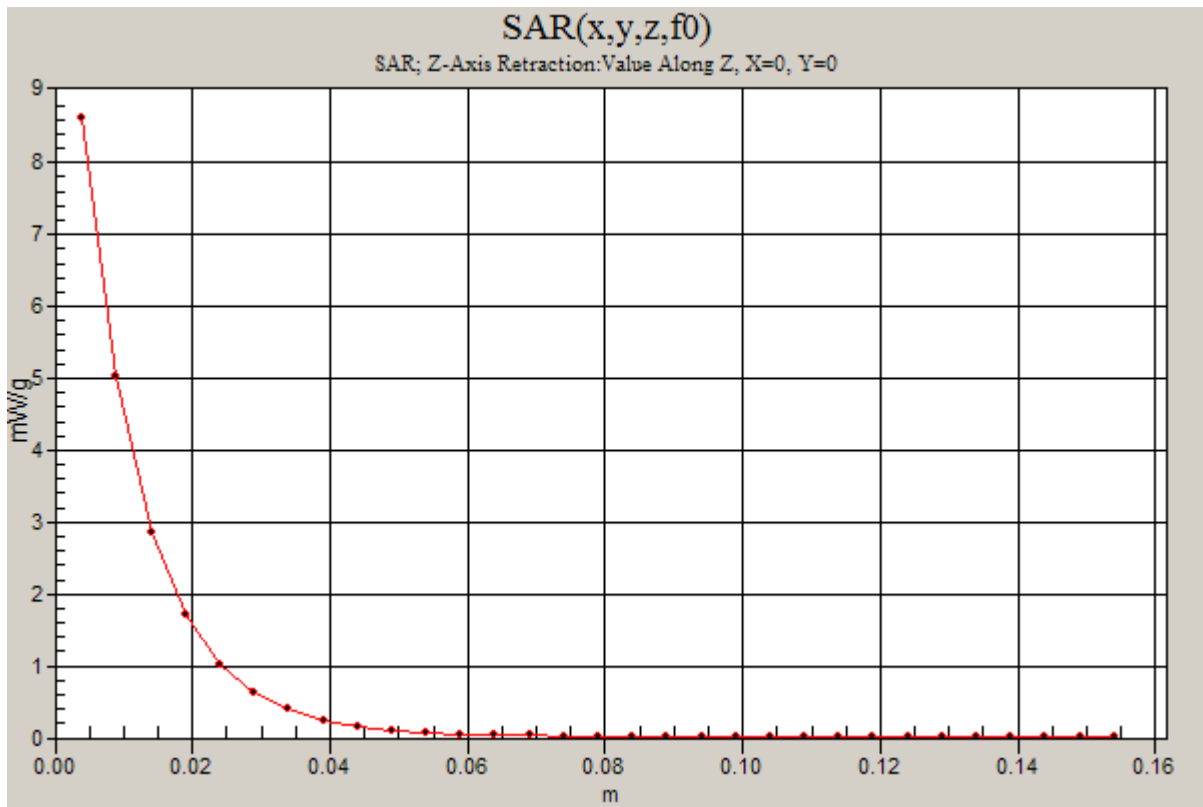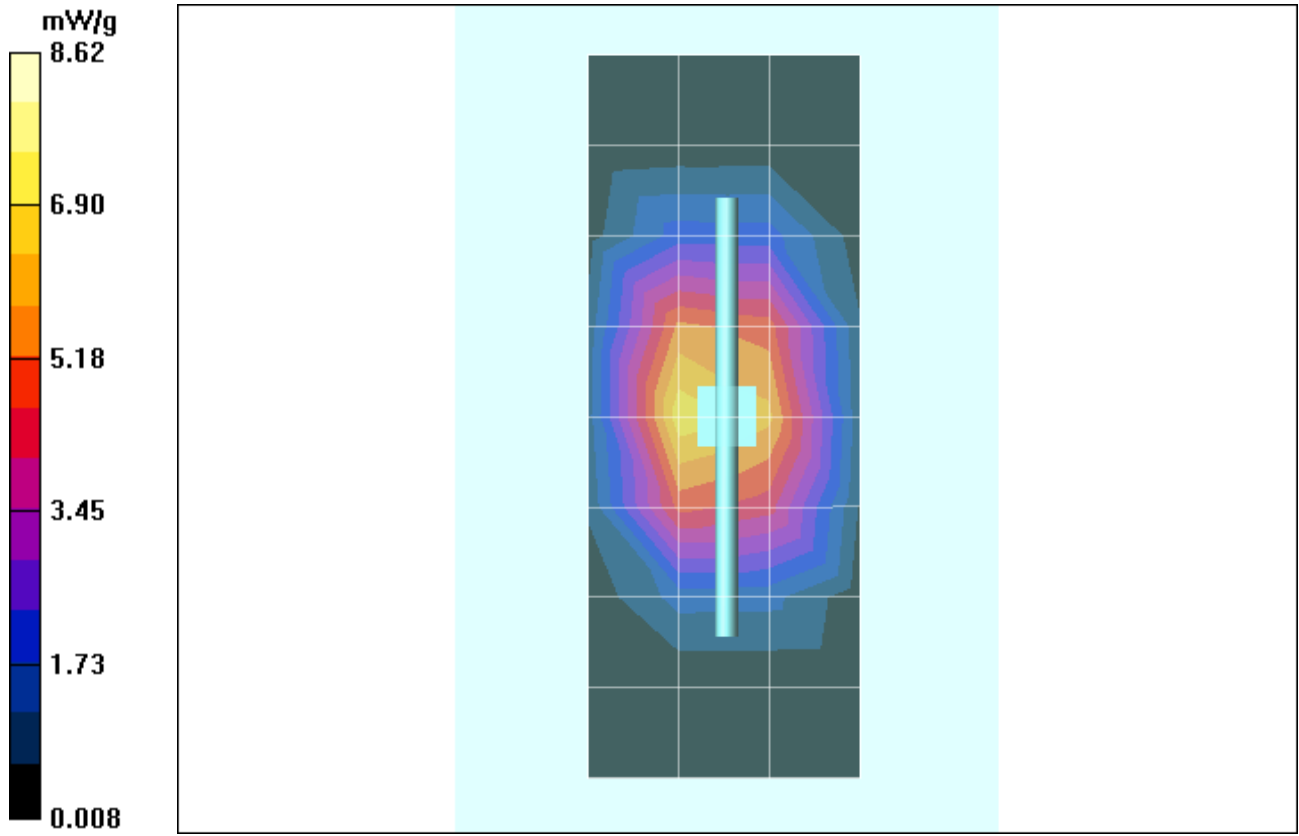

Date/Time: 10/16/2007 6:28:22 AM

Test Laboratory: Motorola - 101607 1800MHz Good at -.3%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259tr; Input Power = 200 mW

Sim.Temp@meas = 19.2 C; Sim.Temp@SPC = 19.7 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 7.33 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.4 V/m; Power Drift = -0.029 dB; Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 7.76 mW/g; SAR(10 g) = 4.22 mW/g; Maximum value of SAR (measured) = 8.68 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.4 V/m; Power Drift = -0.029 dB; Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 7.2 mW/g; SAR(10 g) = 3.94 mW/g; Maximum value of SAR (measured) = 7.97 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.73 mW/g

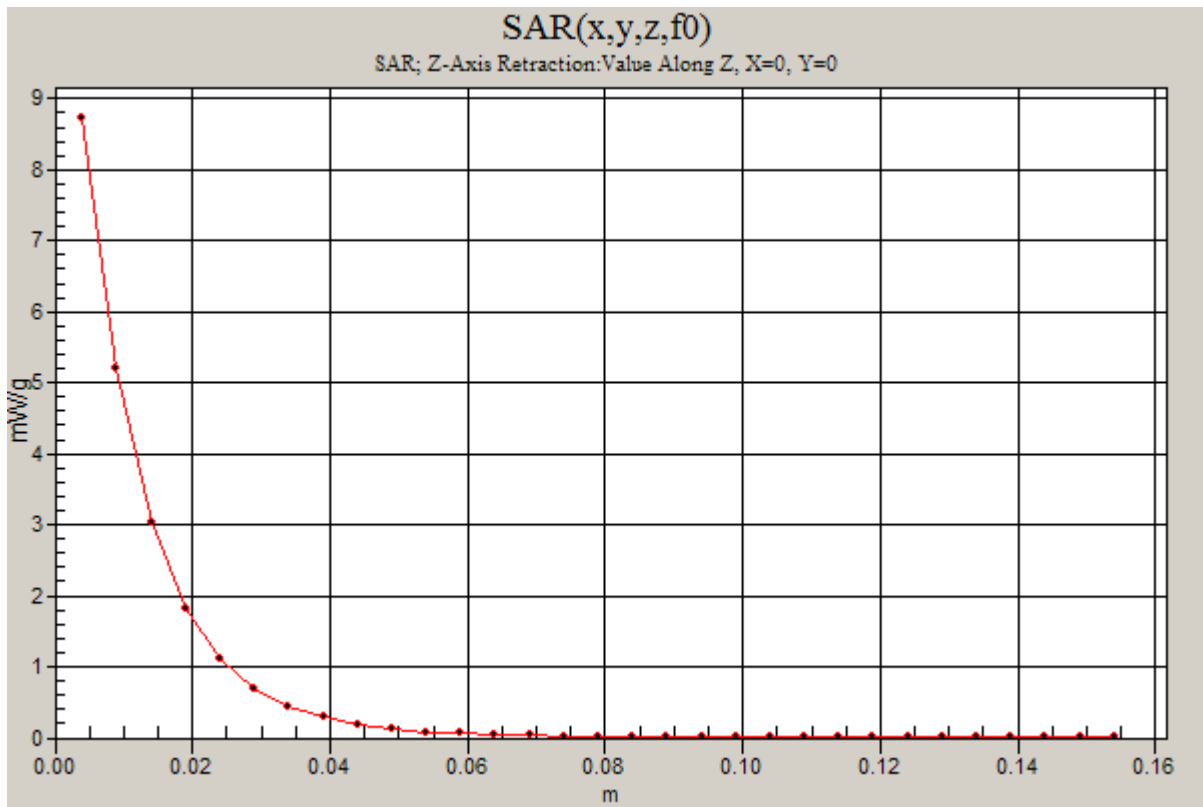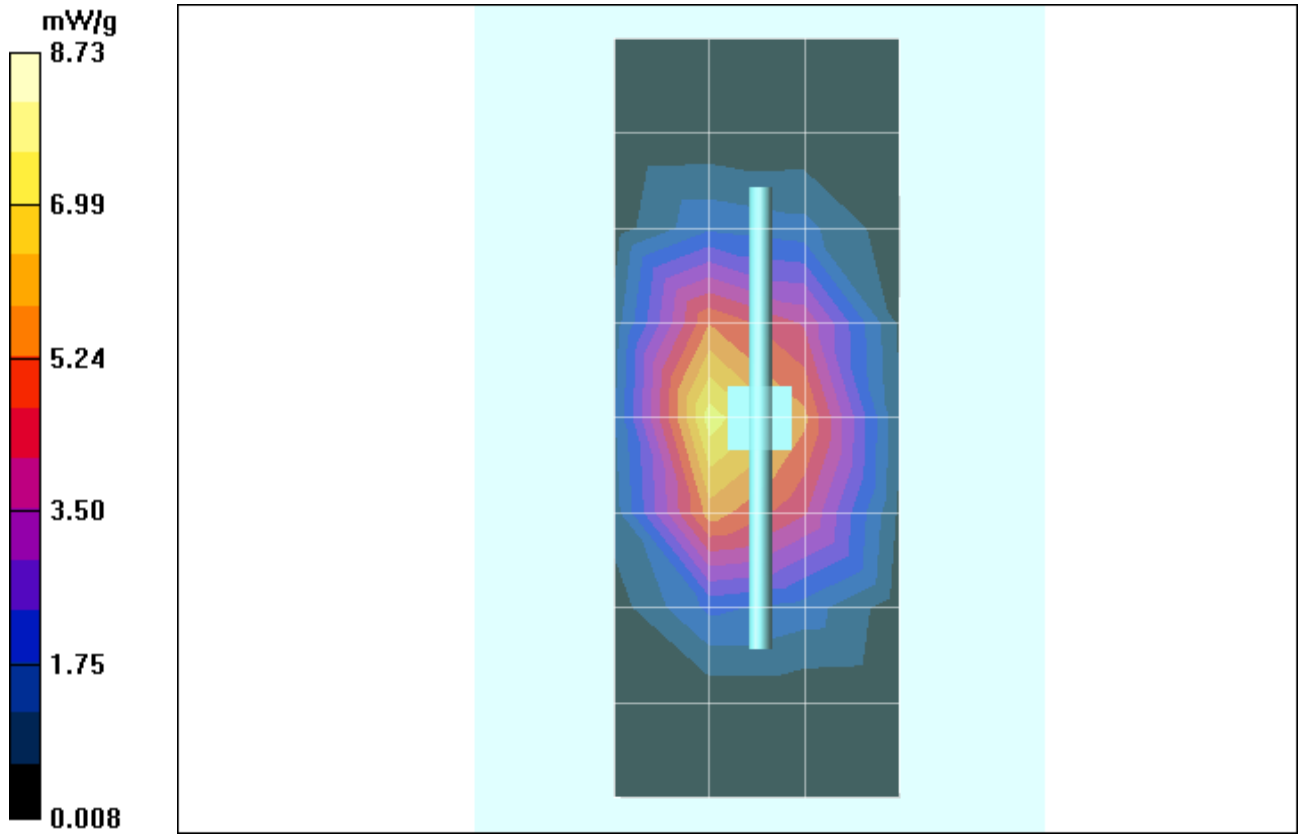

Date/Time: 10/17/2007 9:40:03 AM

Test Laboratory: Motorola - 101707 1800MHz Good at -4.0%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259tr; Input Power = 200 mW

Sim.Temp@meas = 20 C; Sim.Temp@SPC = 20 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R#1 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 6.14 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.4 V/m; Power Drift = 0.004 dB; Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 7.44 mW/g; SAR(10 g) = 4.07 mW/g; Maximum value of SAR (measured) = 8.39 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.4 V/m; Power Drift = 0.004 dB; Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 6.96 mW/g; SAR(10 g) = 3.86 mW/g; Maximum value of SAR (measured) = 7.56 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.43 mW/g

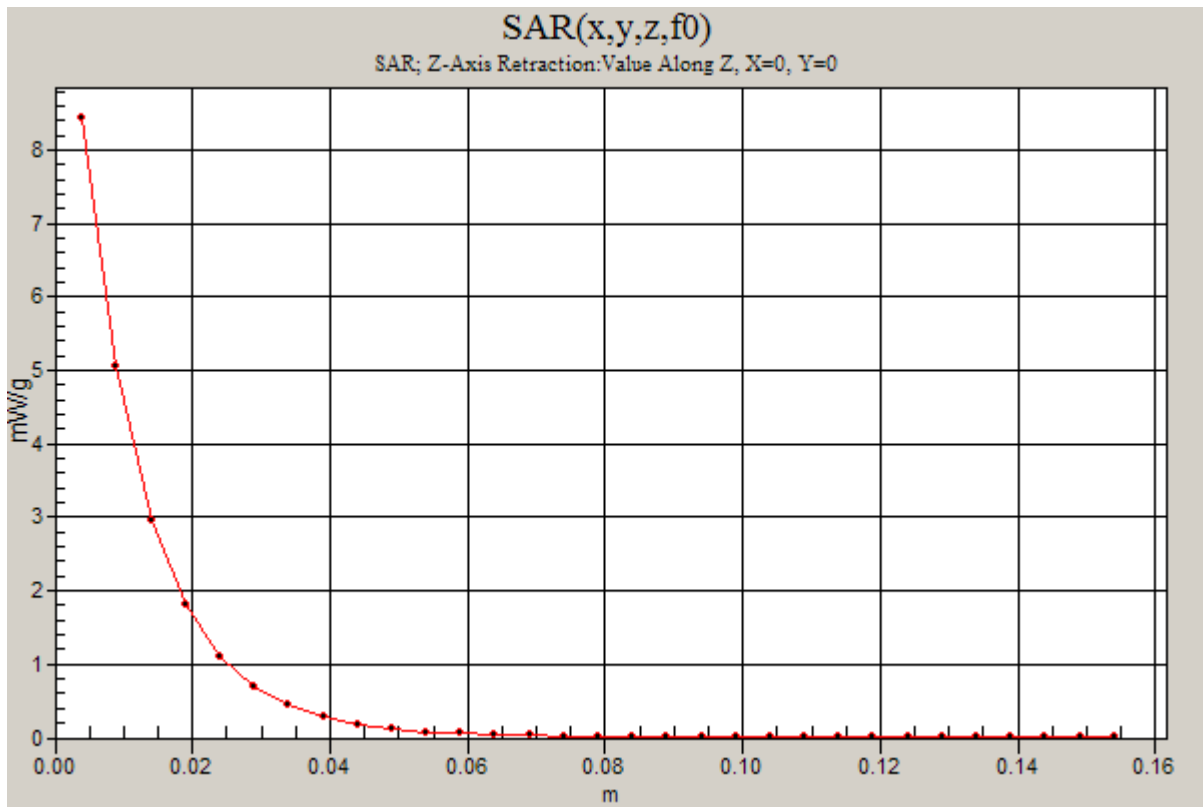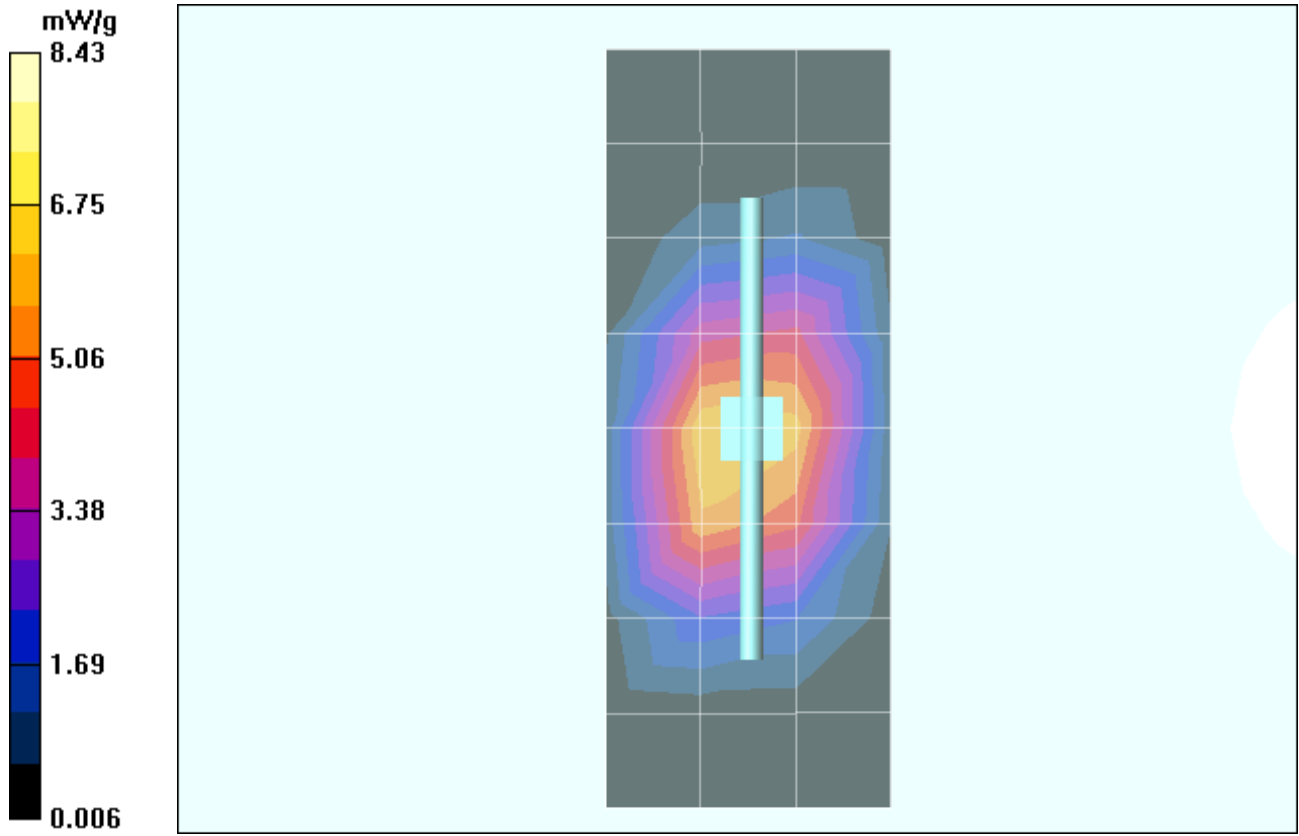

Date/Time: 10/18/2007 6:37:06 AM

Test Laboratory: Motorola - 101807 1800MHz Good at -3.3%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259tr; Input Power = 200 mW

Sim.Temp@meas = 19.9 C; Sim.Temp@SPC = 20 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 6.98 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.7 V/m; Power Drift = -0.021 dB; Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 7.42 mW/g; SAR(10 g) = 4.04 mW/g; Maximum value of SAR (measured) = 8.36 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.7 V/m; Power Drift = -0.021 dB; Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 7.08 mW/g; SAR(10 g) = 3.88 mW/g; Maximum value of SAR (measured) = 7.79 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.38 mW/g

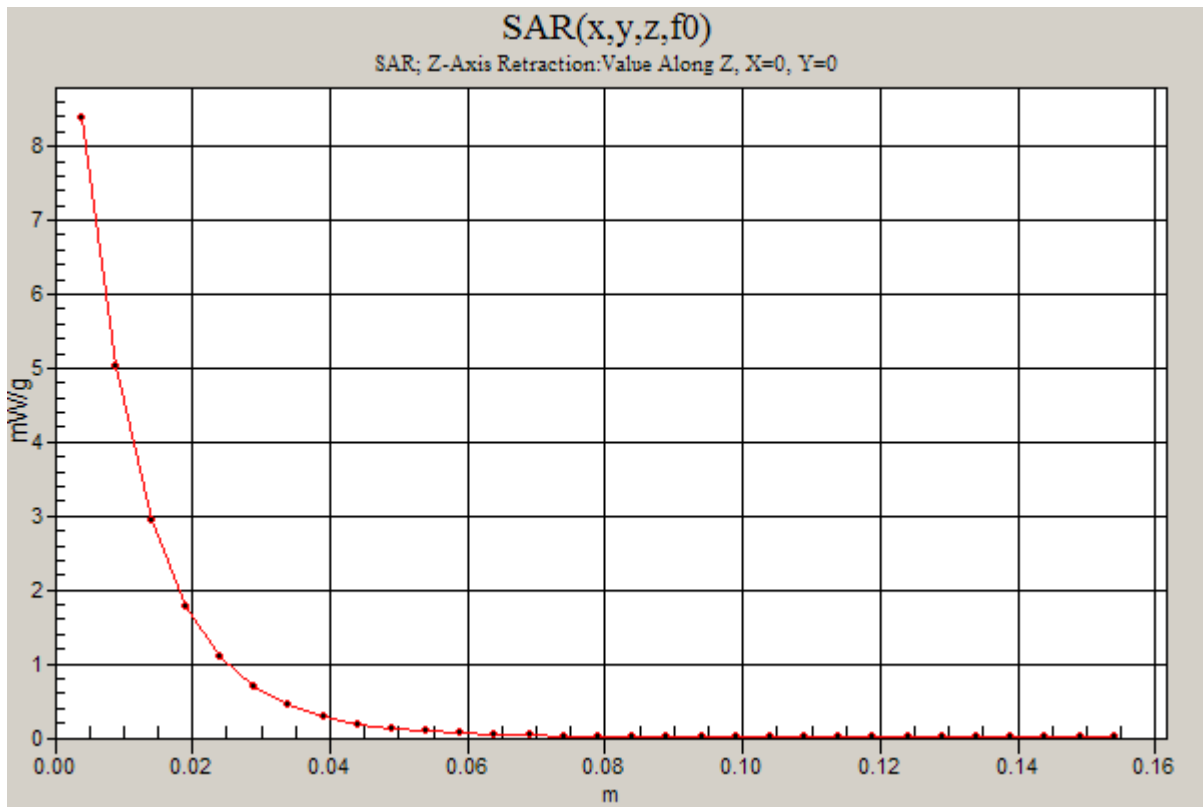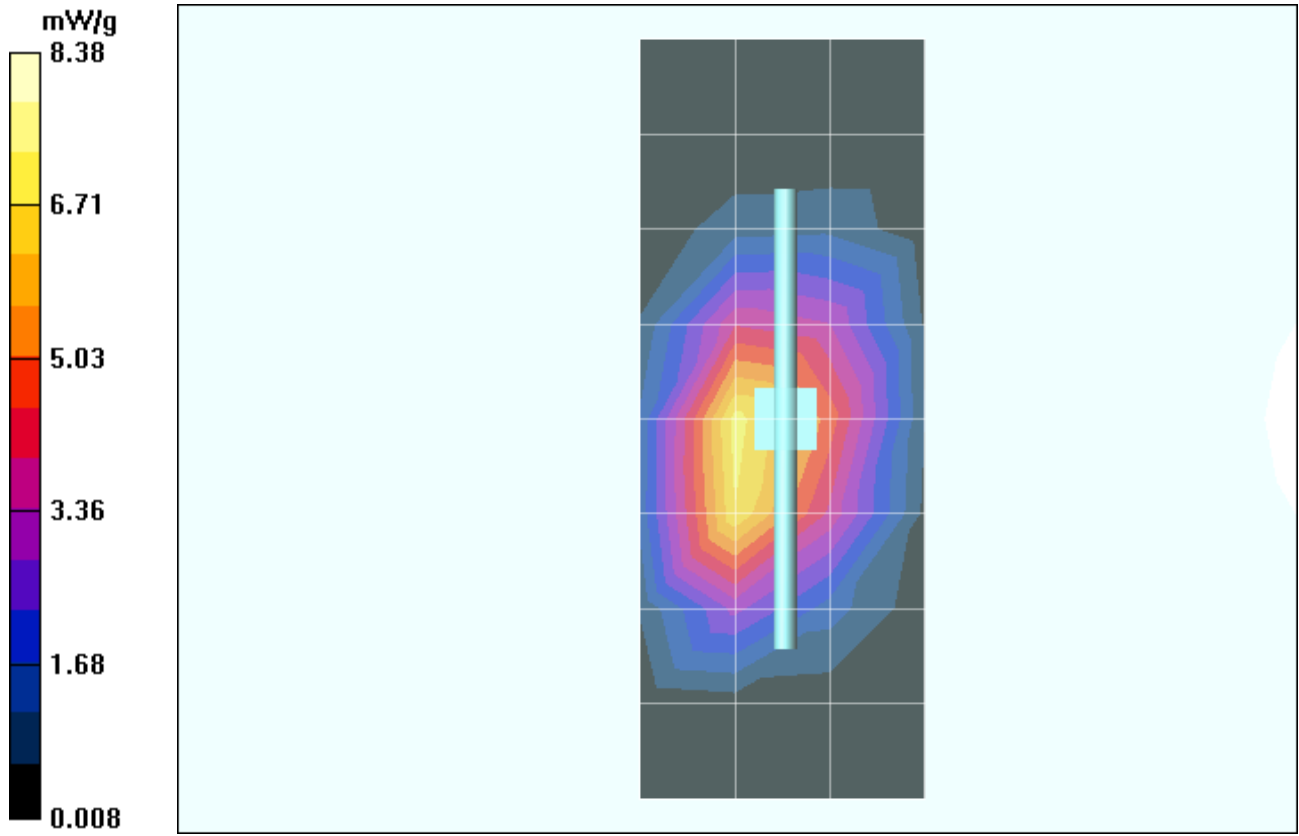

Date/Time: 10/19/2007 9:48:45 AM

Test Laboratory: Motorola - 101907 1800MHz Good at -3.5%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259TR; Input Power = 200 mW

Sim.Temp@meas = 20 C; Sim.Temp@SPC = 20 C; Room Temp @ SPC = 20.7 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 7.27 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80.6 V/m; Power Drift = 0.003 dB; Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 7.47 mW/g; SAR(10 g) = 4.09 mW/g; Maximum value of SAR (measured) = 8.31 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80.6 V/m; Power Drift = 0.003 dB; Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 7.01 mW/g; SAR(10 g) = 3.87 mW/g; Maximum value of SAR (measured) = 7.42 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.51 mW/g

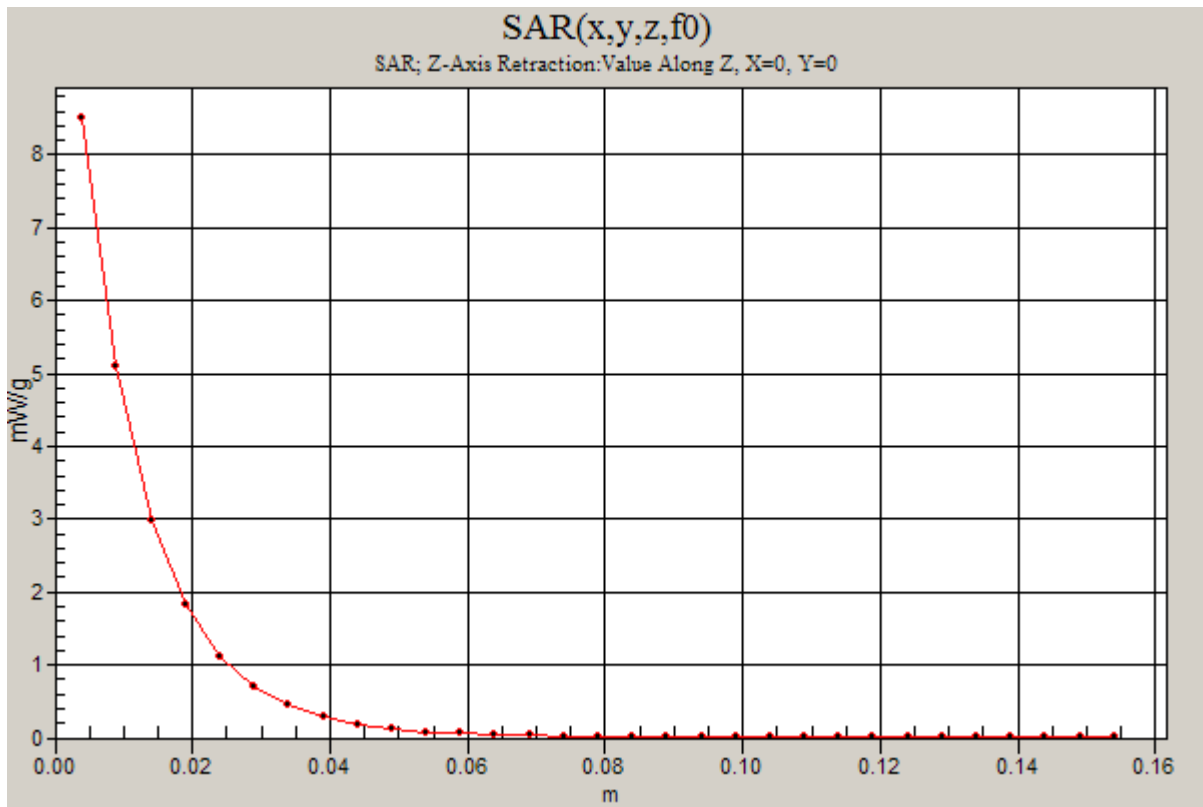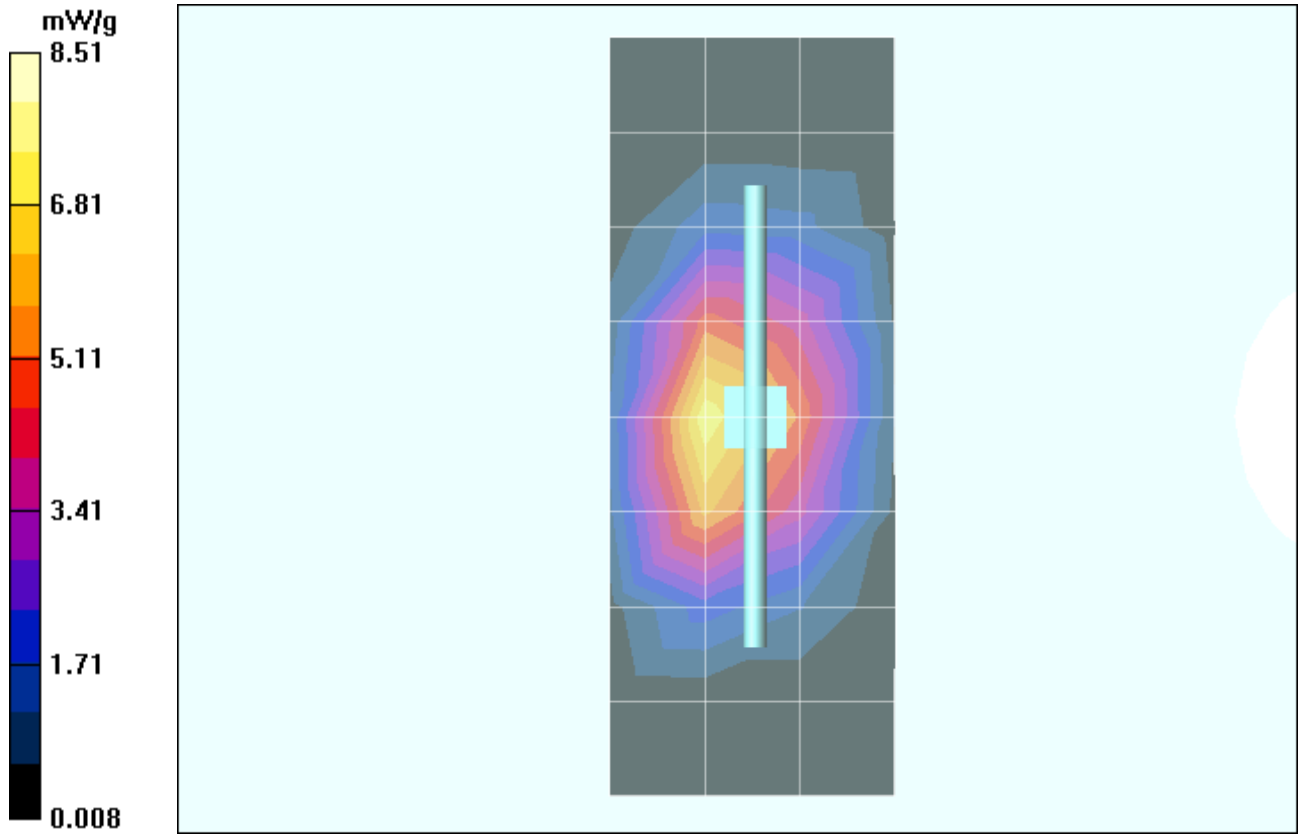

Date/Time: 10/22/2007 7:55:33 AM

Test Laboratory: Motorola - 102207 1800MHz Good at -2.7%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259tr; Input Power = 200 mW

Sim.Temp@meas = 19.5 C; Sim.Temp@SPC = 19.5 C; Room Temp @ SPC = 21.0 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 7.51 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80.0 V/m; Power Drift = -0.060 dB; Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.47 mW/g; SAR(10 g) = 4.09 mW/g; Maximum value of SAR (measured) = 8.41 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80.0 V/m; Power Drift = -0.060 dB; Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 7.12 mW/g; SAR(10 g) = 3.91 mW/g; Maximum value of SAR (measured) = 7.90 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.49 mW/g

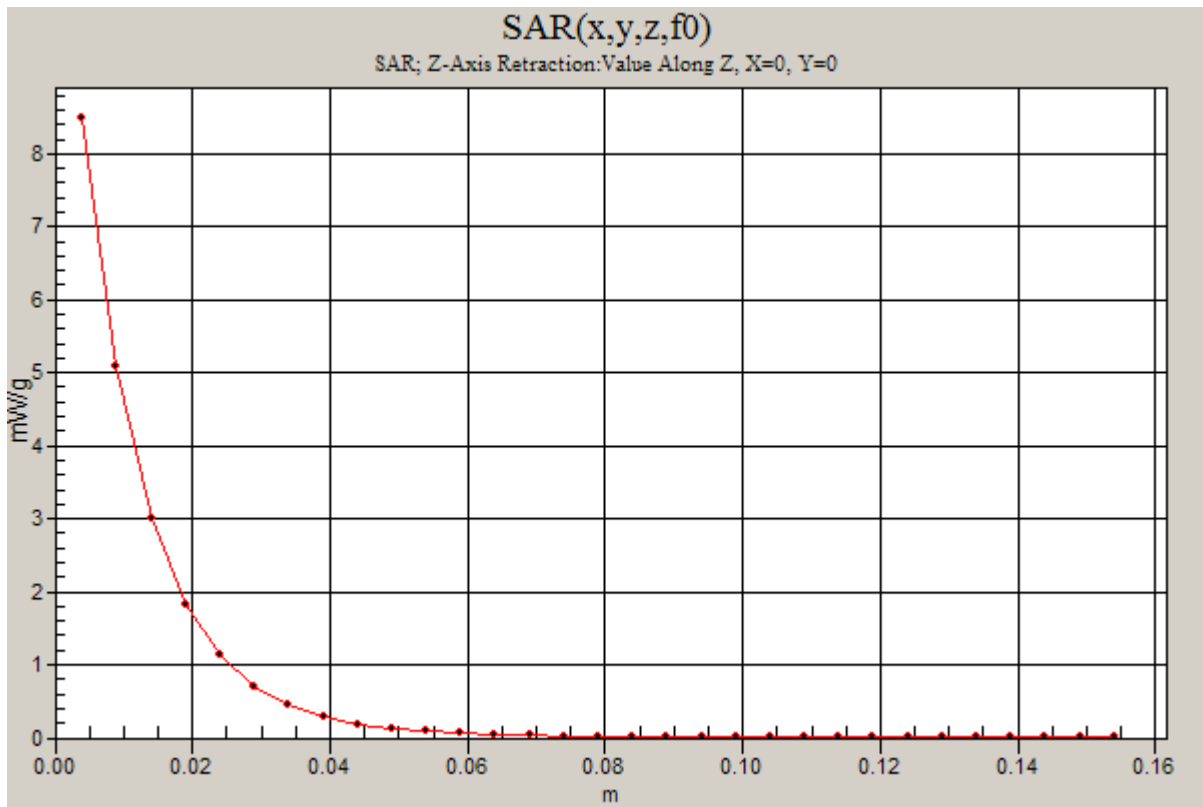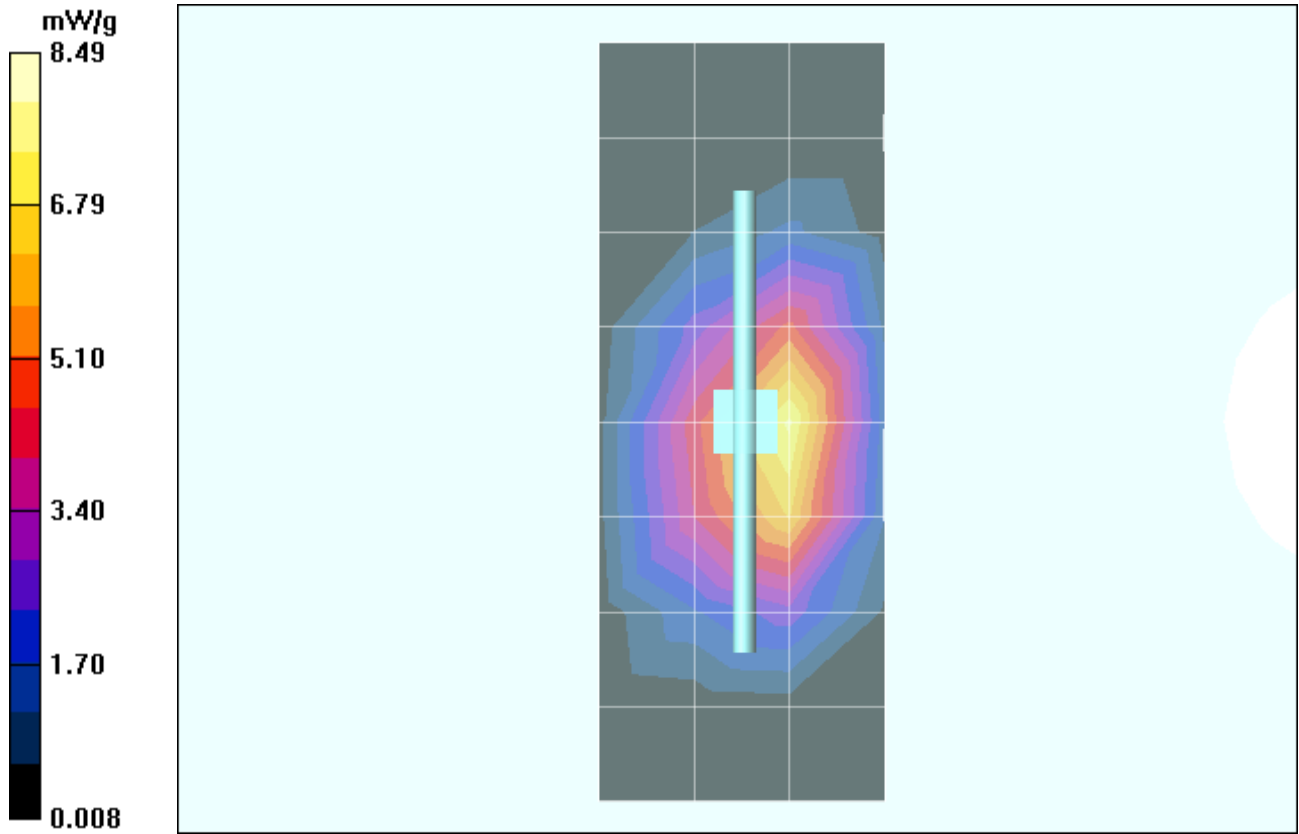

Date/Time: 5/27/2008 11:10:53 AM

Test Laboratory: Motorola - 052708 1800MHz Good at -3.0%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259TR; Input Power = 200 mW

Sim.Temp@meas = 19.3 C; Sim.Temp@SPC = 19.3 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.92, 4.92, 4.92); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 7.94 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.1 V/m; Power Drift = -0.003 dB; Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 7.45 mW/g; SAR(10 g) = 3.99 mW/g; Maximum value of SAR (measured) = 8.25 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.1 V/m; Power Drift = -0.003 dB; Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.18 mW/g; SAR(10 g) = 3.88 mW/g; Maximum value of SAR (measured) = 7.84 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.37 mW/g

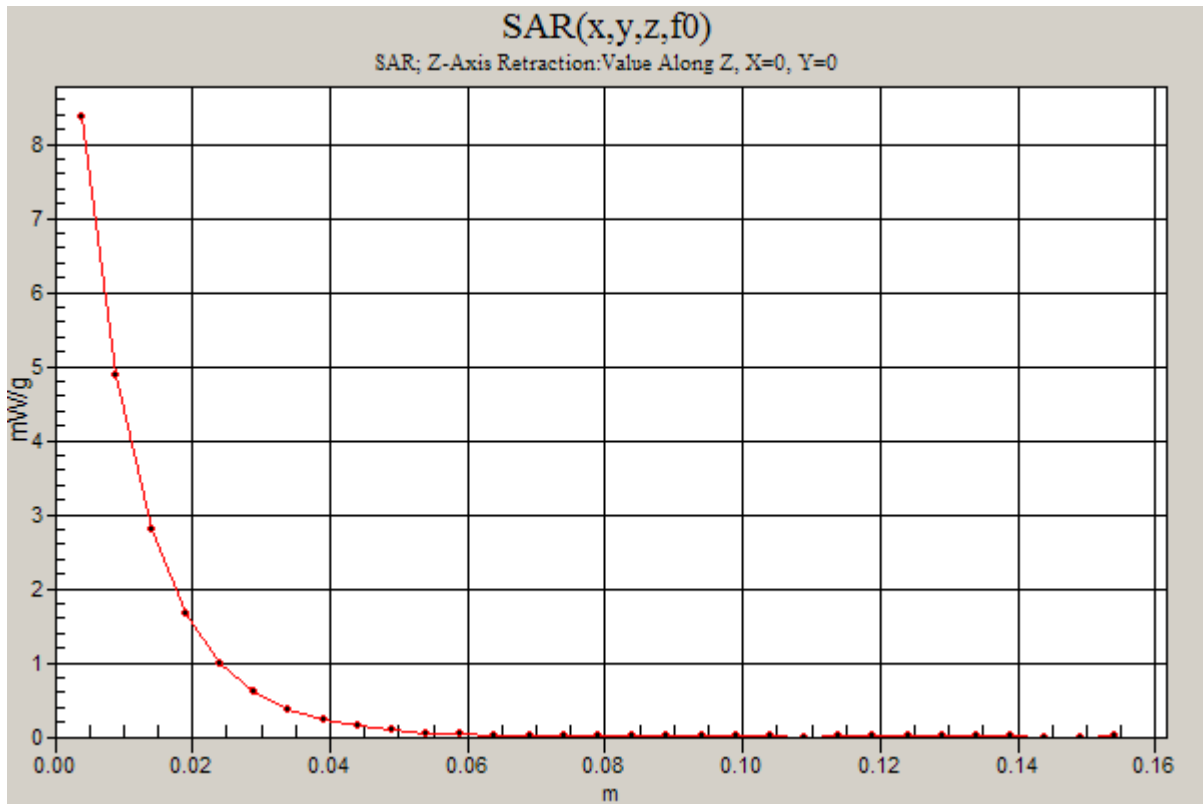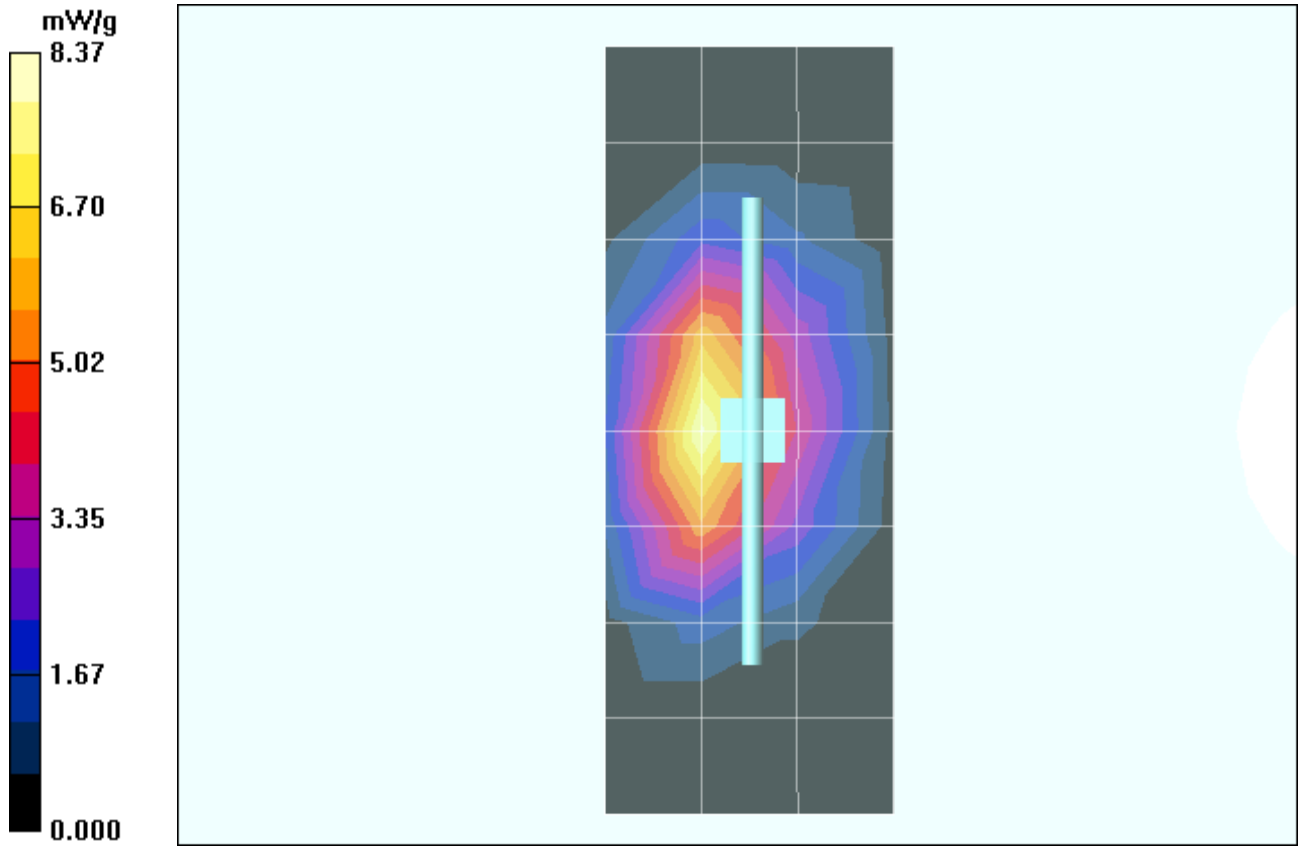

Date/Time: 6/2/2008 5:09:20 PM

Test Laboratory: Motorola - 060208 1800MHz Good at -5.5%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 259TR; FCC ID: IHDP56HA2

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 259TR; Input Power = 200 mW

Sim.Temp@meas = 20.0 C; Sim.Temp@SPC = 20.0 C; Room Temp @ SPC = 20.6 C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.92, 4.92, 4.92); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 6.63 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.8 V/m; Power Drift = 0.023 dB; Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.2 mW/g; SAR(10 g) = 3.88 mW/g; Maximum value of SAR (measured) = 8.11 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.8 V/m; Power Drift = 0.023 dB; Peak SAR (extrapolated) = 12.0 W/kg

SAR(1 g) = 7.05 mW/g; SAR(10 g) = 3.81 mW/g; Maximum value of SAR (measured) = 7.65 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.15 mW/g

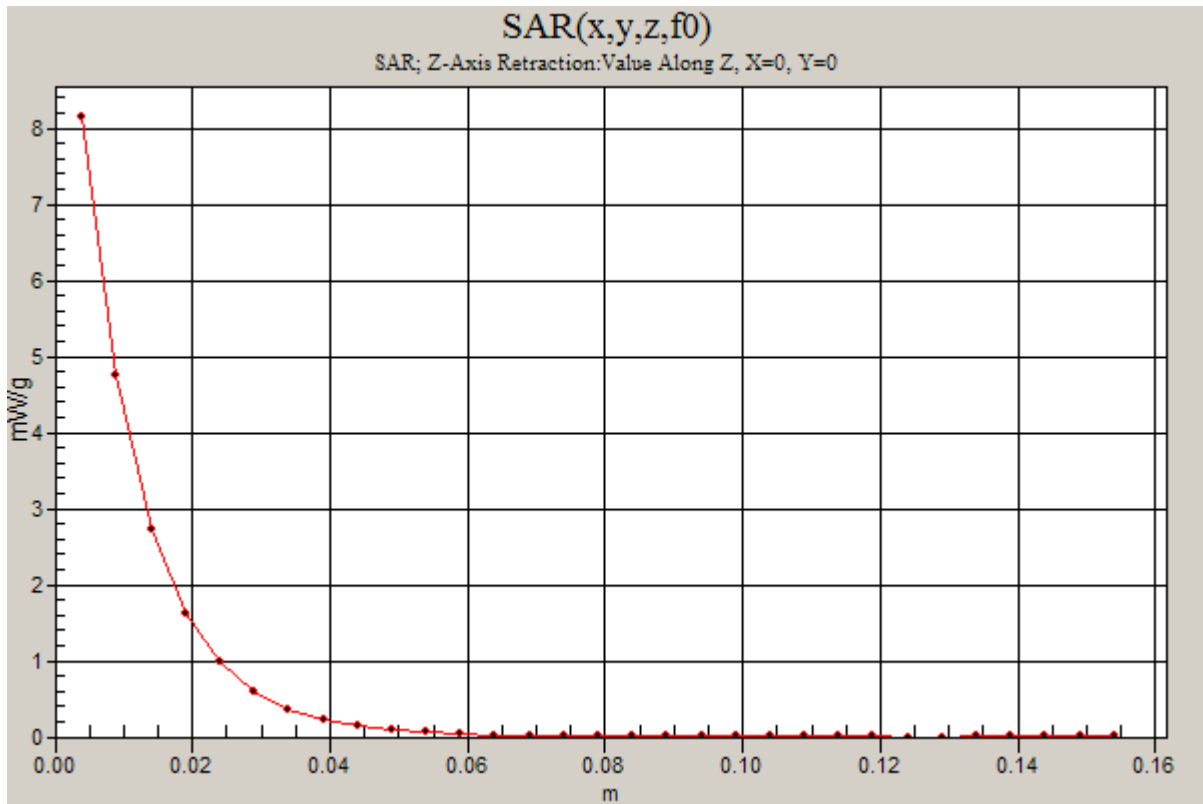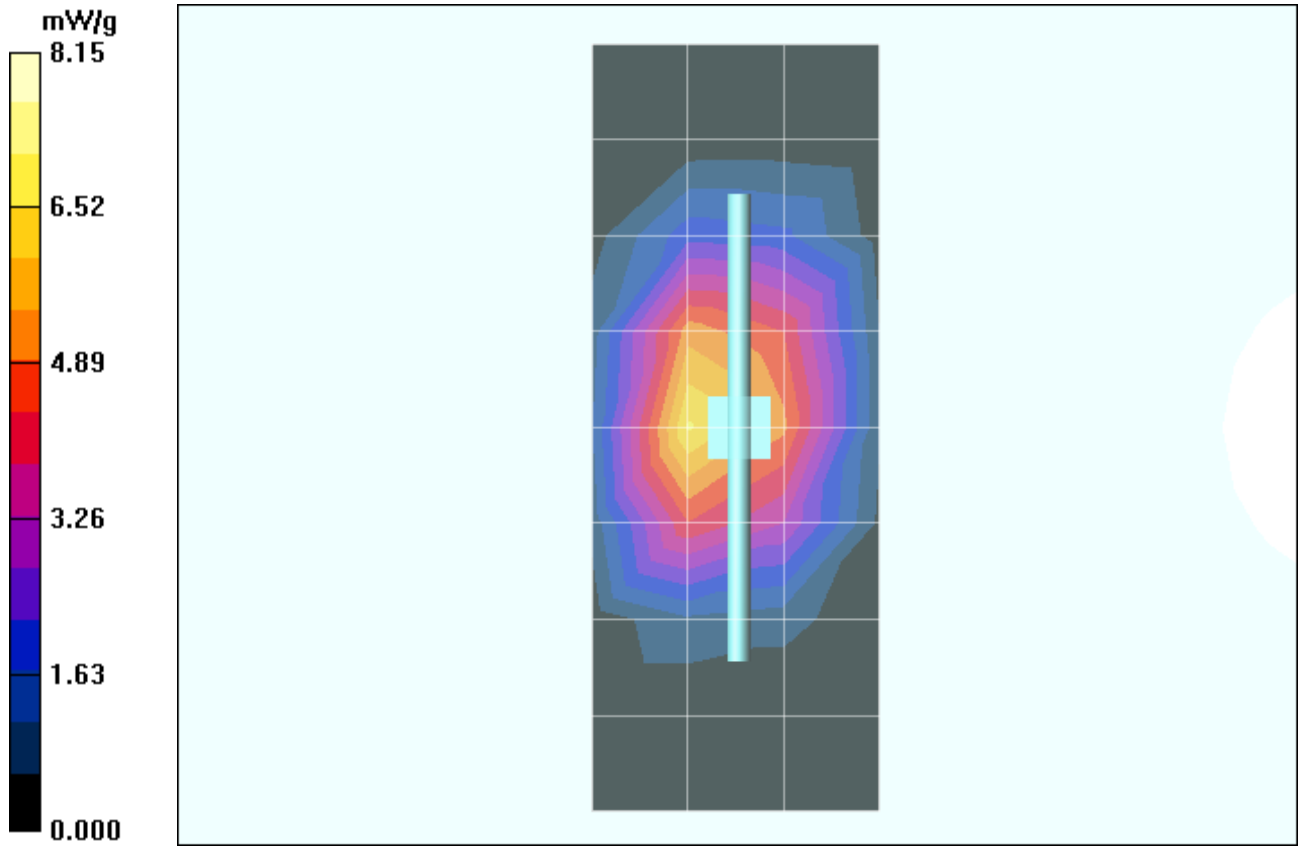

Date/Time: 10/26/2007 12:01:17 PM

Test Laboratory: Motorola - 102607 2450MHz Good at+0.0% open

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 740; FCC ID: IHDP56HA2

Procedure Notes: 2450 MHz System Performance Check; Dipole Sn# 740; Input Power = 200 mW

Sim.Temp@meas = 20.9 C; Sim.Temp@SPC = 20.9 C; Room Temp @ SPC = 21 C

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(4.56, 4.56, 4.56); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R#1 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 9.78 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.5 V/m; Power Drift = -0.079 dB; Peak SAR (extrapolated) = 25.7 W/kg

SAR(1 g) = 11.9 mW/g; SAR(10 g) = 5.55 mW/g; Maximum value of SAR (measured) = 13.4 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.5 V/m; Power Drift = -0.079 dB; Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 11.3 mW/g; SAR(10 g) = 5.26 mW/g; Maximum value of SAR (measured) = 12.3 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

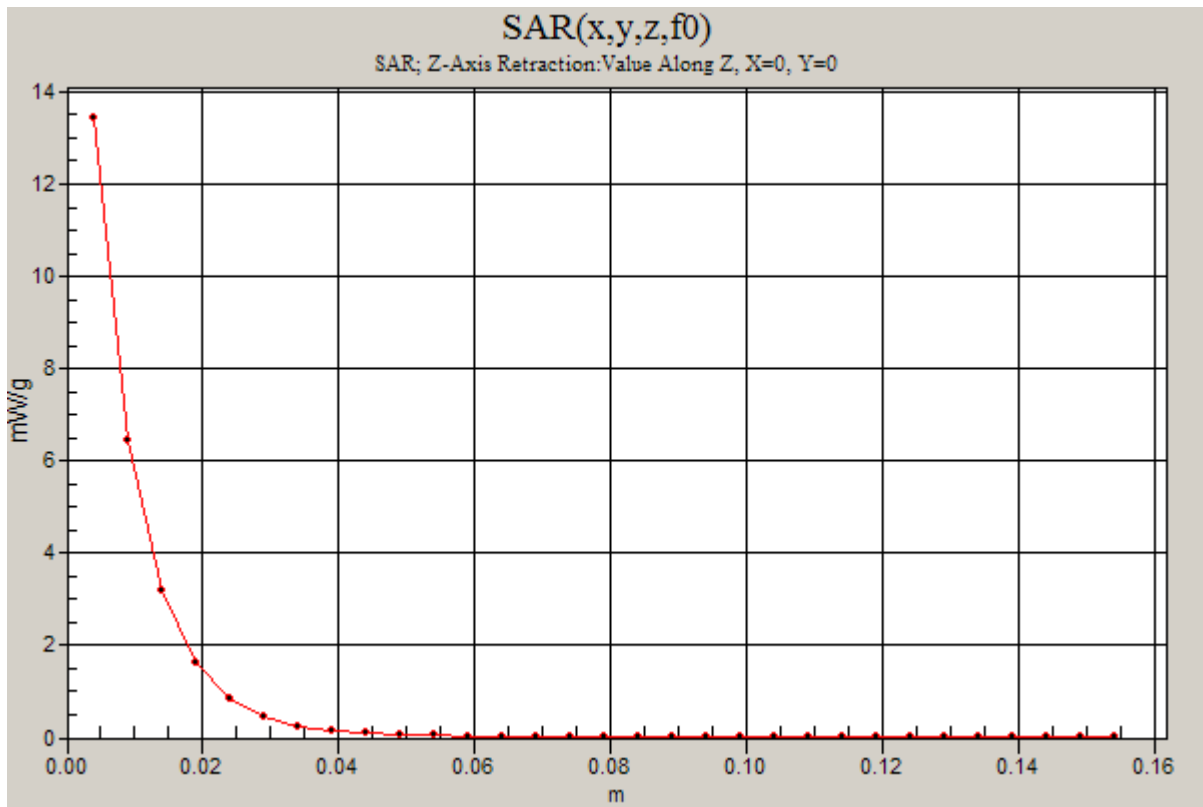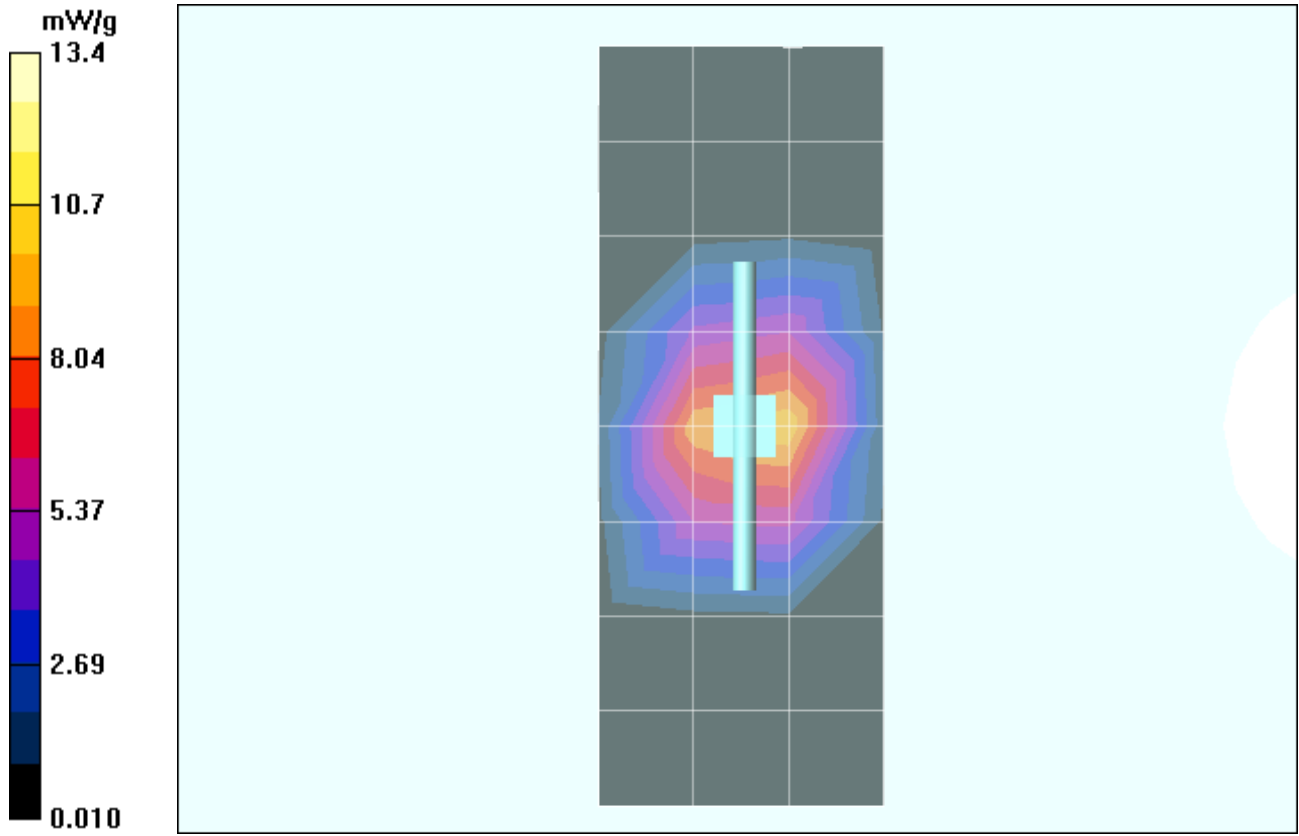

Date/Time: 10/29/2007 11:03:52 AM

Test Laboratory: Motorola - 102907 2450MHz Good at-0.4%

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 740; FCC ID: IHDP56HA2

Procedure Notes: 2450 MHz System Performance Check; Dipole Sn# 740; Input Power = 200 mW

Sim.Temp@meas = 20.7 C; Sim.Temp@SPC = 20.7 C; Room Temp @ SPC = 20.8 C

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 36.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(4.56, 4.56, 4.56); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 10.9 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.3 V/m; Power Drift = -0.009 dB; Peak SAR (extrapolated) = 25.6 W/kg

SAR(1 g) = 11.9 mW/g; SAR(10 g) = 5.52 mW/g; Maximum value of SAR (measured) = 13.4 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.3 V/m; Power Drift = -0.009 dB; Peak SAR (extrapolated) = 23.7 W/kg

SAR(1 g) = 11.2 mW/g; SAR(10 g) = 5.23 mW/g; Maximum value of SAR (measured) = 11.5 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 13.6 mW/g

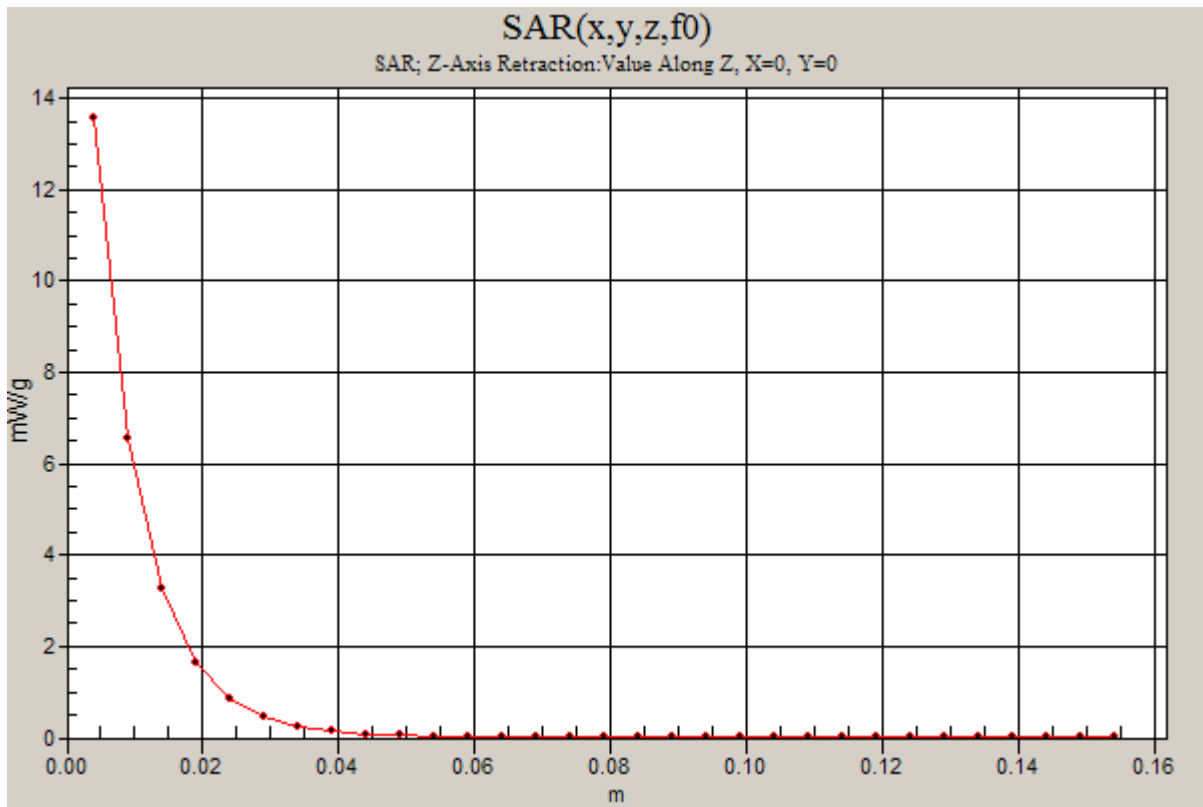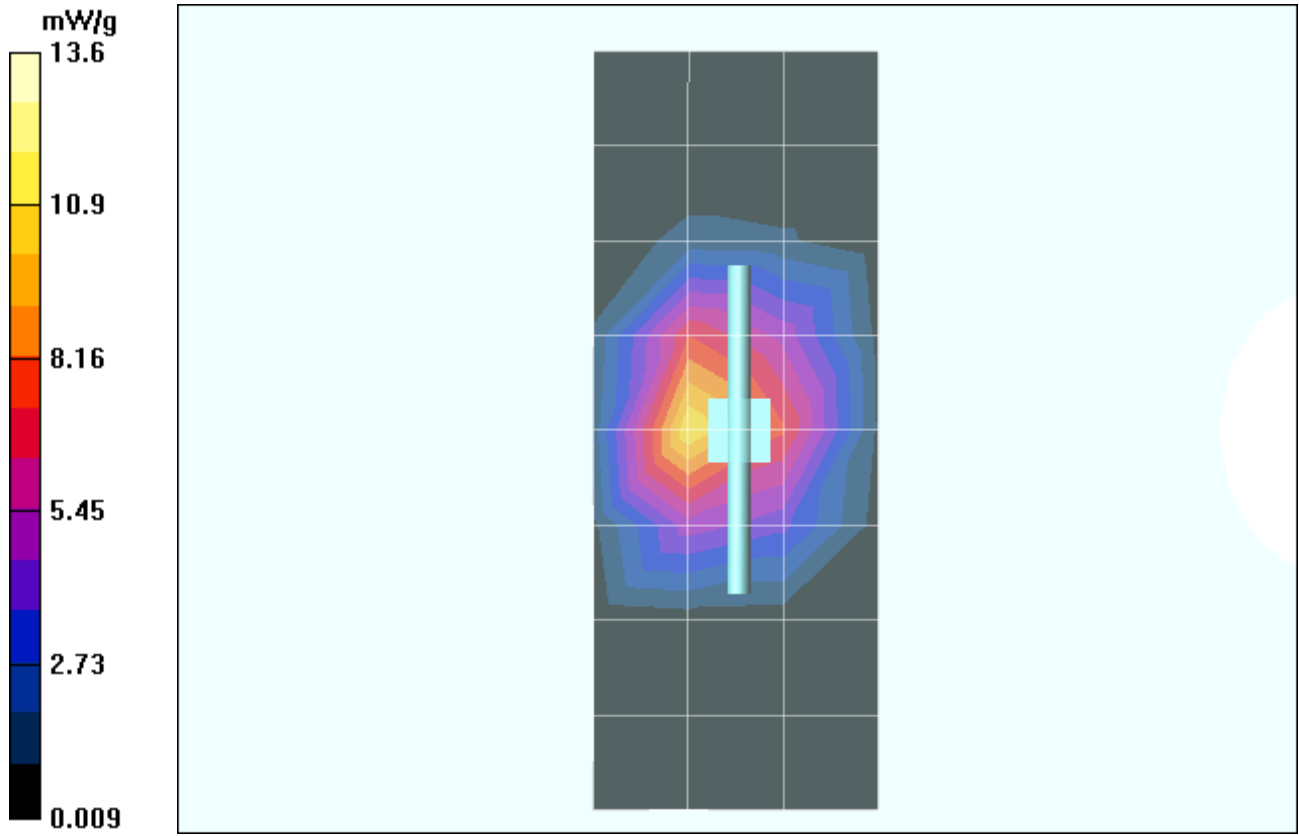

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 10/11/2007 11:24:04 PM

Test Laboratory: Motorola - GSM 850 Cheek, Slider Extended

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.446 mW/g

Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = -0.085 dB; Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.331 mW/g; Maximum value of SAR (measured) = 0.438 mW/g

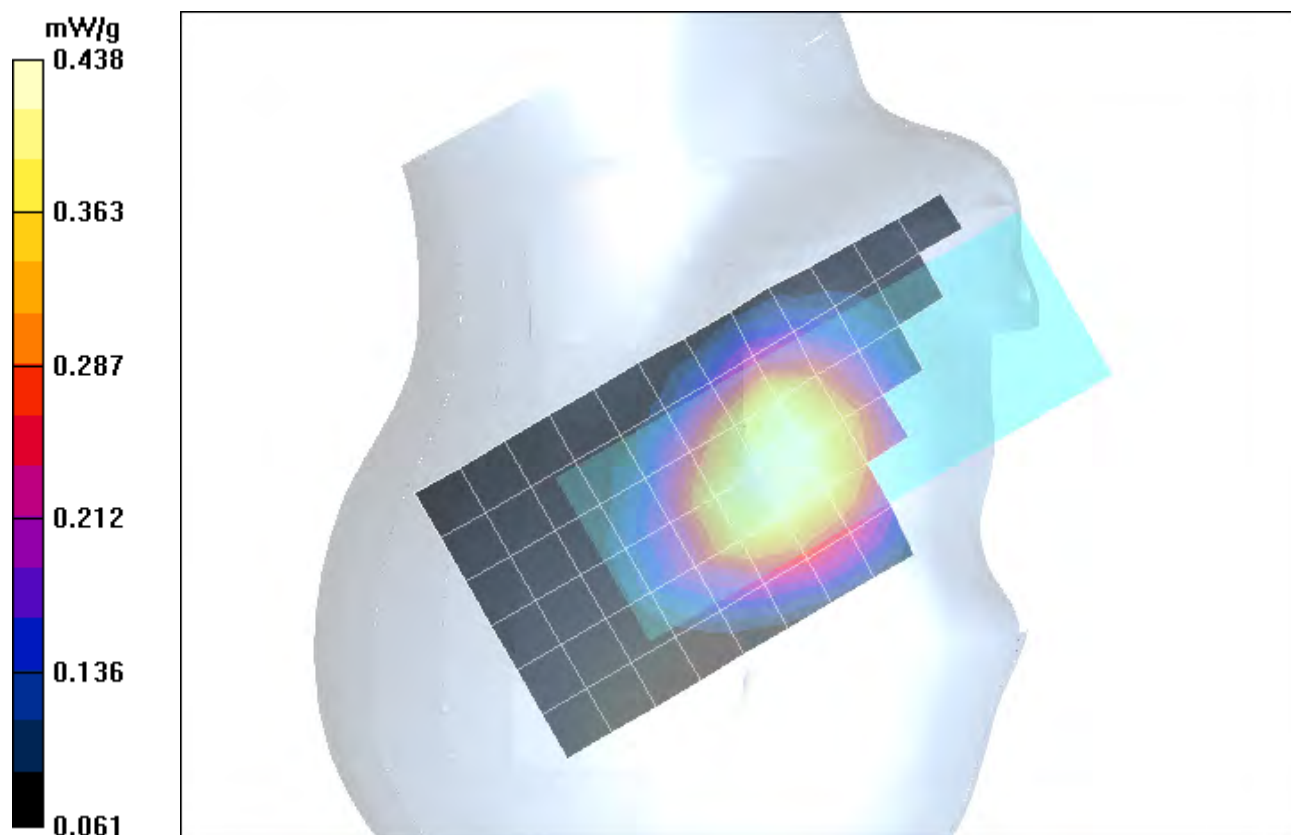

Date/Time: 10/12/2007 12:19:03 AM

Test Laboratory: Motorola - GSM 850 Cheek, Slider Retracted

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.329 mW/g

Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.034 dB; Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.240 mW/g; Maximum value of SAR (measured) = 0.325 mW/g

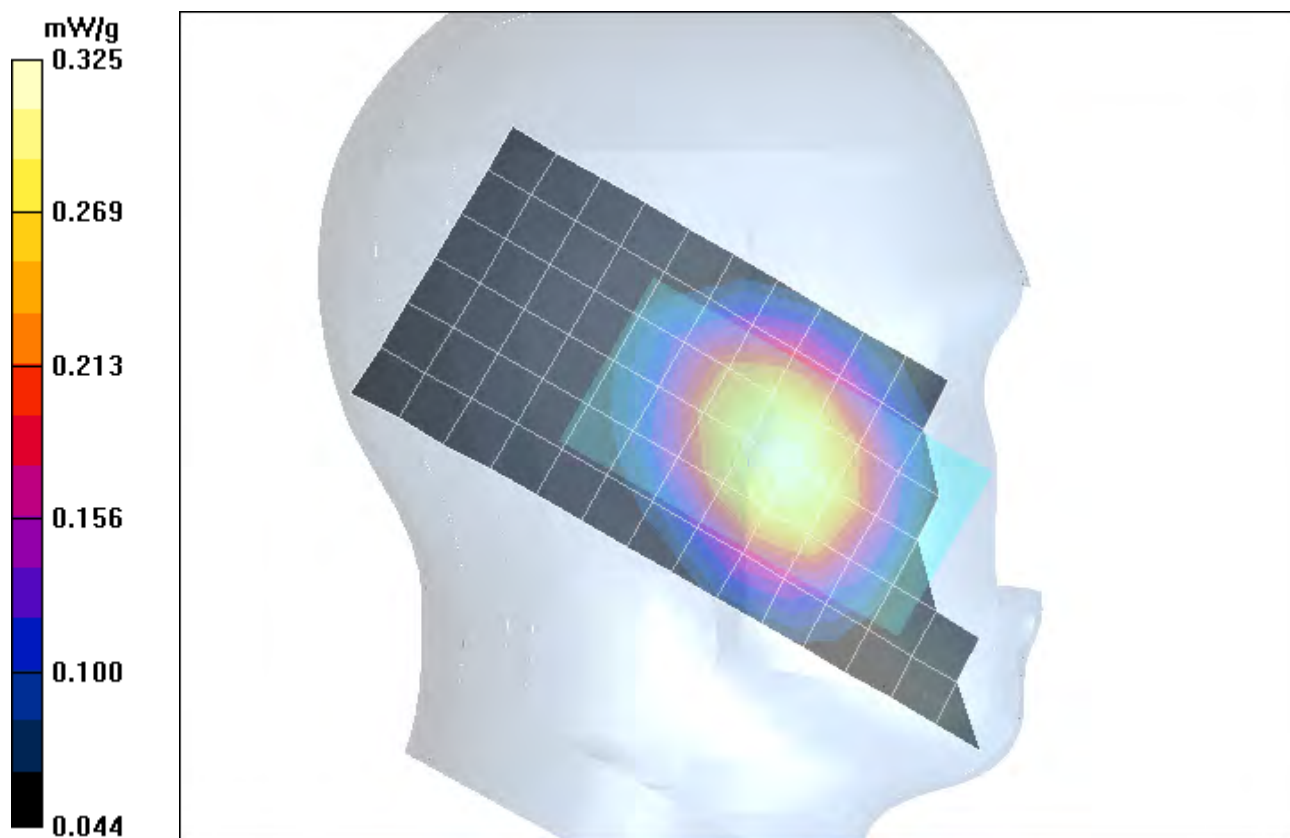

Date/Time: 5/27/2008 1:26:05 PM

Test Laboratory: Motorola - GSM 1900 Cheek, Slider Extended

Serial: TA53400020; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: N/A

Battery Model #: SNN5807A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Backup Glycol Head 1750/1880

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.92, 4.92, 4.92); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.249 mW/g

Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = 0.017 dB; Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.136 mW/g; Maximum value of SAR (measured) = 0.262 mW/g

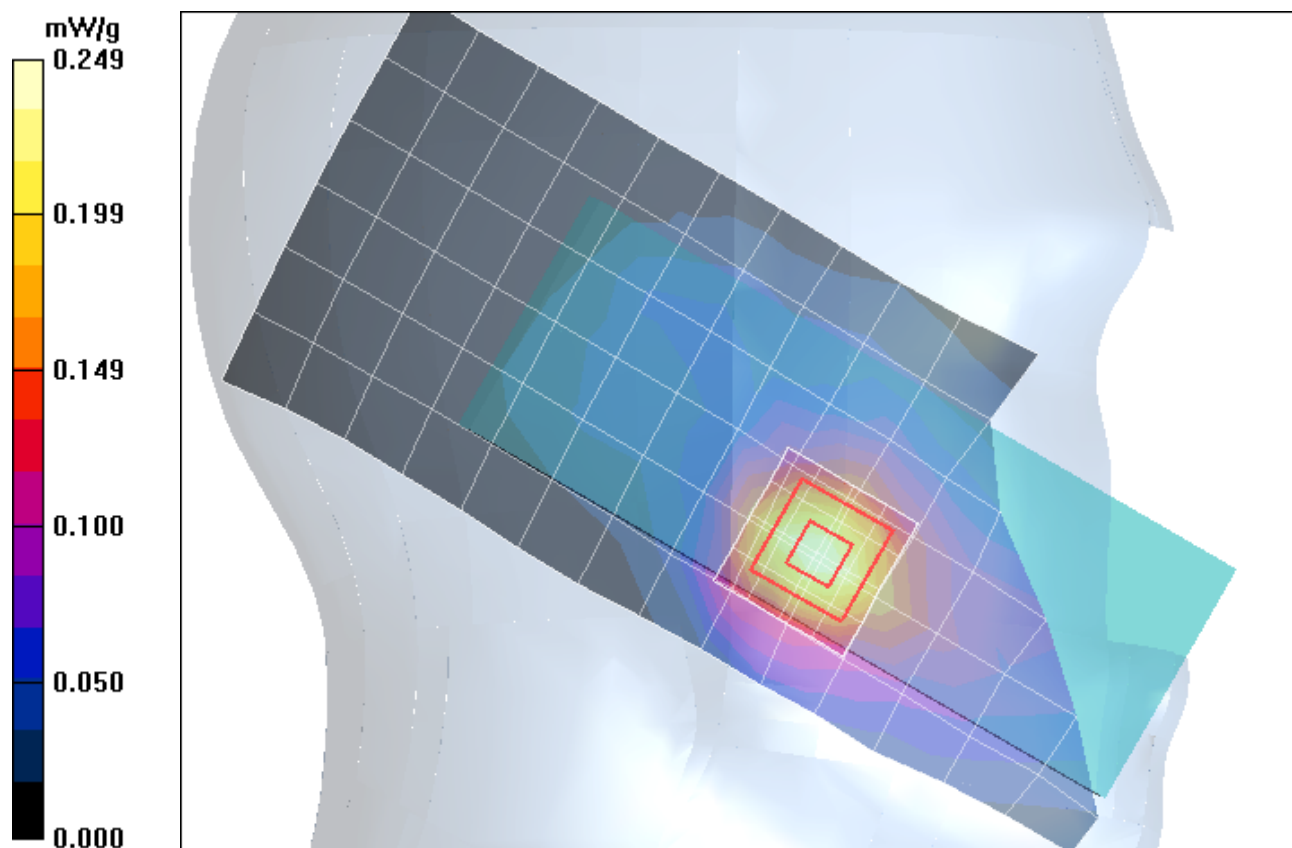

Date/Time: 5/27/2008 2:15:47 PM

Test Laboratory: Motorola - GSM 1900 Cheek, Slider Retracted

Serial: TA53400020; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: N/A

Battery Model #: SNN5807A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Backup Glycol Head 1750/1880

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.92, 4.92, 4.92); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.473 mW/g

Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.021 dB; Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.261 mW/g; Maximum value of SAR (measured) = 0.491 mW/g

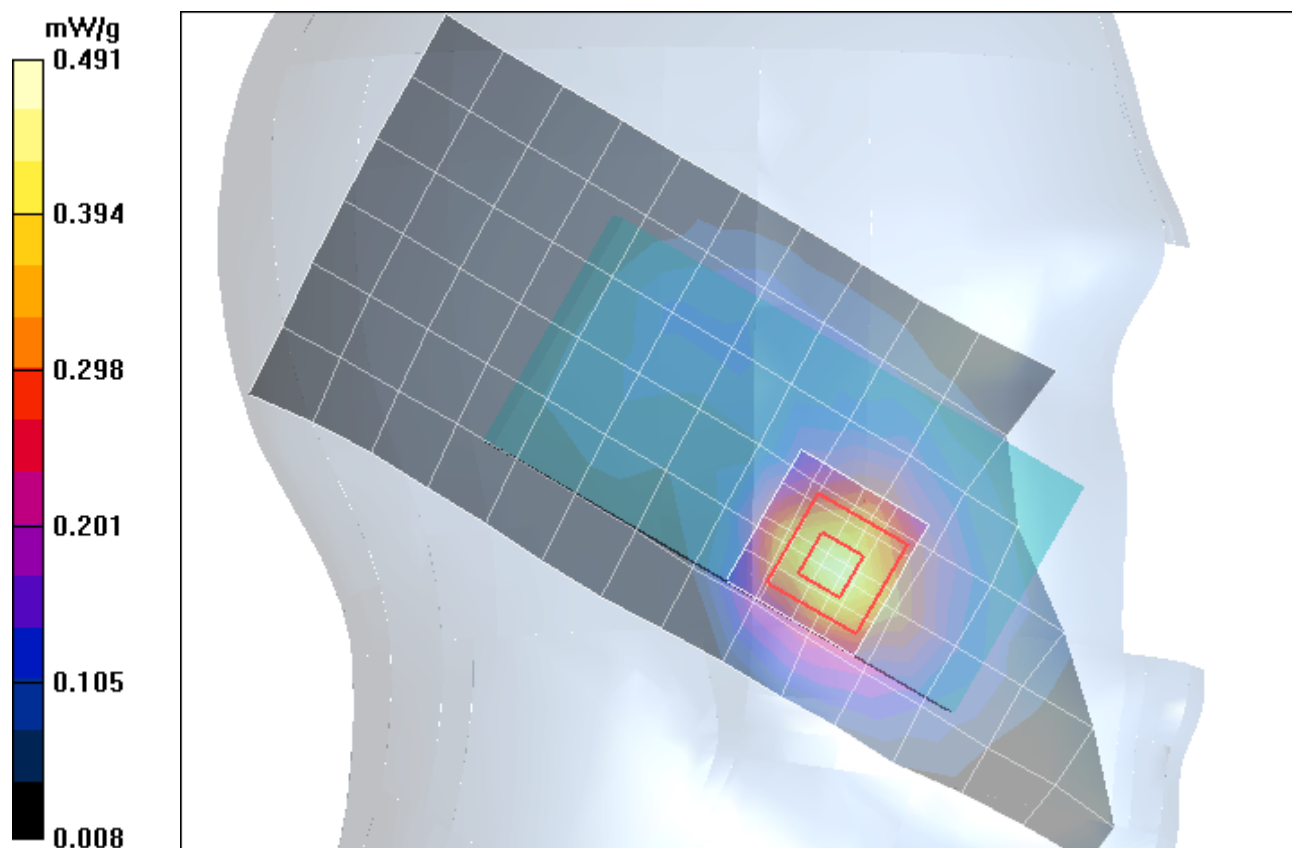

Date/Time: 10/25/2007 9:30:02 AM

Test Laboratory: Motorola - WCDMA 850 Cheek, Slider Extended

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All bits Up; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R#1 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal Extended (10mm) (10x25x1):


Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 0.473 mW/g

Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = 0.320 dB; Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.341 mW/g; Maximum value of SAR (measured) = 0.462 mW/g

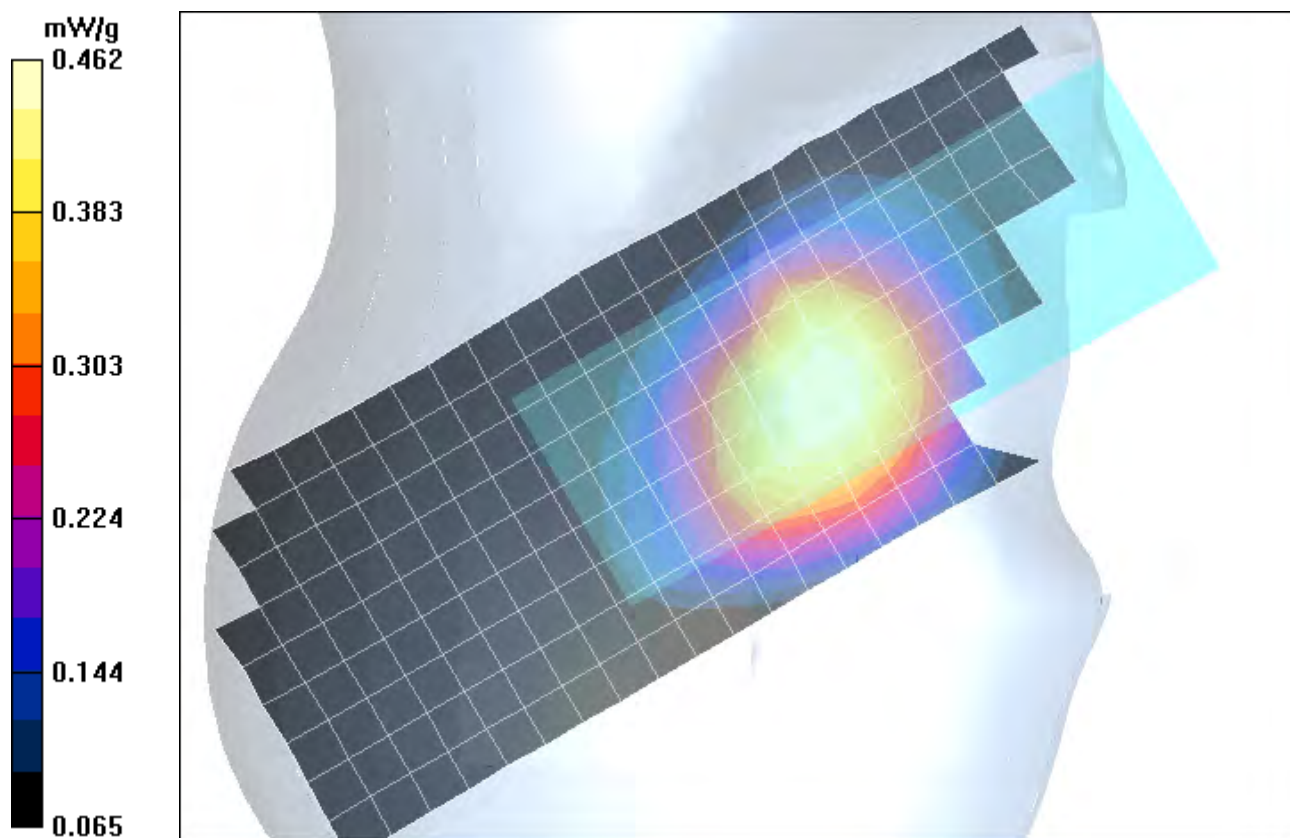

Date/Time: 10/12/2007 7:38:51 PM

Test Laboratory: Motorola - WCDMA 850 Cheek, Slider Retracted

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.296 mW/g

Left Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.7 V/m; Power Drift = -0.048 dB; Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.226 mW/g; Maximum value of SAR (measured) = 0.312 mW/g

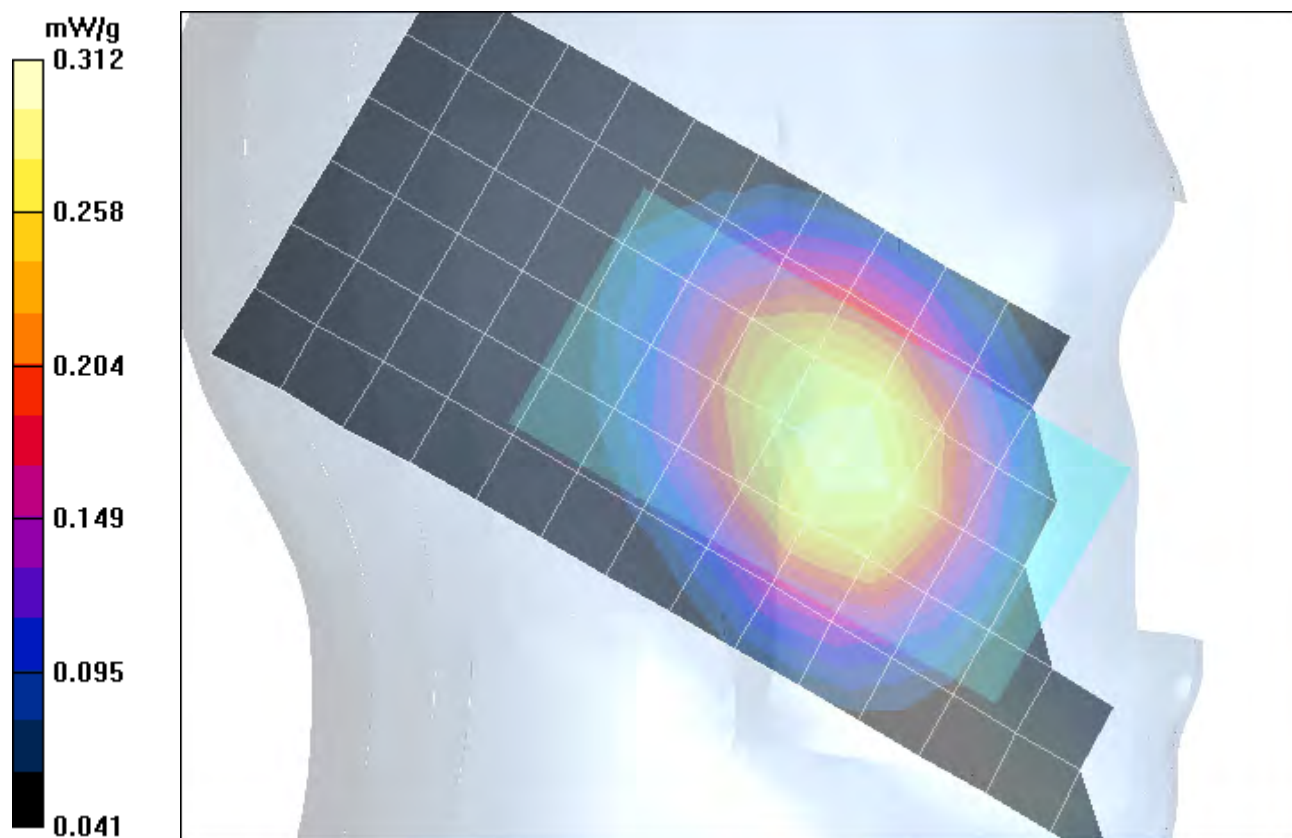

Date/Time: 10/14/2007 7:55:19 PM

Test Laboratory: Motorola - WCDMA 1900 Cheek, Slider Extended

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All Up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: WCDMA 1900; Frequency: 1880 MHz; Channel Number: 9400; Duty Cycle: 1:1

Medium: Regular Glycol Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.602 mW/g

Left Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.3 V/m; Power Drift = -0.059 dB; Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.393 mW/g; Maximum value of SAR (measured) = 0.720 mW/g

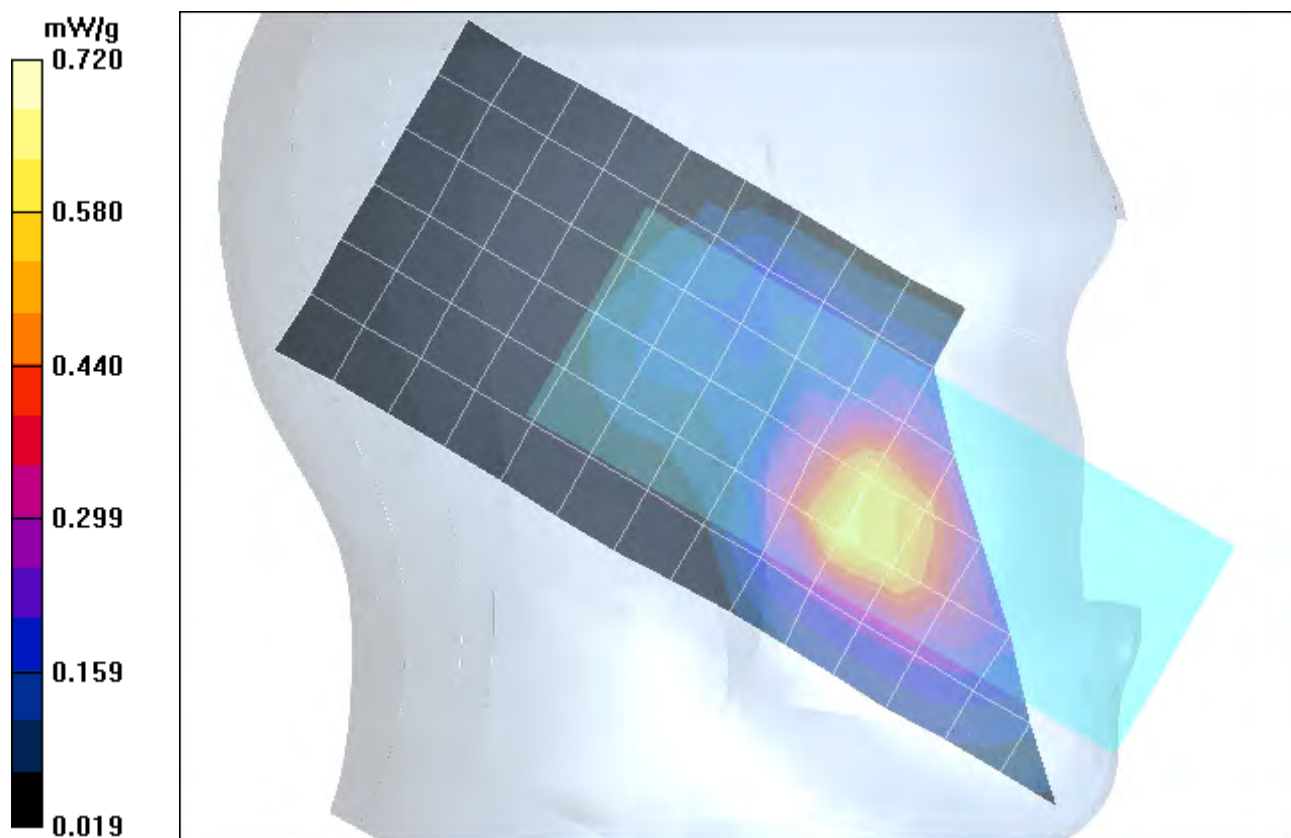

Date/Time: 10/14/2007 9:29:11 PM

Test Laboratory: Motorola - WCDMA 1900 Cheek, Slider Retracted

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All Up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: WCDMA 1900; Frequency: 1907.5 MHz; Channel Number: 9538; Duty Cycle: 1:1

Medium: Regular Glycol Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.860 mW/g

Left Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.2 V/m; Power Drift = -0.193 dB; Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.540 mW/g; Maximum value of SAR (measured) = 0.967 mW/g

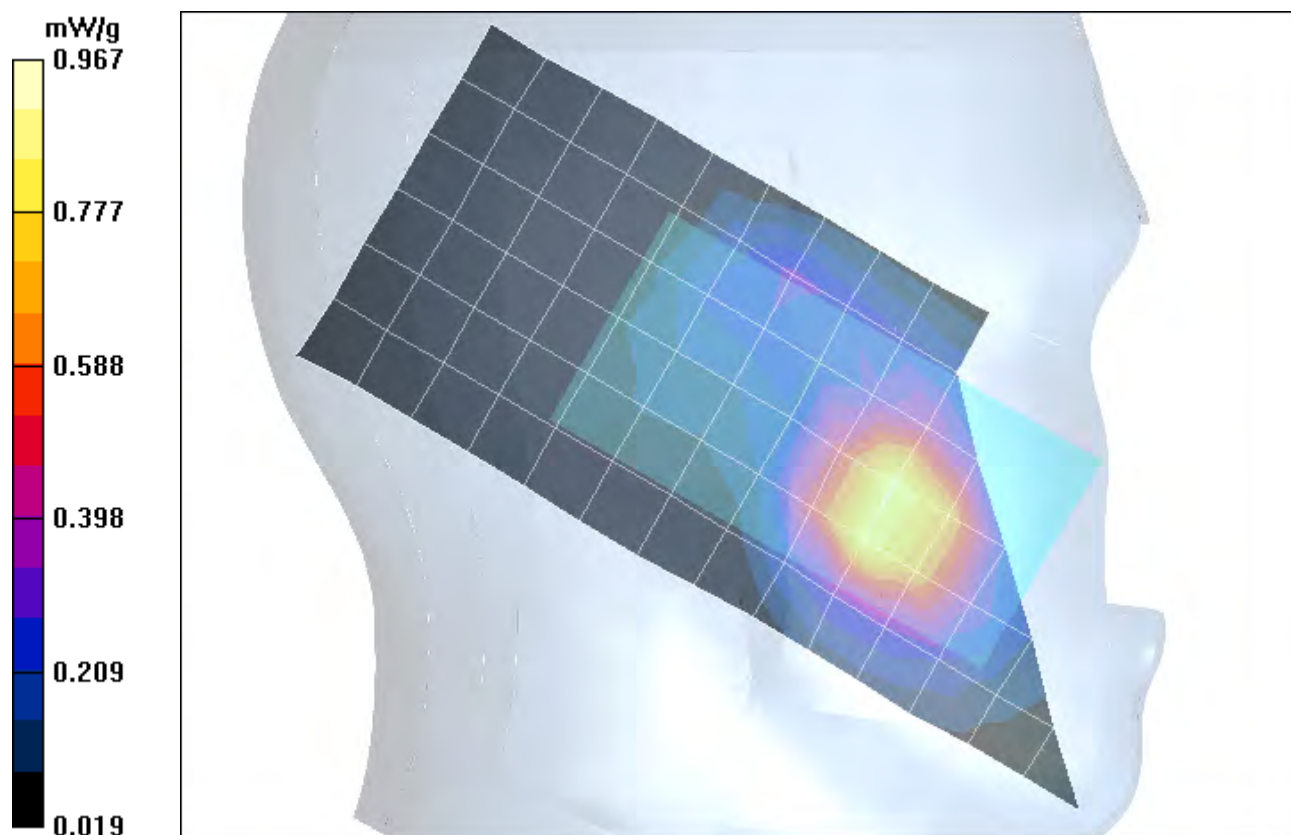

Date/Time: 10/11/2007 11:41:21 PM

Test Laboratory: Motorola - GSM 850 Tilt, Slider Extended

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (check or rotated): Rotated

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.287 mW/g

Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = -0.137 dB; Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.208 mW/g; Maximum value of SAR (measured) = 0.295 mW/g

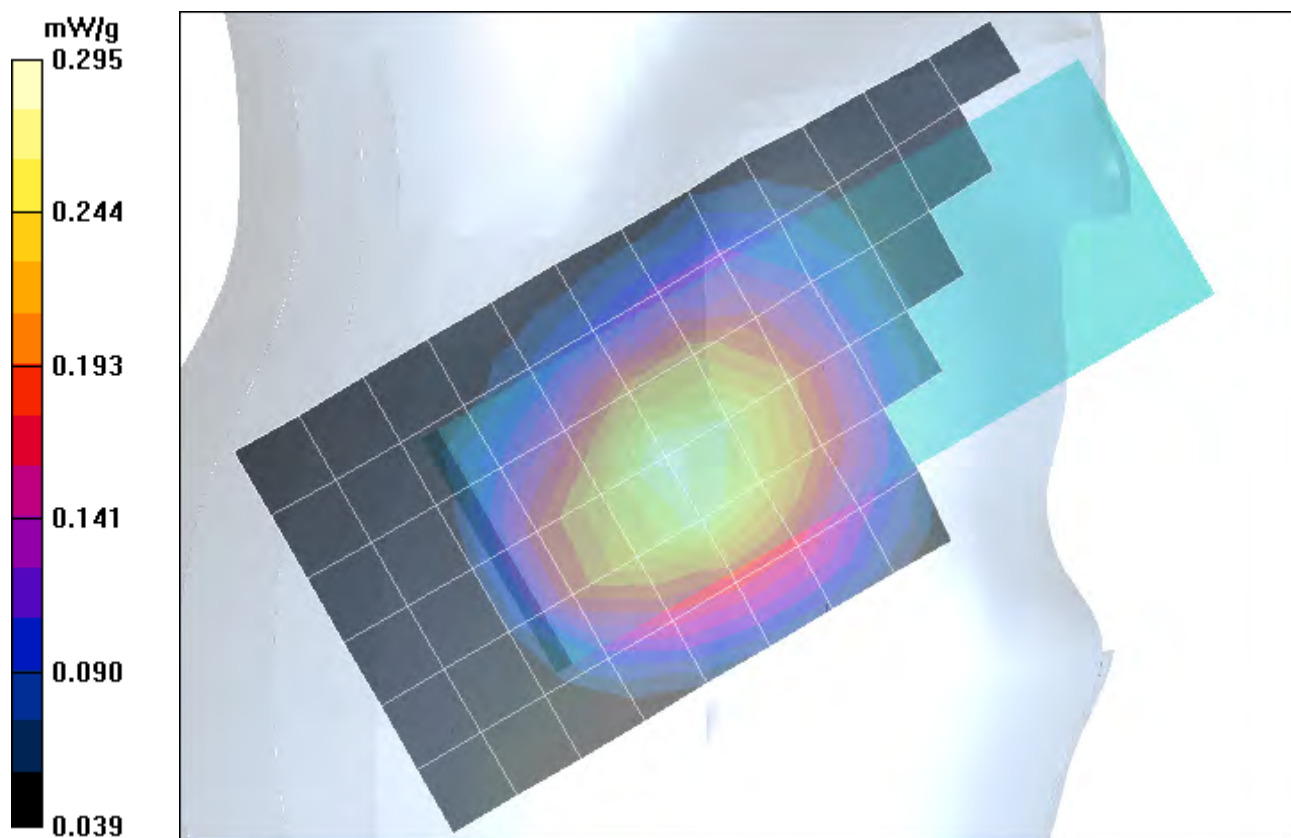

Date/Time: 10/12/2007 12:40:22 AM

Test Laboratory: Motorola - GSM 850 Tilt, Slider Retracted

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (check or rotated): Rotated

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.250 mW/g

Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.078 dB; Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.186 mW/g; Maximum value of SAR (measured) = 0.260 mW/g

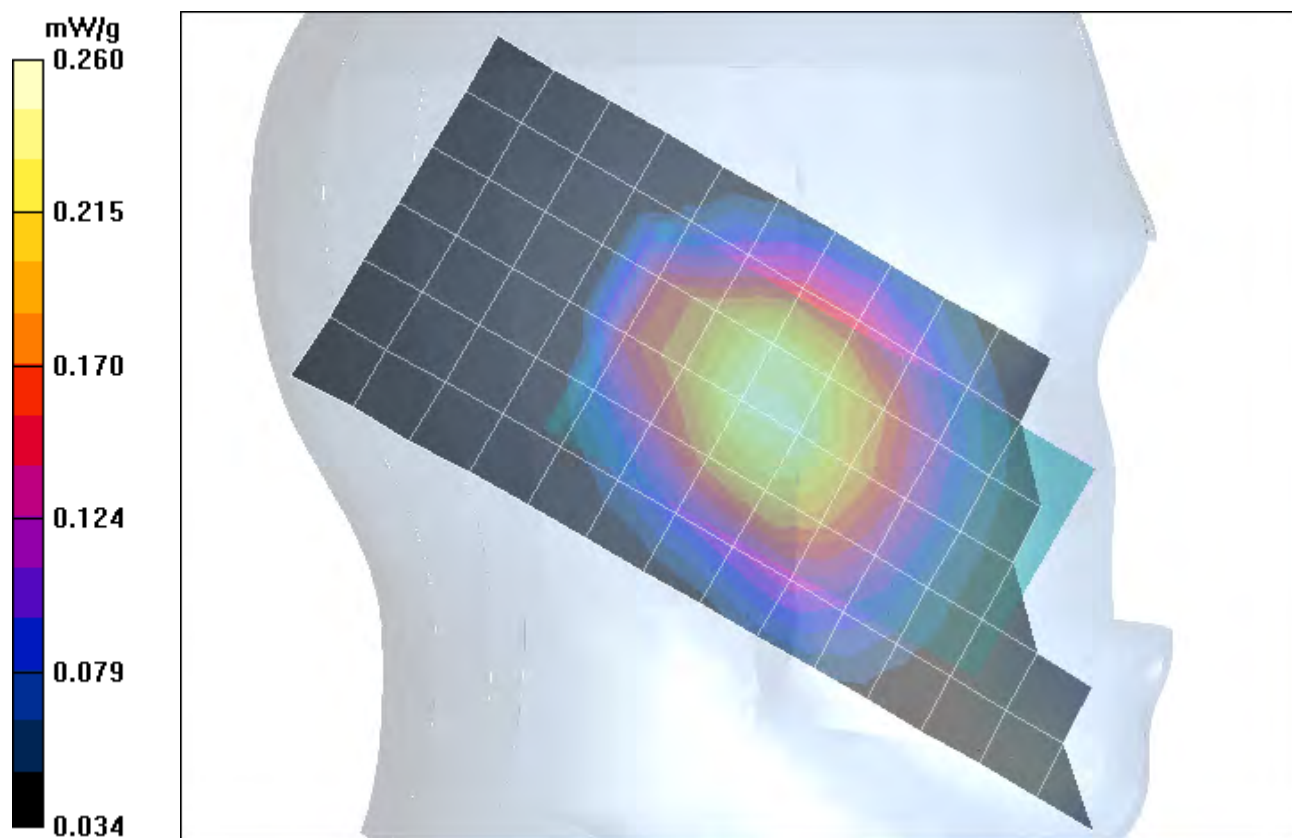

Date/Time: 5/27/2008 3:37:30 PM

Test Laboratory: Motorola - GSM 1900 Tilt, Slider Extended

Serial: TA53400020; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: N/A

Battery Model #: SNN5807A; DEVICE POSITION (check or rotated): Rotated

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Backup Glycol Head 1750/1880

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.92, 4.92, 4.92); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.127 mW/g

Right Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.2 V/m; Power Drift = 0.088 dB; Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.126 mW/g; SAR(10 g) = 0.079 mW/g; Maximum value of SAR (measured) = 0.135 mW/g

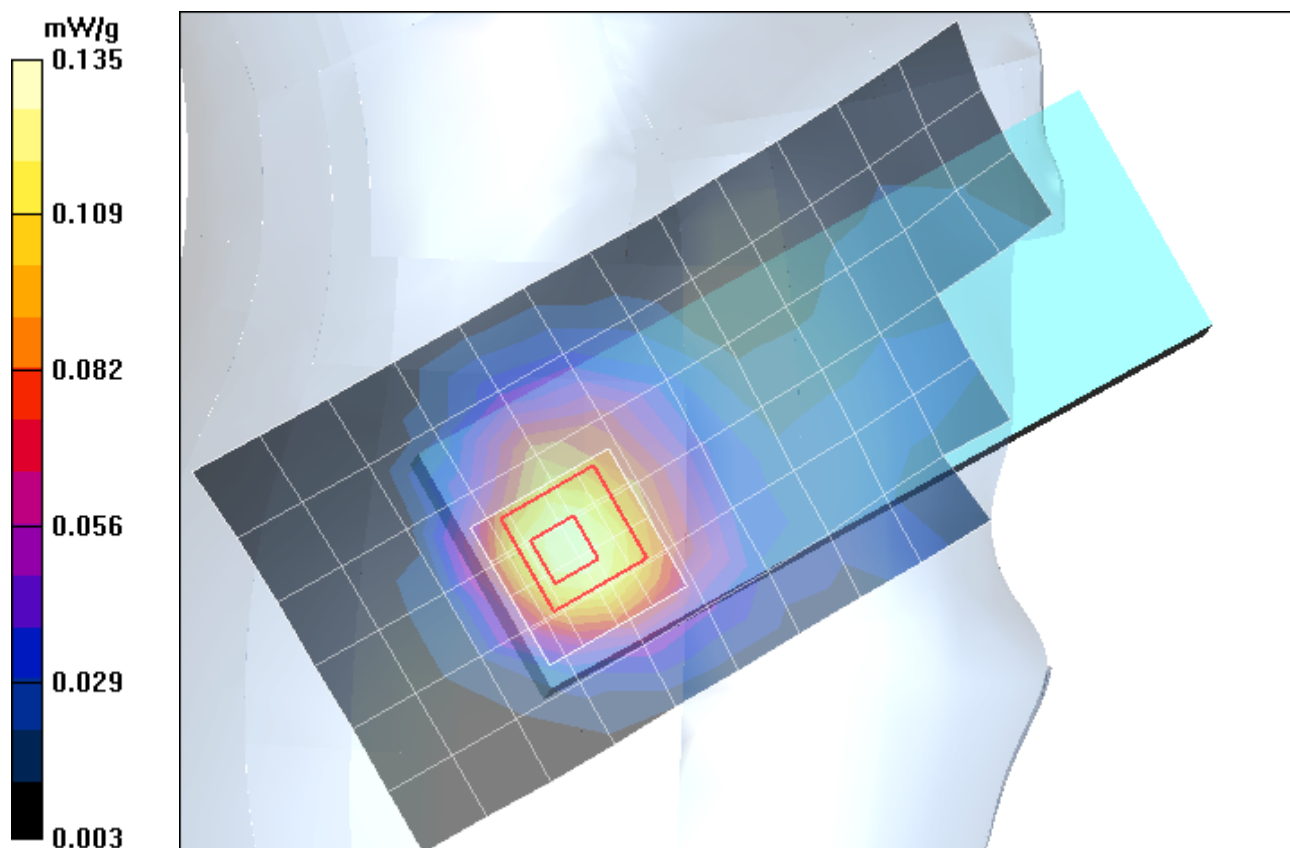

Date/Time: 5/27/2008 7:16:21 PM

Test Laboratory: Motorola - GSM 1900 Tilt, Slider Retracted

Serial: TA53400020; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: N/A

Battery Model #: SNN5805A; DEVICE POSITION (check or rotated): Rotated

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Backup Glycol Head 1750/1880

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.92, 4.92, 4.92); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Glycol, SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.171 mW/g

Right Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.1 V/m; Power Drift = -0.003 dB; Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.104 mW/g; Maximum value of SAR (measured) = 0.190 mW/g

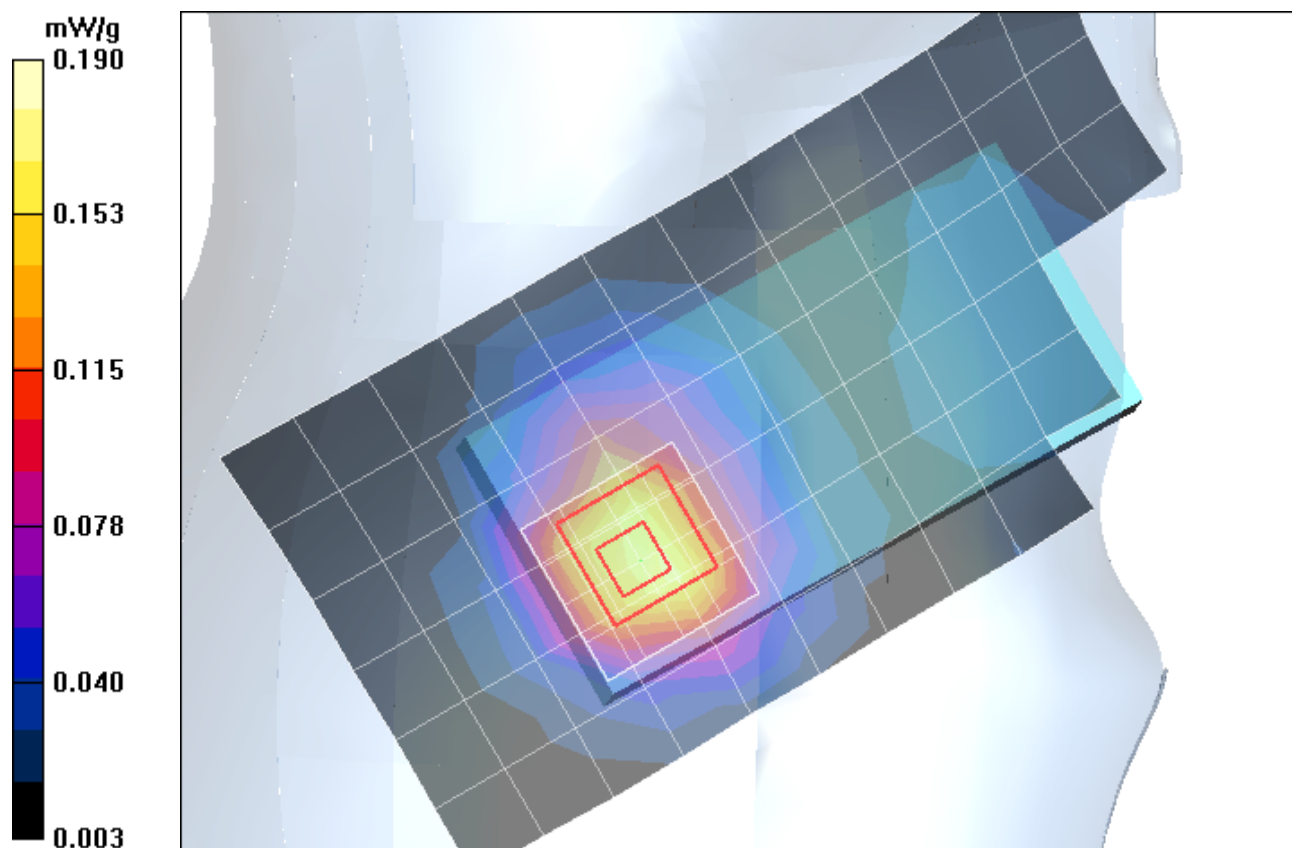

Date/Time: 10/12/2007 6:44:28 PM

Test Laboratory: Motorola - WCDMA 850 Tilt, Slider Extended

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (check or rotated): Rotated

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.292 mW/g

Left Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.1 V/m; Power Drift = -0.041 dB; Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.219 mW/g; Maximum value of SAR (measured) = 0.306 mW/g

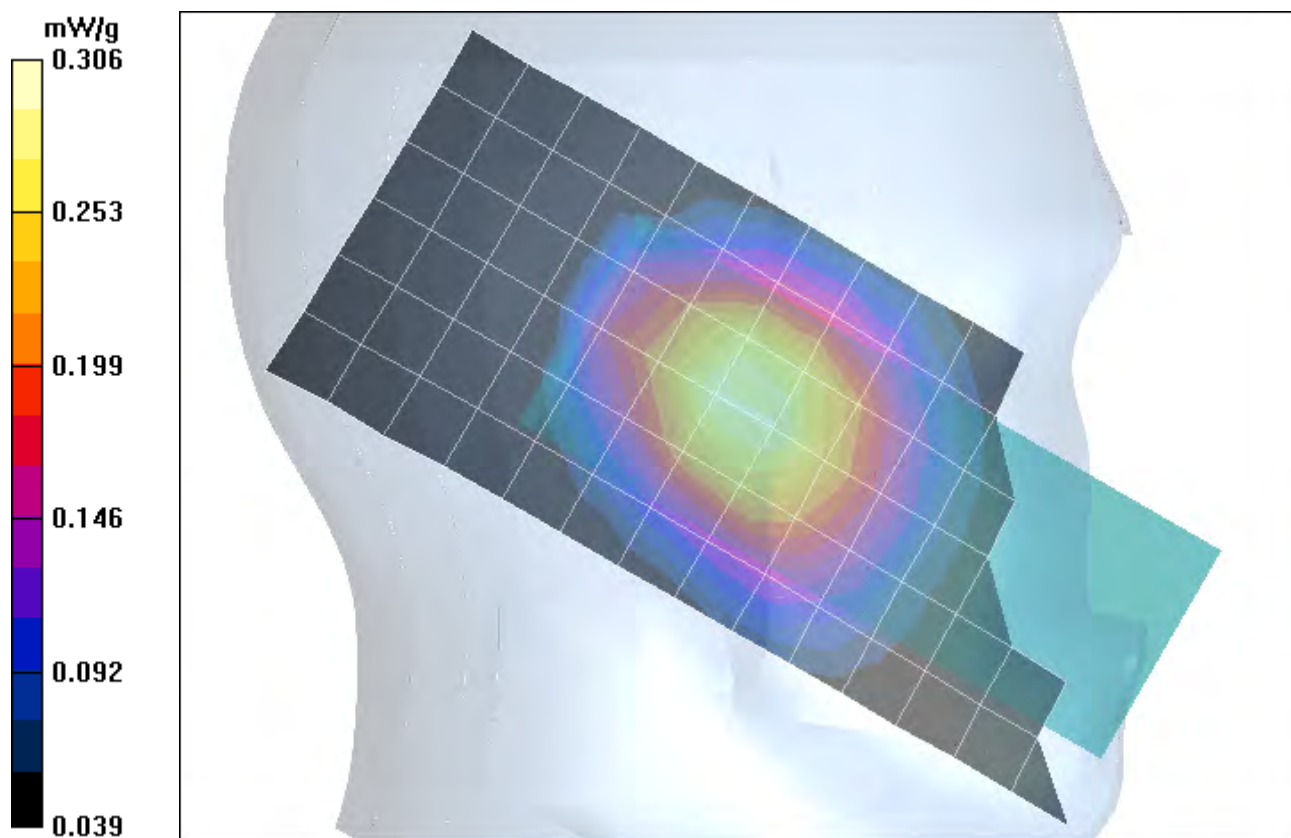

Date/Time: 10/12/2007 8:01:34 PM

Test Laboratory: Motorola - WCDMA 850 Tilt, Slider Retracted

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (check or rotated): Rotated

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Head

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.25, 6.25, 6.25); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sugar SAM; Type: SAM; Serial: TP-1005;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.241 mW/g

Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = 0.030 dB; Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.180 mW/g; Maximum value of SAR (measured) = 0.250 mW/g

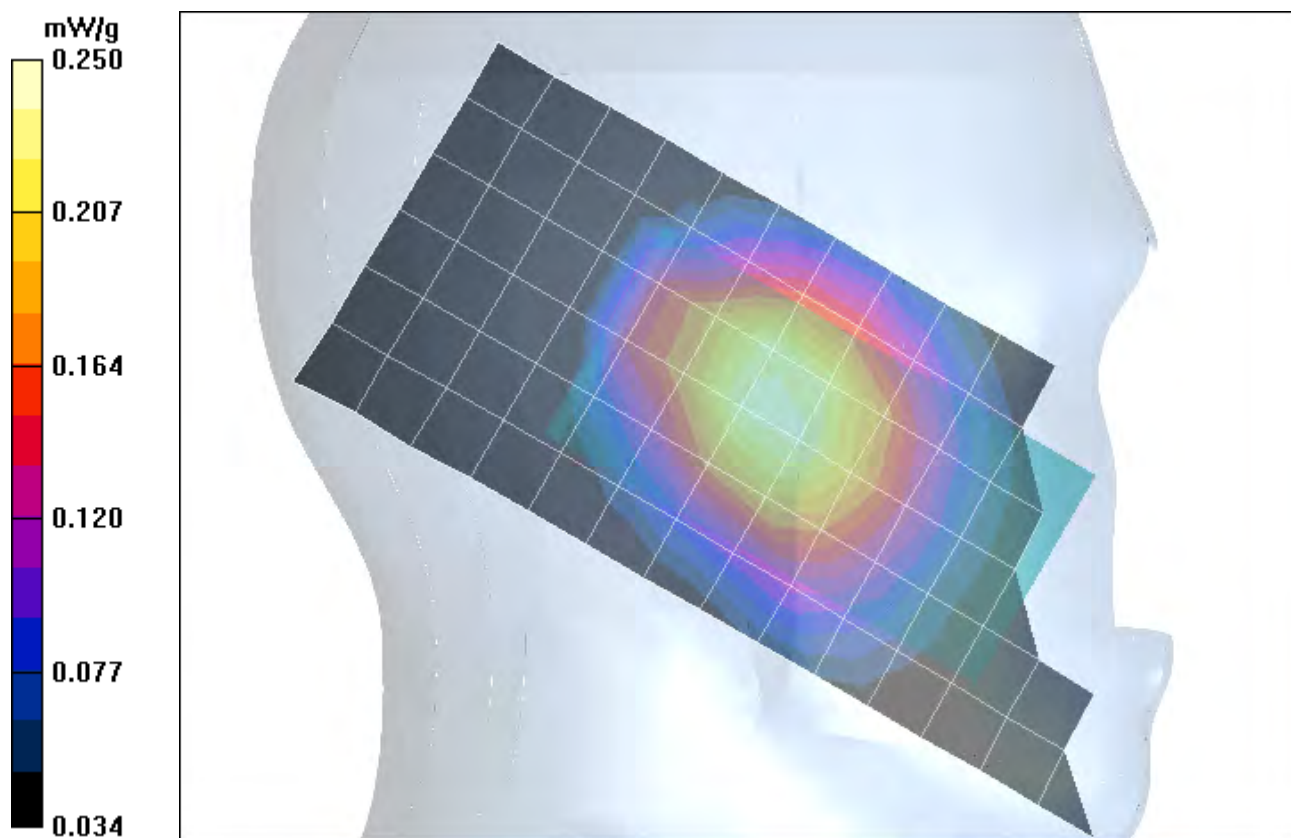

Date/Time: 10/14/2007 10:49:58 PM

Test Laboratory: Motorola - WCDMA 1900 Tilt, Slider Extended

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All Up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (check or rotated): Tilted

Communication System: WCDMA 1900; Frequency: 1880 MHz; Channel Number: 9400; Duty Cycle: 1:1

Medium: Regular Glycol Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.320 mW/g

Right Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.4 V/m; Power Drift = 0.058 dB; Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.210 mW/g; Maximum value of SAR (measured) = 0.370 mW/g

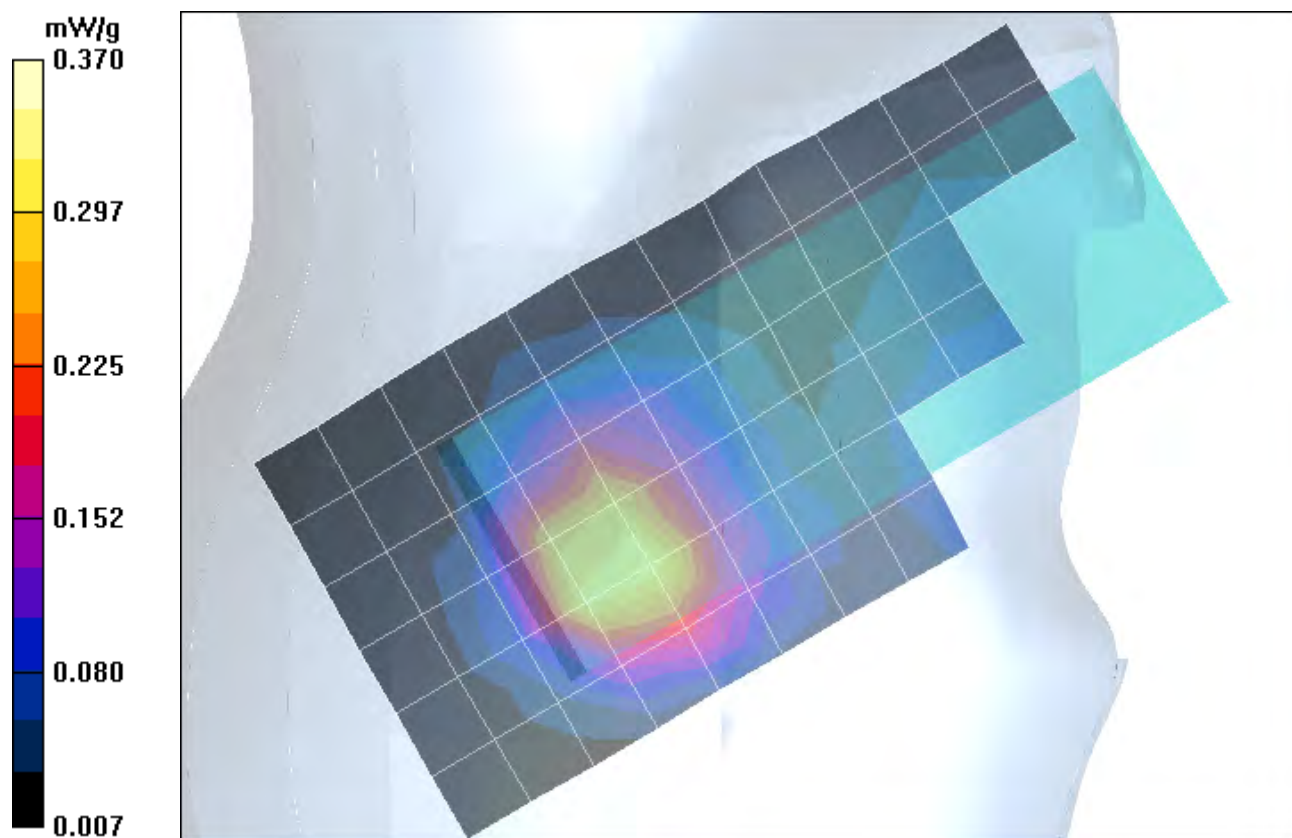

Date/Time: 10/14/2007 11:27:57 PM

Test Laboratory: Motorola - WCDMA 1900 Tilt, Slider Retracted

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All Up Bits; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5807A; DEVICE POSITION (check or rotated): Tilted

Communication System: WCDMA 1900; Frequency: 1880 MHz; Channel Number: 9400; Duty Cycle: 1:1

Medium: Regular Glycol Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(5.17, 5.17, 5.17); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Glycol SAM; Type: SAM; Serial: TP-1139;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15$ mm, $dy=15$ mm; Maximum value of SAR (measured) = 0.378 mW/g

Right Head Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.5 V/m; Power Drift = -0.028 dB; Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.238 mW/g; Maximum value of SAR (measured) = 0.426 mW/g

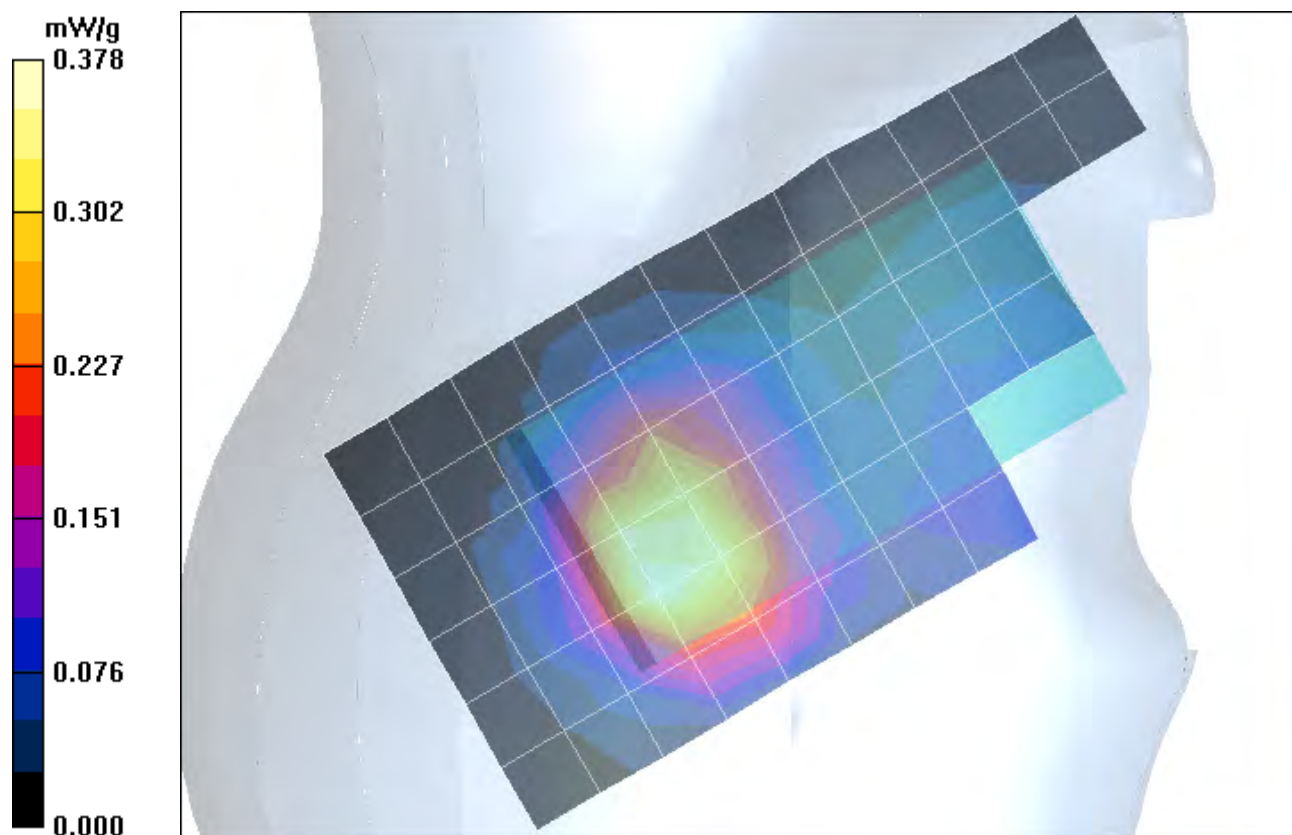

Appendix 3

SAR distribution plots for Body Worn Configuration

Date/Time: 10/16/2007 8:36:38 AM

Test Laboratory: Motorola - GSM 850 Body

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 05; Antenna Position: Internal; Battery Model #: SNN5807A

Device Position: Body Worn with Holster SYN2314A

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Body

Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.04, 6.04, 6.04); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.560 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = -0.080 dB; Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.391 mW/g; Maximum value of SAR (measured) = 0.562 mW/g

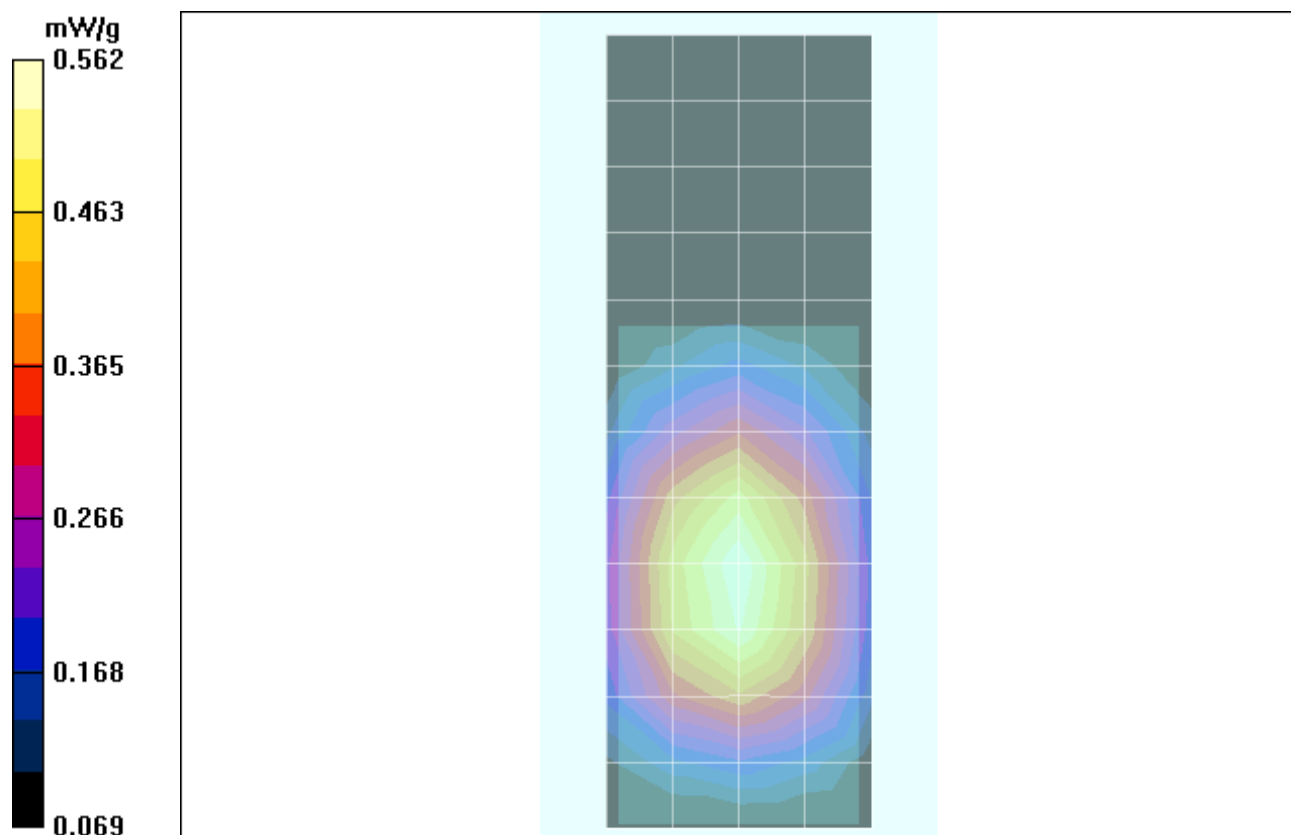

Date/Time: 6/3/2008 12:05:26 AM

Test Laboratory: Motorola - GSM 1900 Body Worn

Serial: TA53400020; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Battery Model #: SNN5805A

Device Position: Body Worn with Holster SYN2314A

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Body 1750/1880

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1514; ConvF(4.59, 4.59, 4.59); Calibrated: 7/11/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 3/18/2008
- Phantom: R1_Section 2, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.591 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.011 dB; Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.541 mW/g; SAR(10 g) = 0.291 mW/g; Maximum value of SAR (measured) = 0.586 mW/g

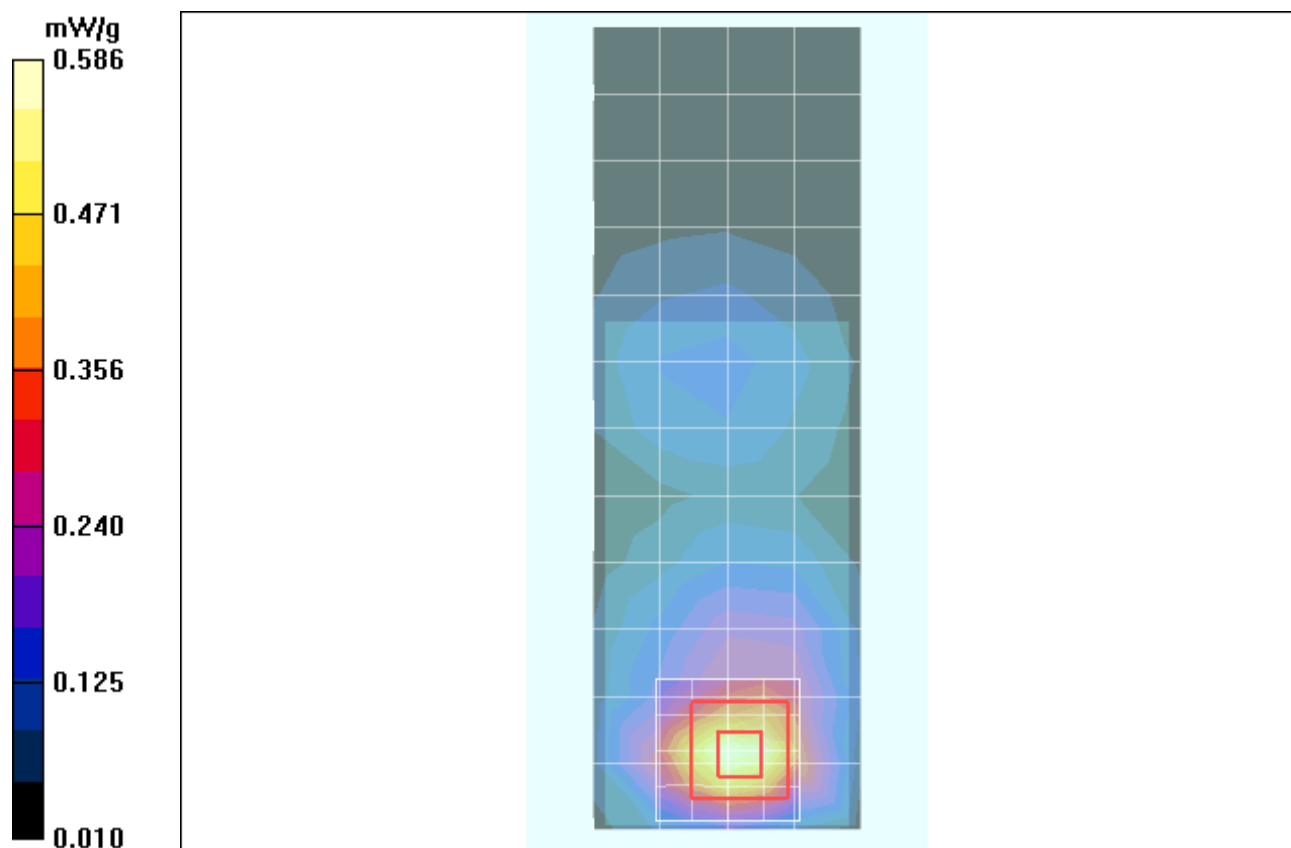

Date/Time: 10/22/2007 10:50:00 PM

Test Laboratory: Motorola - WCDMA 850 Body

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All up Bits; Antenna Position: Internal; Battery Model #:SNN5807A

Device Position: Body Worn with Holster SYN2314A

Communication System: 3G-WCDMA 850; Frequency: 836 MHz; Channel Number: 4180; Duty Cycle: 1:1

Medium: Low Freq Body

Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(6.04, 6.04, 6.04); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.620 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = 0.039 dB; Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.449 mW/g; Maximum value of SAR (measured) = 0.644 mW/g

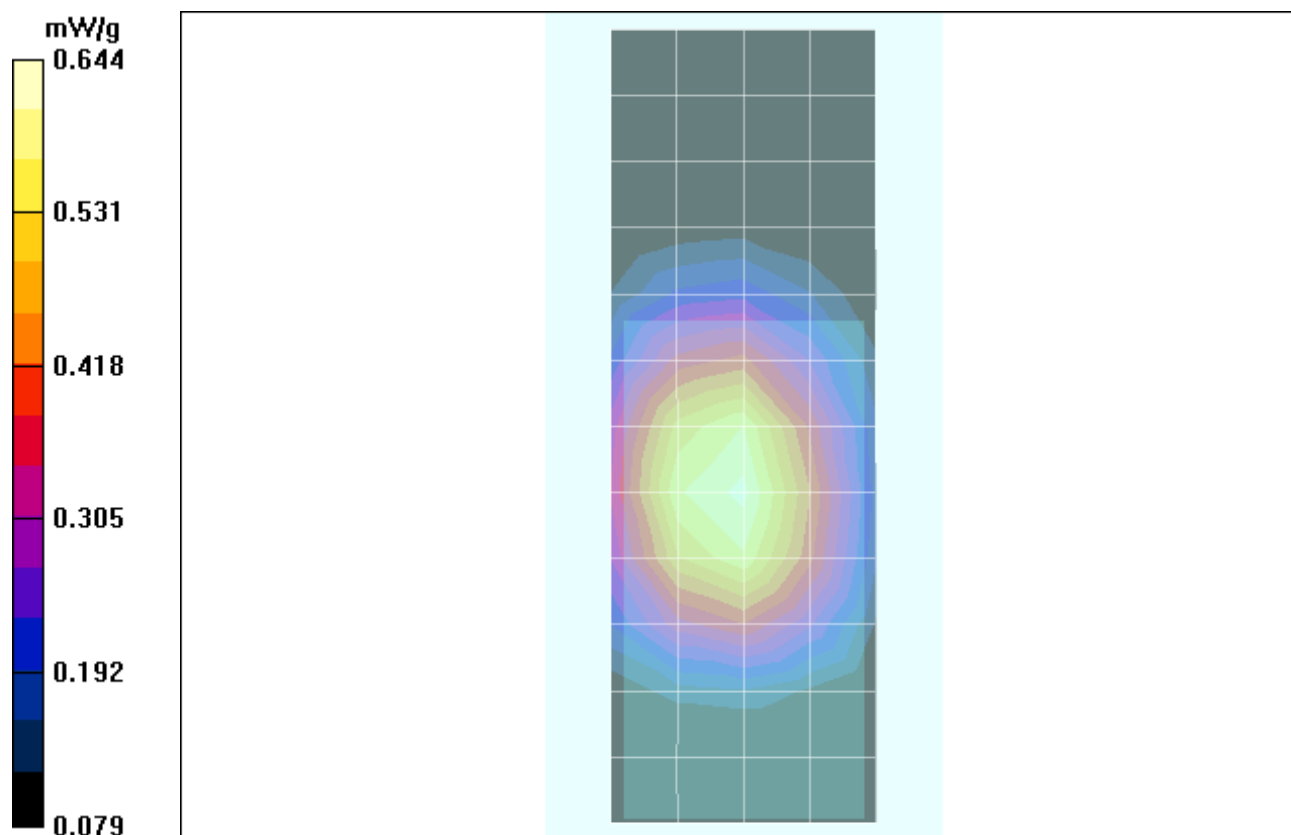

Date/Time: 10/17/2007 1:09:48 PM

Test Laboratory: Motorola - WCDMA 1900 Body

Serial: LCS04E0001; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: All Up Bits; Antenna Position: Internal; Battery Model #: SNN5807A

Device Position: Body Worn with Holster SYN2314A

Communication System: WCDMA 1900; Frequency: 1880 MHz; Channel Number: 9400; Duty Cycle: 1:1

Medium: Regular Glycol Body

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(4.83, 4.83, 4.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.623 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.139 dB; Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.368 mW/g; Maximum value of SAR (measured) = 0.669 mW/g

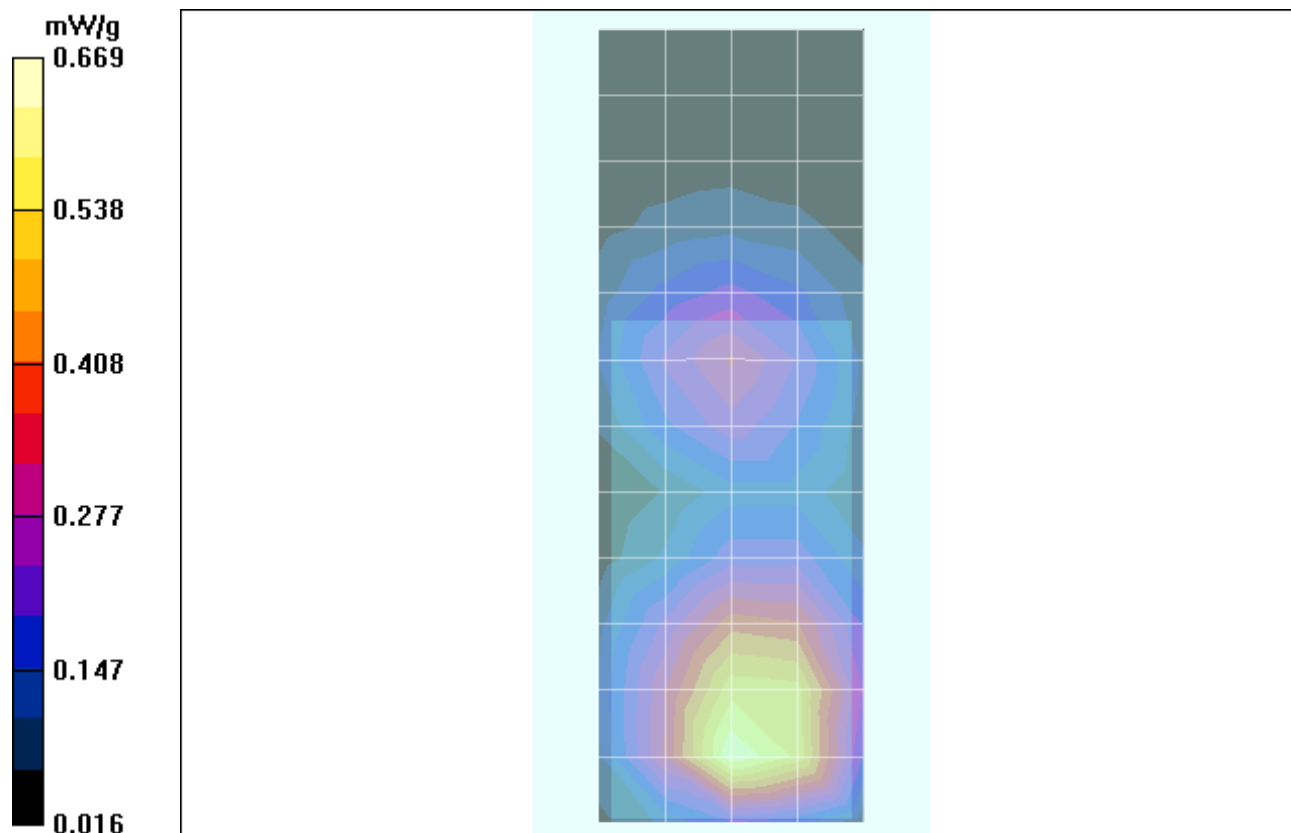

Date/Time: 10/29/2007 8:04:12 PM

Test Laboratory: Motorola - Bluetooth Body Worn

Serial: LCS04E0002; FCC ID: IHDP56HA2

Procedure Notes: Pwr Step: None; Antenna Position: Internal; Battery Model #: SNN5807A

Device Position: Body Worn, Back of Phone 25 mm from Phantom

Communication System: Bluetooth; Frequency: 2441 MHz; Channel Number: 39; Duty Cycle: 1:1

Medium: 2450 Glycol Body

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1397; ConvF(4.18, 4.18, 4.18); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn378; Calibrated: 4/13/2007
- Phantom: R1: Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template to Shift Cube/Area Scan - Normal Body (10mm) (19x10x1):


Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 0.005 mW/g

Amy Twin Phone Template to Shift Cube/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.702 V/m; Power Drift = -1.60 dB; Peak SAR (extrapolated) = 0.017 W/kg

SAR(1 g) = 0.00125 mW/g; SAR(10 g) = 0.00022 mW/g Maximum value of SAR (measured) = 0.015 mW/g

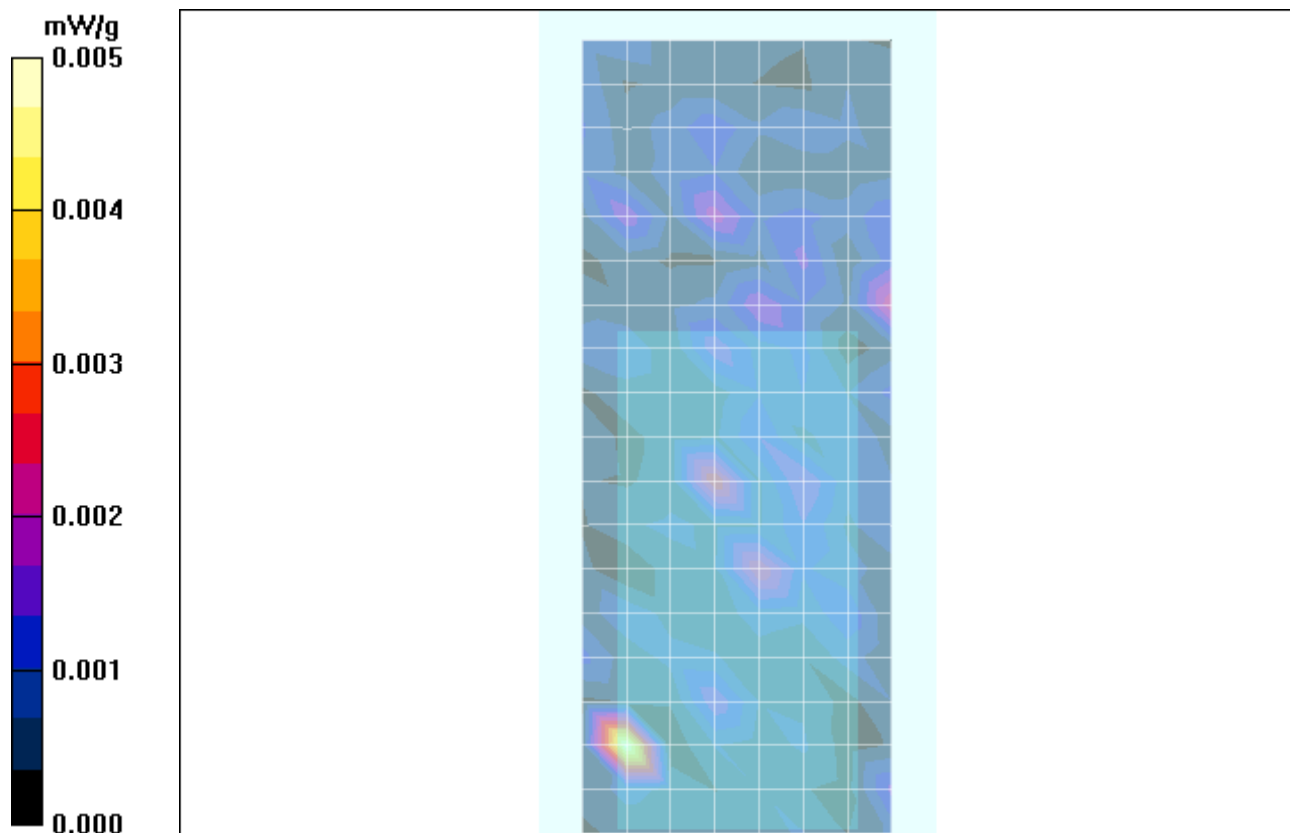

Appendix 4

Probe Calibration Certificate



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola Flensburg**

Certificate No: **ET3-1397_Apr07**

CALIBRATION CERTIFICATE

Object **ET3DV6R - SN:1397**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 24, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Approved by:	Fin Bomholt	R&D Director	
--------------	-------------	--------------	--

Issued: April 24, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6R

SN:1397


Manufactured:	October 24, 1999
Last calibrated:	May 3, 2006
Recalibrated:	April 24, 2007

Calibrated for DASYS Systems

(Note: non-compatible with DASYS2 system!)




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

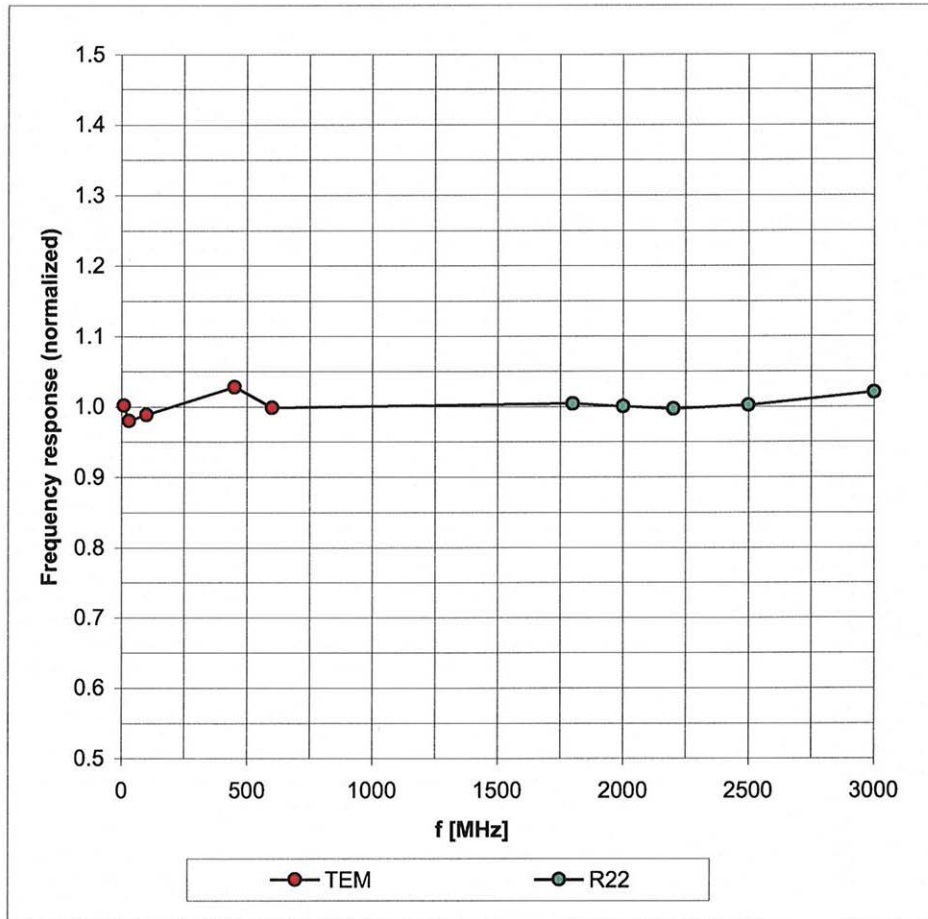


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

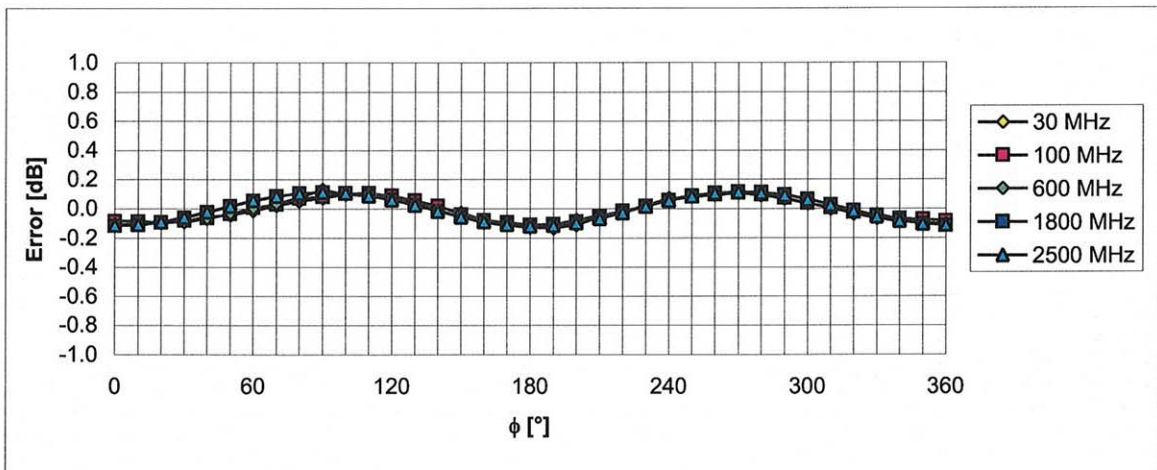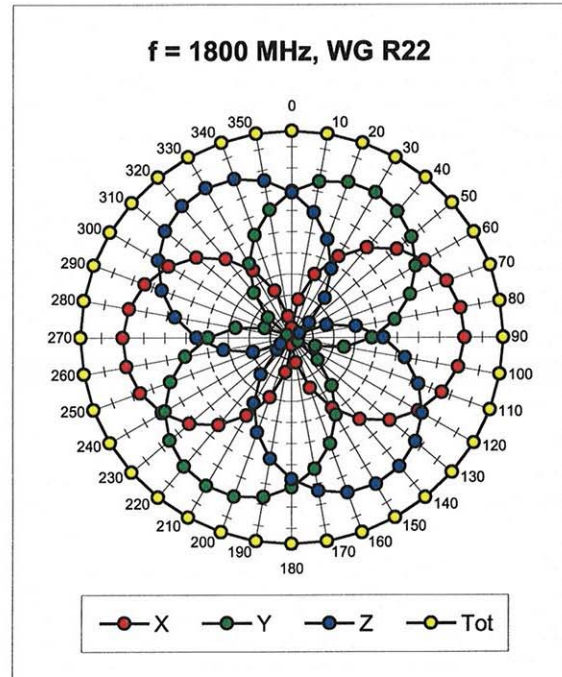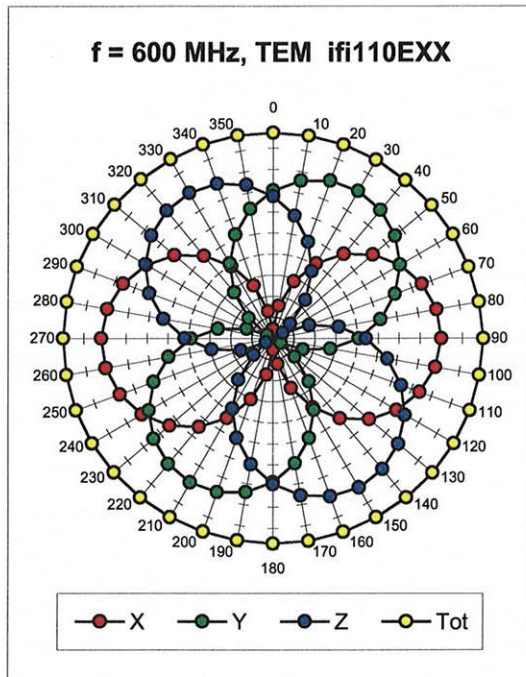



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

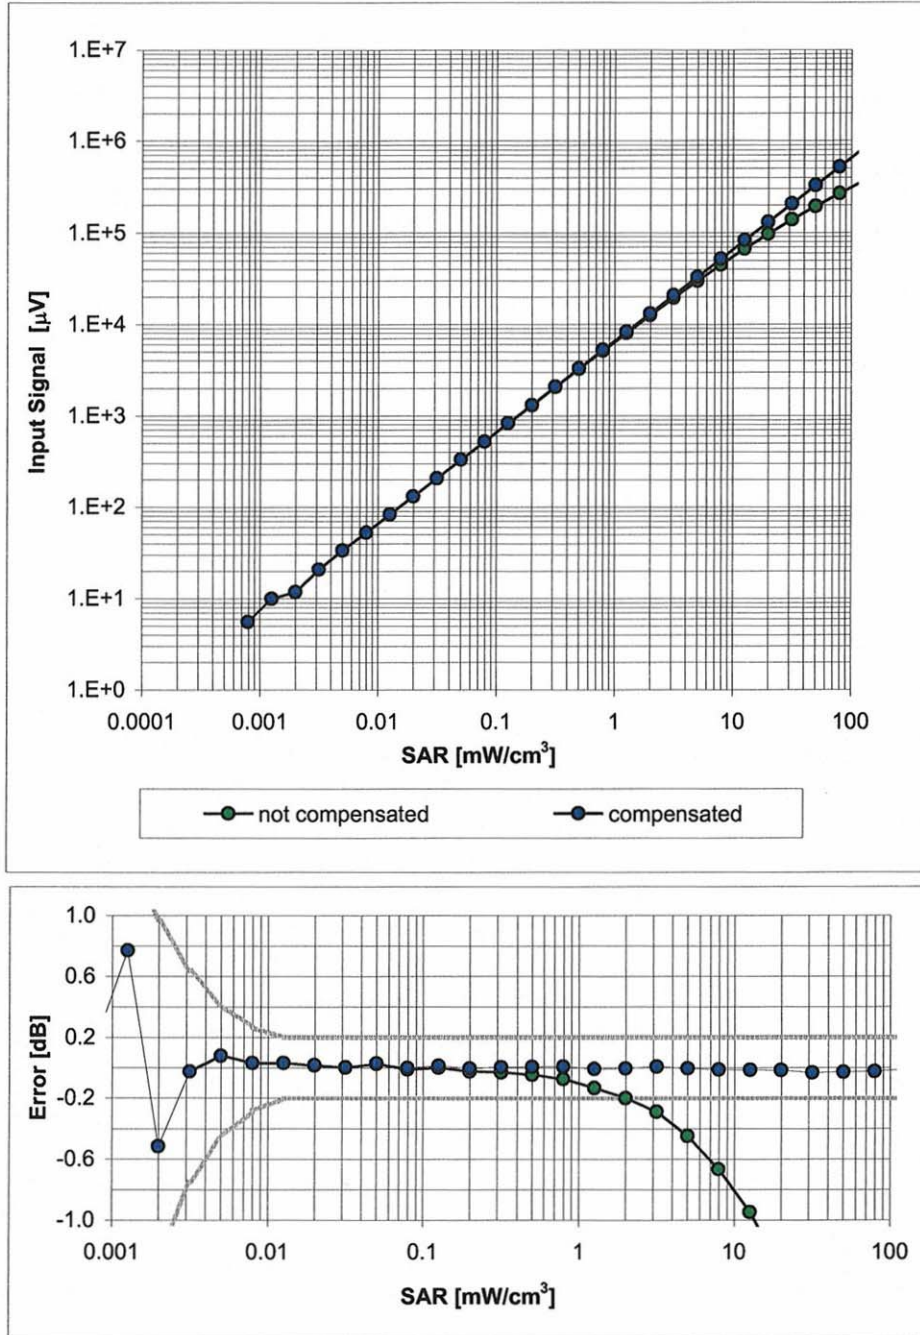

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

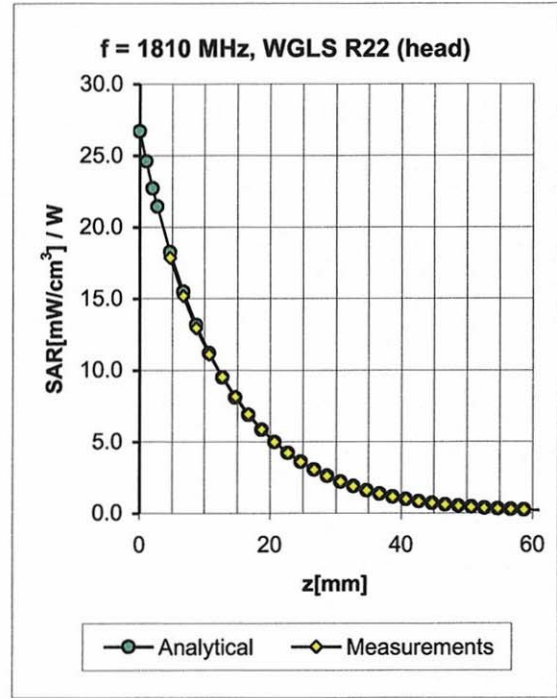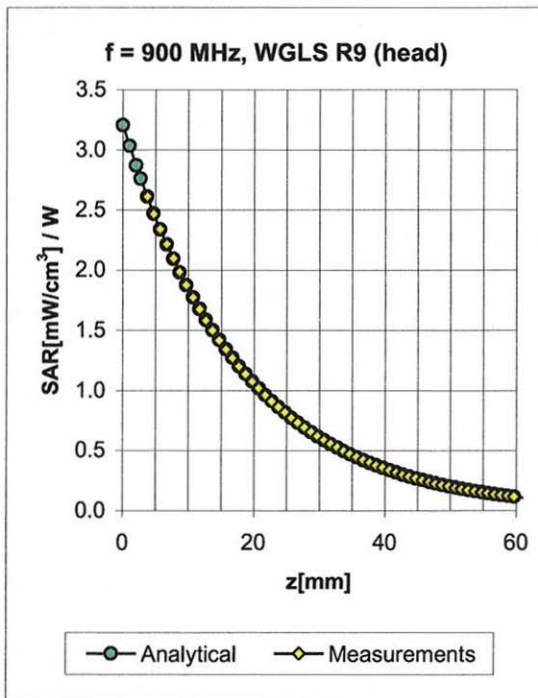


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.32	2.72	6.25 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.51	2.65	5.17 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.57	2.49	4.95 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.73	1.94	4.56 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.34	2.80	6.04 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.61	2.48	4.83 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.73	2.28	4.63 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.65	2.17	4.18 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

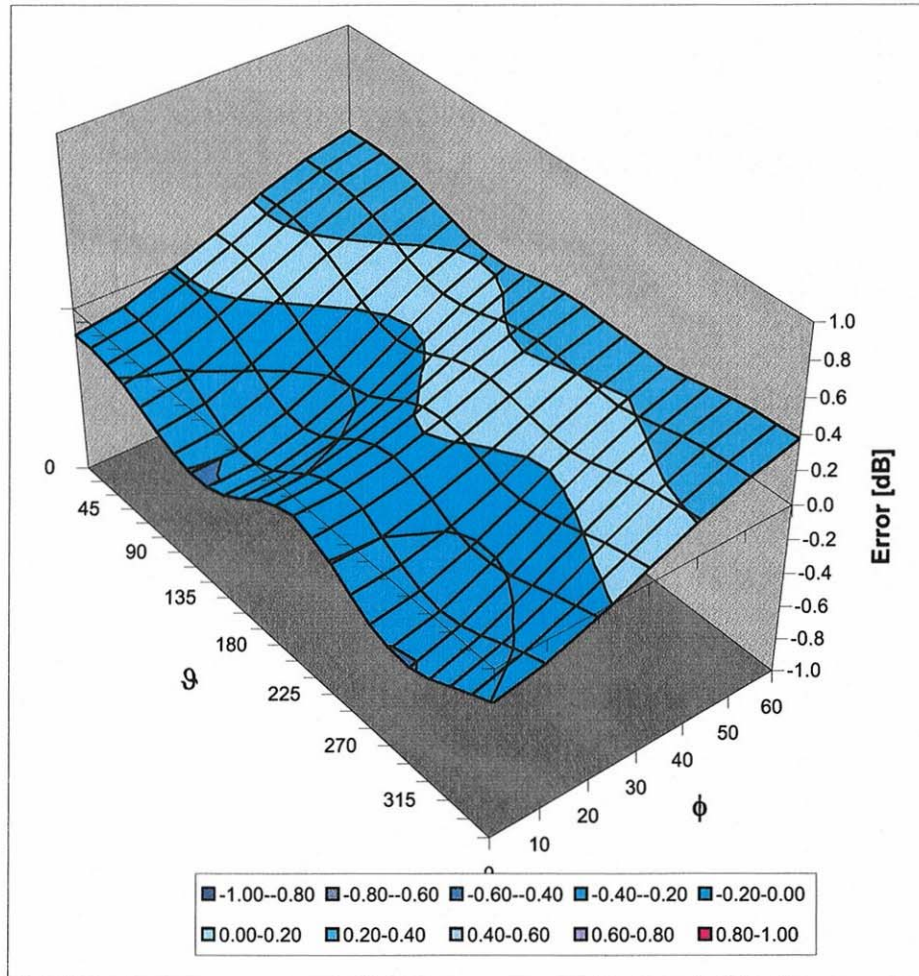

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ET3-1514_Jul07**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1514**

Calibration procedure(s) **QA CAL-01.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 11, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: July 12, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1514

Manufactured:	November 24, 1999
Last calibrated:	July 17, 2006
Recalibrated:	July 11, 2007

Calibrated for DASYS Systems

(Note: non-compatible with DASYS2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1514**Sensitivity in Free Space^A**

NormX	1.70 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.94 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.85 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	91 mV
DCP Y	91 mV
DCP Z	89 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **900 MHz** **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	10.2	5.3
SAR _{be} [%]	With Correction Algorithm	0.1	0.3

TSL **1810 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	14.0	9.1
SAR _{be} [%]	With Correction Algorithm	0.1	0.0

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

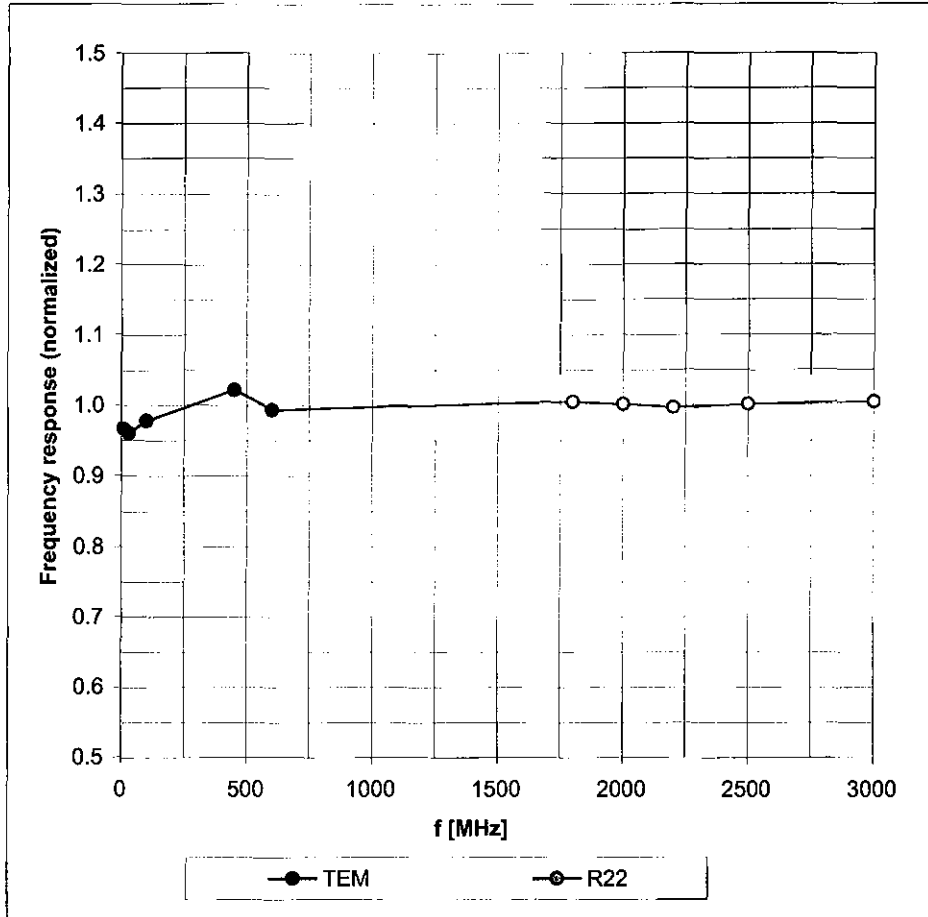


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

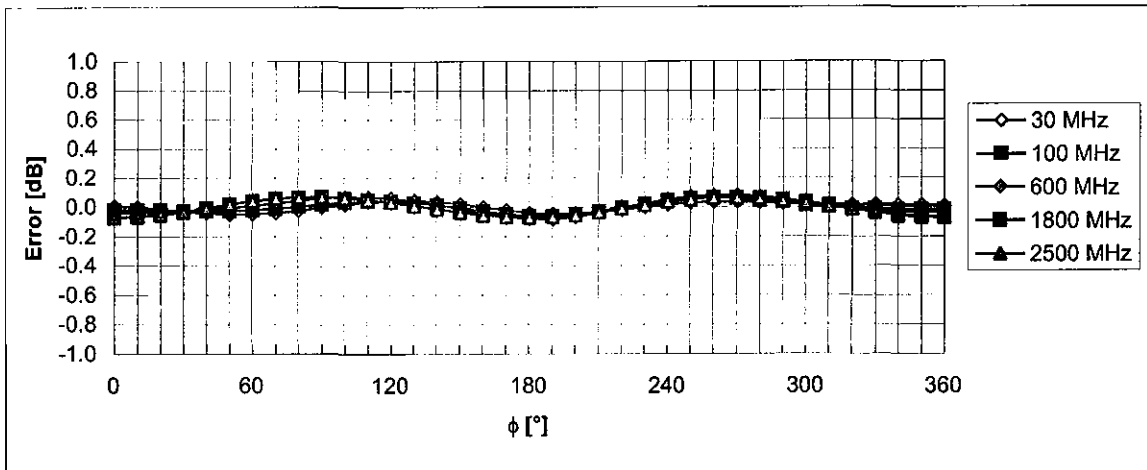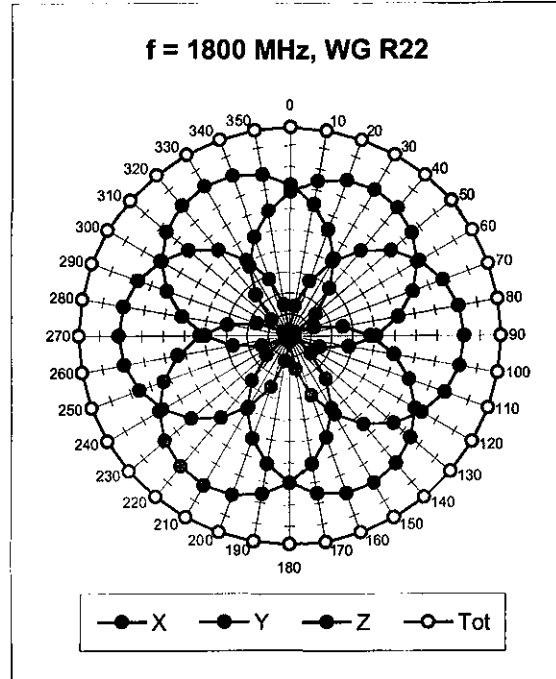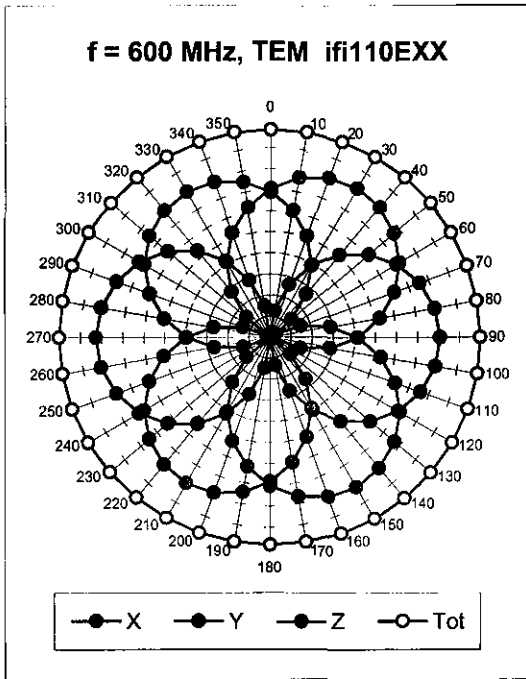



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (Waveguide R22, f = 1800 MHz)

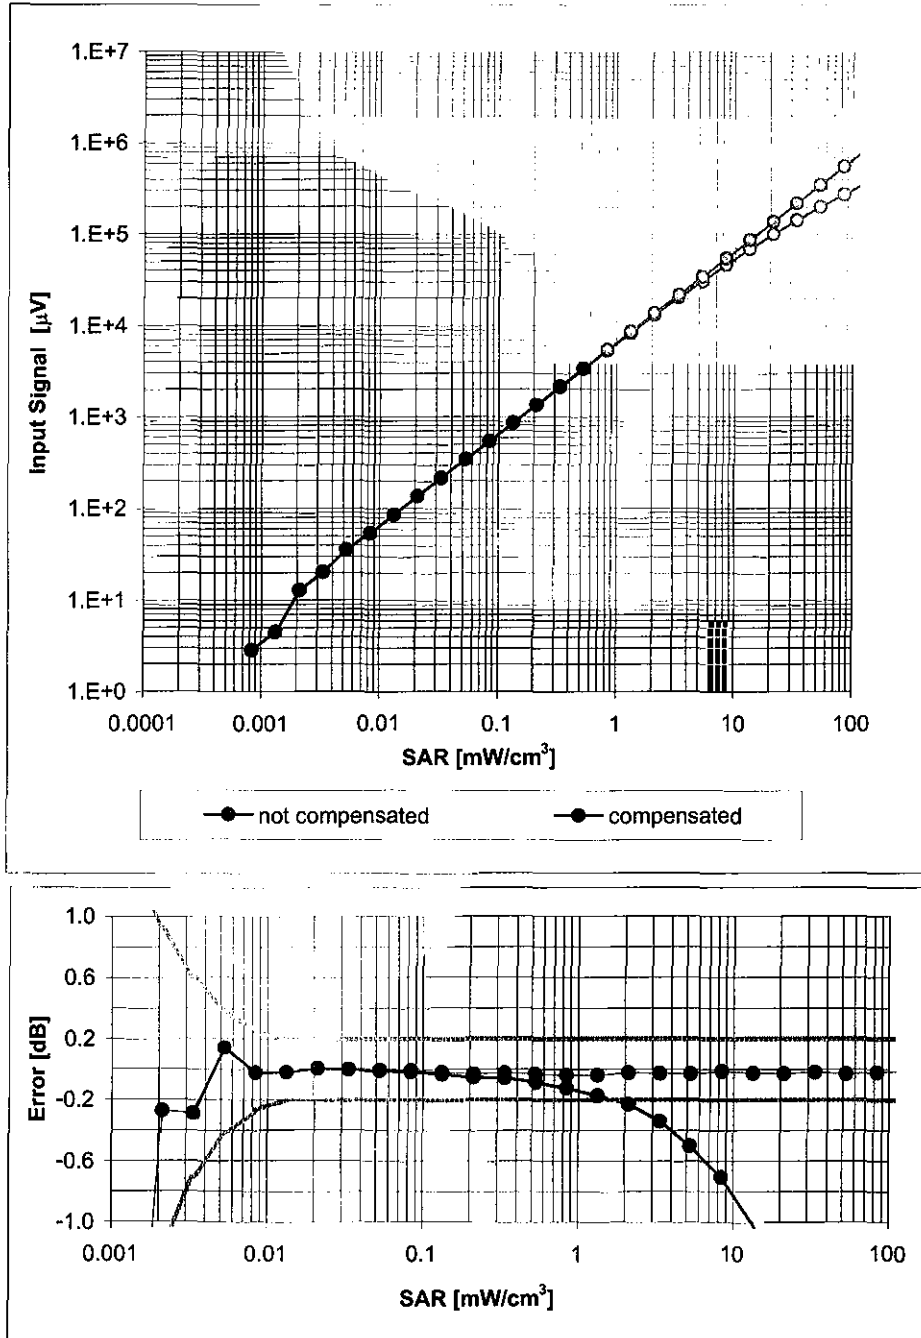

Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

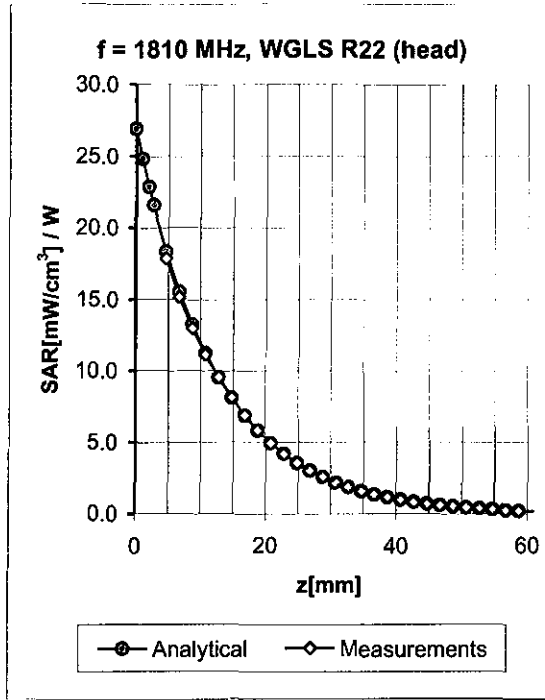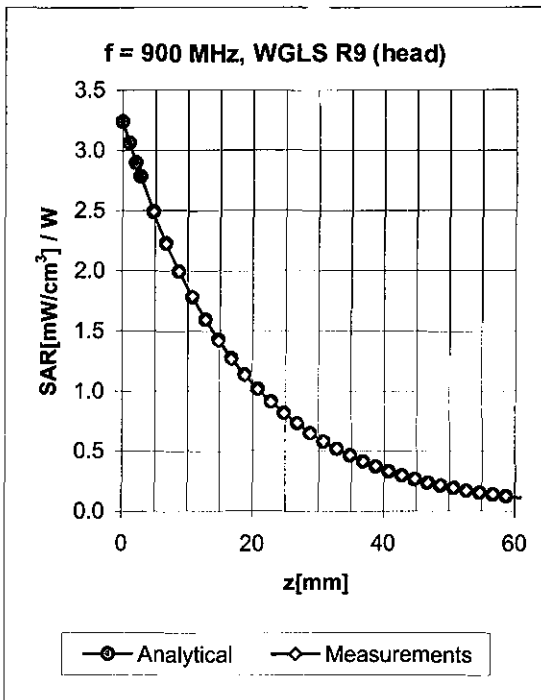


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.33	2.62	5.98 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.54	2.61	4.92 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.62	2.50	4.72 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.94	1.62	4.44 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.33	2.79	5.75 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.74	2.31	4.59 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.97	1.96	4.34 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.79	1.94	4.07 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ, ϑ), $f = 900$ MHz

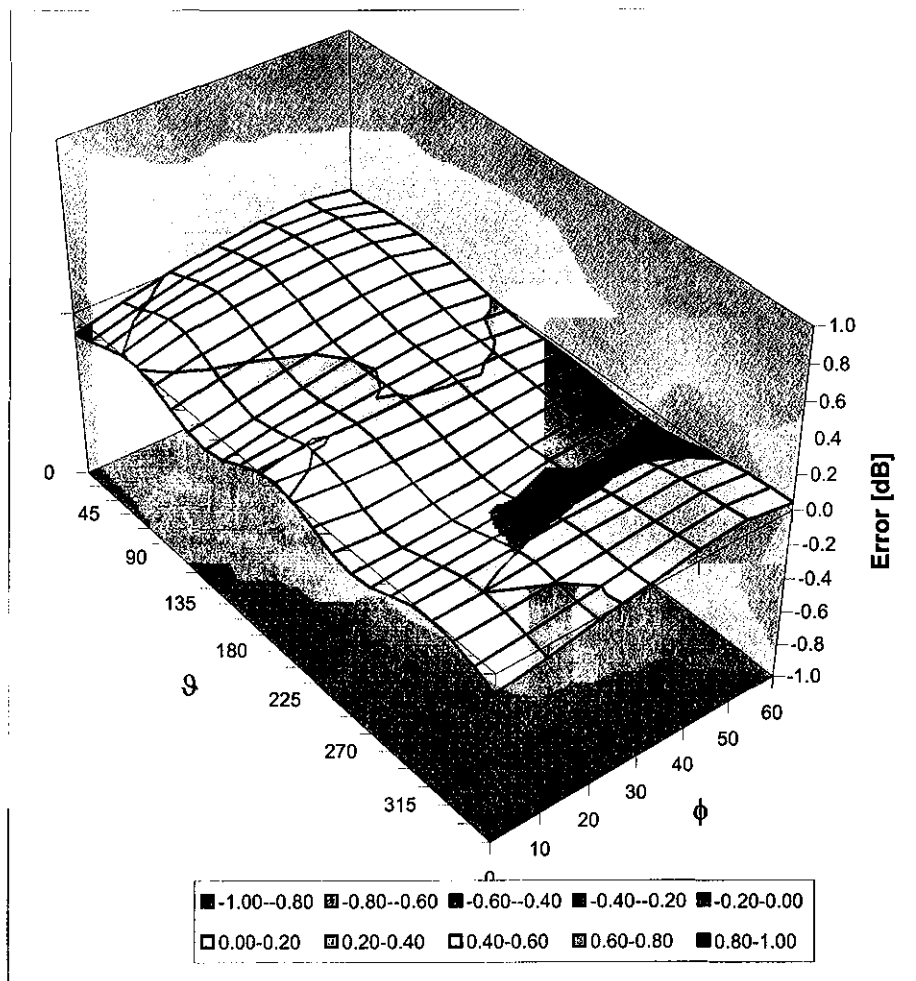

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Appendix 5

Measurement Uncertainty Budget

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$h = c \times f / e$	$i = c \times g / e$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	c_i (1 g)	c_i (10 g)	1 g u_i (±%)	10 g u_i (±%)	v_i
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty									
			RSS				11.1	10.8	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)									
			$k=2$				22.2	21.6	

Appendix 6

Dipole Characterization Certificate

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

900MHz	
IEEE/IEC Target:	10.8 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	10-May-06 to 18-April-07
# of tests performed:	1,562
Grand Average:	11.24 (W/kg)
% Delta (Average - IEEE1528 Target)	4.1%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
Applies to Dipole SN's: 55, 69, 77, 78, 79, 80, 91, 92, 93, 94, 95, 96, 97, 1d034, 1d035	


-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
900MHz	11.24	41.5 ± 5%	0.97 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-


1800MHz	
IEEE1528 Target:	38.1 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	10-May-06 to 18-April-07
# of tests performed:	1314
Grand Average:	37.5 (W/kg)
% Delta (Average - IEEE1528 Target)	-1.6%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 246tr, 250tr, 251tr, 259tr, 263tr, 271tr, 272tr, 276tr, 277tr, 279tr, 280tr, 281tr, 283tr, 284tr, 2d128, 2d129	

-New System Performance Check Targets- per WI-0396
 (based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
1800MHz	37.5	40.0 ± 5%	1.40 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

1800MHz	
Reference Target:	38.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	18-April-07 to 14-April-08
# of tests performed:	1,028
Grand Average:	37.7 (W/kg)
% Delta (Average - Reference Target)	-1.7%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 246tr, 250tr, 251tr, 259tr, 263tr, 271tr, 272tr, 276tr, 277tr, 279tr, 280tr, 281tr, 283tr, 284tr, 2d128, 2d129	

-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
1800MHz	37.7	40.0 ± 5%	1.40 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

2450MHz	
IEEE1528 Target:	52.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	10-May-06 to 18-April-07
# of tests performed:	32
Grand Average:	58.0 (W/kg)
% Delta (Average - IEEE1528 Target)	10.6%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 740, 766, 767, 788, 789	


-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
2450MHz	58.0	39.2 ± 5%	1.80 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments: