



MOTOROLA

Portable Cellular Phone SAR Test Report

Test Report #: 21026-1F
Date of Report: 10-Oct-2007
Date of Test: 31-Aug-2007 through 14-Sep-2007
FCC ID #: IHDP56HH2
Generic Name: MQ5-4411A24
Laboratory: Motorola Mobile Devices Business Product Safety & Compliance Laboratory
11th Floor, Hibrand Living Hall,
215, Yangae-Dong, Seocho-Gu, Seoul, South Korea, 137-130

Report Author: Jon Park
Senior Staff Engineer

This laboratory is accredited to ISO/IEC 17025-2005 to perform the following tests:

Accreditation:



TESTING CERT #2518-03

Tests:

Electromagnetic Specific Absorption Rate

Procedures:

IEC 62209-1
RSS-102
IEEE 1528 - 2003
FCC OET Bulletin 65 (*including Supplement C*)
Australian Communications Authority Radio
Communications (Electromagnetic Radiation – Human
Exposure) Standard 2003
CENELEC EN 50360 (2001)
CENELEC EN 50361 (2001)
ARIB Std. T-56 (2002)

On the following products or types of products:

On the following products or types of products: Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

Statement of Compliance:

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with IEEE 1528 / CENELEC EN62209-1 (2006), as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2007

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. Introduction	2
2. Description of the Device Under Test	2
2.1 Antenna description	2
2.2 Device description	2
3. Test Equipment Used	4
3.1 Dosimetric System	4
3.2 Additional Equipment	4
4. Electrical parameters of the tissue simulating liquid	5
5. System Accuracy Verification	6
6. Test Results	7
6.1 Head Adjacent Test Results	7
6.2 Body Worn Test Results	17
References	23
Appendix 1: SAR distribution comparison for system accuracy verification	24
Appendix 2: SAR distribution plots for Phantom Head Adjacent Use	25
Appendix 3: SAR distribution plots for Body Worn Configuration	26
Appendix 4: Probe Calibration Certificate	27
Appendix 5: Measurement Uncertainty Budget	28
Appendix 6: Photographs of the device under test	30
Appendix 7: Dipole Characterization Certificate	37

1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4] and [5]. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1g average set in [3] and 2.0W/kg in a 10g average set in [2].

For ANSI / IEEE C95.1 (1g), the final SAR reading for this phone is 0.98 W/kg for head adjacent use and 0.49 W/kg for body worn use. These measurements were performed using a Dasy4™ v4.7 system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich Switzerland.

2. Description of the Device Under Test

2.1 Antenna description

Type	Internal	
Location	Bottom of Transceiver	
Dimensions	Length	88 mm
	Width	7 mm
Configuration	FJA	

2.2 Device description

Serial Number	LMC0250047					
Mode(s) of Operation	GSM 850	GSM 900	GSM 1800	GSM 1900	Bluetooth	WiFi 802.11b/g
Modulation Mode(s)	GMSK	GMSK	GMSK	GMSK	GFSK	FDMS
Maximum Output Power Setting	32.30 dBm	33.00 dBm	30.50 dBm	30.50 dBm	4.00 dBm	15.20 dBm
Duty Cycle	1:8	1:8	1:8	1:8	1:1	1:1
Transmitting Frequency Range(s)	824.2-848.8 MHz	880.2 - 914.8 MHz	1710.2 - 1784.8 MHz	1850.2 - 1909.8 MHz	2400.0 - 2483.5 MHz	2412.0 – 2472.0 Mhz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype					
Device Category	Portable					
RF Exposure Limits	General Population / Uncontrolled					

MOTOROLA, INC. Portable Cellular Phone SAR Test Report Number: **21026-1F**

Mode(s) of Operation	GPRS 850				GPRS 900				GPRS 1800				GPRS 1900			
Modulation Mode(s)	GMSK				GMSK				GMSK				GMSK			
Maximum Output Power Setting	32.3 dBm	31.0 dBm	29.5 dBm	27.5 dBm	33.0 dBm	31.0 dBm	29.5 dBm	27.5 dBm	30.5 dBm	28.5 dBm	26.5 dBm	24.5 dBm	30.5 dBm	28.5 dBm	26.5 dBm	24.5 dBm
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				880.2 - 914.8 MHz				1710.2 - 1784.8 MHz				1850.2 - 1909.8 MHz			

Mode(s) of Operation	EDGE 850				EDGE 900				EDGE 1800				EDGE 1900			
Modulation Mode(s)	8PSK				8PSK				8PSK				8PSK			
Maximum Output Power Setting	27.5 dBm	26.5 dBm	24.5 dBm	22.5 dBm	27.5 dBm	26.5 dBm	24.5 dBm	22.5 dBm	26.5 dBm	25.5 dBm	23.5 dBm	21.5 dBm	26.5 dBm	25.5 dBm	23.5 dBm	21.5 dBm
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				880.2 - 914.8 MHz				1710.2 - 1784.8 MHz				1850.2 - 1909.8 MHz			

Note: Highest time-average power per band in bold type.

3. Test Equipment Used

3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall 10g RSS uncertainty of the measurement system is $\pm 10.8\%$ (K=1) with an expanded uncertainty of $\pm 21.6\%$ (K=2). The overall 1g RSS uncertainty of the measurement system is $\pm 11.1\%$ (K=1) with an expanded uncertainty of $\pm 22.2\%$ (K=2). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4W/kg to 10W/kg.

The list of calibrated equipment used for the measurements is shown in the following table.

Description	Serial Number	Cal Due Date
DASY4™ DAE3	386	13-Apr-2008
	383	24-Aug-2008
E-Field Probe ET3DV6	1390	24-Apr-2008
	1515	28-Aug-2008
Dipole Validation Kit, D900V2	97	1-May-2008
S.A.M. Phantom used for 800/900MHz	TP-1129	
Dipole Validation Kit, D1800V2	277tr	1-May-2008
S.A.M. Phantom used for 1800/1900/2450MHz	TP-1134	
Dipole Validation Kit, D2450V2	767	1-May-2008

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04840	02-Dec-2007
Power Meter E4419B	GB39511085	05-Dec-2007
Power Sensor #1 - 8481A	MY41095450	16-Feb-2008
Power Sensor #2 - 8481A	2702A82671	05-Dec-2007
Network Analyzer HP8753ES	US39172714	02-Mar-2008
Dielectric Probe Kit HP85070C	US99360207	

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with a HP85070 Dielectric Probe Kit. These values, along with the temperature of the simulated tissue are shown in the table below. The recommended limits for permittivity and conductivity are also shown. A mass density of $\rho=1\text{g/cm}^3$ was entered into the system in all the cases. It can be seen that the measured parameters are within tolerance of the recommended limits specified in [1] and [5].

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (°C)
835	Head	Measured, 03-Sep-2007	41.0	0.91	21.9
		Measured, 04-Sep-2007	40.6	0.90	21.2
		Measured, 12-Sep-2007	40.7	0.91	21.6
		Recommended Limits	41.5 $\pm$ 5%	0.90 $\pm$ 5%	18-25
	Body	Measured, 31-Aug-2007	54.4	0.99	20.9
		Recommended Limits	55.2 $\pm$ 5%	0.97 $\pm$ 5%	18-25
1880	Head	Measured, 04-Sep-2007	39.6	1.45	21.4
		Measured, 14-Sep-2007	40.5	1.46	21.6
		Recommended Limits	40.0 $\pm$ 5%	1.40 $\pm$ 5%	18-25
	Body	Measured, 04-Sep-2007	52.3	1.58	20.8
		Recommended Limits	53.3 $\pm$ 5%	1.52 $\pm$ 5%	18-25
2450	Head	Measured, 10-Sep-2007	38.8	1.83	21.1
		Recommended Limits	39.2 $\pm$ 10%	1.80 $\pm$ 5%	18-25
	Body	Measured, 10-Sep-2007	49.6	2.04	21.7
		Recommended Limits	52.7 $\pm$ 10%	1.95 $\pm$ 5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	835MHz / 900 MHz Head	835MHz / 900 MHz Body	1800MHz / 1900 MHz Head	1800 MHz / 1900 MHz Body	2450MHz Head	2450 MHz Body
Sugar	57	44.9	--	--	--	--
DGBE	--	--	47	30.8	--	30
Diacetin	--	--	--	--	51	--
Water	40.45	53.06	52.62	68.8	48.75	70
Salt	1.45	0.94	0.38	0.4	0.15	--
HEC	1	1	--	--	--	--
Bact.	0.1	0.1	--	--	0.1	--

5. System Accuracy Verification

A system accuracy verification of the DASY4™ was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within $\pm 10\%$ from the target SAR indicated in Appendix 7. These tests were done at 900MHz, 1800MHz, and 2450MHz. These frequencies are within $\pm 10\%$ of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted on the same days as the measurement of the DUT. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ± 0.5 cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

f (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ϵ_r	σ (S/m)		
900	Measured, 31-Aug-2007	12.08	40.2	0.97	21.3	21.6
	Measured, 03-Sep-2007	12.03	40.3	0.97	22.2	22.0
	Measured, 04-Sep-2007	11.85	39.9	0.96	21.8	22.0
	Measured, 12-Sep-2007	11.78	40.0	0.97	21.3	22.0
	Recommended Limits	11.24	41.5 $\pm 5\%$	0.97 $\pm 5\%$	18-25	18-25
1800	Measured, 04-Sep-2007	37.18	39.5	1.37	21.5	21.1
	Measured, 14-Sep-2007	36.78	40.3	1.38	21.8	20.7
	Recommended Limits	37.5	40.0 $\pm 5\%$	1.4 $\pm 5\%$	18-25	18-25
2450	Measured, 10-Sep-2007	53.00	38.8	1.83	21.3	21.5
	Recommended Limits	58.0	39.2 $\pm 10\%$	1.80 $\pm 5\%$	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	1390	900	6.38	8 of 9
		1810	5.22	8 of 9
	1515	900	6.50	8 of 9
		1810	5.21	8 of 9
		2450	4.64	8 of 9

6. Test Results

The test sample was operated using an actual transmission through a base station simulator. The base station simulator was setup to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in [1], [4] and [5]. The phone was positioned into these configurations using the device holder supplied with the DASY4™ SAR measurement system. The measured dielectric constant of the material used for the device holder is less than 2.9 and the loss tangent is less than 0.02 ($\pm 30\%$) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and used for measurements. The grid spacing of the course scan was set to 15cm as shown in the SAR plots included in Appendix 2 and 3. Please refer to the DASY4™ manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone model covered by this report has the following battery options:

Model SNN5831A 930 mAH Battery

Model SNN5768A 820 mAH Battery

Model SNN5779B 750 mAH Battery

The battery with the highest capacity is the SNN5831A. This battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configuration that resulted in the highest SAR values were tested using the other batteries listed above.

Per the “SAR Measurement Procedures for 802.11 a/b/g Transmitters” released in October, 2006, 802.11 b and 802.11 g modes were considered. The conducted power measurements for each mode are shown in the table below.

Freq (MHz)	Conducted power (dBm) for 802.11b/g modes		
	Channel	Data rate	
		11Mbps (802.11b)	33Mbps (802.11g)
2450MHz	1	13.08	13.14
	6	14.39	13.51
	11	13.89	12.81

6.1 Head Adjacent Test Results

The SAR results shown in tables 1 through 17 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0cm $\pm$ 0.5cm.

MOTOROLA, INC. Portable Cellular Phone SAR Test Report Number: **21026-1F**

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	1390	900	6.38	8 of 9
		1810	5.22	8 of 9
	1515	900	6.50	8 of 9
		1810	5.21	8 of 9
		2450	4.64	8 of 9

Left Head Cheek Position – Slider Down								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.6	-0.05	0.358	0.36	0.513	0.52
	Channel 251	32.33						
1900MHz	Channel 512	30.40	22.0	0.11	0.536	0.54	0.933	0.93
	Channel 661	30.62	22.1	-0.02	0.495	0.50	0.862	0.87
	Channel 810	30.66	21.8	0.00	0.516	0.52	0.913	0.91
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.5	-0.29	0.022	0.02	0.0403	0.04
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.38		0.56
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.56		0.97

Table 1: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.5	-0.01	0.362	0.36	0.512	0.51
	Channel 251	32.33						
	Channel 885	30.54						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.9	0.04	0.463	0.46	0.775	0.78
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.1	0.08	0.0258	0.03	0.0498	0.05
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.39		0.56
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.49		0.83

Table 2: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Highest Cheek Position with Battery SNN5768A – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Left</i>	Channel 128	32.37						
	Channel 190	32.37	21.3	-0.01	0.353	0.35	0.51	0.51
	Channel 251	32.33						
	Channel 885	30.54	20.6	-0.08	0.781	0.80		
1900MHz <i>Left</i>	Channel 512	30.40	20.7	0.06	0.523	0.52	0.921	0.92
	Channel 661	30.62						
	Channel 810	30.66						
802.11b 2450 MHz <i>Left</i>	Channel 1	13.08						
	Channel 6	14.39	21.6	0.04	0.0217	0.02	0.0394	0.04
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.37		0.56
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.54		0.96

Table 3: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Highest Cheek Position with Battery SNN5779B – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Left</i>	Channel 128	32.37						
	Channel 190	32.37	21.3	-0.02	0.353	0.35	0.51	0.51
	Channel 251	32.33						
	Channel 885	30.54	20.5	-0.17	0.82	0.85		
1900MHz <i>Left</i>	Channel 512	30.40	21.6	0.05	0.537	0.54	0.937	0.94
	Channel 661	30.62						
	Channel 810	30.66						
802.11b 2450 MHz <i>Left</i>	Channel 1	13.08						
	Channel 6	14.39	21.5	-0.09	0.0232	0.02	0.0426	0.04
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.37		0.54
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.56		0.98

Table 4: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head Cheek Position – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	22.1	0.02	0.486	0.49	0.673	0.67
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	22.2	-0.02	0.137	0.14	0.20	0.20
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.4	-0.12	0.00881	0.01	0.0159	0.02
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.50		0.69
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.15		0.22

Table 5: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.9	0.00	0.524	0.52	0.726	0.73
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.9	-0.05	0.168	0.17	0.264	0.27
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.3	-0.07	0.00928	0.01	0.0191	0.02
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.53		0.75
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.18		0.29

Table 6: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Highest Cheek Position with Battery SNN5768A – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Right</i>	Channel 128	32.37						
	Channel 190	32.37	21.8	0.01	0.509	0.51	0.704	0.70
	Channel 251	32.33						
1900MHz <i>Right</i>	Channel 512	30.40	21.5	-0.03	0.169	0.17	0.266	0.27
	Channel 661	30.62						
	Channel 810	30.66						
802.11b 2450 MHz <i>Right</i>	Channel 1	13.08						
	Channel 6	14.39	20.9	0.03	0.00887	0.01	0.0184	0.02
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.52		0.72
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.18		0.29

Table 7: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Highest Cheek Position with Battery SNN5779B – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Right</i>	Channel 128	32.37						
	Channel 190	32.37	21.7	0.01	0.507	0.51	0.7	0.70
	Channel 251	32.33						
1900MHz <i>Right</i>	Channel 512	30.40	21.4	-0.01	0.17	0.17	0.266	0.27
	Channel 661	30.62						
	Channel 810	30.66						
802.11b 2450 MHz <i>Right</i>	Channel 1	13.08						
	Channel 6	14.39	20.9	0.10	0.00888	0.01	0.0184	0.02
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.52		0.72
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.18		0.29

Table 8: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.5	0.11	0.189	0.19	0.255	0.26
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.8	-0.04	0.0818	0.08	0.128	0.13
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.4	0.10	0.029	0.03	0.0516	0.05
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.21		0.31
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.11		0.18

Table 9: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.4	0.01	0.197	0.20	0.266	0.27
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.9	0.05	0.0636	0.06	0.0922	0.09
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.2	-0.04	0.0281	0.03	0.053	0.05
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.23		0.32
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.09		0.14

Table 10: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Highest 15° Tilt Position with Battery SNN5768A – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Right</i>	Channel 128	32.37						
	Channel 190	32.37	21.2	-0.01	0.204	0.20	0.276	0.28
	Channel 251	32.33						
1900MHz <i>Left</i>	Channel 512	30.40						
	Channel 661	30.62	21.6	-0.03	0.0828	0.08	0.131	0.13
	Channel 810	30.66						
802.11b 2450 MHz <i>Right</i>	Channel 1	13.08						
	Channel 6	14.39	20.7	0.15	0.0288	0.03	0.0526	0.05
	Channel 11	13.89						
802.11b 2450 MHz <i>Left</i>	Channel 1	13.08						
	Channel 6	14.39	21.4	-0.12	0.0291	0.03	0.0513	0.05
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.23		0.33
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.11		0.18

Table 11: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Highest 15° Tilt Position with Battery SNN5779B – Slider Down								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Right</i>	Channel 128	32.37						
	Channel 190	32.37	21.2	0.06	0.206	0.21	0.279	0.28
	Channel 251	32.33						
1900MHz <i>Left</i>	Channel 512	30.40						
	Channel 661	30.62	21.5	-0.05	0.0822	0.08	0.129	0.13
	Channel 810	30.66						
802.11b 2450 MHz <i>Right</i>	Channel 1	13.08						
	Channel 6	14.39	20.8	-0.25	0.0289	0.03	0.0539	0.06
	Channel 11	13.89						
802.11b 2450 MHz <i>Left</i>	Channel 1	13.08						
	Channel 6	14.39	21.3	0.04	0.0293	0.03	0.0515	0.05
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.24		0.34
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.11		0.18

Table 12: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	22.0	0.00	0.346	0.35	0.476	0.48
	Channel 251	32.33						
	Channel 885	30.54						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	22.1	0.00	0.0692	0.07	0.114	0.11
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.3	-0.13	0.00547	0.01	0.00948	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.36		0.49
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.08		0.12

Table 13: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.8	0.07	0.347	0.35	0.476	0.48
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.8	0.05	0.0538	0.05	0.0899	0.09
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.2	-0.34	0.00736	0.01	0.0146	0.02
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.36		0.50
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.06		0.11

Table 14: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Highest 15° Tilt Position with Battery SNN5768A – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Right</i>	Channel 128	32.37						
	Channel 190	32.37	21.6	-0.01	0.341	0.34	0.468	0.47
	Channel 251	32.33						
1900MHz <i>Left</i>	Channel 512	30.40						
	Channel 661	30.62	21.4	0.06	0.0646	0.06	0.107	0.11
	Channel 810	30.66						
802.11b 2450 MHz <i>Right</i>	Channel 1	13.08						
	Channel 6	14.39	20.9	0.26	0.00763	0.01	0.0155	0.02
	Channel 11	13.89						
802.11b 2450 MHz <i>Left</i>	Channel 1	13.08						
	Channel 6	14.39	21.3	0.02	0.00558	0.01	0.0102	0.02
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.35		0.49
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.07		0.13

Table 15: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Highest 15° Tilt Position with Battery SNN5779B – Slider Up								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Right</i>	Channel 128	32.37						
	Channel 190	32.37	21.6	-0.20	0.353	0.37	0.486	0.51
	Channel 251	32.33						
1900MHz <i>Left</i>	Channel 512	30.40						
	Channel 661	30.62	21.3	-0.07	0.0592	0.06	0.0969	0.10
	Channel 810	30.66						
802.11b 2450 MHz <i>Right</i>	Channel 1	13.08						
	Channel 6	14.39	20.8	-0.11	0.00755	0.01	0.015	0.02
	Channel 11	13.89						
802.11b 2450 MHz <i>Left</i>	Channel 1	13.08						
	Channel 6	14.39	20.9	-0.36	0.00541	0.01	0.00996	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.38		0.53
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.07		0.11

Table 16: SAR measurement results at the highest possible output power, measured in a 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Highest of Extrapolated SAR Values (including 802.11b summation)							
<i>f</i> (MHz)	Description	<i>10 g SAR value</i>			<i>1 g SAR value</i>		
		Original Measurement (W/kg)	Wi-Fi Measurement (W/kg)	Summation (W/kg)	Original Measurement (W/kg)	Wi-Fi Measurement (W/kg)	Summation (W/kg)
850 MHz	Right Head Cheek Slider Up with Battery SNN5831A	0.52	0.01	0.53	0.73	0.02	0.75
1900 MHz	Left Head Cheek Slider Down with Battery SNN5779B	0.54	0.02	0.56	0.94	0.04	0.98

Table 17: SAR measurement results at the highest possible output power, calculated for the head position against the ICNIRP and ANSI SAR Limit.

6.2 Body Worn Test Results

The SAR results shown in tables 18 through 26 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. In addition to accessory testing, the cellular phone was tested with the front and back of the phone facing the phantom. For voice mode operation, the phone was placed as a distance of 15mm from the phantom. For data mode operation, the phone was placed as a distance of 25mm from the phantom. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There is one Body-Worn Accessories available for this phone:
SYN1531A Pouch

The DUT is multislot Class 6/Class 10 (2 timeslots in uplink), Class 11 (3 timeslots in uplink), and Class 12 (4 timeslots in uplink) capable in GPRS and EDGE (8PSK) modes. The software within the phone has been designed to reduce the peak power of the pulse when these multislot classes are being used. The peak power values for each mode and class are given in the tables in section 2.2. The worst-case configuration is found in Class 10 on GPRS 1800, 1900, EDGE 850, 900, 1800, 1900 and Class 11 on GPRS 850 and 900, when comparing the average power increases (due to additional timeslots) and power reductions for each multislot class. For this reason, multislot Class 10 was used to perform SAR tests in both GPRS 1800, 1900 and EDGE 850, 900, 1800, 1900 modes and Class 11 was used to perform SAR tests in GPRS 850, 900 Modes.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	1390	900	6.13	8 of 9
		1810	4.89	8 of 9
	1515	900	6.09	8 of 9
		1810	4.73	8 of 9
		2450	4.06	8 of 9

Body-Worn; Front of Phone 15mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.0	0.02	0.284	0.28	0.391	0.39
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.8	0.00	0.137	0.14	0.226	0.23
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.8	0.06	0.00642	0.01	0.0111	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.29		0.40
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.15		0.24

Table 18: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Back of Phone 15mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.37						
	Channel 190	32.37	21.0	0.01	0.30	0.30	0.425	0.43
	Channel 251	32.33						
1900MHz	Channel 512	30.40						
	Channel 661	30.62	21.8	0.02	0.119	0.12	0.186	0.19
	Channel 810	30.66						
802.11b 2450 MHz	Channel 1	13.08						
	Channel 6	14.39	21.7	-0.19	0.0304	0.03	0.0578	0.06
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.33		0.49
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.15		0.25

Table 19: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body Worn; Noted Facing of Phone 15 mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Bluetooth, Back of Phone</i>	Channel 128	32.37						
	Channel 190	32.37	20.9	-0.04	0.302	0.30	0.428	0.43
	Channel 251	32.33						
1900MHz <i>Bluetooth, Front of Phone</i>	Channel 512	30.40						
	Channel 661	30.62	21.7	0.04	0.172	0.17	0.283	0.28
	Channel 810	30.66						
802.11b 2450 MHz <i>Back of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.7	-0.19	0.0304	0.03	0.0578	0.06
	Channel 11	13.89						
802.11b 2450 MHz <i>Front of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.8	0.06	0.00642	0.01	0.0111	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.33		0.49
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.18		0.29

Table 20: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body Worn; Noted Facing of Phone and Mode 25 mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz EDGE Class10, <i>Back of Phone</i>	Channel 128	27.55						
	Channel 190	27.52	21.6	0.02	0.0691	0.07	0.0954	0.10
	Channel 251	27.35						
1900MHz EDGE Class10, <i>Front of Phone</i>	Channel 512	26.35						
	Channel 661	26.55	20.9	0.00	0.0331	0.03	0.0528	0.05
	Channel 810	26.65						
802.11b 2450 MHz <i>Back of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.5	0.01	0.0132	0.01	0.0223	0.02
	Channel 11	13.89						
802.11b 2450 MHz <i>Front of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.4	0.23	0.00333	0.00	0.00517	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.08		0.12
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.03		0.06

Table 21: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body Worn; Noted Facing of Phone and Mode 25 mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz GPRS Class 11 <i>Back of Phone</i>	Channel 128	32.37						
	Channel 190	32.37	21.7	0.06	0.2	0.20	0.275	0.28
	Channel 251	32.33						
1900MHz GPRS Class 10 <i>Front of Phone</i>	Channel 512	30.40						
	Channel 661	30.62	21.5	-0.05	0.0769	0.08	0.122	0.12
	Channel 810	30.66						
802.11b 2450 MHz <i>Back of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.5	0.01	0.0132	0.01	0.0223	0.02
	Channel 11	13.89						
802.11b 2450 MHz <i>Front of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.4	0.23	0.00333	0.00	0.00517	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.21		0.30
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.08		0.13

Table 22: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Highest Body-Worn Configuration with Battery SNN5768A								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Bluetooth Back of Phone</i>	Channel 128	32.37						
	Channel 190	32.37	21.5	-0.04	0.284	0.29	0.402	0.41
	Channel 251	32.33						
1900MHz <i>Bluetooth Front of Phone</i>	Channel 512	30.40						
	Channel 661	30.62	20.8	0.04	0.205	0.21	0.345	0.35
	Channel 810	30.66						
802.11b 2450 MHz <i>Back of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.8	-0.25	0.0305	0.03	0.0569	0.06
	Channel 11	13.89						
802.11b 2450 MHz <i>Front of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	22.0	0.14	0.00709	0.01	0.012	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.32		0.47
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.22		0.36

Table 23: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Highest Body-Worn Configuration with Battery SNN5779B								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Bluetooth Back of Phone</i>	Channel 128	32.37						
	Channel 190	32.37	21.4	-0.06	0.284	0.29	0.399	0.40
	Channel 251	32.33						
1900MHz <i>Bluetooth Front of Phone</i>	Channel 512	30.40						
	Channel 661	30.62	20.7	-0.03	0.204	0.21	0.343	0.35
	Channel 810	30.66						
802.11b 2450 MHz <i>Back of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.5	0.21	0.0298	0.03	0.0564	0.06
	Channel 11	13.89						
802.11b 2450 MHz <i>Front of Phone</i>	Channel 1	13.08						
	Channel 6	14.39	21.6	0.06	0.00691	0.01	0.0116	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.32		0.46
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.22		0.36

Table 24: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Accessory: <i>Noted Highest Body-Worn Configuration with SYN1531A Pouch</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz <i>Bluetooth Back of Phone Battery SNN5831A</i>	Channel 128	32.37						
	Channel 190	32.37	21.2	-0.03	0.262	0.26	0.371	0.37
	Channel 251	32.33						
1900MHz <i>Bluetooth Front of Phone, Battery SNN5768A</i>	Channel 512	30.40						
	Channel 661	30.62	20.6	0.03	0.169	0.17	0.276	0.28
	Channel 810	30.66						
802.11b 2450 MHz <i>Back of Phone Battery SNN5831A</i>	Channel 1	13.08						
	Channel 6	14.39	21.0	-0.49	0.0229	0.03	0.0415	0.05
	Channel 11	13.89						
802.11b 2450 MHz <i>Front of Phone, Battery SNN5768A</i>	Channel 1	13.08						
	Channel 6	14.39	21.0	-0.07	0.00533	0.01	0.00919	0.01
	Channel 11	13.89						
850 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.29		0.42
1900 MHz & 802.11b	summation of extrapolated SAR values	N/A				0.18		0.29

Table 25: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Highest of Extrapolated SAR Values (including 802.11b summation)							
<i>f</i> (MHz)	Description	10 g SAR value			1 g SAR value		
		Original Measurement (W/kg)	Wi-Fi Measurement (W/kg)	Summation (W/kg)	Original Measurement (W/kg)	Wi-Fi Measurement (W/kg)	Summation (W/kg)
850 MHz	Back of Phone 15mm from Phantom with Bluetooth Enabled using Battery SNN55831A	0.30	0.03	0.33	0.43	0.06	0.49
1900 MHz	Front of Phone 15mm from Phantom with Bluetooth Enabled using Battery SNN5768A	0.21	0.01	0.22	0.35	0.01	0.36

Table 26: SAR measurement results at the highest possible output power, calculated for the body-worn position against the ICNIRP and ANSI SAR Limit.

References

- [1] CENELEC, en62209-1:2006 “Human Exposure to Radio Frequency Fields From Hand - Held and Body - Mounted Wireless Communication Devices – Human Models, Instrumentation, and Procedures”
- [2] CENELEC, en50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300MHz – 3GHz)”.
- [3] ANSI / IEEE, C95.1 1999 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 8/31/2007 7:14:32 AM

Test Laboratory: Motorola**083107_900MHz**

Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 097 PM1 Power = 200 mW
Sim.Temp@meas = 22.21C Sim.Temp@SPC = 21.6C Room Temp @ SPC = 21.3C
Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(6.38, 6.38, 6.38); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.29 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.8 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.62 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.8 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 3.66 W/kg



SAR(1 g) = 2.43 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.63 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 2.66 mW/g

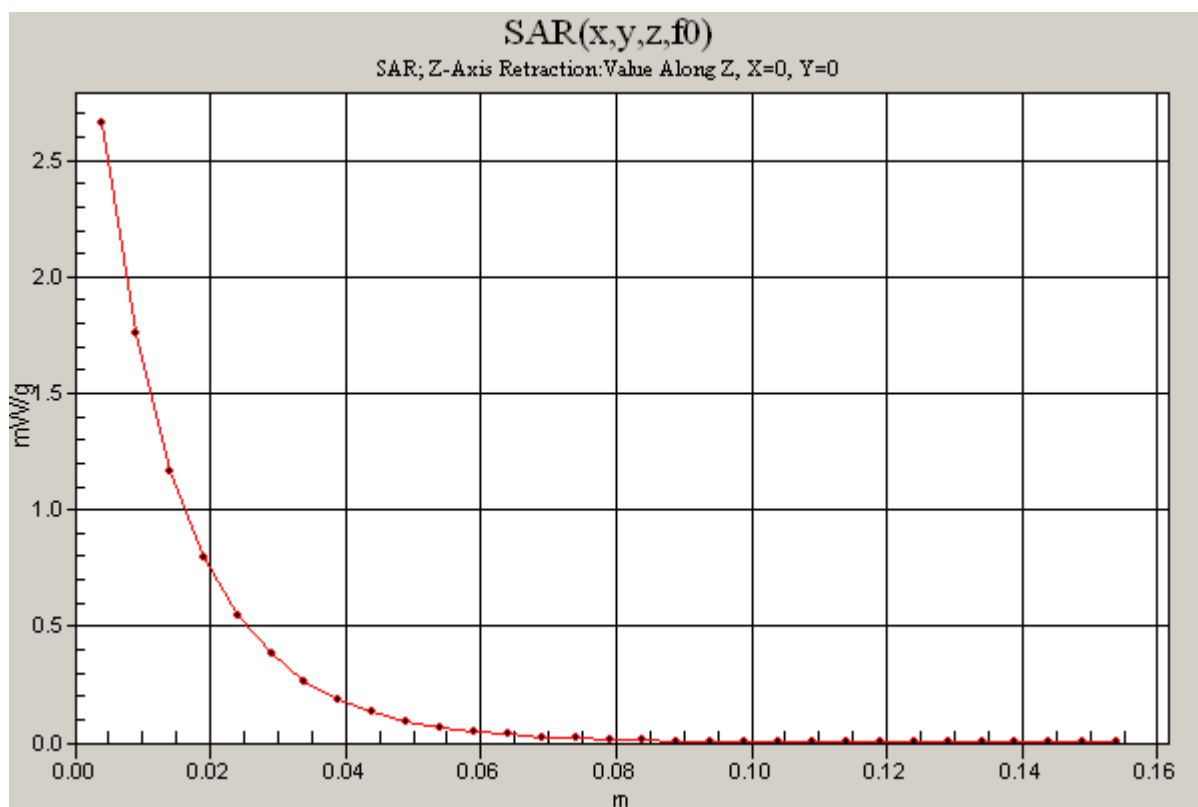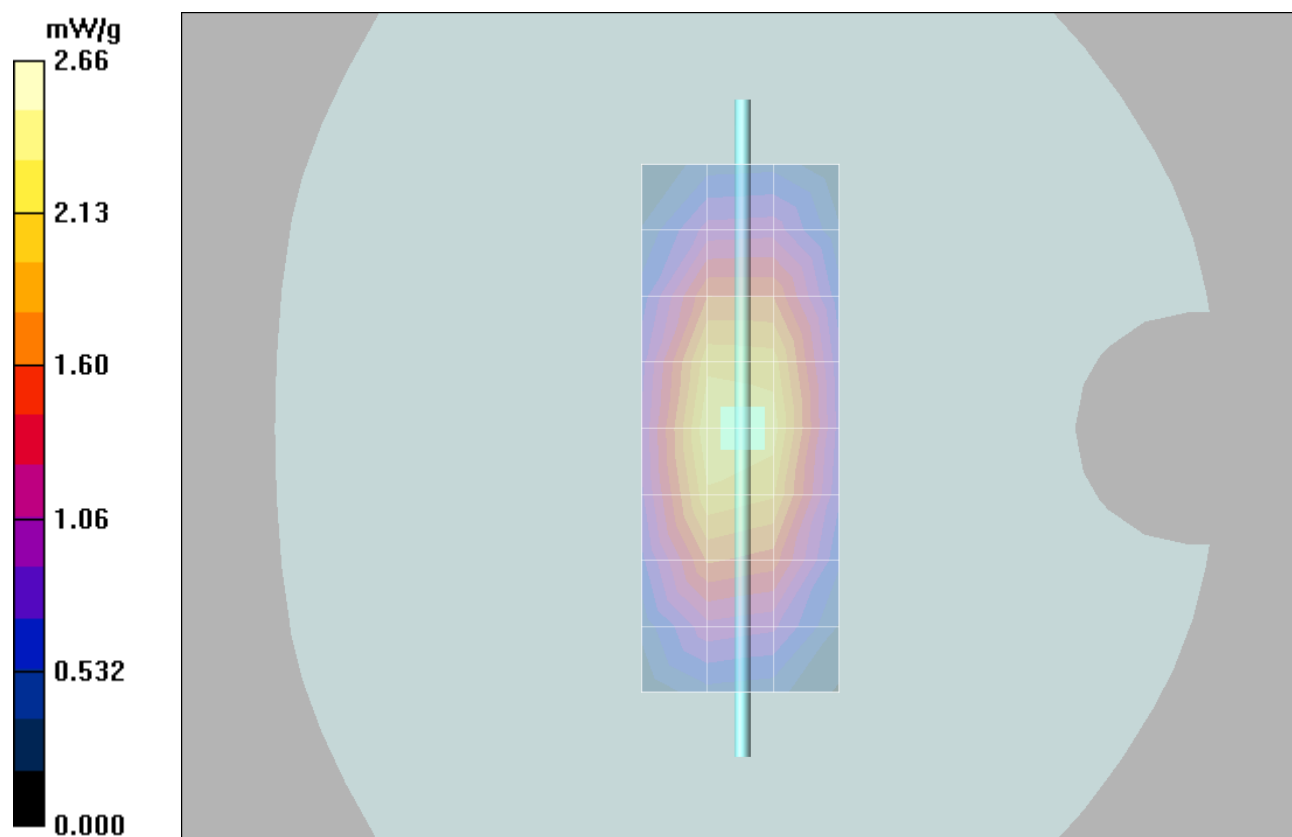

Date/Time: 9/3/2007 7:25:54 AM

Test Laboratory: Motorola**090307_900MHz**

Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 097 PM1 Power = 200 mW
PM2 Sim.Temp@meas = 22.34C Sim.Temp@SPC = 22C Room Temp @ SPC = 22.2C
Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(6.38, 6.38, 6.38); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.29 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.9 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.63 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.9 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 3.61 W/kg



SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.62 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 2.64 mW/g

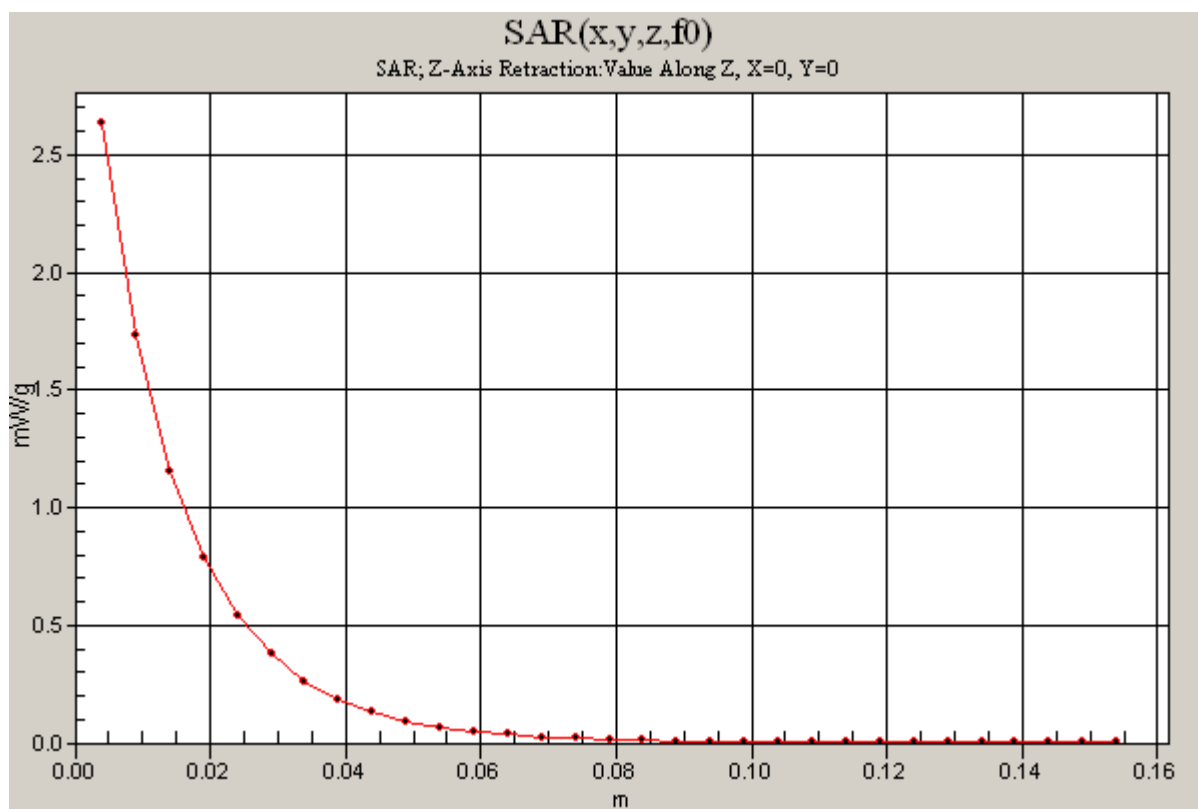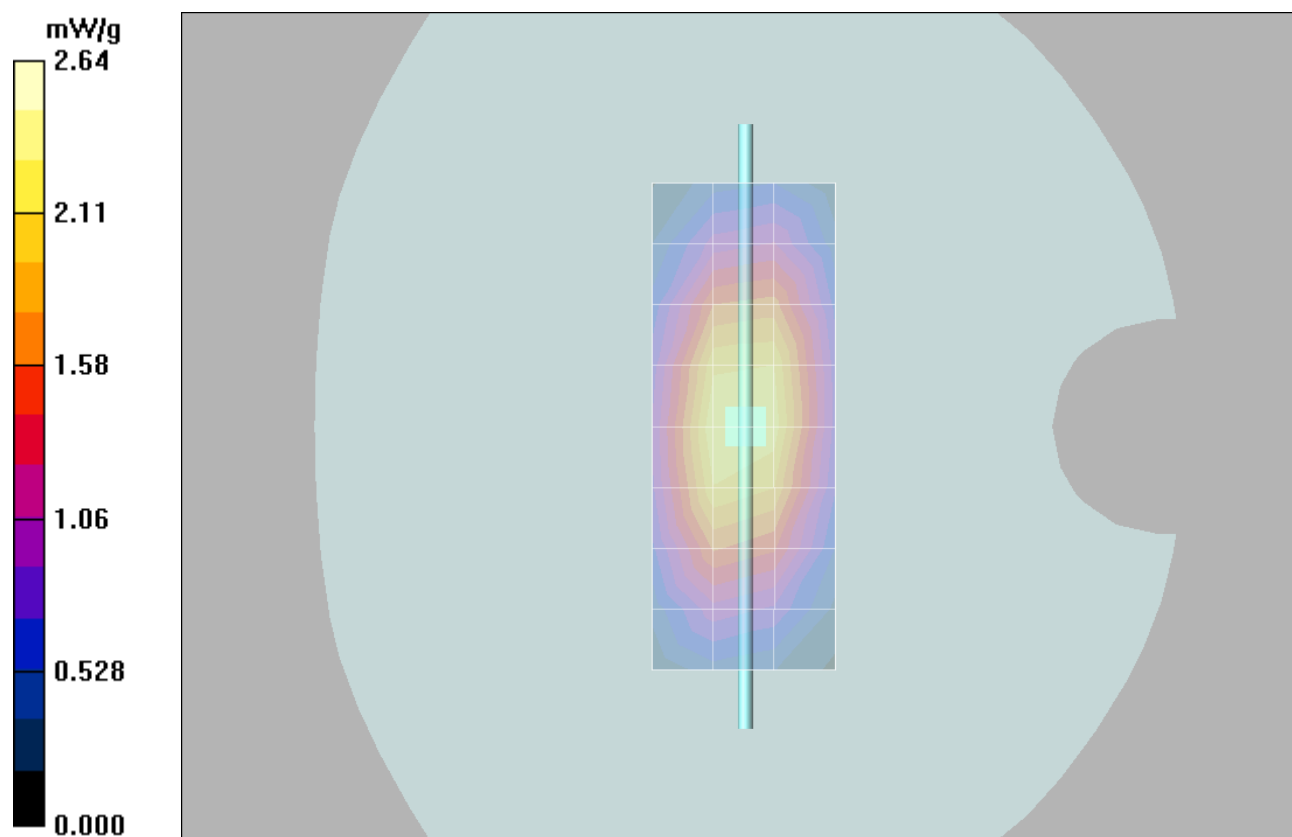

Date/Time: 9/4/2007 7:22:37 AM

Test Laboratory: Motorola 090407_900MHz

Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 097 PM1 Power = 200 mW
Sim.Temp@meas = 21.98C Sim.Temp@SPC = 22C Room Temp @ SPC = 21.8C
Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(6.38, 6.38, 6.38); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.28 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.6 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.52 mW/g

Maximum value of SAR (measured) = 2.57 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.6 V/m; Power Drift = 0.048 dB



Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.52 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 2.60 mW/g

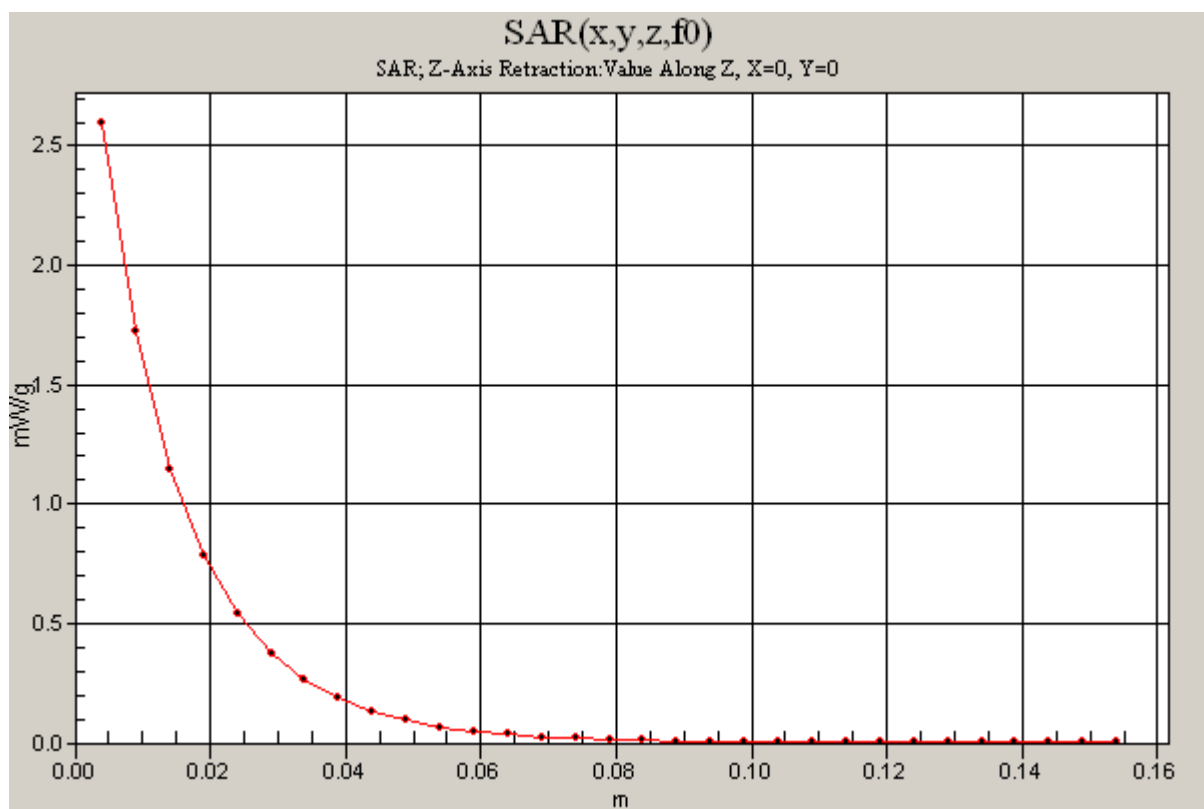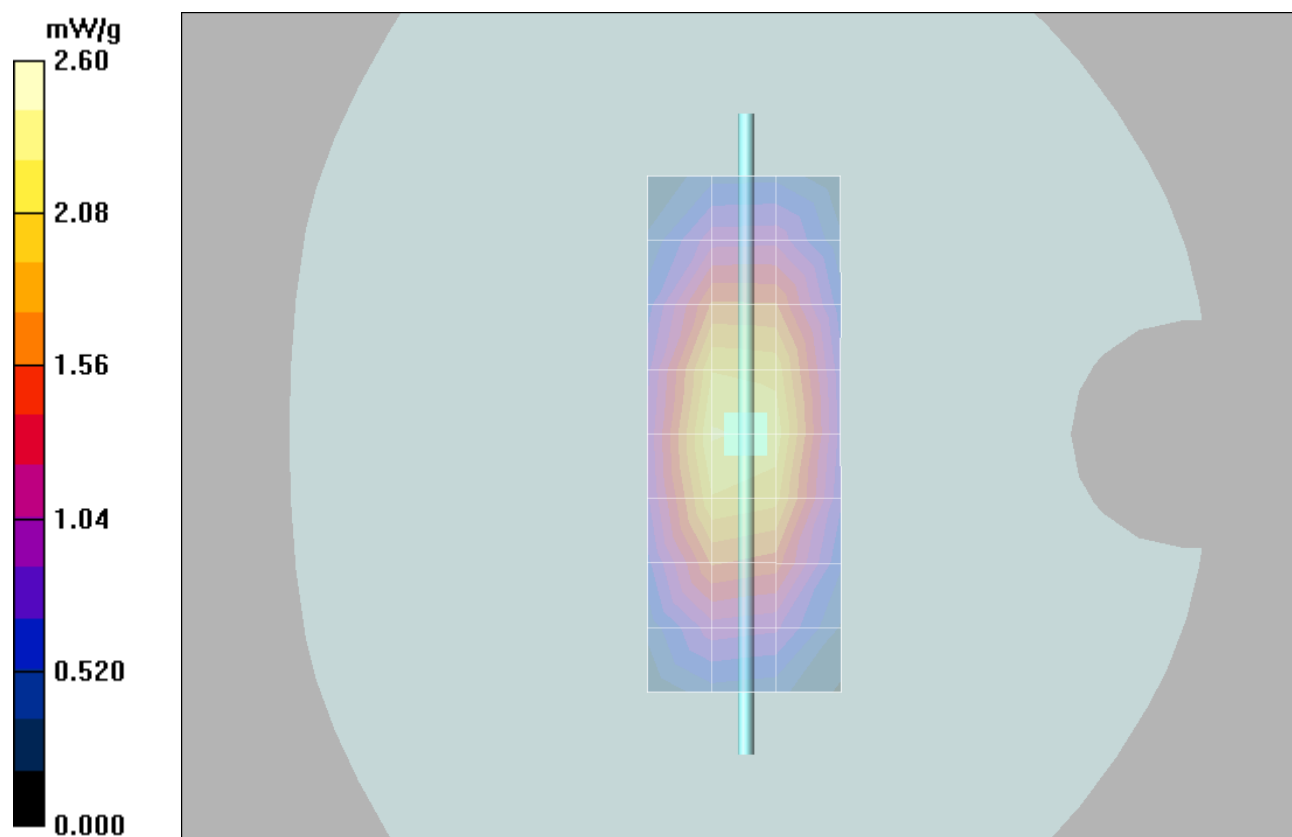

Date/Time: 9/12/2007 7:29:07 AM

Test Laboratory: Motorola**091207_900MHz**

Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 097 PM1 Power = 200 mW
Sim.Temp@meas = 22.08C Sim.Temp@SPC = 22C Room Temp @ SPC = 21.3C
Communication System: CW - Dipole; Frequency: 900 MHz; Channel Number: 4; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1515; ConvF(6.5, 6.5, 6.5); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.30 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.3 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.55 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.3 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 3.62 W/kg



SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 2.57 mW/g

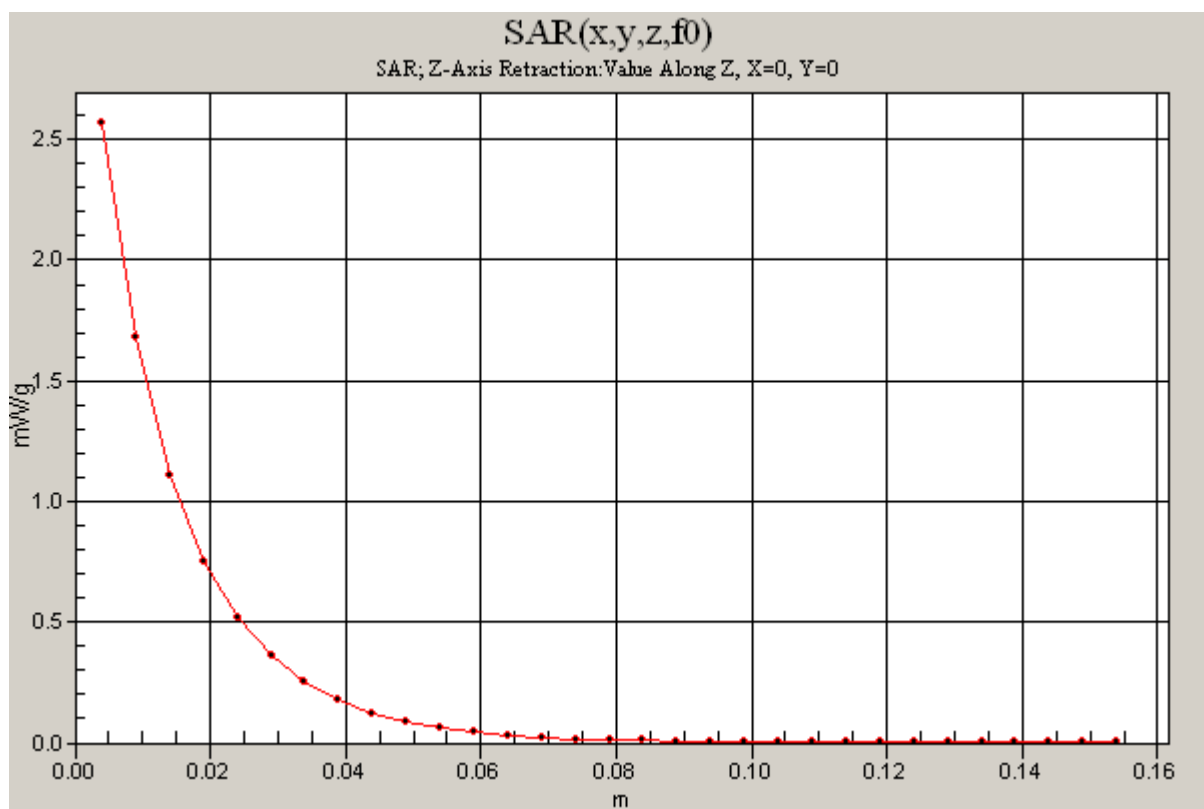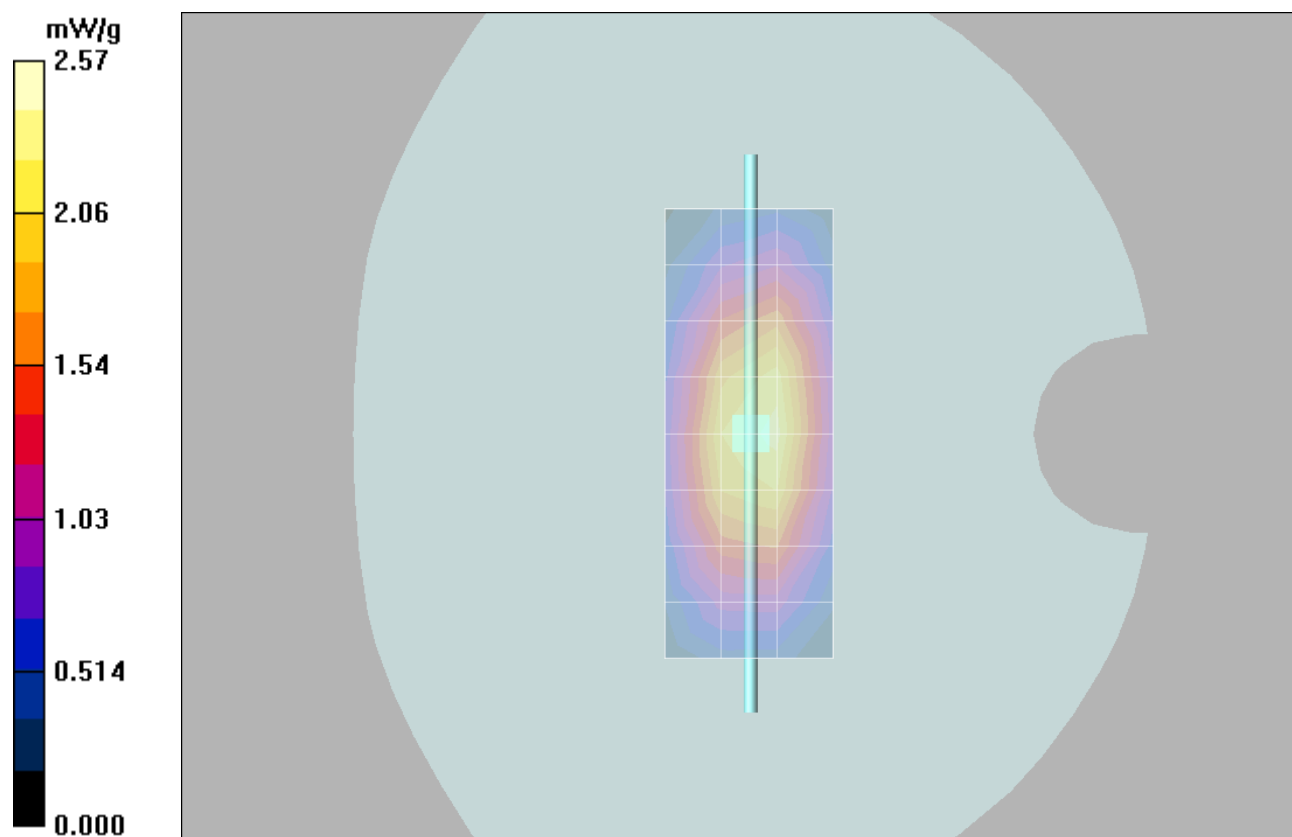

Date/Time: 9/4/2007 2:17:50 PM

Test Laboratory: Motorola 090407_1800MHz

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 277tr PM1 Power = 200 mW
Sim.Temp@meas = 21.13C Sim.Temp@SPC = 21.1C Room Temp @ SPC = 21.5C
Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(5.22, 5.22, 5.22); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.45 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 82.3 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.4 mW/g; SAR(10 g) = 4.01 mW/g

Maximum value of SAR (measured) = 8.30 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 82.3 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 12.4 W/kg



SAR(1 g) = 7.47 mW/g; SAR(10 g) = 4.03 mW/g

Maximum value of SAR (measured) = 8.40 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 8.32 mW/g

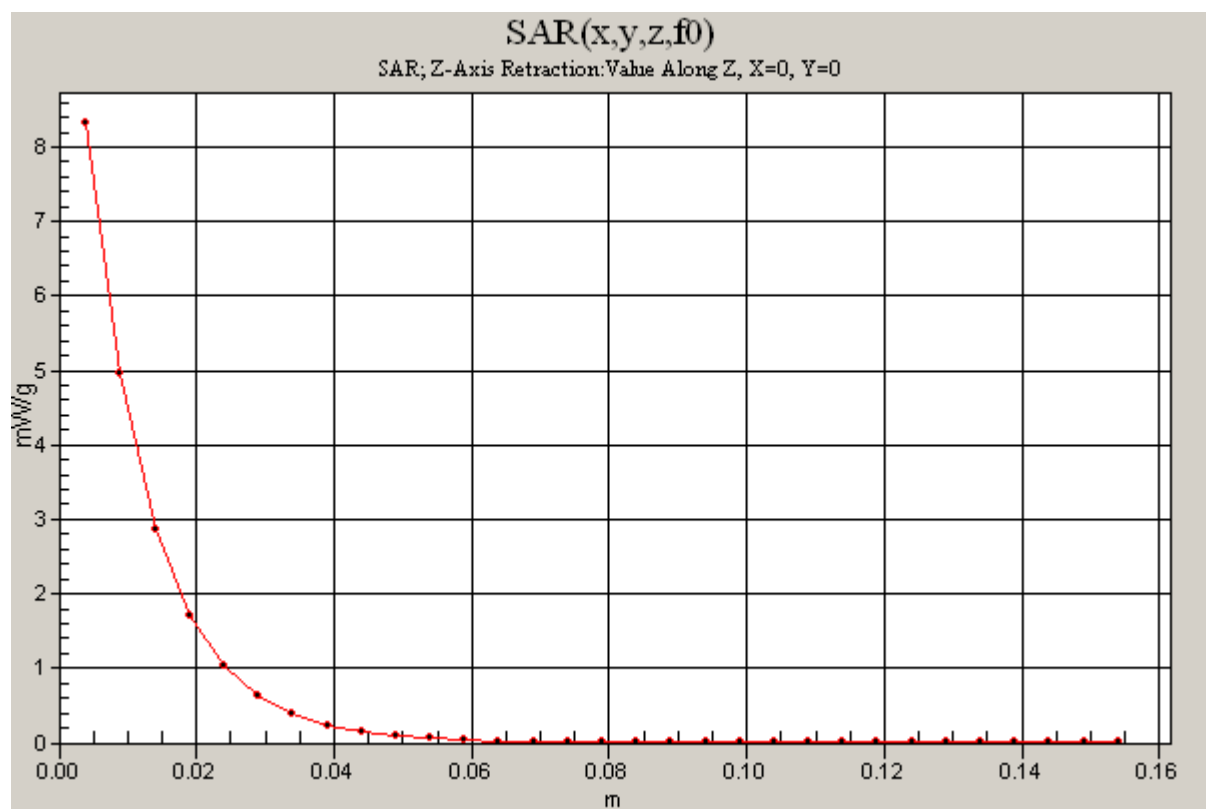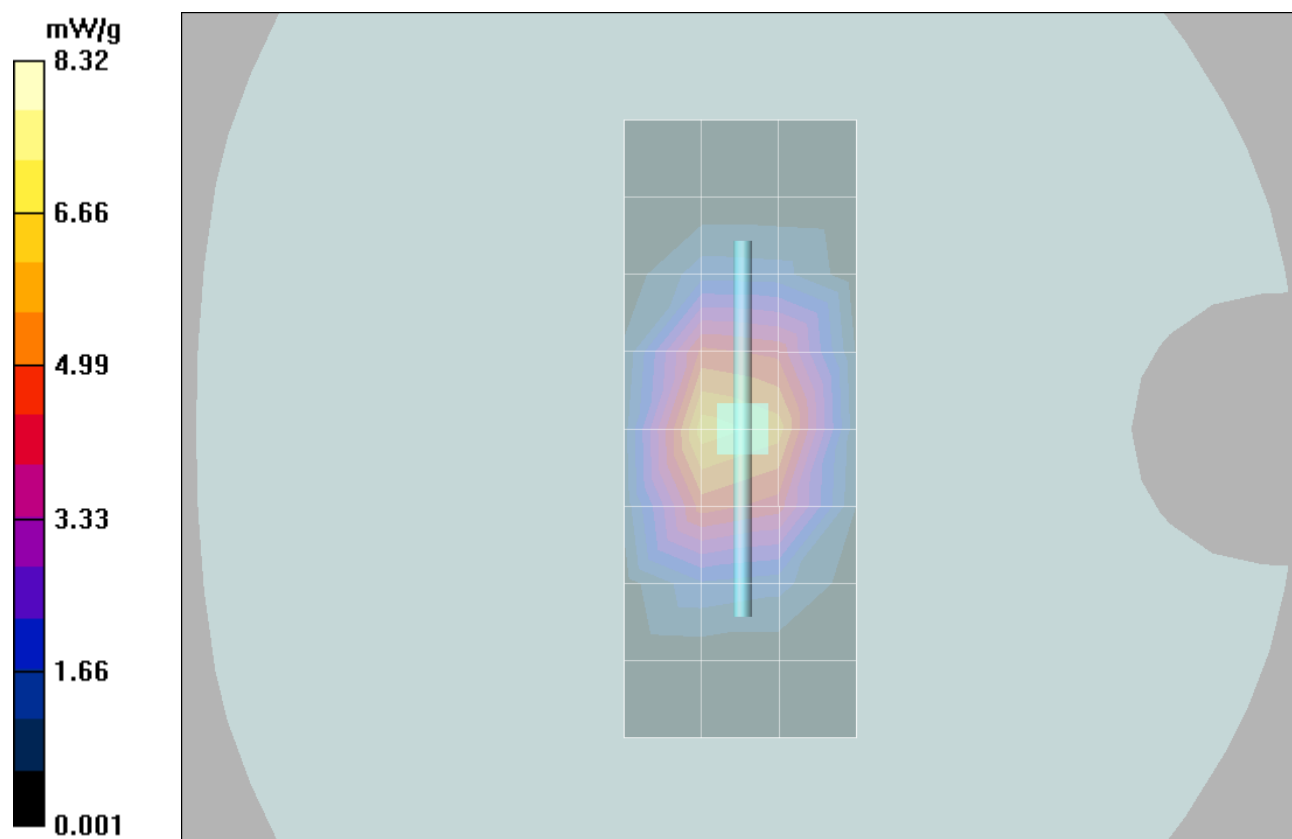

Date/Time: 9/14/2007 2:34:54 PM

Test Laboratory: Motorola 091407_1800MHz

Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 277tr PM1 Power = 200 mW
Sim.Temp@meas = 20.73C Sim.Temp@SPC = 20.7C Room Temp @ SPC = 21.8C
Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1515; ConvF(5.21, 5.21, 5.21); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.09 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 81.8 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 7.38 mW/g; SAR(10 g) = 3.97 mW/g

Maximum value of SAR (measured) = 8.27 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 81.8 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 12.2 W/kg



SAR(1 g) = 7.33 mW/g; SAR(10 g) = 3.96 mW/g

Maximum value of SAR (measured) = 8.04 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 8.44 mW/g

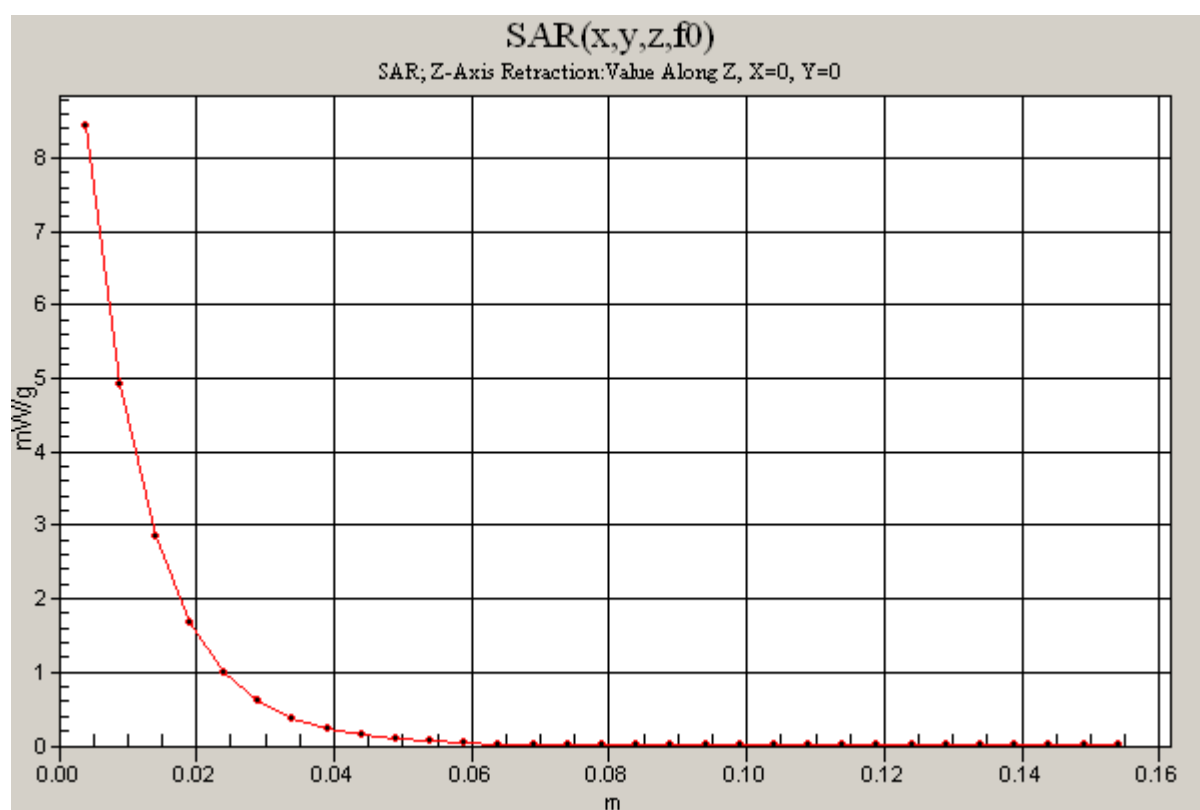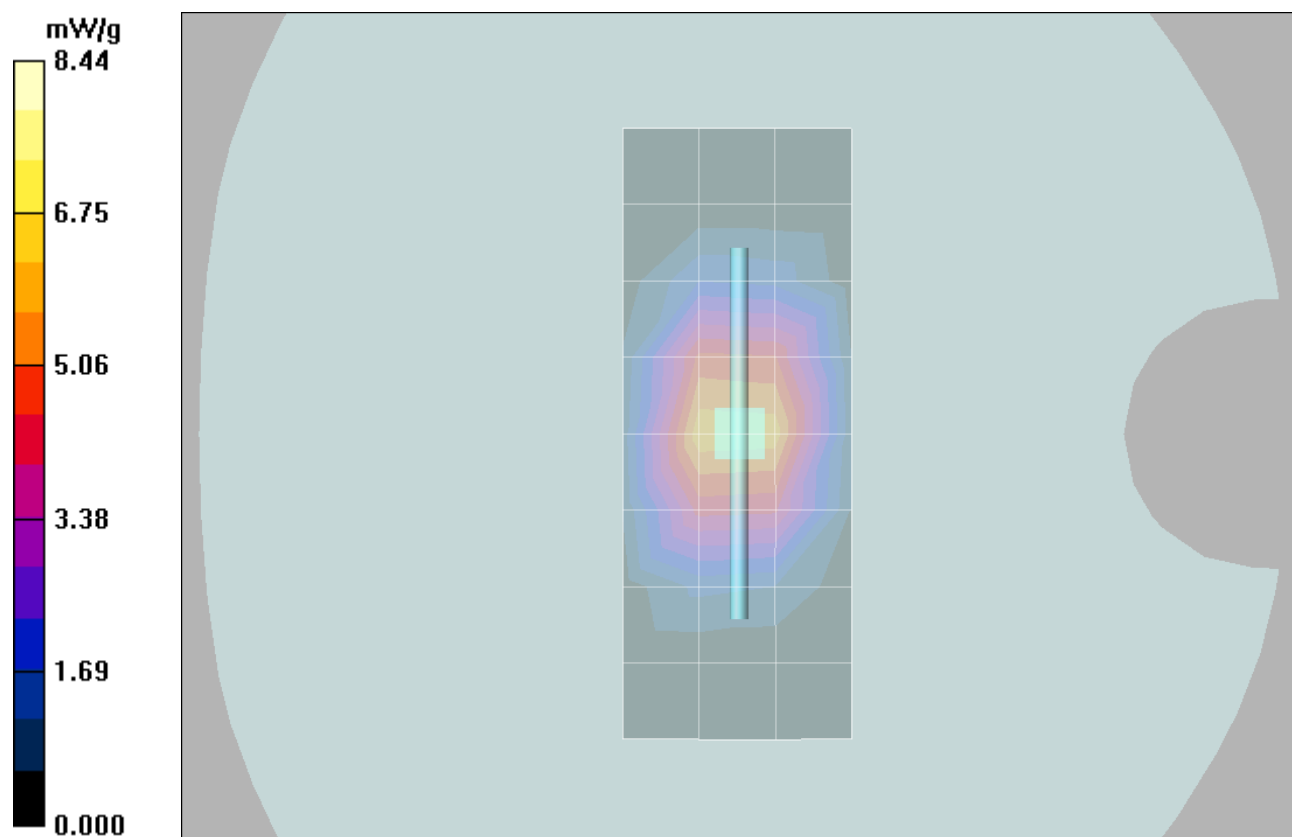

Date/Time: 9/10/2007 10:28:18 AM

Test Laboratory: Motorola**091007_2450MHz**

Procedure Notes: 2450 MHz System Performance Check / Dipole Sn# 767 PM1 Power = 200 mW
Sim.Temp@meas = 21.71C Sim.Temp@SPC = 21.5C Room Temp @ SPC = 21.3C
Communication System: CW - Dipole; Frequency: 2450 MHz; Channel Number: 11; Duty Cycle: 1:1
Medium: VALIDATION Only;

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1515; ConvF(4.64, 4.64, 4.64); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.33 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 83.1 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 23.8 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 4.93 mW/g

Maximum value of SAR (measured) = 11.8 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 83.1 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 23.6 W/kg



SAR(1 g) = 10.6 mW/g; SAR(10 g) = 4.92 mW/g

Maximum value of SAR (measured) = 11.5 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 11.8 mW/g

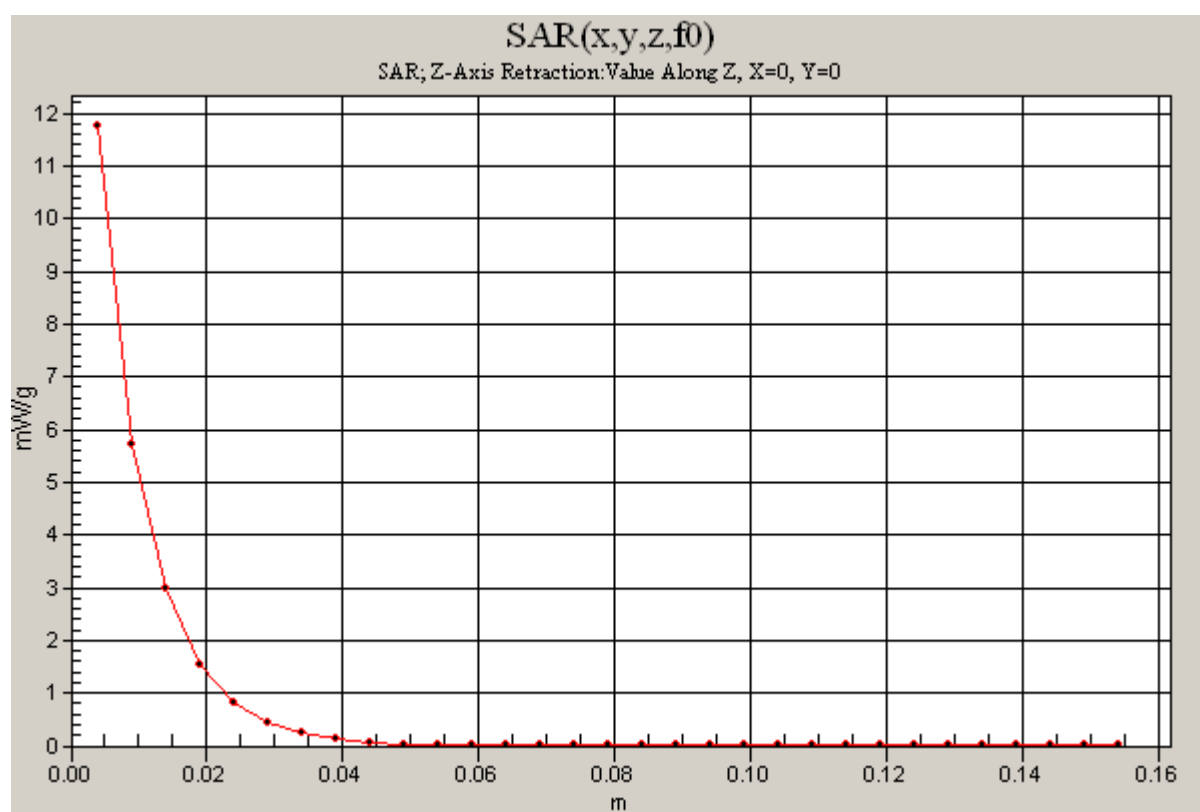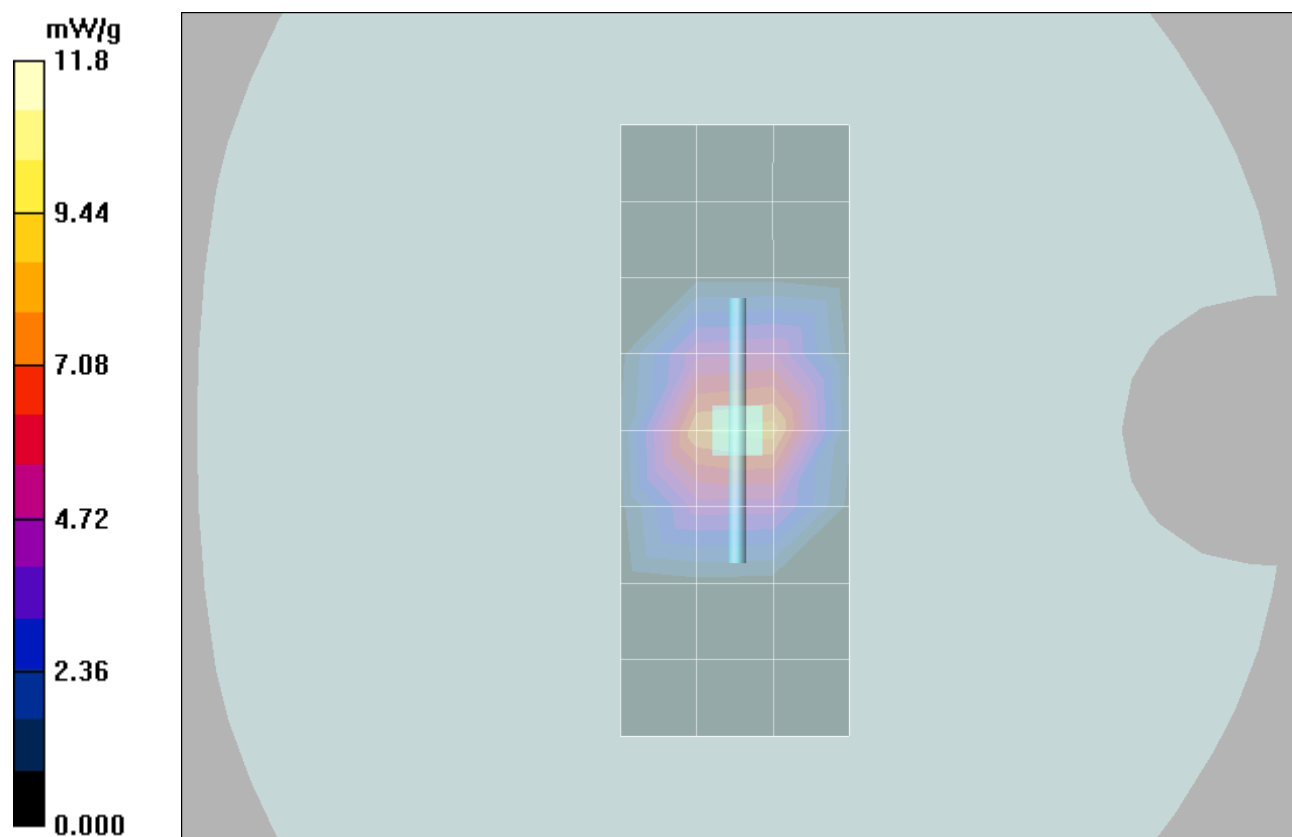

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 9/12/2007 5:12:39 PM

Test Laboratory: Motorola**850 Cheek(Slider Down)****LMC0250047;**

Procedure Notes: Pwr Step: 05(OTA) Antenna Position: Internal

Battery Model #: SNN5831A DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(6.5, 6.5, 6.5); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.520 mW/g


Left Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.4 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.550 mW/g

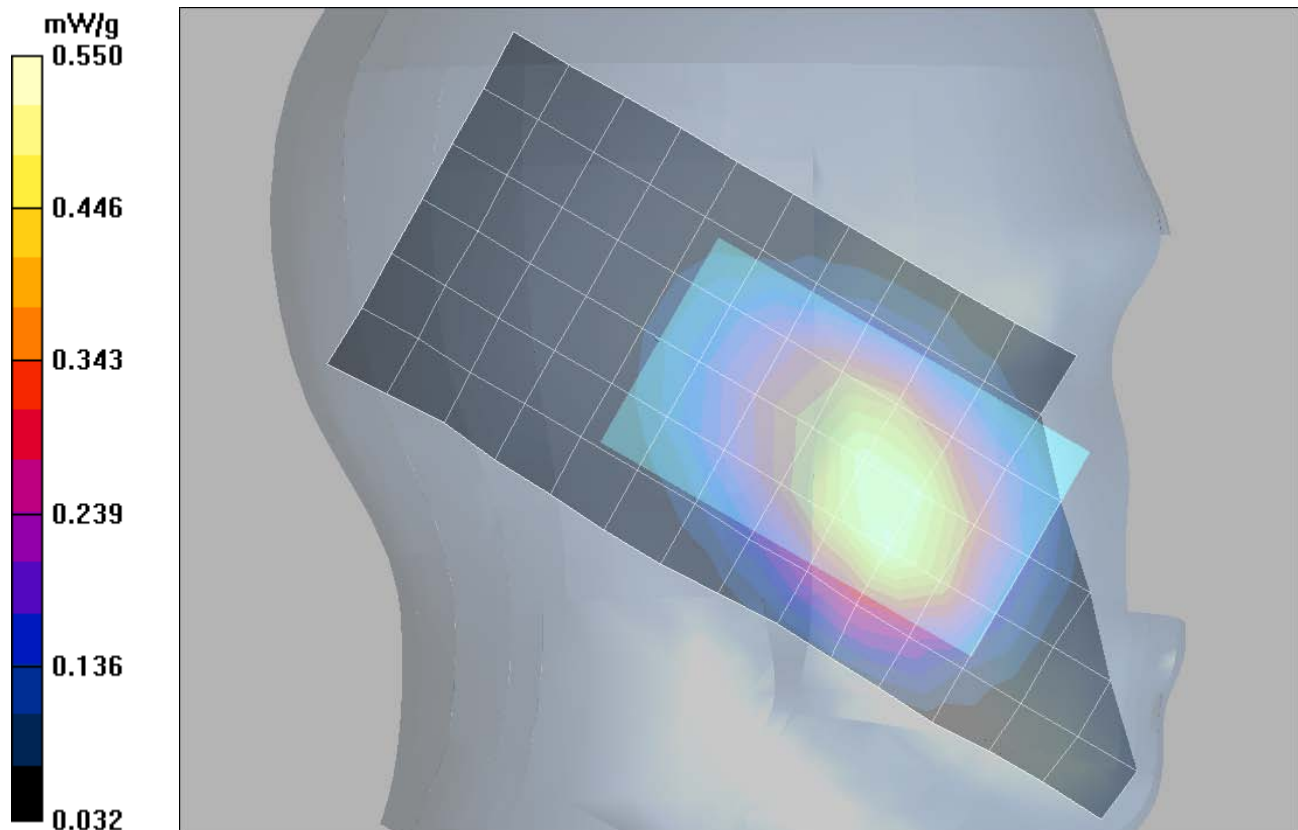

Date/Time: 9/3/2007 8:01:34 PM

Test Laboratory: Motorola 850 Cheek(Slider Up)**LMC0250047;**

Procedure Notes: Pwr Step: 05(OTA) Antenna Position: Internal

Battery Model #: SNN5831A DEVICE POSITION (cheek or rotated): Cheek


Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(6.38, 6.38, 6.38); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

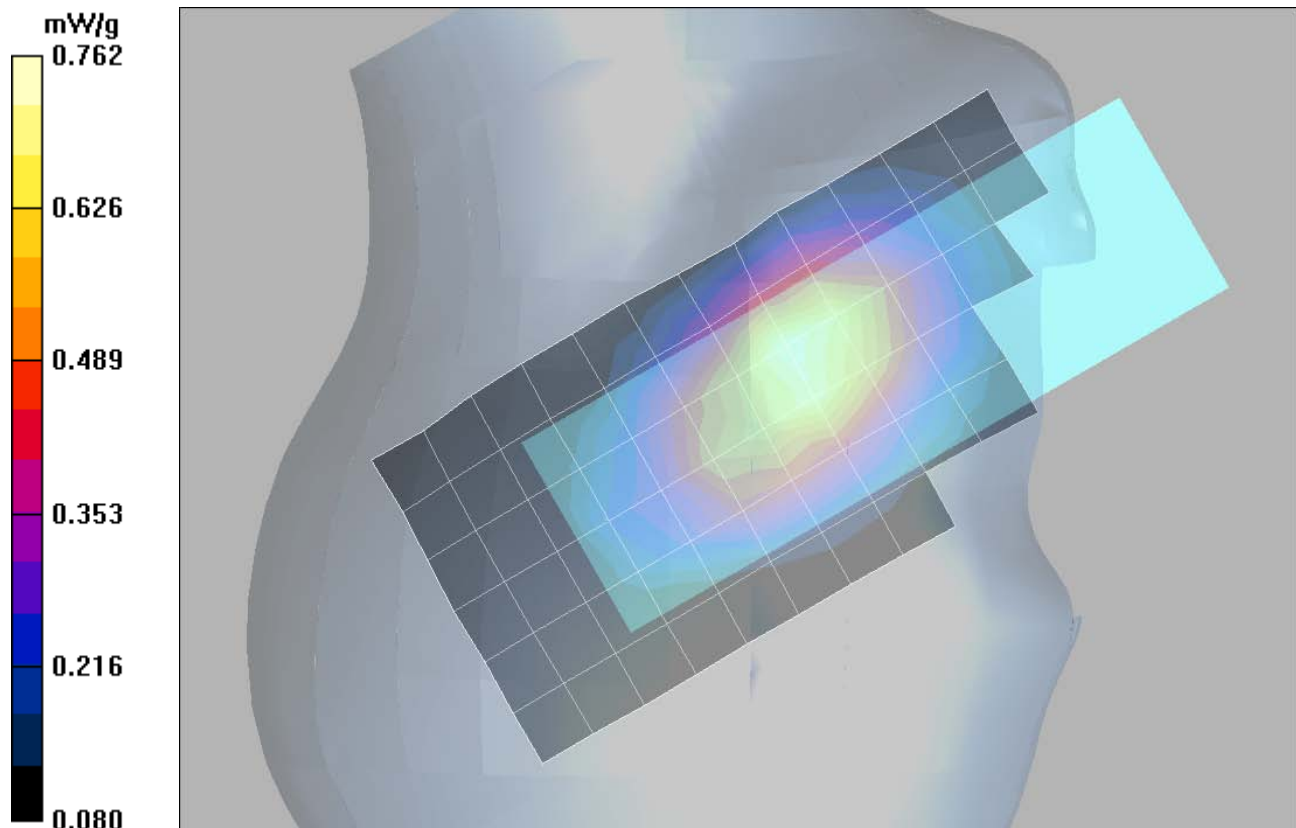Right Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.757 mW/g **Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 29.0 V/m ; Power Drift = -0.004 dB Peak SAR (extrapolated) = 0.962 W/kg **SAR(1 g) = 0.726 mW/g ; SAR(10 g) = 0.524 mW/g** Maximum value of SAR (measured) = 0.762 mW/g 

Date/Time: 9/12/2007 8:09:35 PM

Test Laboratory: Motorola**850 Tilted(Slider Down)****LMC0250047;**

Procedure Notes: Pwr Step: 05(OTA) Antenna Position: Internal


Battery Model #:SNN5779B DEVICE POSITION (cheek or rotated): Rotated

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(6.5, 6.5, 6.5); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

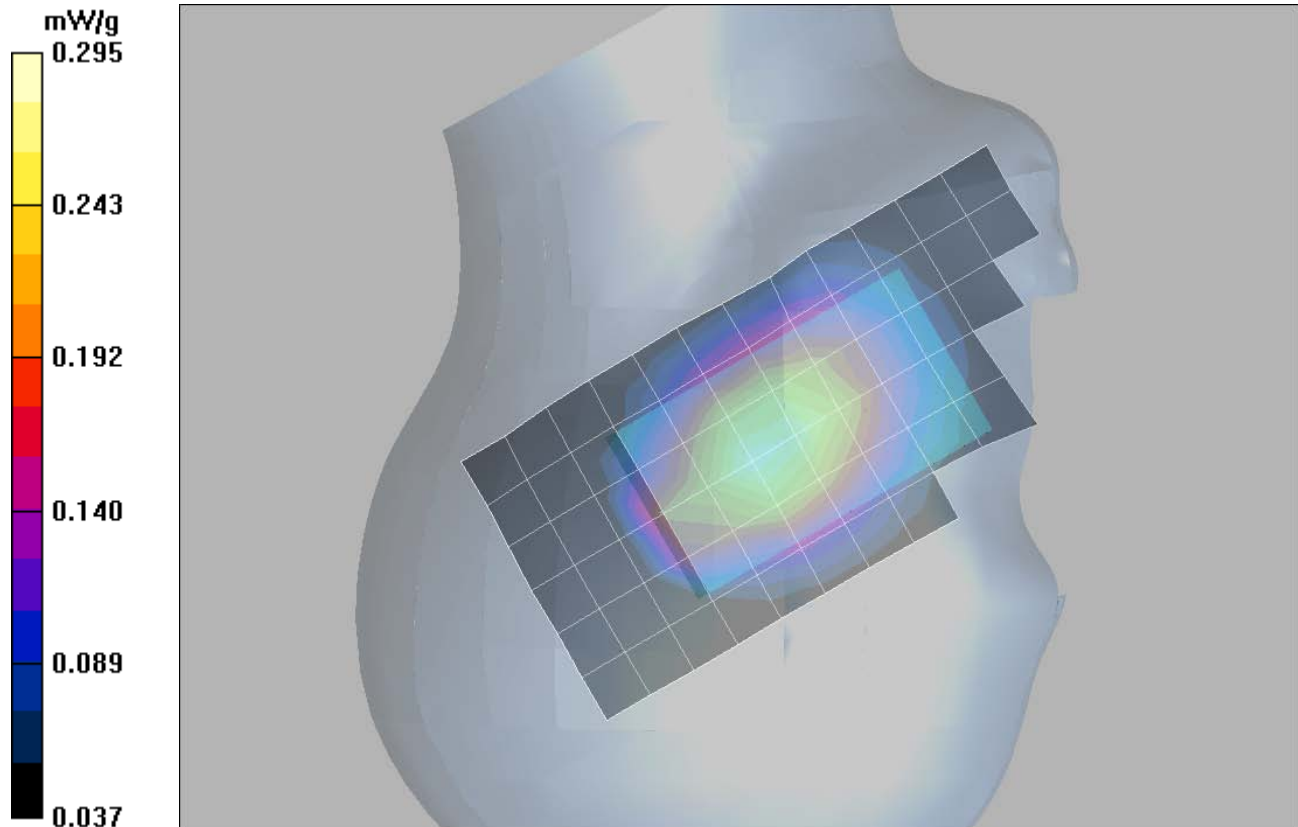Right Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.292 mW/g **Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.6 V/m ; Power Drift = 0.056 dB Peak SAR (extrapolated) = 0.348 W/kg **SAR(1 g) = 0.279 mW/g ; SAR(10 g) = 0.206 mW/g** Maximum value of SAR (measured) = 0.295 mW/g 

Date/Time: 9/4/2007 7:50:03 AM

Test Laboratory: Motorola 850 Tilted(Slider Up)**LMC0250047;**

Procedure Notes: Pwr Step: 05(OTA) Antenna Position: Internal


Battery Model #: SNN5779B DEVICE POSITION (cheek or rotated): Rotated

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1390; ConvF(6.38, 6.38, 6.38); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Sugar SAM; Type: SAM; Serial: TP-1129;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

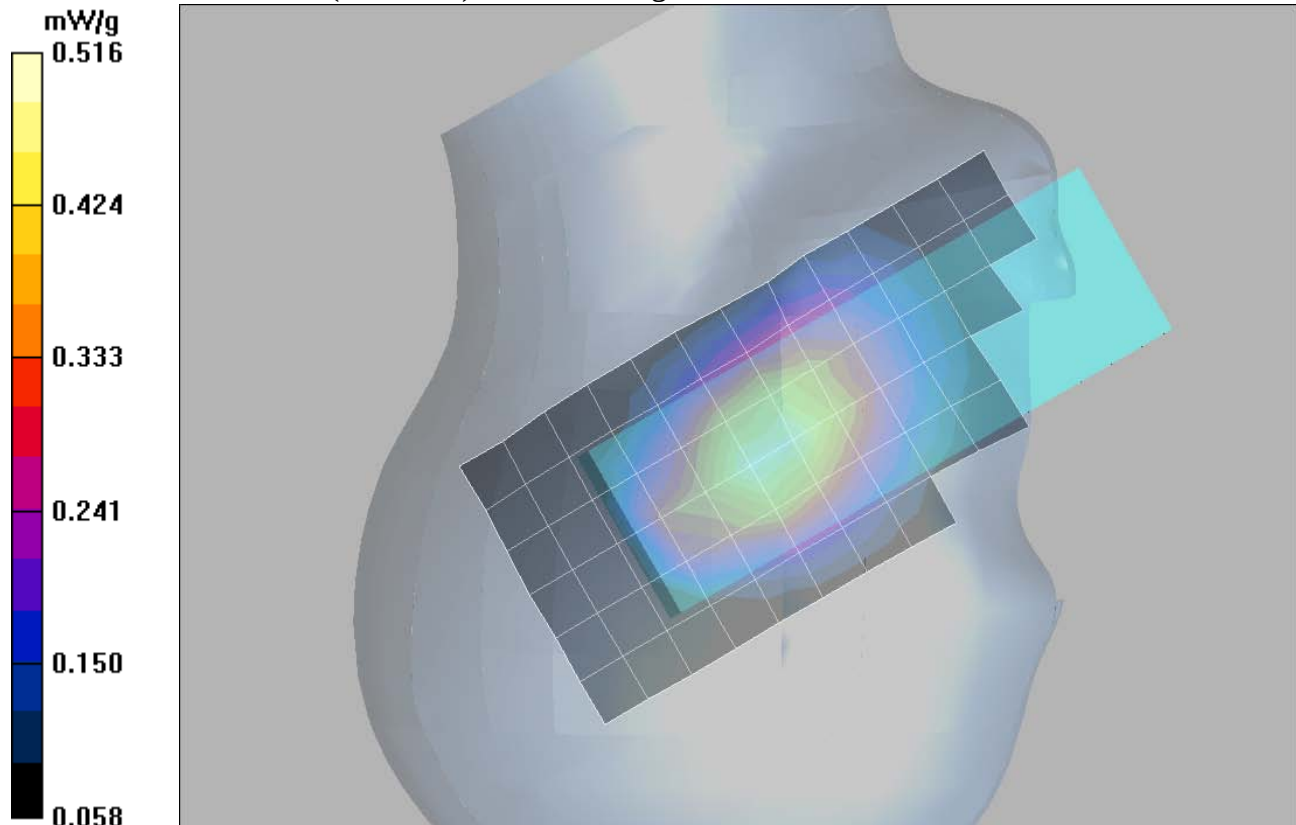Right Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.502 mW/g **Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.6 V/m ; Power Drift = -0.198 dB Peak SAR (extrapolated) = 0.620 W/kg **SAR(1 g) = 0.486 mW/g ; SAR(10 g) = 0.353 mW/g** Maximum value of SAR (measured) = 0.516 mW/g 

Date/Time: 9/14/2007 11:16:31 AM

Test Laboratory: Motorola 1900 Cheek(Slider Down)**LMC0250047;**

Procedure Notes: Pwr Step: 00(OTA) Antenna Position: Internal

Battery Model #: SNN5779B DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 1900; Frequency: 1850.2 MHz; Channel Number: 512; Duty Cycle: 1:8

Medium: Regular Glycol Head;

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(5.21, 5.21, 5.21); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.05 mW/g


Left Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.5 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.937 mW/g; SAR(10 g) = 0.537 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

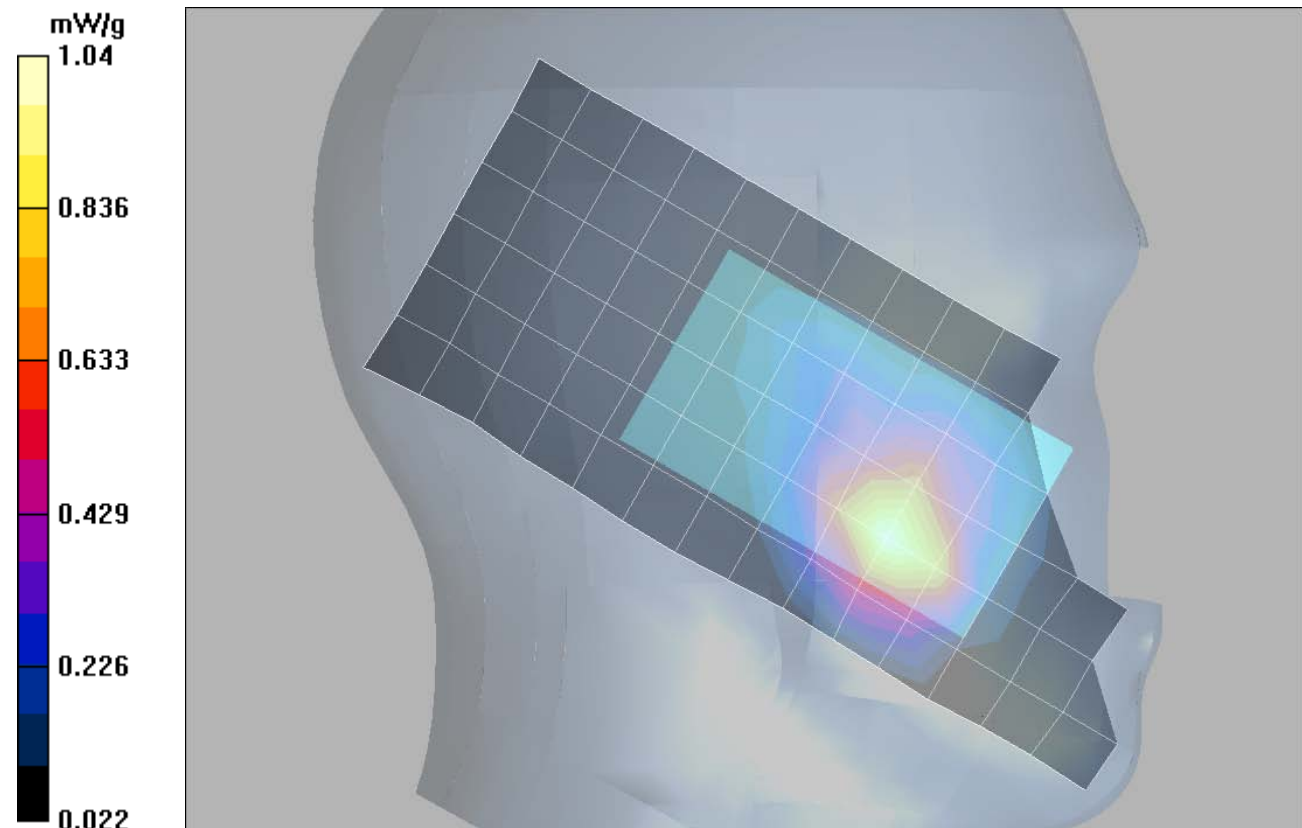

Date/Time: 9/4/2007 10:54:46 AM

Test Laboratory: Motorola**1900 Cheek(Slider Up)****LMC0250047;**

Procedure Notes: Pwr Step: 00(OTA) Antenna Position: Internal

Battery Model #: SNN5779B DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Head;

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1390; ConvF(5.22, 5.22, 5.22); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.287 mW/g


Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.1 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.288 mW/g

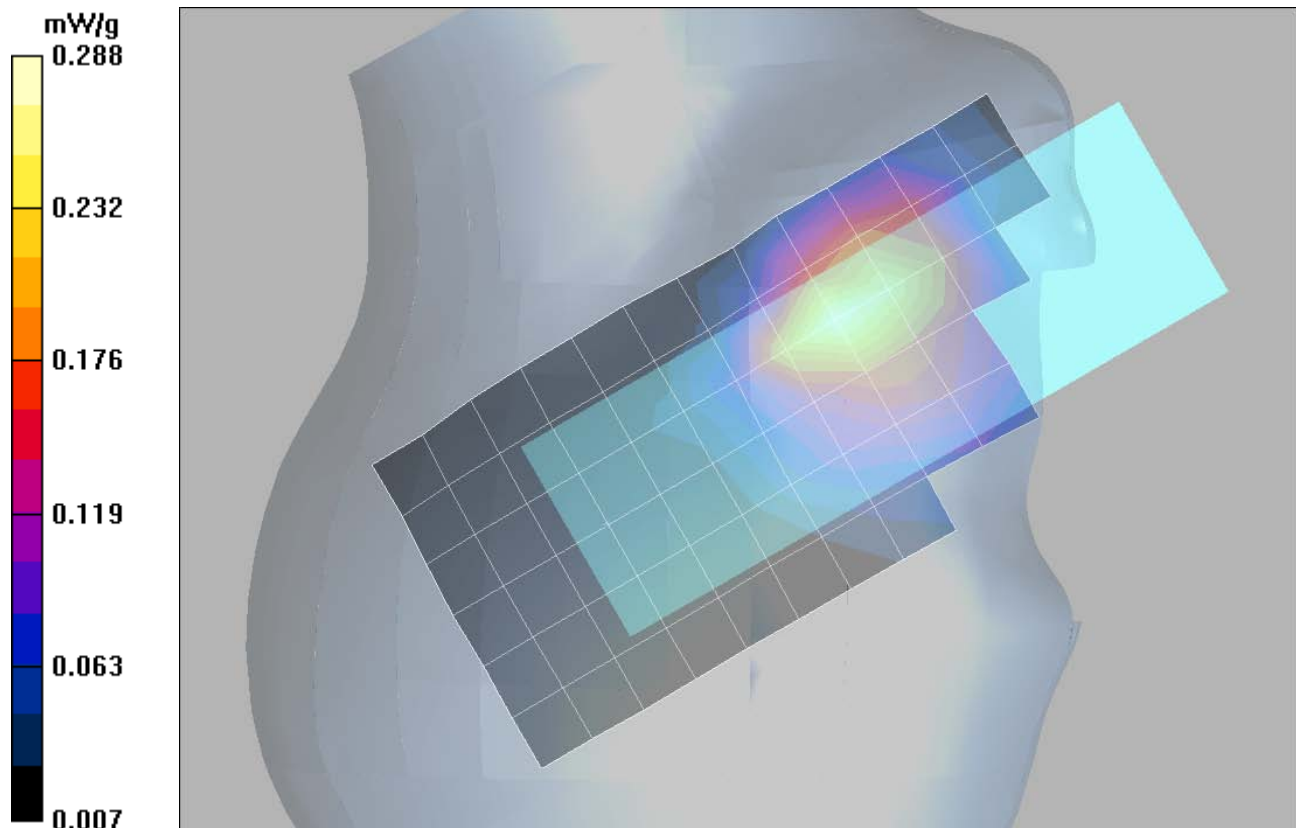

Date/Time: 9/14/2007 9:06:45 AM

Test Laboratory: Motorola 1900 Tilted(Slider Down)**LMC0250047;**

Procedure Notes: Pwr Step: 00(OTA) Antenna Position: Internal


Battery Model #: SNN5831A DEVICE POSITION (cheek or rotated): Rotated

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Head;

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(5.21, 5.21, 5.21); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

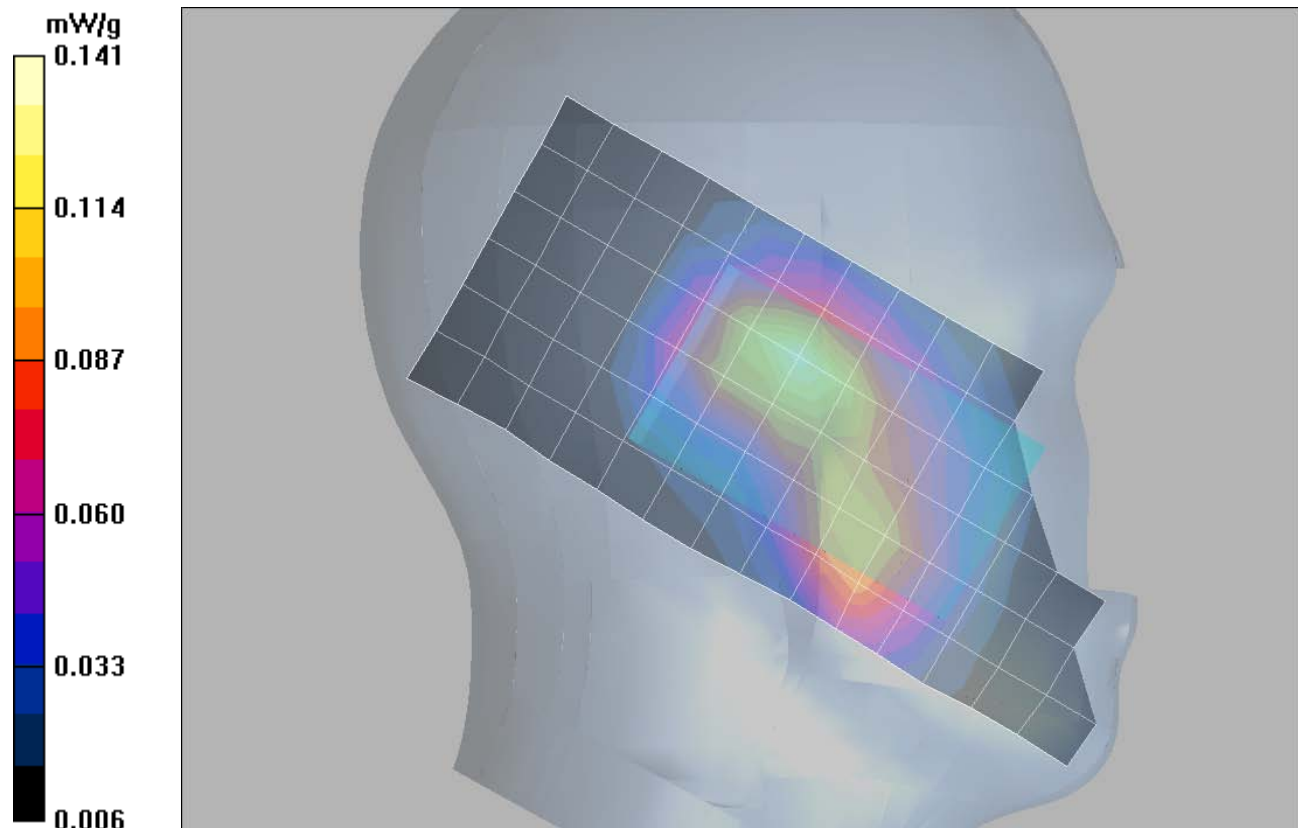Left Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.139 mW/g **Left Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.3 V/m ; Power Drift = -0.038 dB Peak SAR (extrapolated) = 0.183 W/kg **SAR(1 g) = 0.128 mW/g ; SAR(10 g) = 0.082 mW/g** Maximum value of SAR (measured) = 0.141 mW/g 

Date/Time: 9/4/2007 8:47:00 AM

Test Laboratory: Motorola**1900 Tilted(Slider Up)****LMC0250047;**

Procedure Notes: Pwr Step: 00(OTA) Antenna Position: Internal

Battery Model #:SNN5831A DEVICE POSITION (cheek or rotated): Rotated

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Head;

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1390; ConvF(5.22, 5.22, 5.22); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.120 mW/g


Left Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.23 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.121 mW/g

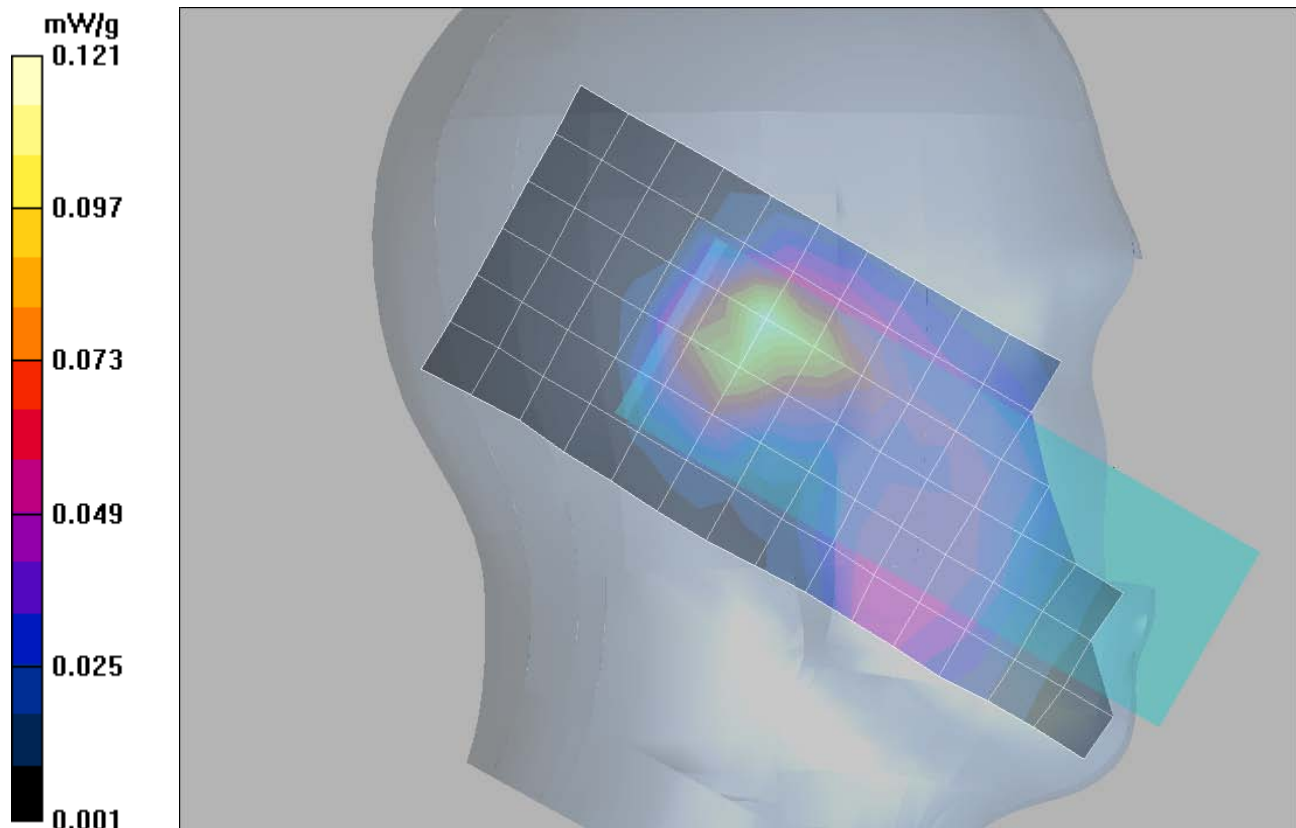

Date/Time: 9/10/2007 5:31:48 PM

Test Laboratory: Motorola**2450 Cheek(Slider Down)****LMC0250047;**

Procedure Notes: Pwr Step: 0FHex (15Dec) Antenna Position: Internal

Battery Model #: SNN5831A DEVICE POSITION (cheek or rotated): cheek

Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Head;

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(4.64, 4.64, 4.64); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.055 mW/g


Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.83 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

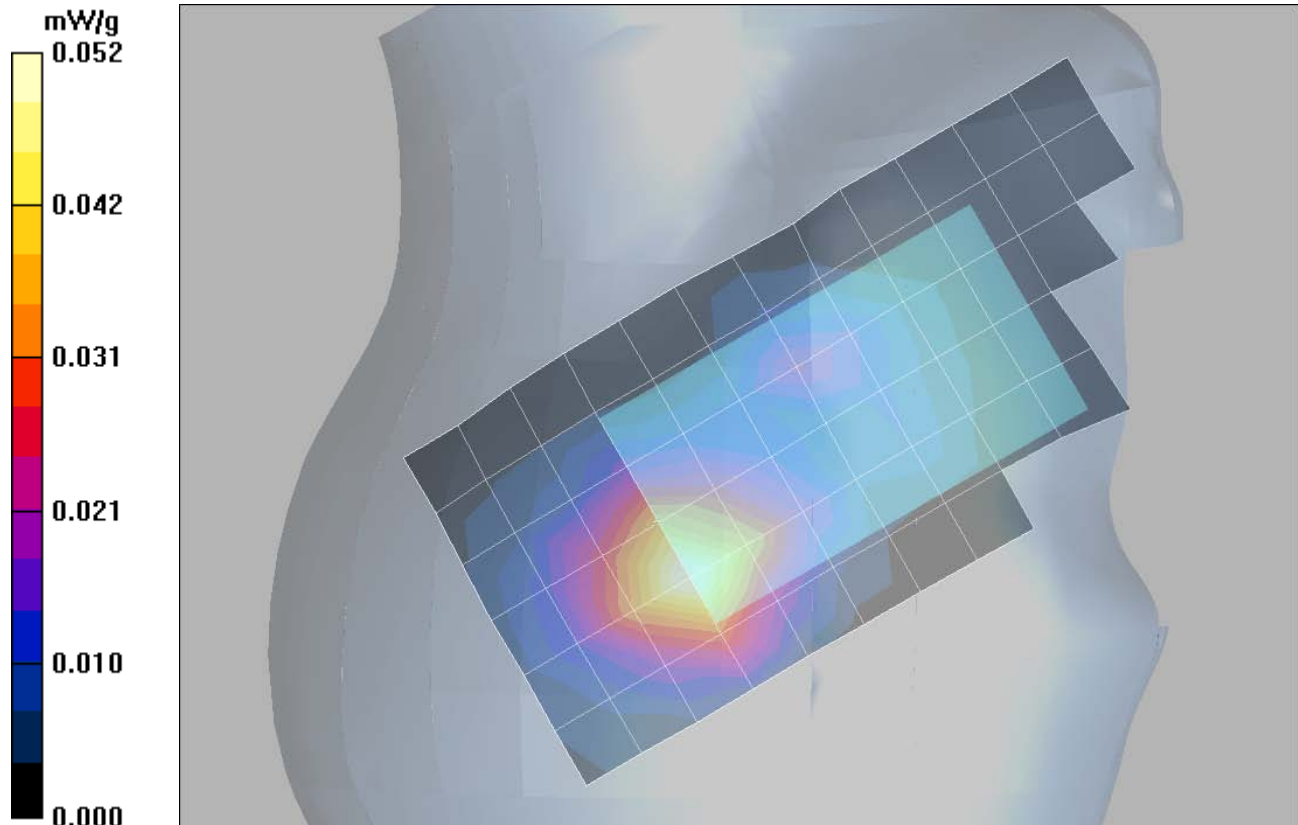

Date/Time: 9/10/2007 4:19:55 PM

Test Laboratory: Motorola**2450 Cheek(Slider Up)****LMC0250047;**

Procedure Notes: Pwr Step: 0FHex (15Dec) Antenna Position: Internal

Battery Model #: SNN5831A DEVICE POSITION (cheek or rotated): Cheek

Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Head;

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(4.64, 4.64, 4.64); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.018 mW/g


Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.73 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.042 W/kg

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.00928 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

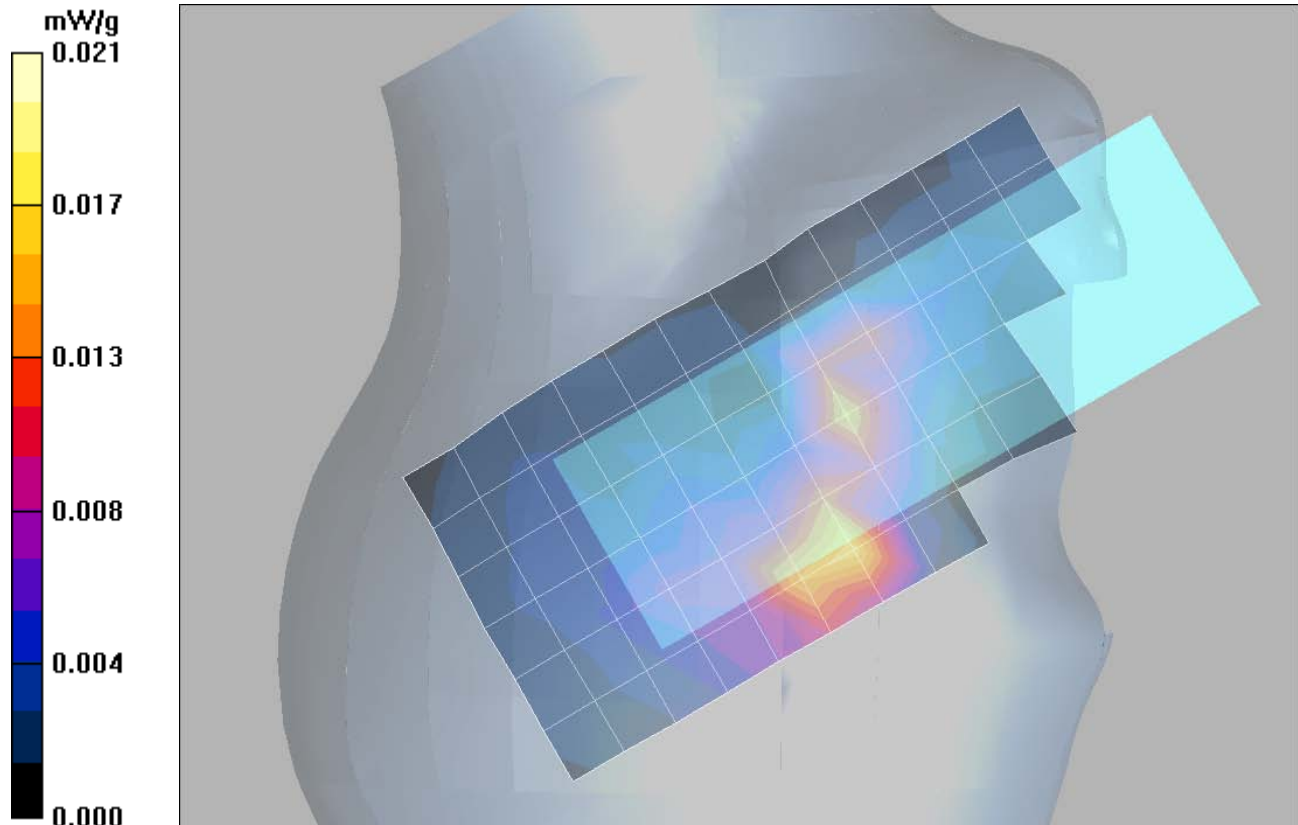

Date/Time: 9/10/2007 9:00:42 PM

Test Laboratory: Motorola**2450 Tilted(Slider Down)****LMC0250047;**

Procedure Notes: Pwr Step: 0FHex (15Dec) Antenna Position: Internal

Battery Model #: SNN5779B DEVICE POSITION (cheek or rotated): Rotated

Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Head;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³**DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(4.64, 4.64, 4.64); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.059 mW/g

Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.72 V/m; Power Drift = -0.251 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

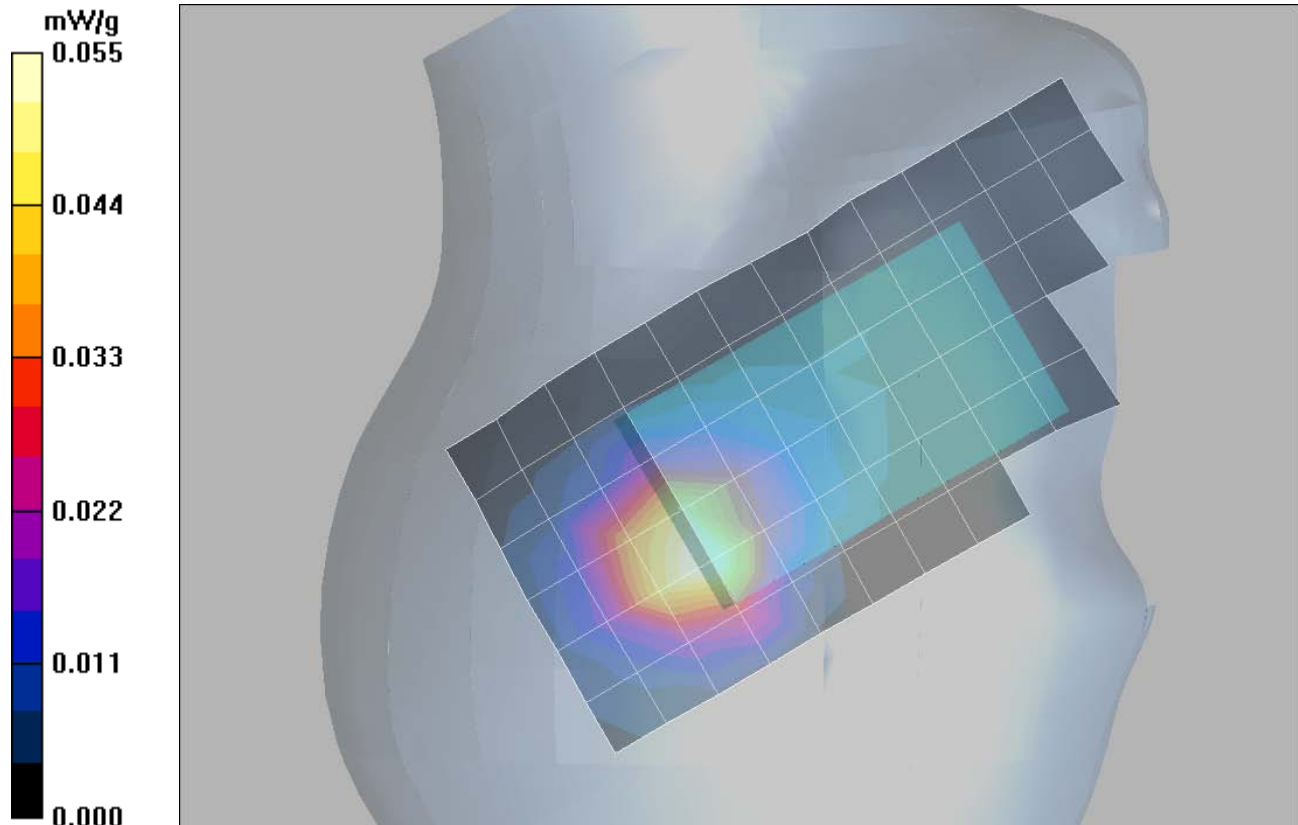

Date/Time: 9/10/2007 8:27:58 PM

Test Laboratory: Motorola 2450 Tilted(Slider Up)**LMC0250047;**

Procedure Notes: Pwr Step: 0FHex (15Dec) Antenna Position: Internal

Battery Model #: SNN5779B DEVICE POSITION (cheek or rotated): Rotated

Communication System: Wi-Fi 2450; Frequency: 2437MHz; Channel Number: 6; Duty Cycle: 1:1

Medium: 2450 Glycol Head;

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$ **DASY4 Configuration:**

- Probe: ET3DV6 - SN1515; ConvF(4.64, 4.64, 4.64); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: PCS-9 Glycol SAM; Type: SAM; Serial: TP-1134;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):

Measurement grid:dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.017 mW/g

Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:

Measurement grid:dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.84 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.030 W/kg

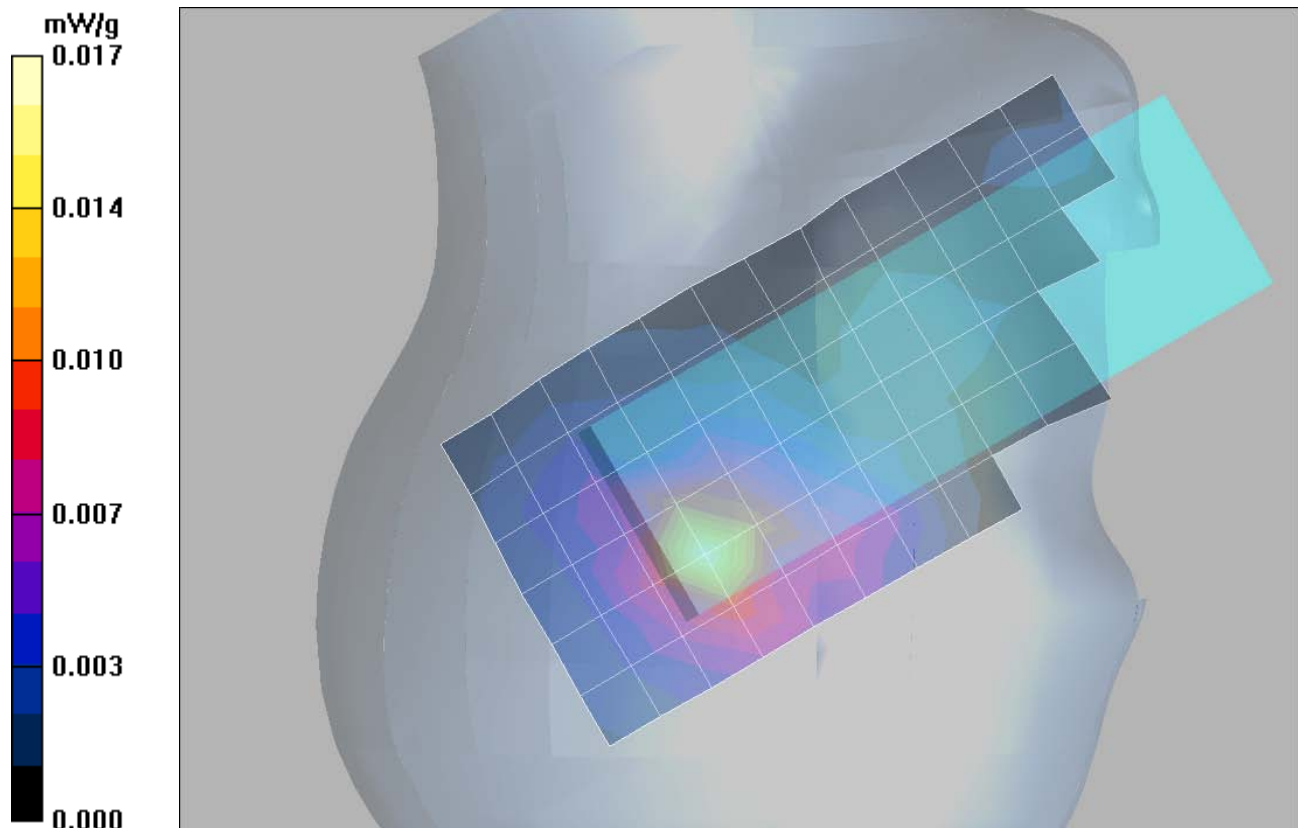SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00755 mW/g

Appendix 3

SAR distribution plots for Body Worn Configuration

Date/Time: 8/31/2007 5:40:08 PM

Test Laboratory: Motorola

850 BodyWorn

LMC0250047;

Procedure Notes: Pwr Step: 05(OTA) Antenna Position: Internal Battery Model #: SNN5831A

Device Position: Back of phone 15mm away from phantom (enabled Bluetooth)

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8 Medium: Low Freq Body;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(6.13, 6.13, 6.13); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: R#9_ Section 1, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.457 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.1 V/m ; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.428 mW/g ; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.458 mW/g

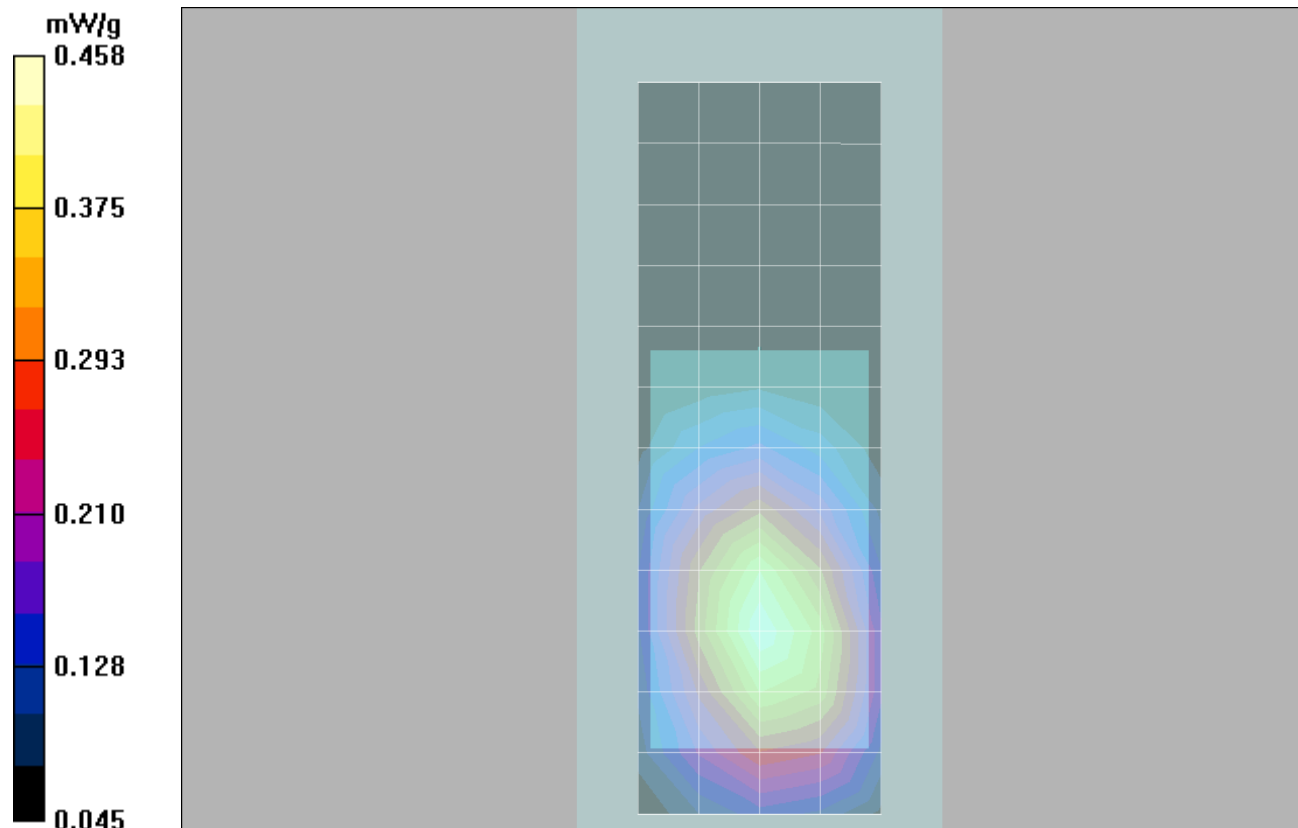

Date/Time: 9/4/2007 5:30:30 PM

Test Laboratory: Motorola**1900 BodyWorn****LMC0250047**; Procedure Notes: Pwr Step: 00(OTA) Antenna Position: Internal

Battery Model #: SNN5768A Device Position: Front of phone 15mm away from phantom (Enabled Bluetooth)


Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Regular Glycol Body;

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6 - SN1390; ConvF(4.89, 4.89, 4.89); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn386; Calibrated: 4/13/2007
- Phantom: R#9_ Section 2, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

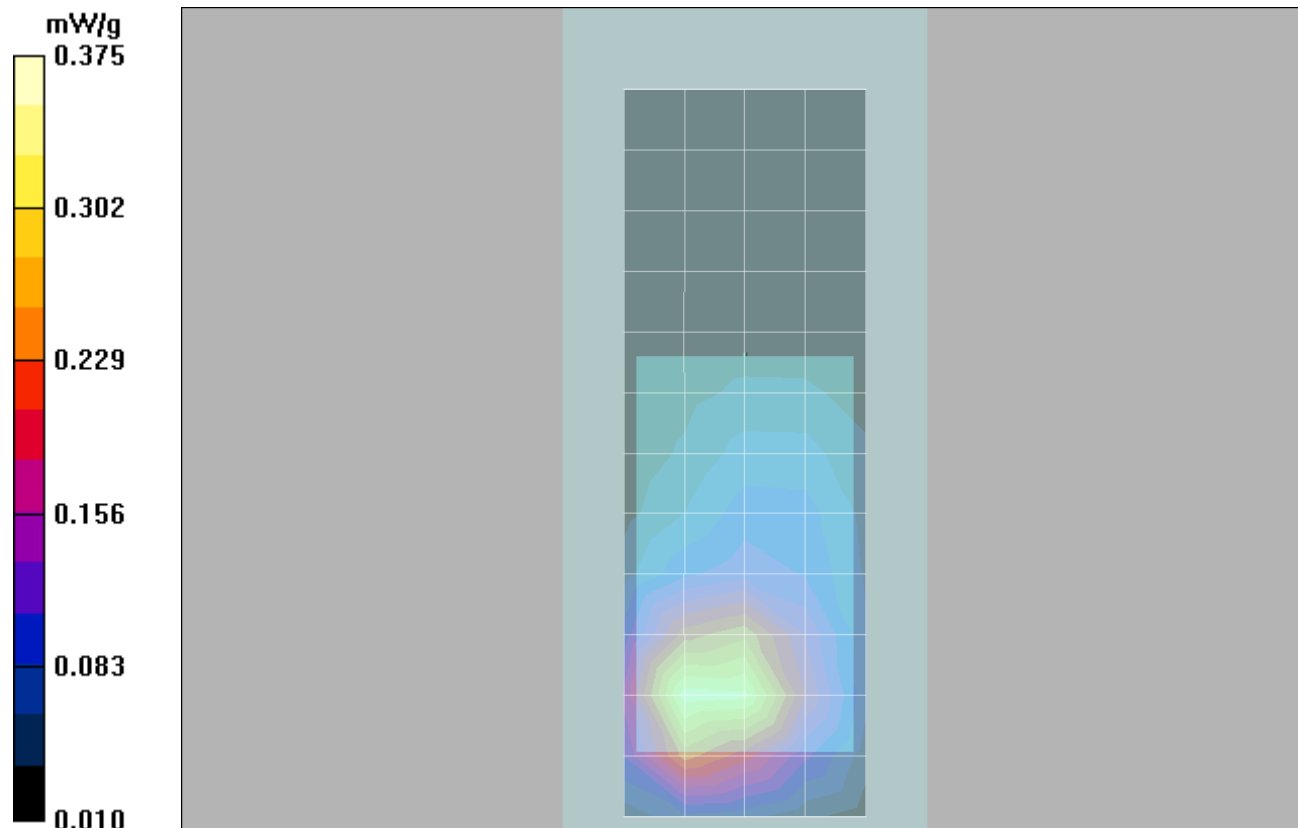Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.342 mW/g **Amy Twin Phone Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.6 V/m ; Power Drift = 0.039 dB Peak SAR (extrapolated) = 0.564 W/kg **SAR(1 g) = 0.345 mW/g ; SAR(10 g) = 0.205 mW/g** Maximum value of SAR (measured) = 0.375 mW/g 

Date/Time: 9/10/2007 10:08:47 PM

Test Laboratory: Motorola**2450 BodyWorn**

LMC0250047; Procedure Notes: Pwr Step: 0FHex (15Dec) Antenna Position: Internal
Battery Model #: SNN5831A Device Position : Back of phone 15mm away from phantom
Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Channel Number: 6; Duty Cycle: 1:1
Medium: 2450 Glycol Body; Medium parameters used: $f=2450$ MHz; $\sigma=2.04$ mho/m; $\epsilon_r=49.6$; $\rho=1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6 - SN1515; ConvF(4.06, 4.06, 4.06); Calibrated: 8/28/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn383; Calibrated: 8/24/2007
- Phantom: R#9_ Section 2, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.061 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan (≤ 3 GHz) (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.99 V/m; Power Drift = -0.187 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.062 mW/g

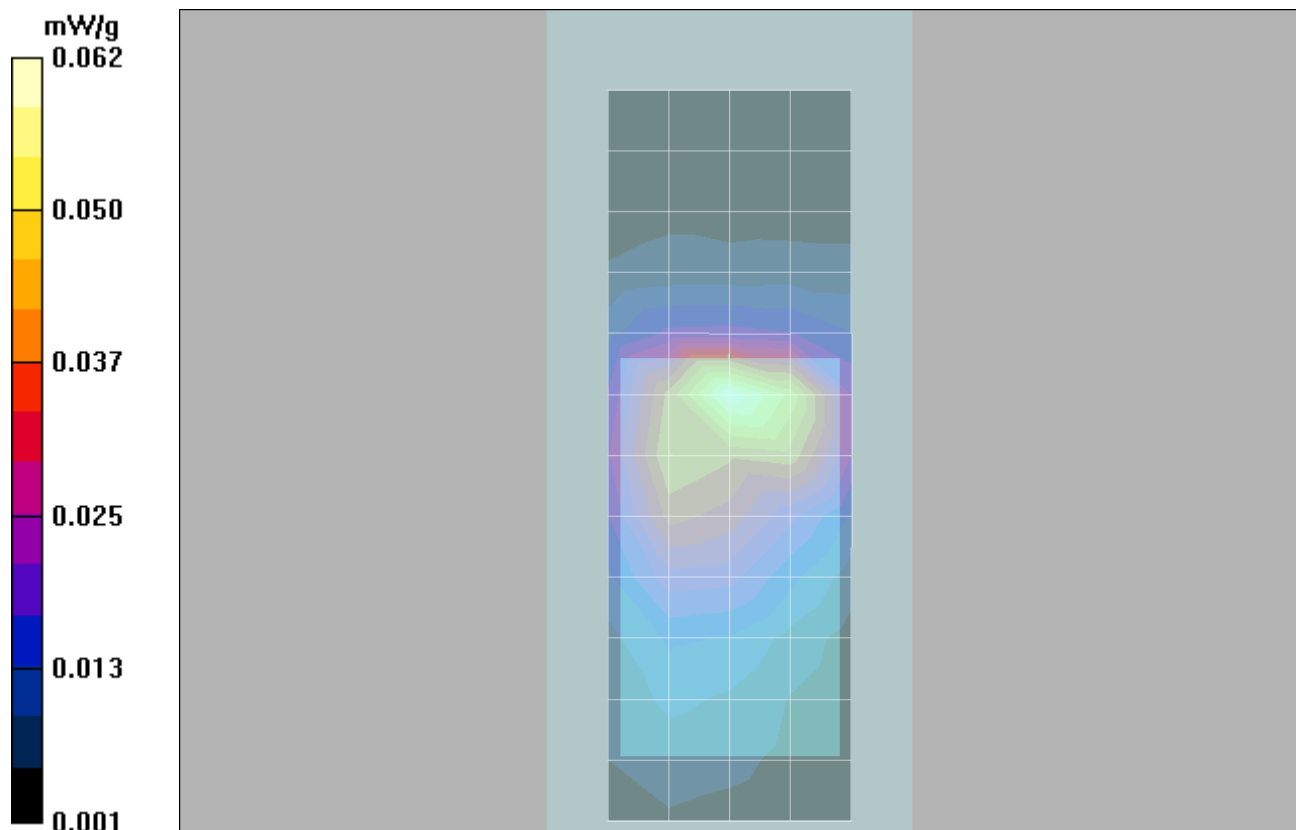

Appendix 4

Probe Calibration Certificate



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola Korea**

Certificate No: **ET3-1390_Apr07**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1390**

Calibration procedure(s) **QA CAL-01.v5
 Calibration procedure for dosimetric E-field probes**

Calibration date: **April 24, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 907	20-Jul-06 (SPEAG, No. DAE4-907_Jul06)	Jul-07

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature
Approved by:	Name Fin Bomholt	Function R&D Director	Signature

Issued: April 24, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1390

Manufactured:	October 1, 1999
Last calibrated:	May 2, 2006
Recalibrated:	April 24, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1390

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.96 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	93 mV
NormY	1.74 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	88 mV
NormZ	1.94 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	91 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **900 MHz** Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	8.7	4.4
SAR _{be} [%]	With Correction Algorithm	0.1	0.2

TSL **1810 MHz** Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	12.9	8.8
SAR _{be} [%]	With Correction Algorithm	0.5	0.1

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)

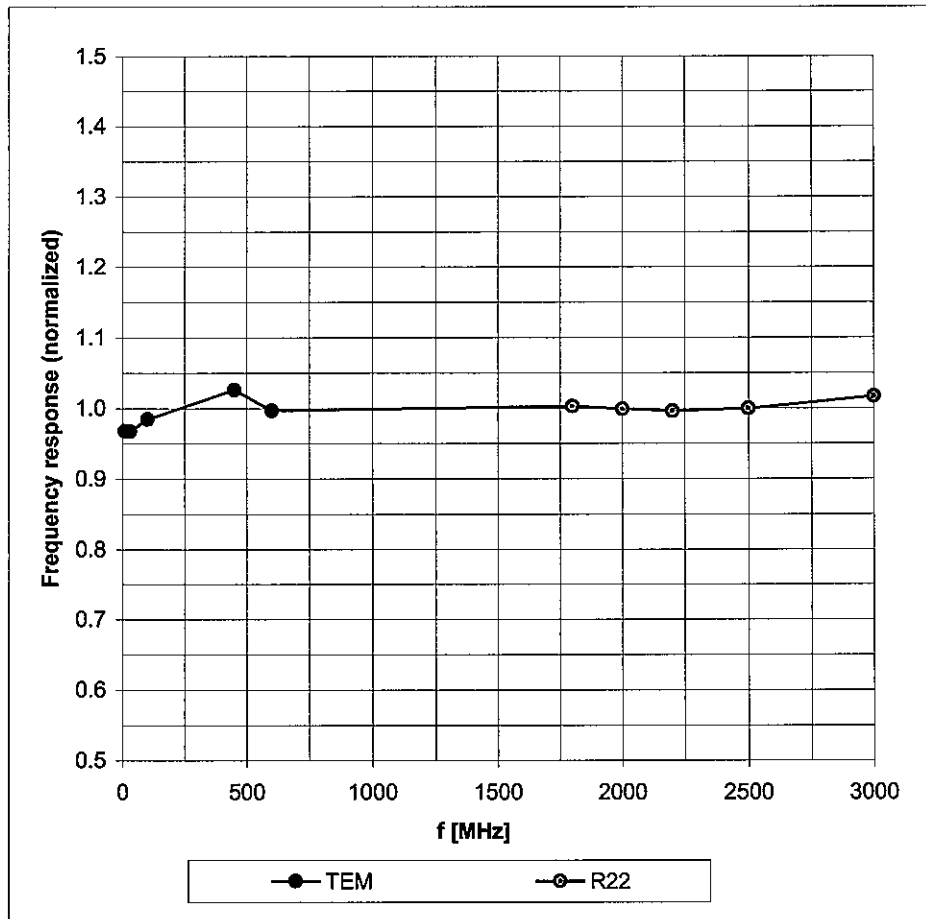

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)


Receiving Pattern (ϕ), $\vartheta = 0^\circ$

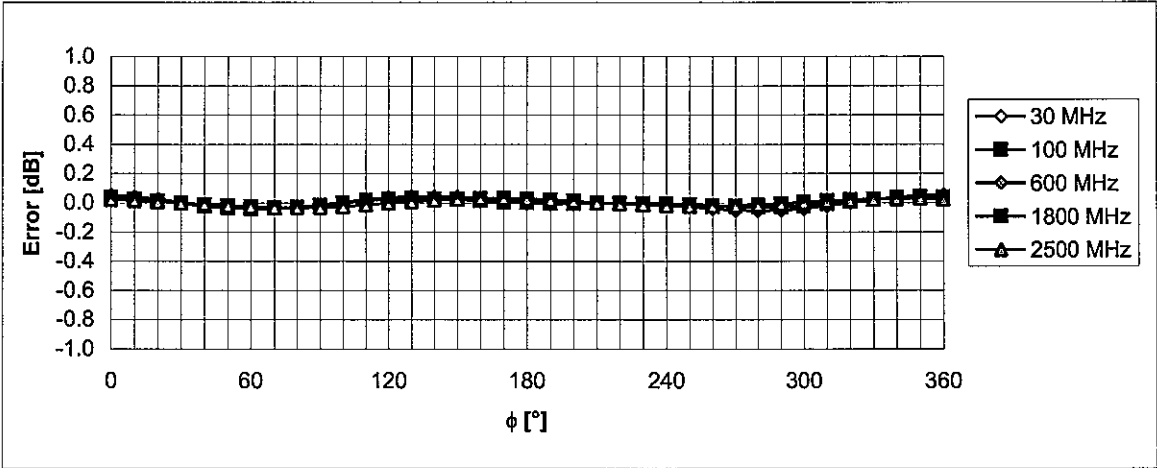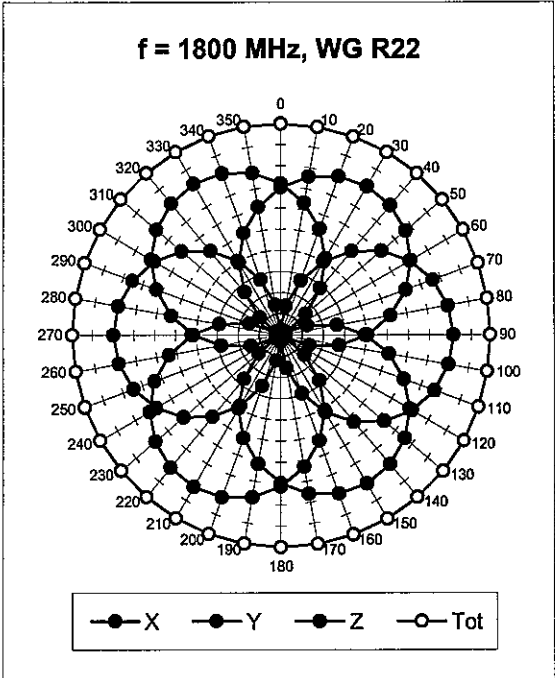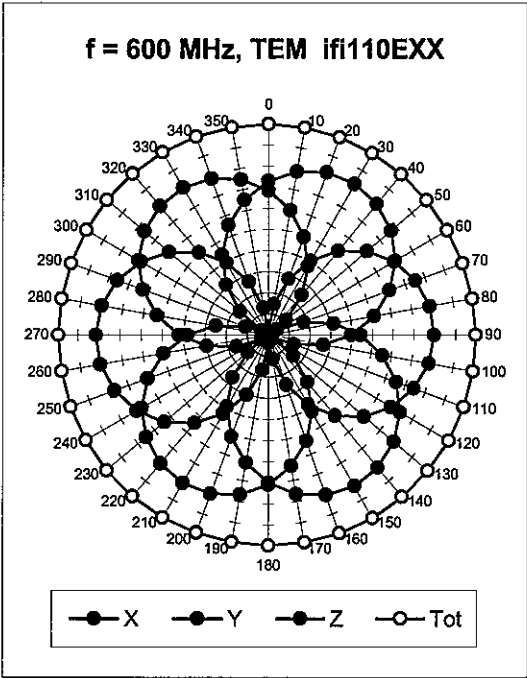

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)



Dynamic Range $f(\text{SAR}_{\text{head}})$

(Waveguide R22, $f = 1800$ MHz)

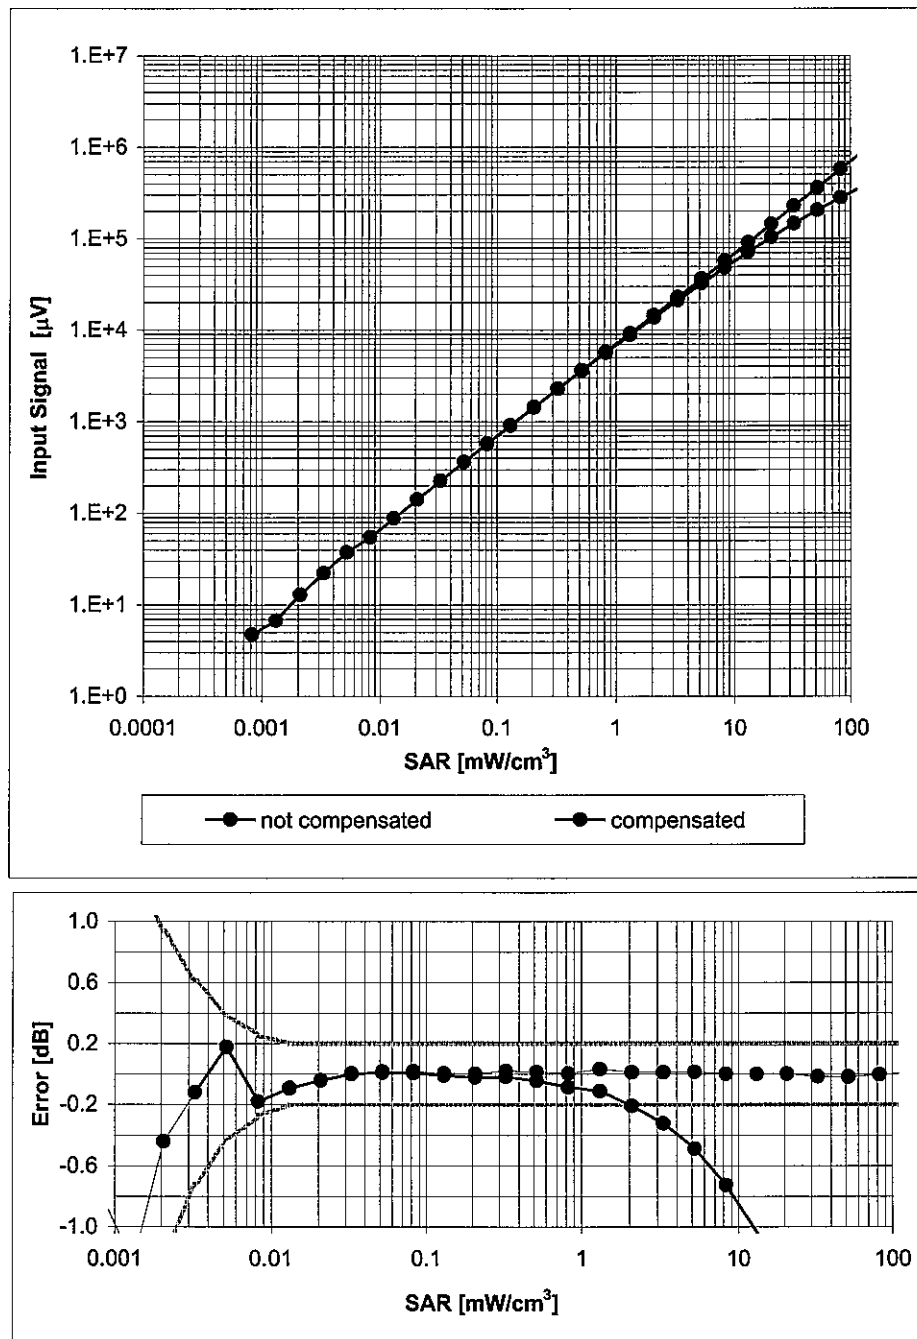

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

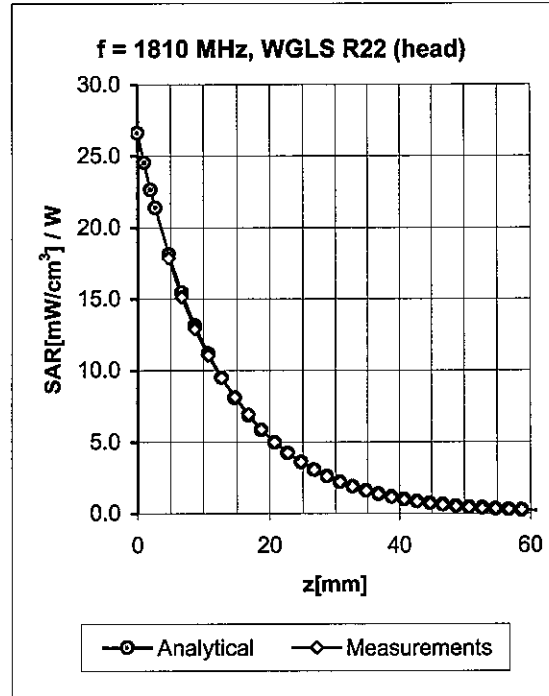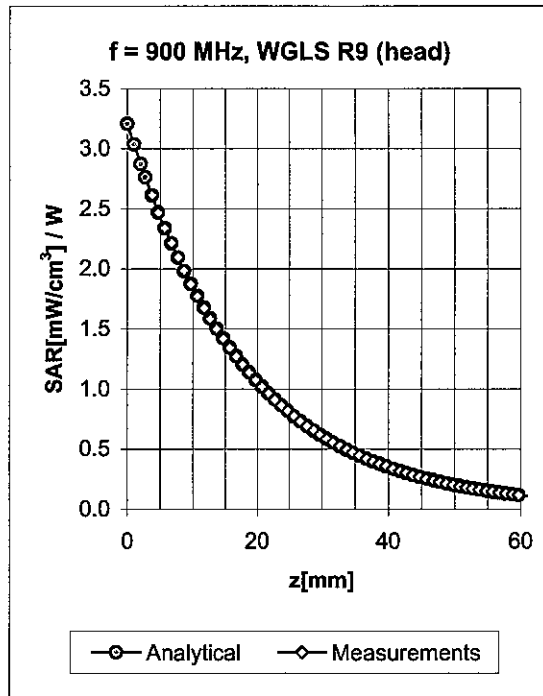


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.31	2.61	6.38 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.48	2.77	5.22 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.53	2.73	4.98 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.29	2.90	6.13 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.57	2.70	4.89 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.73	2.25	4.70 ± 11.0% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

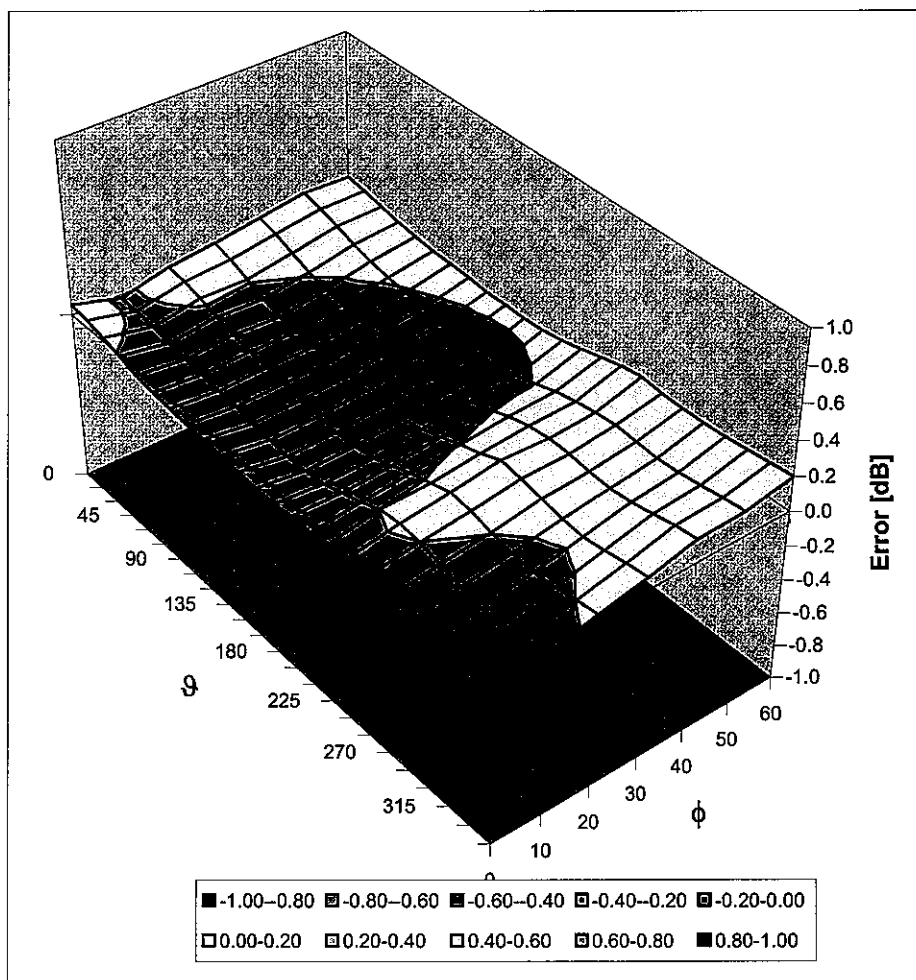

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola Korea**

Certificate No. **ET3-1515_Aug07**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1515**

Calibration procedure(s) **QA-CAL-01-v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 28, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: August 28, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1515

Manufactured:	February 1, 2000
Last calibrated:	August 24, 2006
Modified:	August 22, 2007
Recalibrated:	August 28, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1515

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.69 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	95 mV
NormY	1.95 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	96 mV
NormZ	1.65 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	91 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **900 MHz** **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	6.1	2.9
SAR _{be} [%]	With Correction Algorithm	0.2	0.1

TSL **1810 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	13.3	9.2
SAR _{be} [%]	With Correction Algorithm	1.0	0.2

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

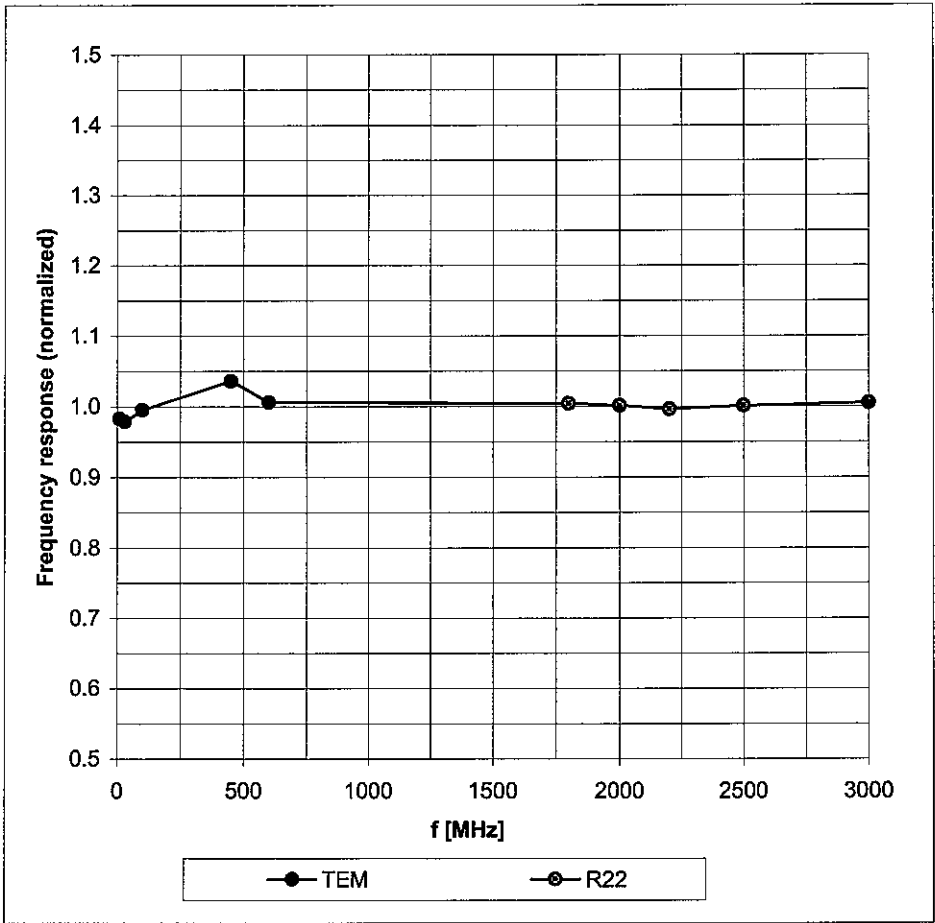


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

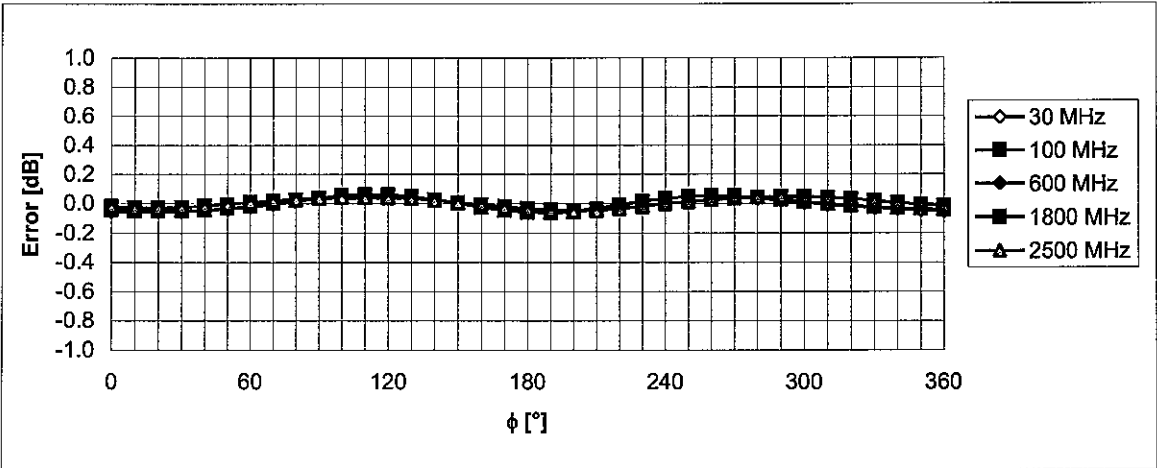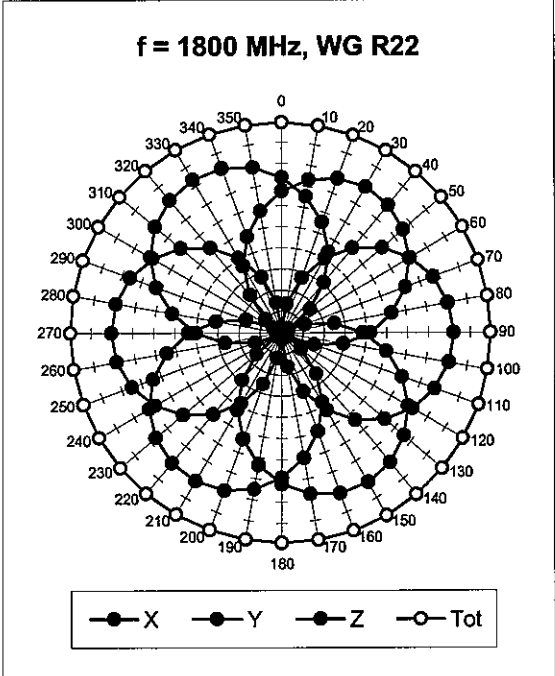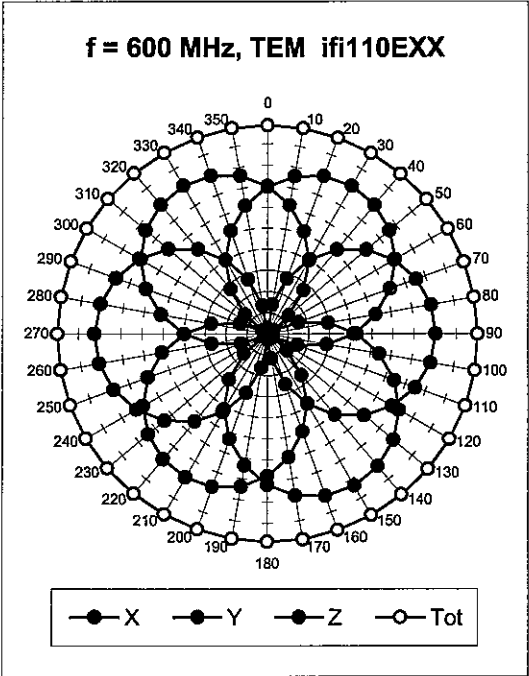



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

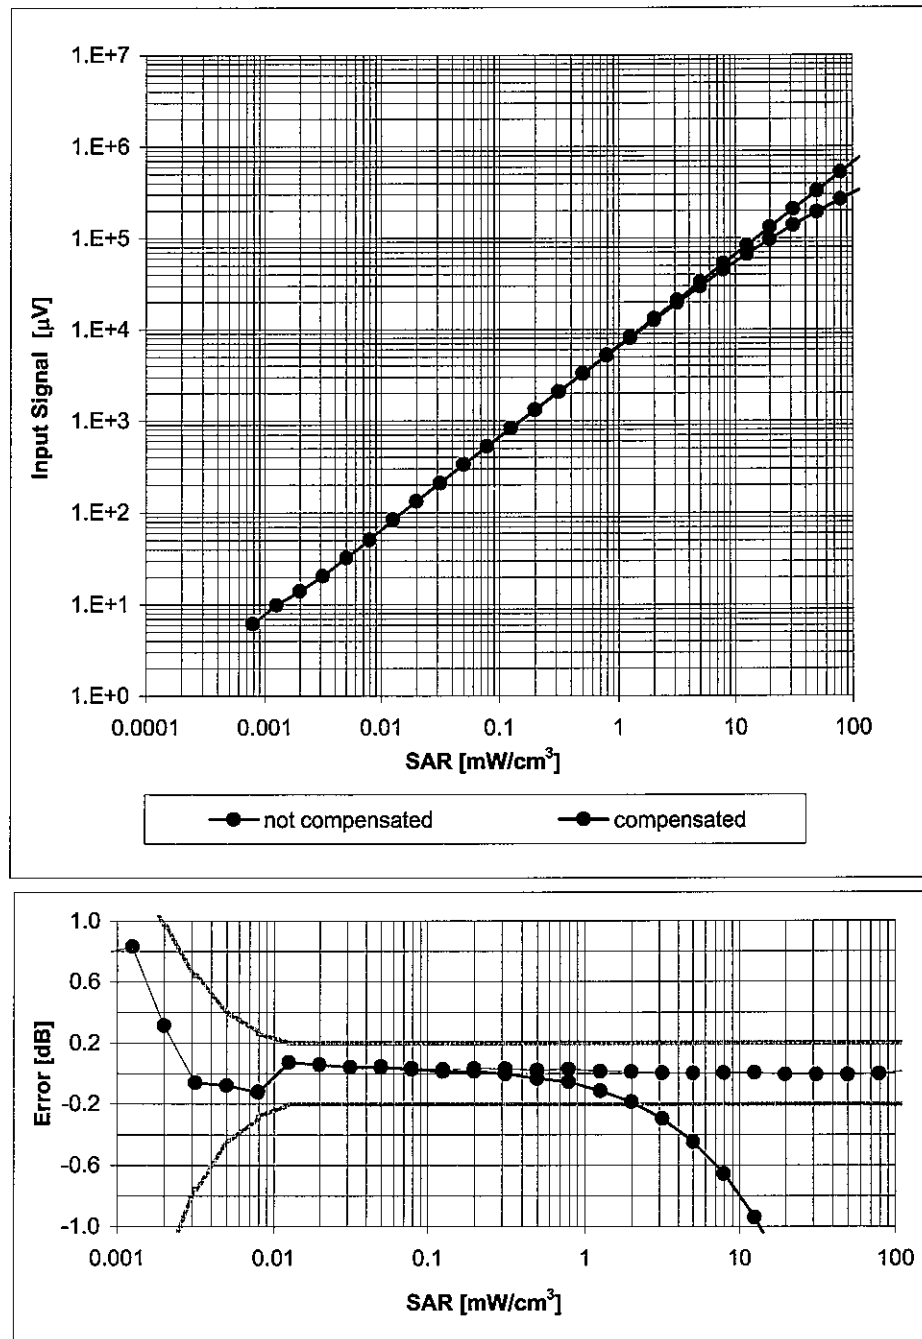

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

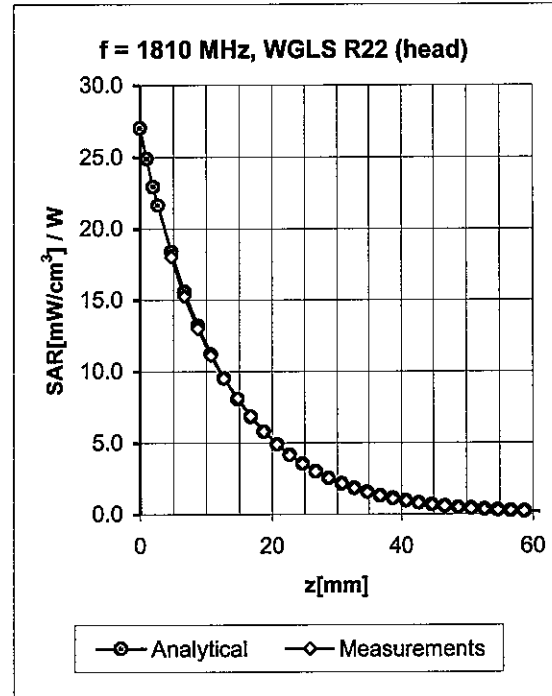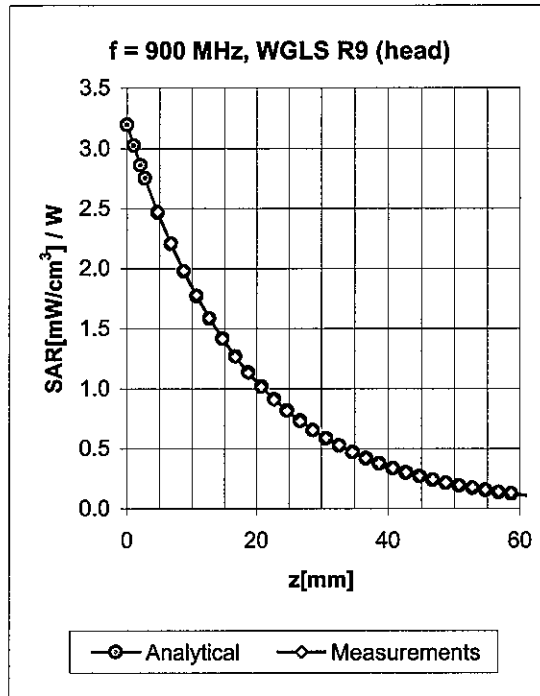


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.31	2.72	6.50 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.61	2.40	5.21 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.63	2.47	4.98 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.70	1.84	4.64 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.34	2.89	6.09 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.65	2.62	4.73 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.78	2.28	4.45 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.66	2.16	4.06 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

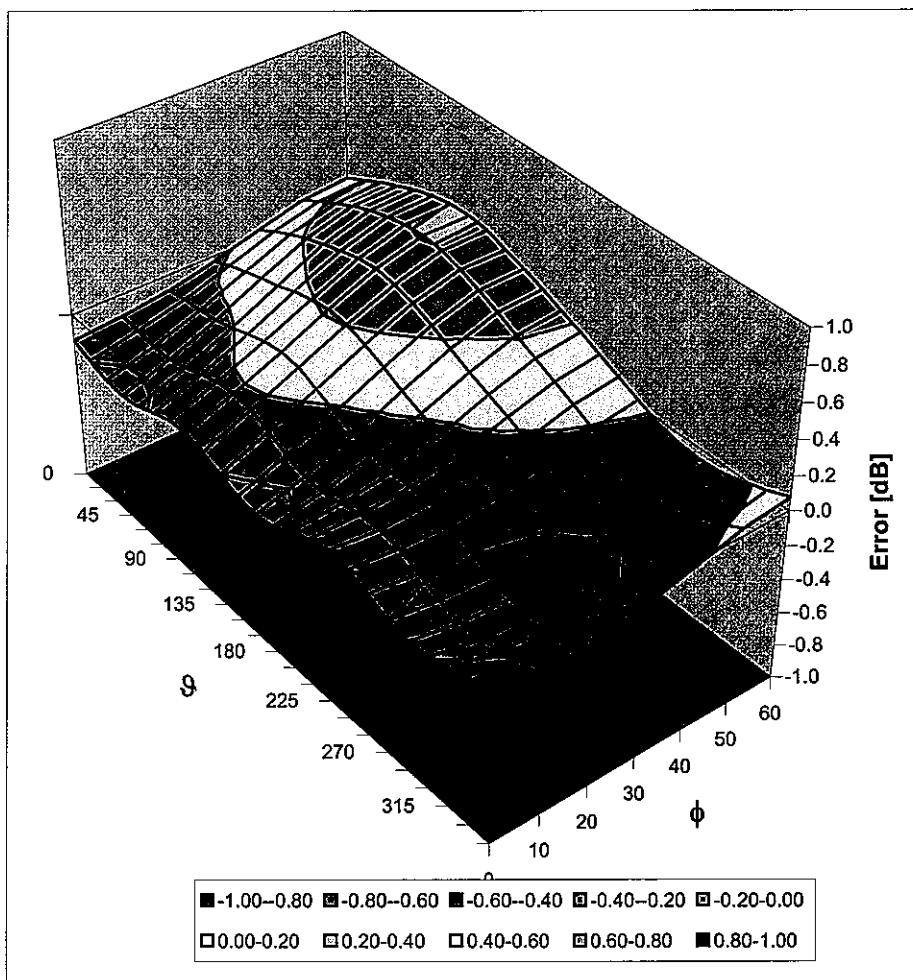

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Appendix 5

Measurement Uncertainty Budget

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i</i> (1 g)	<i>c_i</i> (10 g)	1 g <i>u_i</i> (±%)	10 g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11.1	10.8	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				22.2	21.6	

Appendix 6

Photographs of the device under test

>>>Photographs have been extracted to FCC Exhibit 7<<<

Appendix 7

Dipole Characterization Certificate

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

	900MHz	
IEEE/IEC Target:	10.8	(W/kg)
Measurement Uncertainty (k=1):	9.0%	
Measurement Period:	10-May-06 to 18-April-07	
# of tests performed:	1,562	
Grand Average:	11.24	(W/kg)
% Delta (Average - IEEE1528 Target)	4.1%	
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes	
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT	
	Applies to Dipole SN's: 55, 69, 77, 78, 79, 80, 91, 92, 93, 94, 95, 96, 97, 1d034, 1d035	

-New System Performance Check Targets- per WI-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
900MHz	11.24	41.5 ± 5%	0.97 ± 5%

-Approvals-

Submitted by:

Marge Kaunas

Date:

24-Apr-07

Signed:



Comments:

Spreadsheet detailing referenced historical measurements is available upon request.

Approved by:

Mark Douglas

Date:

1-May-07

Signed:



Comments:

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

	1800MHz	
IEEE1528 Target:	38.1	(W/kg)
Measurement Uncertainty (k=1):	9.0%	
Measurement Period:	10-May-06 to 18-April-07	
# of tests performed:	1314	
Grand Average:	37.5	(W/kg)
% Delta (Average - IEEE1528 Target)	-1.6%	
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes	
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT	
	Applies to Dipole SN's: 246tr, 250tr, 251tr, 259tr, 263tr, 271tr, 272tr, 276tr, 277tr, 279tr, 280tr, 281tr, 283tr, 284tr, 2d128, 2d129	

-New System Performance Check Targets- per WI-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
1800MHz	37.5	40.0 ± 5%	1.40 ± 5%

-Approvals-

Submitted by: Marge Kaunas Date: 24-Apr-07

Signed: Marge Kaunas

Comments: Spreadsheet detailing referenced historical measurements is available upon request.

Approved by: Mark Douglas Date: 1-May-07

Signed: Mark Douglas

Comments:

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

	2450MHz	
IEEE1528 Target:	52.4	(W/kg)
Measurement Uncertainty (k=1):	9.0%	
Measurement Period:	10-May-06 to 18-April-07	
# of tests performed:	32	
Grand Average:	58.0	(W/kg)
% Delta (Average - IEEE1528 Target)	10.6%	
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes	
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT	
	Applies to Dipole SN's: 740, 766, 767, 788, 789	

-New System Performance Check Targets- per WI-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
2450MHz	58.0	39.2 ± 5%	1.80 ± 5%

-Approvals-

Submitted by:

Marge Kaunas

Date:

24-Apr-07

Signed:



Comments:

Spreadsheet detailing referenced historical measurements is available upon request.


Approved by:

Mark Douglas

Date:

1-May-07

Signed:



Comments: