



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 21073-1 Supplement

Report Date – September 18, 2007

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Albert J. Patapack

Title: EMC Engineer

Date: September 18, 2007

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: IC3908-1

Tests Requested By: Motorola Inc.
 Mobile Devices business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 850, GSM 1900, WCDMA 850,
 WCDMA 1900, EDGE, Bluetooth

FCC ID : IHDP56HM1

Serial Numbers: LKW0390068, LKW0390093, LKW0390099
 LKW0390119, LKW0390162

Testing Complete Date: September 11, 2007

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 :

 X Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI 63.4 2003

Summary of Testing

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery.
 All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment List

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	838786/010	3/19/2008
Rohde Schwarz	Receiver	ESI40	100001	5/02/2008
A.H. Systems Inc.	DRG Horn Antenna	SAS 200/571	365	5/24/2008
ETS	Log-Periodic Antenna	3148	1189	9/12/2007
ETS	Biconical Antenna	3110B	3369	9/12/2007
Attenuator	Weinschel	AS-6	6675	1/31/2008
Attenuator	Weinschel	AS-6	6677	6/21/2008
ETS	LISN	3810/2NM	62907	5/02/2008
ETS	LISN	3810/2NM	62912	5/02/2008
Dell	Laptop Computer	M20	NA	NA
Iomega	Zip Drive	Z250S	P9HM1992CK	NA
Olympus	Camera	D-600L	4020727	NA

All equipment is on a one-year calibration cycle.

The Dell M20 Laptop Computer, the Iomega Z250S Zip Drive and the Olympus D-600L Camera are labeled as DoC.

Measurement Procedures and Data

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

Operating Mode – Rx Mode, Data Transfer Mode.

Notes: Worst Case emissions reported.

30 MHz – 1000 MHz

Frequency MHz	Level dBµV/m	Measured dBµV	Transd dB	Cables dB	Limit dBµV/m	Margin dB	Height cm	Angle deg	Pol.
30.68	35.7	15.08	12.8	7.8	40	4.3	99	138	VERT
47.96	34.87	16.75	10.2	7.9	40	5.1	100	225	VERT
75.72	33.46	15.84	8.9	8.7	40	6.5	100	201	VERT
79.96	32.45	14.11	9.5	8.8	40	7.6	100	174	VERT
83.80	28.41	9.29	10.2	8.9	40	11.6	129	143	VERT
147.28	35.04	11.94	13.0	10.1	43.5	8.5	204	244	VERT
196.36	34.83	9.05	15.2	10.6	43.5	8.7	250	235	HORI
261.80	37.04	12.72	13.0	11.3	46	9.0	100	102	HORI
287.68	35.66	10.45	13.6	11.6	46	10.3	124	251	HORI
327.28	36.56	9.05	15.5	12.0	46	9.4	100	274	HORI
365.04	37.59	9.85	15.5	12.2	46	8.4	165	201	VERT
707.44	35.38	-1.16	21.6	14.9	46	10.6	100	157	HORI
921.80	38.95	-0.66	23.6	16.0	46	7.0	100	106	HORI
958.68	39.18	-0.41	23.5	16.1	46	6.8	361	191	HORI

Above 1 GHz

Frequency MHz	Level dBµV/m	Measured dBµV	Transd dB	Gain dB	Limit dBµV/m	Margin dB	Height cm	Angle deg	Pol.
1122.3	37.43	20.76	24.8	8.2	53.9	16.5	220	329	VERT
1131.1	37.29	20.56	24.9	8.1	53.9	16.6	170	348	VERT
1505.5	38.13	20.01	25.0	6.9	53.9	15.8	400	206	VERT
1884.8	40.86	19.61	26.9	5.6	53.9	13.0	380	232	HORI
1955.2	41.45	19.47	27.4	5.5	53.9	12.5	150	212	HORI
1979.3	41.88	19.66	27.6	5.4	53.9	12.0	380	332	HORI
1989.9	41.49	19.69	27.2	5.4	53.9	12.4	118	328	VERT
1996.9	42.23	19.84	27.8	5.4	53.9	11.7	250	230	HORI
2002.2	42.29	19.87	27.8	5.4	53.9	11.6	222	291	HORI

Peak Radiated Data for Emissions Above 1GHz

Frequency MHz	Level dB μ V/m	Angle deg	Height cm	Pol.
1122.24	54.19	339	200	VER
1124.25	52.26	94	300	VER
1130.26	53.23	332	200	VER
1132.26	48.43	58	400	VER
1505.01	50.43	166	200	HOR
1507.01	53.13	204	400	VER
1883.77	53.20	254	400	HOR
1885.77	51.83	136	400	HOR
1953.91	53.02	228	200	HOR
1955.91	51.88	175	400	HOR
1977.96	53.94	337	400	HOR
1979.96	52.92	115	200	VER
1987.98	54.16	308	100	VER
1989.98	52.88	186	100	VER
1991.98	53.48	338	200	HOR
1995.99	54.00	242	300	HOR
1997.99	53.61	153	400	HOR
2000.00	53.30	270	200	HOR

AC LINE CONDUCTED EMISSIONS

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Detectors - Quasi Peak and Average Detector


Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.


Measurement Results

See attached:

AC LINE COMPUTER PERIPHERAL - Tx Mode - Line Coupling

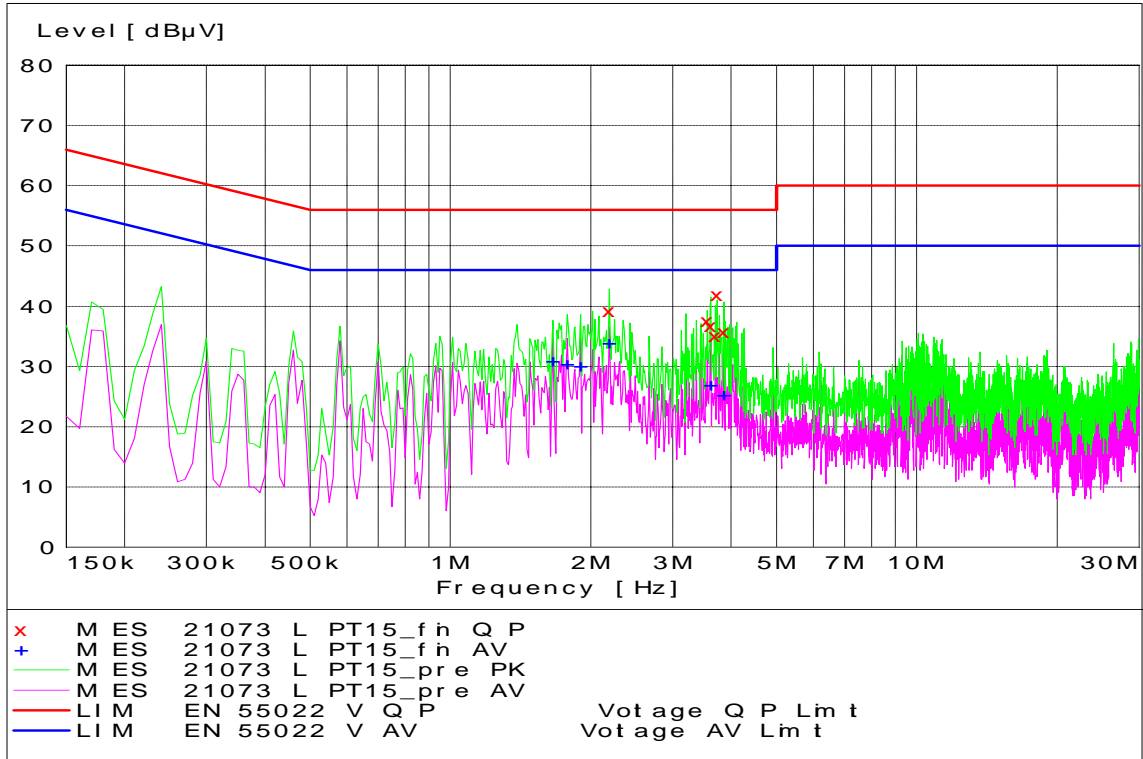

AC LINE COMPUTER PERIPHERAL - Tx Mode - Neutral Coupling

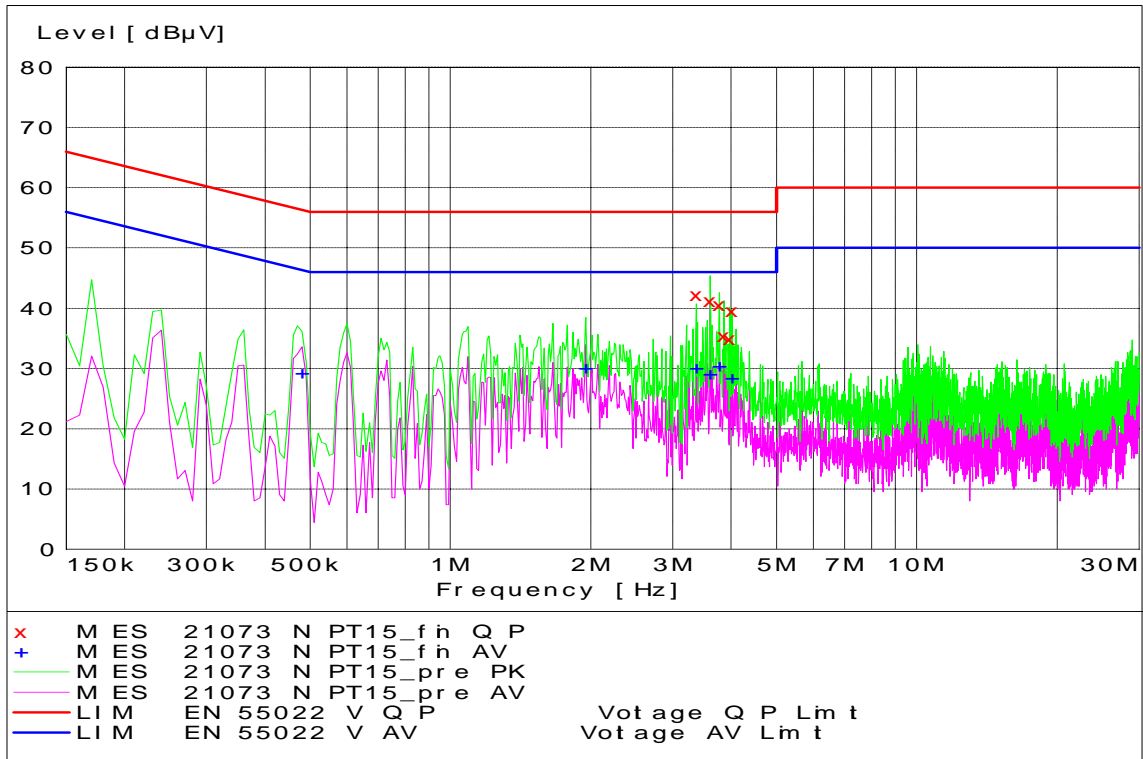

End of Test Report