



**MOBILE DEVICES BUSINESS
PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 22608-1

Report Date – November 26, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: November 26, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Test Report Details..... 3

Applicable Standards..... 3

Summary of Testing..... 4

Equipment and Cable Configurations 5

Measurement Procedures and Data 6

SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 6

FIELD STRENGTH OF SPURIOUS EMISSIONS 11

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: 109O-1

Tests Requested By: Motorola Inc.
 Mobile Devices Business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type : Cellular Phone

Signaling Capability: GSM 850 & 1900, EDGE 850 & 1900, Bluetooth,

FCC ID: IHDP56JC1

Serial Numbers: 355906020004031, 355906020004031

Testing Complete Date: November 26, 2008

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X Part 2
- X Part 22 Subpart H - Public Mobile Services
- X Part 24 Subpart E – Personal Communications Services

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004

Summary of Testing

Test #	Test Name	Pass/Fail
1	Spurious Emissions at Antenna Terminal	Pass
2	Field Strength of Spurious Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	Spurious Emissions at Antenna Terminal	See results
2	Field Strength of Spurious Emissions	See results

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	838786/010	2/28/09
Rohde Schwarz	Receiver	ESI26	100001	6/03/09
Hewlett Packard	EMC Analyzer	E7405	US39440191	5/08/09
Hewlett Packard	Signal Generator	83712A	3429A00286	6/19/09
ETS	DRG Horn Antenna	3115	6222	5/02/09
A.H. Systems	DRG Horn Antenna	SAS 200/571	265	1/18/09
ETS	Log-Periodic Antenna	3148	1188	07/30/09
ETS	Biconical Antenna	3110B	3370	07/29/09
Attenuator	Weinschel	AS-6	6675	6/13/09
Attenuator	Weinschel	AS-6	6677	6/17/09
Agilent	Power Meter	E4416A	GB41293263	12/27/08
Agilent	Power Sensor	E9323A	MY44420341	12/27/08
Agilent	Microwave Preamplifier	8449B	3008A01442	2/25/09

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

Note that the Agilent power meter, power sensor, and the preamplifier are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle.

Measurement Procedures and Data**SPURIOUS EMISSIONS AT ANTENNA TERMINALS****Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results – GSM 850

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-36.98
3rd harmonic	-13	-37.89
4th harmonic	-13	-54.31
5th harmonic	-13	-42.93
6th harmonic	-13	-65.74
7th harmonic	-13	-55.79
8th harmonic	-13	-66.82
9th harmonic	-13	-62.93
10th harmonic	-13	*

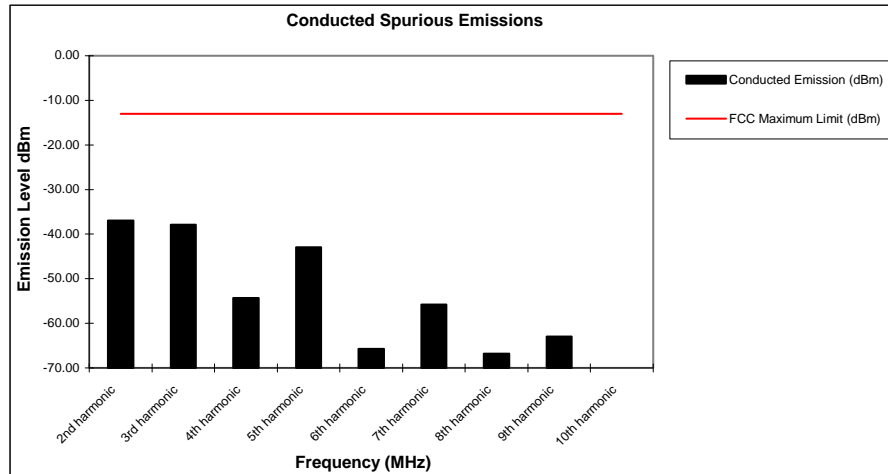

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-42.26
3rd harmonic	-13	-40.54
4th harmonic	-13	-53.05
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

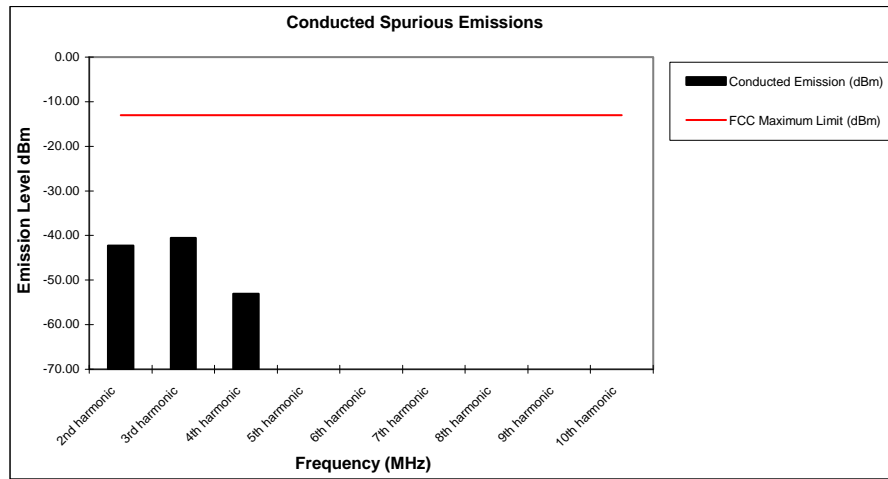

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-40.12
3rd harmonic	-13	-48.04
4th harmonic	-13	-57.83
5th harmonic	-13	-50.65
6th harmonic	-13	*
7th harmonic	-13	0.00
8th harmonic	-13	-60.43
9th harmonic	-13	*
10th harmonic	-13	*

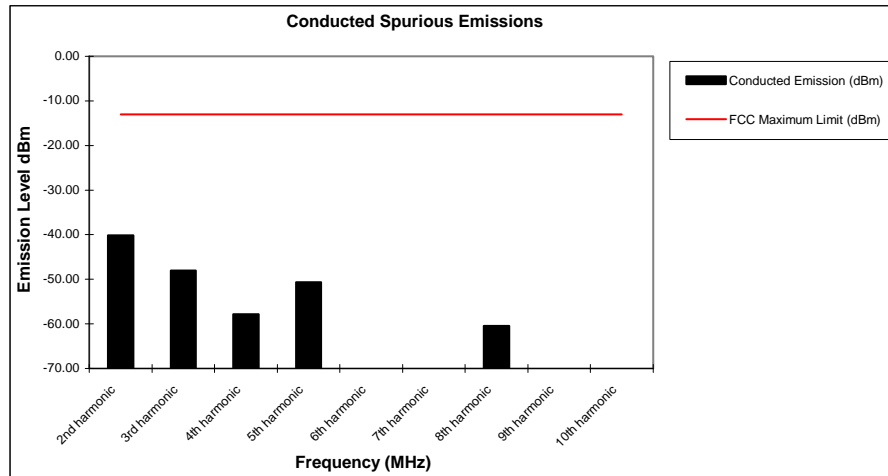

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-46.18
3rd harmonic	-13	-44.29
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

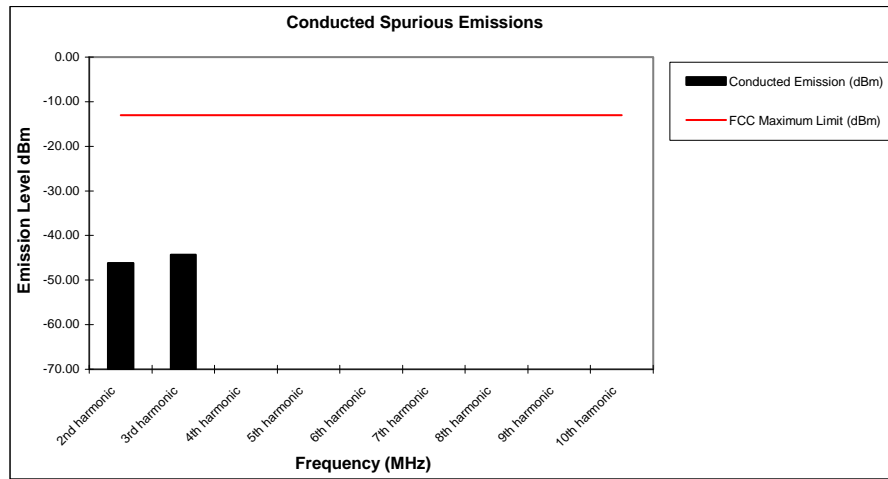

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

Measurement Results


Attached

Measurement Results – GSM 850

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-27.9	-22.0
3rd harmonic	-13	-29.4	-24.4
4th harmonic	-13	-41.9	-37.4
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

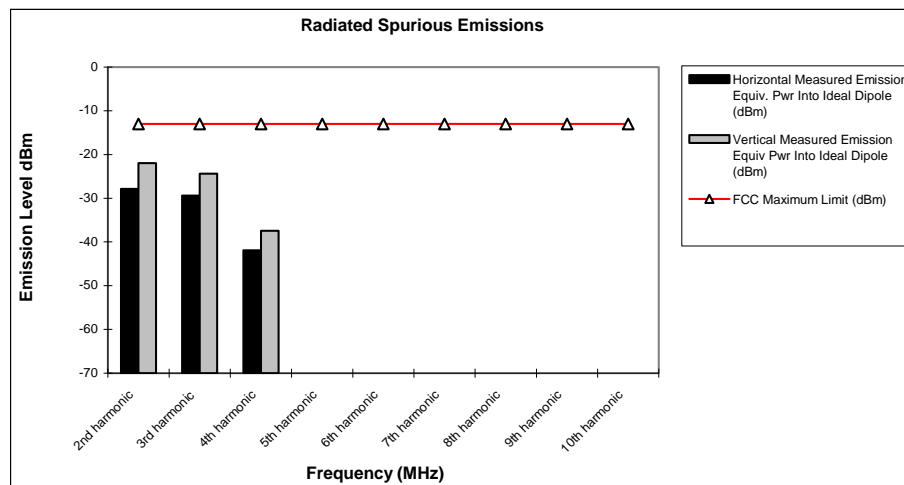

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 850

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-27.2	-22.9
3rd harmonic	-13	-29.8	-28.5
4th harmonic	-13	-41.9	-42.8
5th harmonic	-13	*	-35.4
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

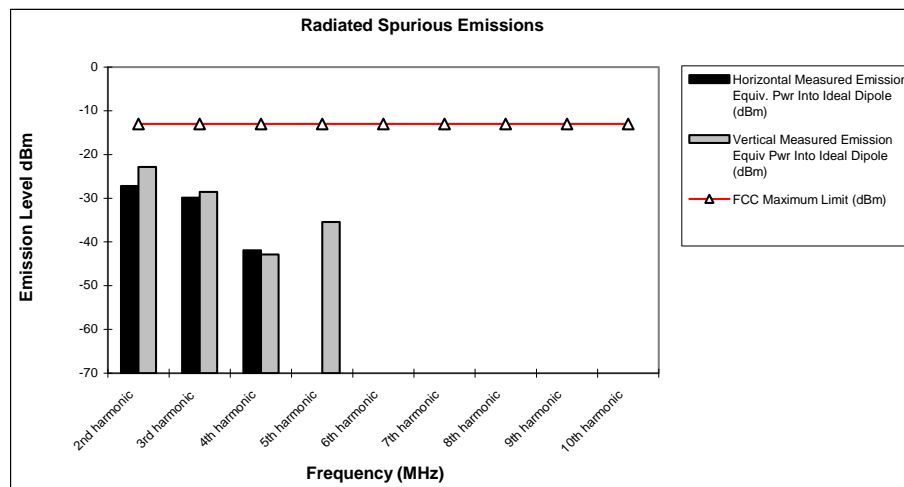

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-32.0	-29.6
3rd harmonic	-13	-27.7	-27.0
4th harmonic	-13	*	*
5th harmonic	-13	-19.1	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

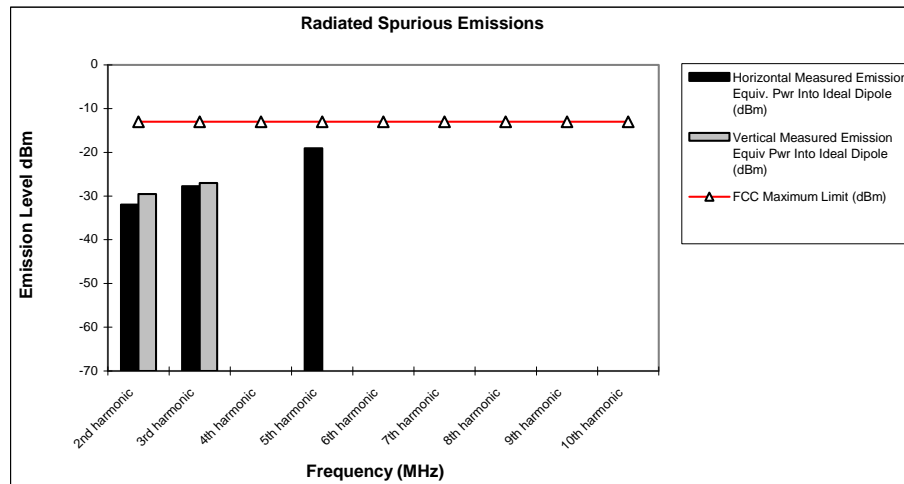

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-35.2	-30.1
3rd harmonic	-13	-21.6	-22.2
4th harmonic	-13	-28.7	*
5th harmonic	-13	-25.2	-28.2
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

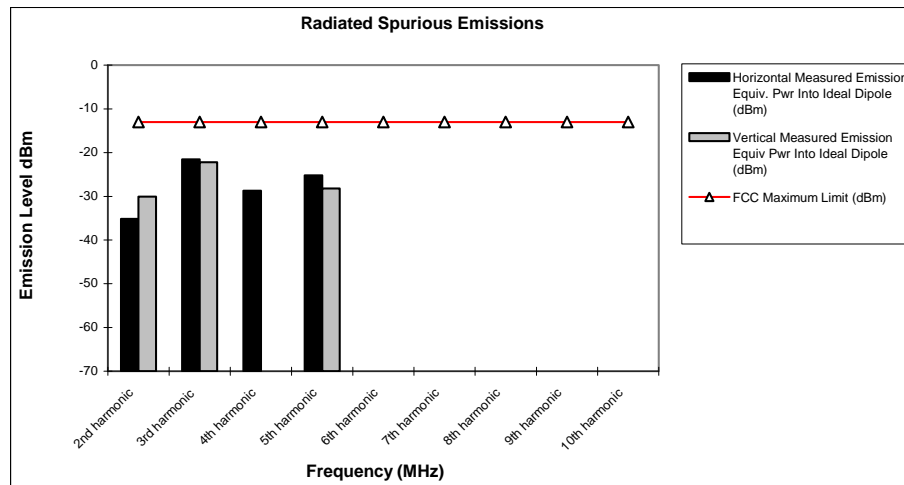

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-38.8	-38.4
3rd harmonic	-13	-44.2	-46.1
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

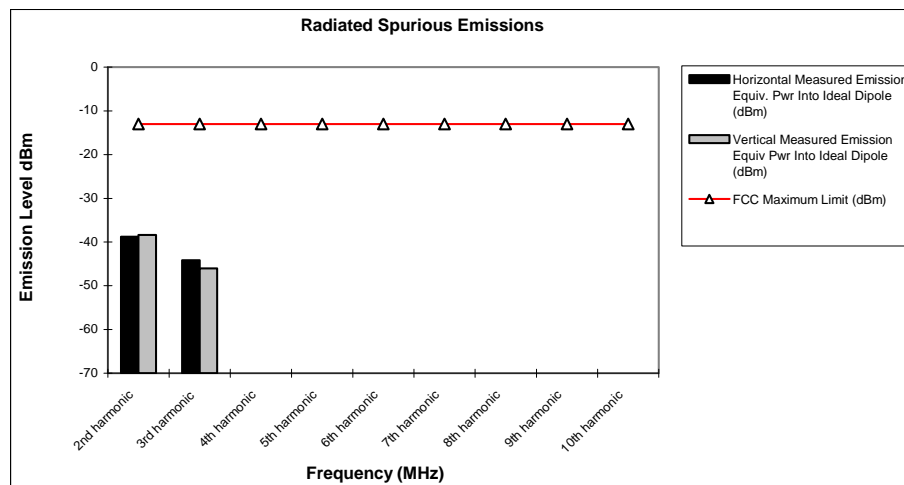

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-39.6	-40.0
3rd harmonic	-13	-39.0	-39.2
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

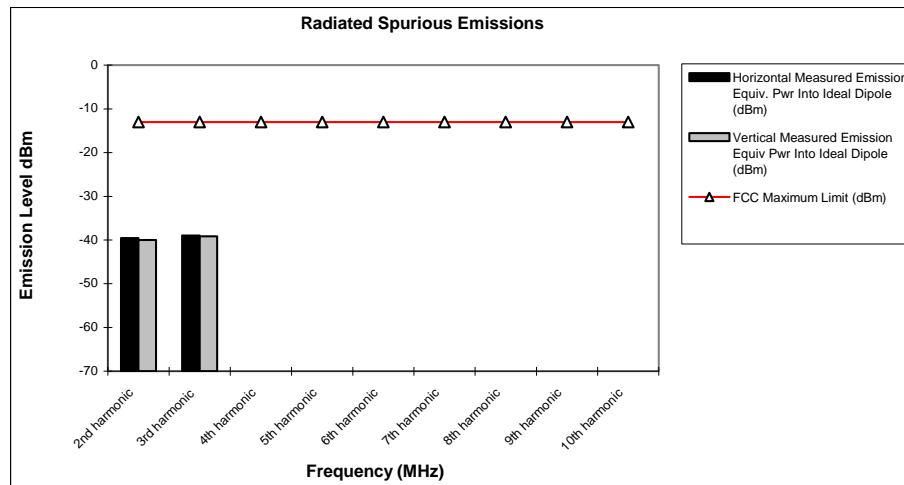

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 1900

Configuration – Slider Down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-43.9	-40.6
3rd harmonic	-13	-33.9	-40.7
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

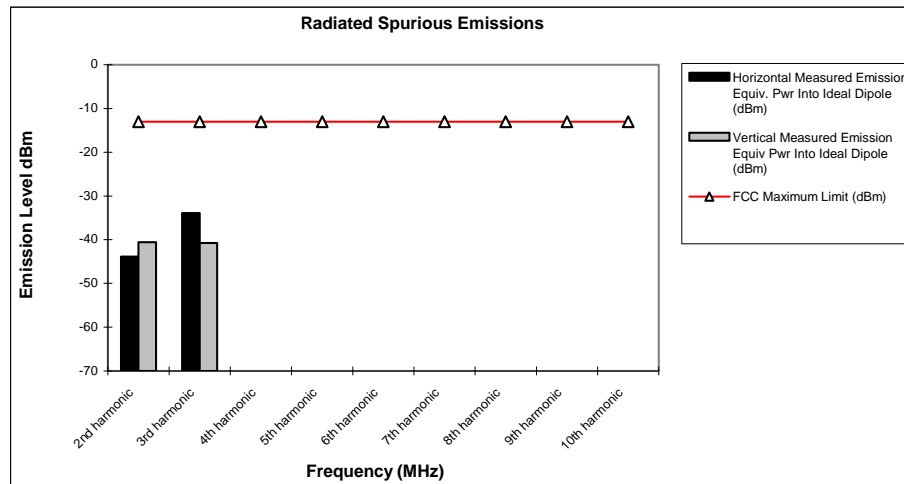

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 1900

Configuration – Slider Up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-40.9	-37.8
3rd harmonic	-13	-27.2	-25.4
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

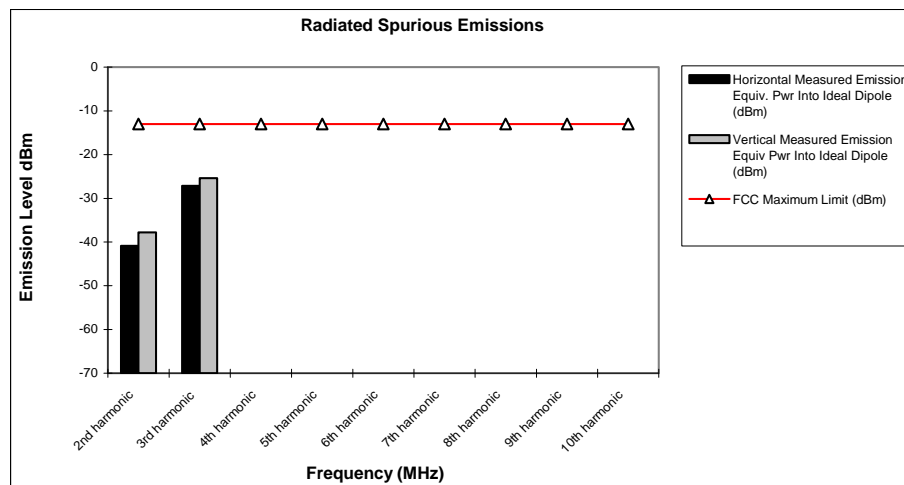

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

End of Test Report