



**MOTOROLA**

**Portable Cellular Phone SAR Test Report**

**Test Report #:** 22295-1F  
**Date of Report:** September 8, 2008  
**Date of Test:** August 17, 2008 – August 26, 2008  
**FCC ID #:** **IHDP56JK1**  
**Generic Name:** **MQ6-4411F21**  
**Laboratory:** Motorola Mobile Devices Business Product Safety & Compliance Laboratory  
600 N. US Highway 45  
Libertyville, Illinois 60048

**Report Author:** Katerina Royzen  
Engineer  
*Katya Royzen*

This laboratory is accredited to ISO/IEC 17025-2005 to perform the following tests:

- |  |   |
|--|---|
| <u>Tests:</u>                            | <u>Procedures:</u>  |
| Electromagnetic Specific Absorption Rate | IEC 62209-1   |
|  | RSS-102   |
|  | IEEE 1528 - 2003  |
|  | FCC OET Bulletin 65 ( <i>including Supplement C</i> )   |
|  | Australian Communications Authority Radio<br>Communications (Electromagnetic Radiation – Human<br>Exposure) Standard 2003 |
|  | CENELEC EN 50360 (2001)   |
|  | CENELEC EN 50361 (2001)   |
|  | ARIB Std. T-56 (2002)   |

**Accreditation:**



TESTING CERT #2518-02

On the following products or types of products:

On the following products or types of products: Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

**Statement of Compliance:**

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with IEEE 1528 / CENELEC EN62209-1 (2006), as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2008

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

## Table of Contents

<b>1. Introduction</b>	<b>2</b>
<b>2. Description of the Device Under Test</b>	<b>2</b>
2.1 Antenna description	2
2.2 Device description	2
<b>3. Test Equipment Used</b>	<b>4</b>
3.1 Dosimetric System	4
3.2 Additional Equipment	4
<b>4. Electrical parameters of the tissue simulating liquid</b>	<b>5</b>
<b>5. System Accuracy Verification</b>	<b>6</b>
<b>6. Test Results</b>	<b>7</b>
6.1 Head Adjacent Test Results	7
6.2 Body Worn Test Results	12
<b>References</b>	<b>15</b>
<b>Appendix 1: SAR distribution comparison for system accuracy verification</b>	<b>16</b>
<b>Appendix 2: SAR distribution plots for Phantom Head Adjacent Use</b>	<b>17</b>
<b>Appendix 3: SAR distribution plots for Body Worn Configuration</b>	<b>18</b>
<b>Appendix 4: Probe Calibration Certificate</b>	<b>19</b>
<b>Appendix 5: Measurement Uncertainty Budget</b>	<b>20</b>
<b>Appendix 6: Dipole Characterization Certificate</b>	<b>22</b>

## 1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4] and [5]. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1g average set in [3] and 2.0W/kg in a 10g average set in [2].

## 2. Description of the Device Under Test

### 2.1 Antenna description

<b>Type</b>	Internal	
<b>Location</b>	Bottom of the Transceiver	
<b>Dimensions</b>	Length	43 mm
	Width	13 mm
<b>Configuration</b>	FICA	

### 2.2 Device description

<b>Serial Number</b>	4401028257612					
<b>Mode(s) of Operation</b>	GSM 850	GSM 900	GSM 1800	GSM 1900	WIFI	Bluetooth
<b>Modulation Mode(s)</b>	GSMK	GSMK	GSMK	GSMK	CCK	GFSK
<b>Maximum Output Power Setting</b>	33.0 dBm	33.0 dBm	30.5 dBm	30.5 dBm	15.56 dBm	8.177 dBm
<b>Duty Cycle</b>	1:8	1:8	1:8	1:8	1:1	1:1
<b>Transmitting Frequency Rang(s)</b>	824-849 MHz	880-915 MHz	1710-1785 MHz	1850– 1910 MHz	2400 – 2484 MHz	2400 - 2484 MHz
<b>Production Unit or Identical Prototype (47 CFR §2.908)</b>	Identical Prototype					
<b>Device Category</b>	Portable					
<b>RF Exposure Limits</b>	General Population / Uncontrolled					

MOTOROLA, INC. Portable Cellular Phone SAR Test Report Number: 22295-1

<b>Serial Number</b>	4401028257612											
<b>Mode(s) of Operation</b>	GPRS Class 10 850	GPRS Class 11 850	GPRS Class 12 850	GPRS Class 10 900	GPRS Class 11 900	GPRS Class 12 900	GPRS Class 10 1800	GPRS Class 11 1800	GPRS Class 12 1800	GPRS Class 10 1900	GPRS Class 11 1900	GPRS Class 12 1900
<b>Modulation Mode(s)</b>	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK
<b>Maximum Output Power Setting</b>	31.0 dBm	29.5 dBm	27.5 dBm	31.0 dBm	29.5 dBm	27.5 dBm	28.5 dBm	26.5 dBm	24.5 dBm	28.5 dBm	26.5 dBm	24.5 dBm
<b>Duty Cycle</b>	2:8	3:8	4:8	2:8	3:8	4:8	2:8	3:8	4:8	2:8	3:8	4:8
<b>Transmitting Frequency Rang(s)</b>	824-849 MHz	824-849 MHz	824-849 MHz	880-915 MHz	880-915 MHz	880-915 MHz	1710-1785 MHz	1710-1785 MHz	1710-1785 MHz	1850-1910 MHz	1850-1910 MHz	1850-1910 MHz
<b>Production Unit or Identical Prototype (47 CFR §2.908)</b>	Identical Prototype											
<b>Device Category</b>	Portable											
<b>RF Exposure Limits</b>	General Population / Uncontrolled											

<b>Serial Number</b>	4401028257612											
<b>Mode(s) of Operation</b>	EDGE Class 10 850	EDGE Class 11 850	EDGE Class 12 850	EDGE Class 10 900	EDGE Class 11 900	EDGE Class 12 900	EDGE Class 10 1800	EDGE Class 11 1800	EDGE Class 12 1800	EDGE Class 10 1900	EDGE Class 11 1900	EDGE Class 12 1900
<b>Modulation Mode(s)</b>	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK	8PSK
<b>Maximum Output Power Setting</b>	26.5 dBm	24.5 dBm	22.5 dBm	26.5 dBm	24.5 dBm	22.5 dBm	25.5 dBm	23.5 dBm	21.5 dBm	25.5 dBm	23.5 dBm	21.5 dBm
<b>Duty Cycle</b>	2:8	3:8	4:8	2:8	3:8	4:8	2:8	3:8	4:8	2:8	3:8	4:8
<b>Transmitting Frequency Rang(s)</b>	824-849 MHz	824-849 MHz	824-849 MHz	880-915 MHz	880-915 MHz	880-915 MHz	1710-1785 MHz	1710-1785 MHz	1710-1785 MHz	1850-1910 MHz	1850-1910 MHz	1850-1910 MHz
<b>Production Unit or Identical Prototype (47 CFR §2.908)</b>	Identical Prototype											
<b>Device Category</b>	Portable											
<b>RF Exposure Limits</b>	General Population / Uncontrolled											

### 3. Test Equipment Used

#### 3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall 10g RSS uncertainty of the measurement system is ±10.8% (K=1) with an expanded uncertainty of ±21.6% (K=2). The overall 1g RSS uncertainty of the measurement system is ±11.1% (K=1) with an expanded uncertainty of ±22.2% (K=2). The measurement uncertainty budget is given in Appendix 5. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4W/kg to 10W/kg.

The list of calibrated equipment used for the measurements is shown in the following table.

Description	Serial Number	Cal Due Date
DASY4™ DAE4	661	1/28/2009
DASY4™ DAE3	434	1/28/2009
E-Field Probe ES3DV3	3124	3/17/2009
E-Field Probe ES3DV3	3115	5/12/2009
S.A.M. Phantom used for 800/900MHz	TP-1106	
S.A.M. Phantom used for 1800/1900/2450MHz	TP-1235	
S.A.M. Phantom used for 1800/1900/2450MHz	TP-1250	
Dipole Validation Kit, D900V2	78	4/22/2009
Dipole Validation Kit, D900V2	91	4/22/2009
Dipole Validation Kit, D1800V2	281TR	4/22/2009
Dipole Validation Kit, D1800V2	272TR	4/22/2009
Dipole Validation Kit, D2450V2	740	4/22/2009

#### 3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04844	1/29/2010
Power Meter E4419B	US39250622	6/7/2009
Power Sensor #1 – 9301A	US39211008	6/2/2009
Power Sensor #2 - 9301A	US39211009	6/2/2009
Network Analyzer HP8753ES	US39172529	9/10/2008
Dielectric Probe Kit HP85070C	US99360070	

**4. Electrical parameters of the tissue simulating liquid**

Prior to conducting SAR measurements, the relative permittivity,  $\epsilon_r$ , and the conductivity,  $\sigma$ , of the tissue simulating liquids were measured with a HP85070 Dielectric Probe Kit. These values, along with the temperature of the simulated tissue are shown in the table below. The recommended limits for permittivity and conductivity are also shown. A mass density of  $\rho=1\text{g/cm}^3$  was entered into the system in all the cases. It can be seen that the measured parameters are within tolerance of the recommended limits specified in [1] and [5].

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			$\epsilon_r$	$\sigma$ (S/m)	Temp (°C)
835	Head	Measured, 8/17/2008	41.2	0.92	20.0
		Recommended Limits	41.5 ±5%	0.90 ±5%	18-25
	Body	Measured, 8/26/2008	53.1	0.99	20.4
		Recommended Limits	55.2 ±5%	0.97 ±5%	18-25
900	Head	Measured, 8/17/2008	40.4	0.98	20.1
		Recommended Limits	41.5 ±5%	0.97 ±5%	18-25
	Body	Measured, 8/22/2008	52.7	1.05	20.9
		Recommended Limits	55.0 ±5%	1.05 ±5%	18-25
1750	Head	Measured, 8/17/2008	41.3	1.34	19.8
		Measured, 8/26/2008	40.7	1.31	19.9
		Recommended Limits	40.1 ±5%	1.37 ±5%	18-25
	Body	Measured, 8/22/2008	51.3	1.43	20.0
Recommended Limits		53.4 ±5%	1.49 ±5%	18-25	
1880	Head	Measured, 8/18/2008	40.9	1.47	19.9
		Measured, 8/21/2008	40.6	1.47	20.0
		Recommended Limits	40.0 ±5%	1.40 ±5%	18-25
	Body	Measured, 8/21/2008	51.6	1.59	20.0
Recommended Limits		53.3 ±5%	1.52 ±5%	18-25	
2450	Head	Measured, 8/20/2008	35.6	1.85	20.0
		Recommended Limits	39.2 ±10%	1.80 ±5%	18-25
	Body	Measured, 8/20/2008	47.9	1.97	20.0
		Recommended Limits	52.7 ±10%	1.95 ±5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	835MHz / 900 MHz	835MHz / 900 MHz	1800MHz / 1900 MHz	1800 MHz / 1900 MHz	2450MHz	2450 MHz
	Head	Body	Head	Body	Head	Body
Sugar	57	44.9	--	--	--	--
DGBE	--	--	47	30.8	--	30
Diacetin	--	--	--	--	51	--
Water	40.45	53.06	52.62	68.8	48.75	70
Salt	1.45	0.94	0.38	0.4	0.15	--
HEC	1	1	--	--	--	--
Bact.	0.1	0.1	--	--	0.1	--

### 5. System Accuracy Verification

A system accuracy verification of the DASY4™ was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within ±10% from the target SAR indicated Appendix 7. These frequencies are within ±10% of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted on the same days as the measurement of the DUT. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ±0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

f (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ε <sub>r</sub>	σ (S/m)		
900	Measured, 8/17/2008	10.43	40.4	0.98	20.4	20.0
	Measured, 8/22/2008	11.45	41.1	0.98	20.4	20.8
	Measured, 8/26/2008	10.63	40.1	0.97	20.5	20.8
	Recommended Limits	11.29	41.5 ±5%	0.97 ±5%	18-25	18-25
1800	Measured, 8/17/2008	39.33	41.0	1.40	20.7	19.8
	Measured, 8/18/2008	39.98	41.3	1.38	20.5	19.7
	Measured, 8/21/2008	38.30	40.9	1.37	20.6	20.2
	Measured, 8/22/2008	39.45	40.7	1.37	20.4	20.3
	Measured, 8/26/2008	40.13	40.5	1.36	20.5	20.1
	Recommended Limits	37.7	40.0 ±5%	1.4 ±5%	18-25	18-25
2450	Measured, 8/20/2008	56.75	35.6	1.85	20.5	20.1
	Recommended Limits	56.5	39.2 ±10%	1.80 ±5%	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ES3DV3	SN 3124	900	6.03	8 of 9
		1810	4.98	8 of 9
E-Field Probe ES3DV3	SN 3115	900	5.63	8 of 9
		1810	4.93	8 of 9
		2450	4.41	8 of 9

## 6. Test Results

The test sample was operated using an actual transmission through a base station simulator. The base station simulator was setup to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in [1], [4] and [5]. The phone was positioned into these configurations using the device holder supplied with the DASY4™ SAR measurement system. The measured dielectric constant of the material used for the device holder is less than 2.9 and the loss tangent is less than 0.02 ( $\pm 30\%$ ) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and used for measurements. The grid spacing of the course scan was set to 15 mm as shown in the SAR plots included in Appendix 2 and 3. Please refer to the DASY4™ manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone model covered by this report has the following battery options:  
SNN5811A - 780 mAH Battery

### 6.1 Head Adjacent Test Results

The SAR results shown in tables 1 through 8 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is  $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0cm  $\pm 0.5$ cm.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ES3DV3	SN 3124	900	6.03	8 of 9
		1810	4.98	8 of 9
E-Field Probe ES3DV3	SN 3115	900	5.63	8 of 9
		1810	4.93	8 of 9
		2450	4.41	8 of 9

Left Head Cheek Position (slide open)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	-0.03	0.389	0.39	0.537	0.54
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	19.9	0.02	0.113	0.11	0.179	0.18
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.31	0.0484	0.05	0.0911	0.10
	Channel 11							
GSM 850 + WIFI						0.44		0.64
GSM 1900 + WIFI						0.16		0.28

Table 1: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position (slide open)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	0.01	0.401	0.40	0.564	0.56
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	19.6	0.02	0.118	0.12	0.203	0.20
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.14	0.0502	0.05	0.0953	0.10
	Channel 11							
GSM 850 + WIFI						0.45		0.66
GSM 1900 + WIFI						0.17		0.30

Table 2: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head Cheek Position (slide close)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	0.02	0.302	0.30	0.401	0.40
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	20.0	-0.07	0.255	0.26	0.421	0.43
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.40	0.0119	0.01	0.0268	0.03
	Channel 11							
GSM 850 + WIFI						0.31		0.43
GSM 1900 + WIFI						0.27		0.46

Table 3: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position (slide close)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	-0.05	0.322	0.33	0.433	0.44
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	20.0	0.00	0.179	0.18	0.274	0.27
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	0.14	0.0245	0.02	0.0484	0.05
	Channel 11							
GSM 850 + WIFI						0.35		0.49
GSM 1900 + WIFI						0.20		0.32

Table 4: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position (slide open)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	0.03	0.251	0.25	0.343	0.34
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	19.9	-0.07	0.093	0.09	0.155	0.16
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.55	0.0158	0.02	0.0296	0.03
	Channel 11							
GSM 850 + WIFI						0.27		0.37
GSM 1900 + WIFI						0.11		0.19

Table 5: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position (slide open)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	-0.09	0.241	0.25	0.328	0.34
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	19.6	-0.06	0.072	0.07	0.127	0.13
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.08	0.0216	0.02	0.0407	0.04
	Channel 11							
GSM 850 + WIFI						0.27		0.38
GSM 1900 + WIFI						0.09		0.17

Table 6: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position (slide close)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	-0.04	0.248	0.25	0.339	0.34
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	20.1	0.14	0.131	0.13	0.216	0.22
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.02	0.00996	0.01	0.0189	0.02
	Channel 11							
GSM 850 + WIFI						0.26		0.36
GSM 1900 + WIFI						0.14		0.24

Table 7: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position (slide close)								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.0	0.01	0.244	0.24	0.333	0.33
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	20.0	-0.09	0.125	0.13	0.221	0.23
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.17	0.0218	0.02	0.0432	0.04
	Channel 11							
GSM 850 + WIFI						0.26		0.37
GSM 1900 + WIFI						0.15		0.27

Table 8: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

## 6.2 Body Worn Test Results

The SAR results shown in tables 9 through 12 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is  $\text{New SAR} = \text{Old SAR} * 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories’, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. In addition to accessory testing, the cellular phone was tested with the front and back of the phone facing the phantom. For voice mode operation, the phone was placed as a distance of 25mm from the phantom. For data mode operation, the phone was placed as a distance of 25mm from the phantom. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ES3DV3	SN 3124	900	5.64	8 of 9
		1810	5.08	8 of 9
E-Field Probe ES3DV3	SN 3115	900	5.67	8 of 9
		1810	4.75	8 of 9
		2450	4.10	8 of 9

Body-Worn; Front of Phone 25mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.4	-0.01	0.108	0.11	0.146	0.15
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	20.0	-0.07	0.0573	0.06	0.0887	0.09
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.28	0.00437	0.00	0.0102	0.01
	Channel 11							
GSM 850 + WIFI						0.11		0.16
GSM 1900 + WIFI						0.06		0.10

Table 9: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Back of Phone 25mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.93						
	Channel 190	32.88	20.4	-0.11	0.166	0.17	0.230	0.24
	Channel 251	32.90						
1900MHz	Channel 512	30.47						
	Channel 661	30.38	20.0	-0.09	0.375	0.38	0.647	0.66
	Channel 810	30.46						
WIFI 2450MHz	Channel 1							
	Channel 6	15.56	20.0	-0.13	0.0119	0.01	0.0229	0.02
	Channel 11							
Bluetooth 2450MHz	Channel 39	8.177	20.0	2.75	0.000284	0.00	0.00129	0.00
850MHz + WIFI						0.18		0.26
1900MHz+ WIFI						0.39		0.68
850MHz+ Bluetooth						0.17		0.24
1900MHz+ Bluetooth						0.38		0.66

Table 10: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; EDGE Back of Phone 25mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
EDGE Class 10 850MHz	Channel 128	26.38						
	Channel 190	26.45	20.9	0.01	0.0681	0.07	0.0947	0.09
	Channel 251	26.44						
EDGE Class 10 1900MHz	Channel 512	25.47						
	Channel 661	25.48	20.0	0.03	0.139	0.14	0.243	0.24
	Channel 810	25.48						

Table 11: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; GPRS Back of Phone 25mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GPRS Class 11 850MHz	Channel 128	29.47						
	Channel 190	29.43	20.9	-0.03	0.0898	0.09	0.125	0.13
	Channel 251	29.41						
GPRS Class 10 1900MHz	Channel 512	28.50						
	Channel 661	28.46	20.0	-0.02	0.344	0.35	0.595	0.60
	Channel 810	28.44						

Table 12: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

## References

- [1] CENELEC, en62209-1:2006 “Human Exposure to Radio Frequency Fields From Hand - Held and Body - Mounted Wireless Communication Devices – Human Models, Instrumentation, and Procedures”
- [2] CENELEC, en50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300MHz – 3GHz)”.
- [3] ANSI / IEEE, C95.1 1999 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”

## **Appendix 1**

### **SAR distribution comparison for the system accuracy verification**

Date/Time: 8/26/2008 8:29:51 AM

**DUT: Dipole 1800 MHz; Type: D1800V2;** Procedure Notes: 1800 MHz System Performance Check /  
 Dipole Sn# 281tr; PM1 Power = 200 mW  
 Sim.Temp@ meas = 20.0\*C; Sim.Temp@ SPC = 20.1\*C; Room Temp@ SPC = 20.5\*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.98, 4.98, 4.98); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R2 Section 1, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (9x4x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 7.05 mW/g

**Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 83.2 V/m; Power Drift = 0.012 dB  
 Peak SAR (extrapolated) = 14.2 W/kg  
**SAR(1 g) = 8.04 mW/g; SAR(10 g) = 4.29 mW/g**  
 Maximum value of SAR (measured) = 9.06 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 83.2 V/m; Power Drift = 0.012 dB  
 Peak SAR (extrapolated) = 14.1 W/kg  
**SAR(1 g) = 8.01 mW/g; SAR(10 g) = 4.28 mW/g**  
 Maximum value of SAR (measured) = 9.00 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 9.03 mW/g

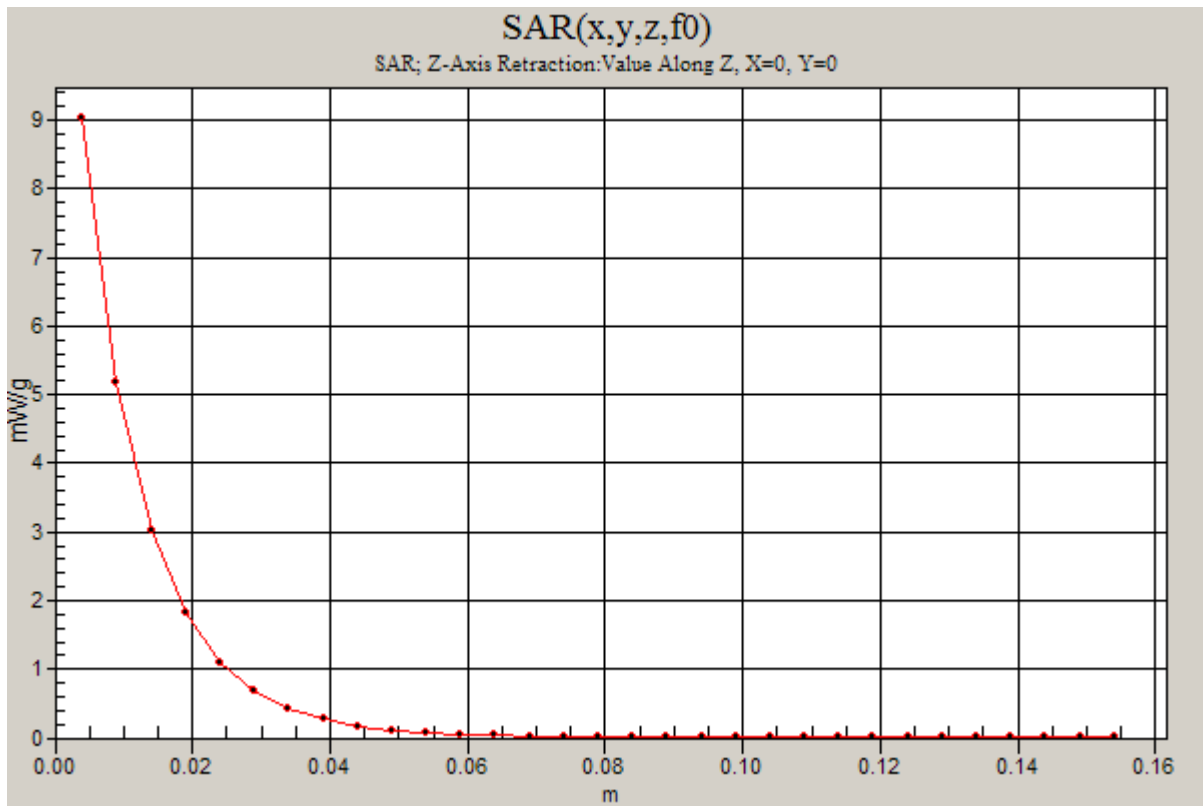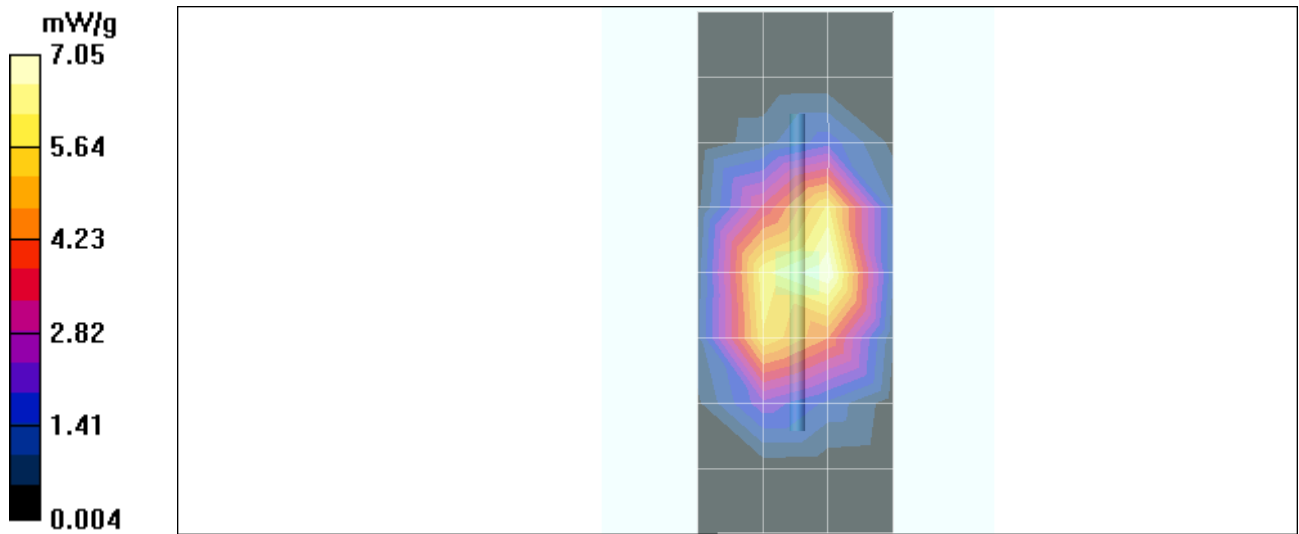

Date/Time: 8/22/2008 8:51:53 AM

**DUT: Dipole 1800 MHz; Type: D1800V2;** Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272TR; PM1 Power =200mW  
 Sim.Temp@ meas = 20.0\*C; Sim.Temp@ SPC =20.3\*C; Room Temp@ SPC = 20.4\*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.93, 4.93, 4.93); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 6.76 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 81.4 V/m; Power Drift = 0.035 dB  
 Peak SAR (extrapolated) = 14.3 W/kg  
**SAR(1 g) = 7.97 mW/g; SAR(10 g) = 4.21 mW/g**  
 Maximum value of SAR (measured) = 8.94 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 81.4 V/m; Power Drift = 0.035 dB  
 Peak SAR (extrapolated) = 14.0 W/kg  
**SAR(1 g) = 7.81 mW/g; SAR(10 g) = 4.13 mW/g**  
 Maximum value of SAR (measured) = 8.75 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 8.96 mW/g

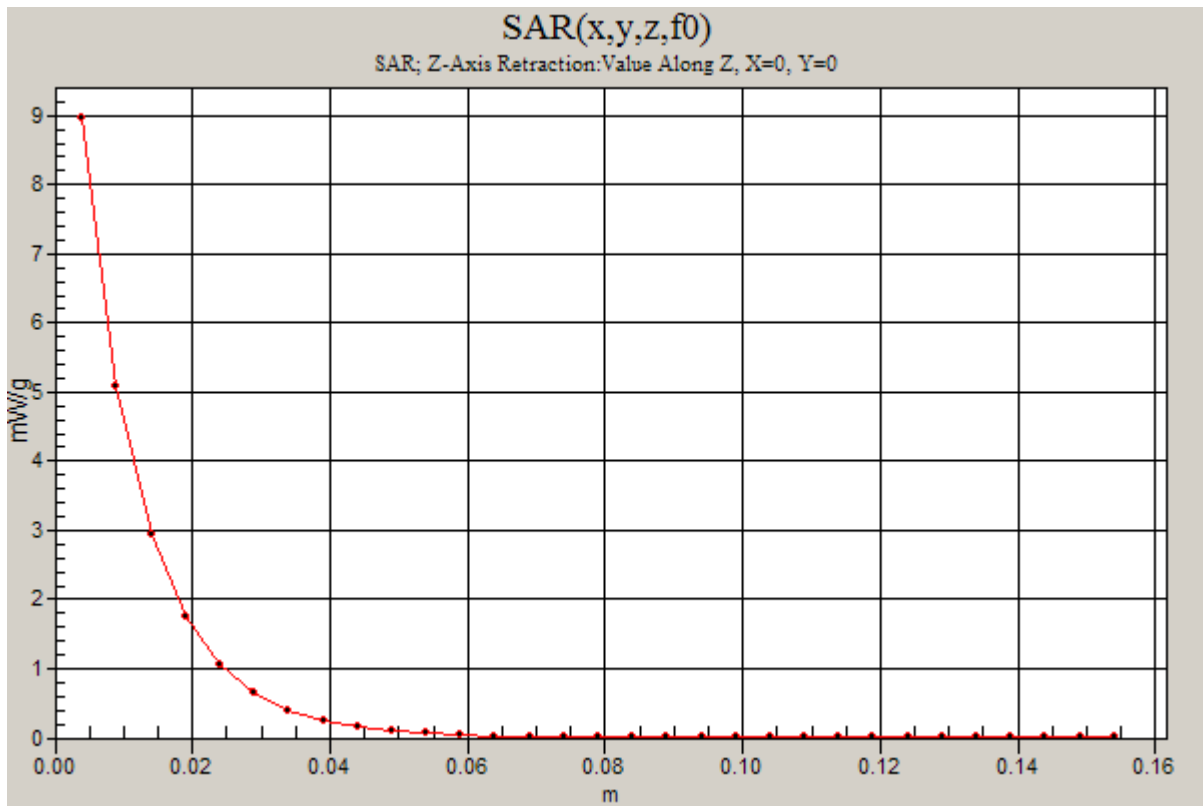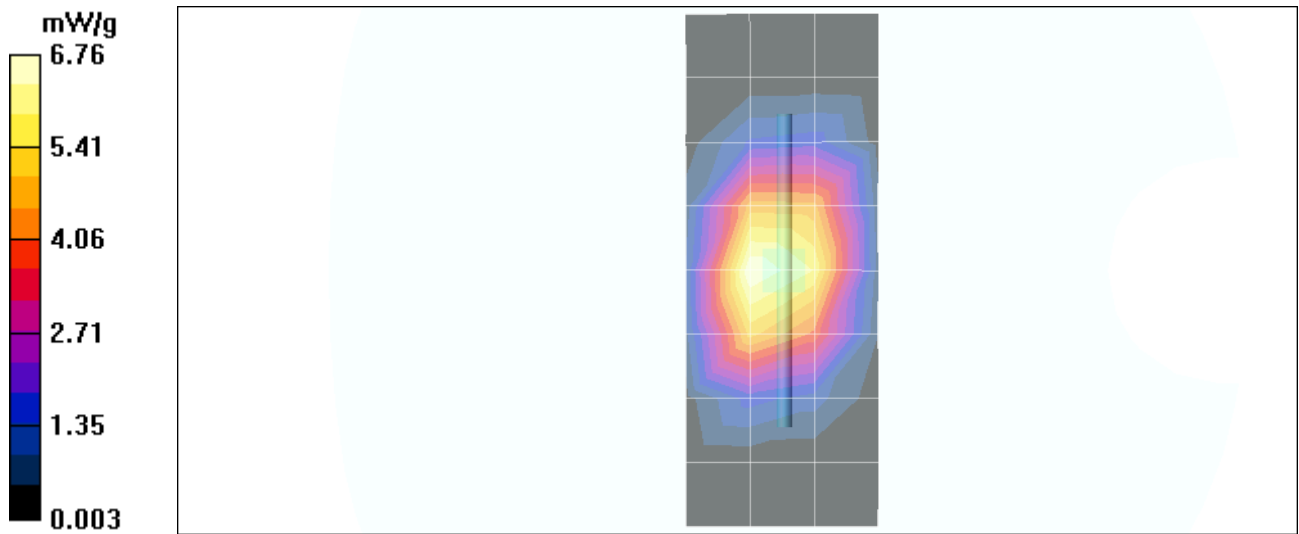

Date/Time: 8/21/2008 10:16:29 AM

**DUT: Dipole 1800 MHz; Type: D1800V2;** Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272TR; PM1 Power =200mW;  
 Sim.Temp@ meas = 20.1\*C; Sim.Temp@ SPC =20.2\*C; Room Temp@ SPC = 20.6\*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.93, 4.93, 4.93); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 6.57 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 80.3 V/m; Power Drift = 0.034 dB  
 Peak SAR (extrapolated) = 13.8 W/kg  
**SAR(1 g) = 7.72 mW/g; SAR(10 g) = 4.1 mW/g**  
 Maximum value of SAR (measured) = 8.63 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 80.3 V/m; Power Drift = 0.034 dB  
 Peak SAR (extrapolated) = 13.6 W/kg  
**SAR(1 g) = 7.6 mW/g; SAR(10 g) = 4.03 mW/g**  
 Maximum value of SAR (measured) = 8.41 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 8.66 mW/g

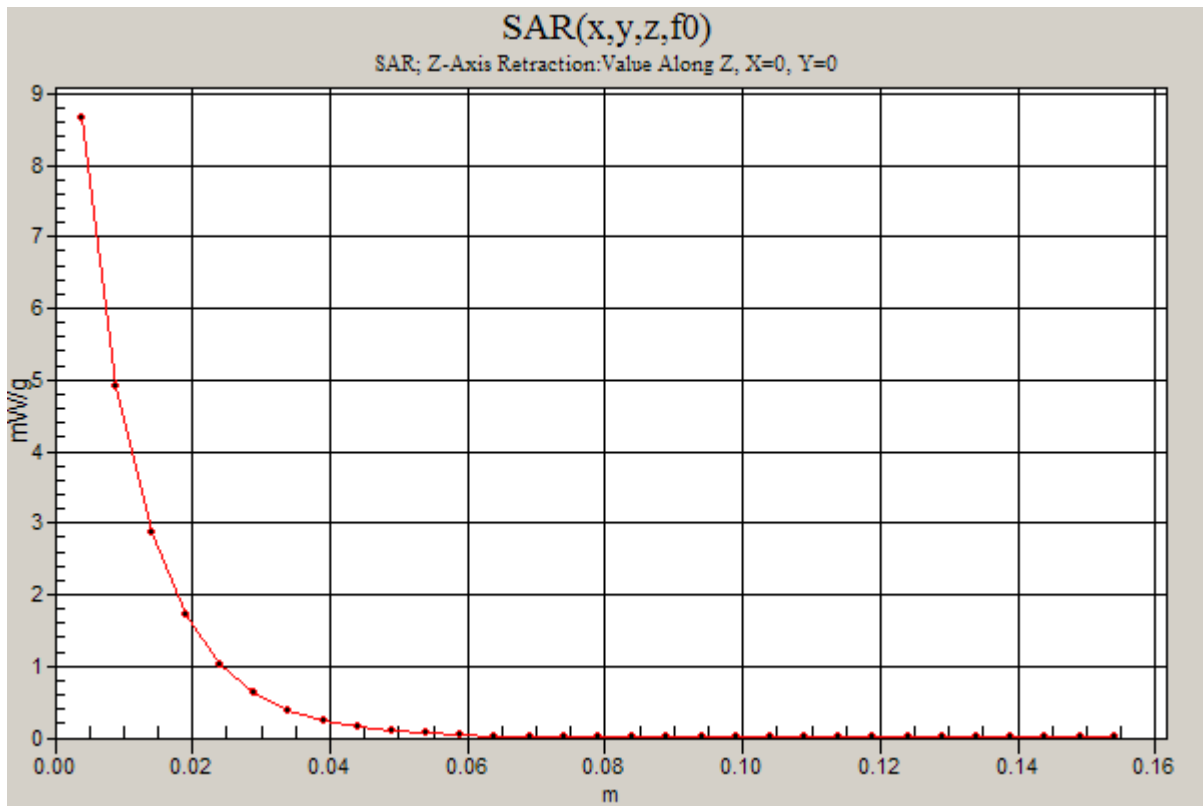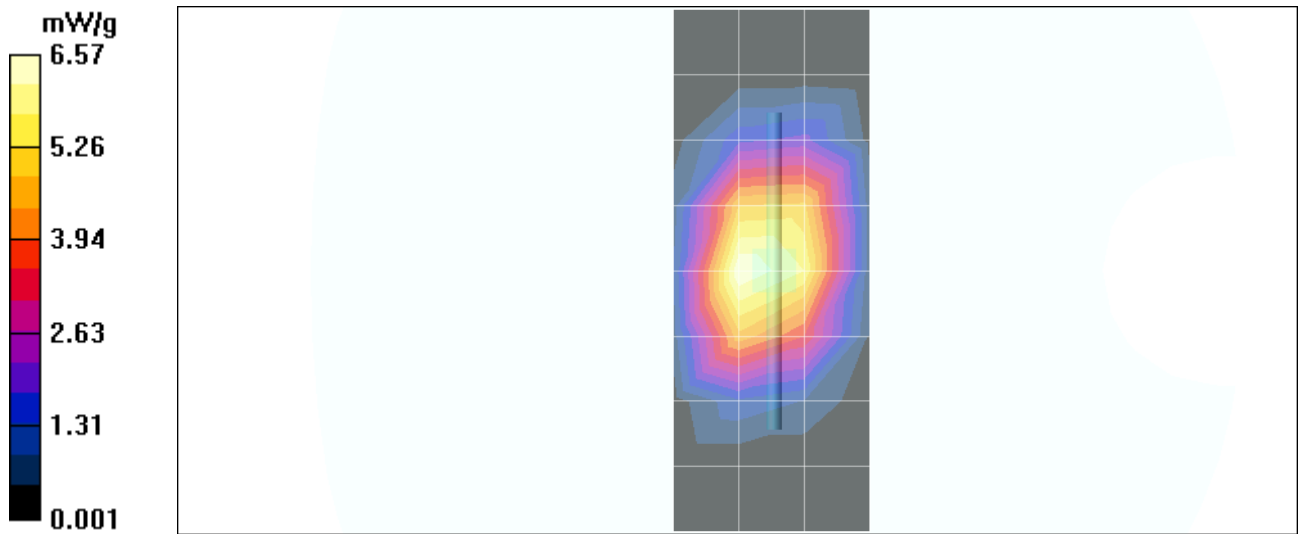

Date/Time: 8/18/2008 6:33:17 AM

**DUT: Dipole 1800 MHz; Type: D1800V2;** Procedure Notes: 1800 MHz System Performance Check /  
 Dipole Sn# 281tr; PM1 Power = 200 mW  
 Sim.Temp@ meas = 19.6°C; Sim.Temp@ SPC = 19.7°C; Room Temp@ SPC = 20.5°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.98, 4.98, 4.98); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R2 Section 1, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (9x4x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 8.39 mW/g

**Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 75.7 V/m; Power Drift = -0.027 dB  
 Peak SAR (extrapolated) = 14.5 W/kg  
**SAR(1 g) = 8.06 mW/g; SAR(10 g) = 4.25 mW/g**  
 Maximum value of SAR (measured) = 8.95 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 75.7 V/m; Power Drift = -0.027 dB  
 Peak SAR (extrapolated) = 14.2 W/kg  
**SAR(1 g) = 7.93 mW/g; SAR(10 g) = 4.19 mW/g**  
 Maximum value of SAR (measured) = 8.77 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 9.03 mW/g

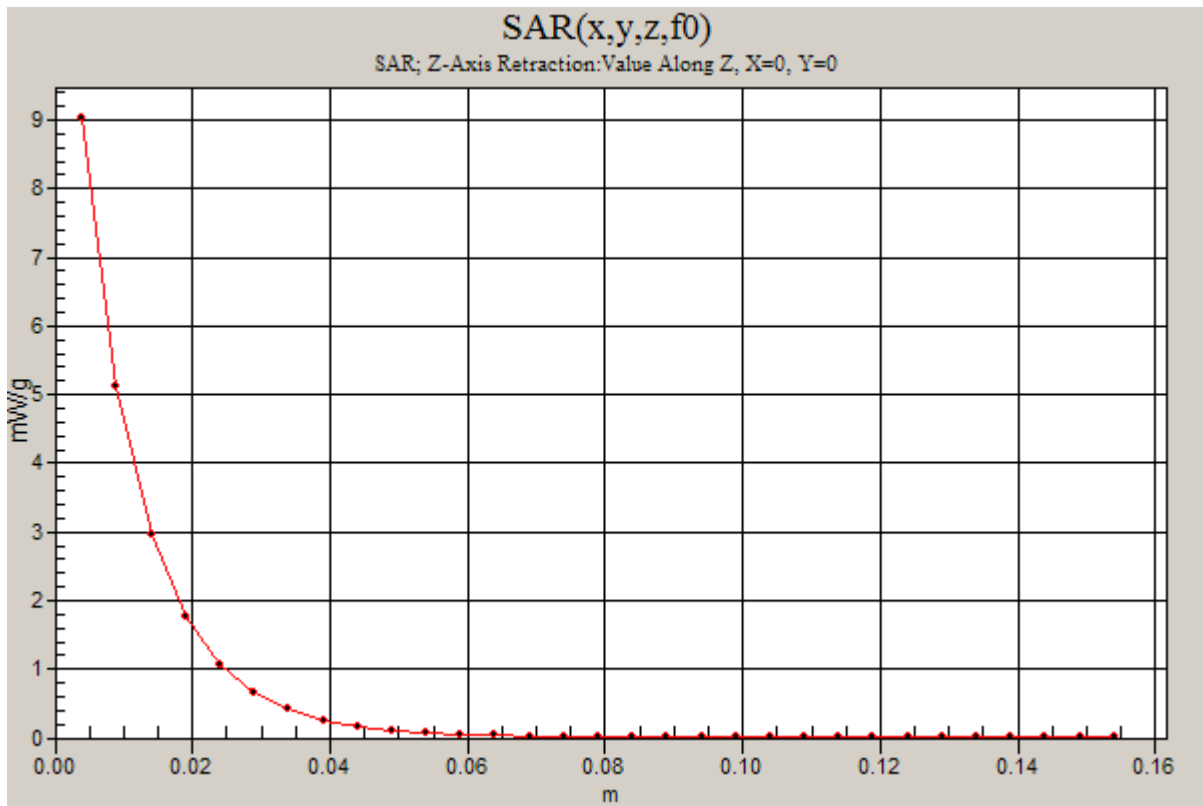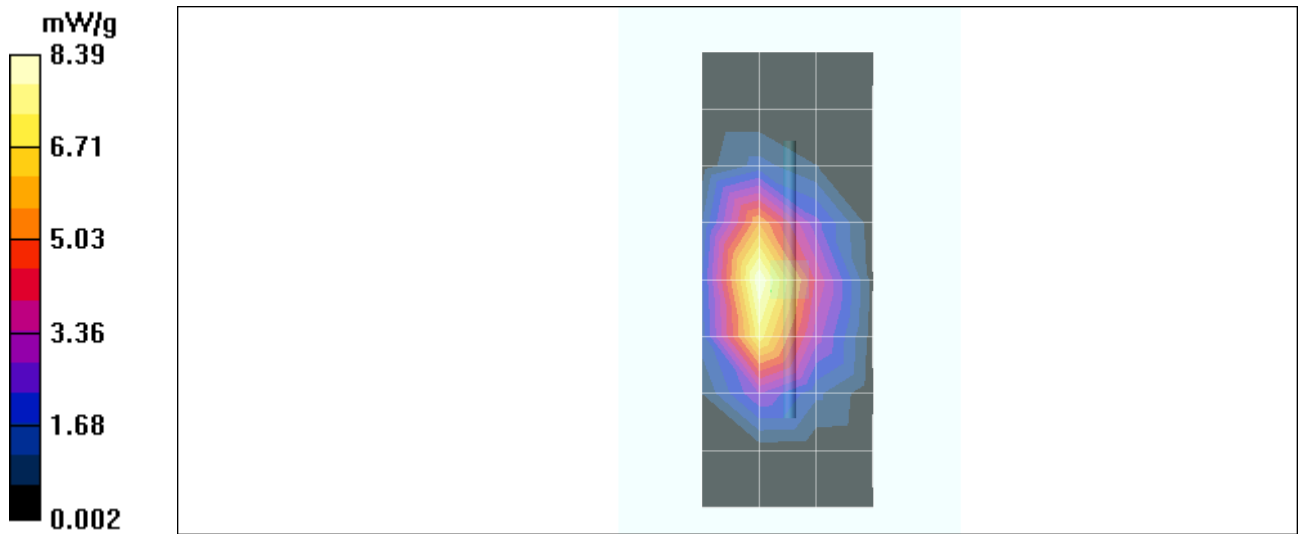

Date/Time: 8/16/2008 5:52:27 PM

**DUT: Dipole 1800 MHz; Type: D1800V2;** Procedure Notes: 1800 MHz System Performance Check /  
 Dipole Sn# 281tr; PM1 Power = 200 mW;  
 Sim.Temp@ meas = 19.8°C; Sim.Temp@ SPC = 19.8°C; Room Temp@ SPC = 20.7°C;

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.98, 4.98, 4.98); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 6.46 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 81.1 V/m; Power Drift = 0.045 dB  
 Peak SAR (extrapolated) = 14.1 W/kg  
**SAR(1 g) = 7.89 mW/g; SAR(10 g) = 4.18 mW/g**  
 Maximum value of SAR (measured) = 8.88 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 81.1 V/m; Power Drift = 0.045 dB  
 Peak SAR (extrapolated) = 14.0 W/kg  
**SAR(1 g) = 7.84 mW/g; SAR(10 g) = 4.16 mW/g**  
 Maximum value of SAR (measured) = 8.82 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 8.93 mW/g

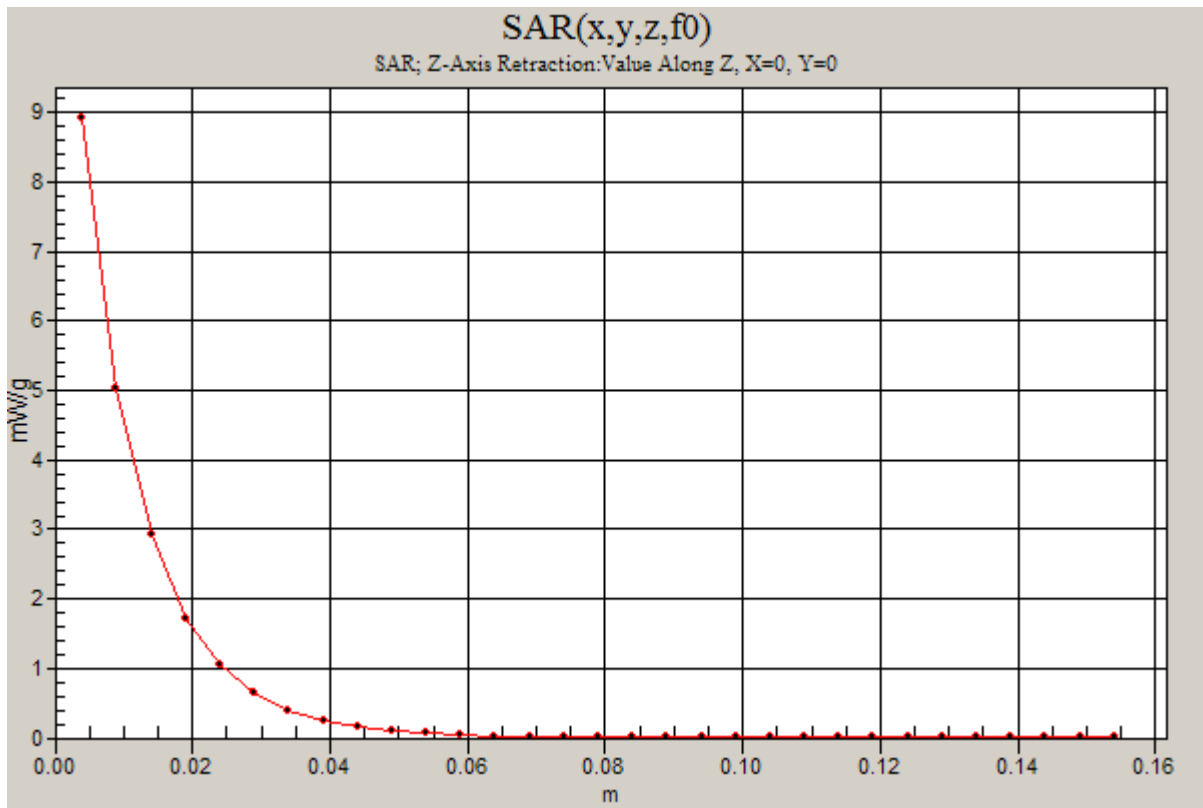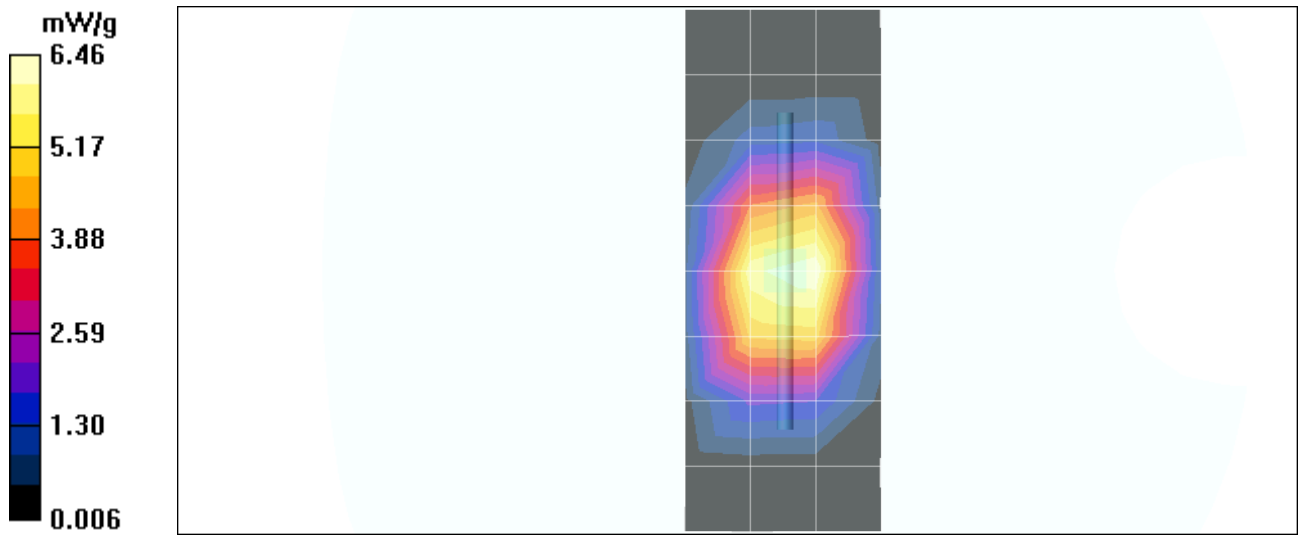

Date/Time: 8/26/2008 9:19:51 AM

**DUT: Dipole 900 MHz; Type: D900V2;** Procedure Notes: 900 MHz System Performance Check /  
 Dipole Sn# 78; PM1 Power = 200 mW  
 Sim.Temp@ meas = 20.8°C; Sim.Temp@ SPC = 20.8°C; Room Temp@ SPC = 20.5°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.03, 6.03, 6.03); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 2.13 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 49.1 V/m; Power Drift = -0.006 dB  
 Peak SAR (extrapolated) = 3.17 W/kg  
**SAR(1 g) = 2.14 mW/g; SAR(10 g) = 1.38 mW/g**  
 Maximum value of SAR (measured) = 2.32 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 49.1 V/m; Power Drift = -0.006 dB  
 Peak SAR (extrapolated) = 3.11 W/kg  
**SAR(1 g) = 2.11 mW/g; SAR(10 g) = 1.36 mW/g**  
 Maximum value of SAR (measured) = 2.28 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm

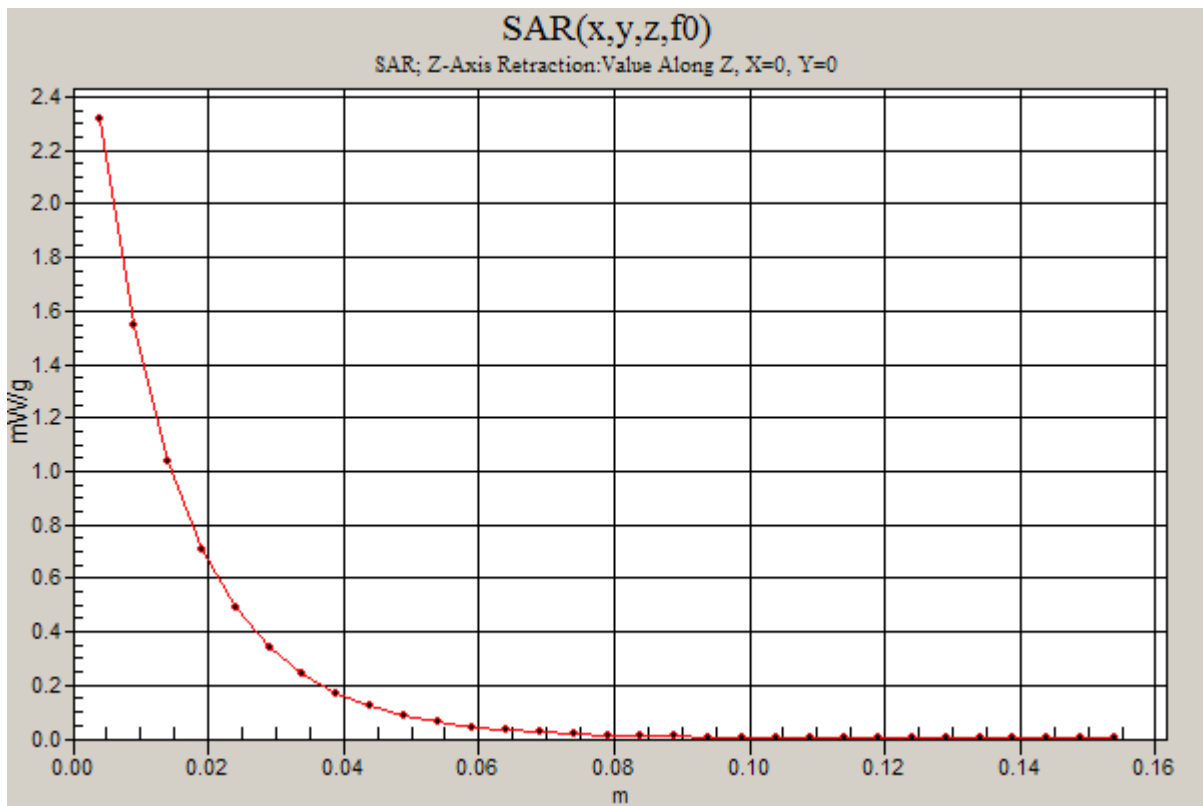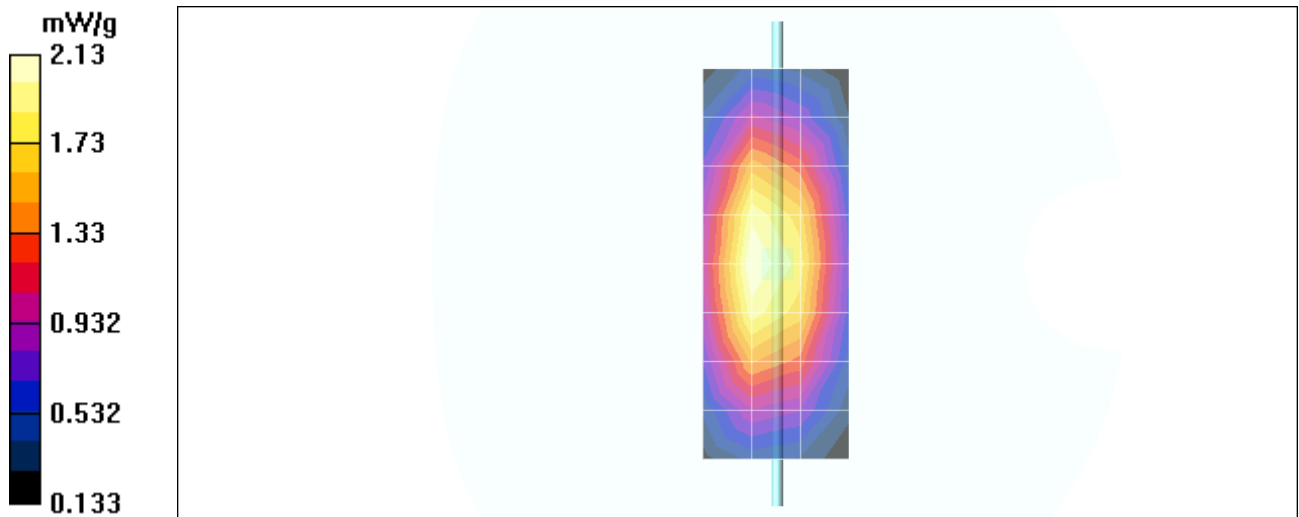

Date/Time: 8/22/2008 9:15:26 AM

**DUT: Dipole 900 MHz; Type: D900V2;** Procedure Notes: 900 MHz System Performance Check /  
 Dipole Sn# 091; PM1 Power =200mW;  
 Sim.Temp@ meas = 20.8\*C; Sim.Temp@ SPC =20.8\*C; Room Temp@ SPC = 20.4\*C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 41.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(5.63, 5.63, 5.63); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1131;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 2.22 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 50.9 V/m; Power Drift = 0.072 dB  
 Peak SAR (extrapolated) = 3.52 W/kg  
**SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.48 mW/g**  
 Maximum value of SAR (measured) = 2.51 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 50.9 V/m; Power Drift = 0.072 dB  
 Peak SAR (extrapolated) = 3.45 W/kg  
**SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.46 mW/g**  
 Maximum value of SAR (measured) = 2.44 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 2.52 mW/g

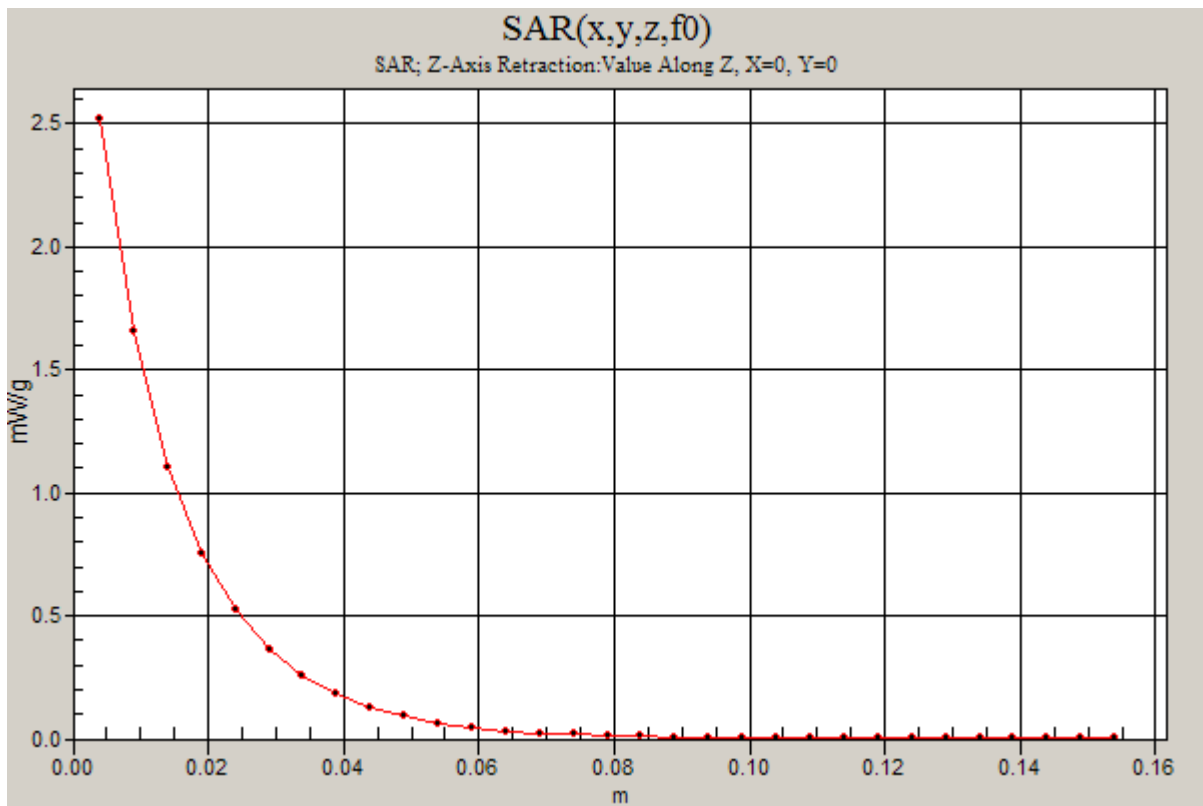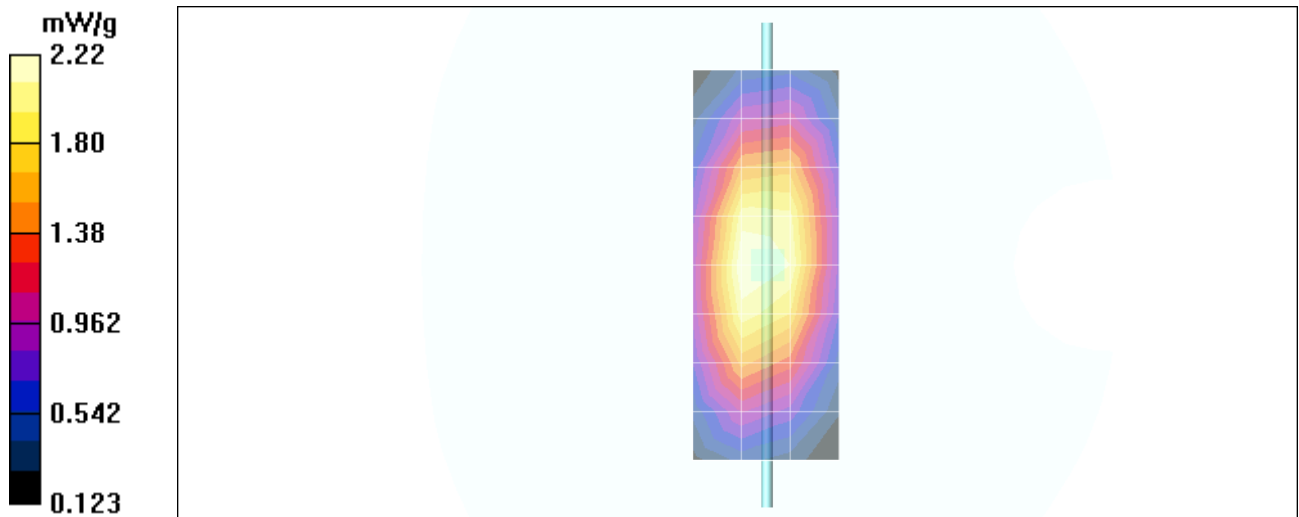

Date/Time: 8/17/2008 5:22:37 PM

**DUT: Dipole 900 MHz; Type: D900V2;** Procedure Notes: 900 MHz System Performance Check /  
 Dipole Sn# 78; PM1 Power = 200 mW;  
 Sim.Temp@ meas = 20.0°C; Sim.Temp@ SPC = 20.0°C; Room Temp@ SPC = 20.4°C;

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.03, 6.03, 6.03); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 2.02 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 48.7 V/m; Power Drift = 0.002 dB  
 Peak SAR (extrapolated) = 3.12 W/kg  
**SAR(1 g) = 2.09 mW/g; SAR(10 g) = 1.34 mW/g**  
 Maximum value of SAR (measured) = 2.26 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 48.7 V/m; Power Drift = 0.002 dB  
 Peak SAR (extrapolated) = 3.12 W/kg  
**SAR(1 g) = 2.08 mW/g; SAR(10 g) = 1.33 mW/g**  
 Maximum value of SAR (measured) = 2.24 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 2.28 mW/g

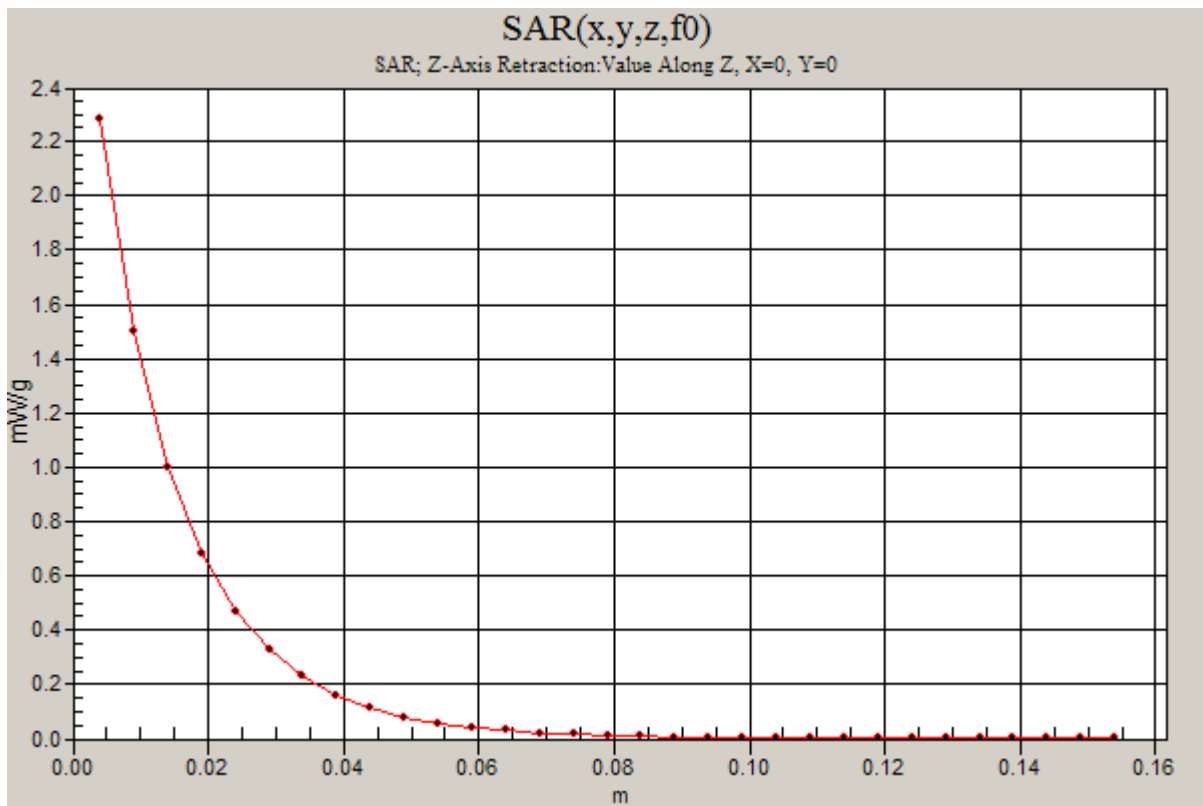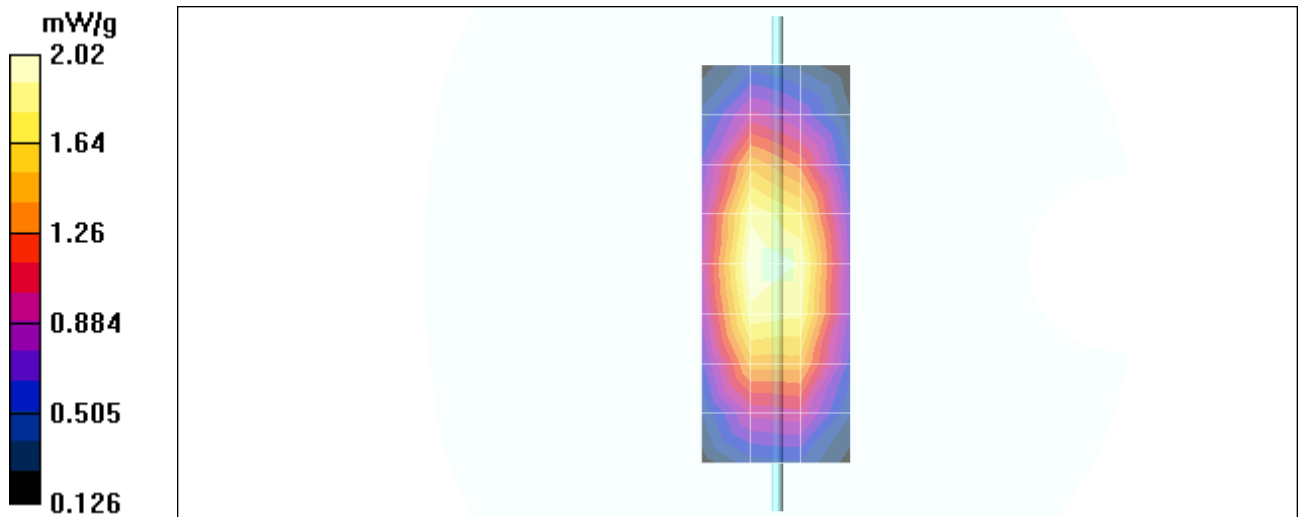

Date/Time: 8/20/2008 10:26:07 AM

**DUT: Dipole 2450 MHz; Type: D2450V2;** Procedure Notes: 2450 MHz System Performance Check / Dipole Sn# 740; PM1 Power =200mW;  
 Sim.Temp@ meas = 20.0\*C; Sim.Temp@ SPC =20.1\*C; Room Temp@ SPC = 20.5\*C;

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: VALIDATION Only; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 35.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.41, 4.41, 4.41); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Daily SPC Check/Dipole Area Scan (4x9x1):**

Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 10.2 mW/g

**Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:**



Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 82.5 V/m; Power Drift = 0.009 dB  
 Peak SAR (extrapolated) = 24.4 W/kg  
**SAR(1 g) = 11.4 mW/g; SAR(10 g) = 5.22 mW/g**  
 Maximum value of SAR (measured) = 12.8 mW/g

**Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 82.5 V/m; Power Drift = 0.009 dB  
 Peak SAR (extrapolated) = 23.9 W/kg  
**SAR(1 g) = 11.3 mW/g; SAR(10 g) = 5.23 mW/g**  
 Maximum value of SAR (measured) = 12.7 mW/g

**Daily SPC Check/Z-Axis Retraction (1x1x31):**

Measurement grid: dx=20mm, dy=20mm, dz=5mm  
 Maximum value of SAR (measured) = 12.9 mW/g

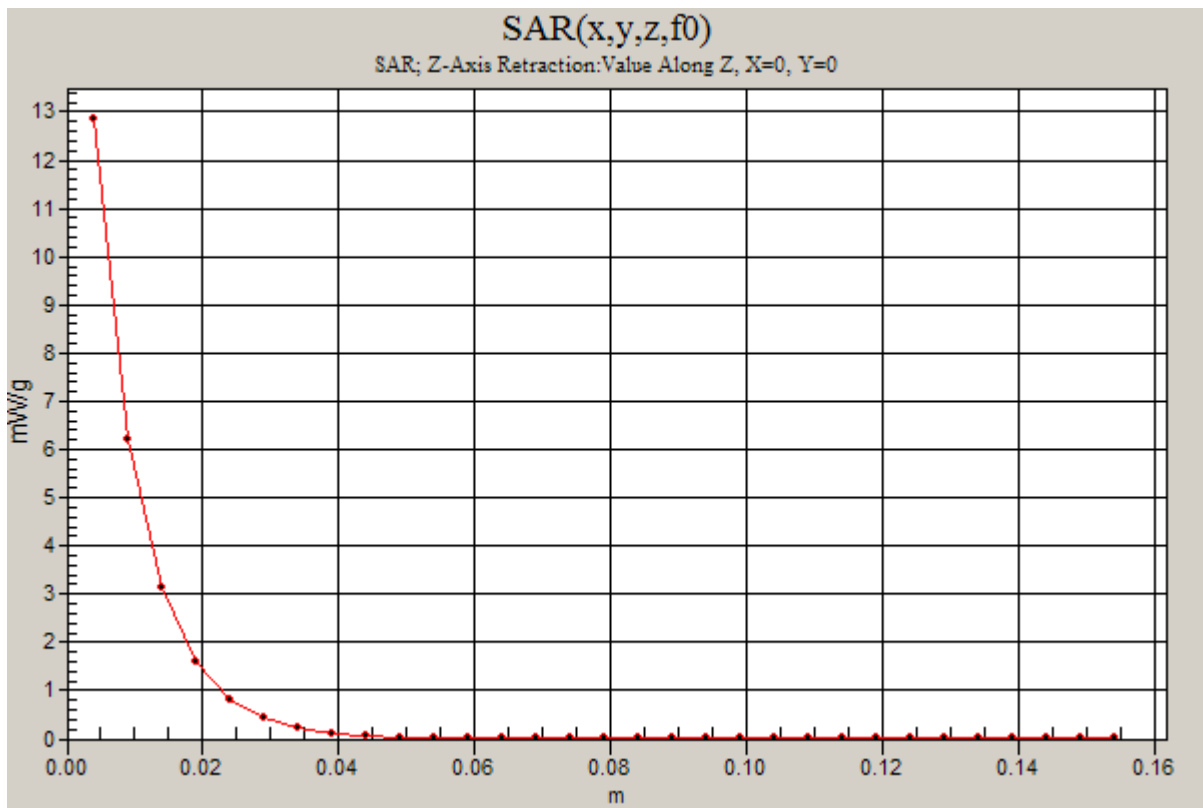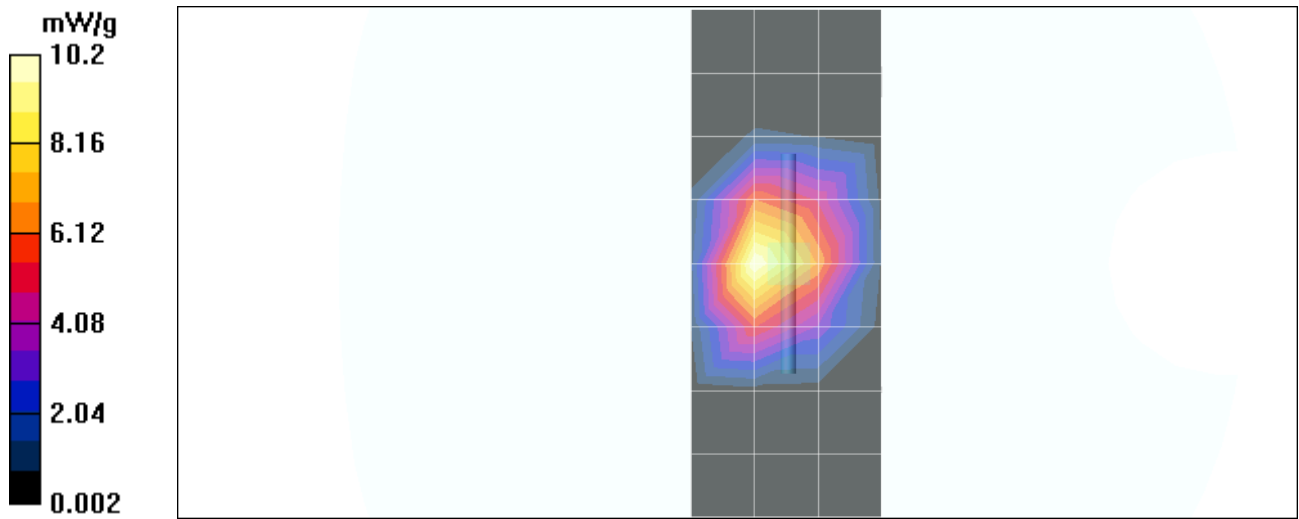

**Appendix 2**

**SAR distribution plots for Phantom Head Adjacent Use**


Date/Time: 8/20/2008 12:38:24 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL;  
 Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: CHEEK;  
 Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel  
 Number: 6; Duty Cycle: 1:1; Medium: 2450 Glycol Head; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 35.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.41, 4.41, 4.41); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.093 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 7.32 V/m; Power Drift = -0.138 dB; Peak SAR (extrapolated) = 0.168 W/kg; **SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.050 mW/g;** Maximum value of SAR (measured) = 0.106 mW/g

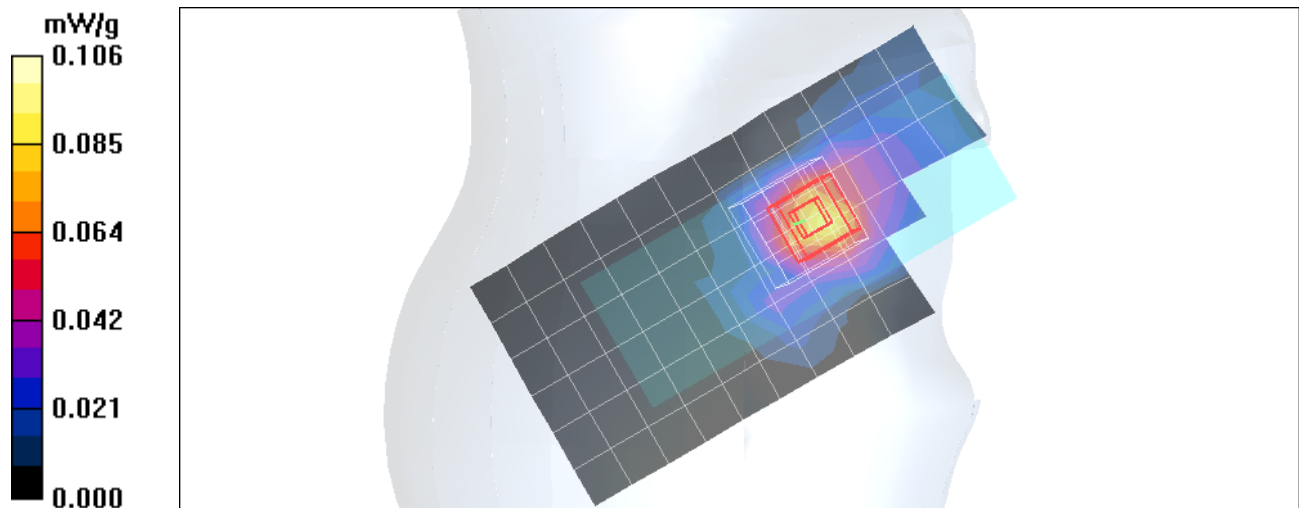


Date/Time: 8/20/2008 1:30:07 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL;  
 Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: TILT; Communication  
 System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel Number: 6; Duty  
 Cycle: 1:1; Medium: 2450 Glycol Head; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r =$   
 $35.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.41, 4.41, 4.41); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.047 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 4.91 V/m; Power Drift = -0.166 dB; Peak SAR (extrapolated) = 0.092 W/kg; **SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.022 mW/g**

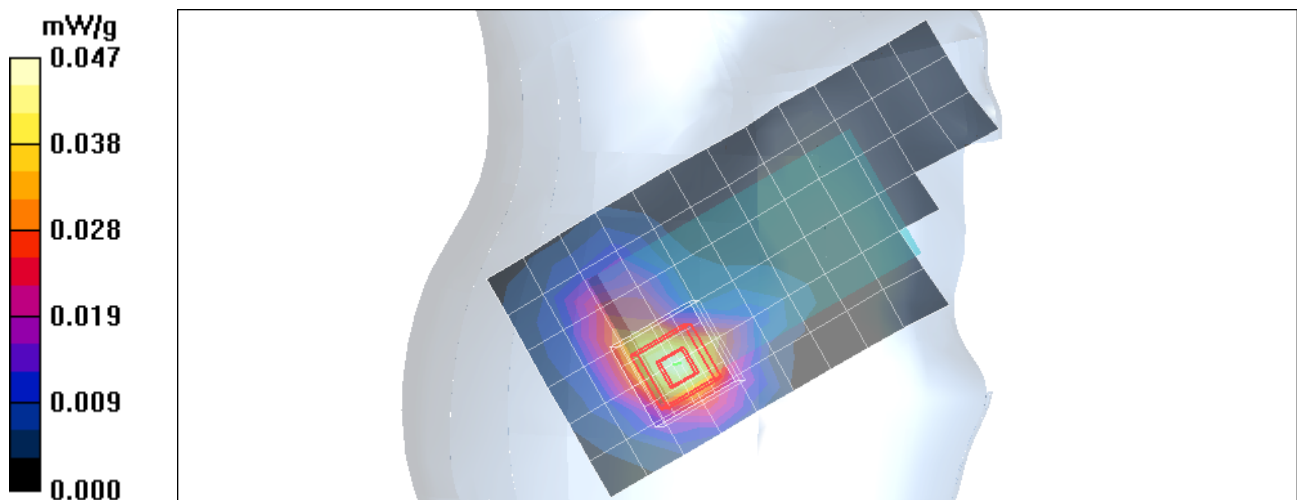


Date/Time: 8/20/2008 1:13:06 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL;  
Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: CHEEK;  
Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel  
Number: 6; Duty Cycle: 1:1; Medium: 2450 Glycol Head; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 35.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> ; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.41, 4.41, 4.41); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.050 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 4.88 V/m; Power Drift = 0.137 dB; Peak SAR (extrapolated) = 0.099 W/kg; **SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.025 mW/g;** Maximum value of SAR (measured) = 0.054 mW/g

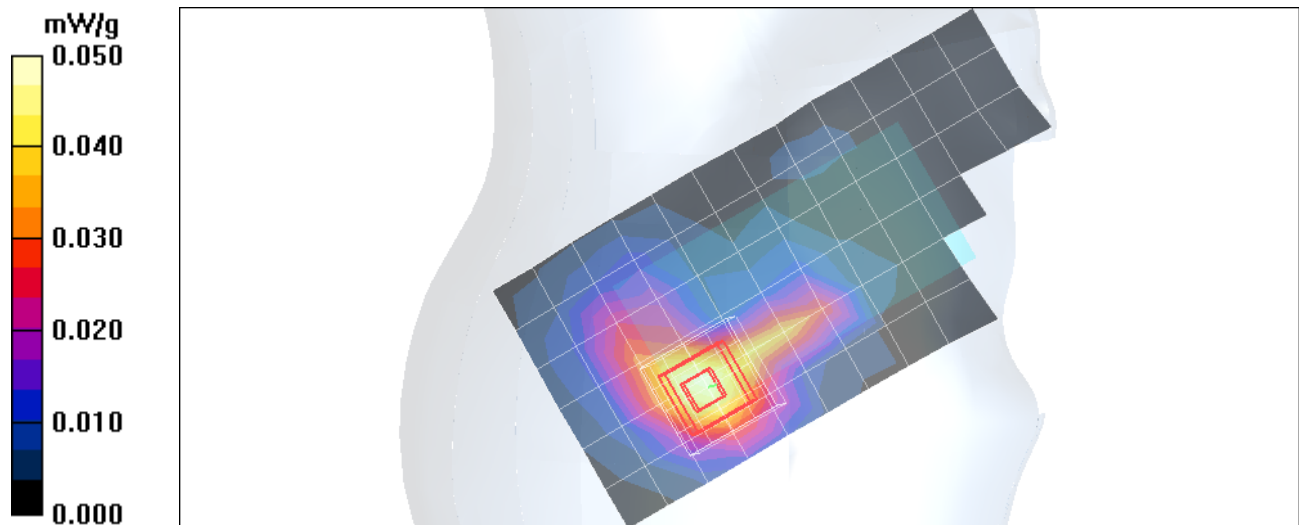


Date/Time: 8/18/2008 2:06:48 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: Tilt; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Regular Glycol Head 1750/1880; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.98, 4.98, 4.98); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Left Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.171 mW/g

**Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 10.2 V/m; Power Drift = -0.074 dB; Peak SAR (extrapolated) = 0.242 W/kg; **SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.093 mW/g;** Maximum value of SAR (measured) = 0.169 mW/g

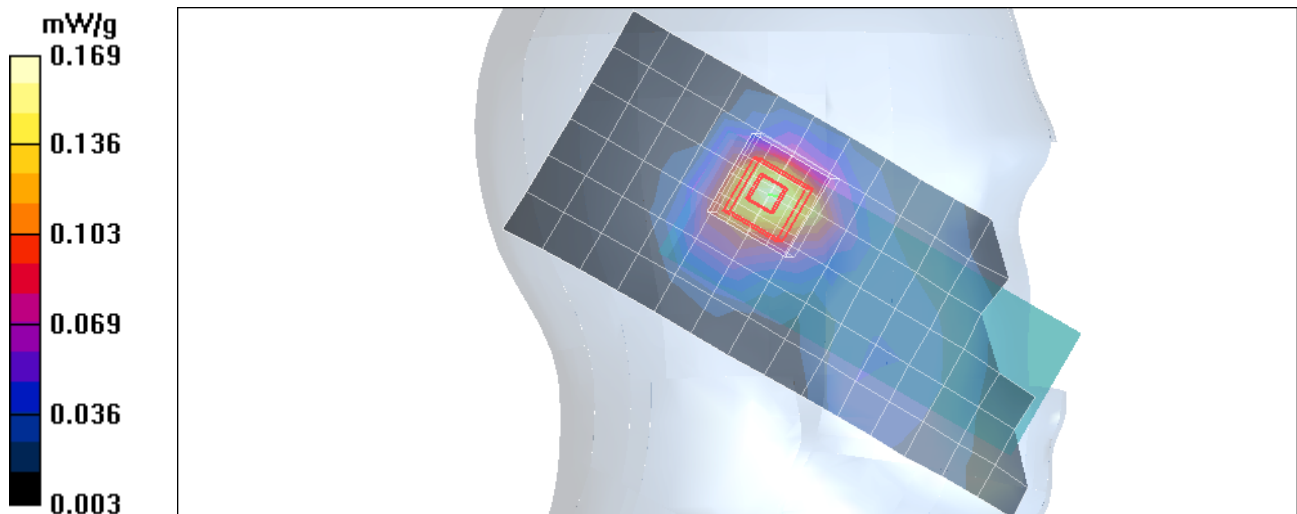


Date/Time: 8/18/2008 5:41:39 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 0; Antenna Position: internal; Accessory Model #: n/a; Battery Model #: SNN5811A; DEVICE POSITION: cheek; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Regular Glycol Head 1750/1880; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.98, 4.98, 4.98); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.222 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 12.1 V/m; Power Drift = 0.019 dB; Peak SAR (extrapolated) = 0.319 W/kg; **SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.118 mW/g**

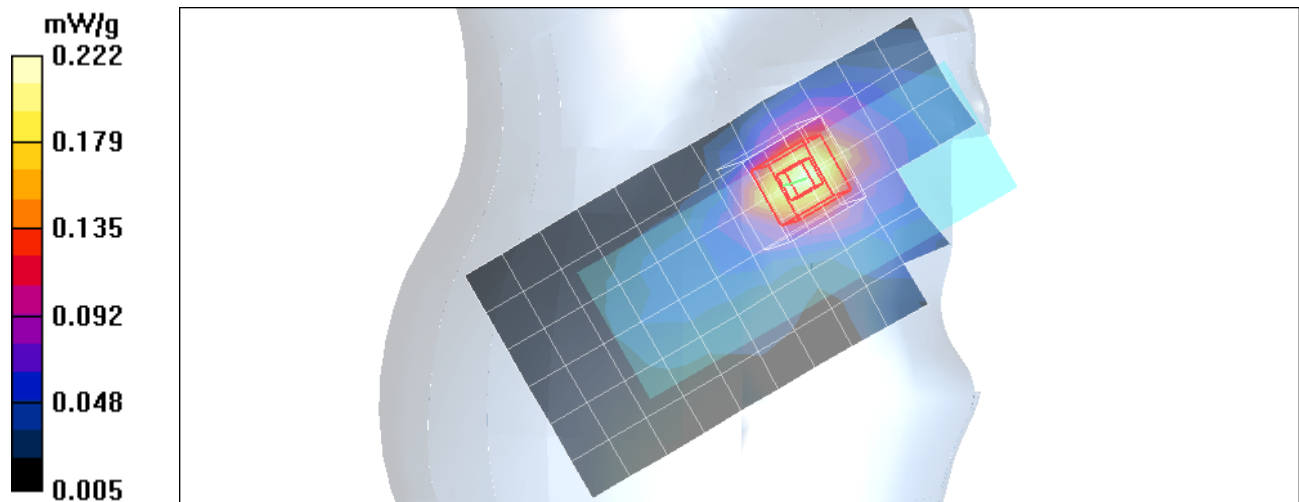


Date/Time: 8/21/2008 1:08:42 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 0; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: TILT; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Regular Glycol Head 1750/1880; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.93, 4.93, 4.93); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.247 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 10.5 V/m; Power Drift = -0.085 dB; Peak SAR (extrapolated) = 0.365 W/kg; **SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.125 mW/g;** Maximum value of SAR (measured) = 0.238 mW/g

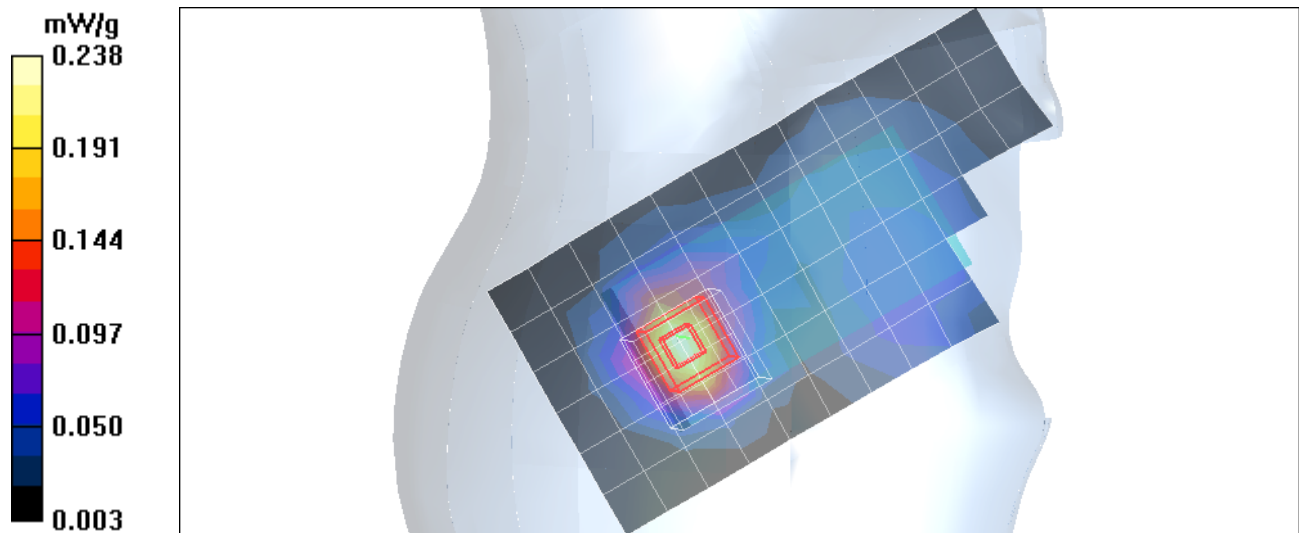


Date/Time: 8/21/2008 11:56:50 AM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 0; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: CHEEK; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Regular Glycol Head 1750/1880; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.93, 4.93, 4.93); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Left Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.456 mW/g

**Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 16.1 V/m; Power Drift = -0.068 dB; Peak SAR (extrapolated) = 0.615 W/kg; **SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.255 mW/g;** Maximum value of SAR (measured) = 0.451 mW/g

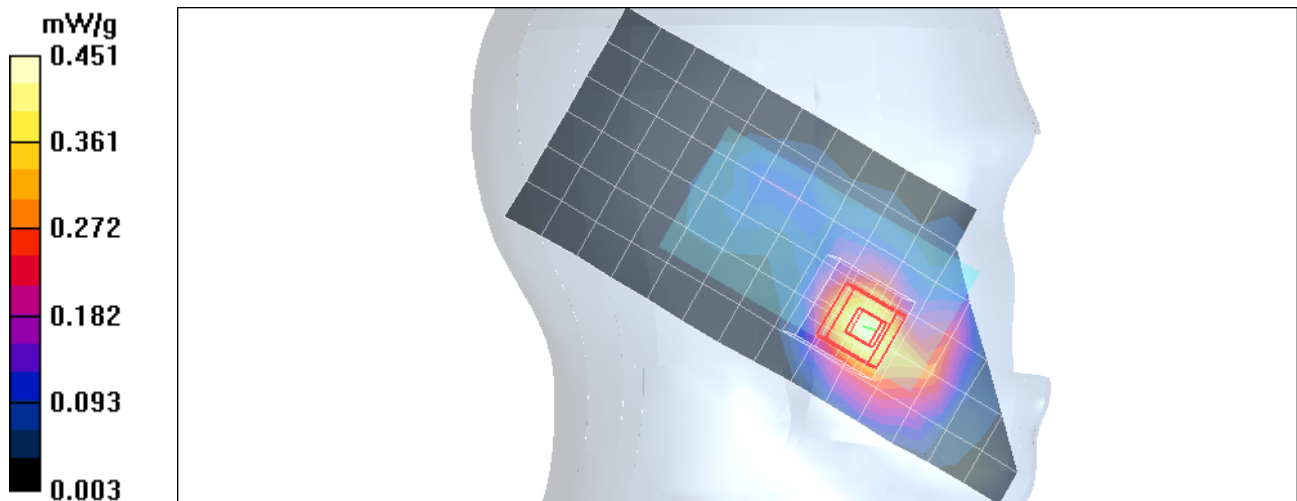


Date/Time: 8/17/2008 6:29:38 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 5; Antenna Position: internal; Accessory Model #: n/a; Battery Model #: SNN5811A; DEVICE POSITION: Tilt; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Head; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.03, 6.03, 6.03); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Left Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.349 mW/g

**Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 18.9 V/m; Power Drift = 0.028 dB; Peak SAR (extrapolated) = 0.436 W/kg; **SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.251 mW/g;** Maximum value of SAR (measured) = 0.363 mW/g

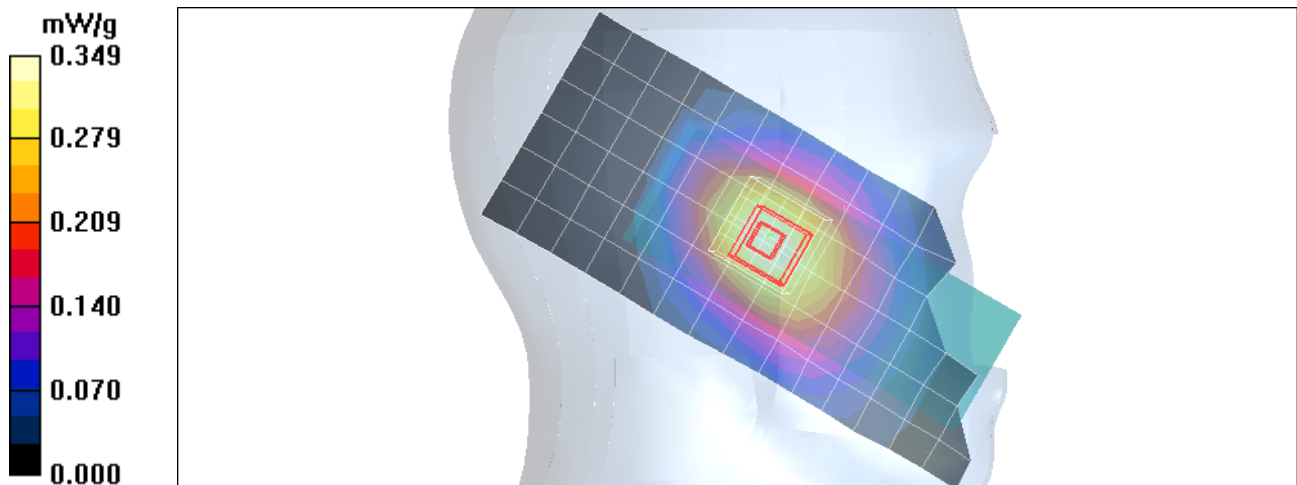


Date/Time: 8/17/2008 8:44:21 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 5; Antenna Position: internal; Accessory Model #: n/a; Battery Model #: SNN5811A; DEVICE POSITION: cheek; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Head; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.03, 6.03, 6.03); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.610 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 24.6 V/m; Power Drift = 0.011 dB; Peak SAR (extrapolated) = 0.728 W/kg; **SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.401 mW/g;** Maximum value of SAR (measured) = 0.612 mW/g

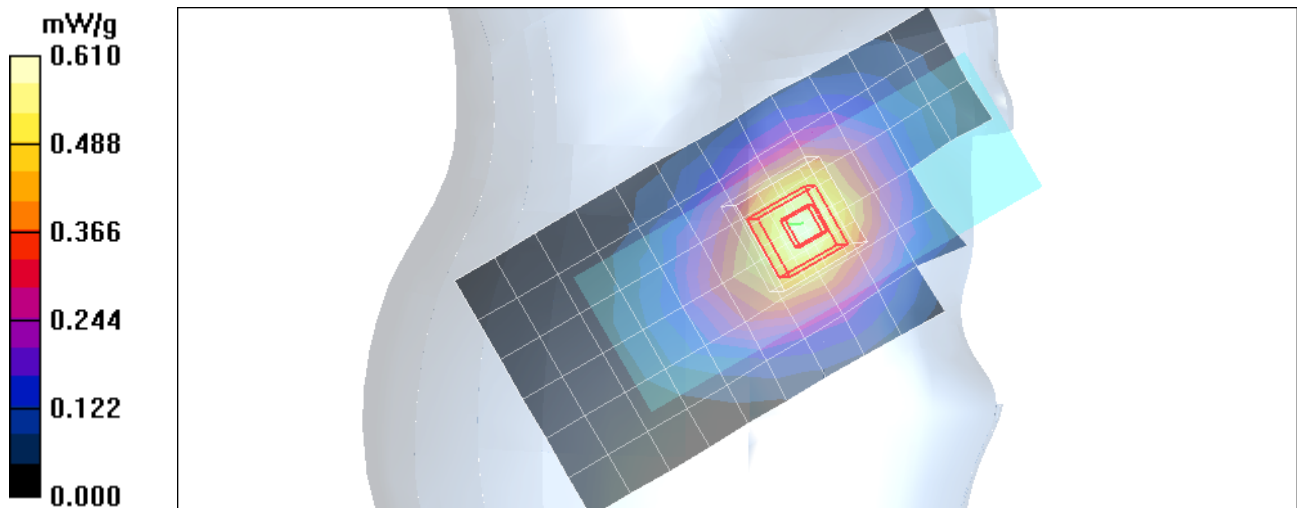


Date/Time: 8/17/2008 7:55:33 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 5; Antenna Position: internal; Accessory Model #: n/a; Battery Model #: SNN5811A; DEVICE POSITION: tilt; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Head; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.03, 6.03, 6.03); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Left Head Template/Area Scan - Normal (10mm) (10x25x1):** Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 0.353 mW/g

**Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 18.8 V/m; Power Drift = -0.042 dB; Peak SAR (extrapolated) = 0.430 W/kg; **SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.248 mW/g;** Maximum value of SAR (measured) = 0.361 mW/g

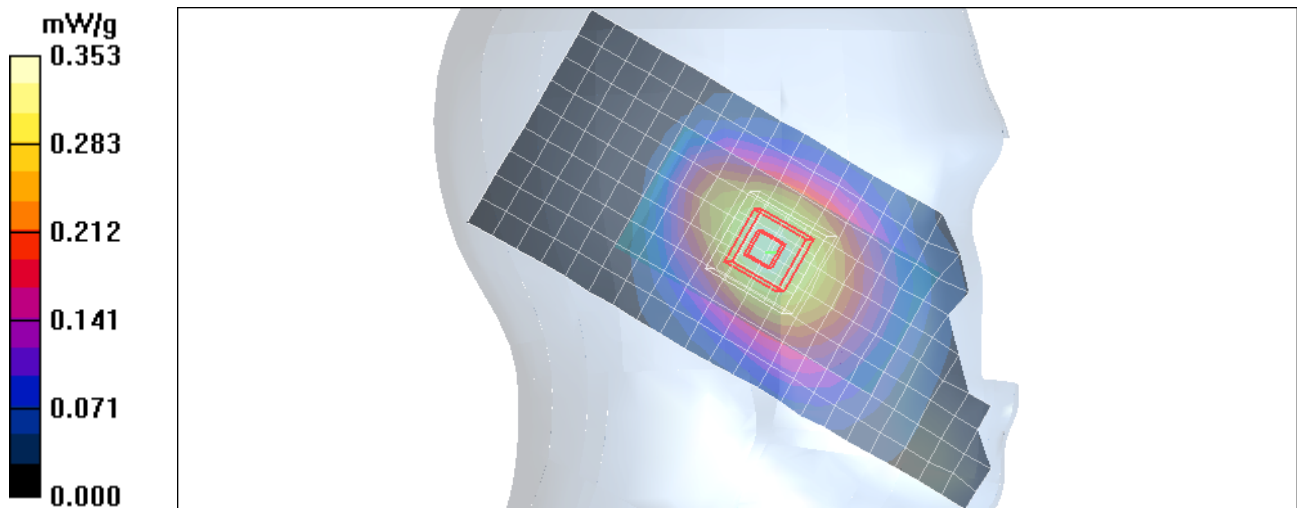


Date/Time: 8/17/2008 9:44:50 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 5; Antenna Position: internal; Accessory Model #: n/a; Battery Model #: SNN5811A; DEVICE POSITION: cheek; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Head; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.03, 6.03, 6.03); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R#\_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.461 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 21.9 V/m; Power Drift = -0.046 dB; Peak SAR (extrapolated) = 0.566 W/kg; **SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.322 mW/g;** Maximum value of SAR (measured) = 0.458 mW/g

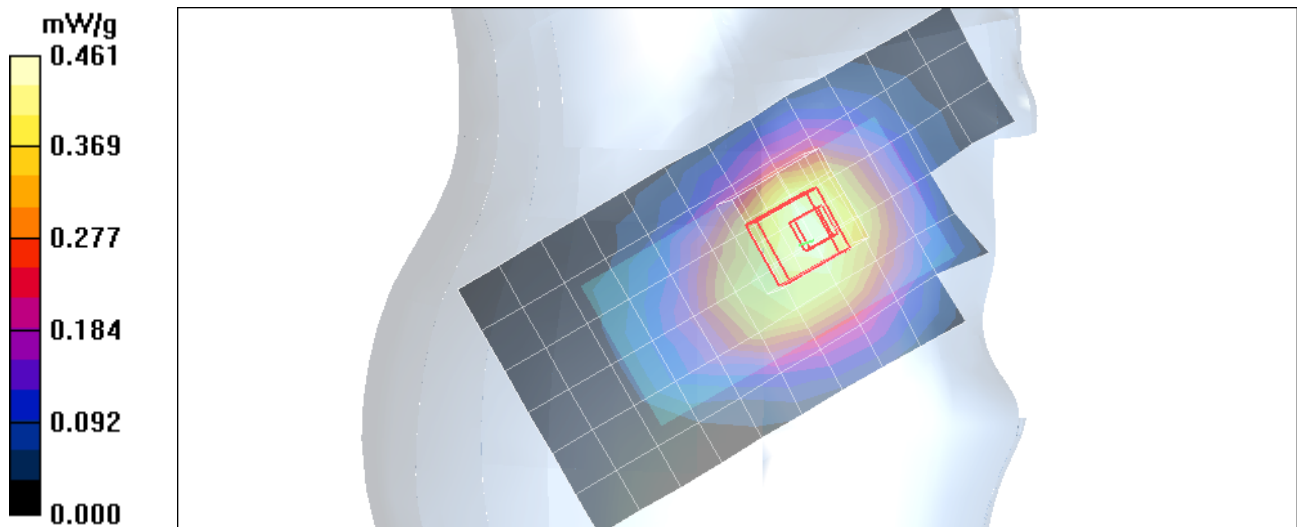


Date/Time: 8/20/2008 12:55:42 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL;  
 Accessory Model #: none; Battery Model #: SNN5811A; DEVICE POSITION: TILT; Communication  
 System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel Number: 6; Duty  
 Cycle: 1:1; Medium: 2450 Glycol Head; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r =$   
 $35.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.41, 4.41, 4.41); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R#4 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1250;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Right Head Template/Area Scan - Normal (15mm) (7x17x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.042 mW/g

**Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 4.98 V/m; Power Drift = -0.083 dB; Peak SAR (extrapolated) = 0.076 W/kg; **SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.022 mW/g;** Maximum value of SAR (measured) = 0.044 mW/g

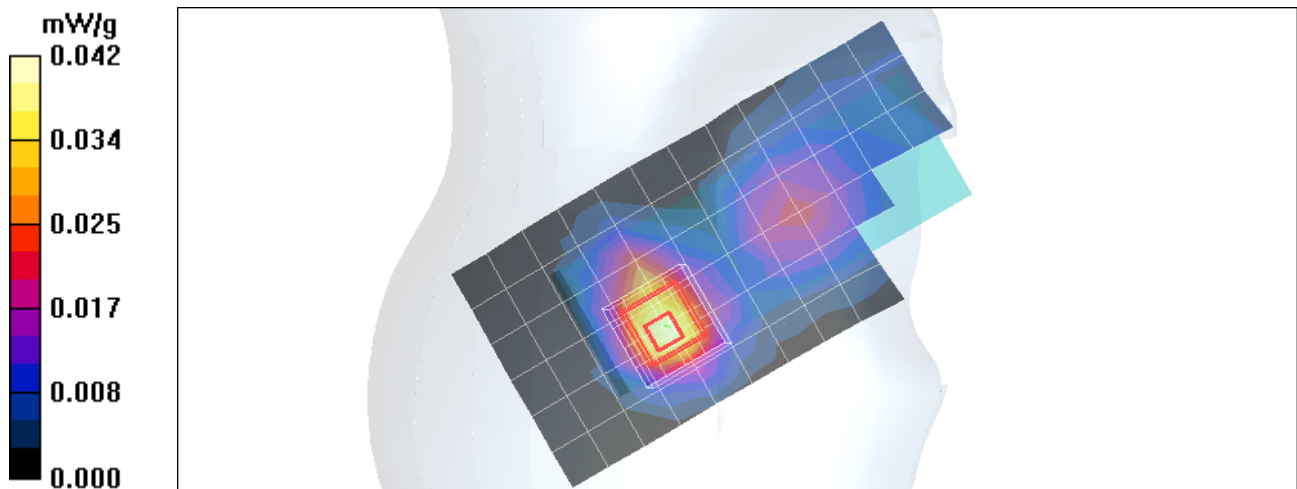

### **Appendix 3**

#### **SAR distribution plots for Body Worn Configuration**


Date/Time: 8/21/2008 2:08:40 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: 0; Antenna Position: INTERNAL; Battery Model #: SNN5811A; DEVICE POSITION: Back of Phone 25mm away from phantom; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Regular Glycol Body 1750/1880; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.59$  mho/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> ; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.75, 4.75, 4.75); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R4 : Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.681 mW/g

**Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 21.7 V/m; Power Drift = -0.089 dB; Peak SAR (extrapolated) = 1.05 W/kg; **SAR(1 g) = 0.647 mW/g; SAR(10 g) = 0.375 mW/g;** Maximum value of SAR (measured) = 0.705 mW/g

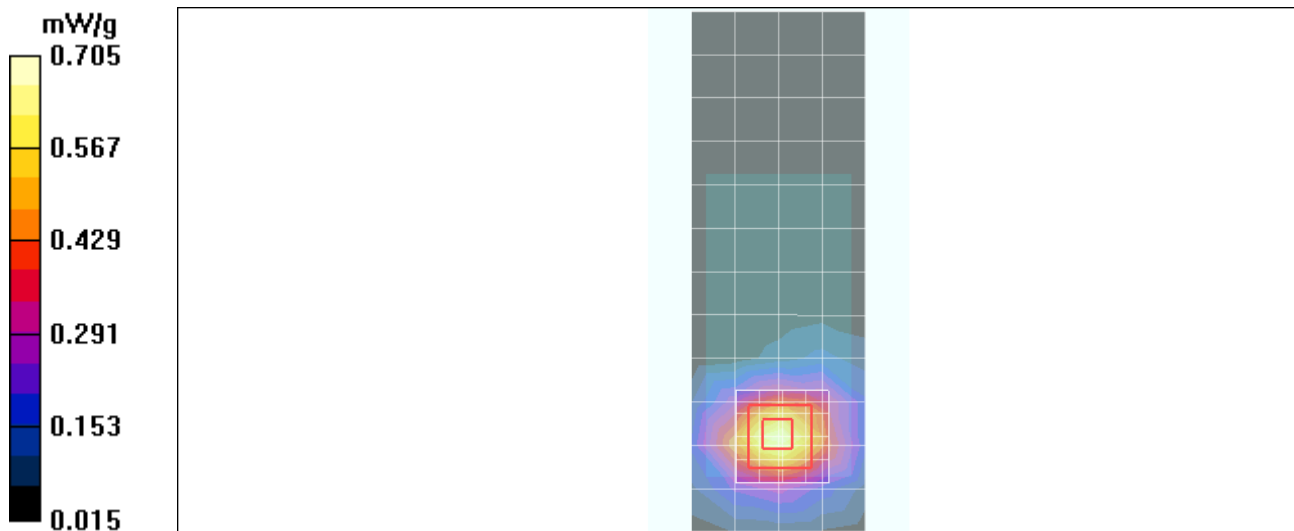


Date/Time: 8/26/2008 6:20:38 PM

**Serial: 4401028257612**; Procedure Notes: Pwr Step: 05; Antenna Position: INTERNAL; Battery Model #: SNN5811A; DEVICE POSITION: BACK OF PHONE 25MM FROM PHANTOM; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Body; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(5.64, 5.64, 5.64); Calibrated: 3/17/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 1/28/2008
- Phantom: R2 Section 2, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.247 mW/g

**Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 15.4 V/m; Power Drift = -0.110 dB; Peak SAR (extrapolated) = 0.298 W/kg; **SAR(1 g) = 0.230 mW/g**; **SAR(10 g) = 0.166 mW/g**; Maximum value of SAR (measured) = 0.244 mW/g

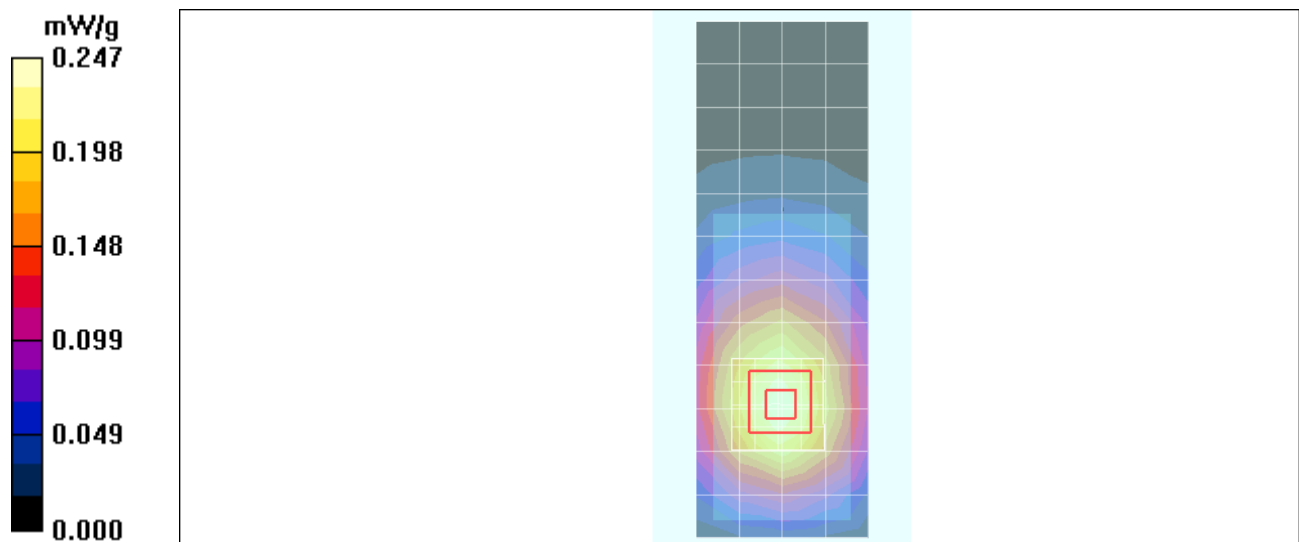


Date/Time: 8/21/2008 9:27:54 AM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL;  
 Battery Model #: SNN5811A; DEVICE POSITION: Back of Phone 25mm away from phantom;  
 Communication System: Bluetooth; Frequency: 2441 MHz; Communication System Channel Number:  
 39; Duty Cycle: 1:1; Medium: 2450 Glycol Body; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.97$   
 mho/m;  $\epsilon_r = 47.9$ ;  $\rho = 1000$  kg/m<sup>3</sup> ; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.1, 4.1, 4.1); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R4 : Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.003 mW/g

**Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 0.426 V/m; Power Drift = 2.75 dB; Peak SAR (extrapolated) = 0.019 W/kg; **SAR(1 g) = 0.00129 mW/g; SAR(10 g) = 0.000284 mW/g;** Maximum value of SAR (measured) = 0.016 mW/g

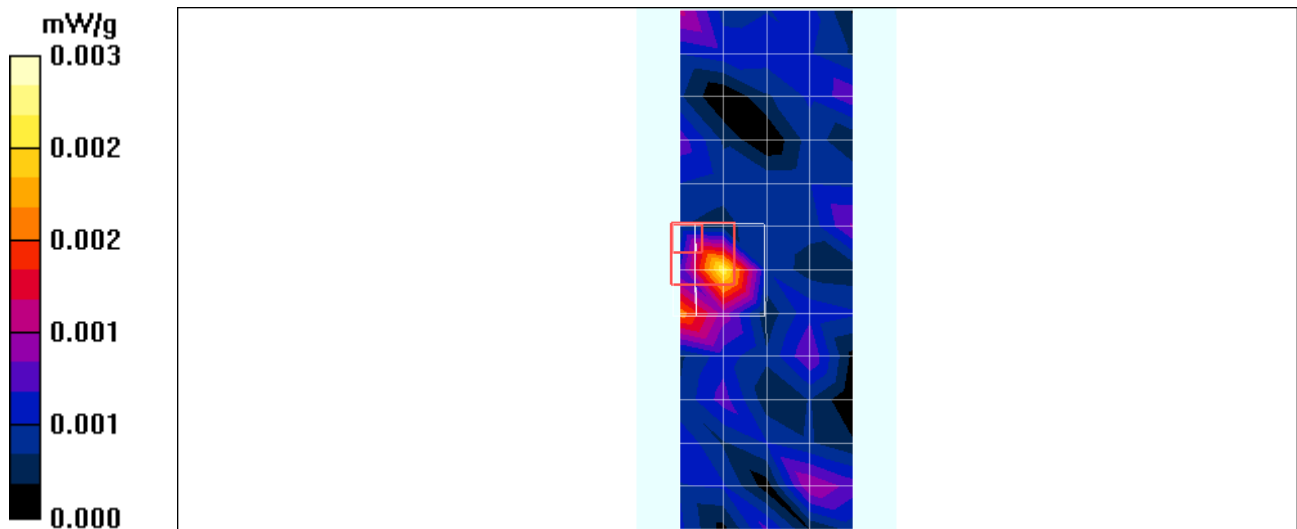


Date/Time: 8/20/2008 2:28:15 PM

**Serial: 4401028257612;** Procedure Notes: Pwr Step: continuous; Antenna Position: INTERNAL; Battery Model #: SNN5811A; DEVICE POSITION: Back of Phone 25mm away from phantom; Communication System: Wi-Fi 2450; Frequency: 2437 MHz; Communication System Channel Number: 6; Duty Cycle: 1:1; Medium: 2450 Glycol Body; Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.97$  mho/m;  $\epsilon_r = 47.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>; DASY4 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.1, 4.1, 4.1); Calibrated: 5/12/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn434; Calibrated: 1/28/2008
- Phantom: R4 : Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):** Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.026 mW/g

**Amy Twin Phone Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 3.46 V/m; Power Drift = -0.126 dB; Peak SAR (extrapolated) = 0.036 W/kg; **SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.012 mW/g**

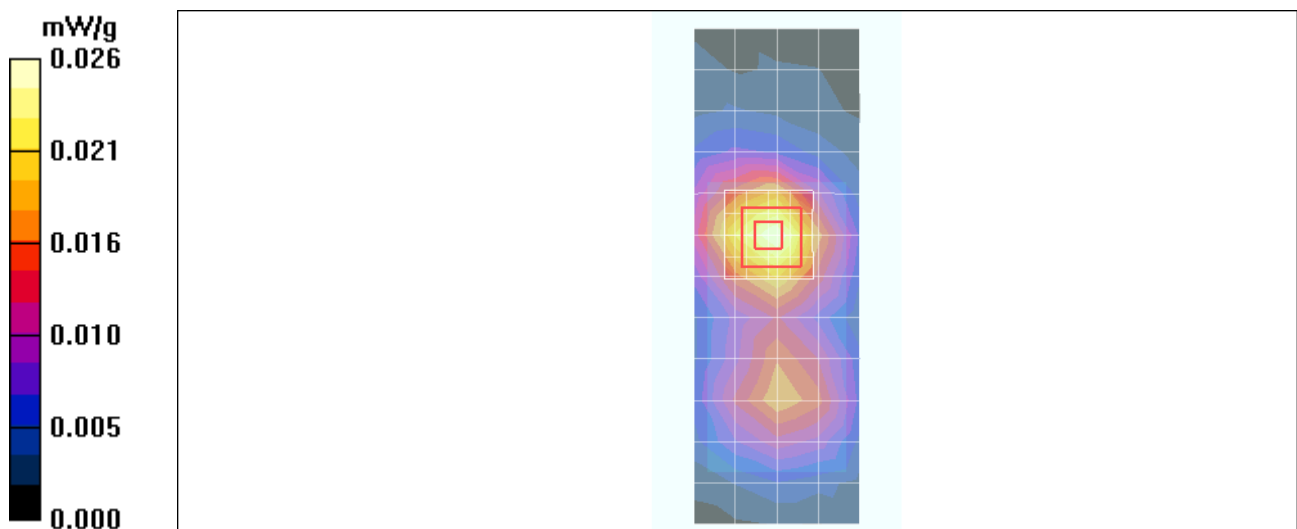

**Appendix 4**

**Probe Calibration Certificate**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ES3-3115\_May08**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3115**

Calibration procedure(s) **QA CAL-01.v6 and QA CAL-23.v3  
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 12, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Fin Bomholt	R&D Director	

Issued: May 13, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ES3DV3

## SN:3115

Manufactured:	March 6, 2006
Last calibrated:	July 16, 2007
Repaired:	April 28, 2008
Recalibrated:	May 12, 2008


Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)





# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

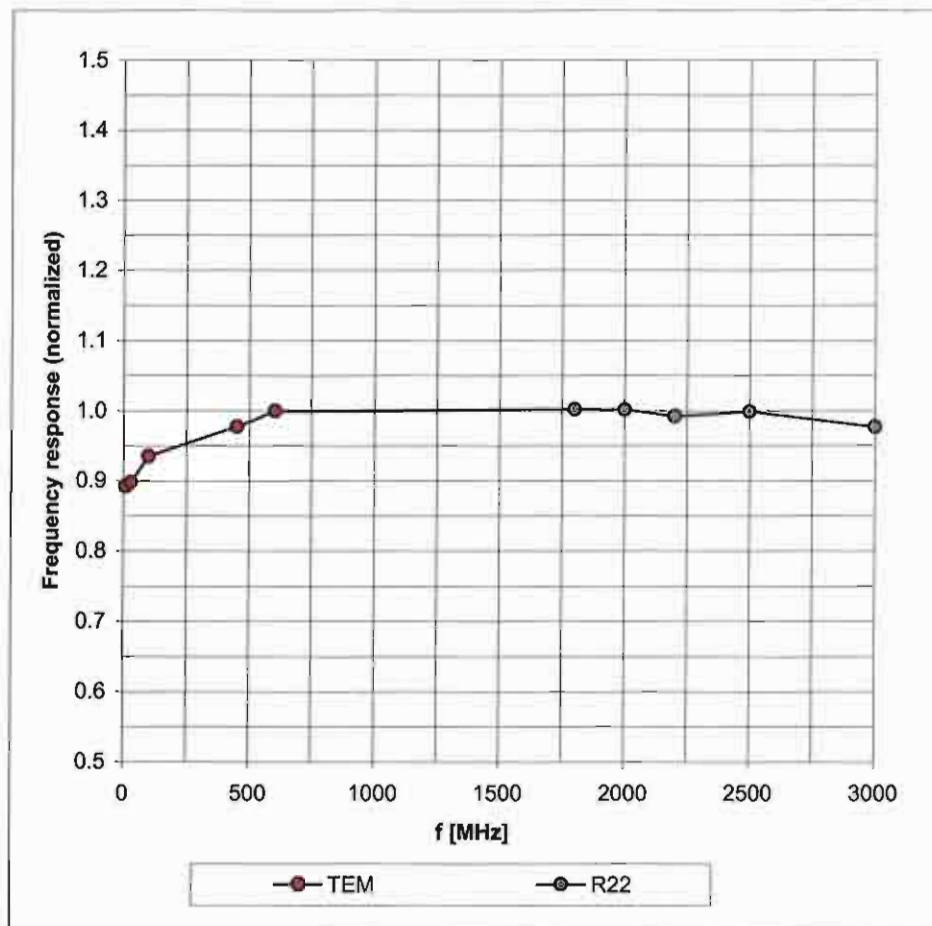


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

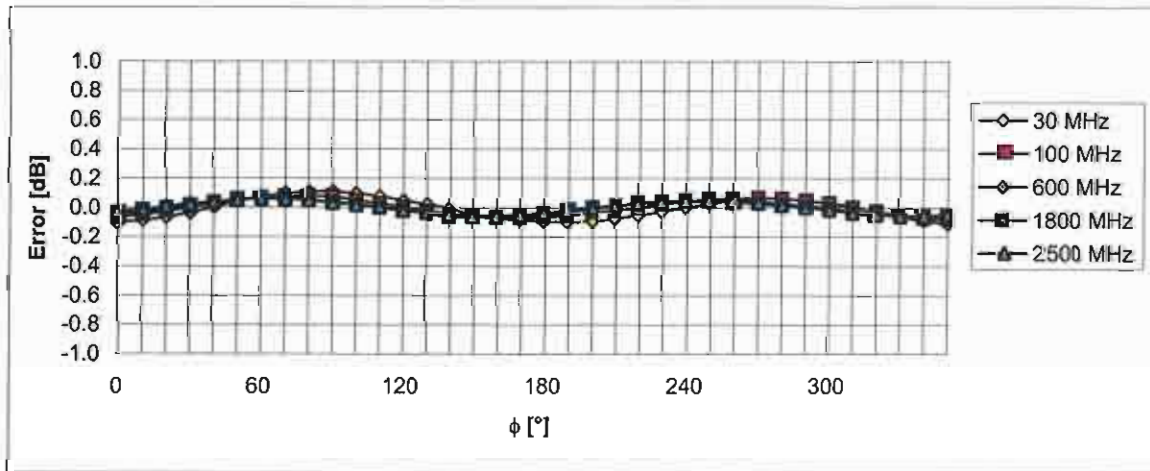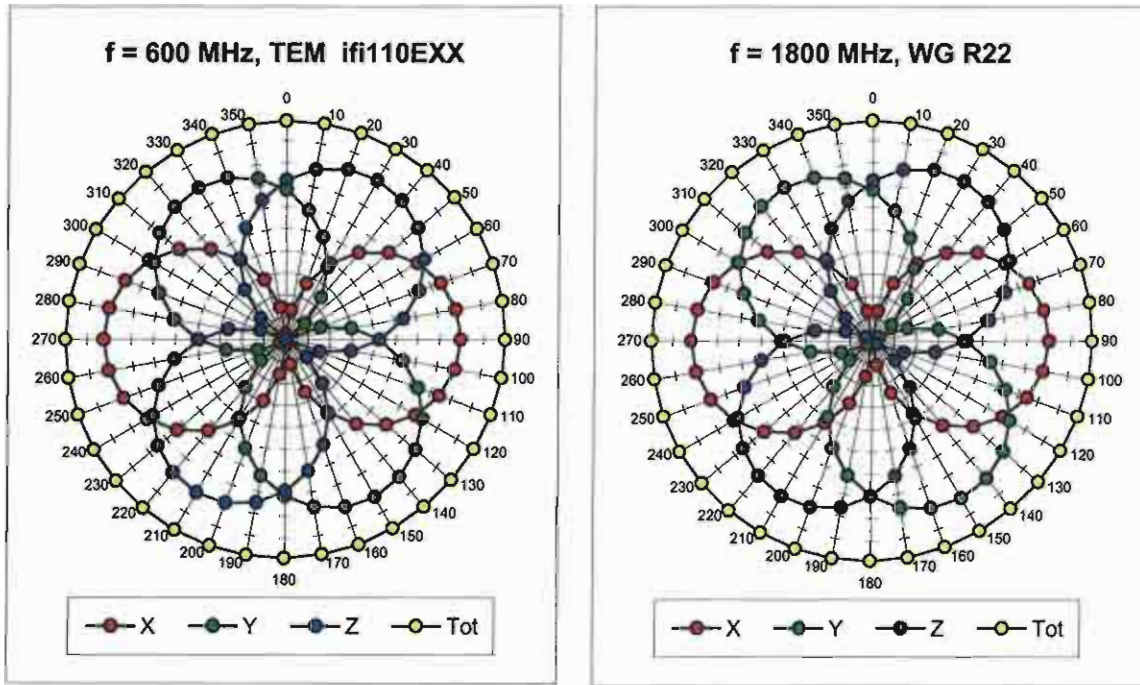



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$ )

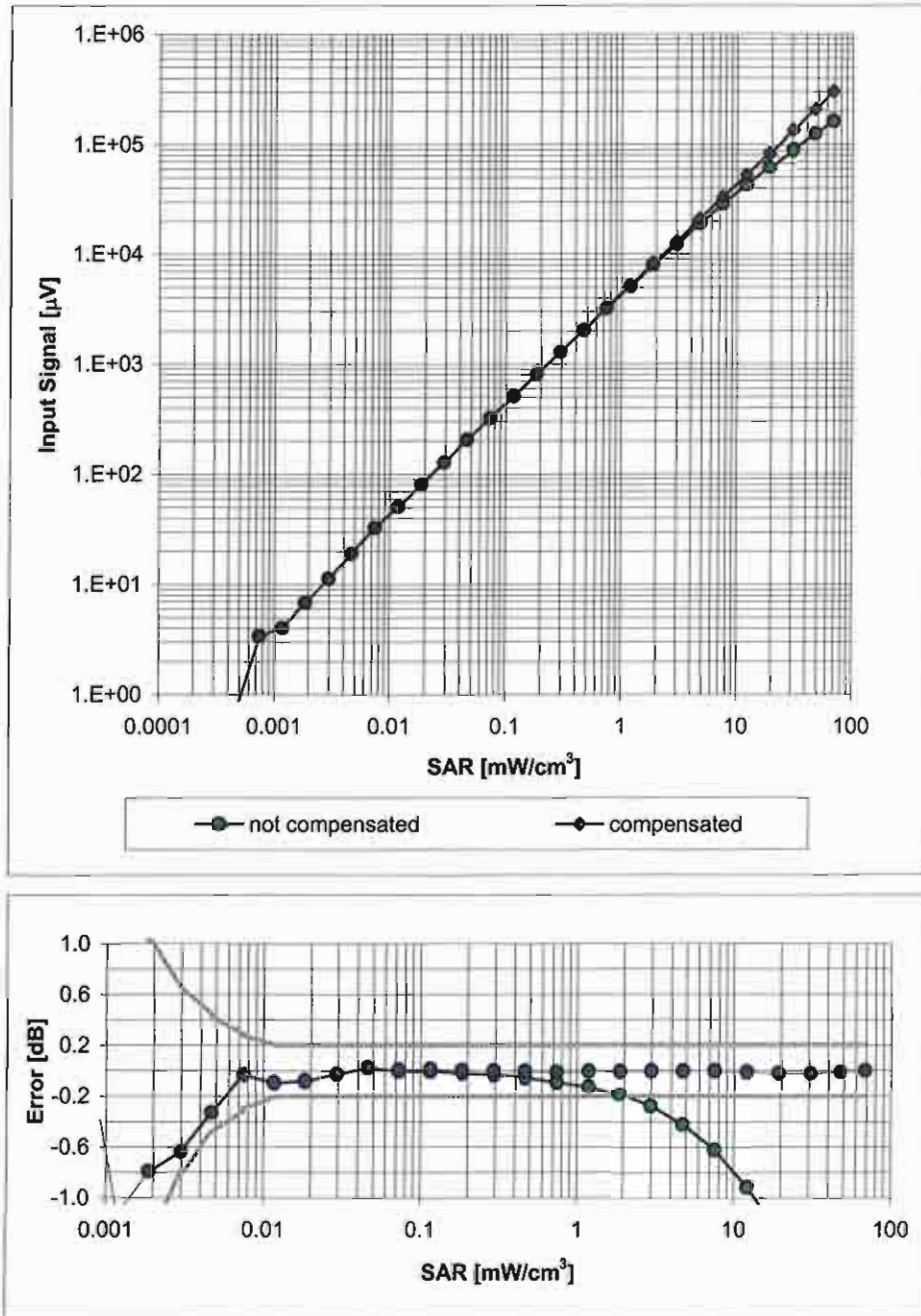

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

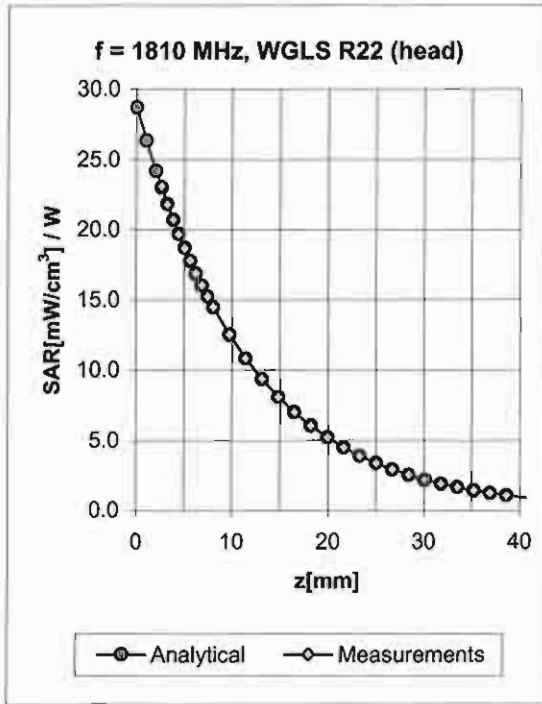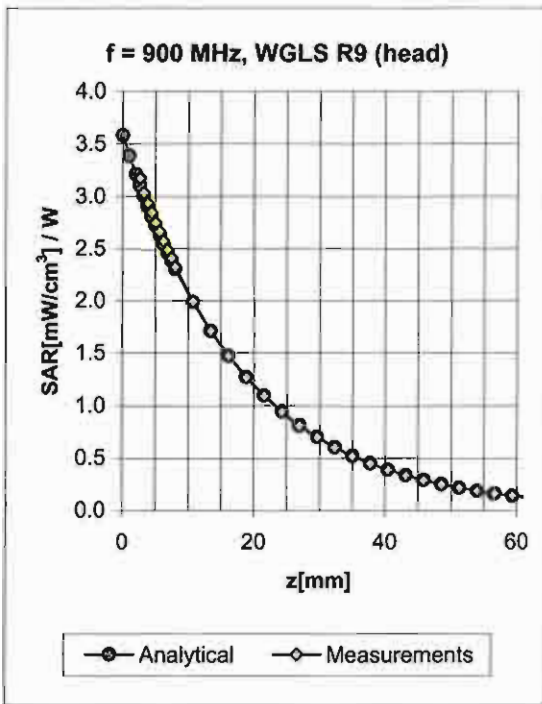


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.45	1.40	5.63 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.48	1.54	4.93 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.53	1.46	4.71 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.88	1.17	4.41 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.61	1.35	5.67 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.71	1.30	4.75 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.60	1.45	4.66 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.80	1.25	4.10 ± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

# Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ),  $f = 900$  MHz

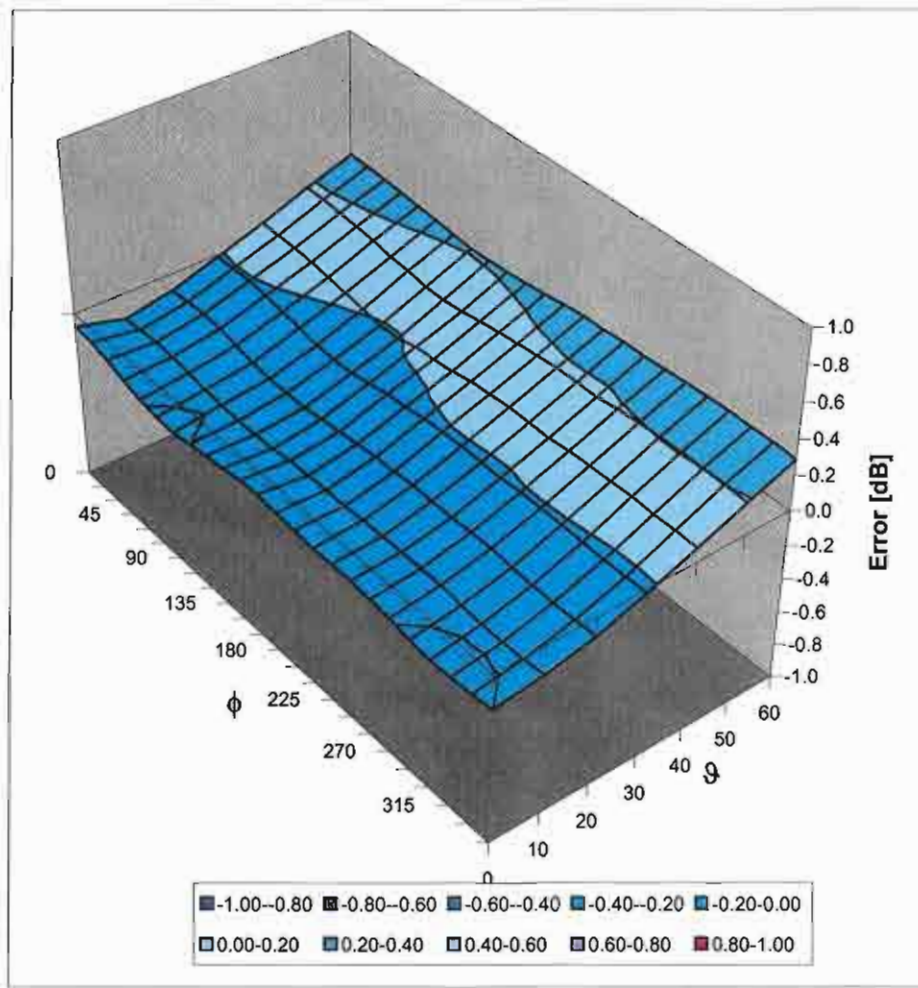

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ES3-3124\_Mar08**

**CALIBRATION CERTIFICATE**

Object: **ES3DV3 - SN:3124**

Calibration procedure(s): **QA CAL-01.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 17, 2008**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (SPEAG, No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

Calibrated by:	Name: <b>Katja Pokovic</b>	Function: <b>Technical Manager</b>	Signature:
Approved by:	Name: <b>Niels Kuster</b>	Function: <b>Quality Manager</b>	Signature:

Issued: March 17, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ES3DV3

## SN:3124

Manufactured:	July 11, 2006
Last calibrated:	March 20, 2007
Recalibrated:	March 17, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: ES3DV3 SN:3124

### Sensitivity in Free Space<sup>A</sup>

### Diode Compression<sup>B</sup>

NormX	1.25 ± 10.1%	$\mu V/(V/m)^2$	DCP X	97 mV
NormY	1.32 ± 10.1%	$\mu V/(V/m)^2$	DCP Y	94 mV
NormZ	1.33 ± 10.1%	$\mu V/(V/m)^2$	DCP Z	95 mV

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

**TSL**                      **900 MHz**      **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		<b>3.0 mm</b>	<b>4.0 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	10.1	5.9
SAR <sub>be</sub> [%]	With Correction Algorithm	0.9	0.8

**TSL**                      **1810 MHz**      **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		<b>3.0 mm</b>	<b>4.0 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	11.0	6.0
SAR <sub>be</sub> [%]	With Correction Algorithm	0.8	0.7

### Sensor Offset

Probe Tip to Sensor Center    **2.0 mm**


**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.




# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

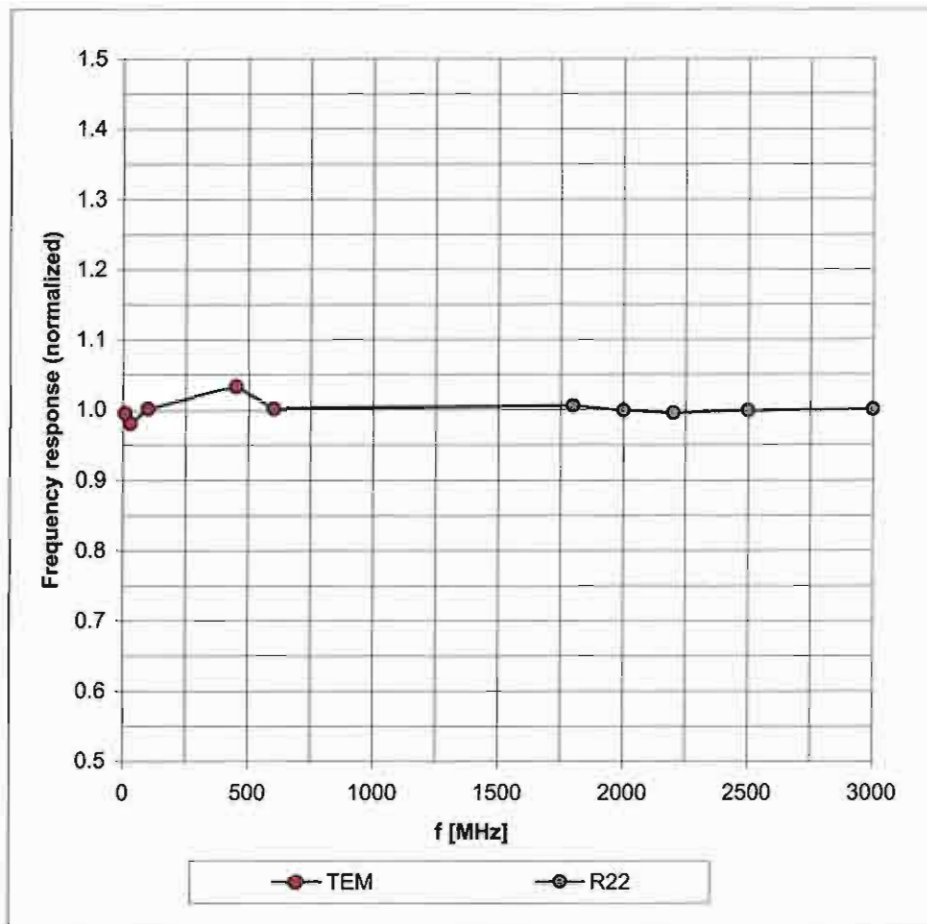


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

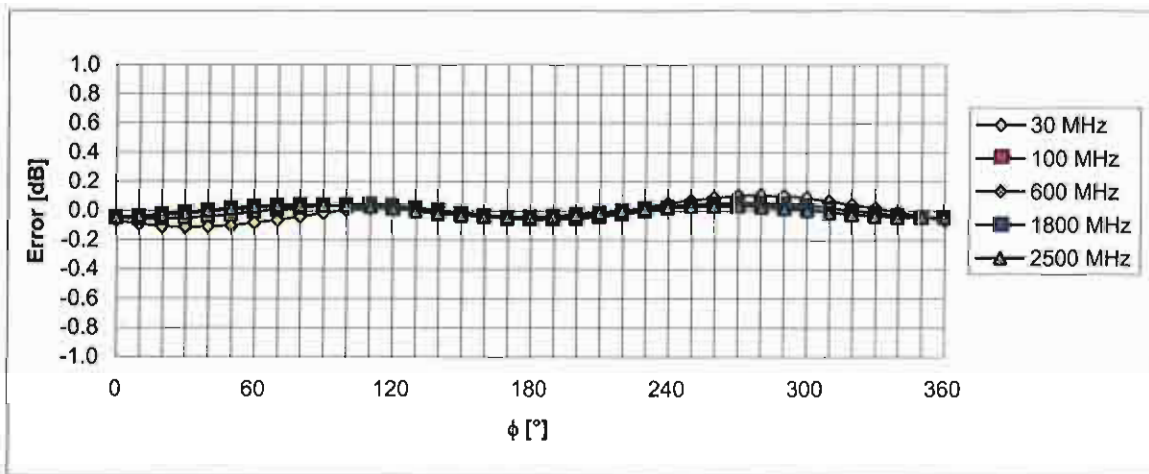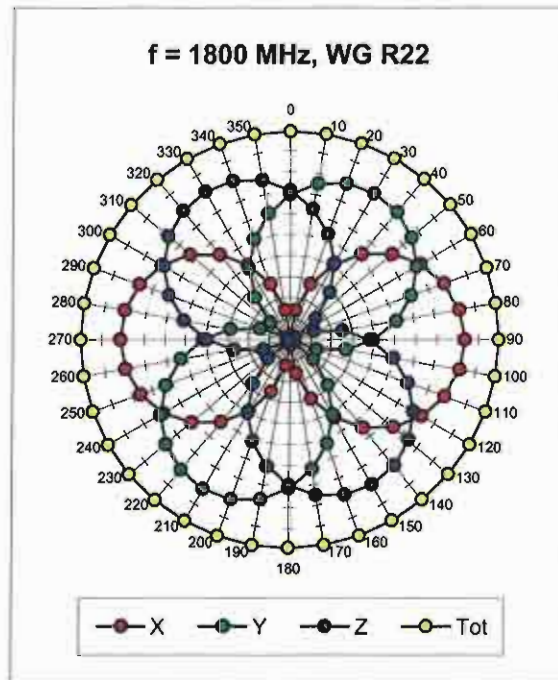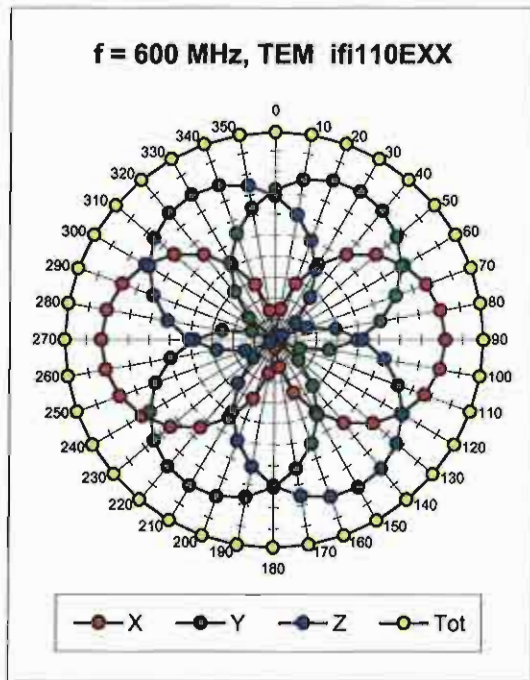


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$ )

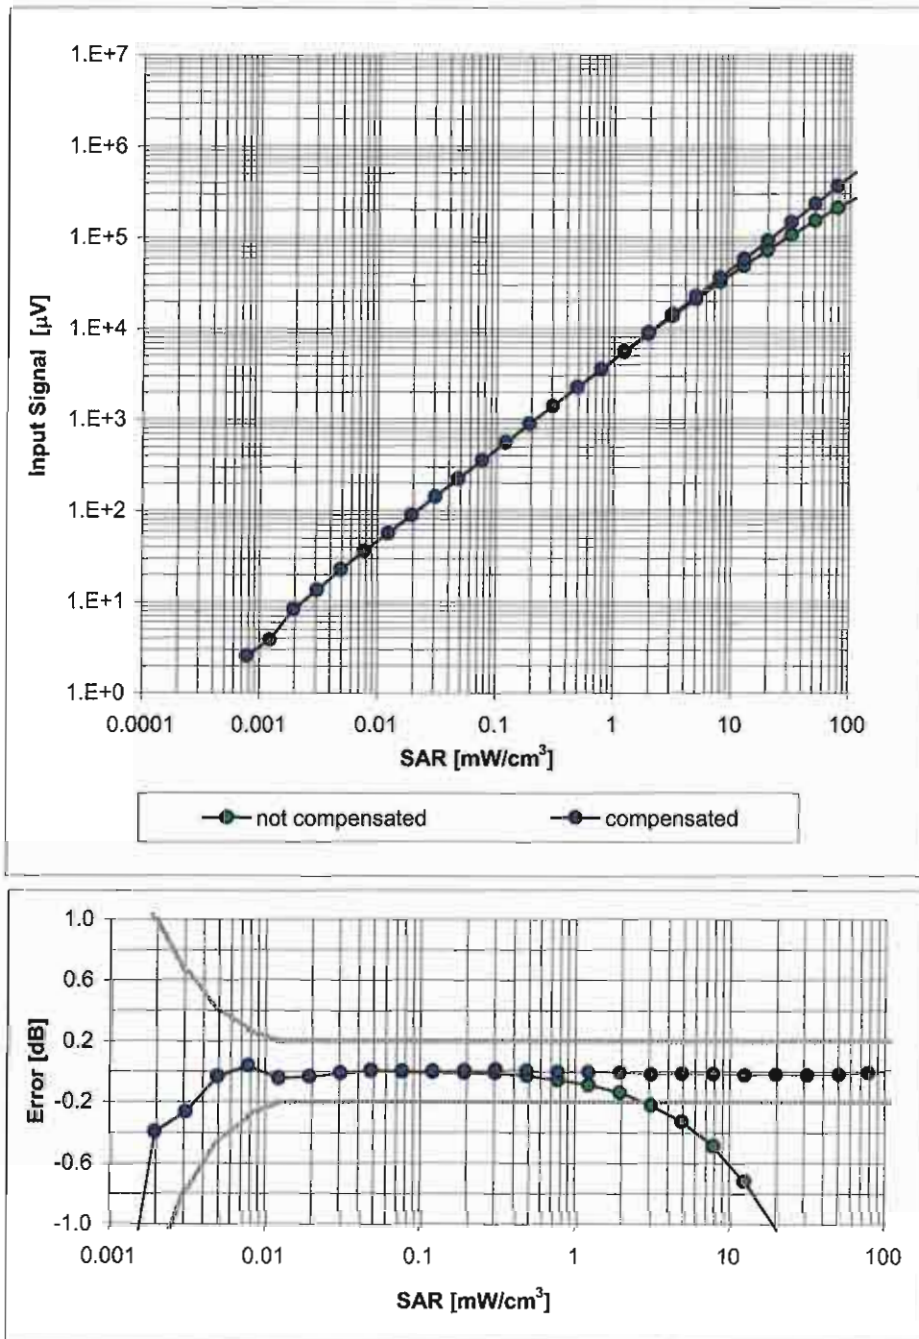

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

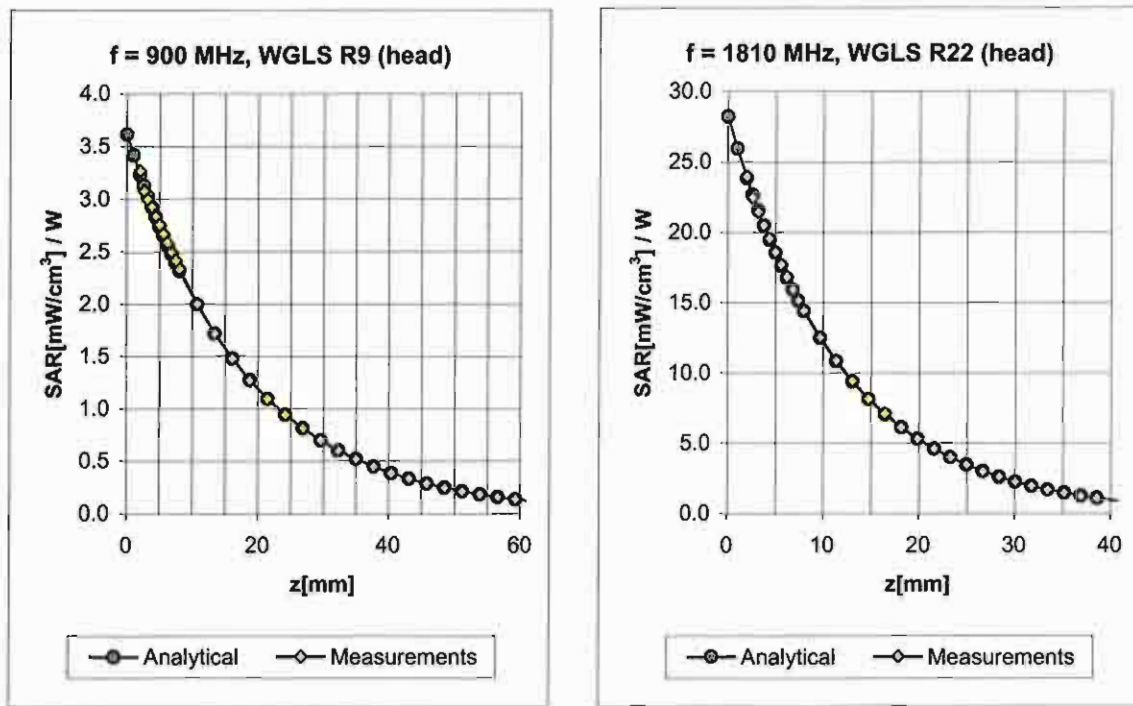


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.95	1.18	6.03 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.84	1.31	4.98 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.81	1.33	4.80 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.95	1.18	4.51 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.95	1.20	5.64 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.69	1.44	5.08 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.92	1.22	4.88 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.85	1.26	4.19 ± 11.8% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

### Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ),  $f = 900$  MHz

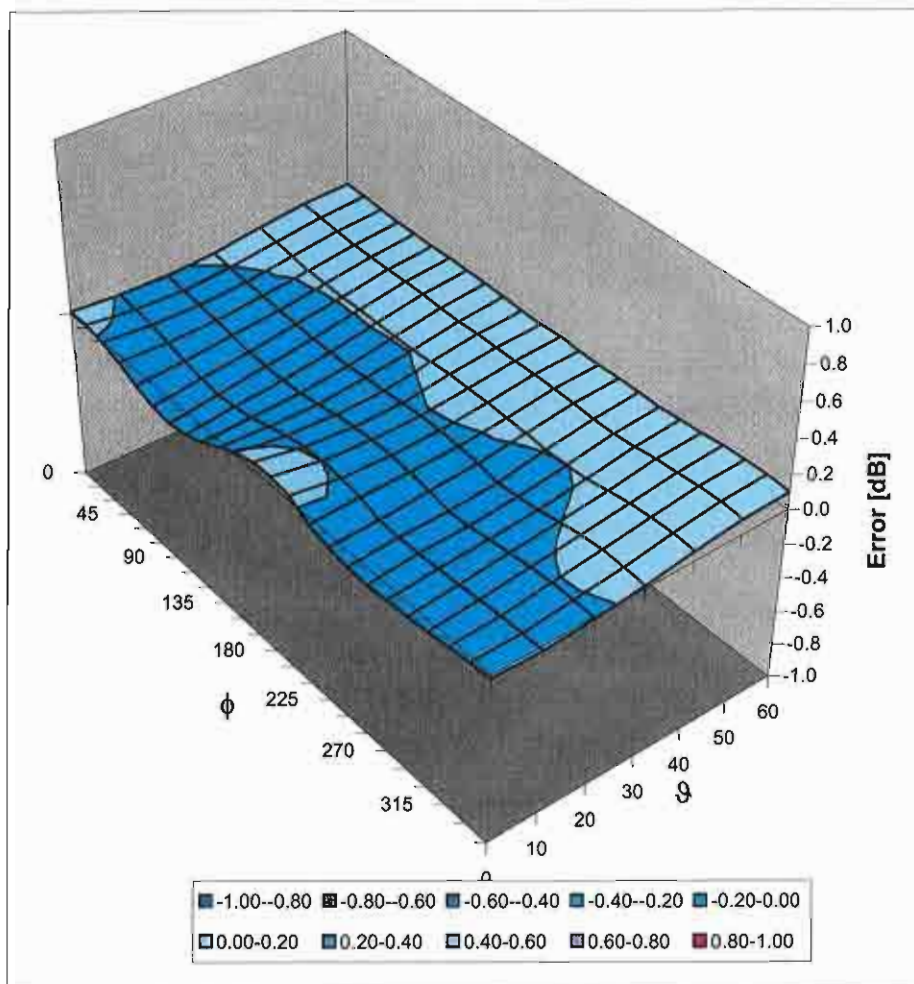

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

## **Appendix 5**

### **Measurement Uncertainty Budget**

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$h = c \times f / e$	$i = c \times g / e$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	$c_i$ (1 g)	$c_i$ (10 g)	1 g $u_i$ (±%)	10 g $u_i$ (±%)	$v_i$
<b>Measurement System</b>									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
<b>Test sample Related</b>									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
<b>Combined Standard Uncertainty</b>			RSS				11.1	10.8	411
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>			$k=2$				22.2	21.6	

**Appendix 6**

**Dipole Characterization Certificate**

# Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

<b>1800MHz</b>	
Reference Target:	38.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	18-April-07 to 14-April-08
# of tests performed:	1,028
Grand Average:	37.7 (W/kg)
% Delta (Average - Reference Target)	-1.7%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 246tr, 250tr, 251tr, 259tr, 263tr, 271tr, 272tr, 276tr, 277tr, 279tr, 280tr, 281tr, 283tr, 284tr, 2d128, 2d129	

-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
1800MHz	37.7	40.0 ± 5%	1.40 ± 5%

-Approvals-

Submitted by:  Date:

Signed: 

Comments:

Approved by:  Date:

Signed: 

Comments:

# Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

<b>900MHz</b>	
Reference Target:	10.9 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	18-April-07 to 14-April-08
# of tests performed:	1,125
Grand Average:	11.29 (W/kg)
% Delta (Average - Reference Target)	3.6%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	<b>Yes</b>
Accept/Reject Average as new system performance check target?	<b><u>ACCEPT</u></b>
<b>Applies to Dipole SN's:</b> 55, 69, 77, 78, 79, 80, 91, 92, 93, 94, 95, 96, 97, 1d034, 1d035	

-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
900MHz	<b>11.29</b>	41.5 ± 5%	0.97 ± 5%

-Approvals-

Submitted by:  Date:

Signed: 

Comments:

Approved by:  Date:

Signed: 

Comments:

# Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

2450MHz	
Reference Target:	52.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	18-April-07 to 14-April-08
# of tests performed:	77
Grand Average:	56.5 (W/kg)
% Delta (Average - IEEE1528 Target)	7.8%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 740, 766, 767, 788, 789	

-New System Performance Check Targets- per WI-0396  
 (based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
2450MHz	56.5	39.2 ± 5%	1.80 ± 5%

-Approvals-

Submitted by:  Date:

Signed: 

Comments:

Approved by:  Date:

Signed: 

Comments: