



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 22302-1 BT

Report Date – October 3, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: October 3, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Table of Contents

Test Report Details 3

Applicable Standards 3

Summary of Testing..... 4

General and Special Conditions..... 4

Equipment and Cable Configurations 5

Measuring Equipment and Calibration Information 5

Description of Bluetooth Transmitter 5

Measurement Procedures and Data..... 6

 CARRIER FREQUENCY SEPARATION 6

 Measurement Procedure..... 6

 Measurement Results 6

 NUMBER OF HOPPING FREQUENCIES 8

 Measurement Procedure..... 8

 Measurement Results 8

 TIME OF OCCUPANCY (DWELL TIME)..... 10

 Measurement Procedure..... 10

 Measurement Results 10

 20dB BANDWIDTH 12

 Measurement Procedure..... 12

 Measurement Results 12

 PEAK OUTPUT POWER 14

 Measurement Procedure..... 14

 Measurement Results 14

 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS 16

 Measurement Procedure..... 16

 Measurement Results 16

 SPURIOUS RF CONDUCTED EMISSIONS 21

 Measurement Procedure..... 21

 Measurement Results 21

 AC LINE CONDUCTED EMISSIONS 28

 Measurement Procedure..... 28

 Measurement Results 28

Test Report Details

Tests Performed By: Motorola Mobile Devices Business (MDb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: 1090-1

Tests Requested By: Motorola Inc.
 Mobile Devices Business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 850 & 1900, EDGE 850 & 1900, Bluetooth,
 WLAN

FCC ID: IHDP56JK1

Serial Numbers: 004401028257760, 004401028257588,
 004401028257737

Testing Complete Date: October 3, 2008

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

 X Part 15 Subpart C – Intentional Radiators

Applicable Standards: ANSI 63.4 2003

DA 00-705, “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” published by the Federal Communications Commission was also used in the testing of this product.

Summary of Testing

| Test | Test Name | Pass/Fail |
|------|---------------------------------|-----------|
| 1 | Carrier Frequency Separation | Pass |
| 2 | Number of Hopping Frequencies | Pass |
| 3 | Time of Occupancy (Dwell Time) | Pass |
| 4 | 20 dB Bandwidth | Pass |
| 5 | Spurious RF Conducted Emissions | Pass |
| 6 | Max Power | N/A |
| 7 | Band Edges | Pass |
| 8 | Conducted Spurious Emissions | Pass |

| Test | Test Name | Results |
|------|---------------------------------|-----------|
| 1 | Carrier Frequency Separation | 1 MHz |
| 2 | Number of Hopping | 79 |
| 3 | Time of Occupancy (Dwell Time) | 2.92 ms |
| 4 | 20 dB Bandwidth | See plots |
| 5 | Spurious RF Conducted Emissions | See plots |
| 6 | Max Power | 8.177 dBm |
| 7 | Band Edges | See plots |
| 8 | Conducted Spurious Emissions | See plots |

General and Special Conditions

The Cellular Phone hereinafter referred to as the Equipment under Test or EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

| Manufacturer | Equipment Type | Model No. | Serial Number | Calibration Due Date |
|---------------------|-----------------------|------------------|----------------------|-----------------------------|
| Rohde Schwarz | Receiver | ESI26 | 100001 | 6/03/09 |
| Rohde Schwarz | Receiver | ESI26 | 838786/010 | 2/28/09 |
| Hewlett Packard | EMC Analyzer | E7405 | US39440191 | 5/08/09 |
| Agilent | MXA Signal Analyzer | N9020A | US46470586 | 12/10/09 |
| Attenuator | Weinschel | AS-6 | 6675 | 6/13/09 |
| Attenuator | Weinschel | AS-6 | 6677 | 6/17/09 |
| ETS | LISN | 3810/2NM | 2179 | 1/23/09 |
| ETS | LISN | 3810/2NM | 00023630 | 1/23/09 |

All equipment is on a one-year calibration cycle.

Description of Bluetooth Transmitter

The EUT offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483.5 MHz. The Bluetooth antenna is mounted inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by the industrial standard. In this application, the device is battery operated. The Bluetooth transmitter does support Bluetooth version 2.0+EDR.

The Bluetooth Antenna gain is 0.5 dBi.

Measurement Procedures and Data

CARRIER FREQUENCY SEPARATION

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth transmitter of the EUT had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Measurement Results

See attached.

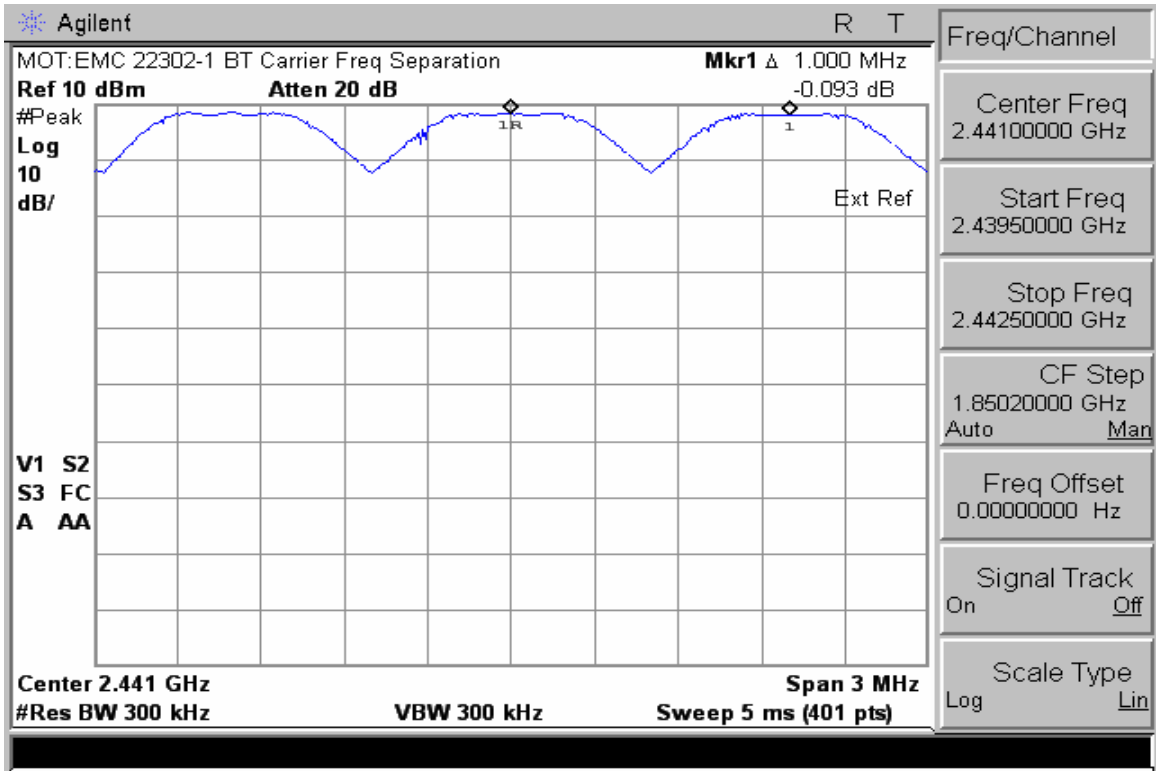

Carrier Frequency Separation

NUMBER OF HOPPING FREQUENCIES

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

Measurement Results

See attached.

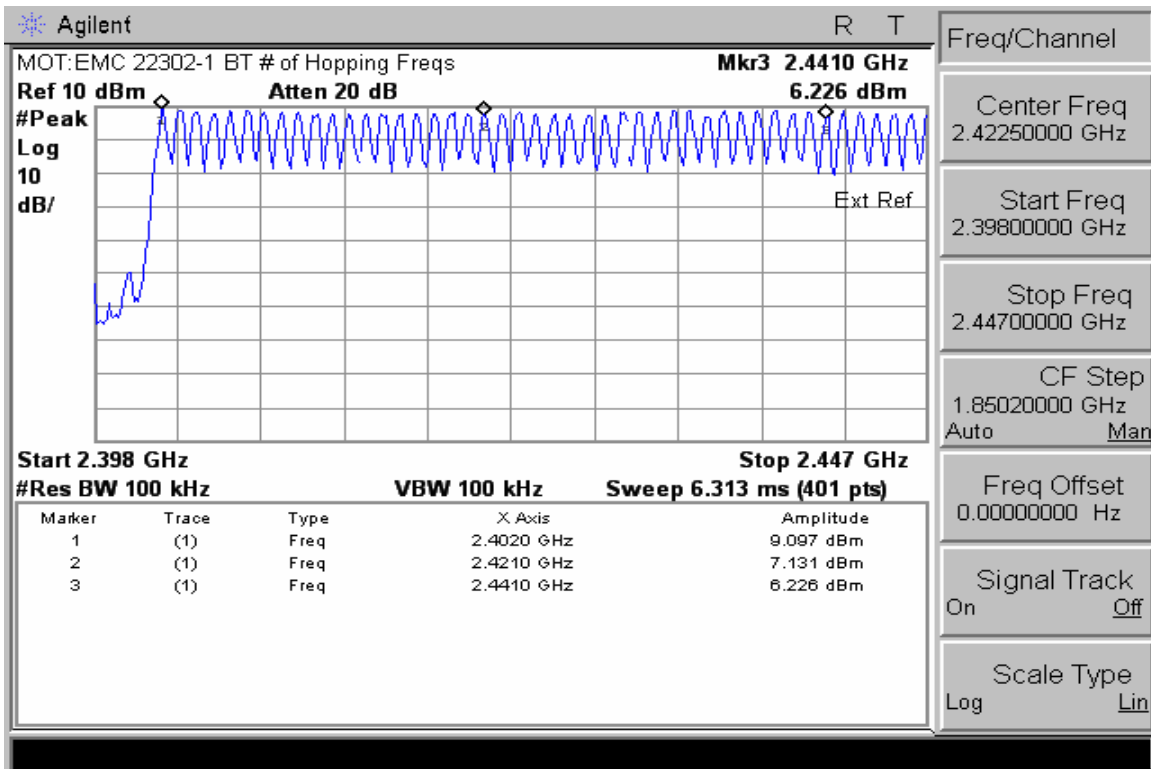

Number of Hopping Frequencies (Channels 0 – 39)

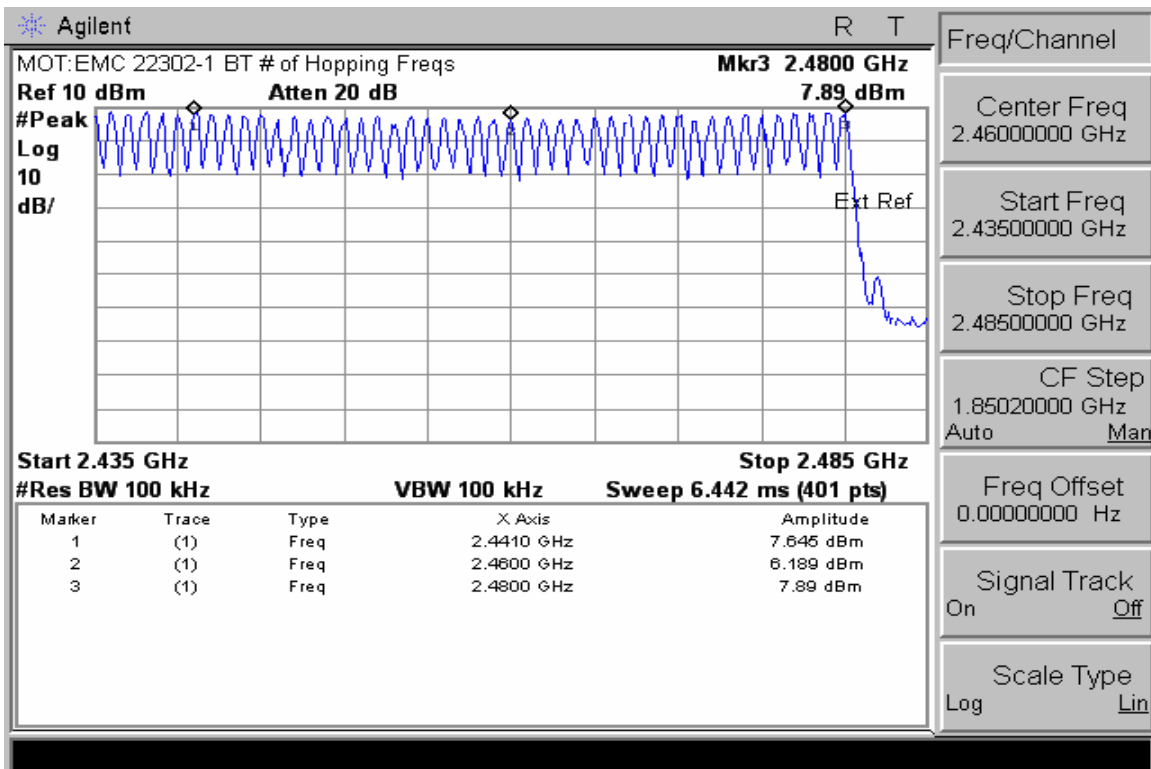

Number of Hopping Frequencies (Channels 39 – 78)

TIME OF OCCUPANCY (DWELL TIME)

CFR47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Measurement Results

See attached

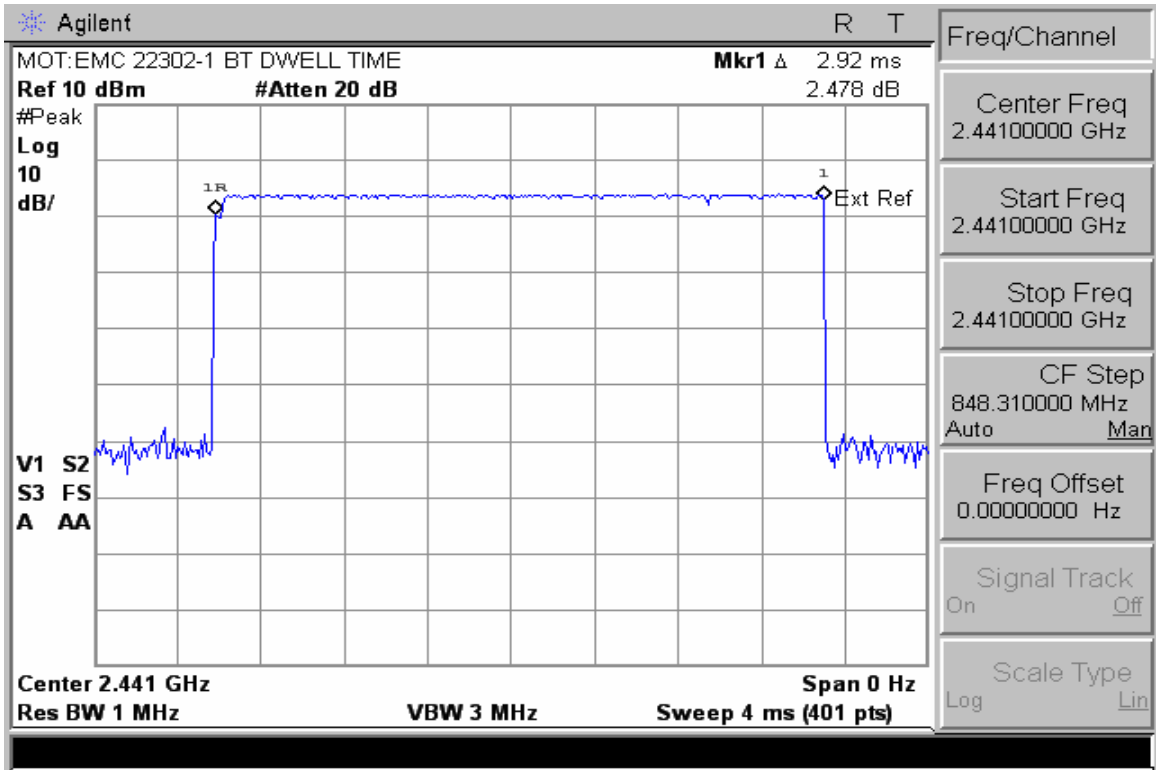

20dB Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was disabled. The spectrum analyzer used the following settings:

1. Span = 2MHz, centered on the center channel frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Measurement Results

See attached

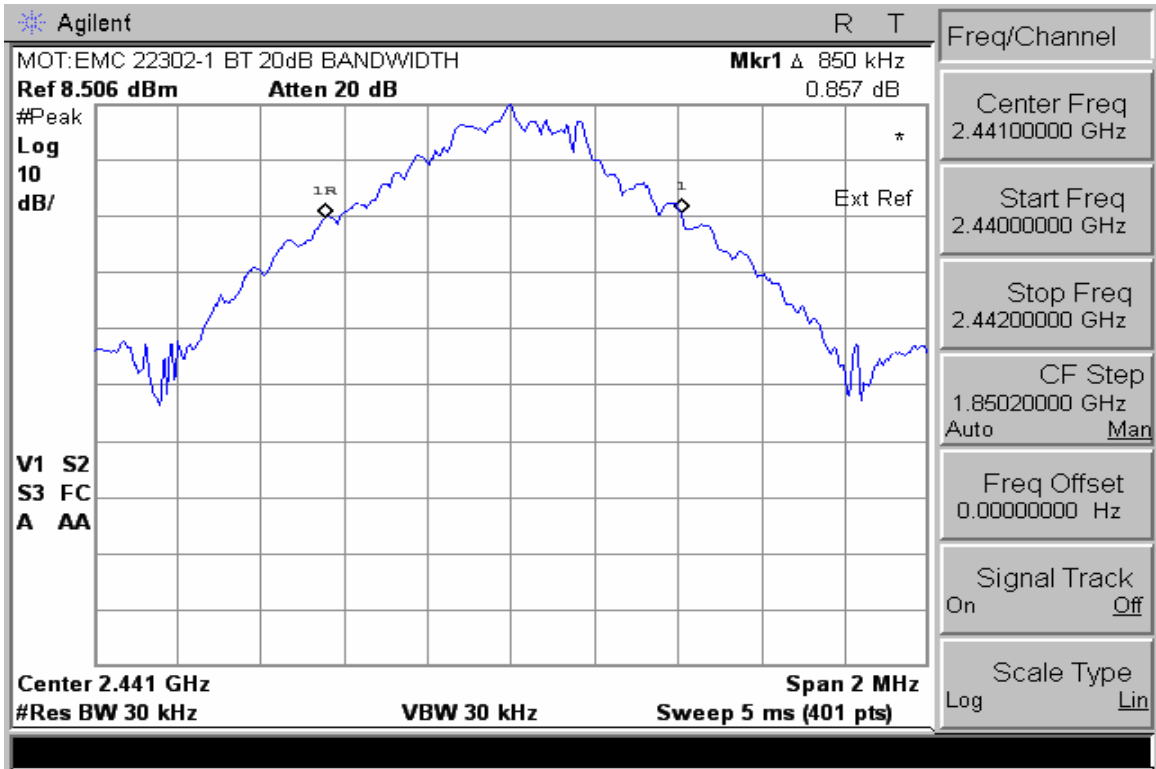

20dB Bandwidth

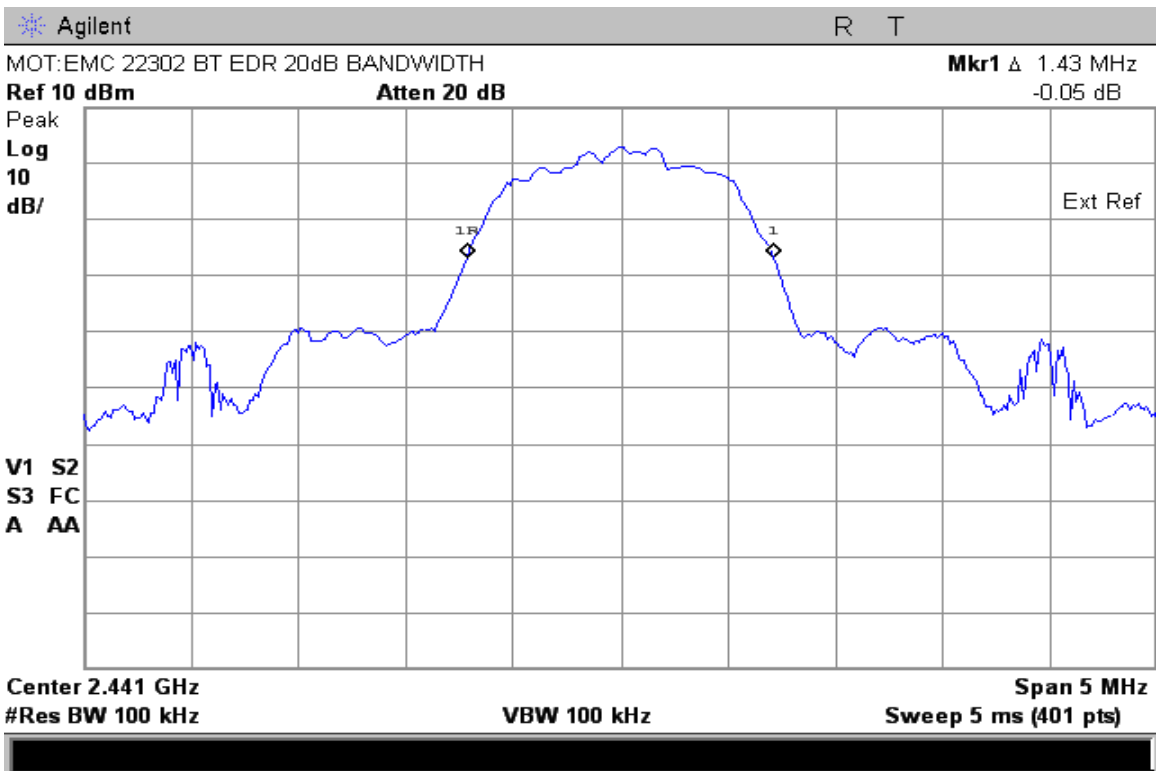

20dB Bandwidth EDR Mode

PEAK OUTPUT POWER


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results

See Attached

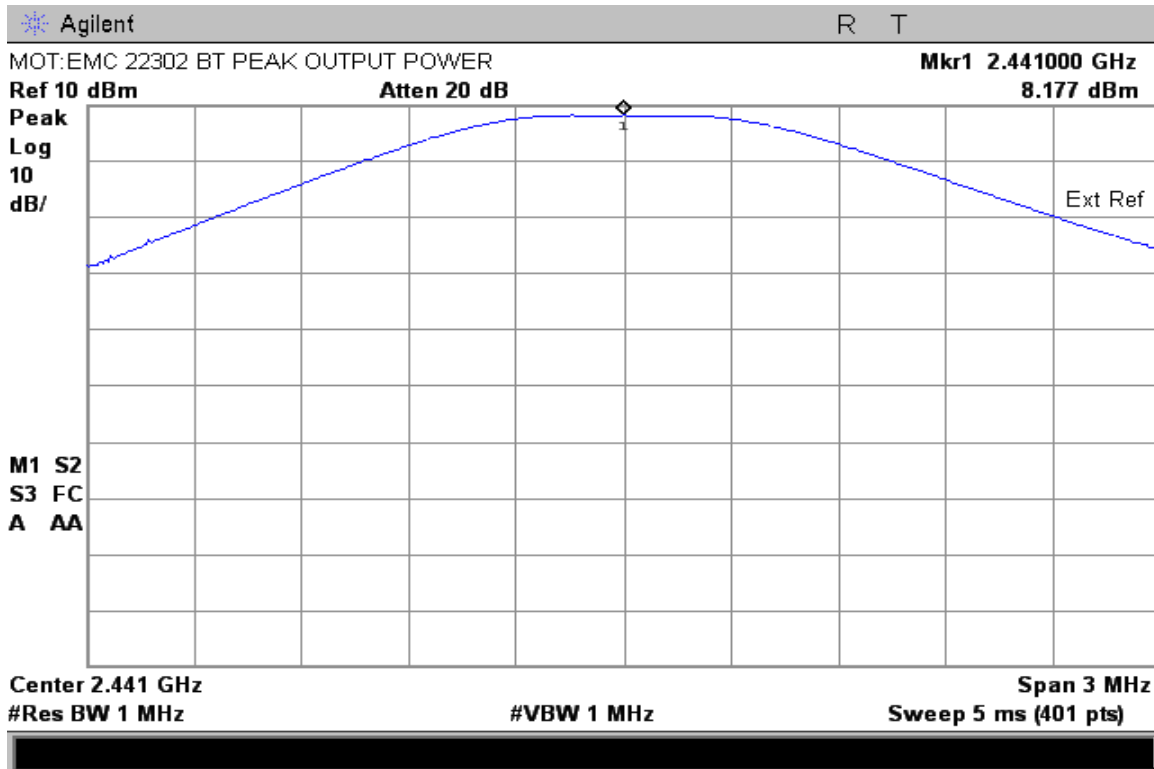

Peak Output Power Non EDR Mode

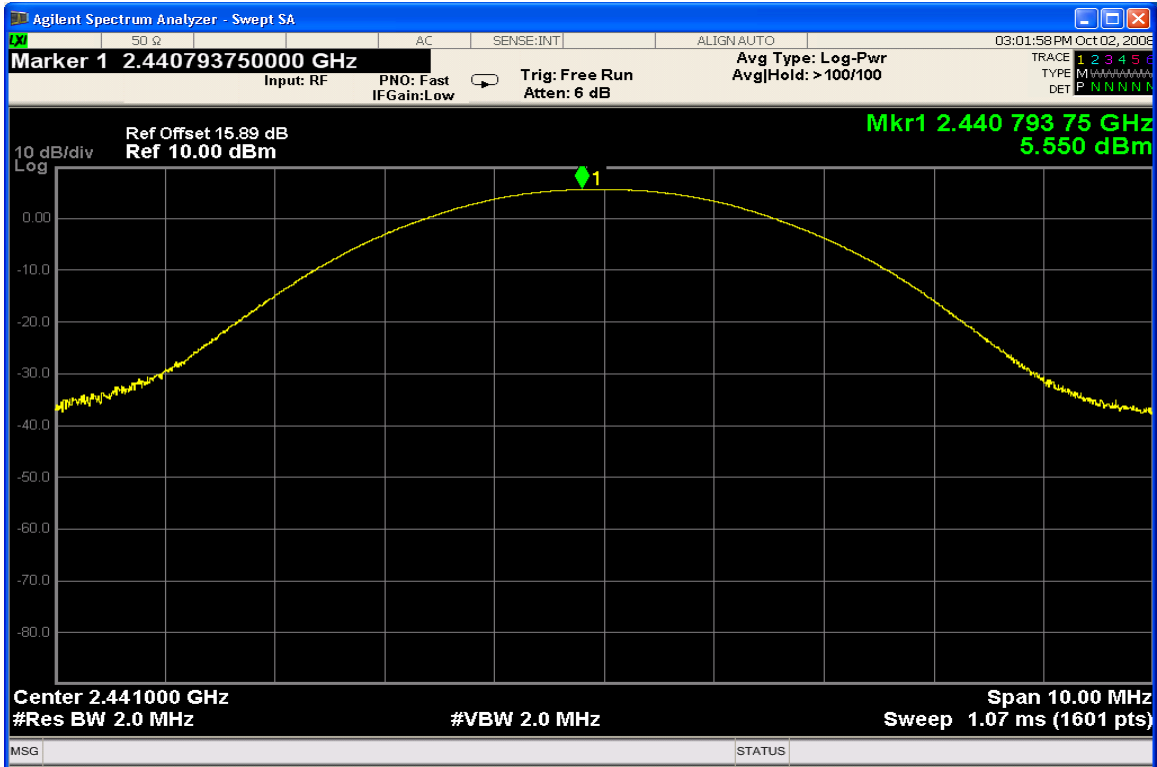

Peak Output Power EDR Mode

BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See Attached:

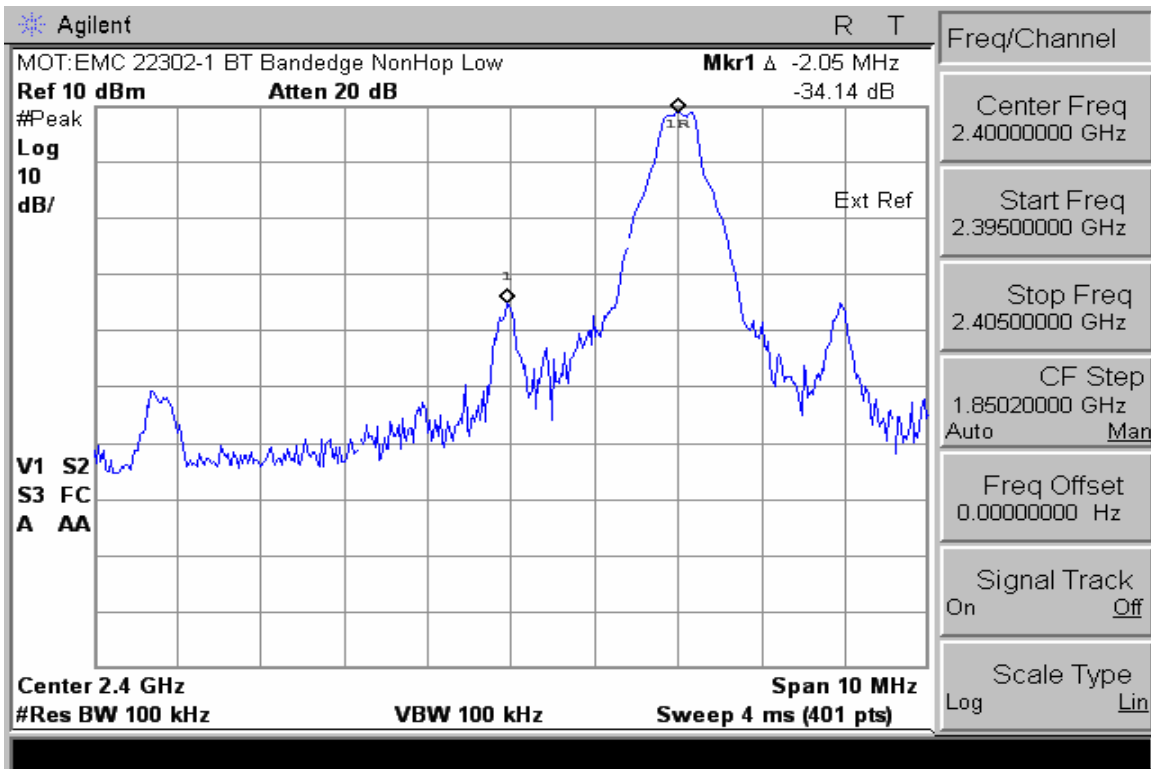


Low Band edge with Hopping Disabled

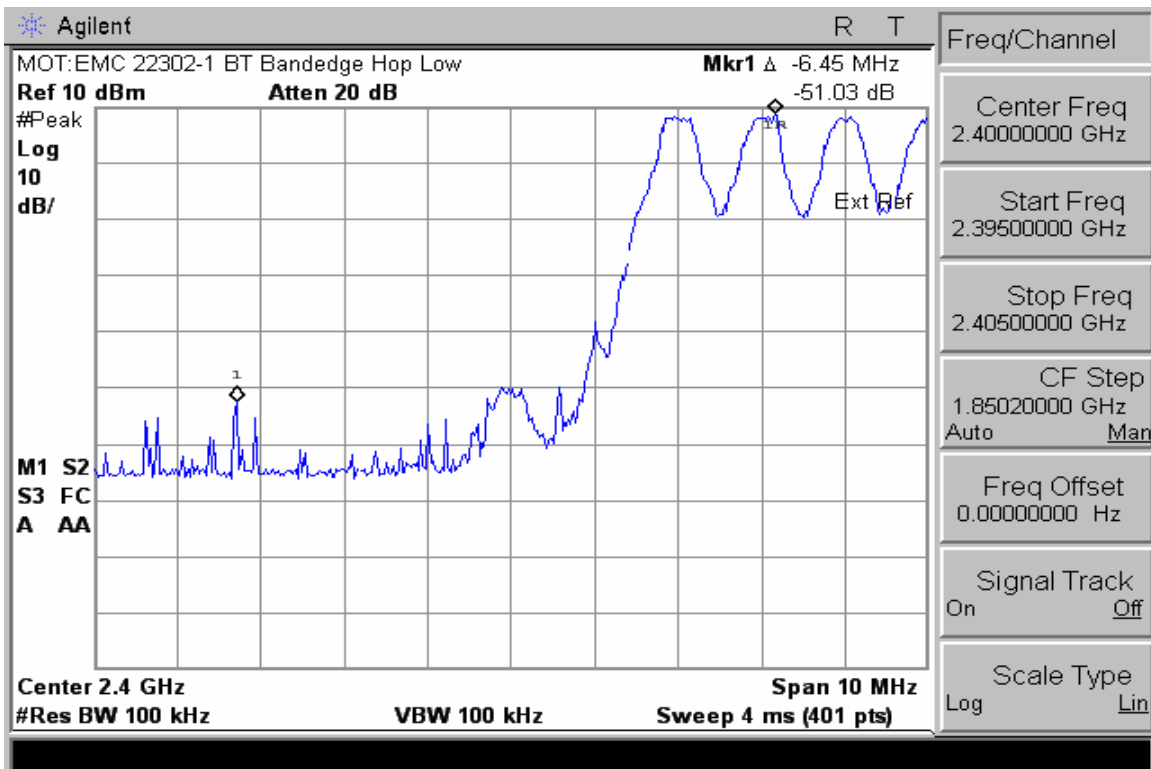


Low Band edge with Hopping Enabled

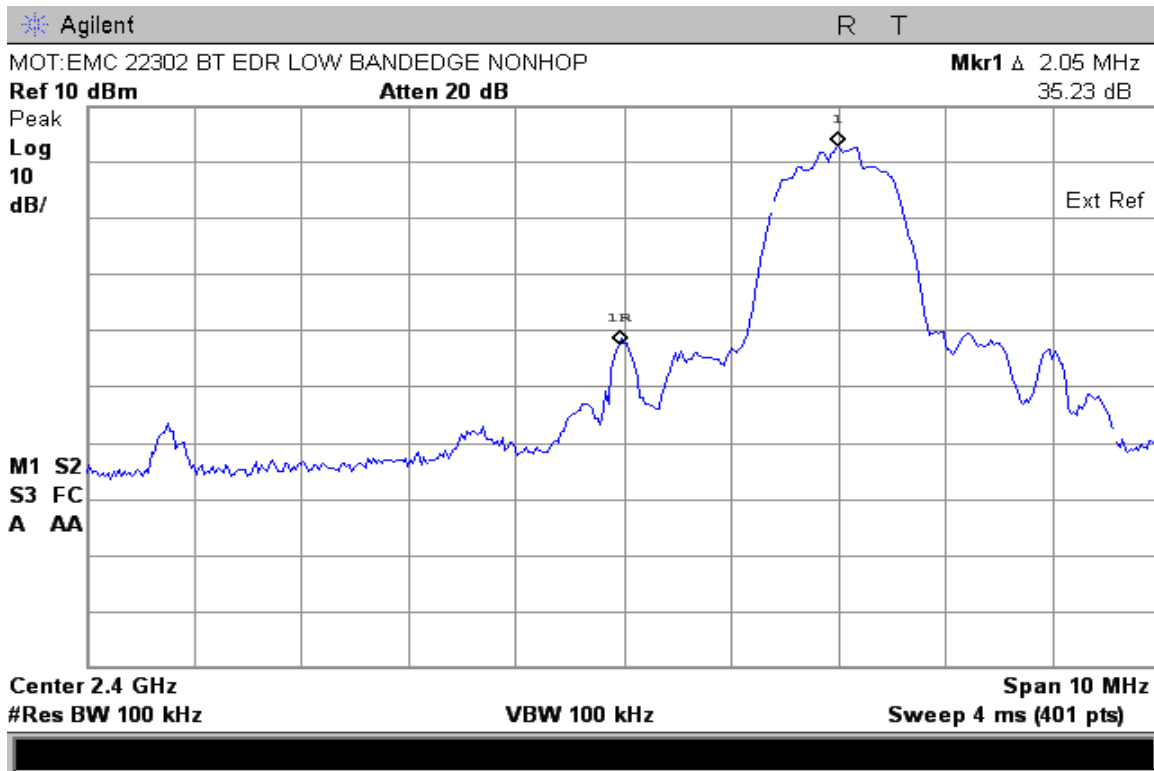


Low Band Edge with Hopping Disabled (EDR MODE)

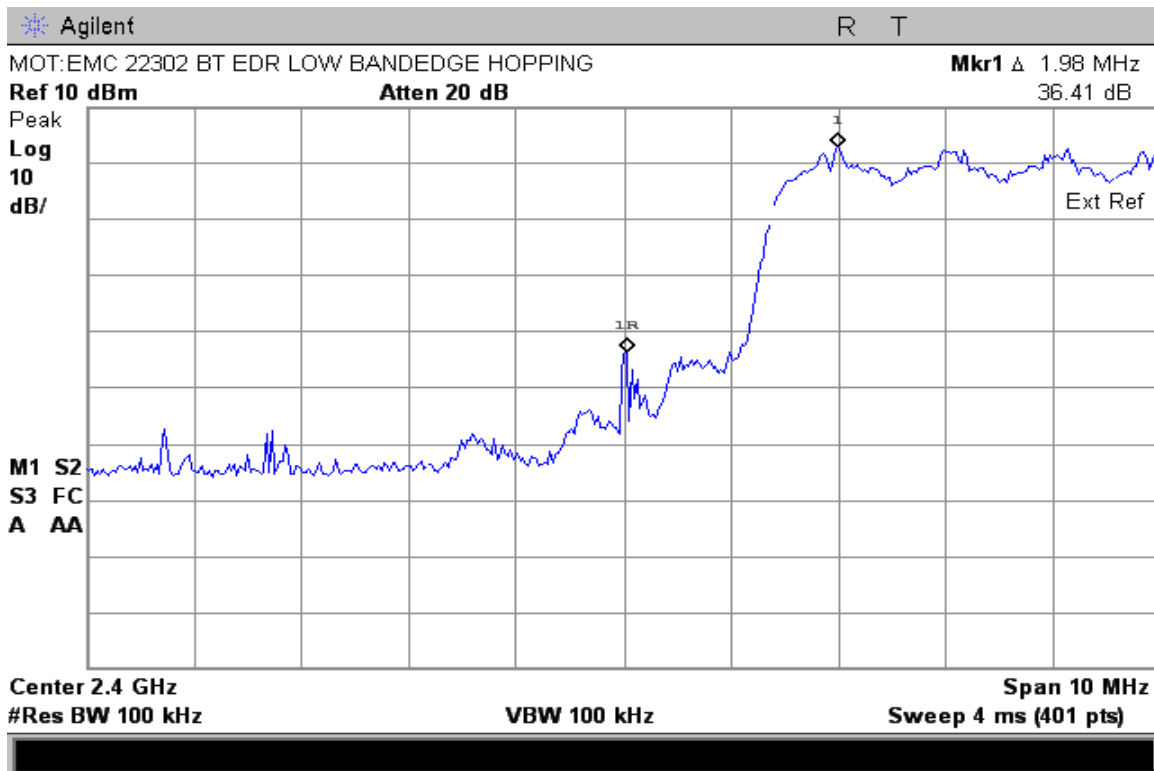


Low Band Edge with Hopping Enabled (EDR MODE)

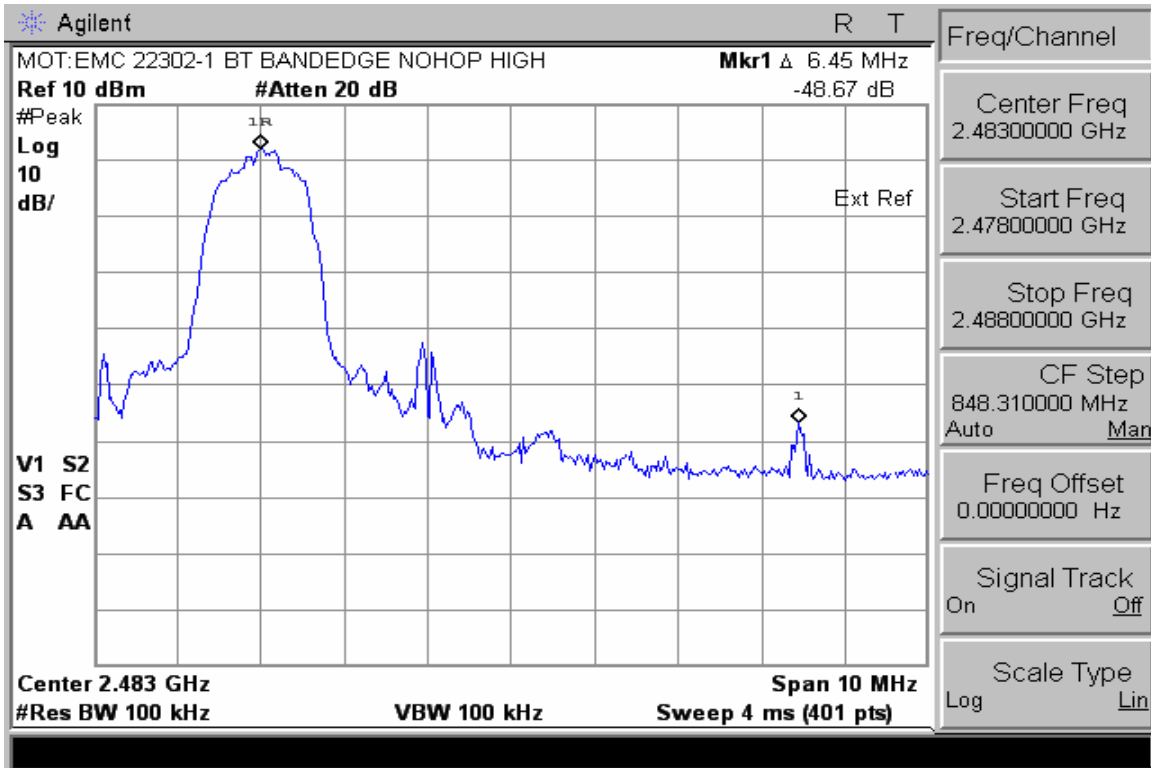


High Band edge with Hopping Disabled

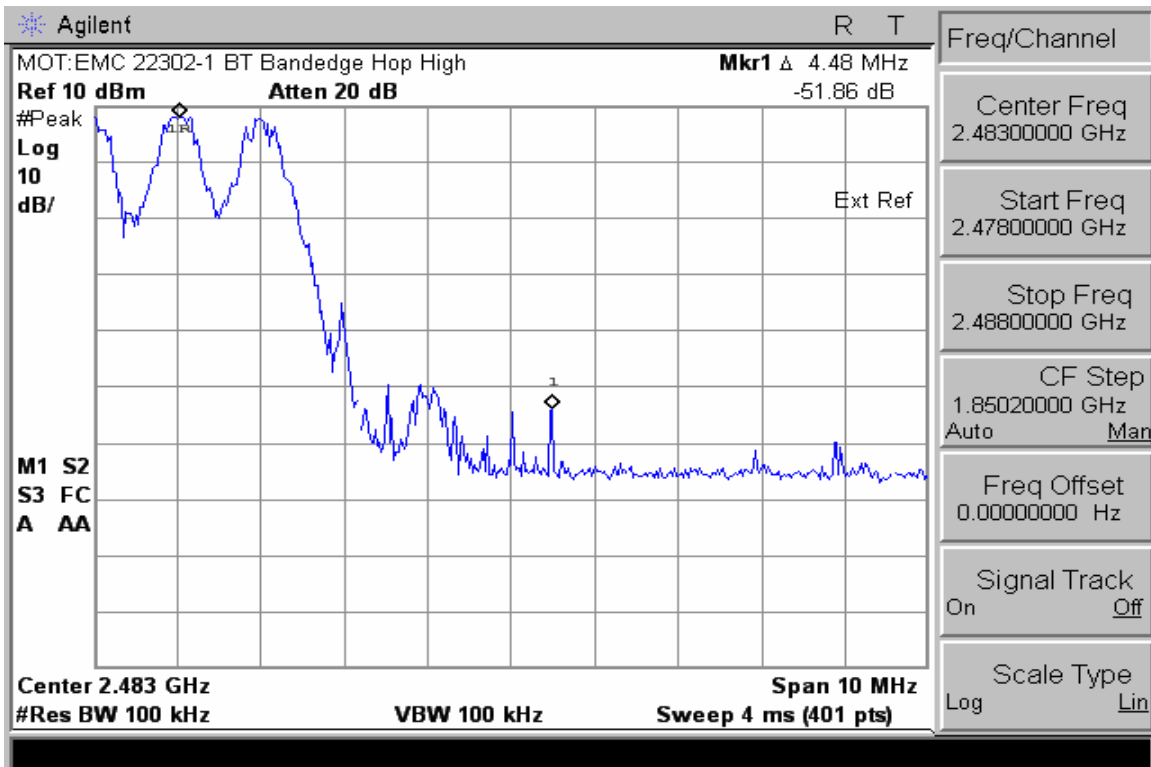

High Band edge with Hopping Enabled

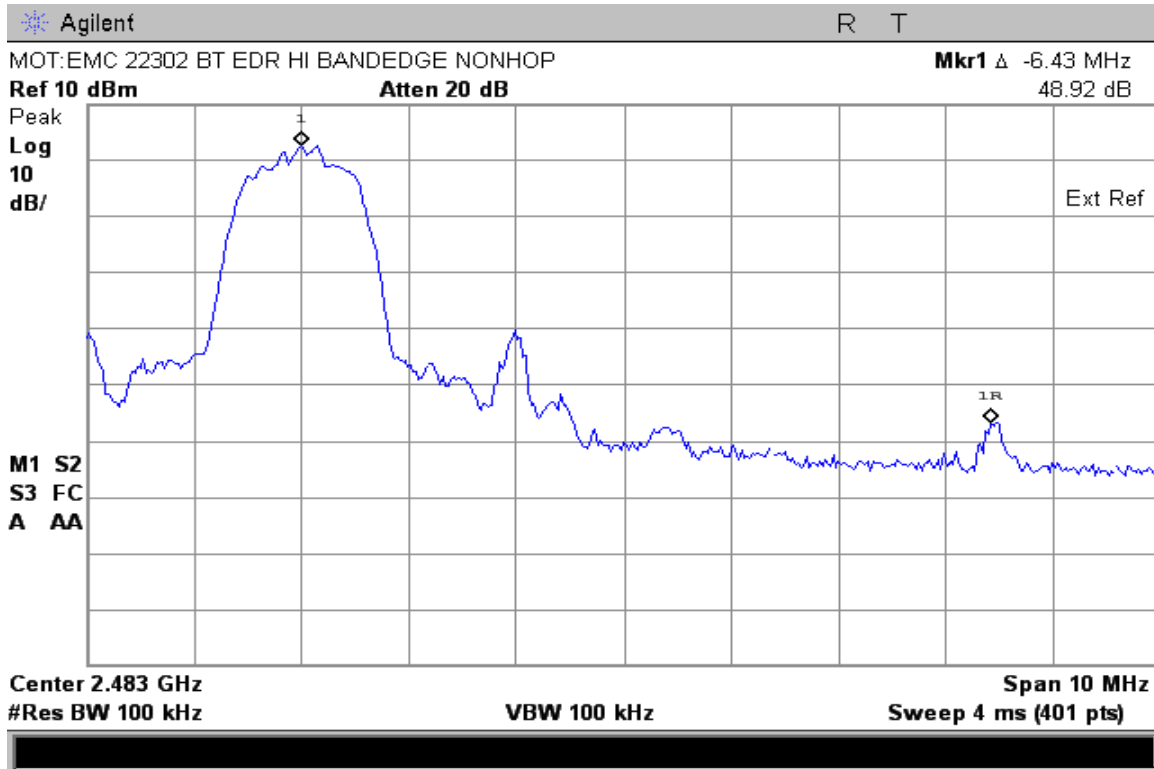

High Band Edge with Hopping Disabled (EDR MODE)

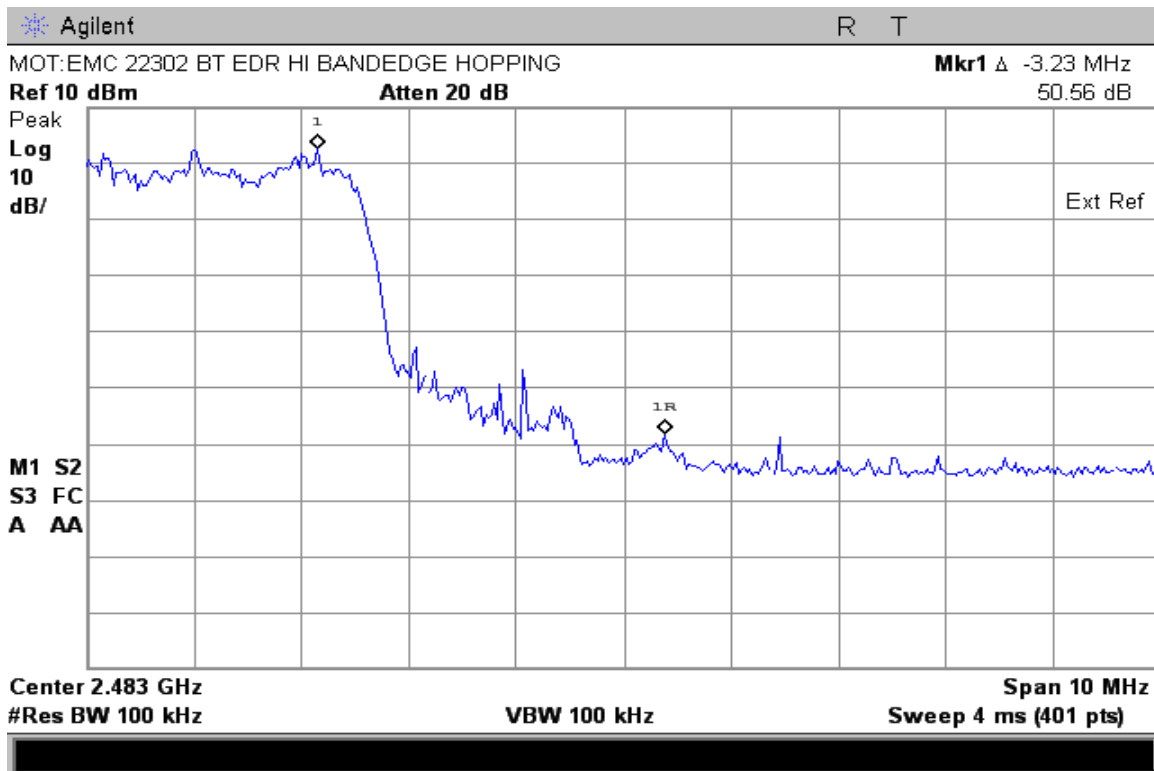

High Band Edge with Hopping Enabled (EDR MODE)

SPURIOUS RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

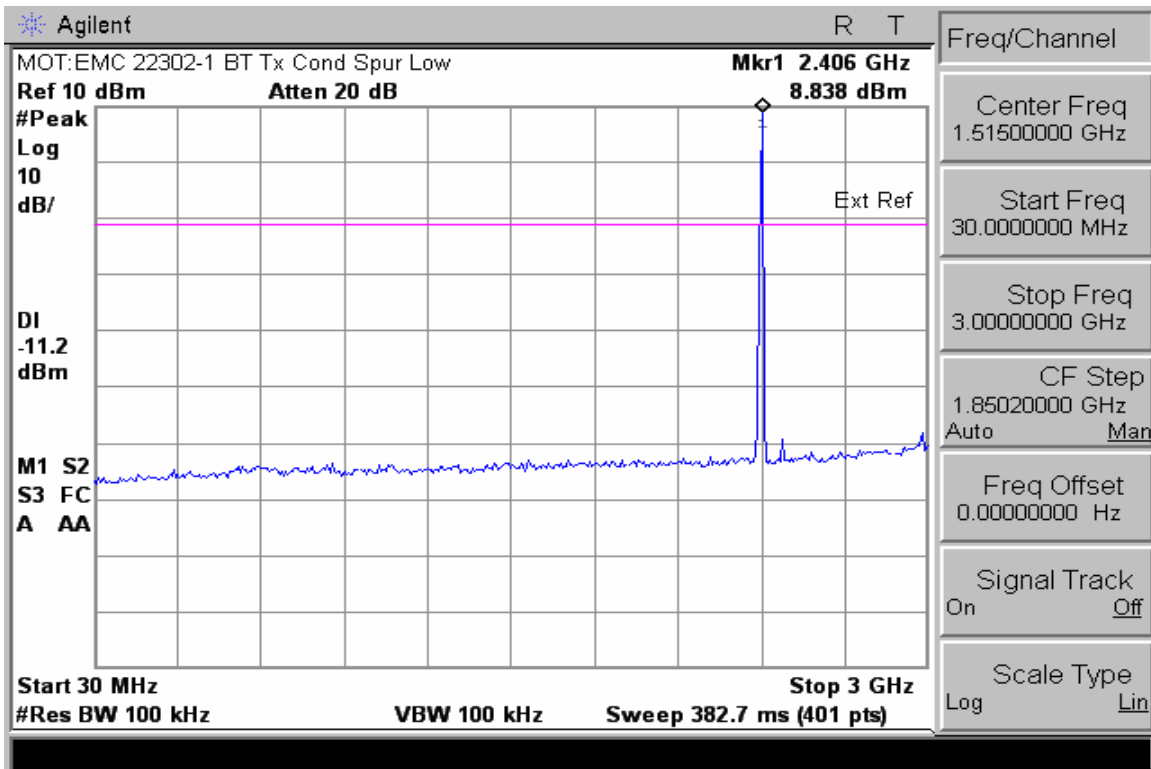


Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

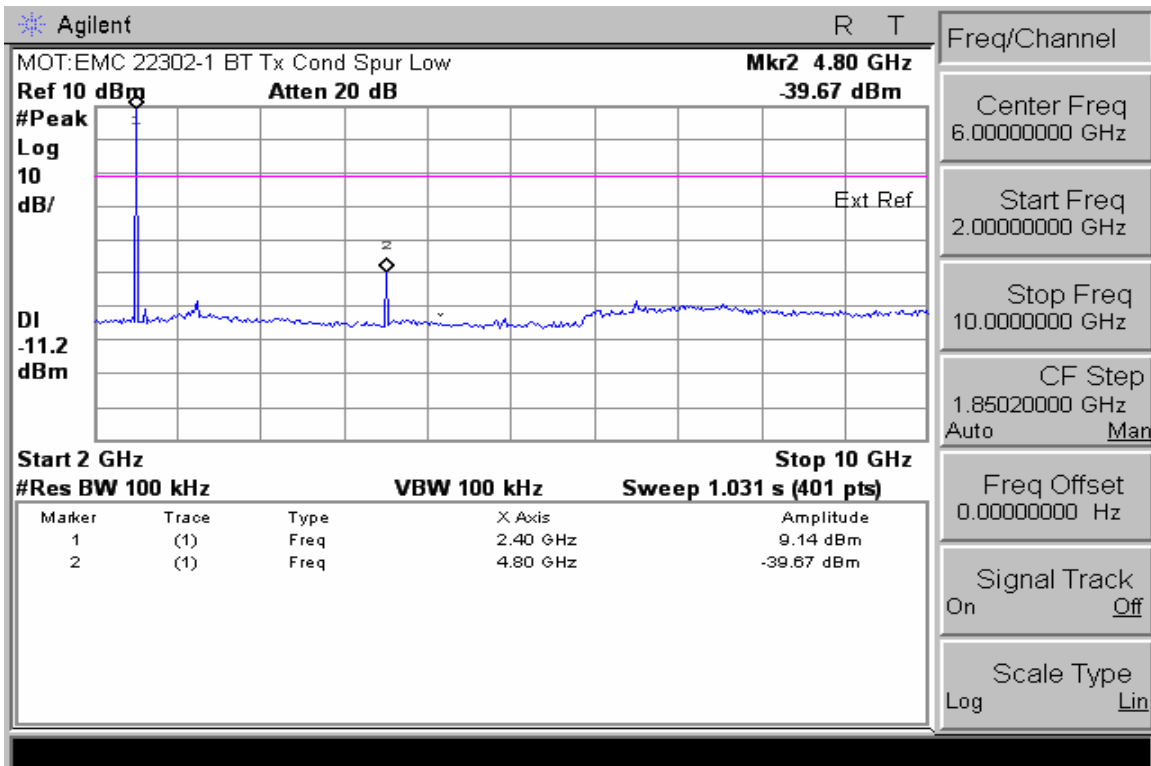


Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)

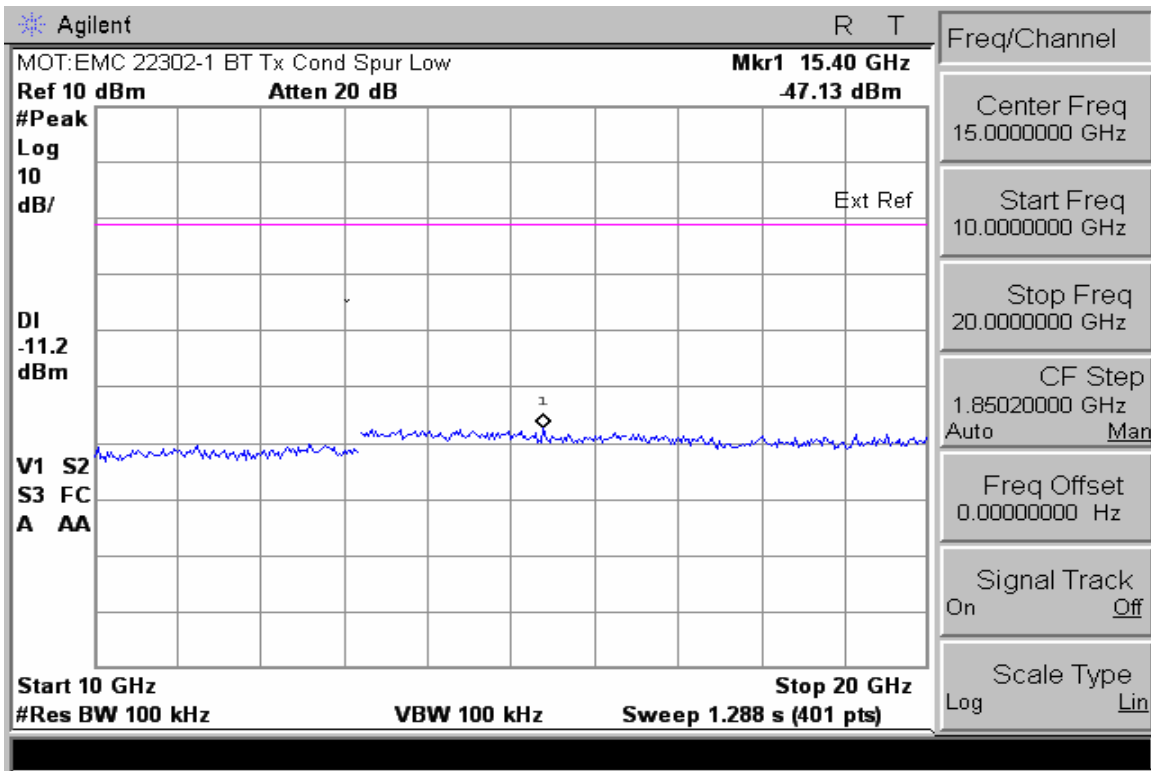


Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

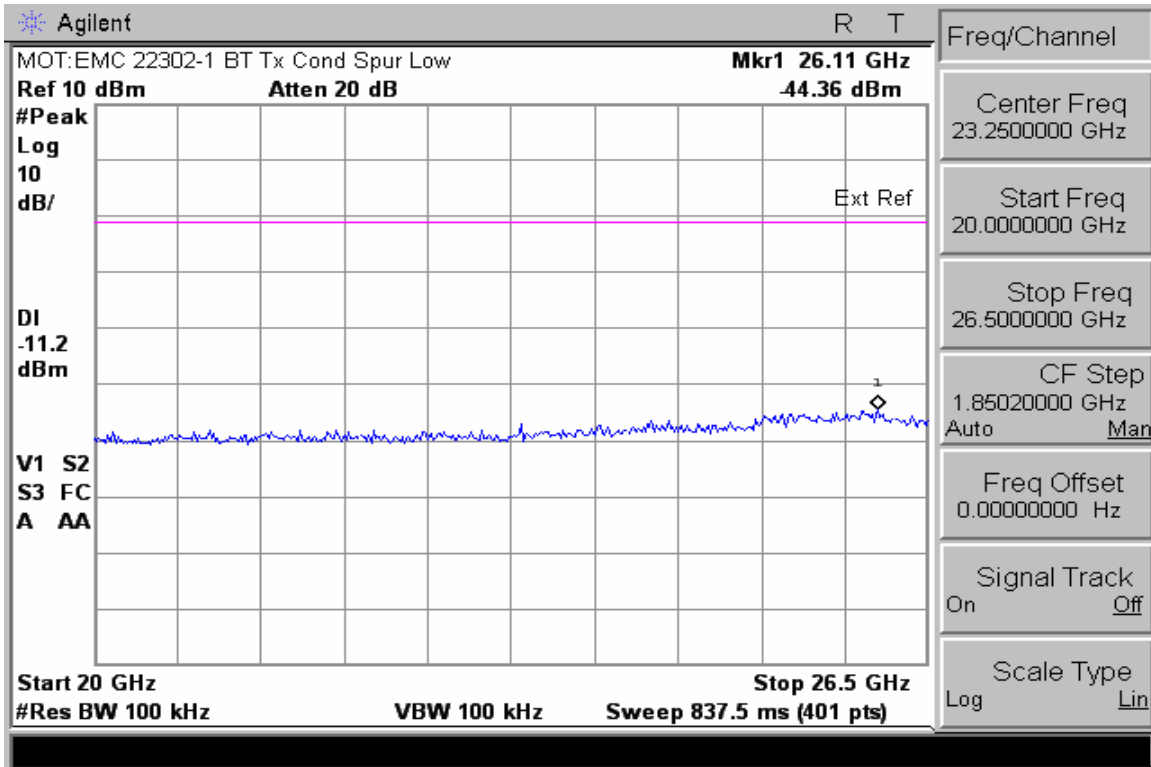


Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

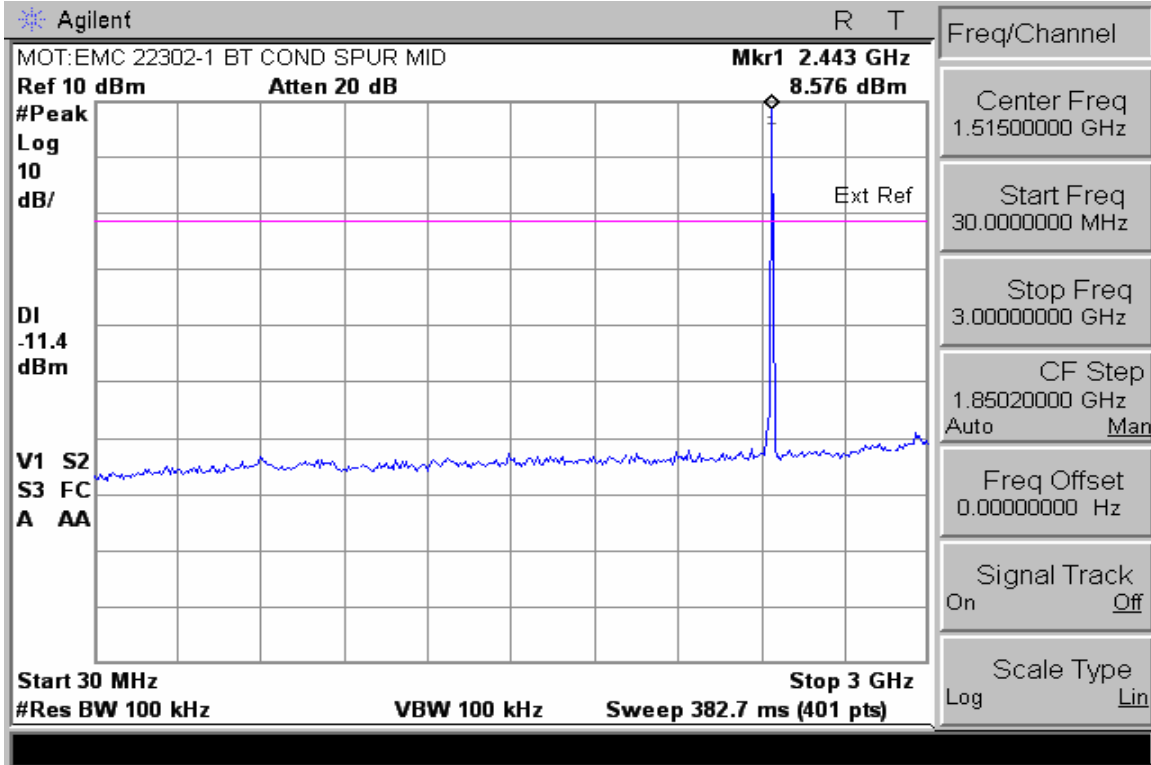


Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

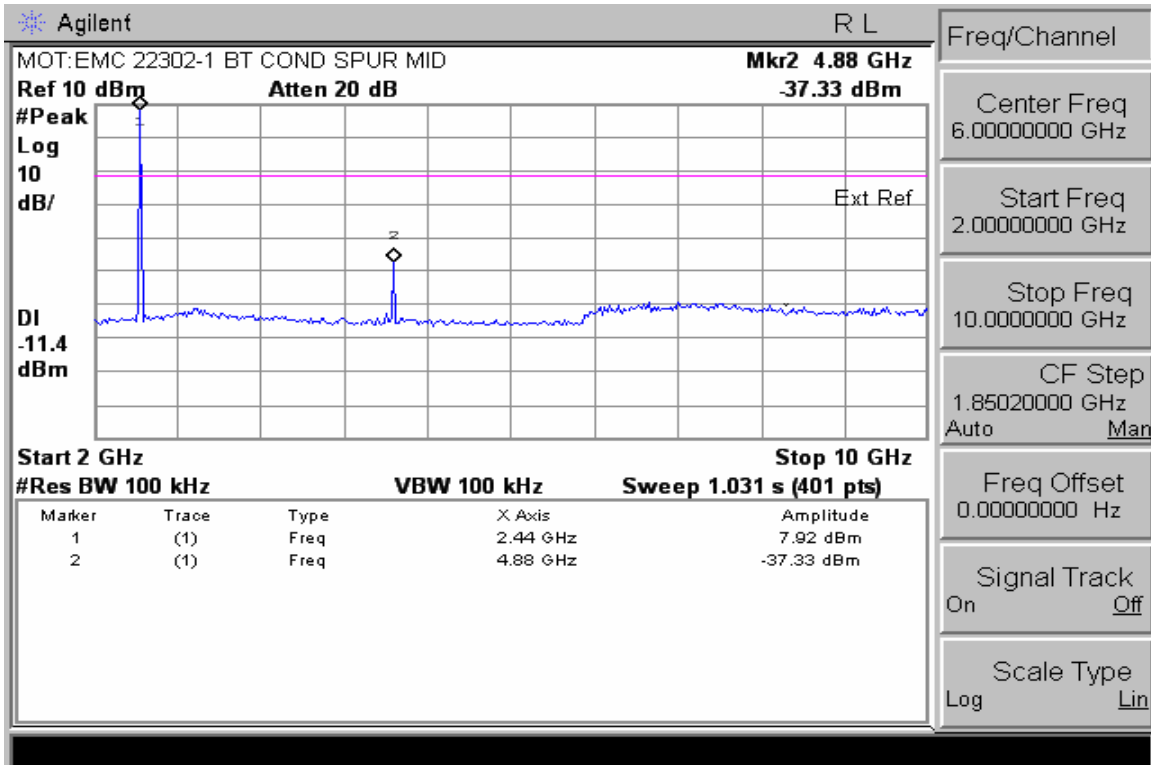


Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

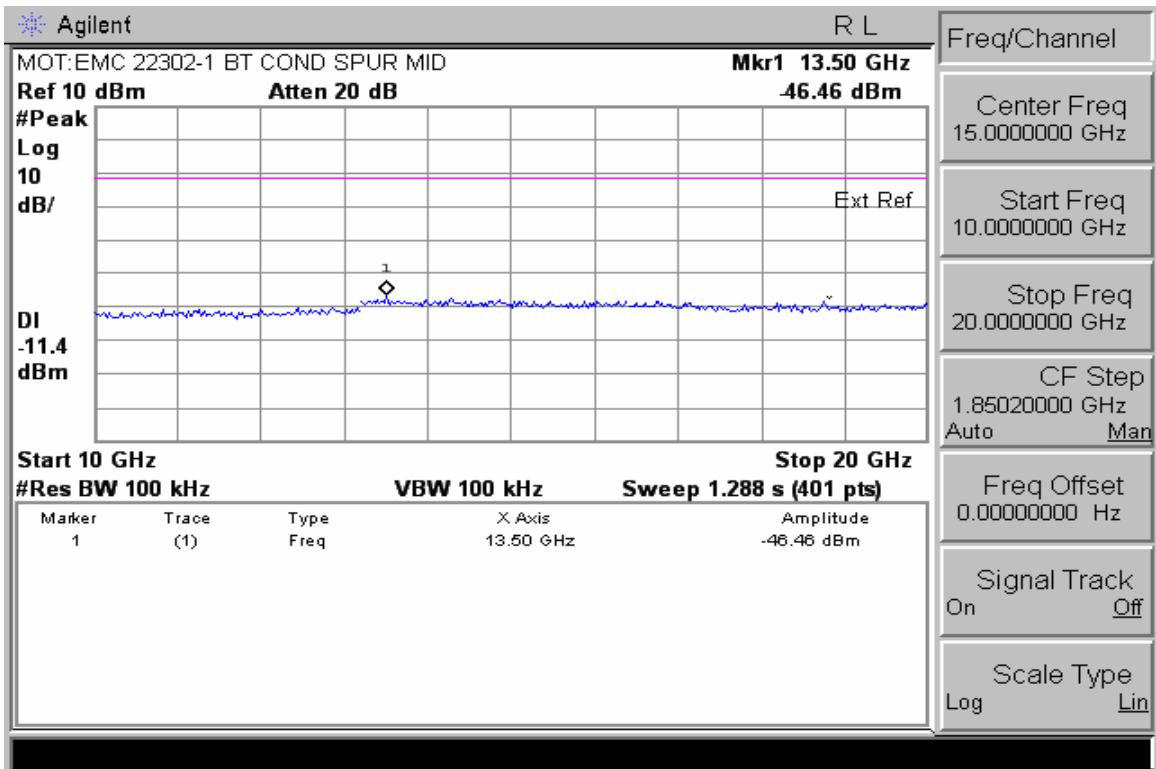


Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

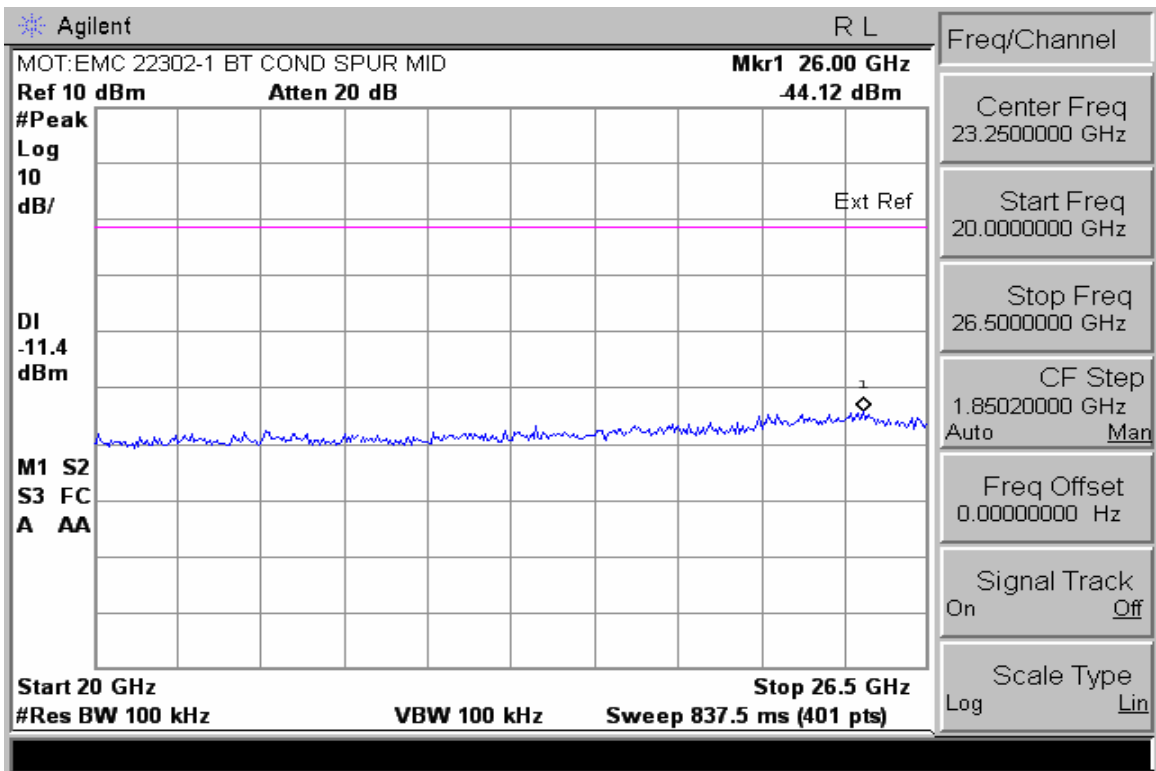


Conducted Spurious Emissions 20-26.5GHz (Mid Chan Enabled)

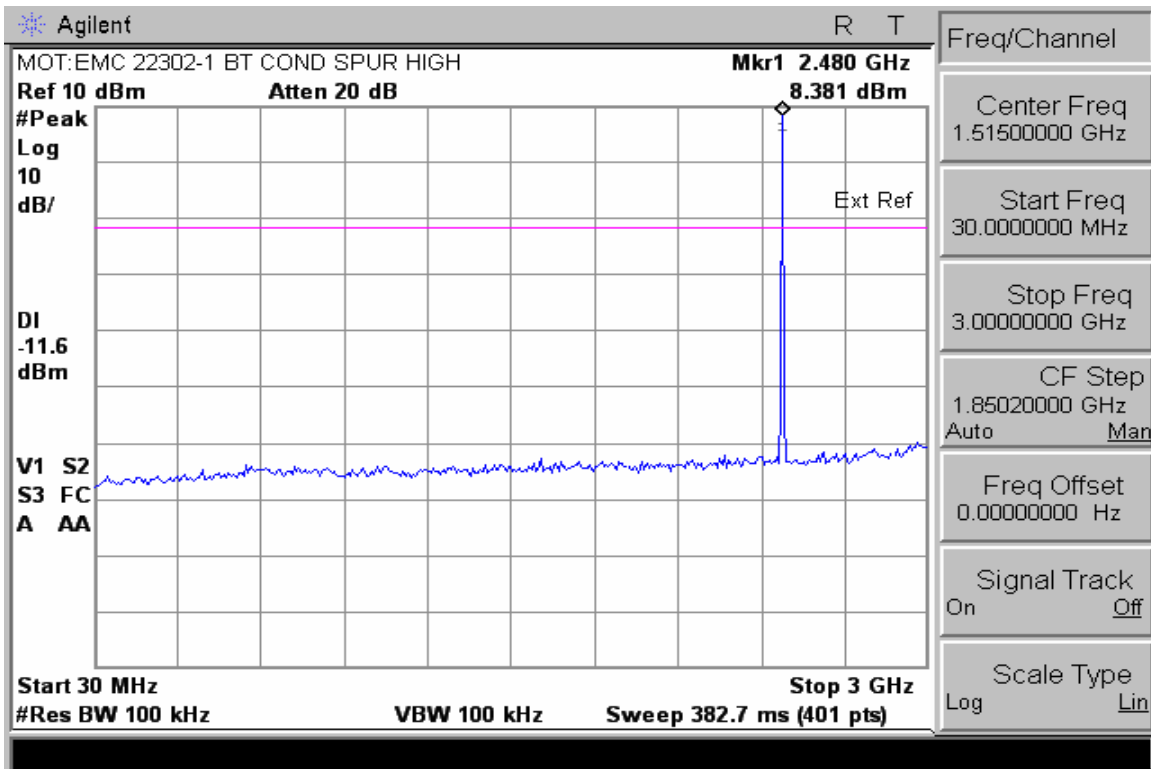


Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

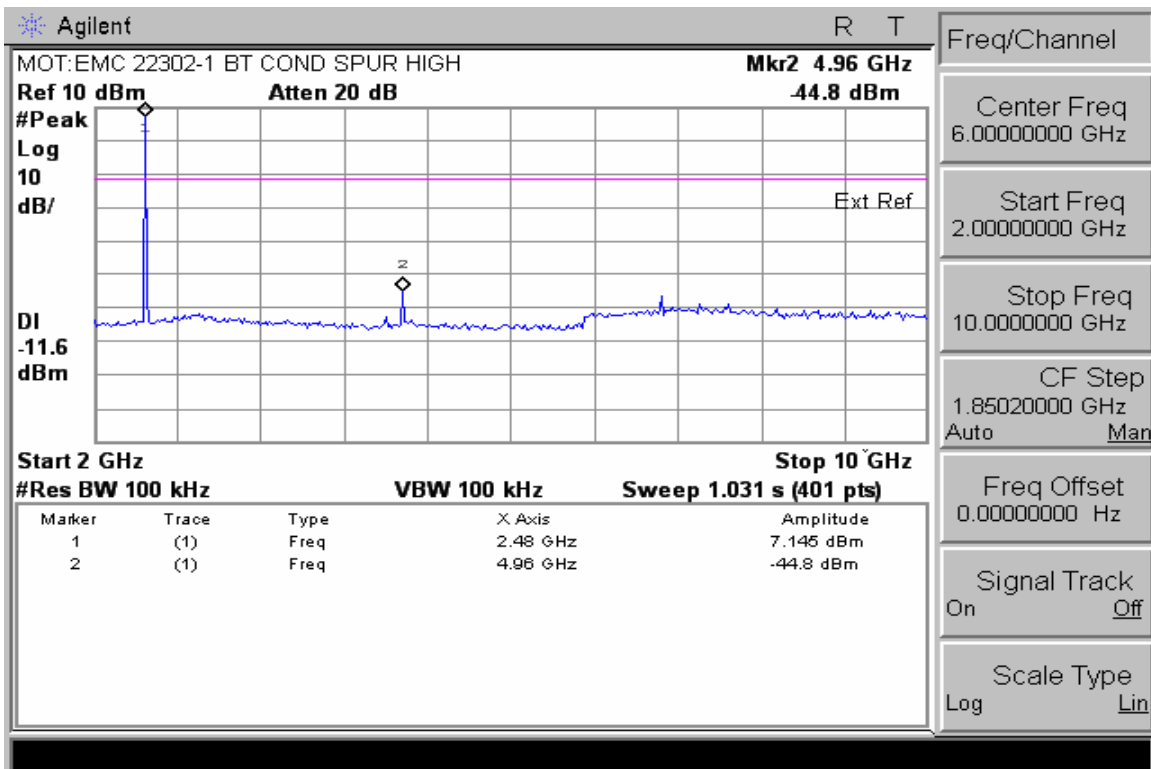

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

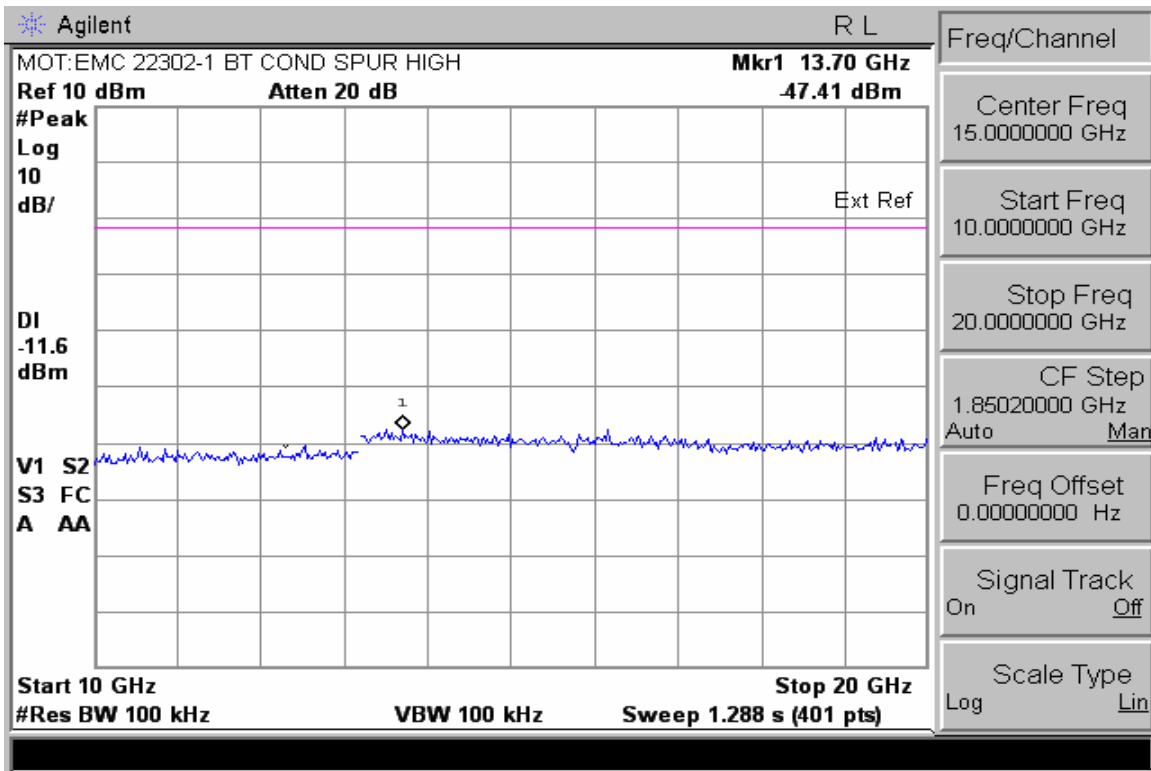

Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

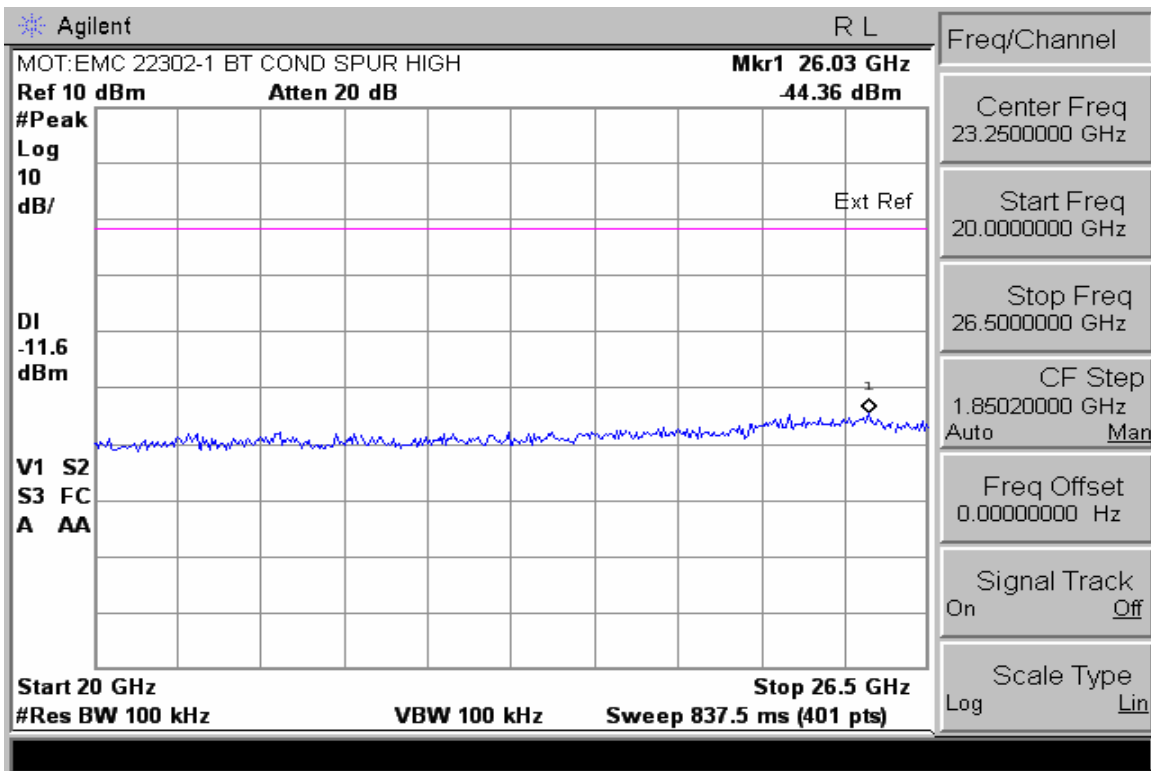

Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled)

AC LINE CONDUCTED

CFR 47 Part 15.207

Measurement Procedure


Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors – Quasi Peak and Average Detector.

Measurement Results

See attached:

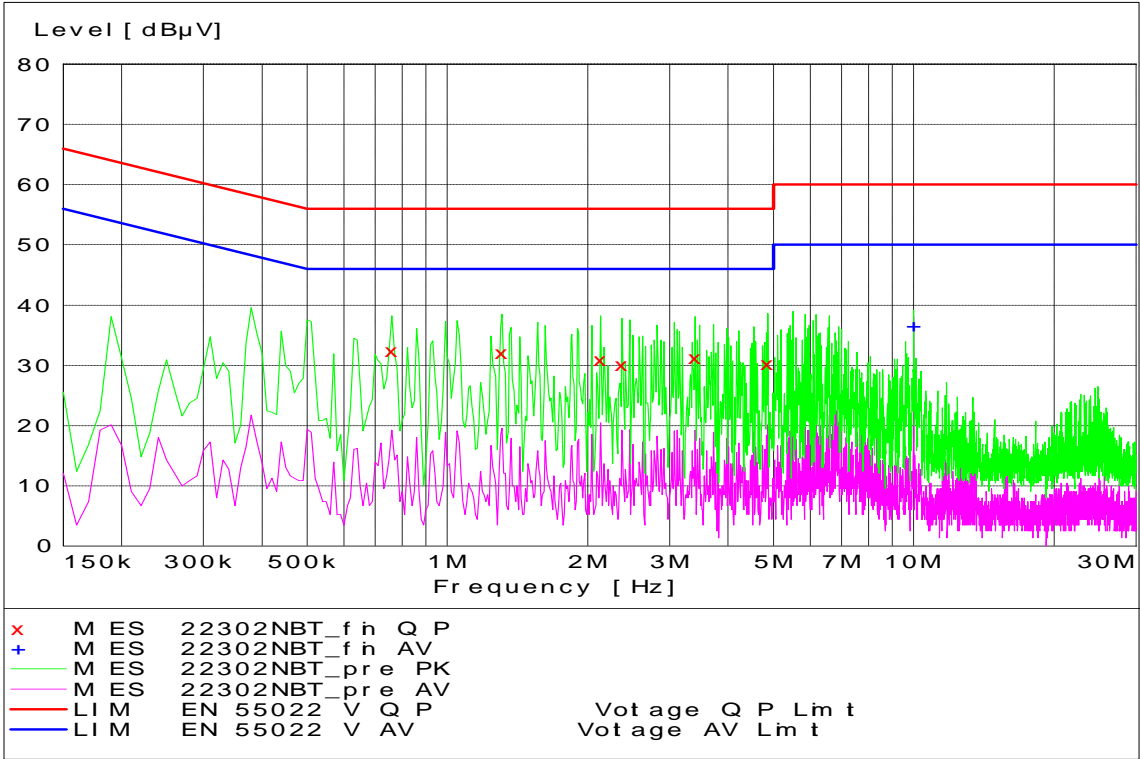

Bluetooth - Tx Mode - Neutral Coupling Hopping

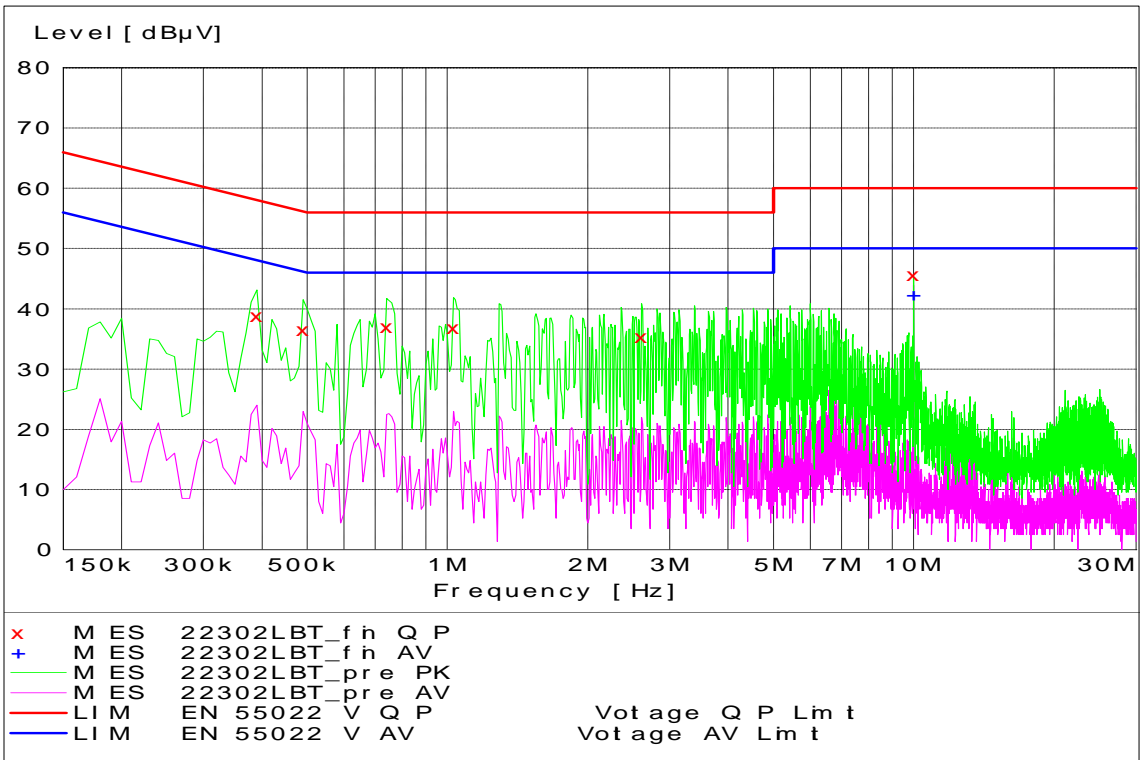

Bluetooth - Tx Mode - Line Coupling Hopping

End of Test Report