



**MOTOROLA**

**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 22302-1 Supplement

**Report Date** – September 17, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: September 17, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

## Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

## Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)  
Product Safety and Compliance Group  
600 North US Hwy 45  
Libertyville, IL 60048  
PH (847) 523-6167 Fax (847) 523-4538  
Motorola MDb FRN: 0004321311  
FCC Registration Number: 316588  
Industry Canada Number: IC1090-1

Tests Requested By: Motorola Inc.  
Mobile Devices business  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 850 & 1900, EDGE 850 & 1900, Bluetooth,  
WLAN

FCC ID: IHDP56JK1

Serial Numbers: 004401028257760, 004401028257588,  
004401028257737

Testing Complete Date: September 17, 2008

## Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47:

  X   Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI 63.4 2003

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

The EUT was tested using a fully charged battery.  
 All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

**Equipment List**

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	838786/010	2/28/09
Rohde Schwarz	Receiver	ESI26	100001	6/03/09
A.H. Systems	DRG Horn Antenna	SAS 200/571	265	1/18/09
ETS	Log-Periodic Antenna	3148	1189	10/10/08
ETS	Biconical Antenna	3110B	3369	10/04/08
Attenuator	Weinschel	AS-6	6675	6/13/09
Attenuator	Weinschel	AS-6	6677	6/17/09
Agilent	Microwave Preamplifier	8449B	3008A01442	2/25/09
ETS	LISN	3810/2NM	2179	1/23/09
ETS	LISN	3810/2NM	00023630	1/23/09
Dell	Laptop Computer	M20	NA	NA
Iomega	Zip Drive	Z250S	P9HM1992CK	NA
Olympus	Camera	D-600L	4020727	NA

All equipment is on a one-year calibration cycle.

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

The Dell M20 Laptop Computer, Iomega Z250S Zip Drive and the Olympus D-600L Camera are labeled as DoC.

## **Measurement Procedures and Data**

### **FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS**

#### **Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

#### **Test Setup**

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

**Measurement Results**

Operating Mode – Rx Mode, Data Transfer Mode.

Notes: Worst Case emissions reported.

**30 MHz – 1000 MHz**

Frequency MHz	Level dBuV/m	Measured dBuV	Transd dB	Cables dB	Limit dBuV/m	Margin dB	Height cm	Angle deg	Pol.
39.88	30.21	11.41	10.8	8	40	9.8	115	93	VERT
130.92	37.57	16.05	12.1	9.4	43.5	5.9	332	242	HORI
137.72	34.04	12.02	12.6	9.5	43.5	9.5	400	170	VERT
146.48	35.37	12.72	13.1	9.6	43.5	8.1	400	199	VERT
320.64	44.59	18.29	15.1	11.2	46	1.4	100	265	HORI
902.44	37.01	-1.16	23.6	14.6	46	9	300	157	HORI
921.84	37.38	-1.16	23.9	14.6	46	8.6	149	92	HORI
951.88	37.29	-1.16	23.6	14.8	46	8.7	301	71	HORI

**Above 1 GHz**

Frequency MHz	Level dBuV/m	Measured dBuV	Transd dB	Gain dB	Limit dBuV/m	Margin dB	Height cm	Angle deg	Pol.
1062.4	37.8	31.39	23.6	17.2	54	16.2	115	49	VERT
1065.1	38.59	32.17	23.6	17.2	54	15.4	332	97	VERT
1118.4	42.56	35.9	23.9	17.3	54	11.4	375	343	VERT
1118.5	42.52	35.86	23.9	17.3	54	11.5	335	78	VERT
1119	42.28	35.62	23.9	17.3	54	11.7	400	341	VERT
1122.2	42.71	36.01	24	17.3	54	11.3	374	346	VERT
1122.5	37.52	30.82	24	17.3	54	16.5	250	97	VERT
1126.2	43.37	36.64	24	17.3	54	10.6	383	341	VERT
1126.8	42.38	35.64	24	17.3	54	11.6	100	330	VERT
1130.7	42.07	35.3	24	17.2	54	11.9	384	338	VERT
1306.8	37.25	29.91	24.4	17.1	54	16.8	150	308	VERT
1489.4	37.52	29.83	24.6	16.9	54	16.5	375	25	VERT
1512	37.07	29.32	24.6	16.9	54	16.9	115	266	VERT

**Peak Radiated Data for Emissions above 1GHz**

Frequency MHz	Level dBuV/m	Angle deg	Height cm	Pol.
1062.12	54.03	54	100	VER
1064.12	54.02	103	300	VER
1118.23	55.89	1	400	VER
1120.24	54.47	84	300	VER
1122.24	55.04	75	300	VER
1124.24	54.1	347	400	VER
1126.25	56.24	347	400	VER
1128.25	54.6	335	100	VER
1306.61	53.58	330	200	VER
1490.98	54.13	22	400	VER
1511.02	53.97	278	100	VER

## **AC LINE CONDUCTED EMISSIONS**

### **Measurement Procedure**

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50  $\Omega$  LISN port, where permitted, terminated into a 50  $\Omega$  noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  radio-noise meter or a 50  $\Omega$  resistive load. All other ports are terminated in 50  $\Omega$ .

Detectors - Quasi Peak and Average Detector


### **Test Setup**

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.


### **Measurement Results**

See attached:

**AC LINE COMPUTER PERIPHERAL - Tx Mode - Line Coupling**

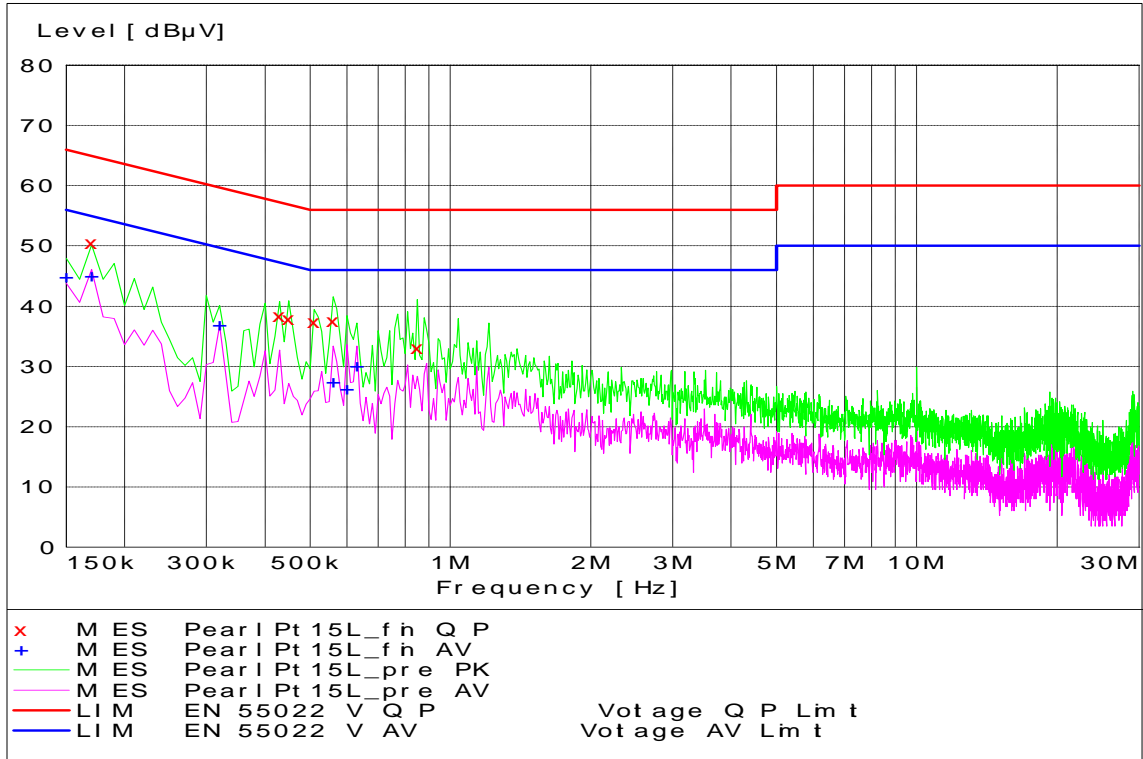

**AC LINE COMPUTER PERIPHERAL - Tx Mode - Neutral Coupling**

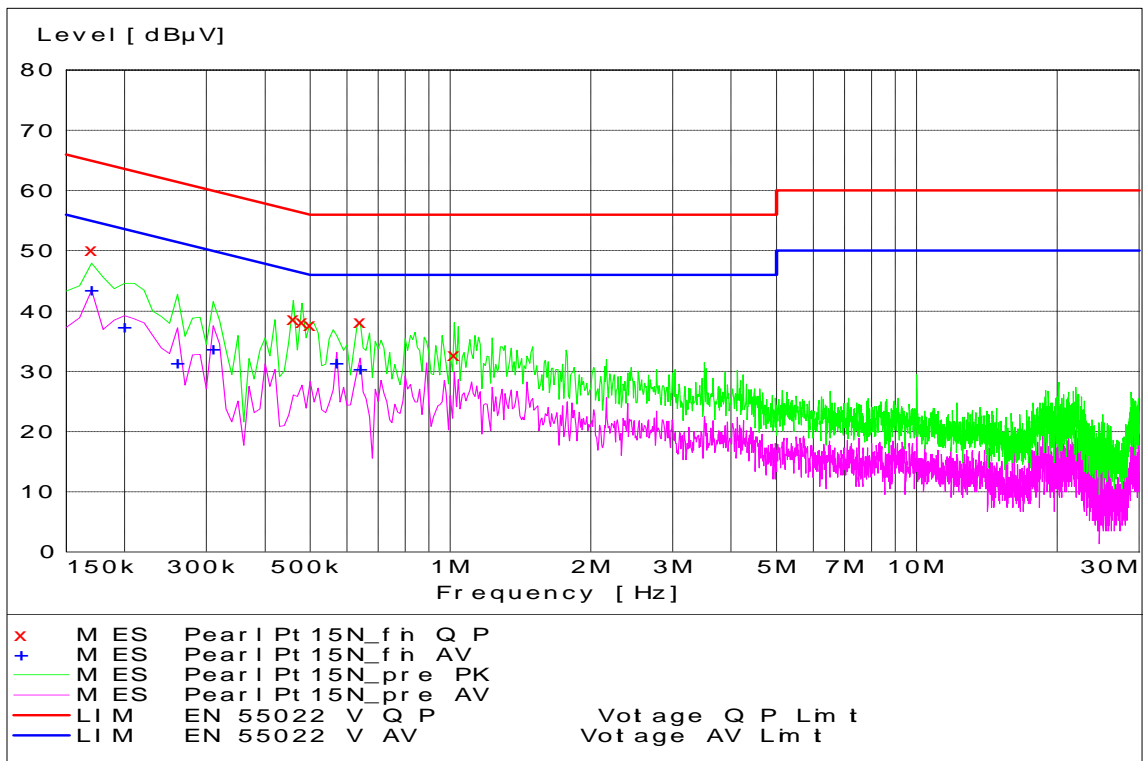

**End of Test Report**