



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 22334-1 Supplement

**Report Date** – September 17, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Albert J. Patapack

Title: EMC Engineer

Date: September 17, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

## Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

**Test Report Details**

Tests Performed By: Motorola Mobile Devices business (MDb)  
 Product Safety and Compliance Group  
 600 North US Hwy 45  
 Libertyville, IL 60048  
 PH (847) 523-6167 Fax (847) 523-4538  
 Motorola MDb FRN: 0004321311  
 FCC Registration Number: 316588  
 Industry Canada Number: 1090-1

Tests Requested By: Motorola Inc.  
 Mobile Devices business  
 600 North US Hwy 45  
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: CDMA 800, CDMA 1900, Bluetooth

FCC ID : IHDP56JX1

Serial Numbers: 808C7426, 8065EA59

Testing Complete Date: September 5, 2008

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 :

X  Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI 63.4 2003

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

The EUT was tested using a fully charged battery.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

**Equipment List**

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	838786/010	2/28/2009
Rohde Schwarz	Receiver	ESI26	100001	6/03/2009
ETS	DRG Horn Antenna	3115	6222	5/02/2009
ETS	Log-Periodic Antenna	3148	1189	10/10/2008
ETS	Biconical Antenna	3110B	3369	10/04/2008
Attenuator	Weinschel	AS-6	6675	6/13/2009
Attenuator	Weinschel	AS-6	6677	6/17/2009
ETS	LISN	3810/2NM	2179	1/23/2009
ETS	LISN	3810/2NM	00023630	1/23/2009
Dell	Laptop Computer	M20	NA	NA
Iomega	Zip Drive	Z250S	P9HM1992CK	NA
Olympus	Camera	D-600L	4020727	NA

All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service. All equipment is on a one-year calibration cycle.

The Dell M20 Laptop Computer, the Iomega Z250S Zip Drive and the Olympus D-600L Camera are labeled as DoC.

## **Measurement Procedures and Data**

### **FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS**

#### **Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

#### **Test Setup**

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

**Measurement Results**

Operating Mode – Rx Mode, Data Transfer Mode.

Note: Worst Case emissions reported.

30 MHz – 1000 MHz

Frequency MHz	Level dBµV/m	Measured dBµV	Transd dB	Cables dB	Limit dBµV/m	Margin dB	Height cm	Angle deg	Pol.
36.00	38.44	19.16	11.4	7.9	40	1.6	400	293	VERT
48.00	36.26	18.2	9.9	8.2	40	3.7	150	7	VERT
60.00	39.55	22.23	9.0	8.4	40	0.5	150	219	VERT
147.28	39.69	17.02	13.1	9.6	43.5	3.8	100	146	VERT
320.64	44.55	18.25	15.1	11.2	46	1.5	100	257	HORI
932.12	37.42	-1.11	23.8	14.7	46	8.6	128	0	HORI
944.04	37.13	-1.16	23.5	14.8	46	8.9	340	98	HORI

Above 1 GHz

Frequency MHz	Level dBµV/m	Measured dBµV	Transd dB	Gain dB	Limit dBµV/m	Margin dB	Height cm	Angle deg	Pol.
1063.9	37.63	31.12	23.7	17.2	54	16.4	150	177	HORI
1118.1	42.63	35.97	23.9	17.3	54	11.4	379	340	VERT
1119.1	42.51	35.84	23.9	17.3	54	11.5	384	343	VERT
1122.4	42.59	35.89	24	17.3	54	11.4	357	342	VERT
1126.2	43.58	36.85	24	17.3	54	10.4	365	341	VERT
1126.7	44.5	37.77	24	17.3	54	9.5	376	341	VERT
1129.7	42.16	35.4	24	17.2	54	11.8	366	342	VERT
1487.9	37.99	30.31	24.6	16.9	54	16	350	328	VERT
1497.1	38.36	30.67	24.6	16.9	54	15.6	380	327	VERT
1511.9	37.19	29.44	24.6	16.9	54	16.8	282	96	VERT

Peak Radiated Data for Emissions Above 1GHz

Frequency MHz	Level dB $\mu$ V/m	Angle deg	Height cm	Pol.
1062.12	54.31	156	200	HOR
1064.13	53.41	143	100	HOR
1116.23	53.23	344	400	VER
1118.24	56.84	344	400	VER
1120.24	56.28	342	400	VER
1122.24	56.56	337	400	VER
1124.29	53.36	346	400	VER
1126.25	56.98	344	400	VER
1128.26	54.41	344	400	VER
1130.26	55.9	342	400	VER
1486.97	54.01	333	400	VER
1488.98	53.95	284	400	HOR
1496.99	53.43	93	100	VER
1498.99	52.26	16	400	VER
1509.02	52.27	197	400	VER
1511.02	53.03	283	200	VER
1513.03	55.87	95	300	VER

## **AC LINE CONDUCTED EMISSIONS**

### **Measurement Procedure**

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50  $\Omega$  LISN port, where permitted, terminated into a 50  $\Omega$  noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  radio-noise meter or a 50  $\Omega$  resistive load. All other ports are terminated in 50  $\Omega$ .


Detectors - Quasi Peak and Average Detector

### **Test Setup**


The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

### **Measurement Results**

See attached:

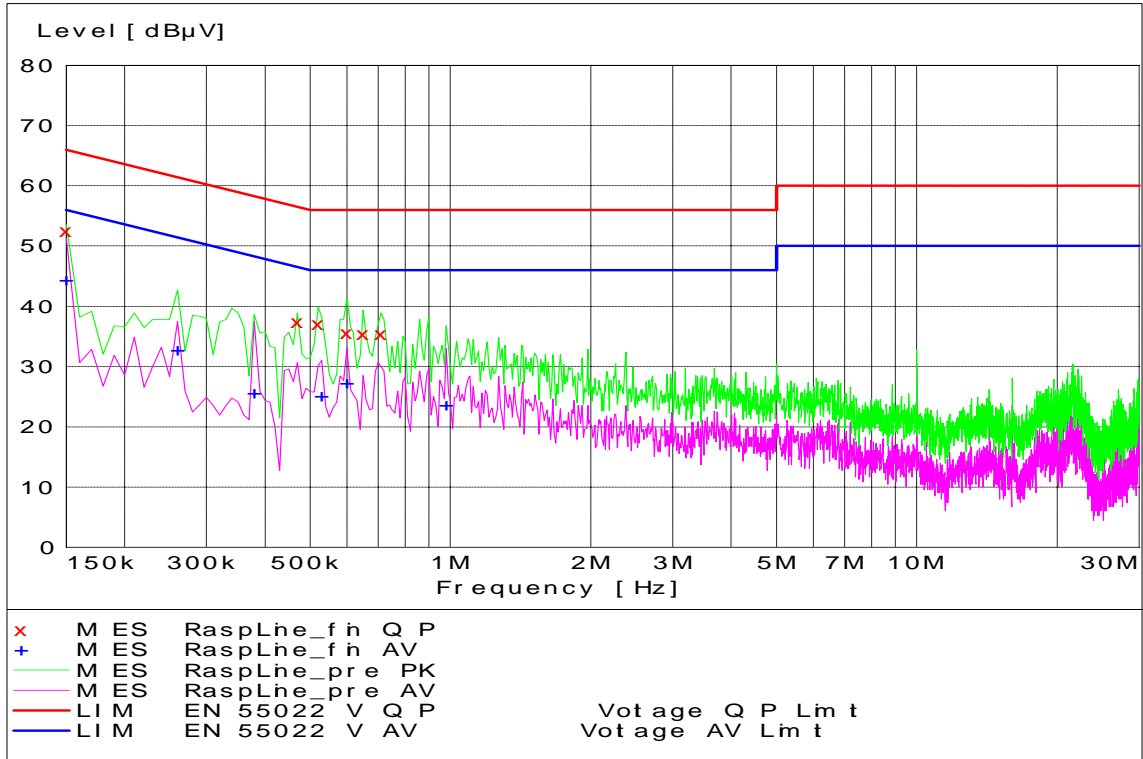

**Pt 15 - Tx Mode - Line Coupling**

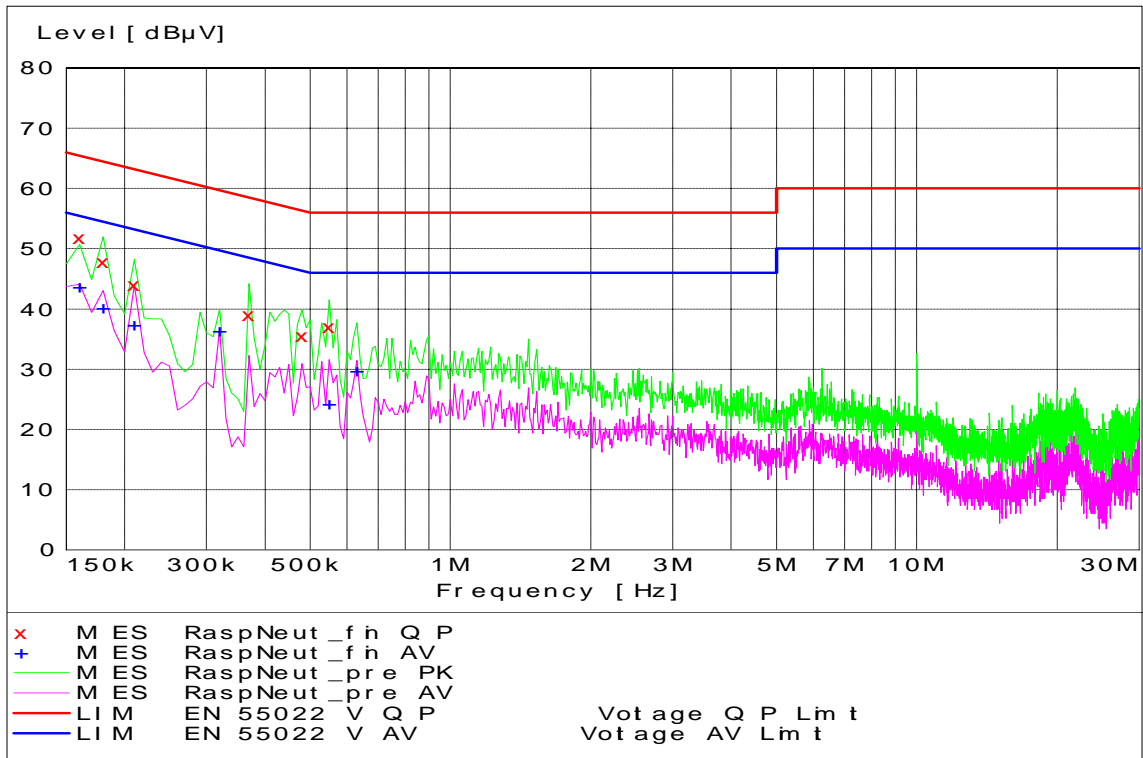

**Pt 15 - Tx Mode - Neutral Coupling**

**End of Test Report**