



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT - Addendum**

Test Report Number – 23286-2

Report Date – 2009-09-17

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2009-08-26 to 2009-09-17

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2009-09-17

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885  
IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ  
ISO/IEC-17025:2005 accredited by UKAS



## **Table of Contents**

|   |    |
|---|----|
| <b><u>Test Report Details</u></b> .....                     | 3  |
| <b><u>Summary of Testing</u></b> .....                      | 4  |
| <b><u>General and Special Conditions</u></b> .....          | 4  |
| <b><u>Equipment and Cable Configurations</u></b> .....      | 5  |
| <b><u>Measurement Procedures and Data</u></b> .....         | 7  |
| <b><u>RF POWER OUTPUT</u></b> .....                         | 7  |
| <b><u>RADIATED POWER (EIRP AND ERP)</u></b> .....           | 8  |
| <b><u>OCCUPIED BANDWIDTH</u></b> .....                      | 9  |
| <b><u>SPURIOUS EMISSIONS AT ANTENNA TERMINALS</u></b> ..... | 16 |
| <b><u>FIELD STRENGTH OF SPURIOUS EMISSIONS</u></b> .....    | 19 |
| <b><u>FREQUENCY STABILITY</u></b> .....                     | 22 |

**Test Report Details**

Tests Performed By: Motorola (China) Technologies Ltd.  
Asia Global Compliance Labs  
No.1 Wang Jing East Road  
Chao Yang District  
Beijing, 100102, P. R. China  
Phone: +86 10 8473 2610  
FCC Registration Number: 177885  
IC Registration Number: 109AW-1

Tests Requested By: Motorola Inc.  
Mobile Devices business  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 900/2100, GSM 850/900/1800/1900,  
HSDPA 10.2 Mbps (Category 9/10), EDGE Class  
12, GPRS Class 12, HSUPA 5.76 Mbps, aGPS,  
Bluetooth, Version 2.0 + EDR, 802.11b/802.11g

IMEI: 004401027563069, 004401027563051

FCC ID: IHDP56KC2

Project number: 23286-2

Testing Complete Date: 09-17-2009

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

  X   Part 2  
  X   Part 22 Subpart H - Public Mobile Services  
  X   Part 24 Subpart E – Personal Communications Services

Applicable Standards: ANSI C63.4-2003, ANSI/TIA-603-C-2004, RSS-Gen Issue 2, RSS-132 Issue 2, RSS-133 Issue 5.

**Summary of Testing**

| Test # | Test Name                                 | Pass/Fail |
|--------|---|-----------|
| 1      | RF Power Output                           | NA        |
| 2      | ERP (Effective Radiated Power)            | Pass      |
| 3      | EIRP (Effective Isotropic Radiated Power) | Pass      |
| 4      | Occupied Bandwidth                        | Pass      |
| 5      | Spurious Emissions at Antenna Terminal    | Pass      |
| 6      | Field Strength of Spurious Emissions      | Pass      |
| 7      | Frequency Stability                       | Pass      |

| Test # | Test Name                                 | Margin with respect to the Limit |
|--------|---|----------------------------------|
| 1      | RF Power Output                           | NA                               |
| 2      | ERP (Effective Radiated Power)            | See results                      |
| 3      | EIRP (Effective Isotropic Radiated Power) | See results                      |
| 4      | Occupied Bandwidth                        | See Plots                        |
| 5      | Spurious Emissions at Antenna Terminal    | See results                      |
| 6      | Field Strength of Spurious Emissions      | See results                      |
| 7      | Frequency Stability                       | See results                      |

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4-2003 Standard requirements during the entire duration of testing.

**Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

| <b>Equipment</b>    | <b>Model/type</b> | <b>Serial number</b> | <b>Operational range</b>                                 | <b>Date of calibration</b> |
|---------------------|-------------------|----------------------|--|----------------------------|
| EMI analyzers       | ESU 40            | 100036               | 20 Hz – 40 GHz   | 12.11.2008                 |
| Pre Amplifiers      | PA-02-0001:       | 2007343              | (10 kHz – 3 GHz)   | 06.26.2009                 |
|                     | PA-02-218         | 2007344              | 3 GHz – 18 GHz   | 06.26.2009                 |
|                     | PA-02-5           | 2007345              | 18 GHz – 40 GHz  | 06.26.2009                 |
| Radio com. Tester   | CMU 200           | 112790               | GSM<br>850/900/1800/1900<br><br>UMTS, CDMA,<br>Bluetooth | N/A                        |
| Band Reject Filter  | WRCD              | N/A                  | GSM<br>850/900/1800/1900<br><br>UMTS, CDMA               | N/A                        |
|                     | 4N45-24241/3/6    | N/A                  | WLAN   | N/A                        |
| EMI analyzers       | R&S ESCI          | 100650               | 9 kHz – 3 GHz  | 12.11.2008                 |
| LISN                | ENV216            | 100055               | 9 kHz – 30 MHz   | 12.16.2008                 |
| Environment Chamber | Votsch VT4004     | 3546270300000<br>20  | -50 <sup>0</sup> C -150 <sup>0</sup> C                   | 12.16.2008                 |
| DC Power Supply     | Agilent E3632A    | My40021519           | 15V/7A   | 12.15.2008                 |
| Power meter         | Agilent E4416A    | MY451000906          | NA   | 03.03.2009                 |
| Power sensor        | Agilent E9323A    | MY44420783           | 50MHz-6GHz   | 03.03.2009                 |

The antennas used in the various tests are listed in the below table.

| <b>Antenna</b>      | <b>Type</b>      | <b>Serial number</b> | <b>Operational range</b> | <b>Date of calibration</b> |
|---------------------|------------------|----------------------|--------------------------|----------------------------|
| Hybrid-log periodic | TDK HLP<br>3003C | 130361               | 30 MHz – 3 GHz           | 11.07.08                   |
| Double ridged Horn  | TDK HRN0118      | 130303               | 1 GHz – 18 GHz           | 03.26.09                   |
| Double ridged Horn  | ETS HRN3116      | 00071938             | 18 GHz – 40 GHz          | 10.17.08                   |

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

Note that the Agilent power meter, power sensor and the preamplifier are on a two-year calibration cycle. All other equipments are on a one-year calibration cycle.

**Measurement Procedures and Data**

**RF POWER OUTPUT**

**Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of an Agilent power meter through a 30dB passive attenuator, adaptor (if needed), and specialized RF connector.

**Measurement Results**

**GSM 850**

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 824.2           | 33.20       |
| 836.6           | 32.09       |
| 848.8           | 33.08       |

**GSM 1900**

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 1850.2          | 30.20       |
| 1880.0          | 29.88       |
| 1909.8          | 29.92       |

**EDGE 850**

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 824.2           | 27.40       |
| 836.6           | 27.33       |
| 848.8           | 27.31       |

**EDGE 1900**

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 1850.2          | 26.70       |
| 1880.0          | 26.43       |
| 1909.8          | 26.53       |

**RADIATED POWER (EIRP AND ERP)****Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center 3 meters from the receive antenna. The antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

An average detector was used in the 1900 band.

Based on the frequency either a horn antenna or a dipole antenna was used as the substitution antenna.

**Measurement Results**

| <b>Band</b> | <b>EIRP dBm</b> | <b>ERP dBm</b> |
|-------------|-----------------|----------------|
| GSM 850     | 30.34           | <b>28.19</b>   |
| GSM 1900    | <b>31.7</b>     | 29.55          |
| EDGE 850    | 29.55           | <b>27.4</b>    |
| EDGE 1900   | <b>30.17</b>    | 28.02          |

## **OCCUPIED BANDWIDTH**

### **Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 6dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. For all testing the EUT was powered through the computer's USB port.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

### **Measurement Results**

Attached


**Measurement Results – GSM 850**

**GSM 850 – Reference Level Plot – Channel 190 (836.60 MHz)**

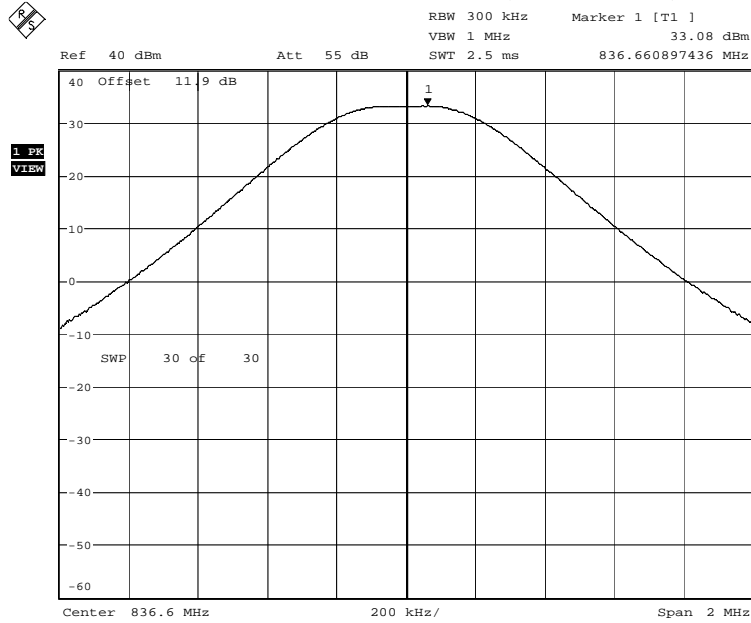


Date: 31.AUG.2009 08:51:13

**GSM 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

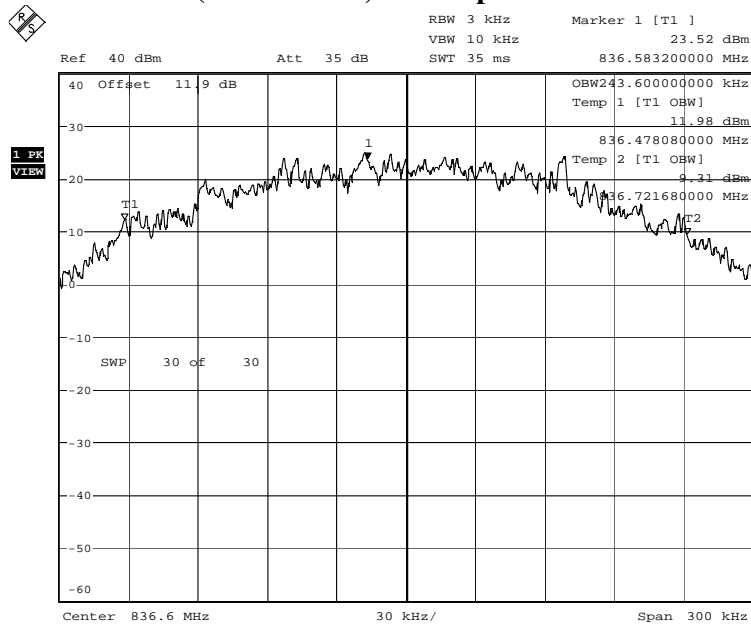


Date: 31.AUG.2009 08:55:59

### GSM 850 – Lower Band Edge – Channel 128 (824.2 MHz)

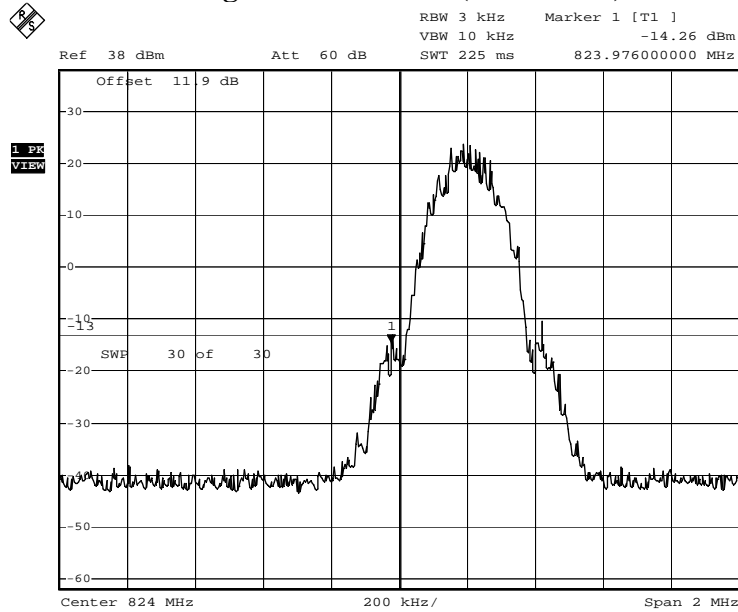

Date: 31.AUG.2009 18:12:38


### GSM 850 – Upper Band Edge – Channel 251 (848.8 MHz)

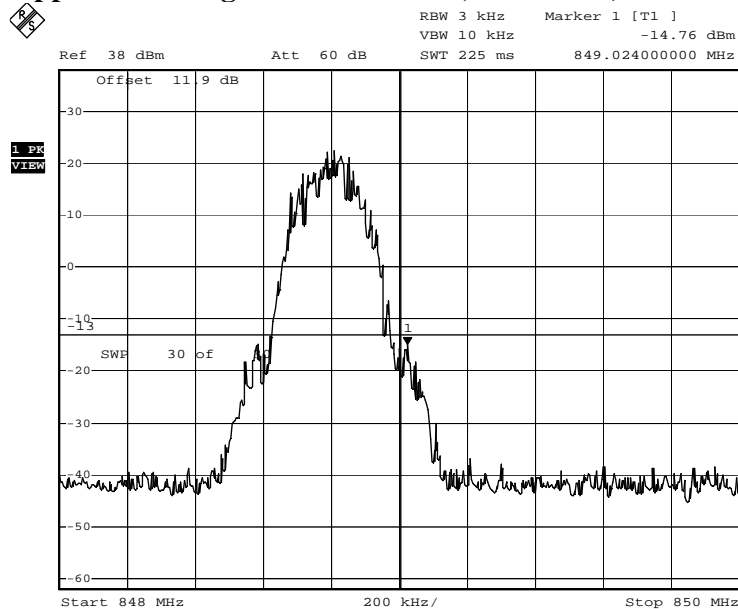

Date: 31.AUG.2009 18:14:38


**Measurement Results – GSM 1900**

**GSM 1900 – Reference Level Plot – Channel 661 (1880.00 MHz)**

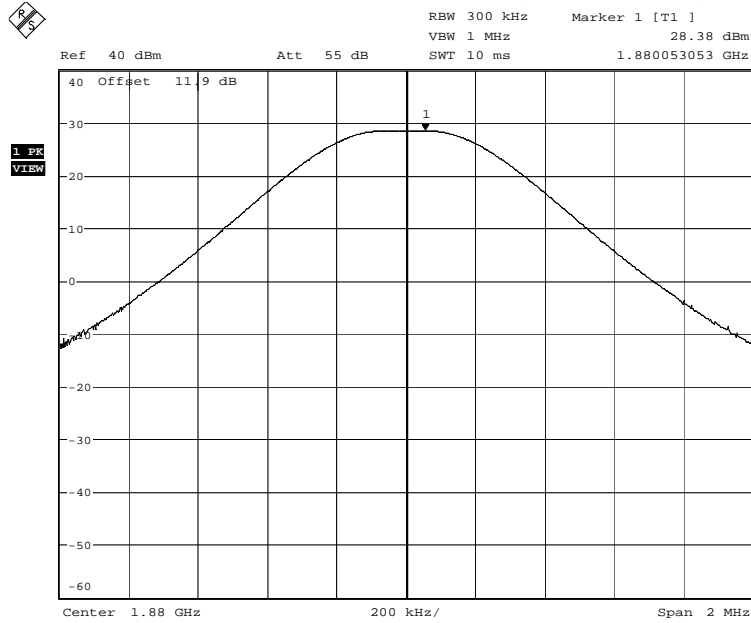


Date: 31.AUG.2009 09:52:33

**GSM 1900 – Channel 661 (1880.00 MHz) – Occupied Bandwidth**

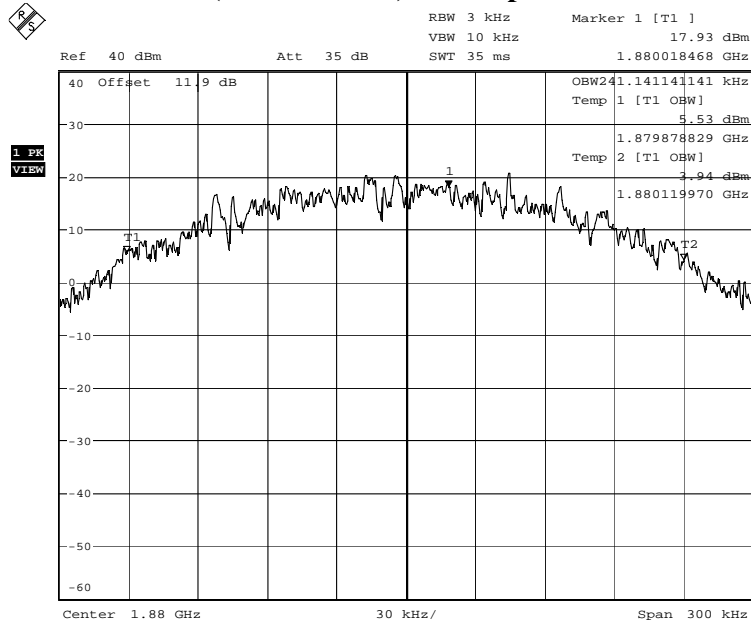


Date: 31.AUG.2009 09:54:13

### GSM 1900 – Lower Band Edge – Channel 512 (1850.2 MHz)

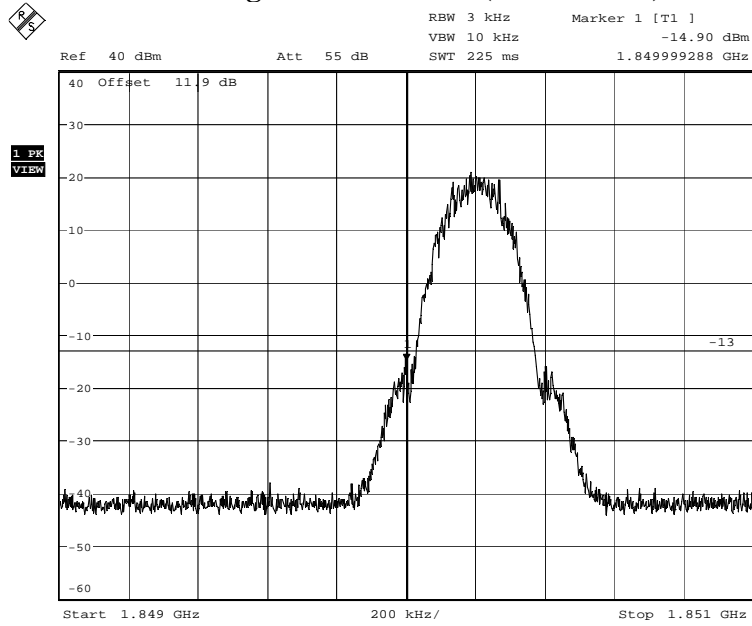

Date: 31.AUG.2009 09:57:07


### GSM 1900 – Upper Band Edge – Channel 810 (1909.8 MHz)

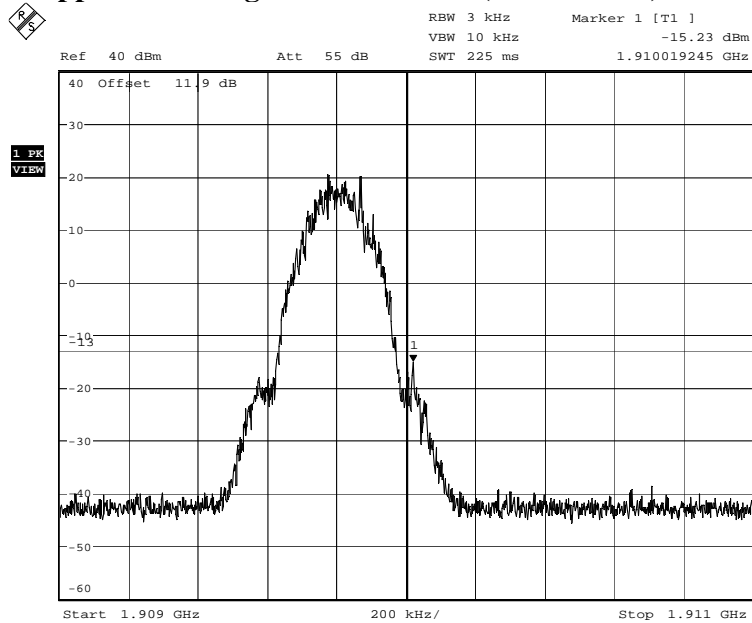

Date: 31.AUG.2009 10:01:51


**Measurement Results – EDGE 850**

**EDGE 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

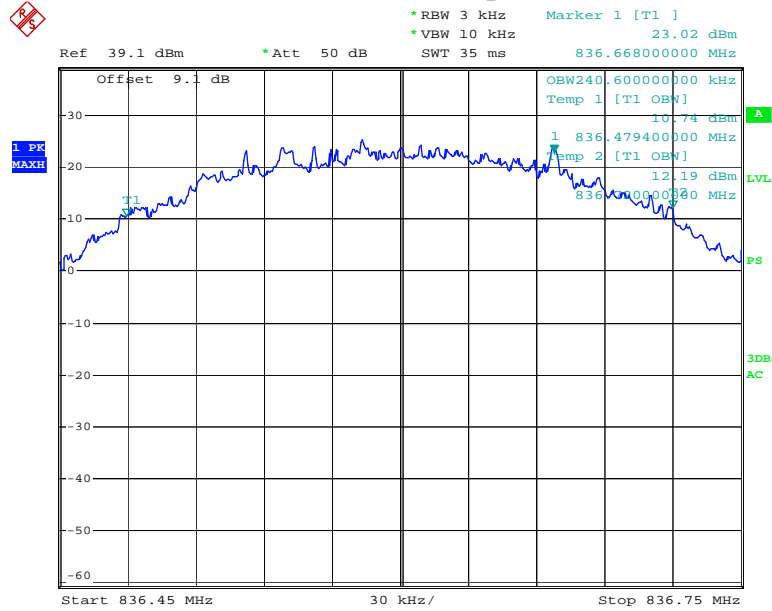


Date: 16.SEP.2009 17:32:36

**EDGE 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

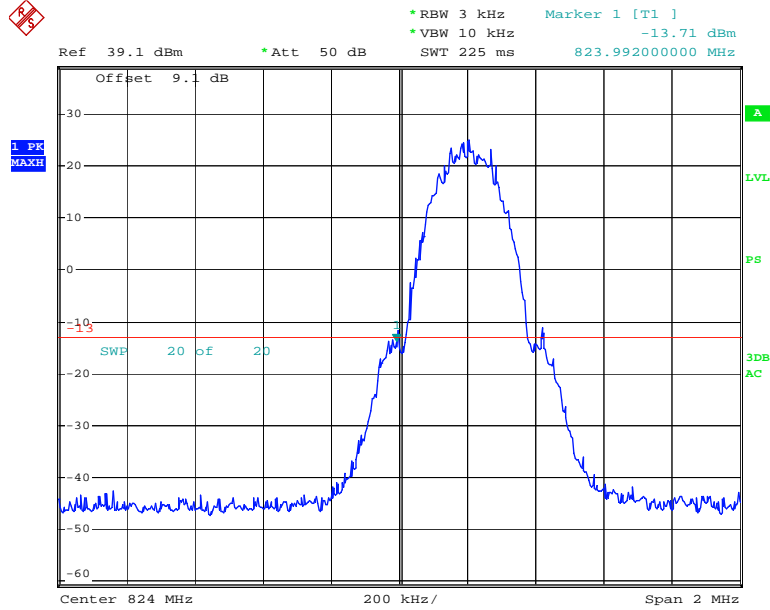

Date: 16.SEP.2009 17:36:11


**EDGE 850 – Upper Band Edge – Channel 251 (848.8 MHz)**

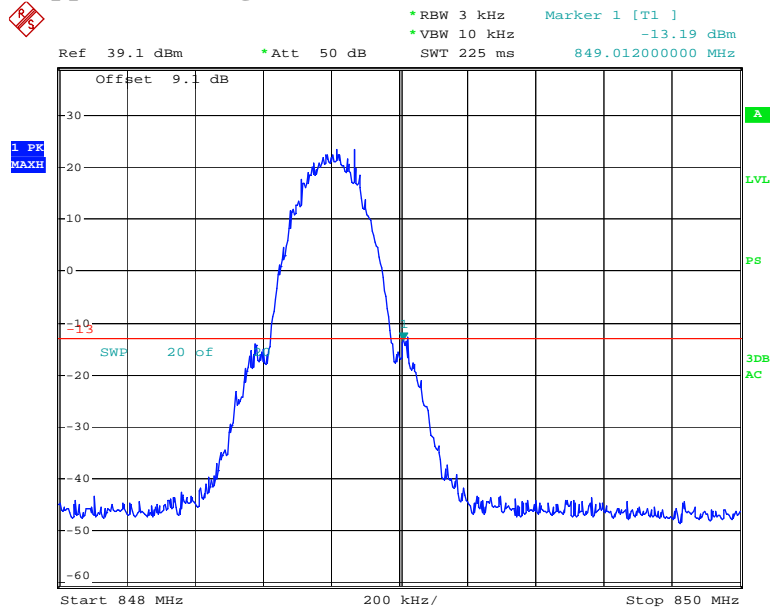

Date: 16.SEP.2009 17:37:59


**Measurement Results – EDGE 1900**

**EDGE 1900 – Channel 661 (1880.00 MHz) – Occupied Bandwidth**

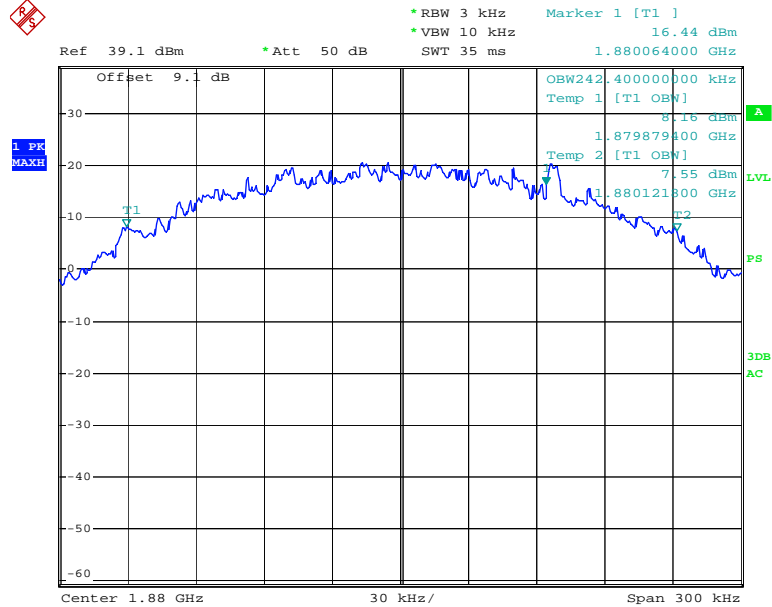


Date: 16.SEP.2009 17:48:45

**EDGE 1900 – Lower Band Edge – Channel 512 (1850.2 MHz)**

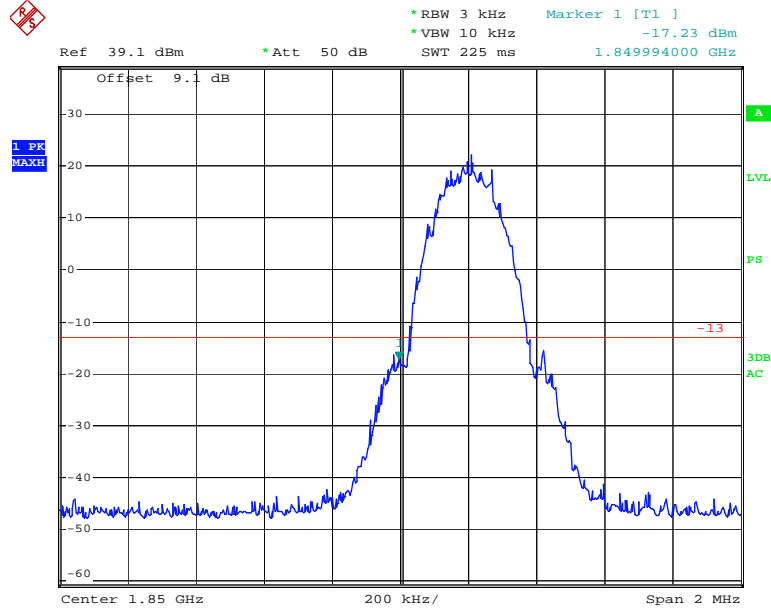

Date: 16.SEP.2009 17:50:16

**EDGE 1900 – Upper Band Edge – Channel 810 (1909.8 MHz)**

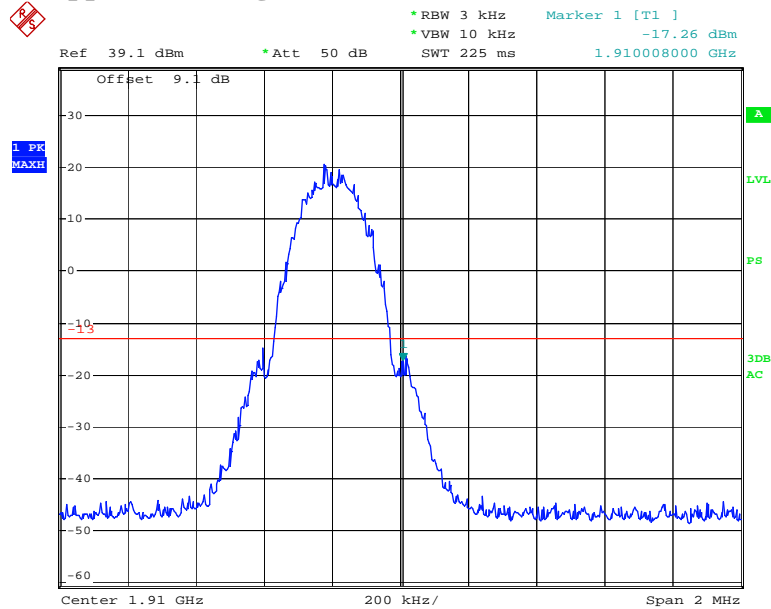

Date: 16.SEP.2009 17:51:26

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

**Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 6dB passive attenuator. For all testing the EUT was powered through the computer's USB.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

|                       |               |
|-----------------------|---------------|
| Units                 | dBm           |
| Divisions             | 10 dB         |
| Detector              | Peak Detector |
| Resolution Bandwidth  | 1 MHz         |
| Video Bandwidth (AVG) | Auto          |
| Sweep Time            | Auto          |


**Measurement Results**

Attached

**Measurement Results – GSM 850**

**Conducted Spurious and Harmonic Emissions**

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic            | -13                     | -23.45                   |
| 3rd harmonic            | -13                     | *                        |
| 4th harmonic            | -13                     | *                        |
| 5th harmonic            | -13                     | *                        |
| 6th harmonic            | -13                     | *                        |
| 7th harmonic            | -13                     | *                        |
| 8th harmonic            | -13                     | *                        |
| 9th harmonic            | -13                     | *                        |
| 10th harmonic           | -13                     | *                        |

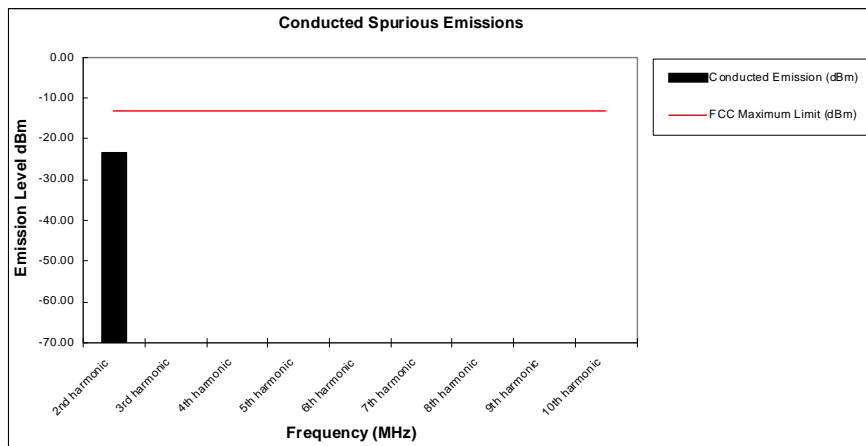

**Notes:**


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – GSM 1900**

**Conducted Spurious and Harmonic Emissions**

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic            | -13                     | -29.31                   |
| 3rd harmonic            | -13                     | *                        |
| 4th harmonic            | -13                     | *                        |
| 5th harmonic            | -13                     | *                        |
| 6th harmonic            | -13                     | *                        |
| 7th harmonic            | -13                     | *                        |
| 8th harmonic            | -13                     | *                        |
| 9th harmonic            | -13                     | *                        |
| 10th harmonic           | -13                     | *                        |

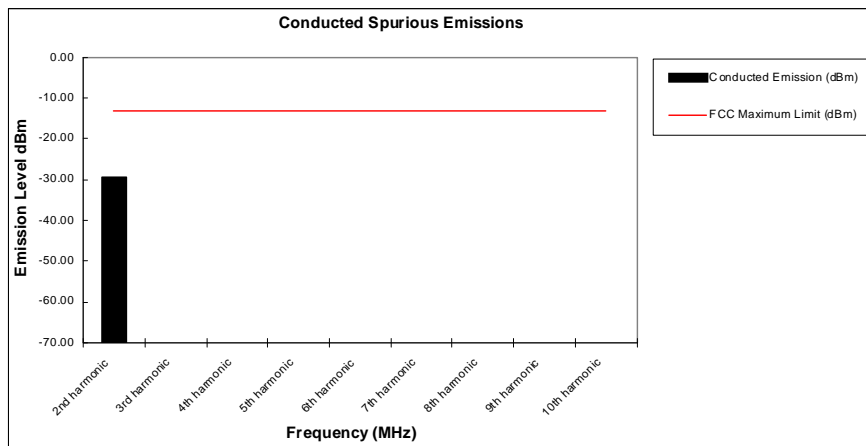

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 850**

**Conducted Spurious and Harmonic Emissions**

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic            | -13                     | -27.62                   |
| 3rd harmonic            | -13                     | -27.77                   |
| 4th harmonic            | -13                     | *                        |
| 5th harmonic            | -13                     | *                        |
| 6th harmonic            | -13                     | *                        |
| 7th harmonic            | -13                     | *                        |
| 8th harmonic            | -13                     | *                        |
| 9th harmonic            | -13                     | *                        |
| 10th harmonic           | -13                     | *                        |

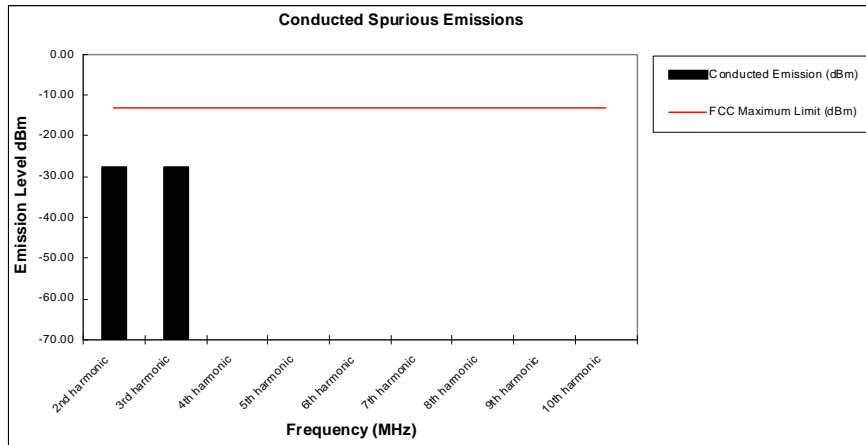

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 1900**

**Conducted Spurious and Harmonic Emissions**

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic            | -13                     | -29.29                   |
| 3rd harmonic            | -13                     | -30.06                   |
| 4th harmonic            | -13                     | *                        |
| 5th harmonic            | -13                     | *                        |
| 6th harmonic            | -13                     | *                        |
| 7th harmonic            | -13                     | *                        |
| 8th harmonic            | -13                     | *                        |
| 9th harmonic            | -13                     | *                        |
| 10th harmonic           | -13                     | *                        |

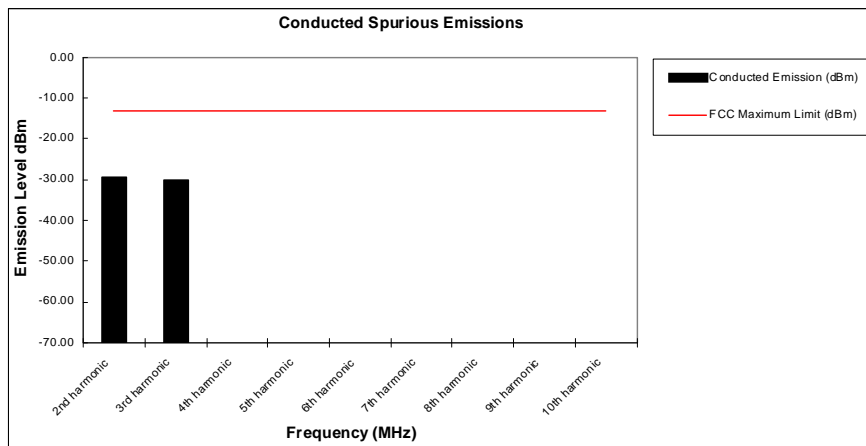

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

|                       |               |
|-----------------------|---------------|
| Units                 | dBm           |
| Divisions             | 5 dB          |
| Detector              | Peak Detector |
| Resolution Bandwidth  | 1 MHz         |
| Video Bandwidth (AVG) | Auto          |
| Sweep Time            | Auto          |


Measurement Results  
Attached

**Measurement Results – GSM 850**

**Configuration – Slider Down**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

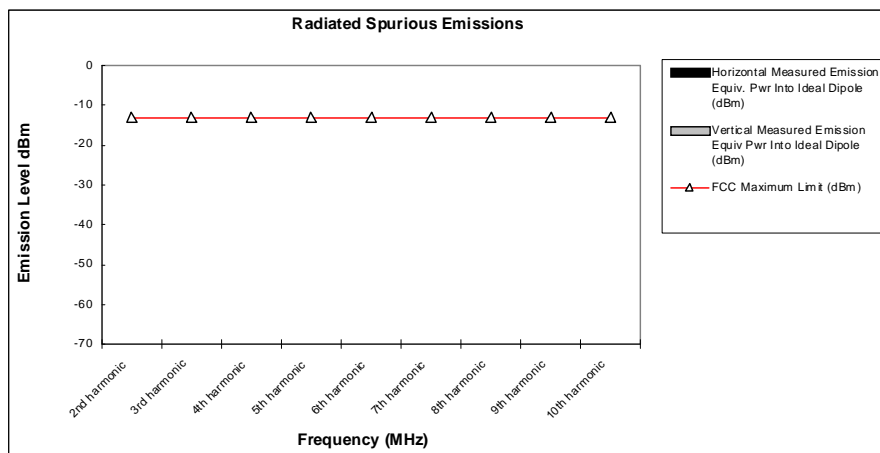

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – GSM 850**

**Configuration – Slider Up**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

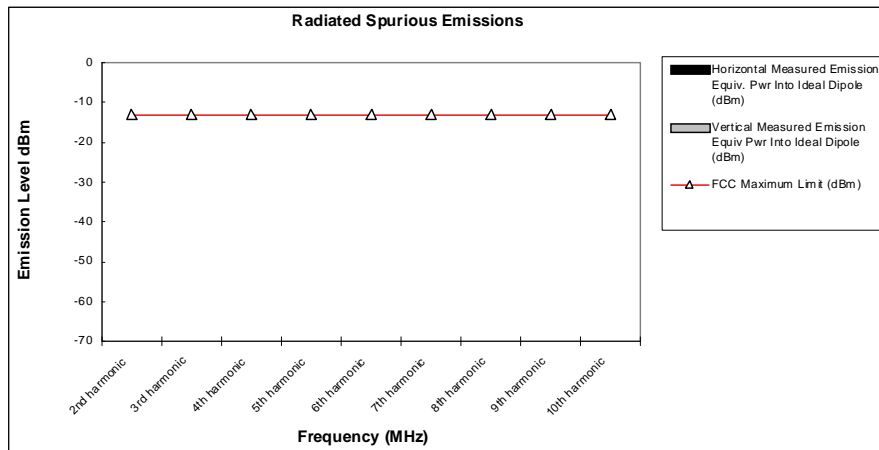

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – GSM 1900**

**Configuration – Slider Down**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

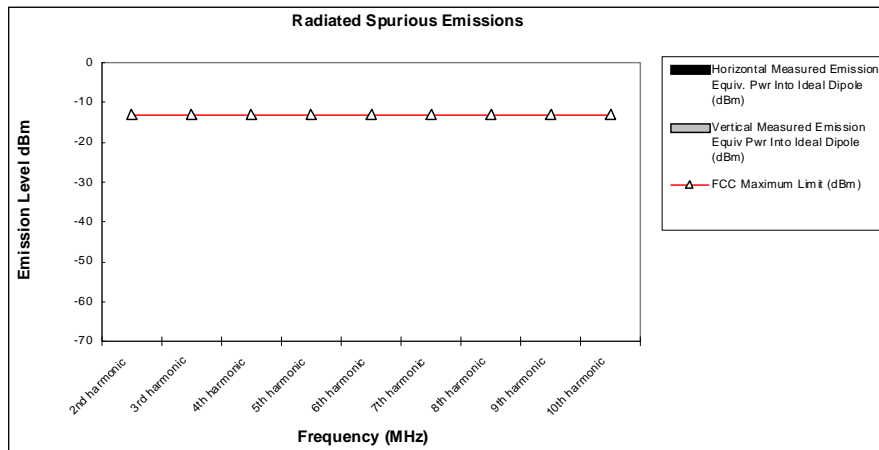

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – GSM 1900**

**Configuration – Slider Up**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

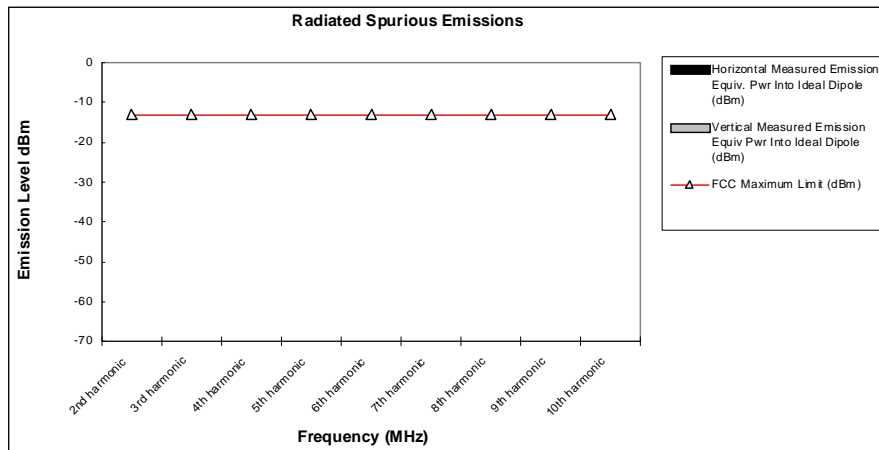

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 850**

**Configuration – Slider Down**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

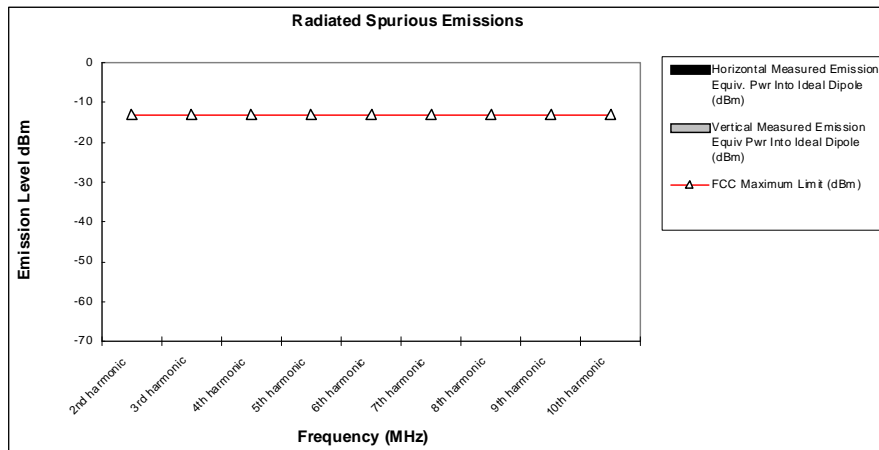

**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 850**

**Configuration – Slider Up**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

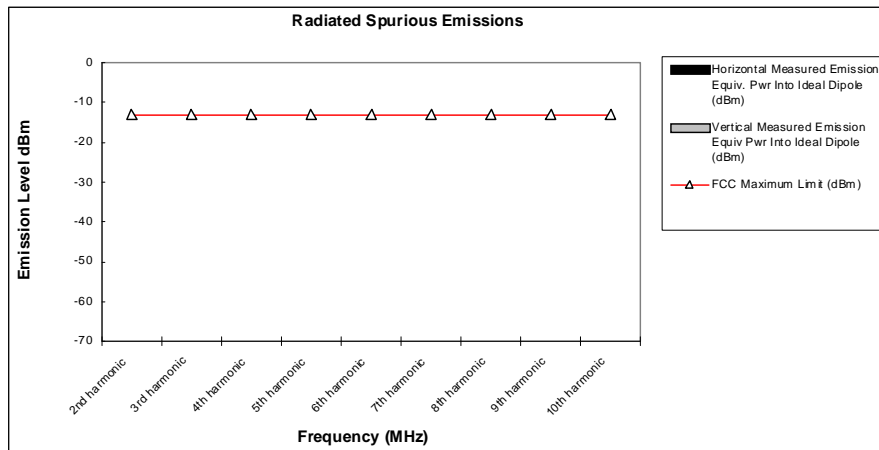

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 1900**

**Configuration – Slider Down**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

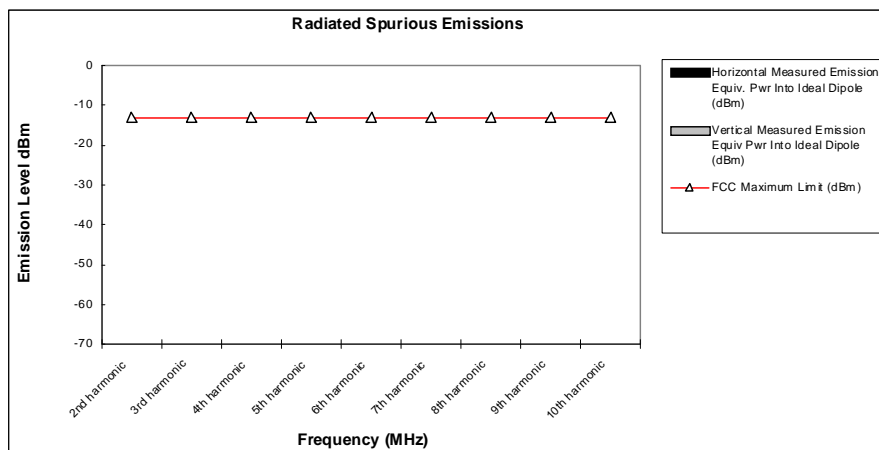

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 1900**

**Configuration – Slider Up**

**Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic    | -13                     | *   | *  |
| 3rd harmonic    | -13                     | *   | *  |
| 4th harmonic    | -13                     | *   | *  |
| 5th harmonic    | -13                     | *   | *  |
| 6th harmonic    | -13                     | *   | *  |
| 7th harmonic    | -13                     | *   | *  |
| 8th harmonic    | -13                     | *   | *  |
| 9th harmonic    | -13                     | *   | *  |
| 10th harmonic   | -13                     | *   | *  |

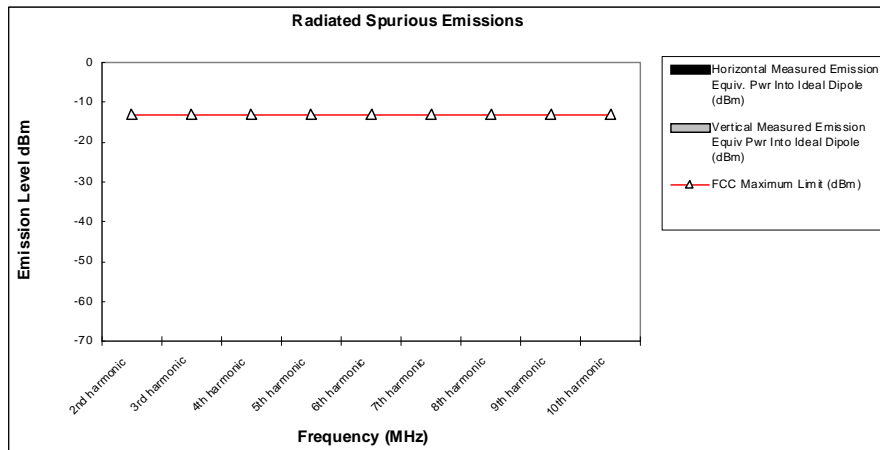

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**FREQUENCY STABILITY****Measurement Procedure**

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

**Measurement Results**


Attached

**Measurement Results – GSM 850**

**Frequency Stability**

Mode: GSM 850      Operating Frequency: 836.6 MHz  
 Channel: 190      Deviation Limit (PPM): 0.1 ppm

| Temperature<br>C | Frequency Error<br>HZ | Frequency Error<br>(PPM) | Voltage<br>(%)   | Voltage<br>(VDC) |
|------------------|-----------------------|--------------------------|------------------|------------------|
| -30 C            | -3.35                 | -0.004                   | 100%             | 3.80             |
| -20 C            | -3.35                 | -0.004                   | 100%             | 3.80             |
| -10 C            | -2.51                 | -0.003                   | 100%             | 3.80             |
| 0 C              | -5.02                 | -0.006                   | 100%             | 3.80             |
| 10 C             | -8.37                 | -0.010                   | 100%             | 3.80             |
| 20 C             | -6.69                 | -0.008                   | 100%             | 3.80             |
| 30 C             | -7.53                 | -0.009                   | 100%             | 3.80             |
| 40 C             | -5.02                 | -0.006                   | 100%             | 3.80             |
| 50 C             | -5.86                 | -0.007                   | 100%             | 3.80             |
| 60 C             | -5.02                 | -0.006                   | 100%             | 3.80             |
| 20 C             | -3.35                 | -0.004                   | Battery Endpoint | 3.47             |

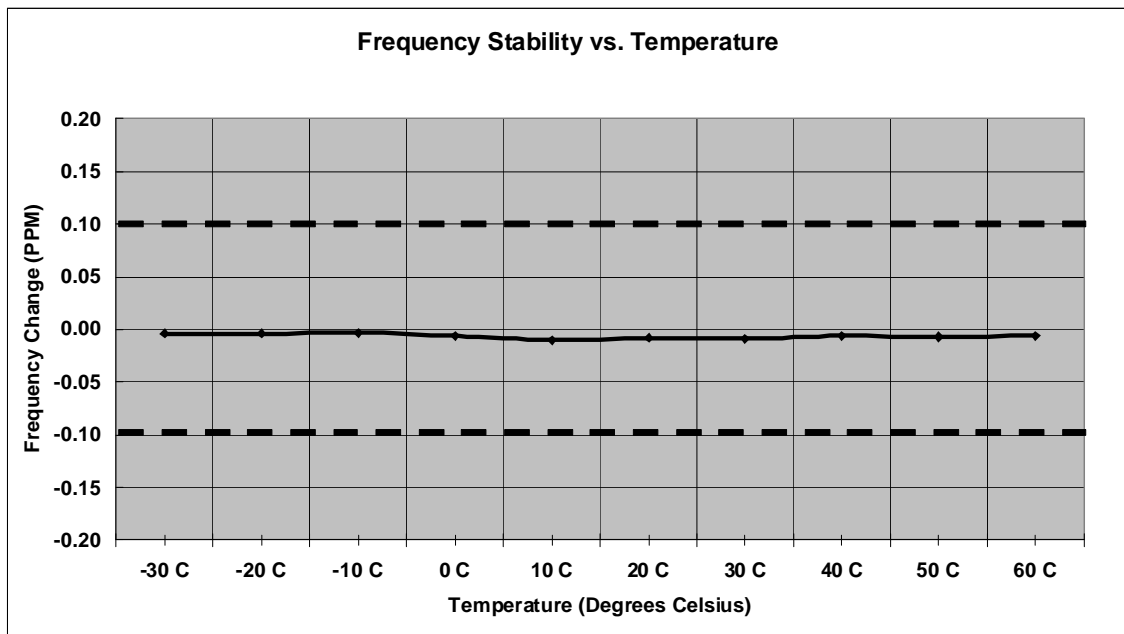


**Measurement Results – GSM 1900**

**Frequency Stability**

**Mode:** GSM 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661      **Deviation Limit (PPM):** 0.1ppm

| Temperature<br>C | Frequency Error<br>HZ | Frequency Error<br>(PPM) | Voltage<br>(%)   | Voltage<br>(VDC) |
|------------------|-----------------------|--------------------------|------------------|------------------|
| -30 C            | 7.52                  | 0.004                    | 100%             | 3.80             |
| -20 C            | 15.04                 | 0.008                    | 100%             | 3.80             |
| -10 C            | -5.64                 | -0.003                   | 100%             | 3.80             |
| 0 C              | -15.04                | -0.008                   | 100%             | 3.80             |
| 10 C             | -20.68                | -0.011                   | 100%             | 3.80             |
| 20 C             | -1.88                 | -0.001                   | 100%             | 3.80             |
| 30 C             | -22.56                | -0.012                   | 100%             | 3.80             |
| 40 C             | -28.20                | -0.015                   | 100%             | 3.80             |
| 50 C             | -22.56                | -0.012                   | 100%             | 3.80             |
| 60 C             | -24.44                | -0.013                   | 100%             | 3.80             |
| 20 C             | -20.68                | -0.011                   | Battery Endpoint | 3.47             |

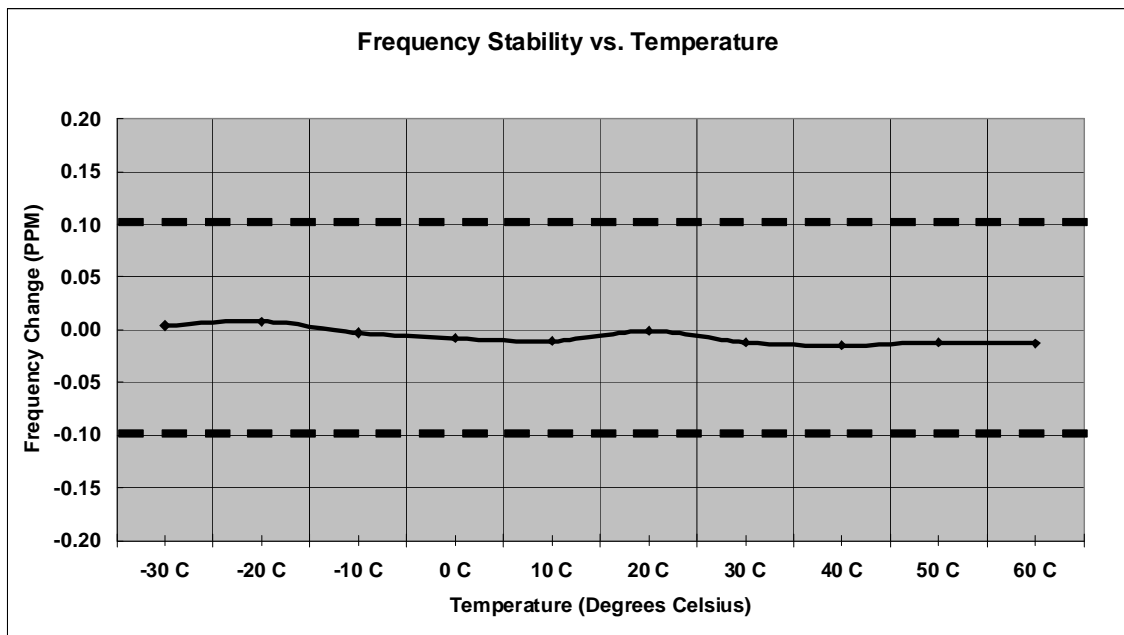


**Measurement Results – EDGE 850**

**Frequency Stability**

Mode: EDGE 850      Operating Frequency: 836.6  
 Channel: 190      Deviation Limit (PPM): 0.1 ppm

| Temperature<br>C | Frequency Error<br>HZ | Frequency Error<br>(PPM) | Voltage<br>(%)   | Voltage<br>(VDC) |
|------------------|-----------------------|--------------------------|------------------|------------------|
| -30 C            | -26.77                | -0.032                   | 100%             | 3.80             |
| -20 C            | -24.26                | -0.029                   | 100%             | 3.80             |
| -10 C            | -24.26                | -0.029                   | 100%             | 3.80             |
| 0 C              | -24.26                | -0.029                   | 100%             | 3.80             |
| 10 C             | -24.26                | -0.029                   | 100%             | 3.80             |
| 20 C             | -26.77                | -0.032                   | 100%             | 3.80             |
| 30 C             | -25.93                | -0.031                   | 100%             | 3.80             |
| 40 C             | -27.61                | -0.033                   | 100%             | 3.80             |
| 50 C             | -27.61                | -0.033                   | 100%             | 3.80             |
| 60 C             | -22.59                | -0.027                   | 100%             | 3.80             |
| 20 C             | -25.93                | -0.031                   | Battery Endpoint | 3.47             |

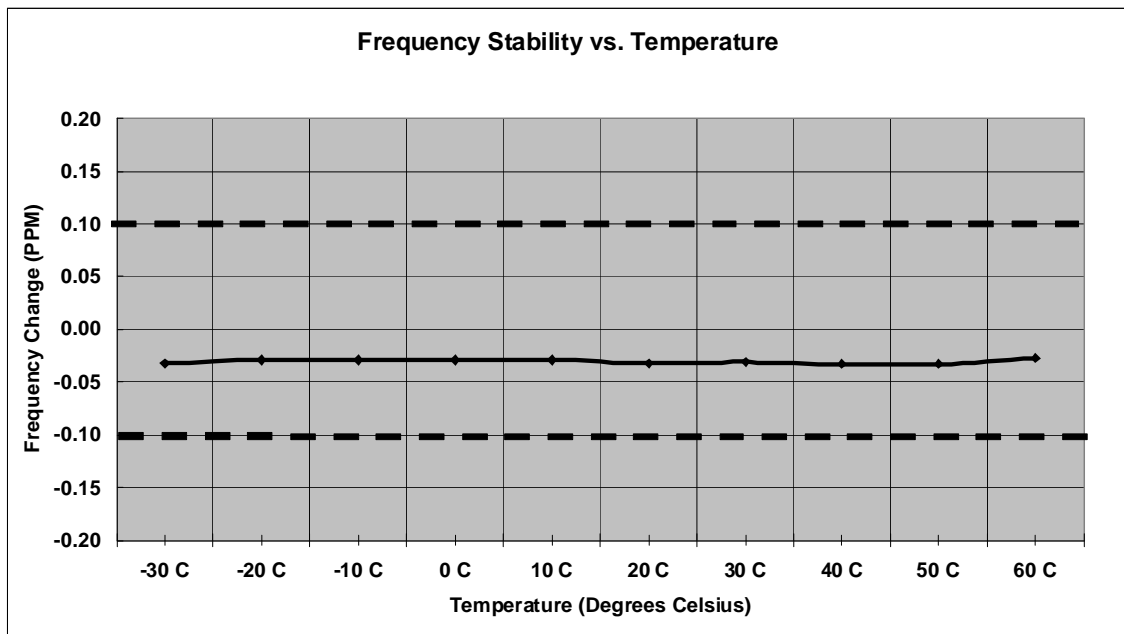


**Measurement Results – EDGE 1900**

**Frequency Stability**

**Mode:** EDGE 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661      **Deviation Limit (PPM):** 0.1ppm

| Temperature<br>C | Frequency Error<br>HZ | Frequency Error<br>(PPM) | Voltage<br>(%)   | Voltage<br>(VDC) |
|------------------|-----------------------|--------------------------|------------------|------------------|
| -30 C            | -65.80                | -0.035                   | 100%             | 3.80             |
| -20 C            | -60.16                | -0.032                   | 100%             | 3.80             |
| -10 C            | -60.16                | -0.032                   | 100%             | 3.80             |
| 0 C              | -63.92                | -0.034                   | 100%             | 3.80             |
| 10 C             | -65.80                | -0.035                   | 100%             | 3.80             |
| 20 C             | -67.68                | -0.036                   | 100%             | 3.80             |
| 30 C             | -67.68                | -0.036                   | 100%             | 3.80             |
| 40 C             | -71.44                | -0.038                   | 100%             | 3.80             |
| 50 C             | -69.56                | -0.037                   | 100%             | 3.80             |
| 60 C             | -62.04                | -0.033                   | 100%             | 3.80             |
| 20 C             | -65.80                | -0.035                   | Battery Endpoint | 3.47             |

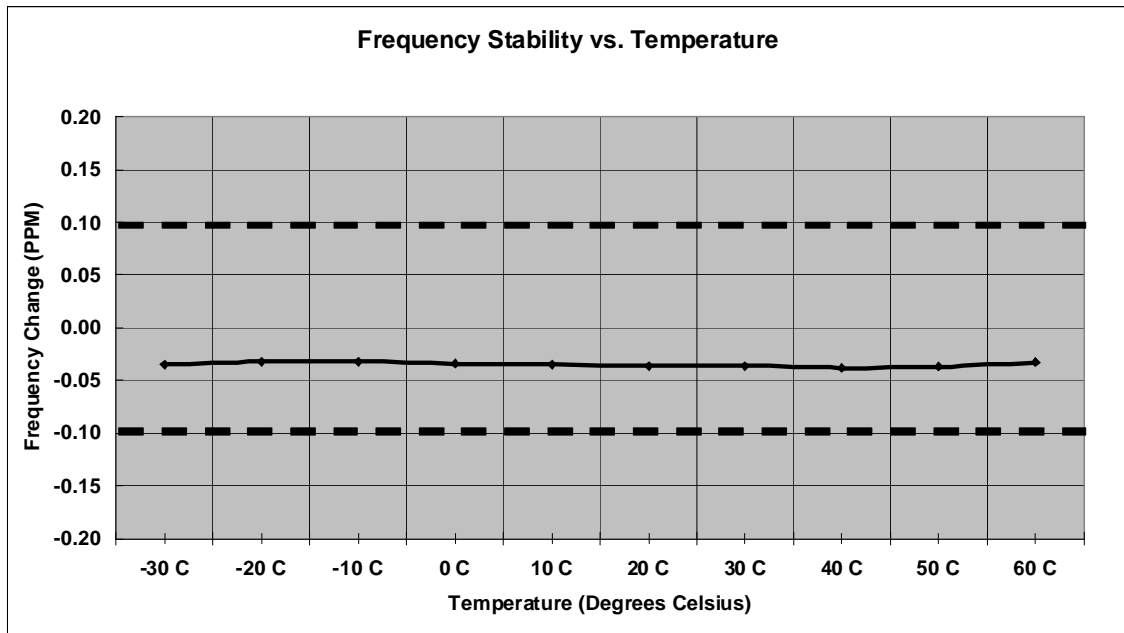

**End of Test Report**