



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 23286-2 Supplement

Report Date – 2009-09-17

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2009-09-02 to 2009-09-17

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2009-09-17

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885

IC Registration Number: 109AW-1



ADR Testing Service location ADR BJ

ISO/IEC-17025:2005 accredited by UKAS

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

Test Report Details

Tests Performed By: Motorola (China) Technologies Ltd.
Asia Global Compliance Labs
No. 1 Wang Jing East Road, Chao Yang District
Beijing, 100102, P. R. China
Phone: +86 10 8473 2610
FCC Registration Number: 177885
IC Registration Number: 109AW-1

Tests Requested By: Motorola Inc.
Mobile Devices business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 900/2100, GSM 850/900/1800/1900,
HSDPA 10.2 Mbps (Category 9/10), EDGE
Class 12, GPRS Class 12, HSUPA 5.76 Mbps,
aGPS, Bluetooth, Version 2.0 + EDR,
802.11b/802.11g

FCC ID: IHDP56KC2

IMEI: 004401027563069, 004401027563051

Testing Complete Date: 09-17-2009

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47:

 X Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI C63.4: 2003, RSS-Gen

Summary of Testing

Test #	Test Name	Pass/Fail
--------	-----------	-----------

1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
--------	-----------	----------------------------------

1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4: 2003 Standard requirements during the entire duration of testing.

Equipment List

Through the test, the EUT was installed in an evaluation board.

Equipment	Model/type	Serial number	Operational range	Date of calibration
EMI analyzers	ESU 40	100036	20 Hz – 40 GHz	12.11.2008
Pre Amplifiers	PA-02-0001:	2007343	(10 kHz – 3 GHz)	06.26.2009
	PA-02-218	2007344	3 GHz – 18 GHz	06.26.2009
	PA-02-5	2007345	18 GHz – 40 GHz	06.26.2009
Radio com. Tester	CMU 200	112790	GSM 850/900/1800/1900 UMTS, CDMA, Bluetooth	N/A
Band Reject Filter	WRCD	N/A	GSM 850/900/1800/1900 UMTS, CDMA	N/A
	4N45-24241/3/6	N/A	WLAN	N/A
EMI analyzers	R&S ESCI	100650	9 kHz – 3 GHz	12.11.2008
LISN	ENV216	100055	9 kHz – 30 MHz	12.16.2008

The antennas used in the various tests are listed in the below table.

Antenna	Type	Serial number	Operational range	Date of calibration
Hybrid-log periodic	TDK HLP 3003C	130361	30 MHz – 3 GHz	11.07.08
Double ridged Horn	TDK HRN0118	130303	1 GHz – 18 GHz	03.26.09
Double ridged Horn	ETS HRN3116	00071938	18 GHz – 40 GHz	10.17.08

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

The Dell 610 Laptop Computer, SSK Card Reader and the Sony D-600 L Camera are labeled as DoC.

Measurement Procedures and Data

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a Styrofoam table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) - Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4: 2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

Operating Mode – Rx Mode

Notes: Worst Case emissions reported.

30 MHz – 1000 MHz

[Save]

Title: FCC15B Computer Peripheral
 File: Snapper (ESU40) (5.31) FCC15B_CH_L_2G_Final 09-09-2009.set
 Operator: Hongzhi Sun
 EUT Type: Sholes, MSN: 4401027563077, Open
 EUT Condition: HW:Rev A
 Comments: ESU setting:
 Atten 0: Preselector ON :Preamp ON:
 30M-1G: RBW 120 KHz (6dB) :VBW:Auto :Sweep time:50ms
 1G-2G : RBW 1 MHz (6dB) :VBW:Auto :Sweep time:50ms
 Antenna:30M-2G : 1m-4m@Hor, 1.4m-4m@Ver, 1m/step

9/17/2009 4:50:17 PM
 Sequence: Final Measurements

FCC15B_Final_30M_1G

Freq (MHz)	(QP) EMI (dBµV/m)	Transducer (dB)	(QP) Trace (dBµV)	Cable (dB)	(2) Limit (dBµV/m)	(QP) Margin Lim1 (dB)	Twr Ht (cm)	EUT Tilt Agl (deg)	Pol
38.04	32.12	12.48	18.74	0.73	40.00	-7.88	141.00	202.70	V
38.22	21.32	12.47	7.96	0.73	40.00	-18.68	394.00	191.70	H
280.02	21.75	13.30	6.25	1.86	46.00	-24.25	238.00	192.30	V
300.00	19.59	14.10	3.18	1.95	46.00	-26.41	323.00	189.60	H
300.00	22.78	14.10	6.37	1.95	46.00	-23.22	146.00	290.20	V
350.04	23.98	16.50	4.97	2.11	46.00	-22.02	100.00	0.00	H
350.04	25.87	16.50	6.86	2.11	46.00	-20.13	140.00	119.40	V
370.02	19.08	16.00	0.48	2.16	46.00	-26.92	112.00	6.00	H
370.02	23.38	16.00	4.78	2.16	46.00	-22.62	140.00	130.10	V
450.00	20.93	18.10	-0.02	2.40	46.00	-25.07	100.00	0.00	H
450.00	23.42	18.10	2.47	2.40	46.00	-22.58	140.00	8.60	V
469.98	23.79	18.40	2.57	2.40	46.00	-22.21	217.00	41.40	V
470.04	22.95	18.40	1.73	2.40	46.00	-23.05	254.00	31.90	H
480.00	24.92	18.30	3.73	2.45	46.00	-21.08	211.00	223.00	V
480.06	24.85	18.30	3.65	2.45	46.00	-21.15	193.00	34.60	H
489.96	22.27	18.20	1.16	2.47	46.00	-23.73	201.00	19.90	V

Above 1 GHz

No emissions were found

AC LINE CONDUCTED EMISSIONS**Measurement Procedure**

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors - Peak and Average Detector

Test Setup


The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

See attached:

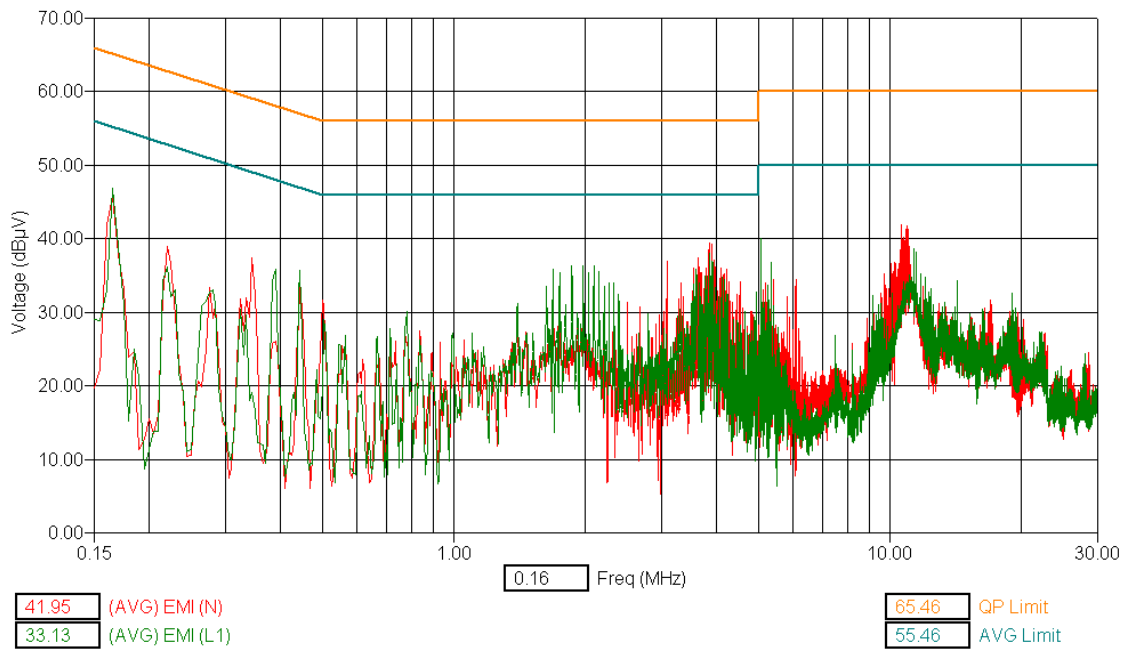

AC LINE COMPUTER PERIPHERAL - Tx Mode – Average Detector

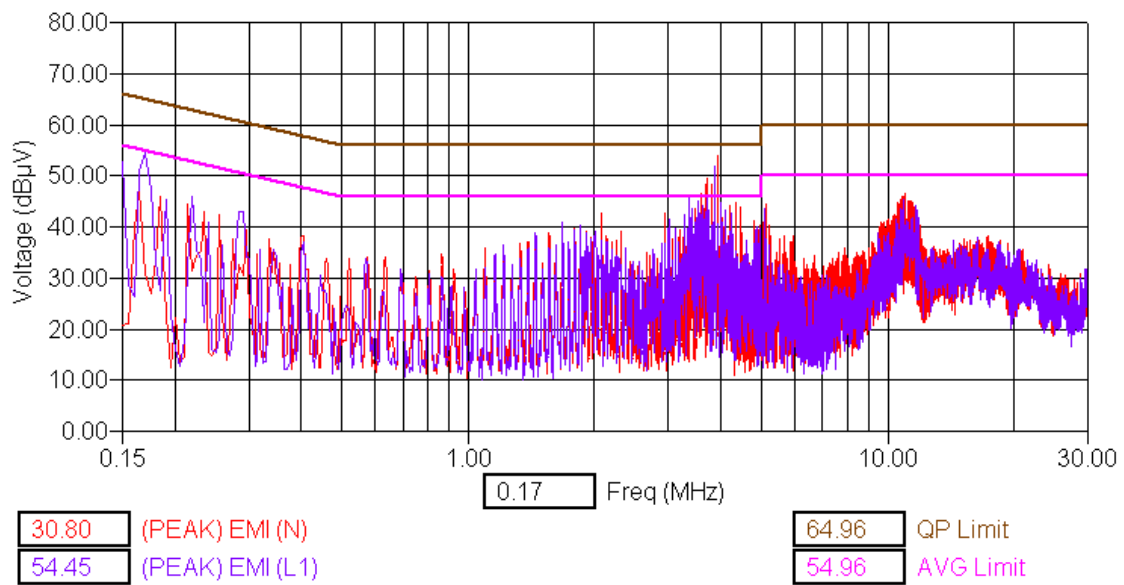

AC LINE COMPUTER PERIPHERAL - Tx Mode – Peak Detector

End of Test Report