



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**


EMC TEST REPORT

Test Report Number – 23423-1 Supplement

Report Date – November 23, 2009

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

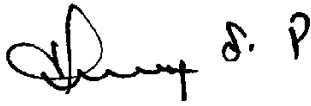Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: November 23, 2009

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola MDb FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: 1090-1

Tests Requested By: Motorola Inc.
Mobile Devices business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: CDMA 800/1900, GSM 850/1900, CDMA EV-DO
Release A, GPRS Class 12, sGPS, Bluetooth Class
2.0+EDR, 802.11b/802.11g

FCC ID: IHDP56KT1

Serial Numbers: KTN0110371

Testing Complete Date: November 23, 2009

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 :

 X Part 15 Subpart B – Unintentional Radiators

Applicable Standards: ANSI 63.4 2003, RSS-Gen Issue 2, RSS-210 Issue 7

Summary of Testing

Test #	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
2	AC Line Conducted Emissions	Pass
Test #	Test Name	Margin with respect to the Limit
1	Field Strength of Spurious Emissions from Unintentional Radiators	see results
2	AC Line Conducted Emissions	see results

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The Cellular Phone hereinafter referred to as the Equipment under Test or EUT was tested using a fully charged battery.

The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

Equipment List

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde & Schwarz	Receiver	ESIB40	100226	1/30/10
Rohde Schwarz	Receiver	ESI26	838786/010	5/01/10
ETS	DRG Horn Antenna	SAS 200/571	265	4/29/10
ETS	Log-Periodic Antenna	3148	1189	6/12/10
ETS	Biconical Antenna	3110B	3370	10/02/10
Agilent	Microwave Preamplifier	8449B	3008A01442	2/25/10
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
ETS	LISN	3810/2NM	00062907	12/10/09
ETS	LISN	3810/2NM	00062912	12/10/09
Dell	Laptop Computer	M20	NA	NA
Iomega	Zip Drive	Z250S	P9HM1992CK	NA
Olympus	Camera	D-600L	4020727	NA

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

The Dell M20 Laptop Computer, Iomega Z250S Zip Drive and the Olympus D-600L Camera are labeled as DoC.

Measurement Procedures and Data

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table on the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The final radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

Operating Mode – Rx Mode, Data Transfer Mode.

Notes: Worst Case emissions reported.

30 MHz – 1000 MHz

Frequency	Level	Measured	Transd	Cables	Limit	Margin	Height	Angle	Pol.
MHz	dBuV/m	dBuV	dB	dB	dBuV/m	dB	cm	deg	
70.72	34.97	19.02	8.5	7.5	40	5	100	230	VERT
71	34.8	18.81	8.5	7.5	40	5.2	150	230	VERT
75.64	35.7	19.45	8.7	7.5	40	4.3	100	256	VERT
141.12	37.02	16.56	12.4	8.1	43.5	6.5	150	240	HORI
142.4	37.73	17.31	12.3	8.1	43.5	5.8	150	239	HORI
146.24	38.33	17.4	12.8	8.1	43.5	5.2	100	251	VERT
147.2	35.77	14.76	12.9	8.1	43.5	7.7	100	220	VERT
320.64	45.26	21.1	15	9.1	46	0.7	100	261	HORI
352.72	40.12	15.47	15.3	9.3	46	5.9	100	252	HORI
384.76	41.38	16	15.9	9.5	46	4.6	99	181	HORI
835.08	32.57	-0.36	21.7	11.2	46	13.4	115	235	VERT
837.36	32.53	-0.41	21.7	11.2	46	13.5	122	271	VERT
876.64	33.52	-0.36	22.5	11.4	46	12.5	218	166	VERT
895.72	34.57	-0.36	23.5	11.4	46	11.4	128	0	HORI
927.16	34.94	-0.32	23.8	11.5	46	11.1	150	8	HORI

Above 1 GHz

Frequency	Level	Measured	Transd	Gain	Limit	Margin	Height	Angle	Pol.
MHz	dBuV/m	dBuV	dB	dB	dBuV/m	dB	cm	deg	
1064.9	32.06	35.67	23.6	27.2	54	21.9	242	334	VERT
1122.7	34.78	37.98	23.8	27	54	19.2	250	337	VERT
1130.4	35.07	38.21	23.8	27	54	18.9	239	333	VERT
1502.9	32.19	32.67	25	25.5	54	21.8	99	95	VERT
1512.5	32.04	32.42	25.1	25.5	54	22	209	42	VERT
1940.8	35.74	31.17	28.4	23.8	54	18.3	241	330	HORI
1971.7	35.77	31.22	28.2	23.7	54	18.2	114	326	VERT
1985.5	35.78	31.09	28.3	23.6	54	18.2	120	273	VERT

Peak Radiated Data for Emissions Above 1GHz

Frequency	Level	Angle	Height	Pol.
MHz	dBµV/m	deg	cm	
1064.12	47.65	334	200	VER
1122.24	50.53	334	200	VER
1130.26	49.7	337	200	VER
1503.00	48.18	85	100	VER
1511.02	48.07	43	200	VER
1941.88	48.22	344	200	HOR
1969.93	48.32	333	100	VER
1985.97	48.29	295	100	VER

AC LINE CONDUCTED EMISSIONS

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors - Quasi Peak and Average Detector

Test Setup


The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Measurement Results

See attached:

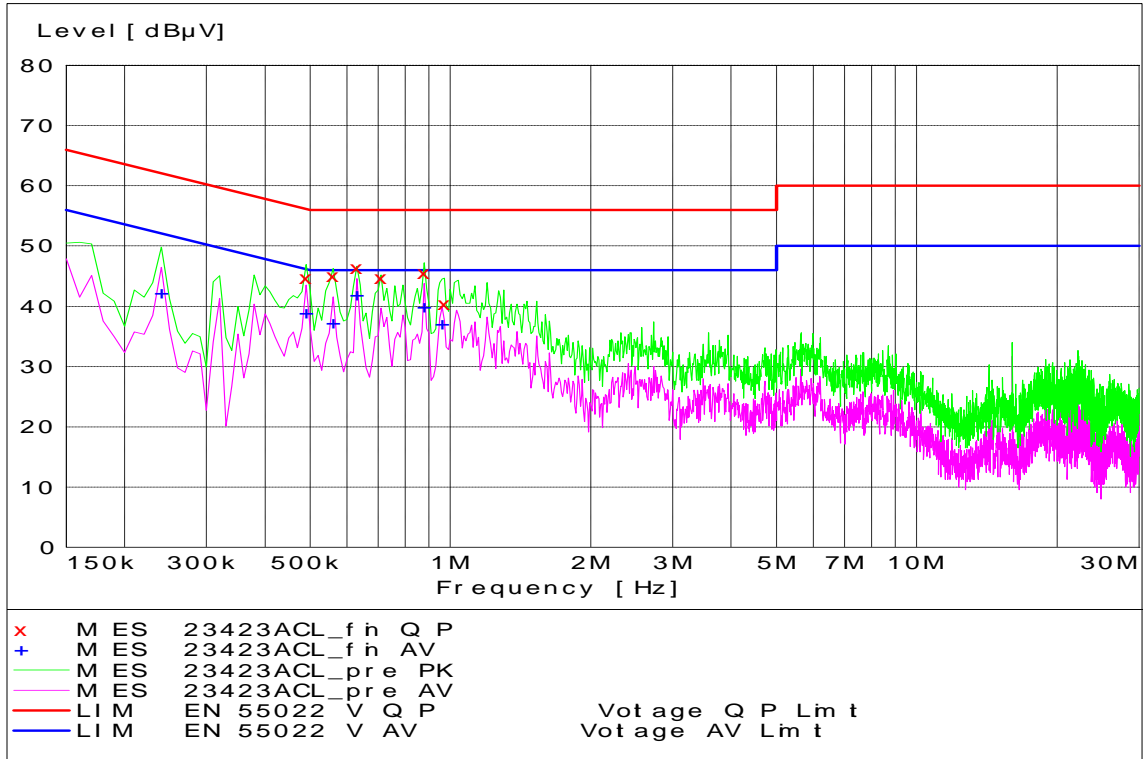

Pt 15 - Tx Mode - Line Coupling

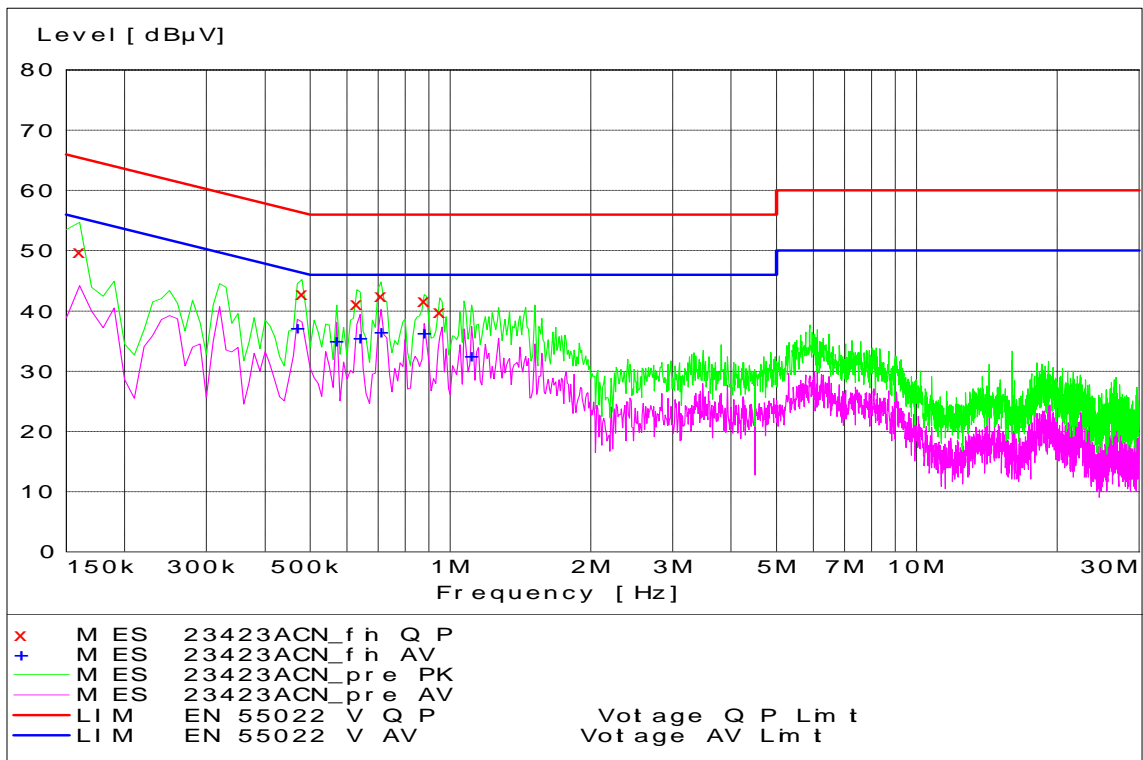

Pt 15 - Tx Mode - Neutral Coupling

End of Test Report