



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

COMPLIANCE TEST REPORT

PER FCC PT 90, PT 24

AND RSS-119 AND RSS-134

APPLICANT	MOTOROLA, INC.
	600 NORTH U.S. HWY 45 LIBERTYVILLE ILLINOIS 60048-5343 USA
FCC ID	IHDP56KV1
MODEL NUMBER	H76XAN9JR9AN
PRODUCT DESCRIPTION	iDEN i1
DATE SAMPLE RECEIVED	12/28/2009
DATE TESTED	1/14/2010
TESTED BY	Richard Block
APPROVED BY	Mario de Aranzeta
TIMCO REPORT NO.	3151AUT9TestReport_i1_iDEN_TX.pdf
TEST RESULTS	☒ PASS ☐ FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01

TABLE OF CONTENTS

ATTESTATIONS	3
REPORT SUMMARY.....	4
TEST ENVIRONMENT AND TEST SETUP.....	4
DUT SPECIFICATION.....	5
EQUIPMENT LIST	6
TEST PROCEDURE.....	7
RF POWER OUTPUT	9
OCCUPIED BANDWIDTH	10
OCCUPIED BANDWIDTH PLOTS	12
FIELD STRENGTH OF SPURIOUS EMISSIONS - Max Power	33
FIELD STRENGTH OF SPURIOUS EMISSIONS - Max Cutback	35
POWER LINE CONDUCTED INTERFERENCE	37

ATTESTATIONS

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 1/19/2010

Applicant: MOTOROLA INC.
FCC ID: IHDP56KV1
Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

REPORT SUMMARY

Disclaimer	The test results relate only to the items tested.
Purpose of Test	To demonstrate compliance with FCC CFR 47, Part 90 requirements. To demonstrate compliance with FCC CFR 47, Part 24 requirements for narrow band PCS equipment. To demonstrate compliance with IC RSS-119 requirements. To demonstrate compliance with IC RSS-134 requirements.
Test Standards	ANSI/TIA 603-C: 2004, FCC CFR 47 Part 90, ANSI C63.4: 2003 RSS-119, RSS-134, RSS-GEN
Related Approval	Digital portion is verified

TEST ENVIRONMENT AND TEST SETUP

Test Facility	RF output power and radiated emission were conducted by: Timco Engineering Inc. 849 NW State Road 45, Newberry, FL 32669 USA
Laboratory Test Condition	The temperature was 26°C with a relative humidity of 50%.
Deviation from the standards	No deviation
Modification to the DUT	No modification was made.
Test Exercise (software etc.)	The DUT was placed in continuous transmitting mode of operation.
System Setup	Stand alone device.

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

DUT SPECIFICATION

DUT Description	iDEN i1
FCC ID	IHDP56KV1
Model Number	H76XAN9JR9AN
Serial Number	364VKYLKNG
Hardware	P4-5
Software	DBF.00.15
Operating Frequency	806.0125 – 824.9875 MHz 896.01875 – 901.98125 MHz
DUT Power Source	☒ 110–120Vac/50– 60Hz
	☐ DC Power 12V
	☐ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☐ Fixed
	☐ Mobile
	☒ Portable

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc



EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/10
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/09	3/30/11
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/09	3/3/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/09	4/5/12
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/09	5/9/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/09	5/14/11
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1


Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

TEST PROCEDURE

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C:2004, using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter. A 50-ohm, resistive wattmeter was connected to the RF output connector. With a nominal battery voltage or supply voltage, and the transmitter properly adjusted the RF output measures:

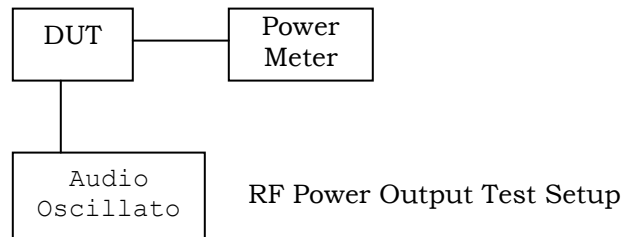

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C:2004, using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum ANSI/TIA 603-C: 2004, receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 76°F with a humidity of 55%.

[Continued]

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

Modulation Characteristic

Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

Audio Low Pass Filter

The audio low pass filter for voice-modulated equipment was measured in accordance with ANSI/TIA 603-C: 2004. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Audio Input versus modulation


The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Frequency Stability

The frequency stability was measured per ANSI/TIA 603-C: 2004.

Field Strength of Spurious Emissions

The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method.

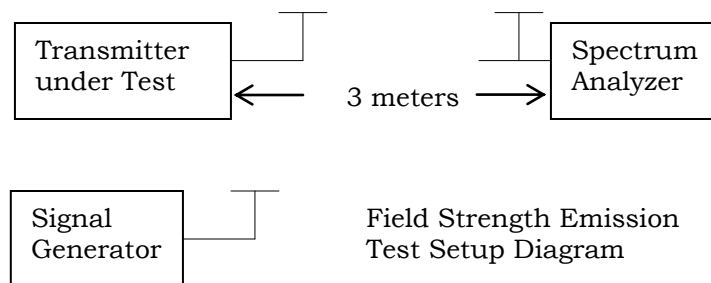

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

RF POWER OUTPUT

Rule Part No.: Pt 2.1046(a), Pt 90, Pt 24, RSS-119, RSS-134

Test Requirements: Pt 2.1046(a), Pt 90, Pt 24, RSS-119, RSS-134

Test Data:

OUTPUT POWER: HIGH – 0.603 Watts

Part 2.1033 (c)(8) DC Input into the final amplifier

FOR HIGH POWER SETTING INPUT POWER: $(3.7V)(1.2A) = 4.44$ Watts

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

OCCUPIED BANDWIDTH

Part 2.1049(c) EMISSION BANDWIDTH:

Part 90.210(b) 25kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(f_d/5)$ dB; (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(f_d/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43 + 10 \log(P_o)$ dB.

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Part 90.210(e) Emission Mask E – 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3.0 \text{ kHz})$ or $55 + 10 \log(P)$ or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least $55 + 10\log(P)$ dB or 65 dB, whichever is the lesser attenuation.


Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

Method of Measurement: ANSI/TIA 603-C: 2004

Test Setup Diagram:

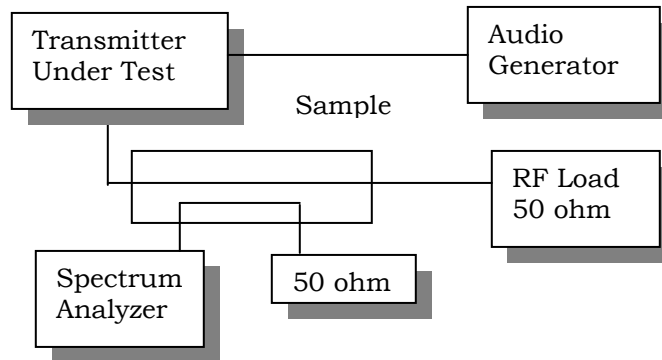

Test Data: See the plots below

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1


Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

OCCUPIED BANDWIDTH PLOTS

NOTES:

OCCUPIED BANDWIDTH -- 806.0625 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

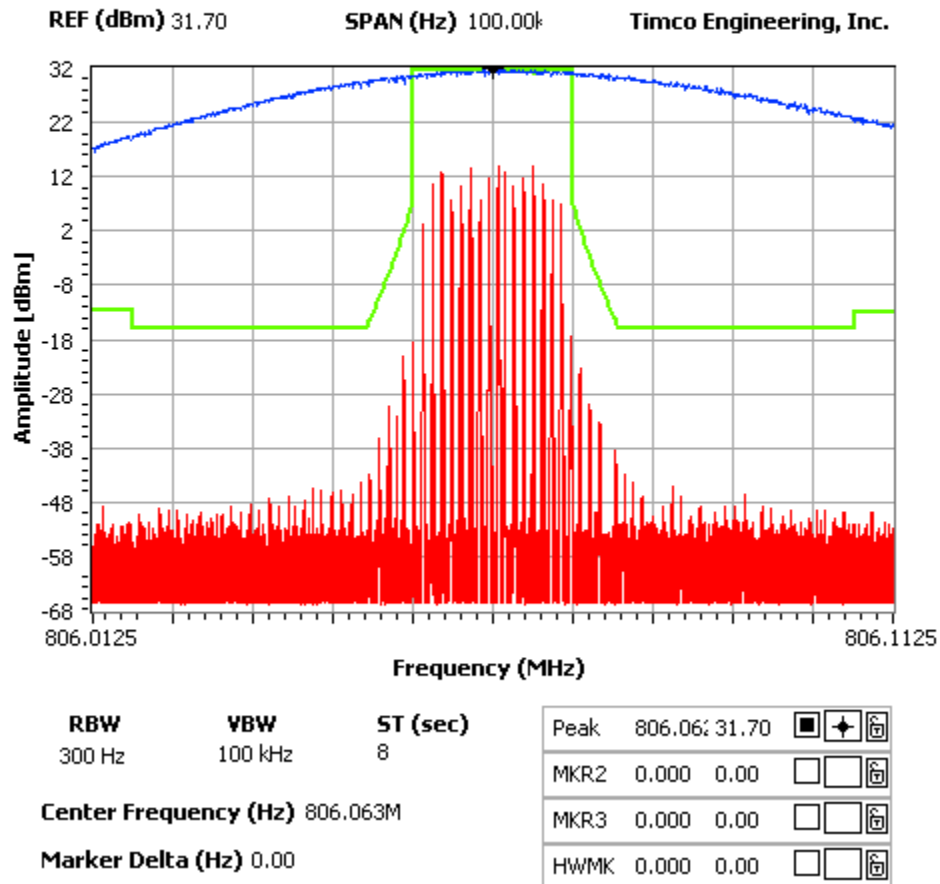

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 806.0625 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

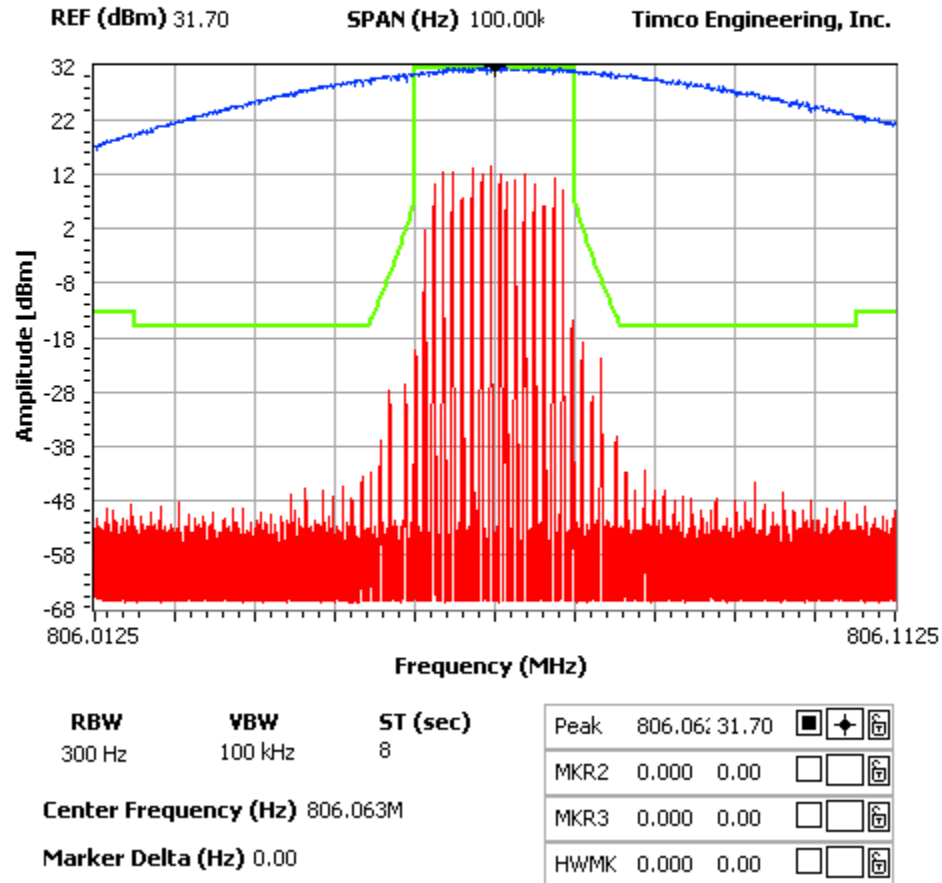

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 806.0625 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

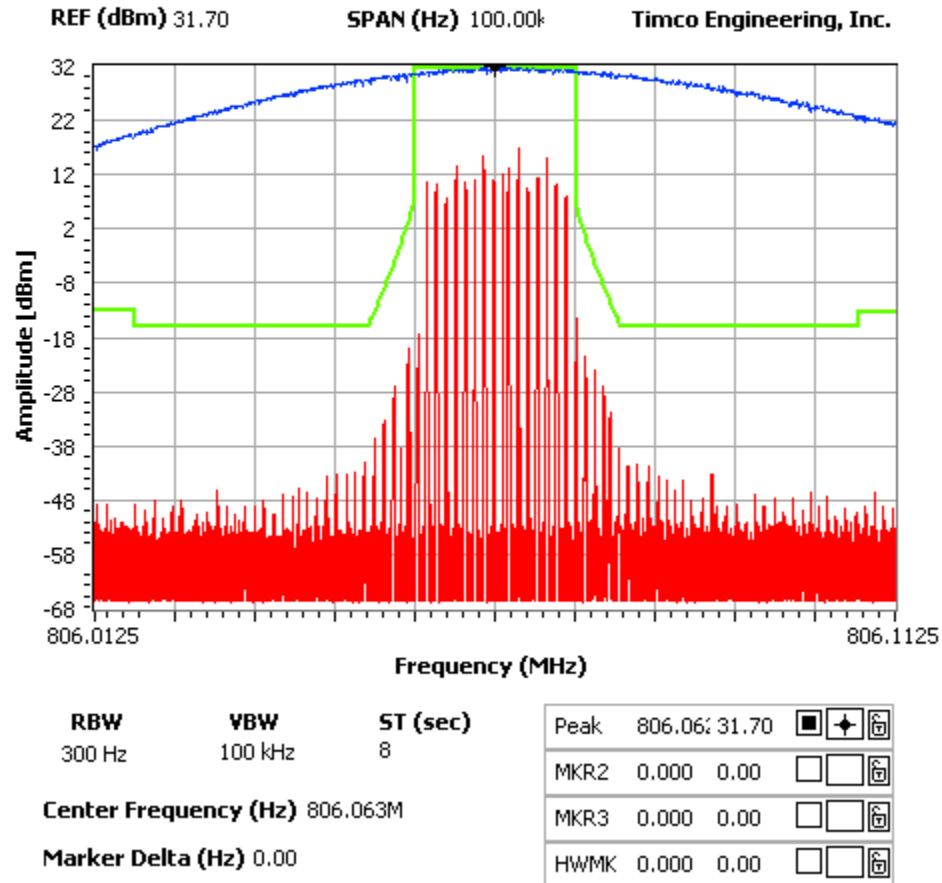

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 813.5625 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

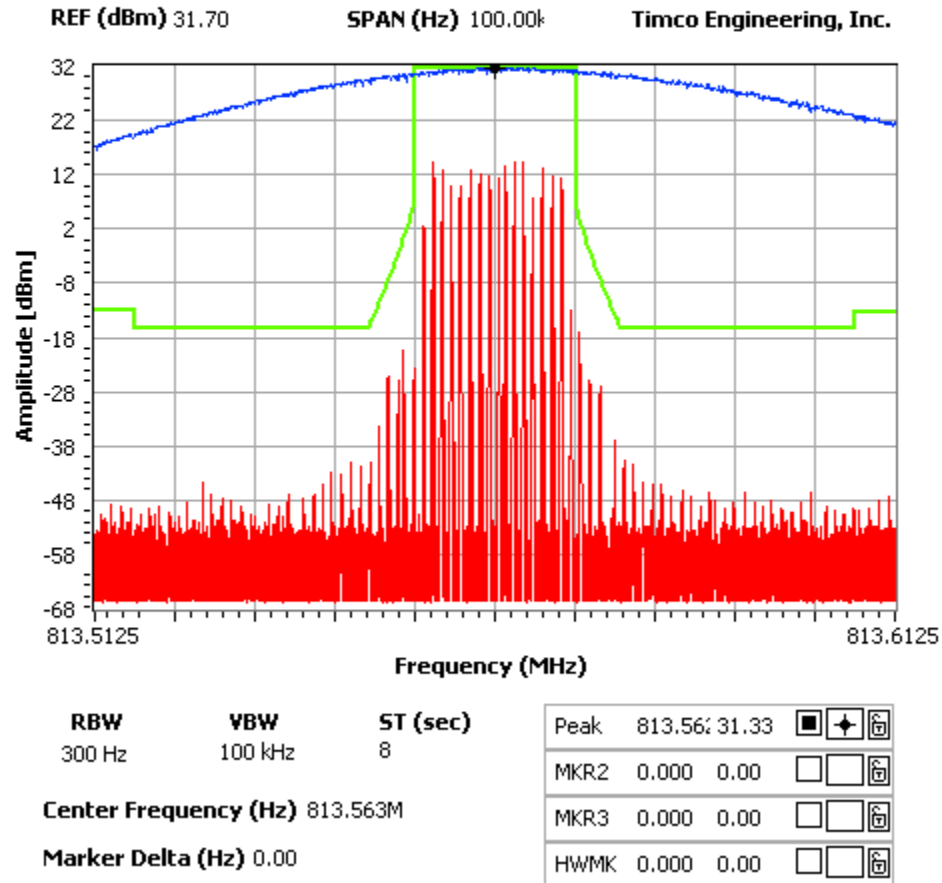

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 813.5625 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

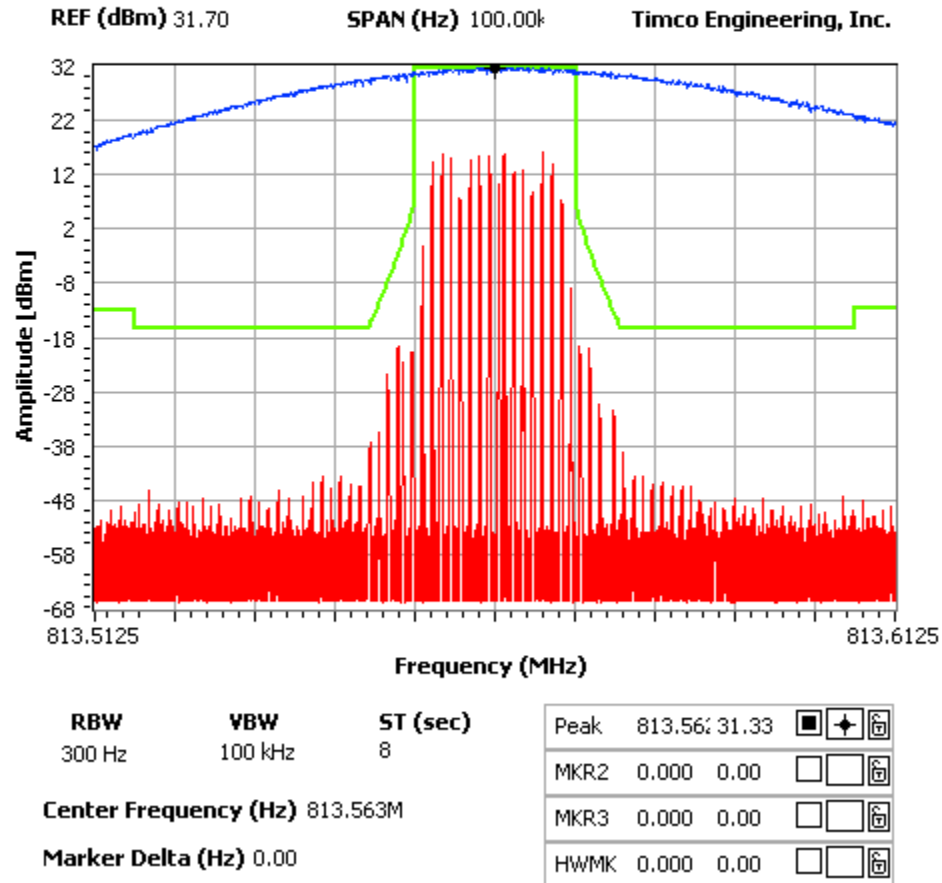

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 813.5625 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

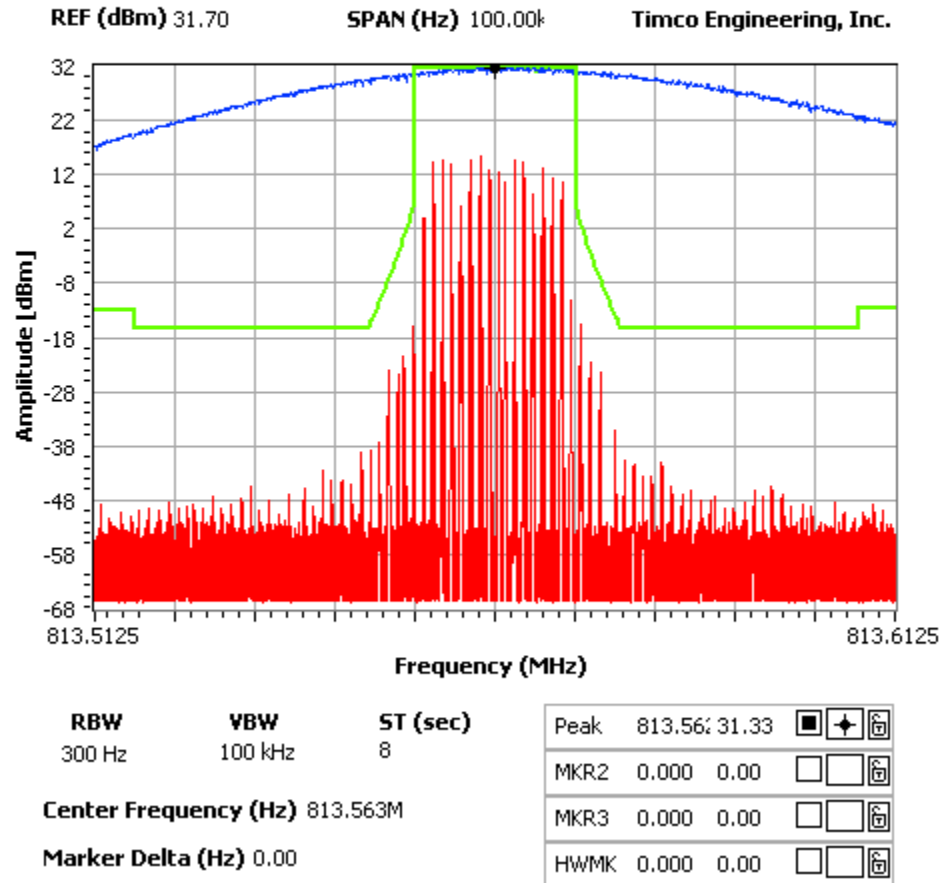

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 820.9875 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

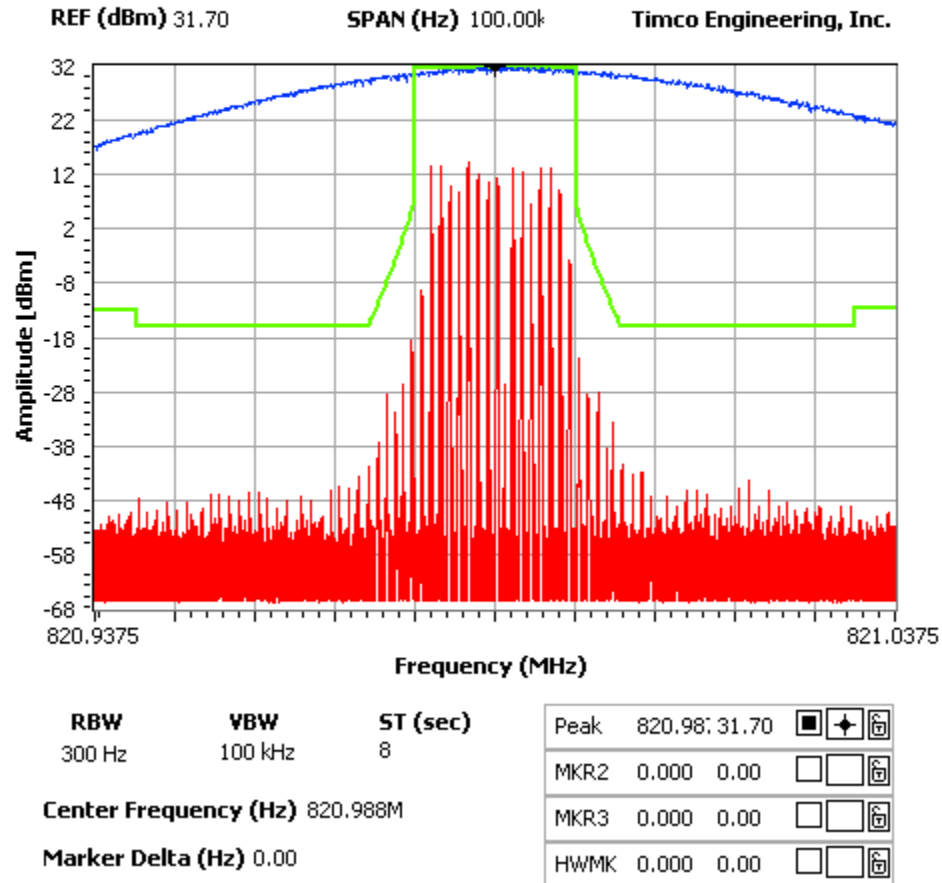

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 820.9875 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

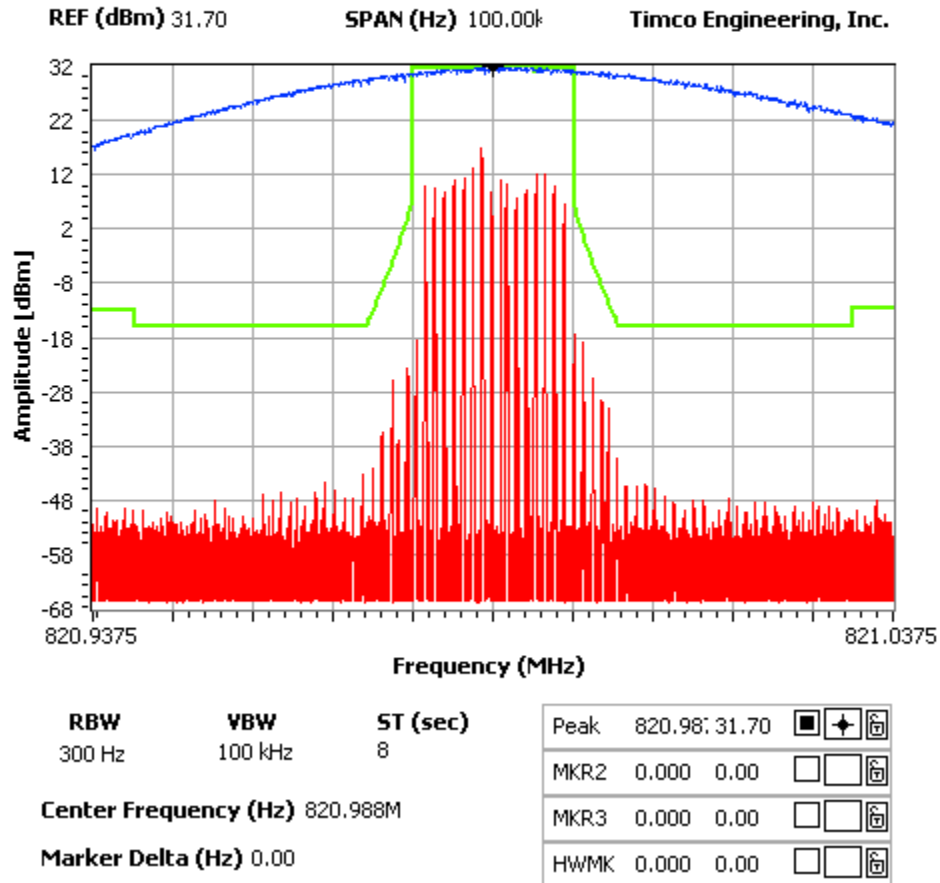

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 820.9875 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

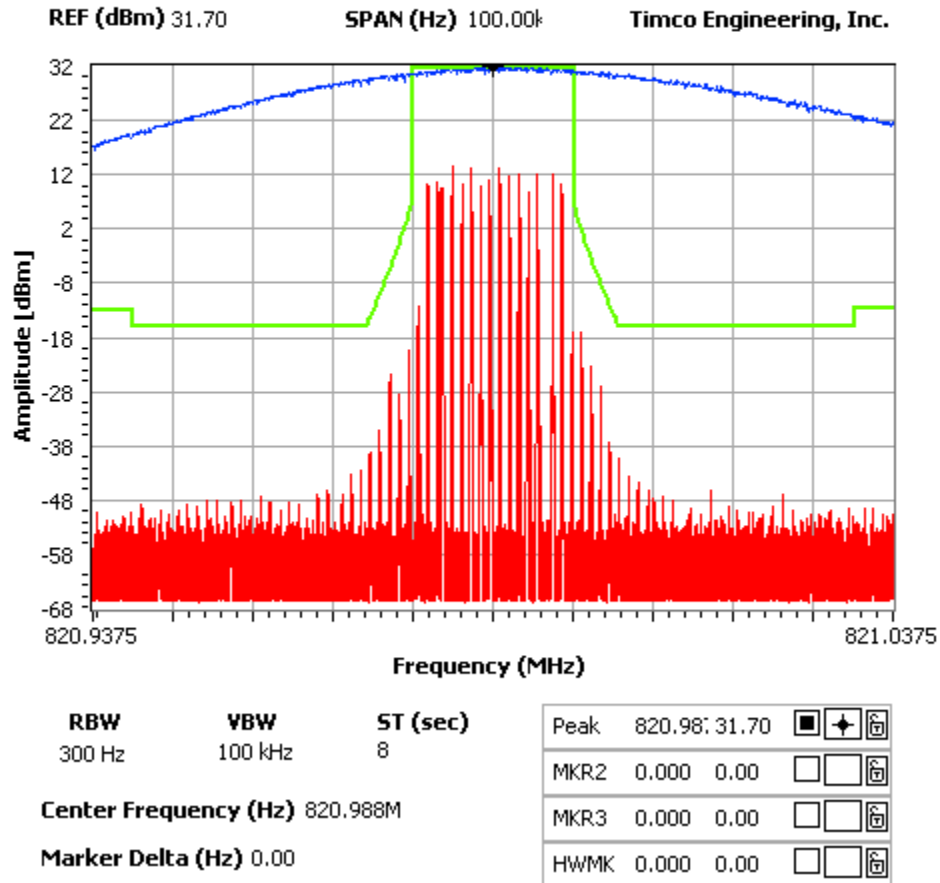

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 824.9875 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

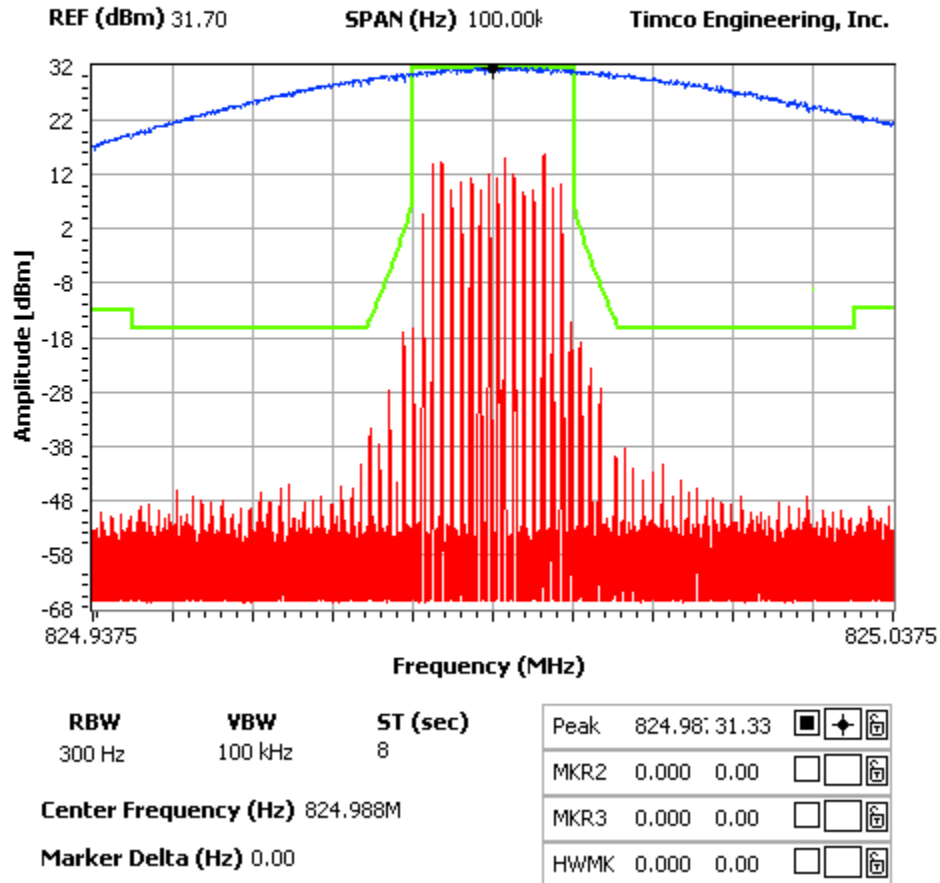

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 824.9875 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

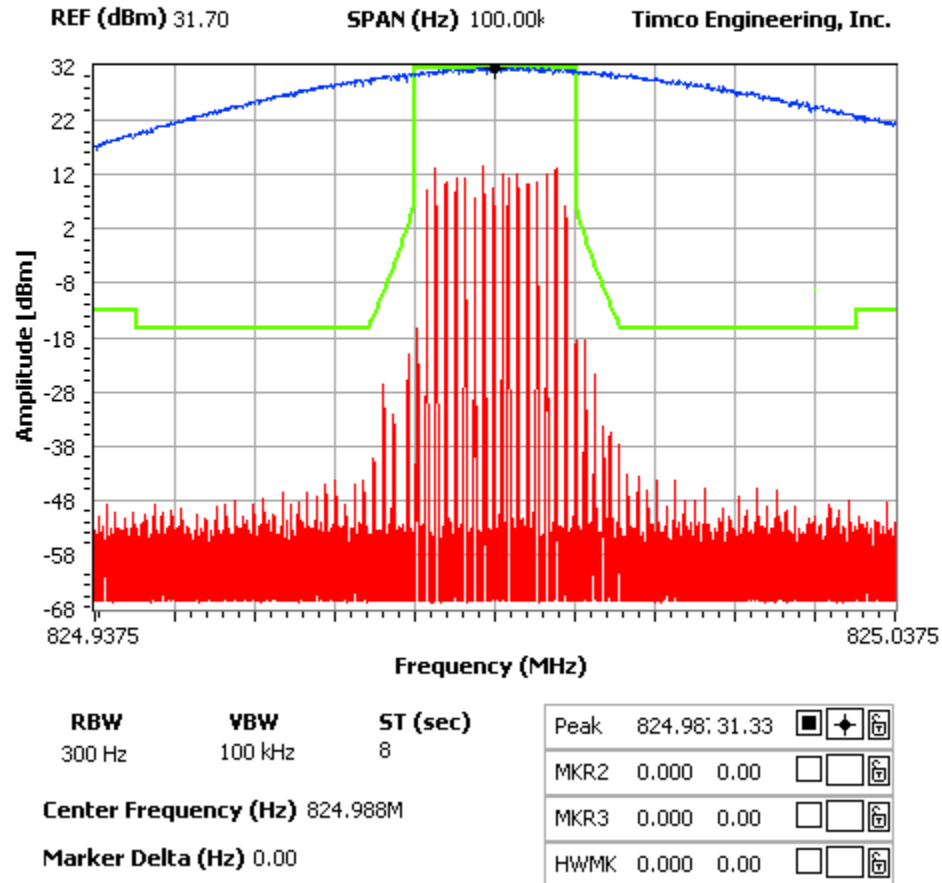

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 824.9875 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

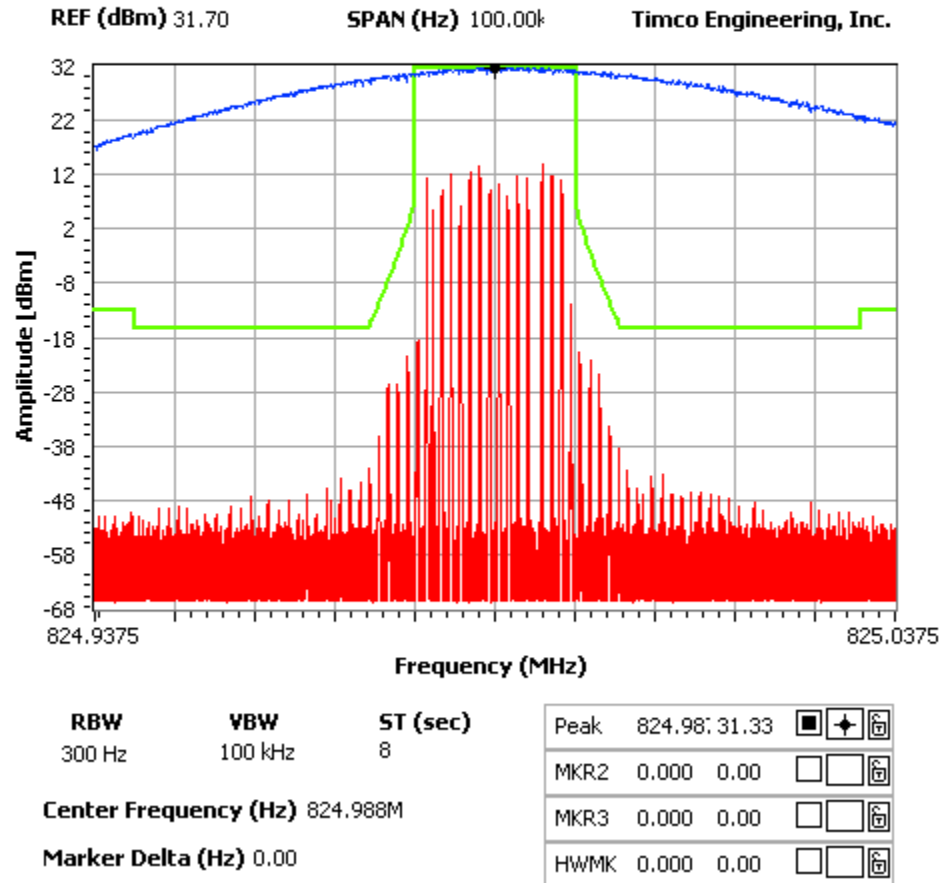

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 896.01875 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

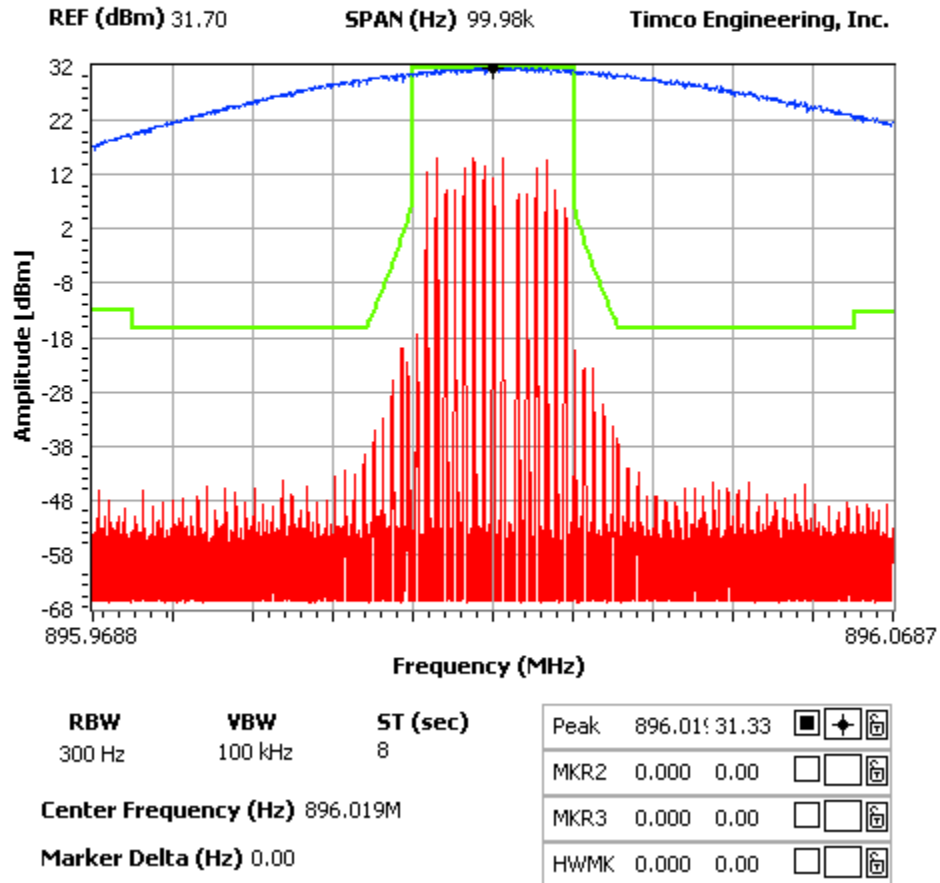

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 896.01875 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

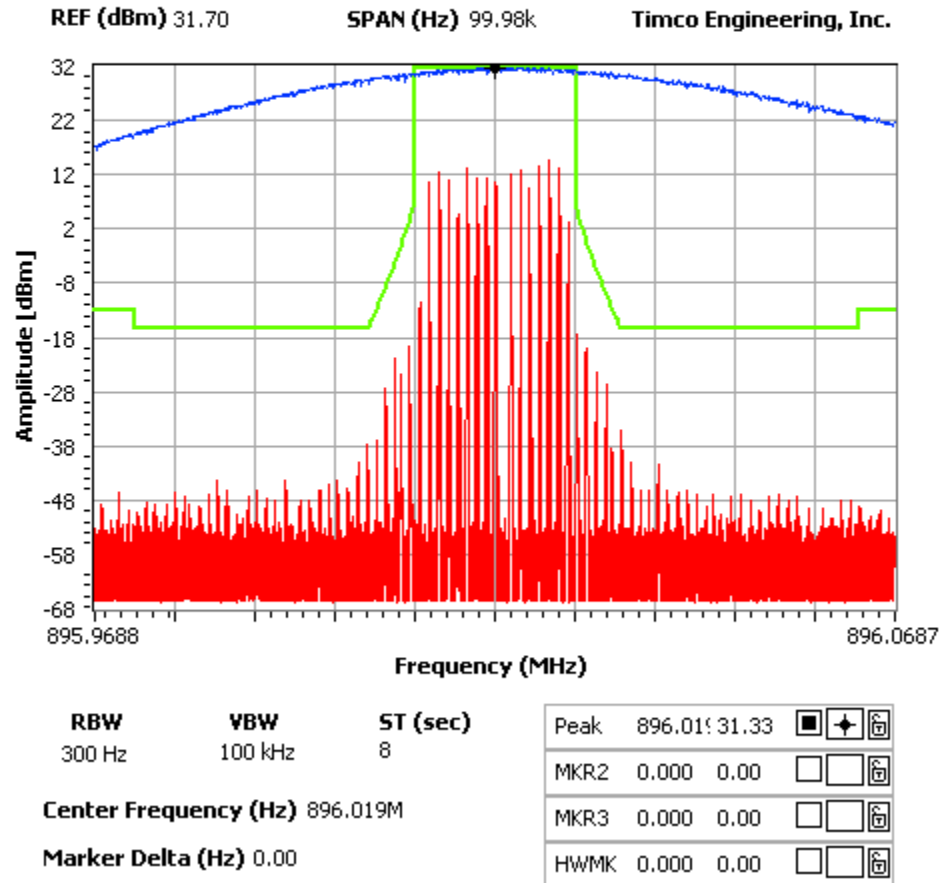

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 896.01875 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

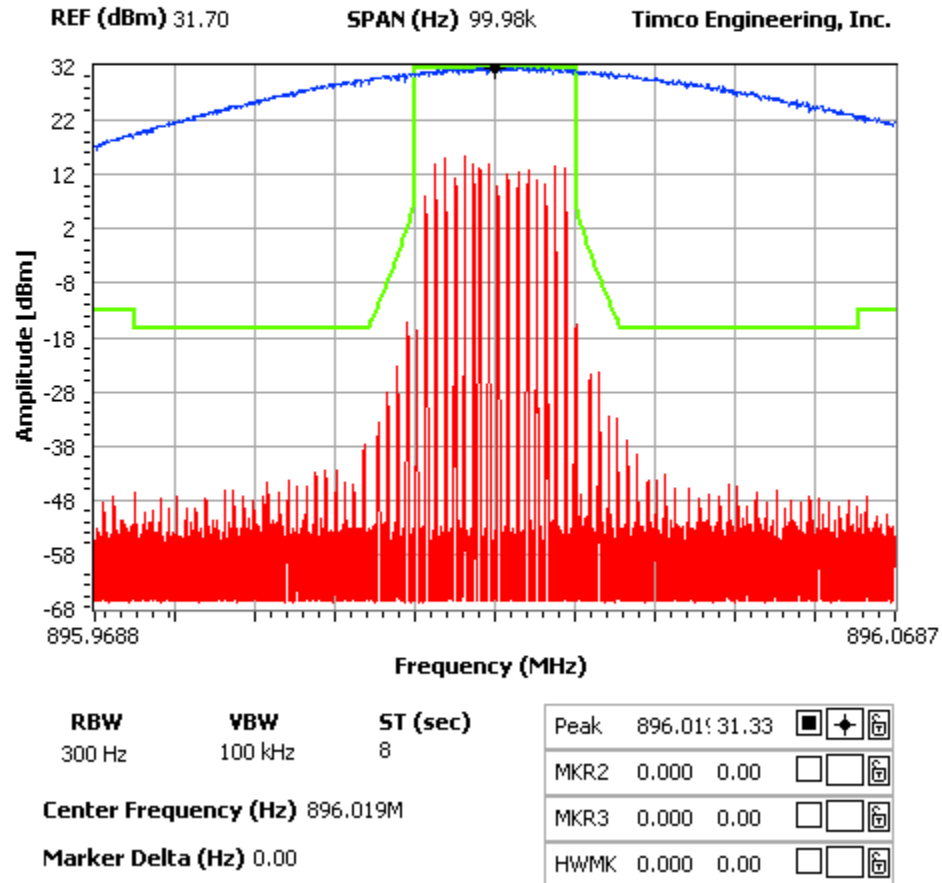

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 900.98125 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

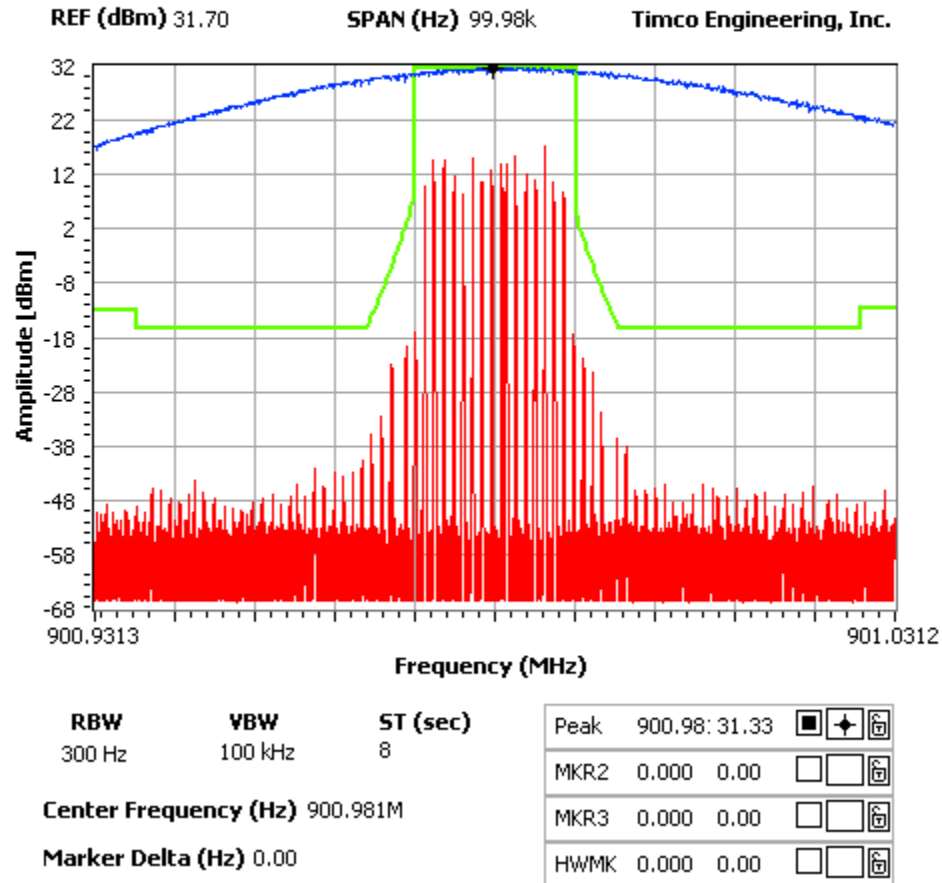

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 900.98125 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

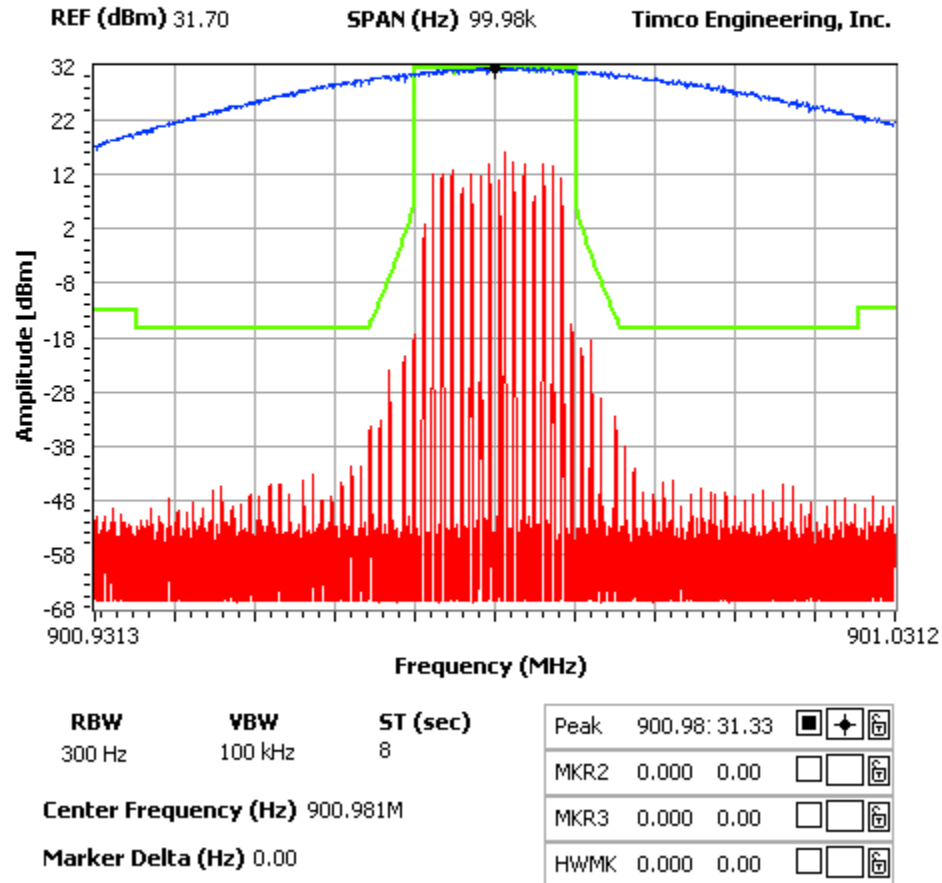

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 900.98125 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

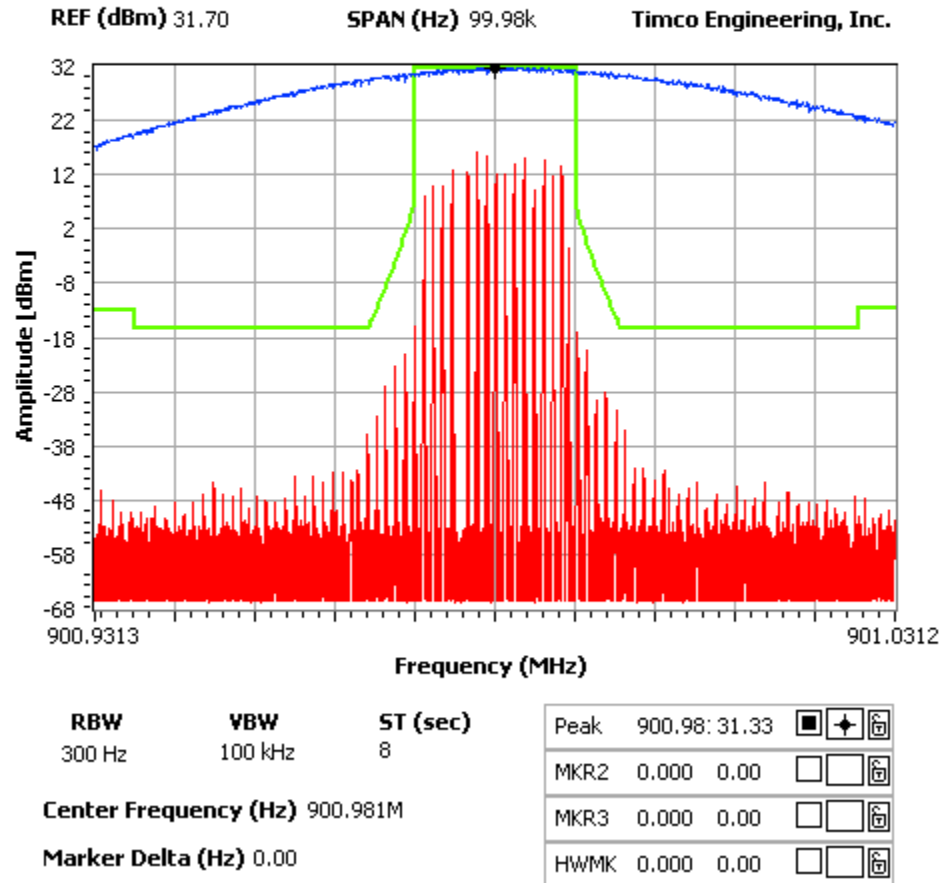

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 901.49375 MHz -- QPSK -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

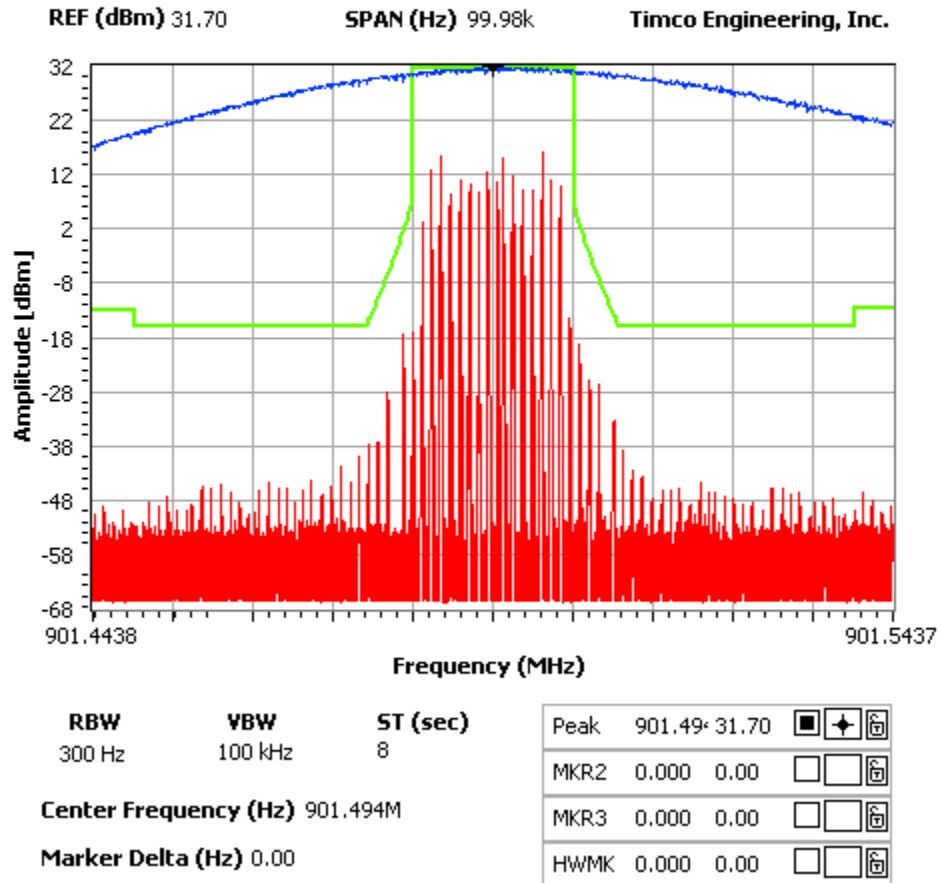

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 901.49375 MHz -- 16QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

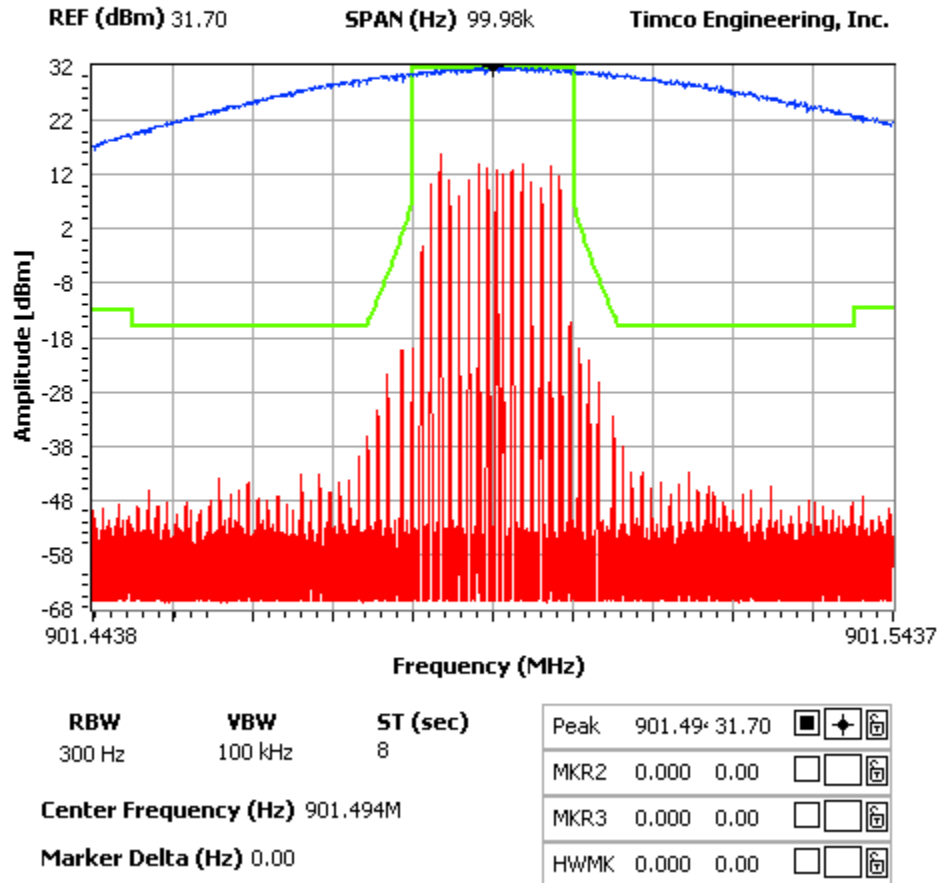

Applicant: MOTOROLA INC.


FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

NOTES:

OCCUPIED BANDWIDTH -- 901.49375 MHz -- 64QAM -- MAX POWER
MOTOROLA, INC. -- FCC ID: IHDP56KV1

FCC 90.210 Mask G

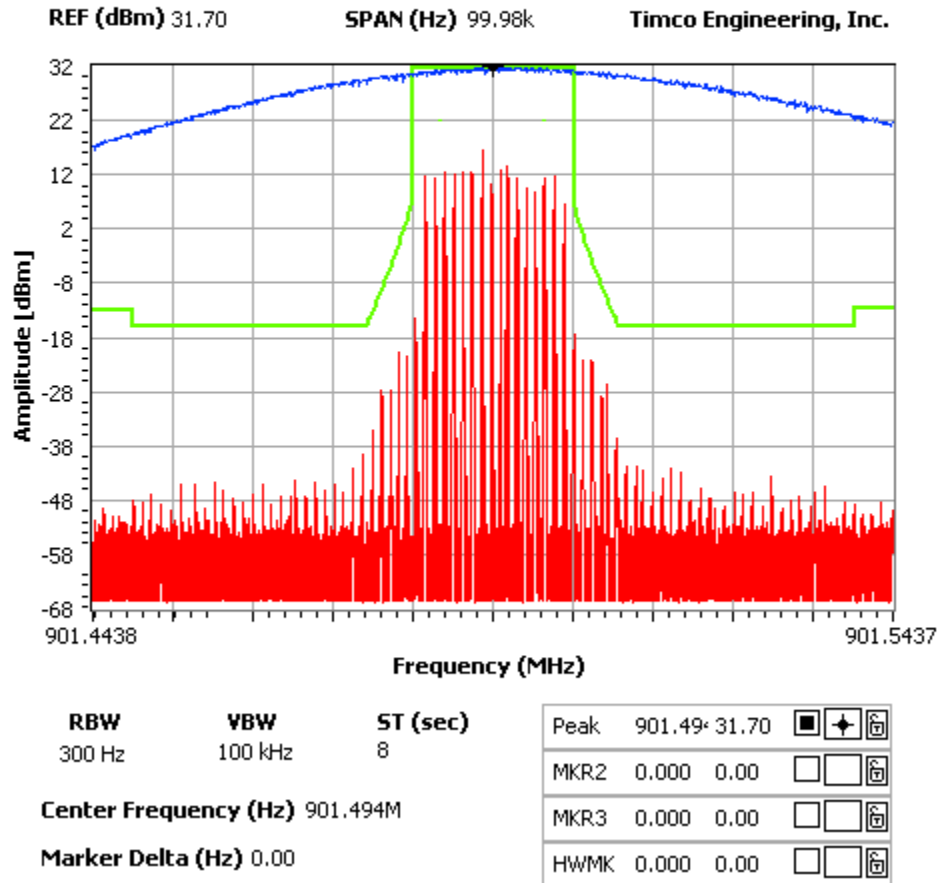

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

FIELD STRENGTH OF SPURIOUS EMISSIONS - Max Power

Rule Parts. No.: Part 2.1051(a), Pt 90, Pt 24, RSS-119, RSS-134

Requirements: 25kHz Channel Spacing = $43 + 10\log(0.603) = 40.8$ dBc

Test Data:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
806.0625	0	0		813.5625	0	0
1612.1250	V	*		1627.1250	V	*
2418.1875	V	*		2440.6875	H	*
3224.2500	H	*		3254.2500	H	*
4030.3125	V	*		4067.8125	V	*
4836.3750	V	*		4881.3750	V	*
5642.4375	V	*		5694.9375	H	*
6448.5000	V	*		6508.5000	H	*
7254.5625	H	*		7322.0625	H	*
8060.6250	V	*		8135.6250	V	*

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
820.9875	0	0		824.9875	0	0
1641.9750	V	*		1649.9750	V	*
2462.9625	V	*		2474.9625	V	*
3283.9500	V	*		3299.9500	V	*
4104.9375	V	*		4124.9375	H	*
4925.9250	V	*		4949.9250	V	*
5746.9125	V	*		5774.9125	H	*
6567.9000	V	*		6599.9000	V	*
7388.8875	H	*		7424.8875	V	*
8209.8750	H	*		8249.8750	H	*

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
896.01875	0	0		900.98125	0	0		901.49375	0	0
1792.03750	V	*		1801.96250	V	*		1802.98750	H	*
2688.05625	H	*		2702.94375	H	*		2704.48125	V	*
3584.07500	H	*		3603.92500	V	*		3605.97500	H	*
4480.09375	H	*		4504.90625	H	*		4507.46875	H	*
5376.11250	H	*		5405.88750	V	*		5408.96250	H	*
6272.13125	V	*		6306.86875	V	*		6310.45625	H	*
7168.15000	V	*		7207.85000	H	*		7211.95000	V	*
8064.16875	H	*		8108.83125	H	*		8113.44375	V	*
8960.18750	H	*		9009.81250	V	*		9014.93750	V	*

*** = 20 dB or more below the limit**

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

FIELD STRENGTH OF SPURIOUS EMISSIONS - Max Cutback

Rule Parts. No.: Part 2.1051(a), Pt 90, Pt 24, RSS-119, RSS-134

Requirements: 25kHz Channel Spacing = $43 + 10\log(0.001) = 13.0$ dBc

Test Data:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
806.0625	0	0		813.5625	0	0
1612.1250	V	*		1627.1250	H	*
2418.1875	V	*		2440.6875	H	*
3224.2500	H	*		3254.2500	V	*
4030.3125	V	*		4067.8125	H	*
4836.3750	H	*		4881.3750	V	*
5642.4375	H	*		5694.9375	V	*
6448.5000	V	*		6508.5000	V	*
7254.5625	H	*		7322.0625	V	*
8060.6250	V	*		8135.6250	H	*

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
820.9875	0	0		824.9875	0	0
1641.9750	V	*		1649.9750	H	*
2462.9625	V	*		2474.9625	H	*
3283.9500	H	*		3299.9500	H	*
4104.9375	V	*		4124.9375	V	*
4925.9250	H	*		4949.9250	H	*
5746.9125	H	*		5774.9125	H	*
6567.9000	V	*		6599.9000	V	*
7388.8875	H	*		7424.8875	H	*
8209.8750	H	*		8249.8750	H	*

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)		Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
896.01875	0	0		900.98125	0	0		901.49375	0	0
1792.03750	V	*		1801.96250	V	*		1802.98750	H	*
2688.05625	H	*		2702.94375	V	*		2704.48125	V	*
3584.07500	V	*		3603.92500	V	*		3605.97500	V	*
4480.09375	V	*		4504.90625	H	*		4507.46875	V	*
5376.11250	V	*		5405.88750	H	*		5408.96250	H	*
6272.13125	V	*		6306.86875	V	*		6310.45625	V	*
7168.15000	V	*		7207.85000	V	*		7211.95000	H	*
8064.16875	H	*		8108.83125	H	*		8113.44375	H	*
8960.18750	H	*		9009.81250	V	*		9014.93750	V	*

* = 20 dB or more below the limit

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1


Report: Y:\MMOTOROLA_Libertyville_Il\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

ADAPTOR CHARGING, TX ON
iDEN
POWERLINE CONDUCTED EMISSIONS – LINE 1

NOTES:

POWERLINE CONDUCTED -- LINE 1
MOTOROLA, INC. -- FCC ID: IHD P56KV1

FCC 15.107 Mask Class B

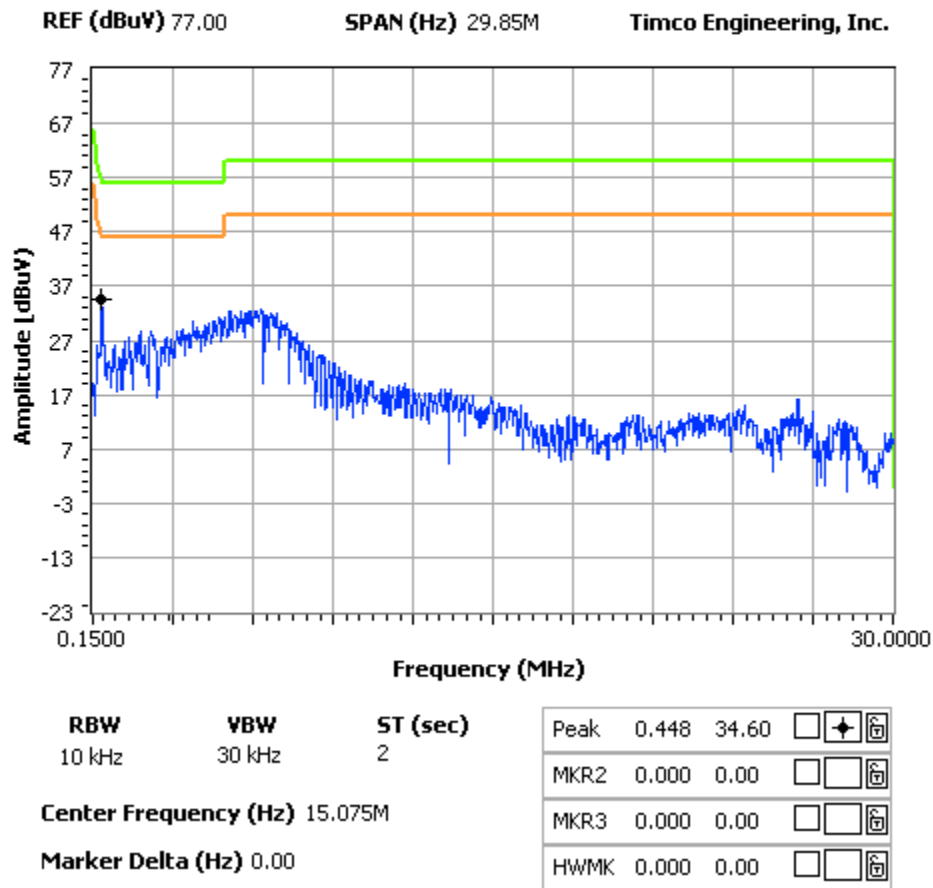


Applicant: MOTOROLA INC.
FCC ID: IHDP56KV1
Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2

NOTES:

POWERLINE CONDUCTED -- LINE 2
MOTOROLA, INC. -- FCC ID: IHD P56KV1

FCC 15.107 Mask Class B

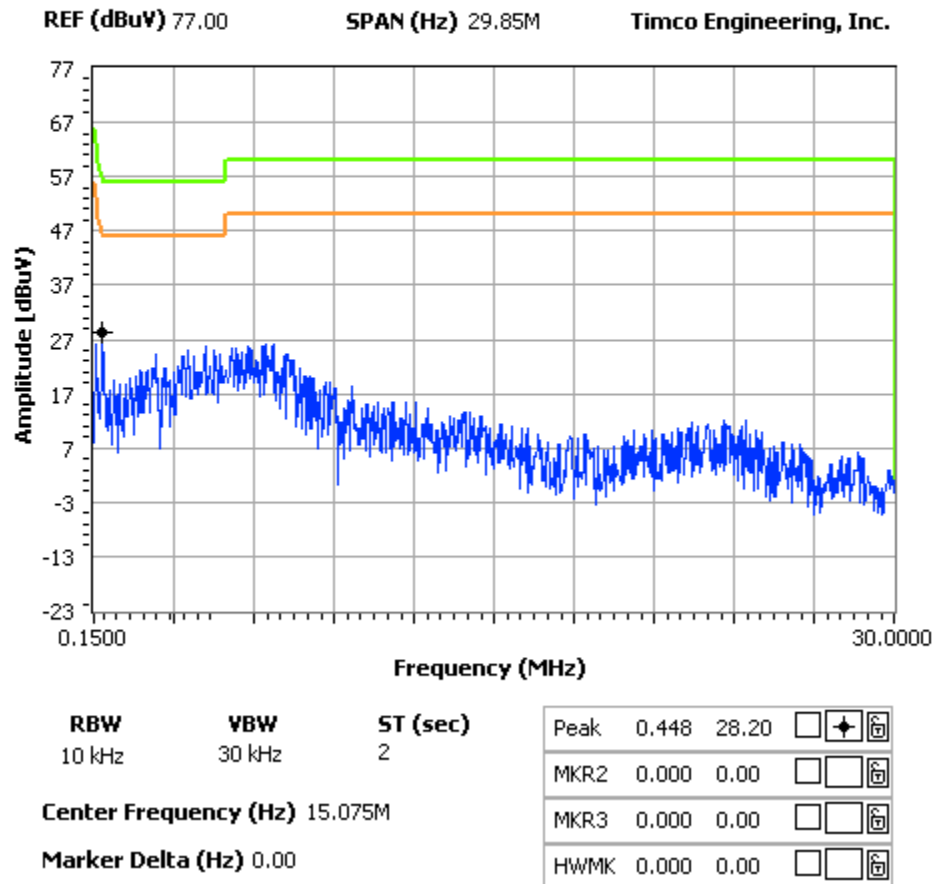

Applicant: MOTOROLA INC.

FCC ID: IHDP56KV1

Report: Y:\MMOTOROLA_Libertyville_IL\3151AUT9\3151AUT9TestReport_i1_iDEN_TX.doc