



849 NW State Road 45  
Newberry, FL 32669 USA  
Ph: 888.472.2424 or 352.472.5500  
Fax: 352.472.2030  
Email: [info@timcoengr.com](mailto:info@timcoengr.com)  
Website: [www.timcoengr.com](http://www.timcoengr.com)

## COMPLIANCE TEST REPORT PER FCC PART 15.247 FHSS AND IC RSS-210

Applicant	MOTOROLA, INC.
Address	600 NORTH U.S. HWY 45 LIBERTYVILLE ILLINOIS 60048-5343 USA
FCC ID	IHDP56KY1
MODEL NUMBER	H88XAH6JR2AN
Product Description	iDEN i296
Date Sample Received	1/8/2010
Date Tested	1/12/2010
Tested By	Richard Block
Approved By	Mario de Aranzeta
Report Number	45BUT9TestReport_i296_MT_TX.pdf
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



## TABLE OF CONTENT

ATTESTATION .....	3
REPORT SUMMARY .....	4
TEST ENVIRONMENT AND TEST SETUP .....	4
DUT SPECIFICATION .....	5
EMC EQUIPMENT LIST .....	6
TEST PROCEDURES .....	7
RF OUTPUT POWER .....	9
FIELD STRENGTH OF SPURIOUS EMISSIONS .....	10
POWER LINE CONDUCTED INTERFERENCE .....	13

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_11\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

**ATTESTATION**

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.



Testing Certificate #0955-01

**AUTHORIZED BY:** Mario de Aranzeta



**SIGNATURE:**

**FUNCTION:** Lab Supervisor/ Test Engineer

**DATE:** 1/12/2010

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_11\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc



## REPORT SUMMARY

Disclaimer:	The test results relate only to the items tested.
Purpose of Test:	To demonstrate that the DUT is compliant with FCC Pt 15.247 requirements for a FHSS radio. To demonstrate that the DUT is compliant with IC RSS-210 requirements for a FHSS radio.
Applicable Standards:	FCC Pt 15.247, ANSI C63.4: 2003, ANSI TIA-603: 2004, FCC Pt 15.109, RSS-210, RSS-GEN
Related Reports:	Digital Portion Verified

## TEST ENVIRONMENT AND TEST SETUP

Test Facilities:	All measurements were made at one or more of the test sites of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, Newberry, FL 32669.
Laboratory Test Conditions:	Temperature: 26°C Humidity: 55%
Test Exercise:	The DUT was set in continuous transmit mode of operation.
Deviation to the Standards:	There was no deviation from the standard.
Modification to the DUT:	No modification was made.
Supporting Accessories:	None

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_II\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

**DUT SPECIFICATION**

<b>Applicable Standard</b>	Part 15.247		
<b>DUT Description</b>	iDEN i296		
<b>FCC ID</b>	IHDP56KY1		
<b>MODEL NUMBER</b>	H88XAH6JR2AN		
<b>Serial Number</b>	364VKYWL4L		
<b>Hardware</b>	P3B-5		
<b>Software</b>	DC8.00.17		
<b>Operating Frequency</b>	TX: 902.525 – 927.475 MHz		
<b>DUT Power Source</b>	<input checked="" type="checkbox"/> 110–120Vac/50– 60Hz		
	<input type="checkbox"/> DC Power		
	<input type="checkbox"/> Battery Operated Exclusively		
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_II\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

**EMC EQUIPMENT LIST**

<b>Device</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal/Char Date</b>	<b>Due Date</b>
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/10
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/09	3/30/11
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/09	3/3/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/09	4/5/12
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/09	5/9/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/09	5/14/11
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_II\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc


**TEST PROCEDURES**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed with the DUT transmitting. The resolution bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**BANDWIDTH 20 dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.


**RF Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.

Output Power Test Setup Diagram

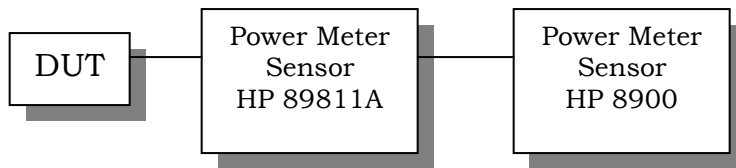

**ANTENNA CONDUCTED EMISSIONS:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a peak power meter. The antenna is non-directional and doesn't exceed 6 dBi gain. The power output was measured at three places in the band highest is reported below.

Spurious Emissions at Antenna Terminals

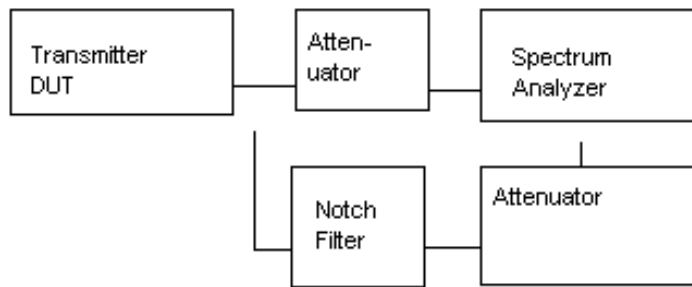



**RADIATION INTERFERENCE:** The test procedure used was ANSI C63.4-2003 using an Agilent spectrum receiver with preselector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND:** An in band field strength measurement of the fundamental emission using the RBW and detector function required by ANSI C63.4-2003 and the FCC rules.

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_11\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

**RF OUTPUT POWER**

**Rules Part No.:** 15.247(b), RSS-210

**Requirements:** The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Data:**

Frequency MHz	Power mW
902.525	890
915.525	890
927.475	890

## FIELD STRENGTH OF SPURIOUS EMISSIONS

**Rules Part No.:** 15.247(c), 15.205 & 15.209(b), RSS-210

**Requirements:**

§15.247(c) & §15.205	
(Fundamental) Frequency	(Field Strength) Limits
902 – 928 MHz 2.4 – 2.4835 GHz	127.37 dB $\mu$ V/m
§15.209	
30 - 88 MHz	40 dB $\mu$ V/m @3M
88 -216 MHz	43.5 dB $\mu$ V/m @3M
216 -960 MHz	46 dB $\mu$ V/m @3M
ABOVE 960 MHz	54dB $\mu$ V/m

Emissions that fall in the restricted bands (15.205) must be less than or equal to 500  $\mu$ V/m (54 dB $\mu$ V/m). Spurious not in a restricted band must be 20 dBc.

Harmonics were measured to the 10<sup>th</sup> harmonic.

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB	Peak Average
902.5	902.53	78.1	H	1.95	23.33	103.38	*	
902.5	902.53	91.2	V	1.95	22.67	115.82	11.56	
902.5	1,805.00	16.0	V	2.74	29.95	48.69	5.31	
902.5	1,805.00	20.1	H	2.74	29.95	52.79	1.21	Average
902.5	1,805.00	23.3	H	2.74	29.95	55.99	18.01	Peak
902.5	2,707.50	14.2	H	3.40	32.54	50.14	3.86	
902.5	2,707.50	16.8	V	3.40	32.54	52.74	1.26	
902.5	3,610.10	7.1	V	4.15	32.98	44.23	9.77	
902.5	3,610.10	7.3	H	4.15	32.98	44.43	9.57	
902.5	4,512.60	5.2	V	4.76	34.10	44.06	9.94	
902.5	4,512.60	6.0	H	4.76	34.10	44.86	9.14	
902.5	5,415.10	3.5	H	5.12	34.60	43.22	10.78	
902.5	5,415.10	5.1	V	5.12	34.60	44.82	9.18	

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_II\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB	Peak Average
902.5	6,317.60	4.7	V	5.40	35.65	45.75	8.25	
902.5	6,317.60	5.7	H	5.40	35.65	46.75	7.25	
902.5	7,220.20	4.7	H	5.73	36.04	46.47	7.53	
902.5	7,220.20	4.9	V	5.73	36.04	46.67	7.33	
902.5	8,122.70	5.4	V	6.25	36.00	47.65	6.35	
902.5	8,122.70	5.4	H	6.25	36.00	47.65	6.35	
902.5	9,025.20	4.8	V	6.61	36.32	47.73	6.27	
902.5	9,025.20	6.1	H	6.61	36.32	49.03	4.97	
915.5	915.53	79.8	H	1.97	23.34	105.11	*	
915.5	915.53	91.2	V	1.97	22.60	115.77	11.61	
915.5	1,831.00	17.0	V	2.76	30.12	49.88	4.12	
915.5	1,831.00	18.3	H	2.76	30.12	51.18	2.82	
915.5	2,746.00	12.9	H	3.42	32.55	48.87	5.13	
915.5	2,746.50	17.3	V	3.42	32.55	53.27	0.73	
915.5	3,662.10	6.8	H	4.20	33.06	44.06	9.94	
915.5	3,662.10	8.0	V	4.20	33.06	45.26	8.74	
915.5	4,577.60	5.4	H	4.79	34.10	44.29	9.71	
915.5	4,577.60	5.9	V	4.79	34.10	44.79	9.21	
915.5	5,493.10	4.1	V	5.15	34.69	43.94	10.06	
915.5	5,493.10	4.8	H	5.15	34.69	44.64	9.36	
915.5	6,408.60	4.5	V	5.42	35.73	45.65	8.35	
915.5	6,408.60	5.4	H	5.42	35.73	46.55	7.45	
915.5	7,324.20	5.5	V	5.79	36.06	47.35	6.65	
915.5	7,324.20	5.7	H	5.79	36.06	47.55	6.45	
915.5	8,239.70	5.1	V	6.30	36.00	47.40	6.60	
915.5	8,239.70	5.4	H	6.30	36.00	47.70	6.30	
915.5	9,155.20	6.1	V	6.65	36.39	49.14	4.86	
915.5	9,155.20	7.5	H	6.65	36.39	50.54	3.46	
927.5	927.48	81.5	H	1.99	23.45	106.94	*	
927.5	927.48	91.7	V	1.99	22.67	116.36	11.02	
927.5	1,854.90	18.9	V	2.78	30.27	51.95	2.05	
927.5	1,854.90	20.7	H	2.78	30.27	53.75	0.25	
927.5	2,782.40	15.3	H	3.45	32.56	51.31	2.69	
927.5	2,782.40	15.3	V	3.45	32.56	51.31	2.69	Average
927.5	2,782.40	19.6	V	3.45	32.56	55.61	18.39	Peak

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_II\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

<b>Tuned Frequency MHz</b>	<b>Emission Frequency MHz</b>	<b>Meter Reading dBuV</b>	<b>Ant. Polarity</b>	<b>Coax Loss dB</b>	<b>Correction Facto dB/m</b>	<b>Field Strength dBuV/m</b>	<b>Margin dB</b>	<b>Peak Average</b>
927.5	3,709.90	8.4	V	4.24	33.14	45.78	8.22	
927.5	3,709.90	9.2	H	4.24	33.14	46.58	7.42	
927.5	4,637.30	6.4	V	4.82	34.10	45.32	8.68	
927.5	4,637.30	7.7	H	4.82	34.10	46.62	7.38	
927.5	5,564.80	4.0	V	5.17	34.79	43.96	10.04	
927.5	5,564.80	5.1	H	5.17	34.79	45.06	8.94	
927.5	6,492.30	4.6	H	5.45	35.79	45.84	8.16	
927.5	6,492.30	6.0	V	5.45	35.79	47.24	6.76	
927.5	7,419.80	5.8	V	5.85	36.08	47.73	6.27	
927.5	7,419.80	7.4	H	5.85	36.08	49.33	4.67	
927.5	8,347.20	5.1	V	6.34	36.00	47.44	6.56	
927.5	8,347.20	5.4	H	6.34	36.00	47.74	6.26	
927.5	9,274.70	5.2	H	6.68	36.46	48.34	5.66	
927.5	9,274.70	6.4	V	6.68	36.46	49.54	4.46	

\* = 20 dB or more below the limit

All readings are peak unless marked otherwise.

Harmonics were checked through the 10<sup>th</sup> harmonic.

**POWER LINE CONDUCTED INTERFERENCE**

**Rules Part No.:** 15.207

**Requirements:**

Frequency (MHz)	Quasi Peak Limits (dB $\mu$ V)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50


**Test Data:** The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

ADAPTOR CHARGING, TX ON  
MOTOTALK  
POWERLINE CONDUCTED EMISSIONS – LINE 1

**NOTES:**

POWERLINE CONDUCTED -- LINE 1  
MOTOROLA, INC. -- FCC ID: IHD P56KY1

**FCC 15.107 Mask Class B**

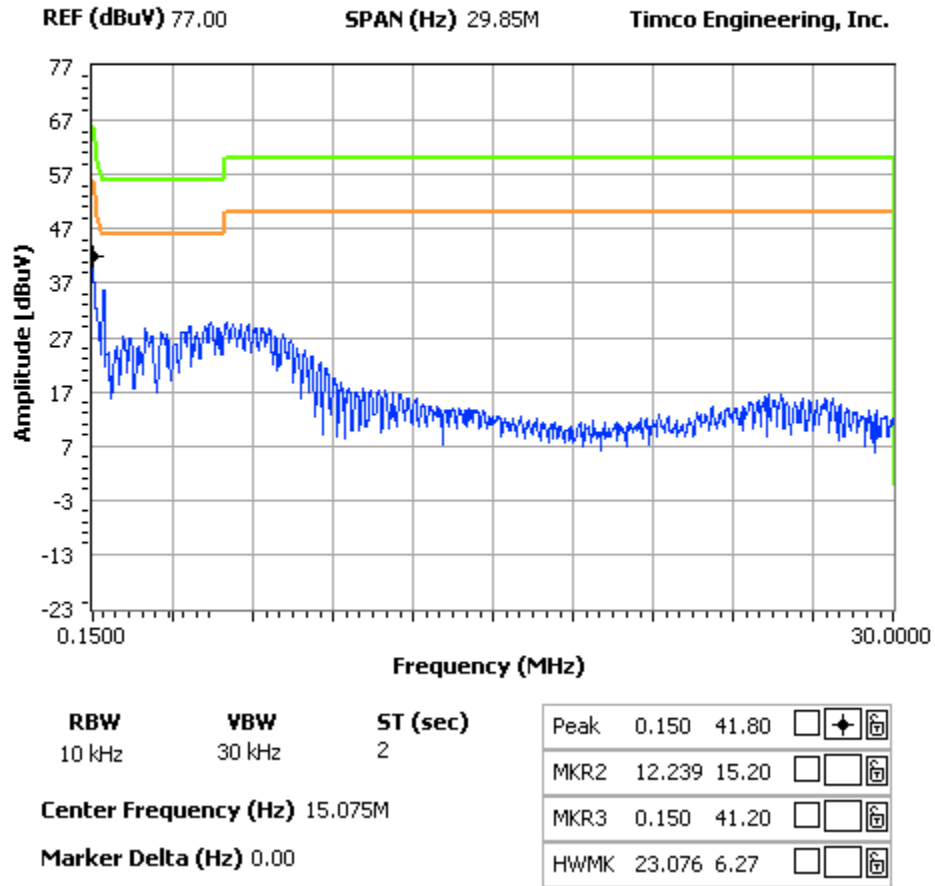

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1


Report: Z:\M\MOTOROLA\_Libertyville\_I1\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2

**NOTES:**

POWERLINE CONDUCTED -- LINE 2  
 MOTOROLA, INC. -- FCC ID: IHD P56KY1

**FCC 15.107 Mask Class B**

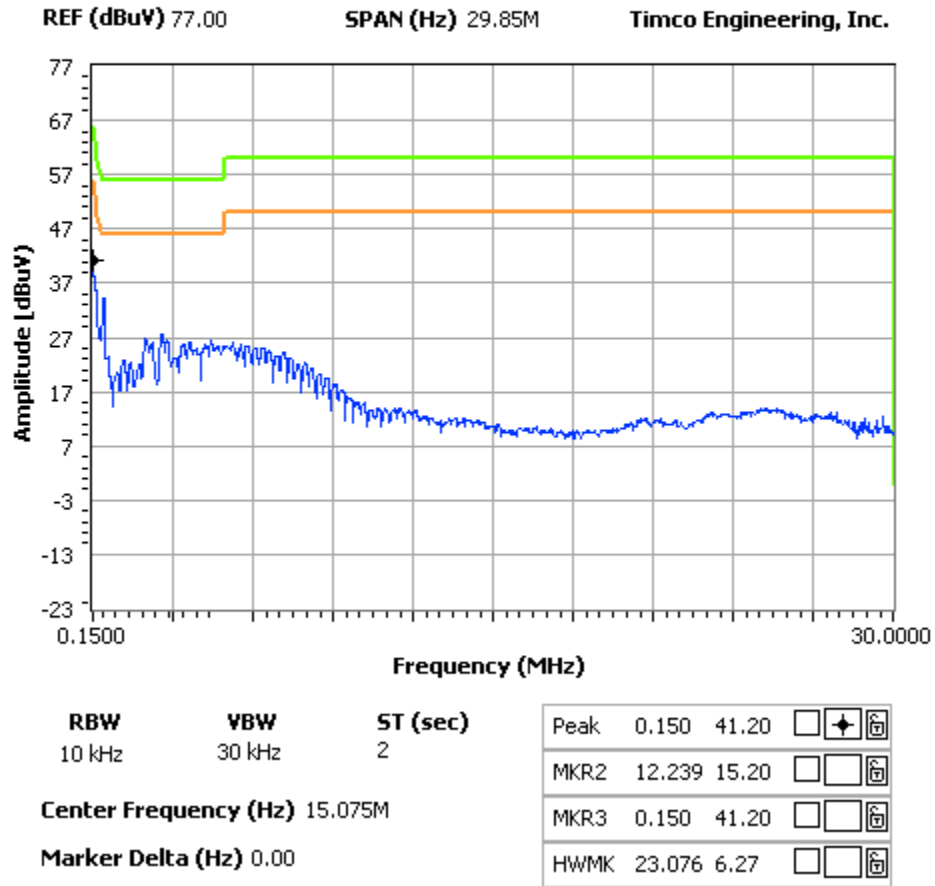

Applicant: MOTOROLA, INC.

FCC ID: IHDP56KY1

Report: Z:\M\MOTOROLA\_Libertyville\_II\45BUT9\45BUT9TestReport\_i296\_MT\_TX.doc