



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT - Addendum**

**Test Report Number** – 23501-1 WLAN

**Report Date** – 2009-12-01

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2009-11-26 to 2009-12-01

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2009-12-01

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885  
IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ  
ISO/IEC-17025:2005 accredited by UKAS



**Table of Contents**

Test Report Details ..... 3  
Applicable Standards ..... 4  
Summary of Testing..... 5  
General and Special Conditions..... 5  
Equipment and Cable Configurations..... 6  
Measuring Equipment and Calibration Information ..... 6  
Measurement Procedures and Data..... 8  
    FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 8  
        Measurement Procedure..... 8  
        Measurement Results ..... 9  
        WLAN Band (b) ..... 9  
        WLAN Band (g) ..... 16  
    BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS..... 23  
        Measurement Procedure..... 23  
        Measurement Results ..... 23  
        WLAN Band (b) ..... 24  
        WLAN Band (g) ..... 26

## **Test Report Details**

Tests Performed By: Motorola (China) Technologies Ltd.  
Asia Global Compliance Labs  
No.1 Wang Jing East Road  
Chao Yang District  
Beijing, 100102, P. R. China  
Phone: +86 10 8473 2610  
FCC Registration Number: 177885  
IC Registration Number: 109AW-1

Tests Requested By: Motorola Inc.  
Mobile Devices business  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type: Cell phone with embedded WLAN

Signaling Capability: WCDMA 900/1700/2100, GSM  
850/900/1800/1900, HSDPA 7.2 Mbps  
(Category 7/8), EDGE Class 12, GPRS Class  
12, aGPS/Standalone GPS/aGPS, Bluetooth  
Version 2.0+EDR, 802.11b/802.11g

ESN: TA1130012T

FCC ID: IHDP56KZ1

Project number: 23501-1

Testing Complete Date: 12-01-2009

## Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart C – Intentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 27 - Wireless Communications Service
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: ANSI C63.4-2003, RSS-Gen Issue 2, RSS-210 Issue 7.

The following tests were performed according to the regulations:

- The **spurious radiated emission** requirements of **§ 15.247 and § 15.249 of CFR47 Part 15 2007**, specifically” radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Under this project only 30 to 1000 MHz, 1 to 26.5 GHz radiated and radiated band-edge measurements were performed.
- For frequencies below 1 GHz a 100 kHz RBW (6 dB) is used and above 1 GHz a 1 MHz RBW (6 dB) is used.

**Summary of Testing**

Test	Test Name	Pass/Fail
1	Field Strength of Spurious Emissions	Pass
2	Band-edge Compliance of RF Radiated Emissions	Pass

Test	Test Name	Results
1	Field Strength of Spurious Emissions	See plots
2	Band-edge Compliance of RF Radiated Emissions	See plots

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

The 23501-1 test sample was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

Special test SW was used for these tests. Radiated testing was done in the following modes:

802.11 b mode @ 11 Mbps

802.11 g mode @ 54 Mbps

Please refer to exhibit 6A5 for the conducted power levels.

All testing was done in an indoor controlled environment with an average temperature of 25 ° C ± 1 ° C and relative humidity of 45 % ± 6 % over the dates used for testing.

## Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

## Measuring Equipment and Calibration Information

Equipment related to the semi-anechoic chamber testing:

<b>Equipment</b>	<b>Model/type</b>	<b>Serial number</b>	<b>Operational range</b>	<b>Date of calibration</b>
EMI Receiver	ESU 40	100036	20 Hz – 40 GHz	05.05.2009
Pre Amplifiers	PA-02-0001:	2007343	10 kHz – 3 GHz	06.26.2009
	PA-02-218	2007344	3 GHz – 18 GHz	06.26.2009
	PA-02-5	2007345	18 GHz – 40 GHz	06.26.2009
Radio Communication Tester	CMU 200	112790	GSM 850/900/1800/1900, IS95, UMTS, CDMA, Bluetooth	N/A
Band Reject Filter	WRCG	N/A	ISM band	N/A
	4N45-24241/3/6	N/A	WLAN	N/A

The antennas used in the various tests are listed in the below table.

<b>Antenna</b>	<b>Type</b>	<b>Serial number</b>	<b>Operational range</b>	<b>Date of calibration</b>
Hybrid-log periodic	TDK HLP 3003C	130361	30 MHz – 3 GHz	11.07.08
Double ridged Horn	TDK HRN0118	130303	1 GHz – 18 GHz	03.26.09
Double ridged Horn	ETS HRN3116	00071938	18 GHz – 40 GHz	10.17.08

Note that the hybrid antenna and horn antenna are on a three-year calibration cycle. All other equipments are on a one-year calibration cycle.

## **Description of WLAN (WiFi) Transmitter**

The 23501-1 cell phone offers WLAN as a feature. The WLAN direct sequence spread-spectrum transceiver is designed to operate between 2400 and 2483 MHz. The WLAN antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a WLAN transmitter, it is designed operate with other WLAN devices as defined by industrial standard. In this application, the device is battery-operated.

There is a switch in the Bluetooth/WLAN (BT/WiFi) module that switches between BT and WiFi. They share the same antenna, and you are able to use a BT headset while in a WiFi VoIP call, however, they do not transmit and receive at the same time. There is a 20 ms delay (for switching between the two systems in time domain) using an intelligent multiplexing scheme. Even though they share the same antenna they are **NOT ON** at the same time. The WiFi is therefore tested as a standalone transmitter.

## **Measurement Procedures and Data**

### **FIELD STRENGTH OF SPURIOUS EMISSIONS**

CFR Part 2.1053, 15.247, 15.249

#### **Measurement Procedure**

The Equipment-Under-Test is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

For 30 MHz – 18 GHz:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{EMI Receiver Level (dB}\mu\text{V)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Filter loss (dB)} + \text{Antenna Correction Factor (3/m)}$$

For 18 GHz – 26.5 GHz:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{EMI Receiver Level (dB}\mu\text{V)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Filter loss (dB)} + \text{Antenna Correction Factor (1/m)}$$

A fully charged battery was used for the supply voltage.

**The test sample was operated during the measurements under the following conditions:**

- Tests were performed at low, mid and high channels.
- Tests were performed in both horizontal and vertical polarity.
- Tests were performed in both operational WiFi bands (b) and (g)

### Measurement Results

#### Comments:


The band edge measurements crossing the corner for the low channel with respect to the average limit line is acceptable when applying the FCC rule specified in CFR 15.35(b) for the use of peak detector above 1 GHz. The peak detector limit line has been added to the graphical plots.

For peak emissions detected above 1 GHz, only those emissions that are higher than the AVG limit line plus 8 dB are selected for final emission analysis.


### WLAN Band (b)

All data measured for WLAN band (b).


Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23859, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/27/2009  
Time: 10:36:19 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 1 (2412 MHz) do in test mode. Orientation X=H  
HLP-3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

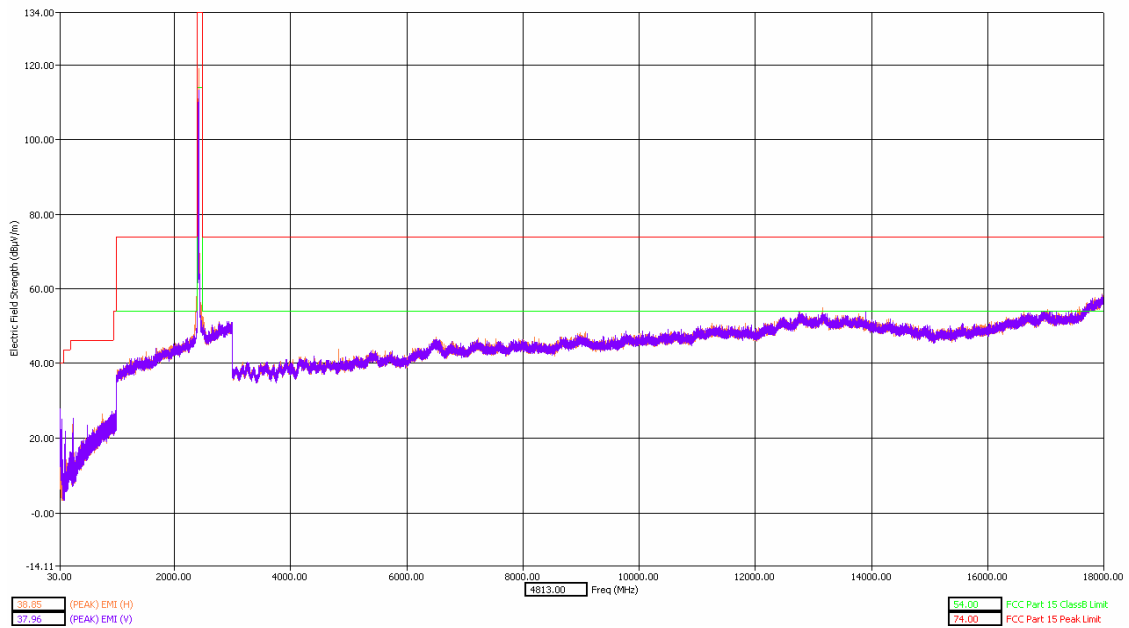

30 - 18000MHz Low Channel Dual Polarization X

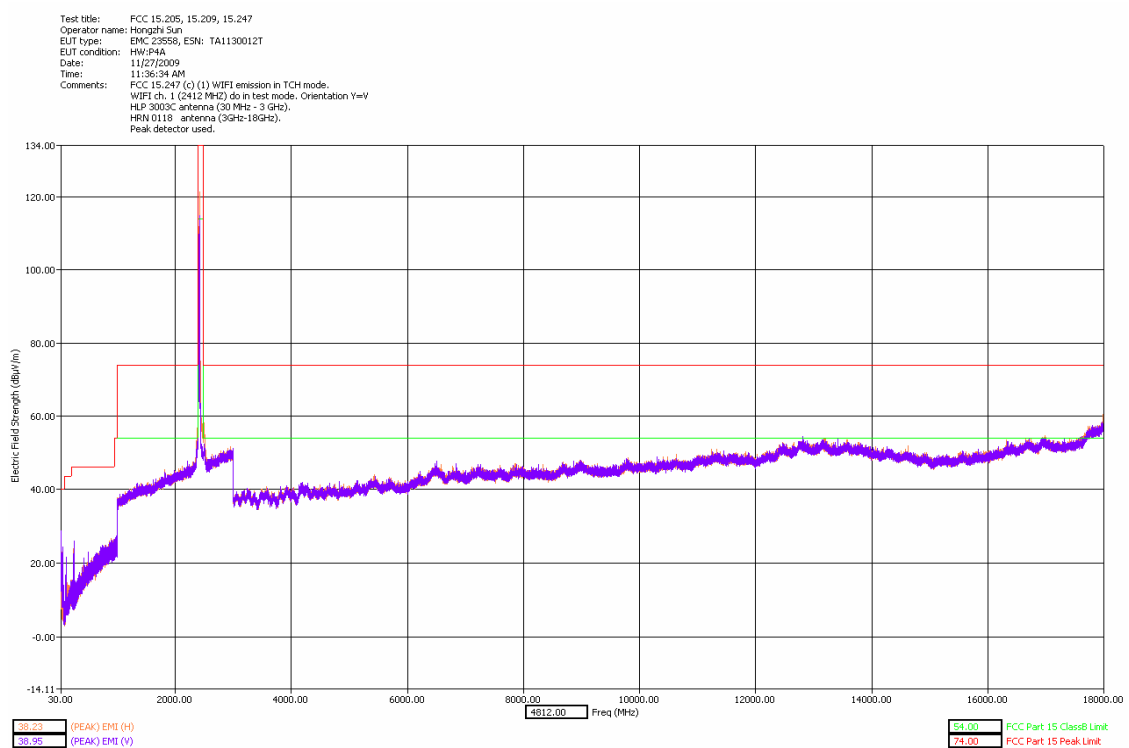


30 - 18000MHz Low Channel Dual Polarization Y

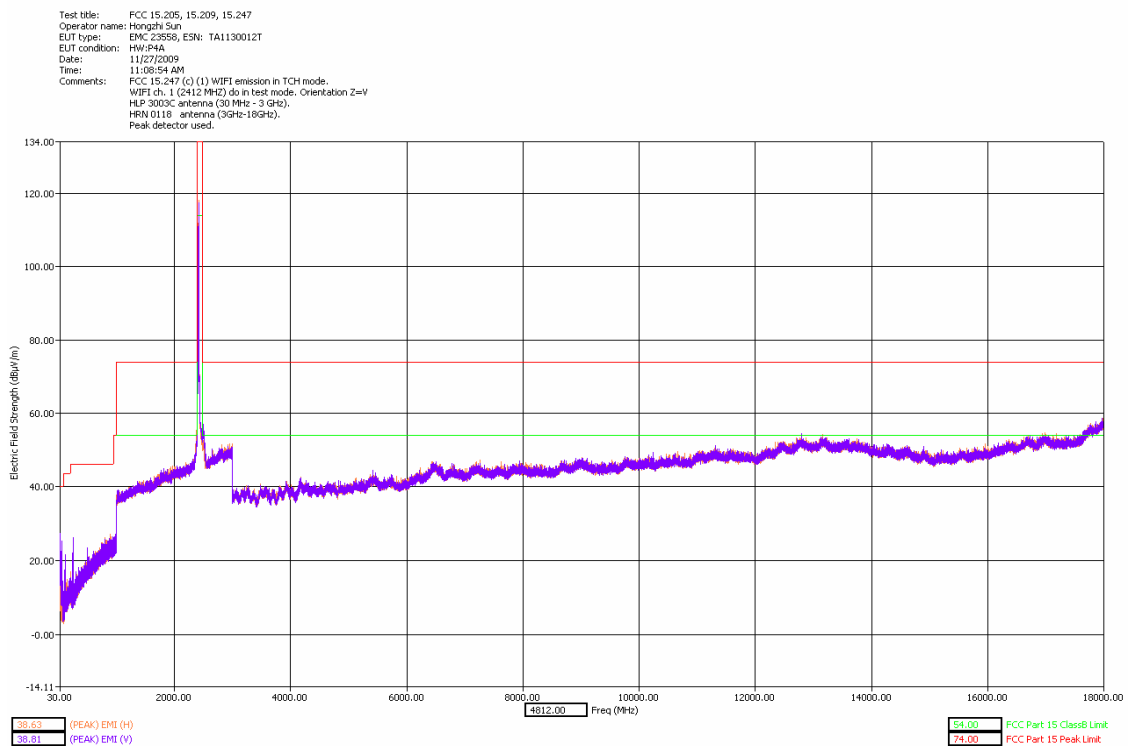


30 - 18000MHz Low Channel Dual Polarization Z

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW:PHA  
Date: 11/27/2009  
Time: 12:29:49 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 6 (2437 MHz) do in test mode. Orientation X=H  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0119 antenna (3GHz-18GHz).  
Peak detector used.

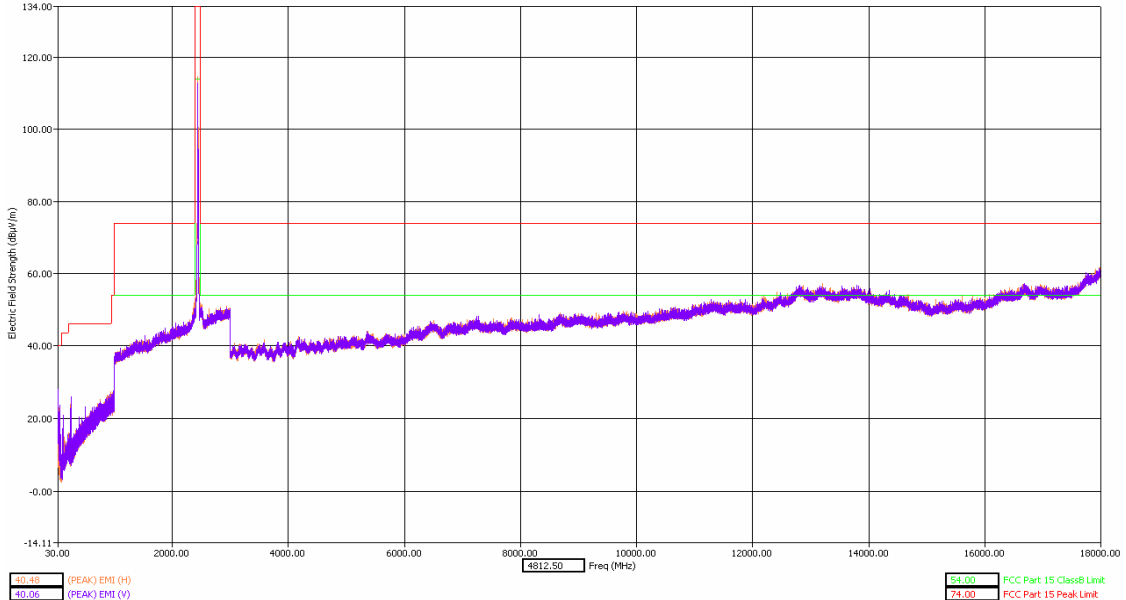


30 - 18000MHz Middle Channel Dual Polarization X


Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW:PHA  
Date: 11/27/2009  
Time: 12:44:45 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 6 (2437 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0119 antenna (3GHz-18GHz).  
Peak detector used.

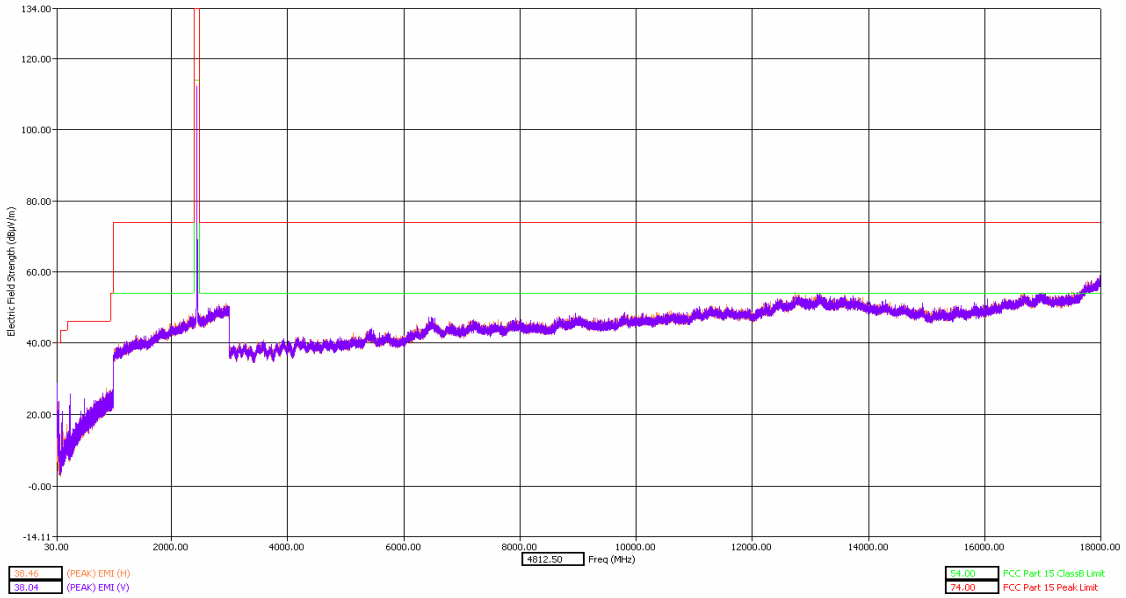

30 - 18000MHz Middle Channel Dual Polarization Y

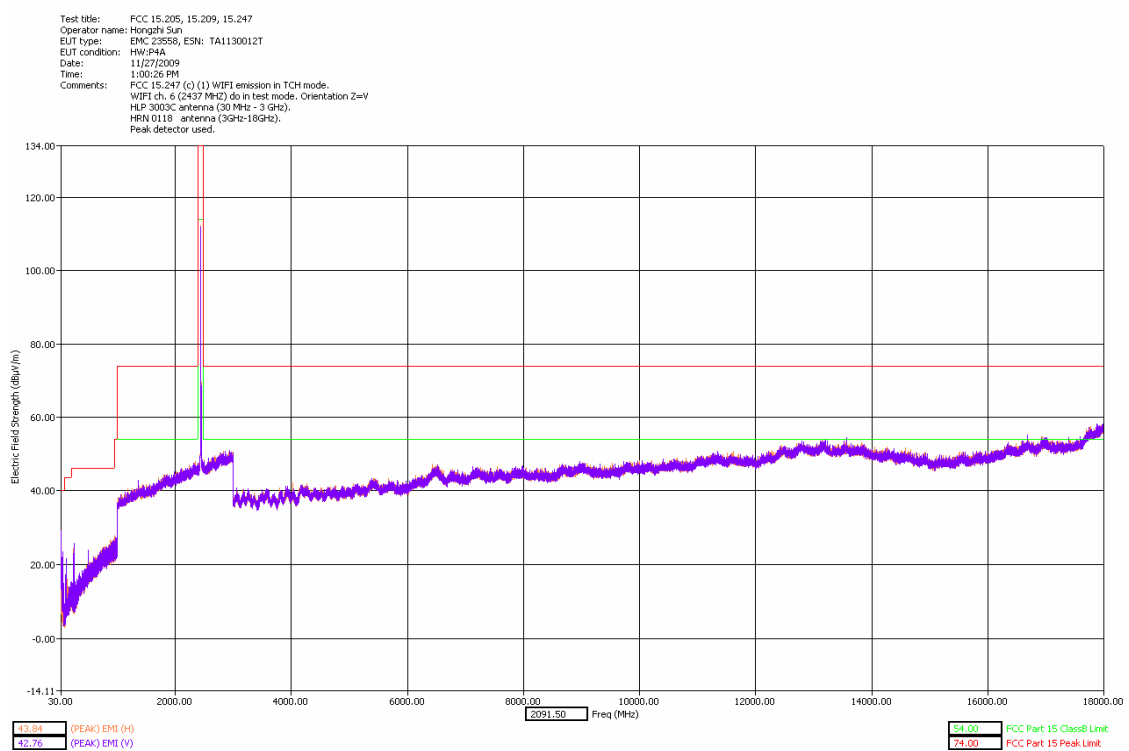


**30 - 18000MHz Middle Channel Dual Polarization Z**

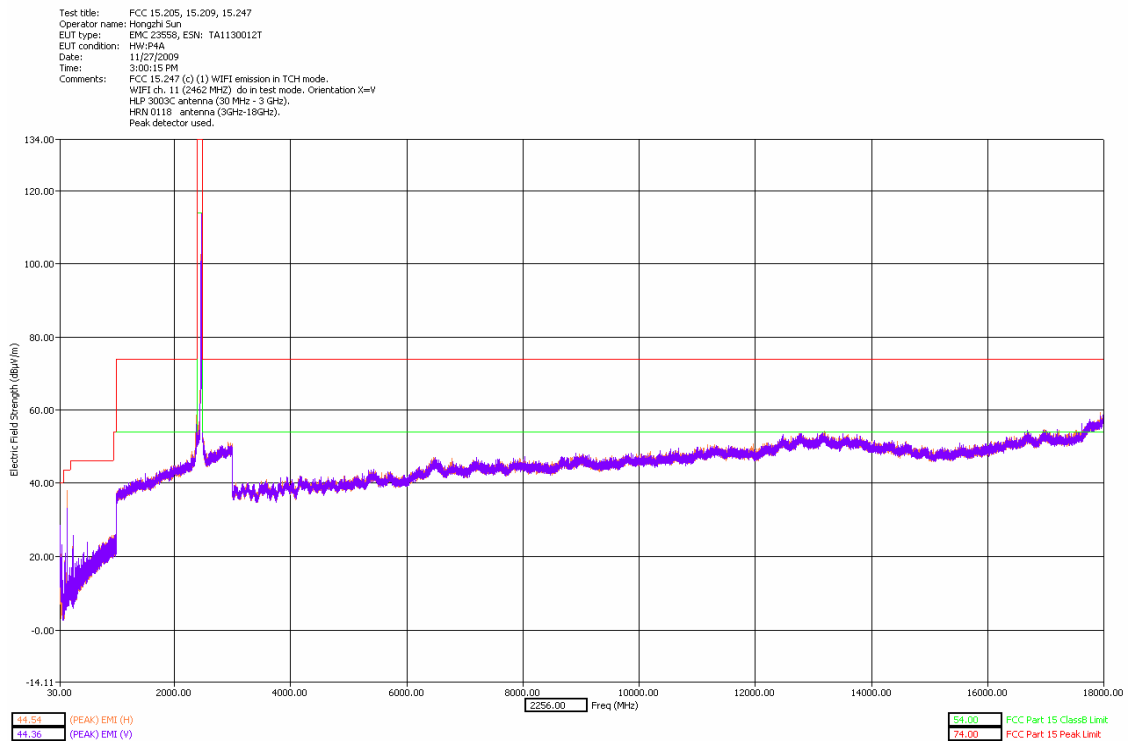


**30 - 18000MHz High Channel Dual Polarization X**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Honggh Sun  
EUT type: EMC 23501, ESN: TA1130012T  
EUT condition: HW-PWA  
Date: 11/27/2009  
Time: 2:04:42 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

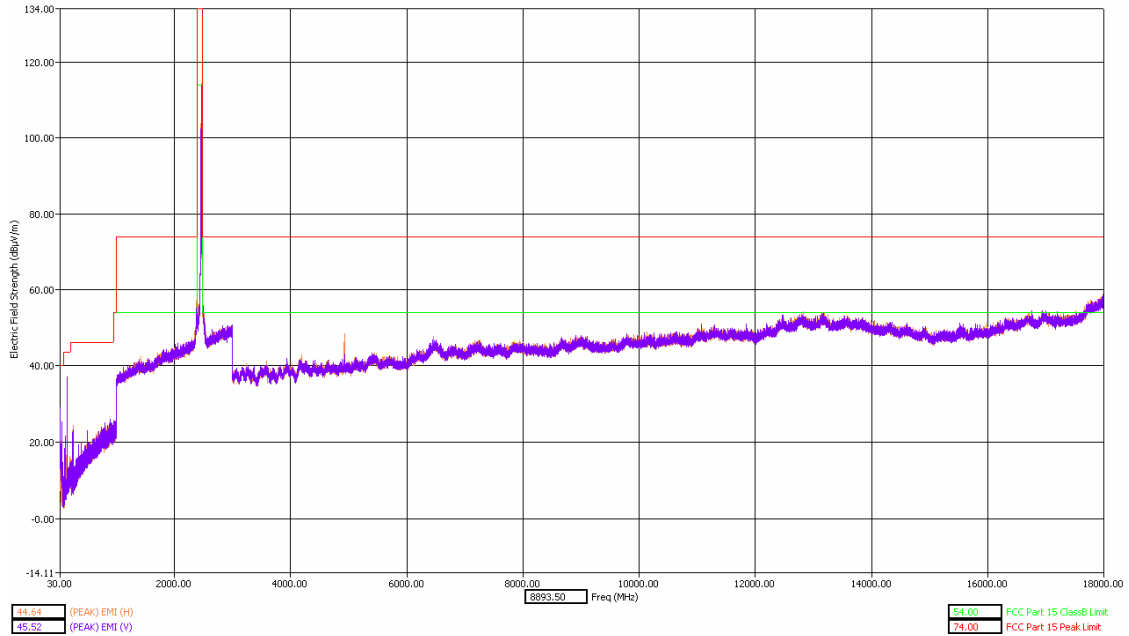

**30 - 18000MHz High Channel Dual Polarization Y**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Honggh Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-PWA  
Date: 11/27/2009  
Time: 1:41:32 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation Z=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

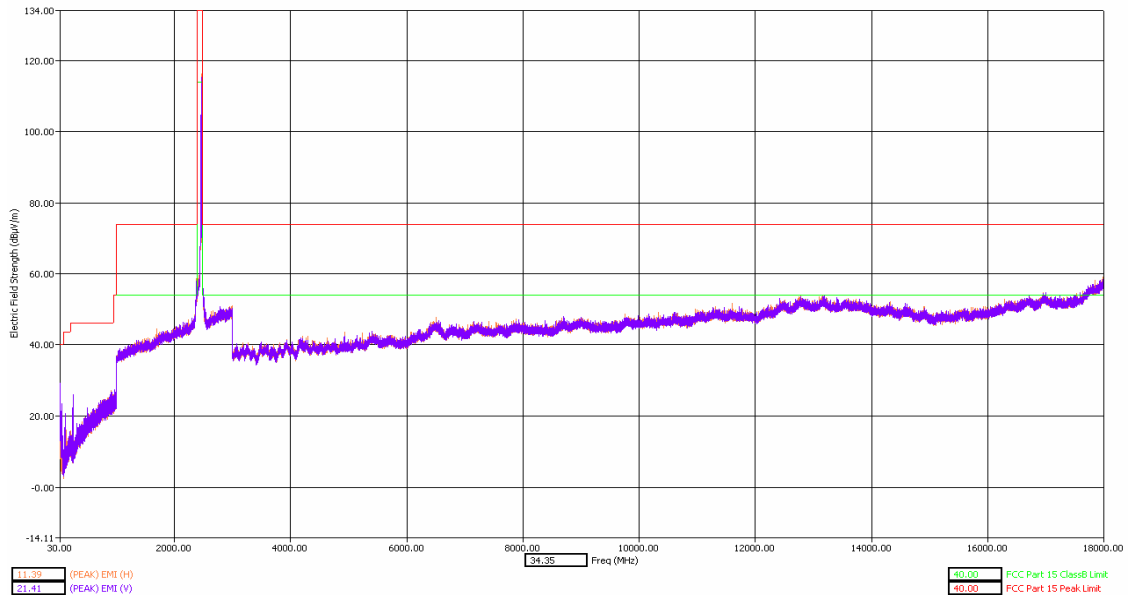


**30 - 18000MHz High Channel Dual Polarization Z**



**There were no discernible emissions above the noise floor for 18-26.5 GHz for Low, Mid and High Channels and all polarizations in WLAN band**

Only the worst case plot for each test frequency are shown in the below plots in the range from 18 GHz – 26.5 GHz.

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23959, ESN: TA1130012T  
EUT condition: HW-PHA  
Date: 12/1/2009  
Time: 9:11:32 AM  
Comments: FCC 15.247 (c) (1) WLAN (WiFi) emission in TCH mode.  
WiFi ch. 1 (2412 MHz) up/down in test mode. Orientation Y=V  
HRN 3116 antenna (18 GHz - 26.5 GHz). Peak detector used.

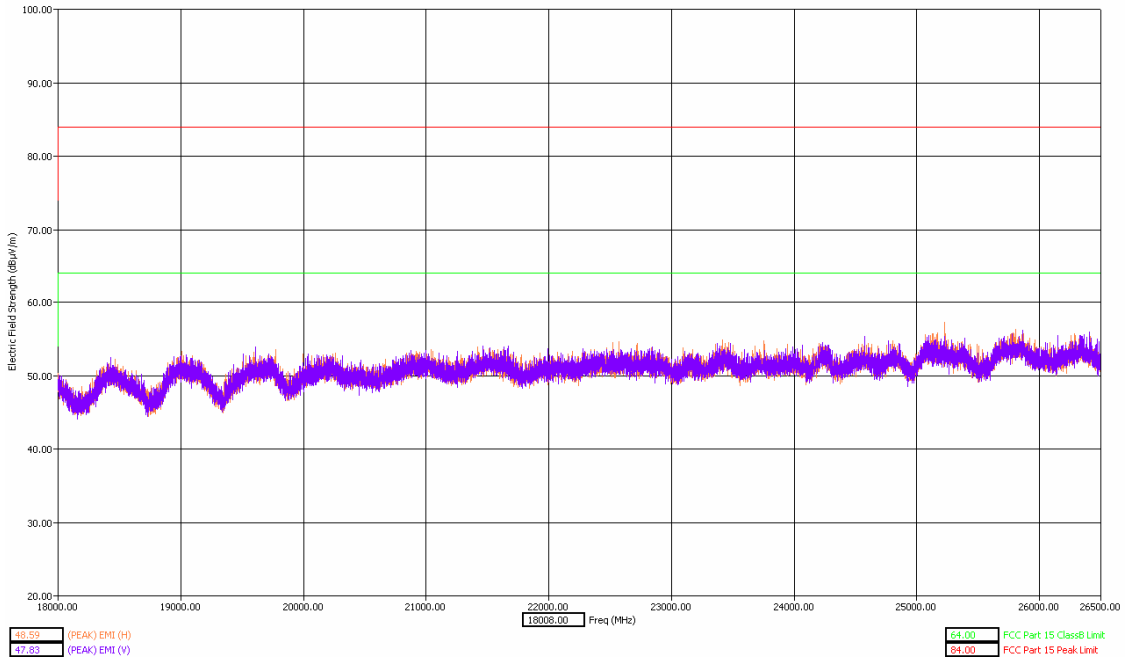


**18-26.5GHz Low Channel Y Orientation**

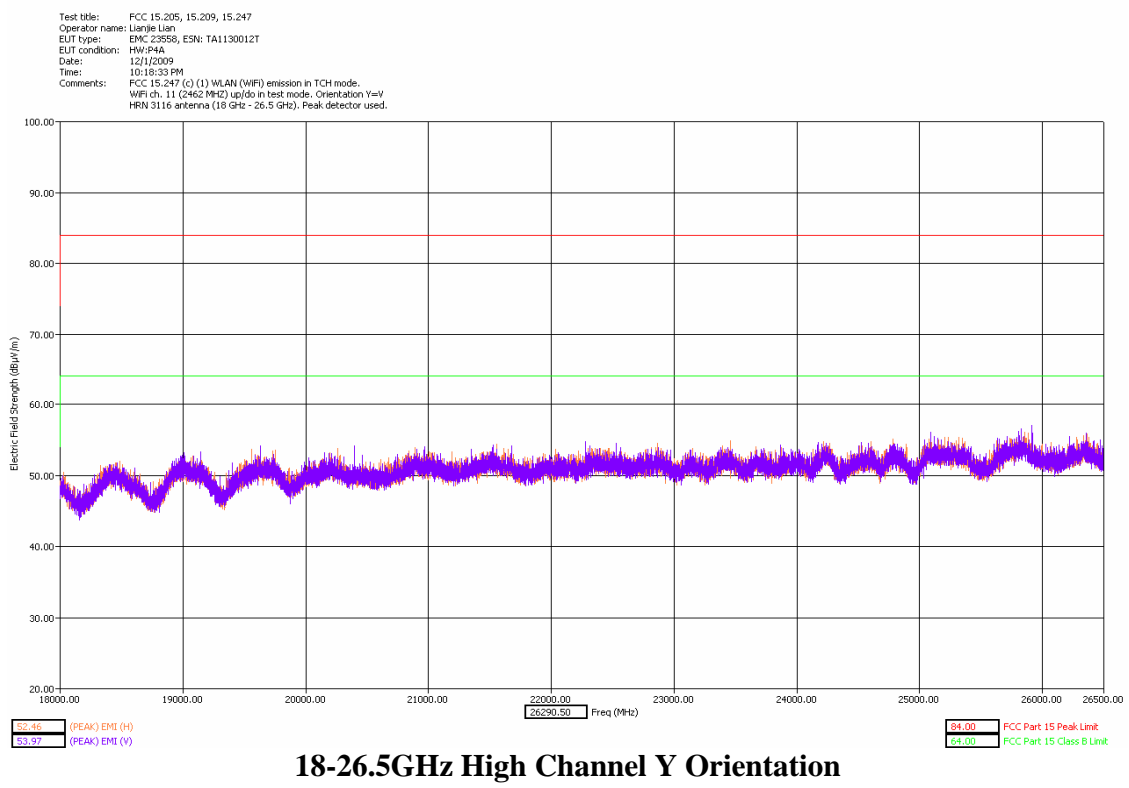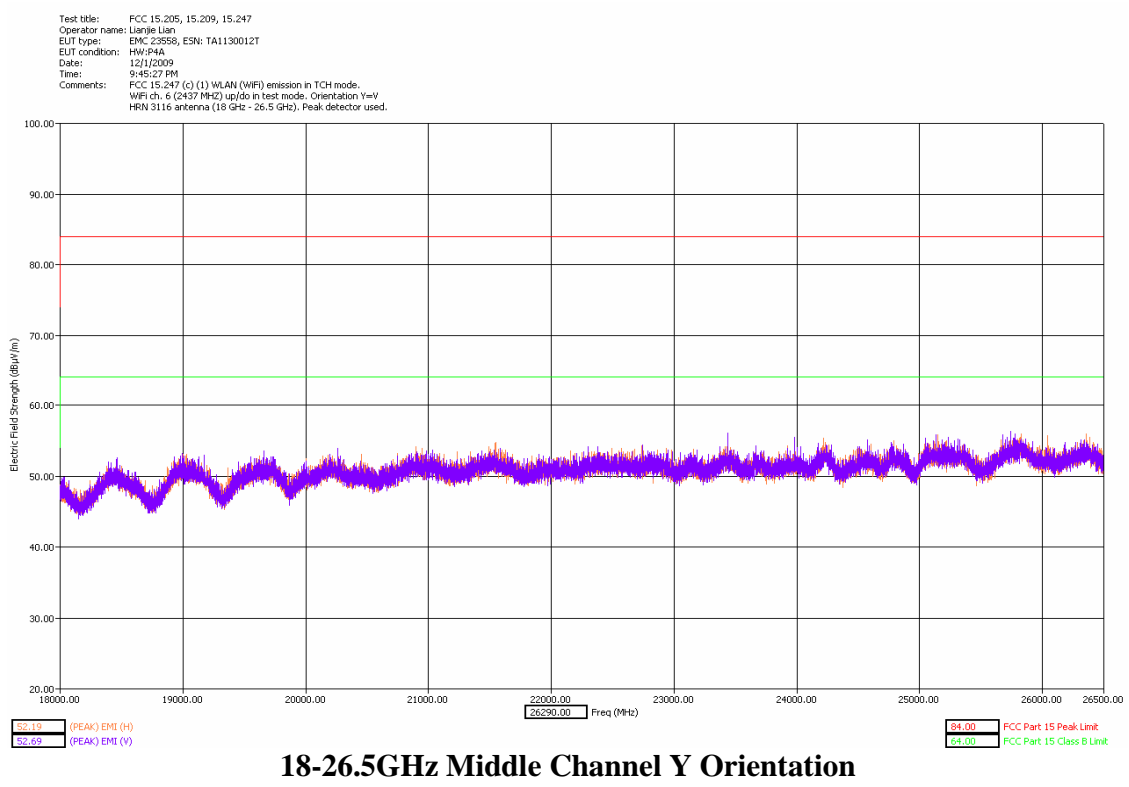

### WLAN Band (g)


All data measured for WLAN band (g).

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23550, E5N: TA1130012T  
EUT condition: HW-PA  
Date: 11/27/2009  
Time: 3:33:25 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 1 (2412 MHz) do in test mode. Orientation X=H  
HLP 30103: antenna (30 MHz - 3 GHz).  
HRN 0118: antenna (3GHz-19GHz).  
Peak detector used.

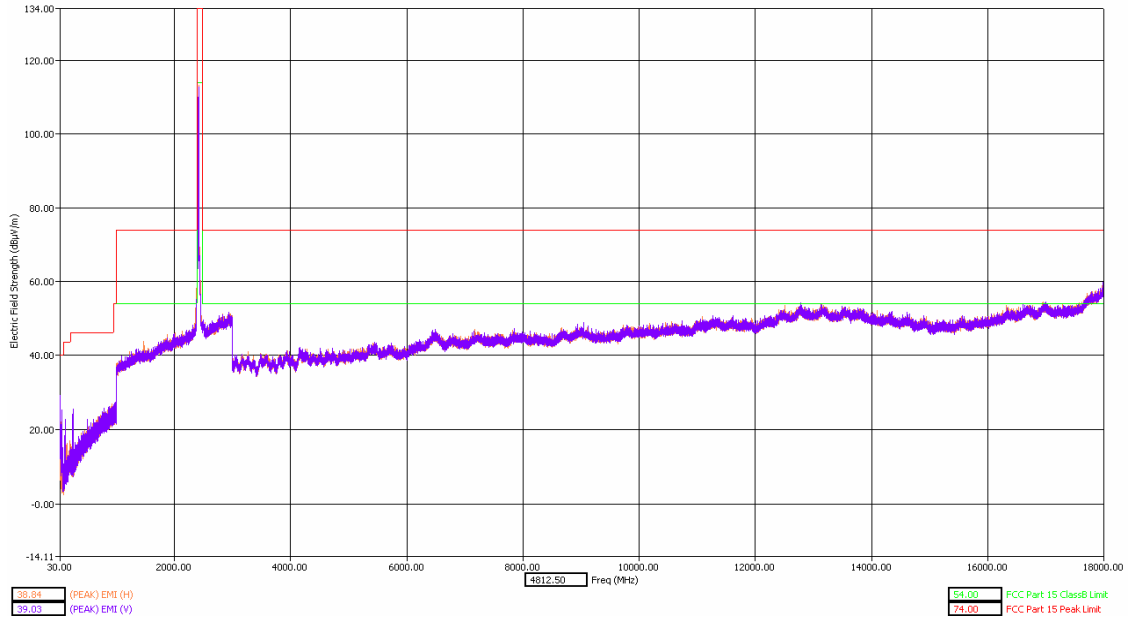


30 - 18000MHz Low Channel Dual Polarization X

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongphi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/27/2009  
Time: 4:02:02 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 1 (2412 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

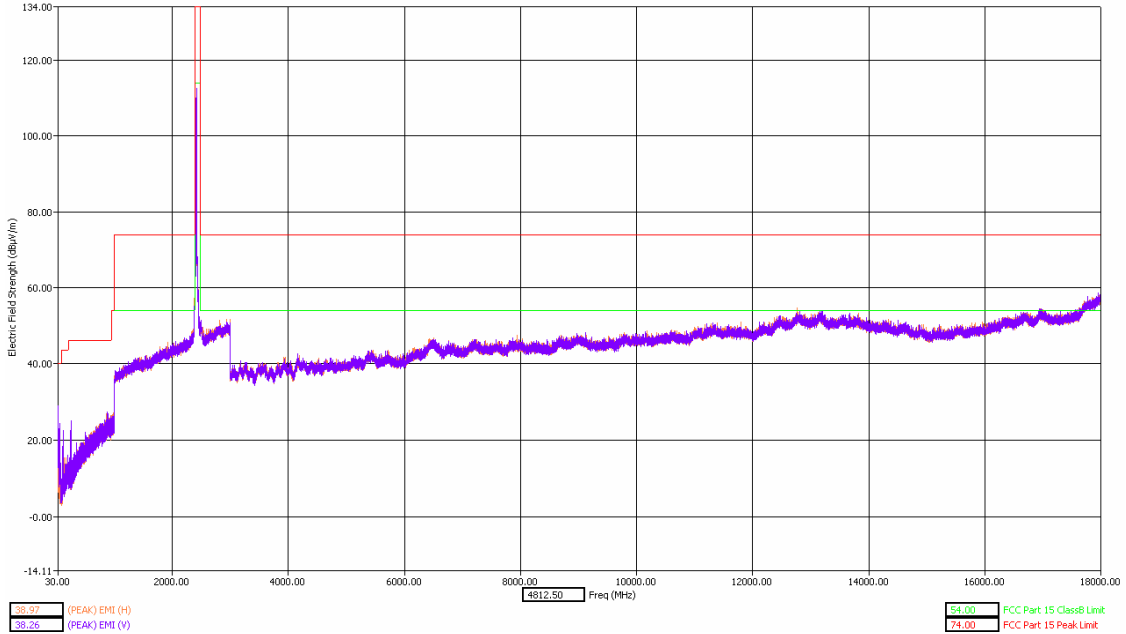


**30 - 18000MHz Low Channel Dual Polarization Y**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongphi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/27/2009  
Time: 4:07:25 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 1 (2412 MHz) do in test mode. Orientation Z=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

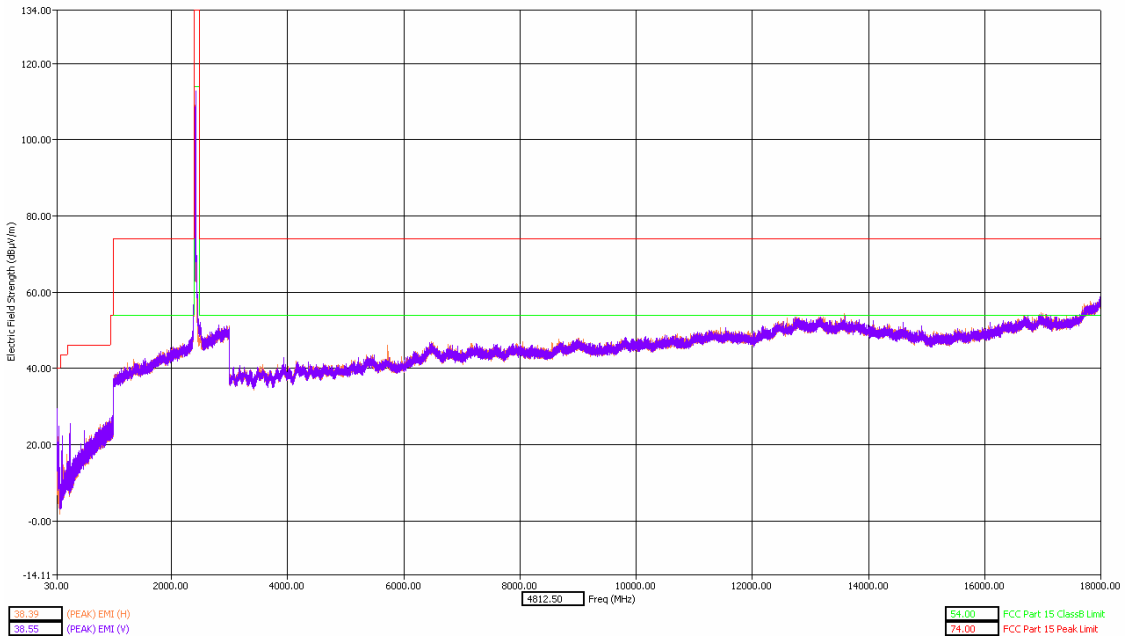


**30 - 18000MHz Low Channel Dual Polarization Z**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/30/2009  
Time: 11:27:07 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 6 (2437 MHz) do in test mode. Orientation X=H  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

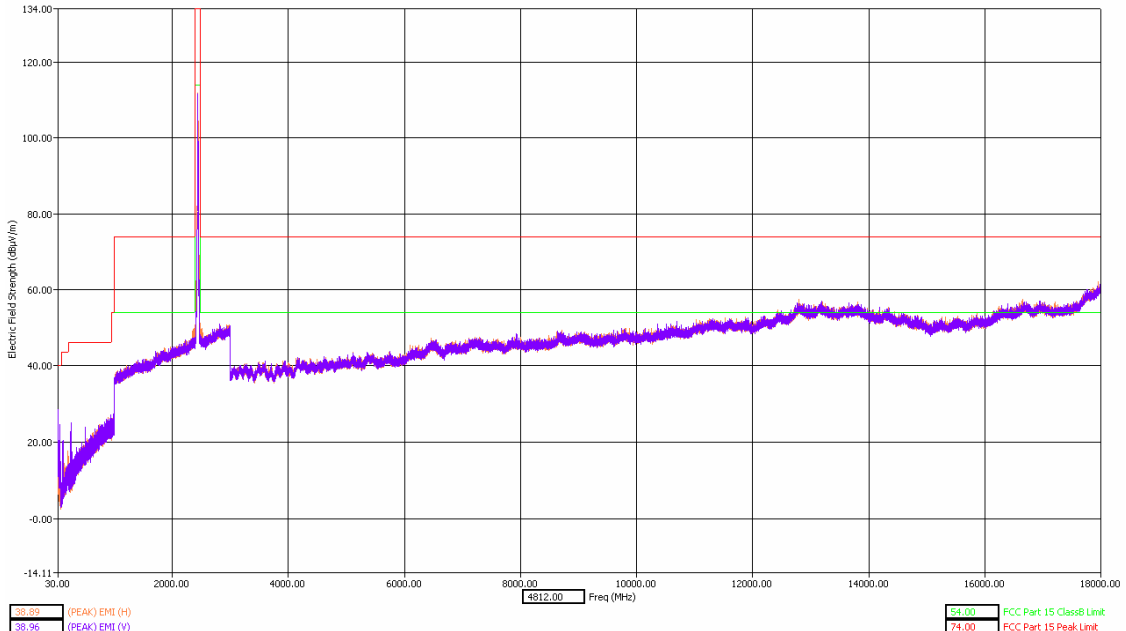


**30 - 18000MHz Middle Channel Dual Polarization X**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/30/2009  
Time: 11:43:53 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 6 (2437 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

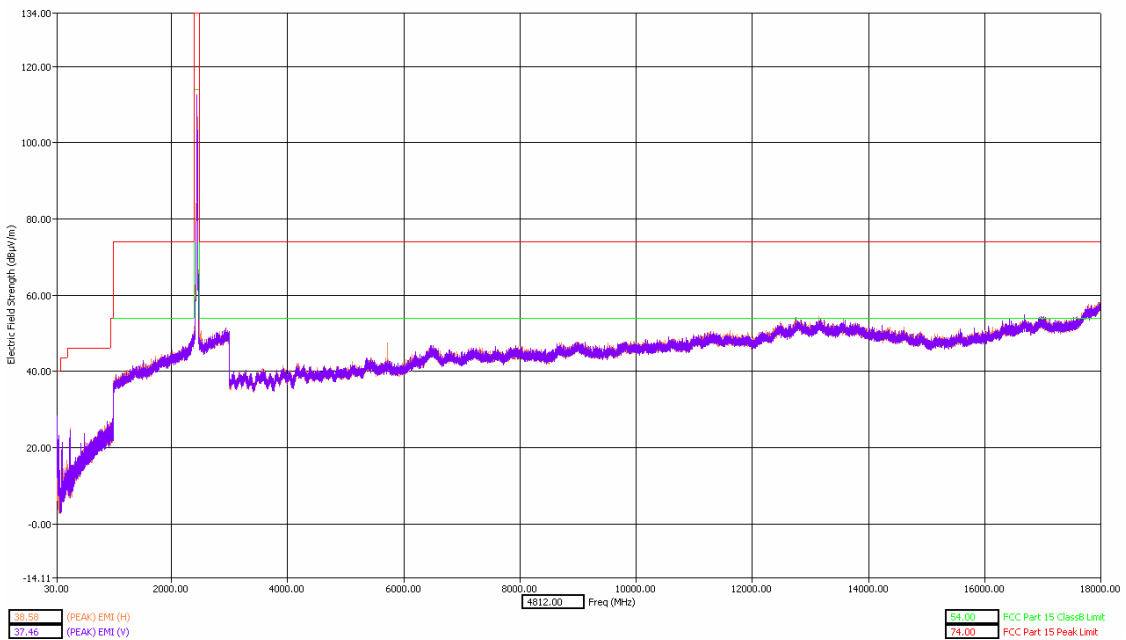


**30 - 18000MHz Middle Channel Dual Polarization Y**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW/P4A  
Date: 11/30/2009  
Time: 12:34:45 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 6 (2437 MHz) do in test mode. Orientation Z=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

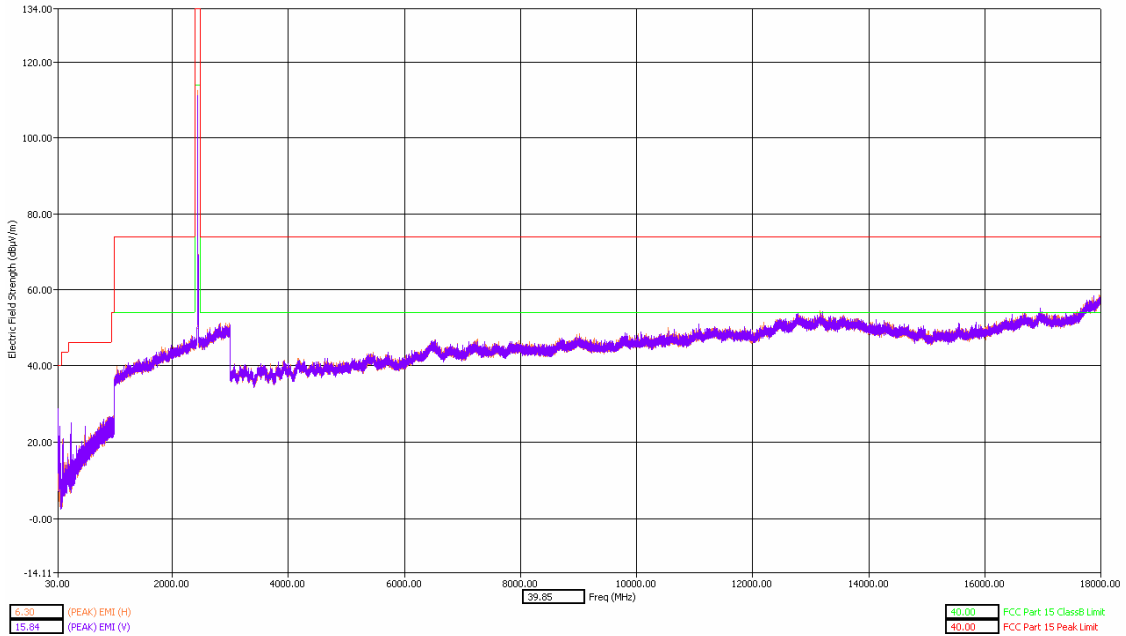


**30 - 18000MHz Middle Channel Dual Polarization Z**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW/P4A  
Date: 11/30/2009  
Time: 10:19:00 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation X=H  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

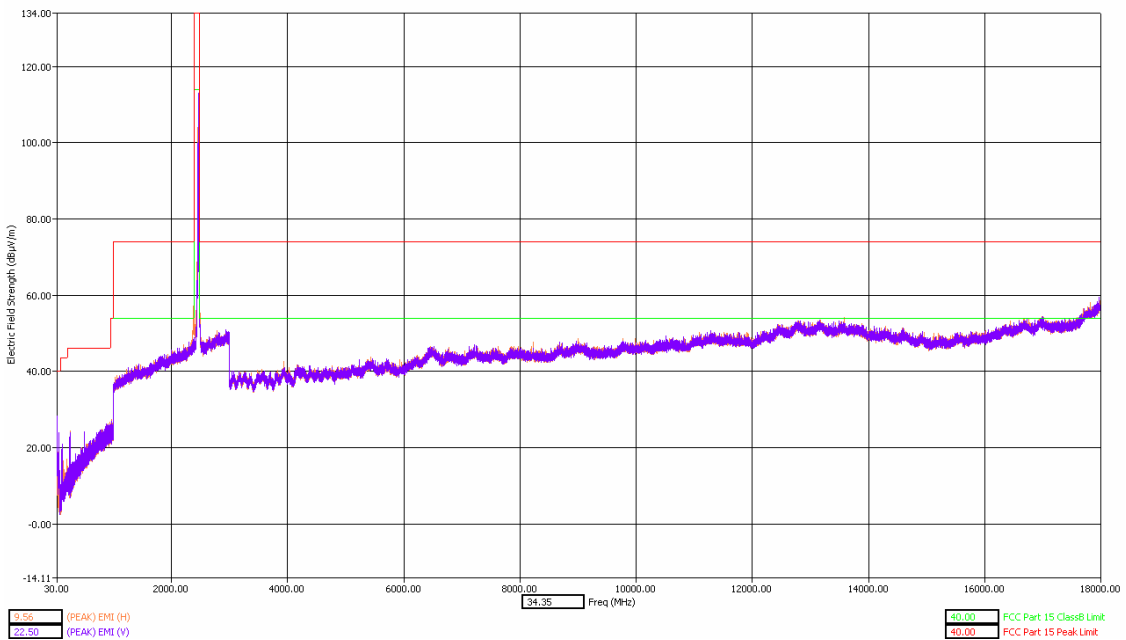


**30 - 18000MHz High Channel Dual Polarization X**

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23556, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/30/2009  
Time: 10:46:32 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0116 antenna (3GHz-18GHz).  
Peak detector used.

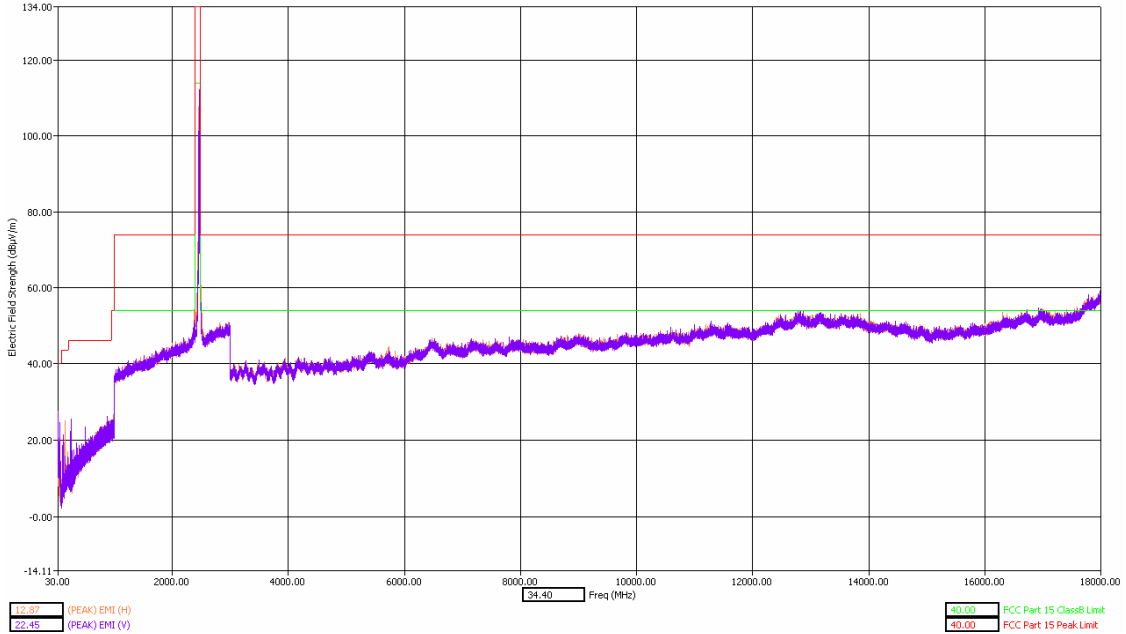

30 - 18000MHz High Channel Dual Polarization Y


Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23556, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 11/30/2009  
Time: 5:08:08 PM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation Z=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0116 antenna (3GHz-18GHz).  
Peak detector used.

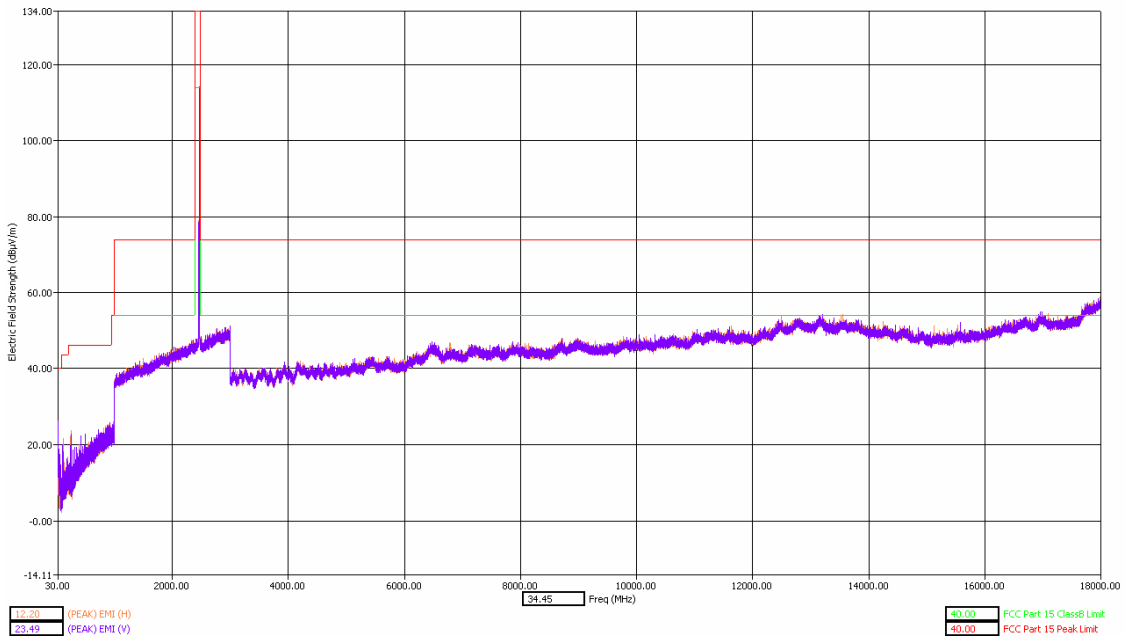


30 - 18000MHz High Channel Dual Polarization Z

**There were no discernible emissions above the noise floor for 18-26.5 GHz for Low, Mid and High Channels and all polarizations in WLAN band**

Only the worst case plot for each test frequency are shown in the below plots in the range from 18 GHz – 26.5 GHz.

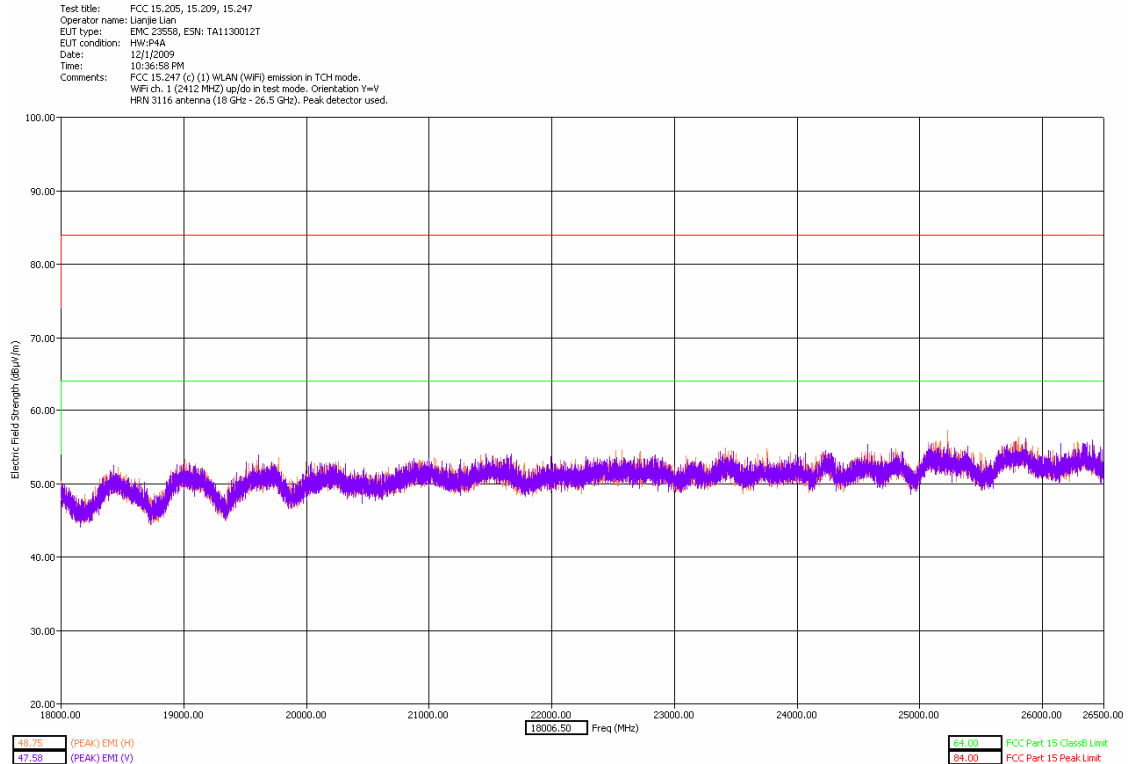


Test title: FCC 15.205, 15.209, 15.247  
Operator name: Lianjie Lian  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 12/1/2009  
Time: 11:09:02 PM  
Comments: FCC 15.247 (c) (1) WLAN (WiFi) emission in TCH mode.  
WiFi ch. 6 (2437 MHz) up/down in test mode. Orientation Y=V  
HRN 3116 antenna (18 GHz - 26.5 GHz). Peak detector used.

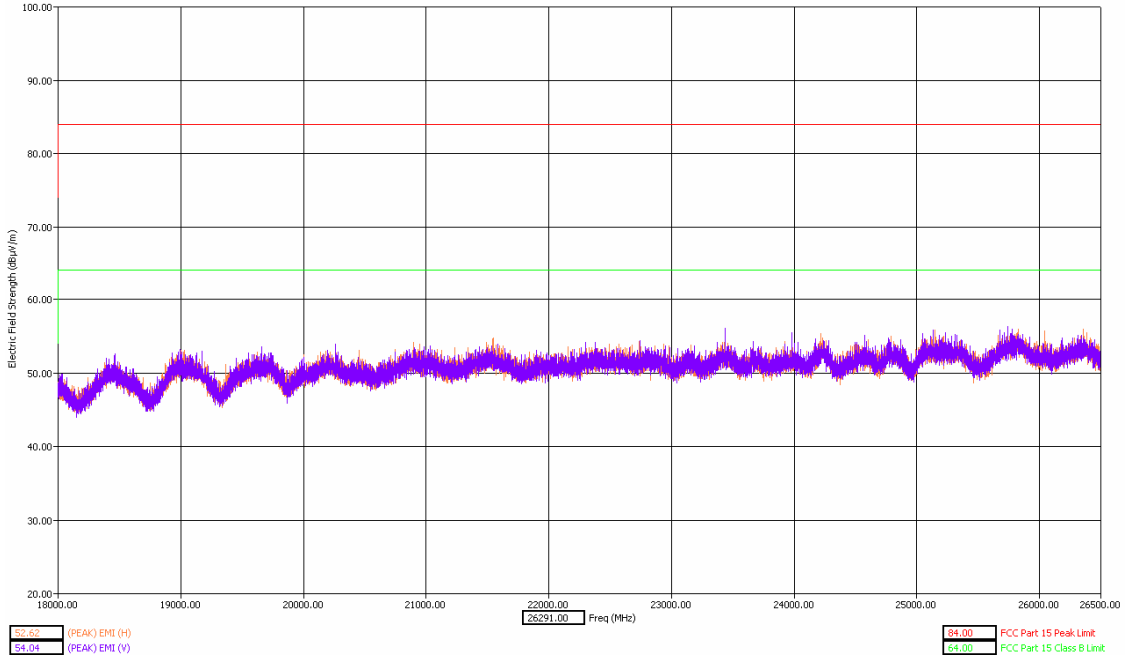

18 – 26.5 GHz Middle Channel Dual Polarization Y

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Lianjie Lian  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW-P4A  
Date: 12/1/2009  
Time: 11:59:26 PM  
Comments: FCC 15.247 (c) (1) WLAN (WiFi) emission in TCH mode.  
WiFi ch. 11 (2462 MHz) up/down in test mode. Orientation Y=V  
HRN 3116 antenna (18 GHz - 26.5 GHz). Peak detector used.

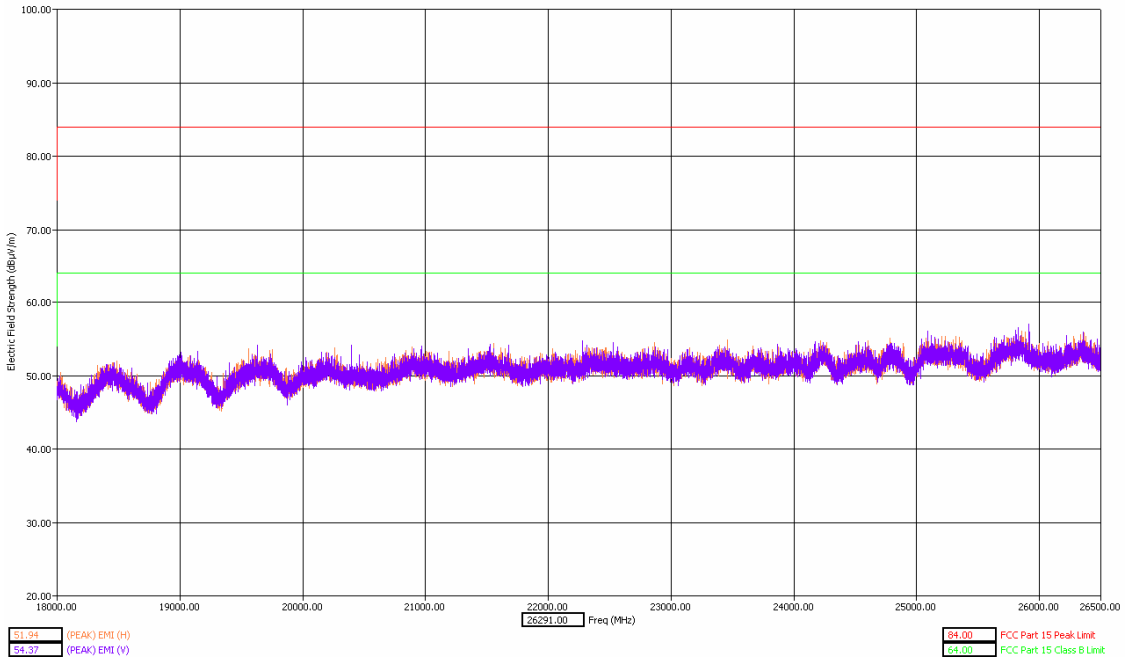

18 – 26.5 GHz High Channel Dual Polarization Y

## **BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS**

CFR 47 Part 15.247

### **Measurement Procedure**

The test sample is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{EMI Receiver Level (dB}\mu\text{V)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Filter loss (dB)} + \text{Antenna Correction Factor (3/m)}$$

For 18 GHz – 26.5 GHz:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{EMI Receiver Level (dB}\mu\text{V)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Filter loss (dB)} + \text{Antenna Correction Factor (1/m)}$$

The test sample WLAN transmitter was enabled using a test script.

A fully charged battery was used for the supply voltage.

### **Measurement Results**

Comments:

The band edge measurements crossing the corner for the low/high channel with respect to the average limit line is acceptable when applying the FCC rule specified in CFR 47 part 15.35(b) for the use of peak detector above 1 GHz.


The peak detector limit line has been added to the graphical plots.

Note: No WLAN band notch filters were used.

See below attached plots for the measurement results with both peak detector and average detector:


**WLAN Band (b)**

Only the worst band edge is displayed for WLAN band (b)

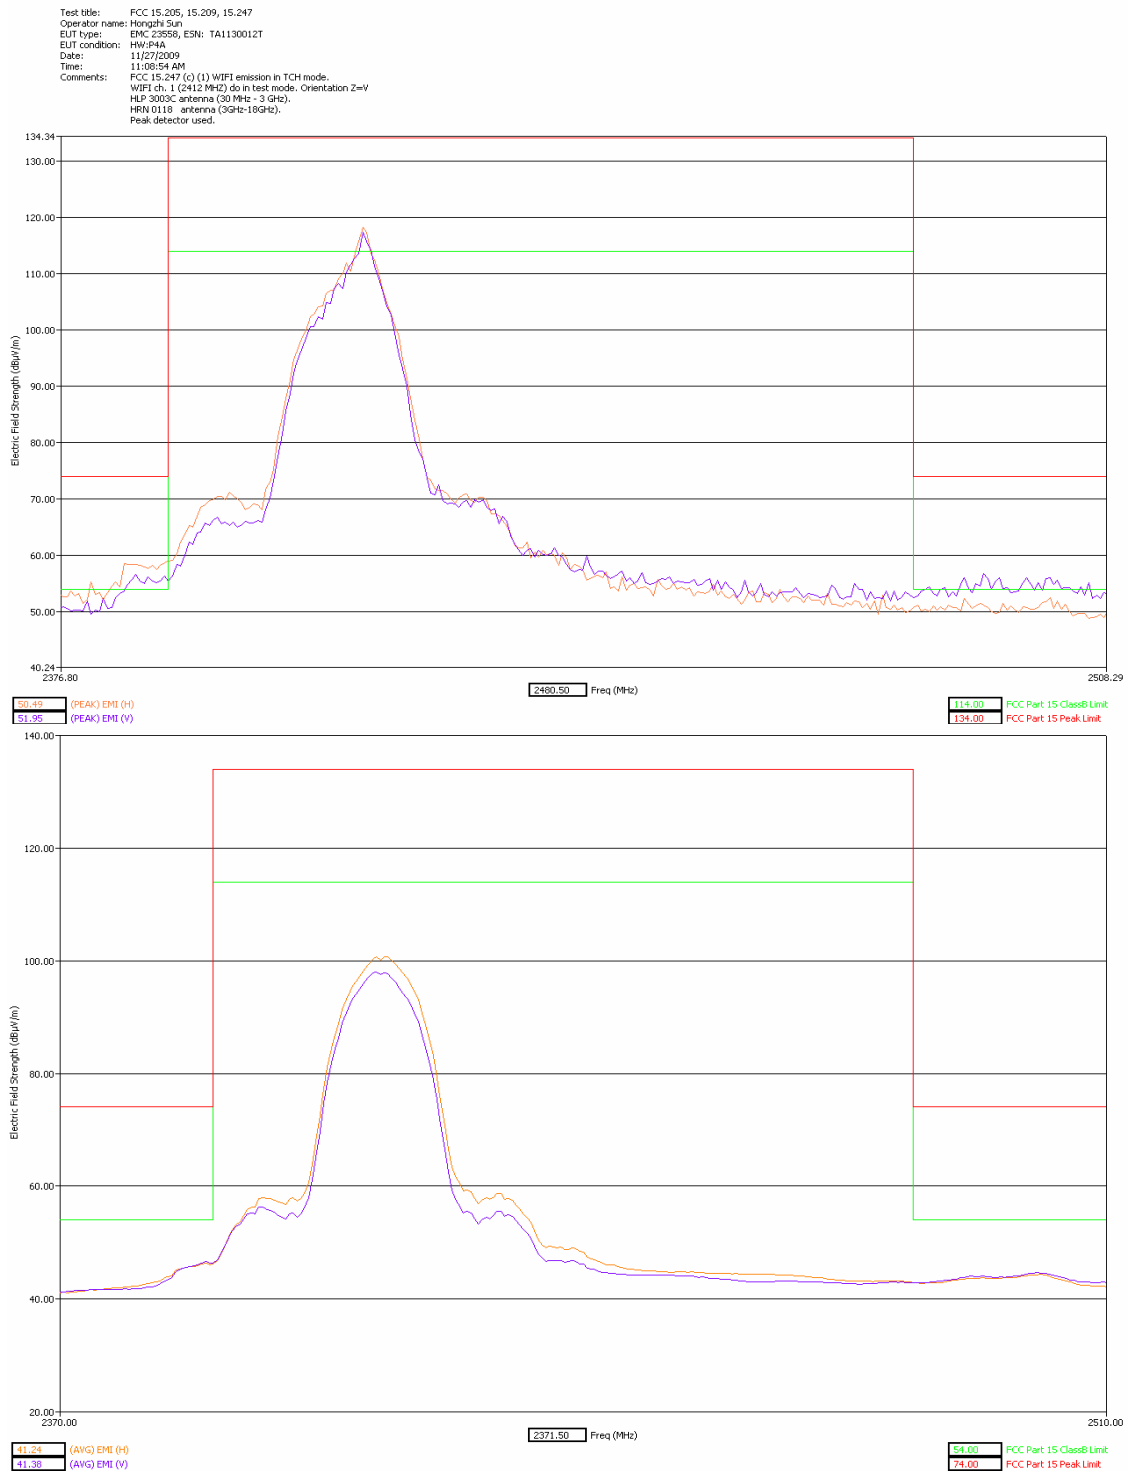


**Low Band Edge Z Orientation**

Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Honggh Sun  
 EUT type: EMC 23558, ESN: TA1130012T  
 EUT condition: HW:P4A  
 Date: 11/27/2009  
 Time: 1:41:52 PM  
 Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
 WIFI ch. 11 (2462 MHz) do in test mode. Orientation Z=V  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3GHz-18GHz).  
 Peak detector used.

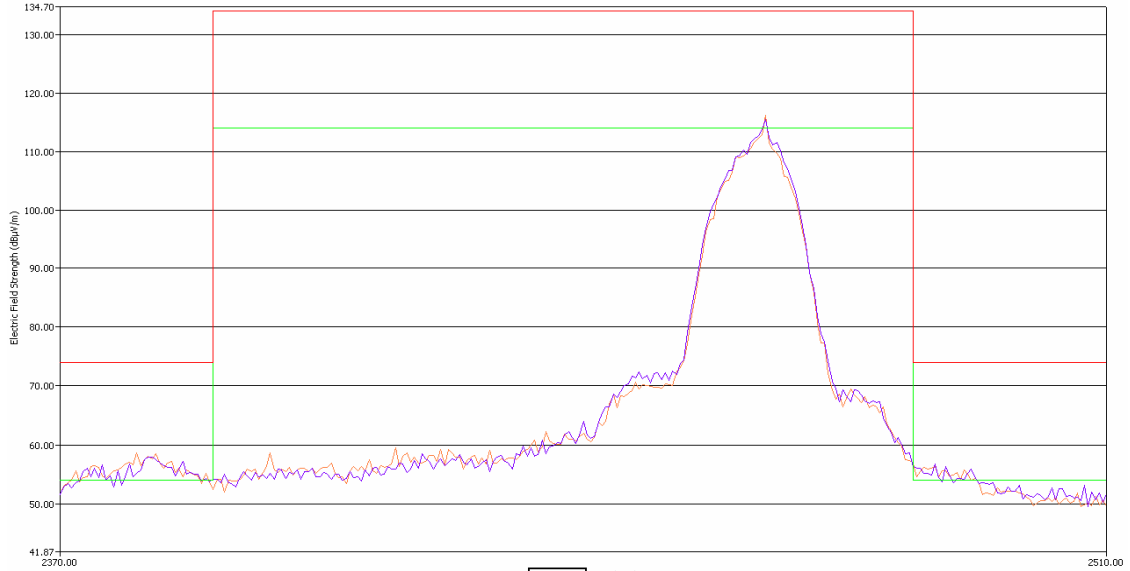



Test title: FCC 15.205, 15.209, 15.248  
 Operator name: Honggh Sun  
 EUT type: EMC 23558, ESN: TA1130012T  
 EUT condition: HW:P4A  
 Date: 11/27/2009  
 Time: 1:57:51 PM  
 Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
 WIFI ch. 11 (2462 MHz) do in test mode. Orientation Z=V  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3GHz-18GHz).  
 AVG detector used.

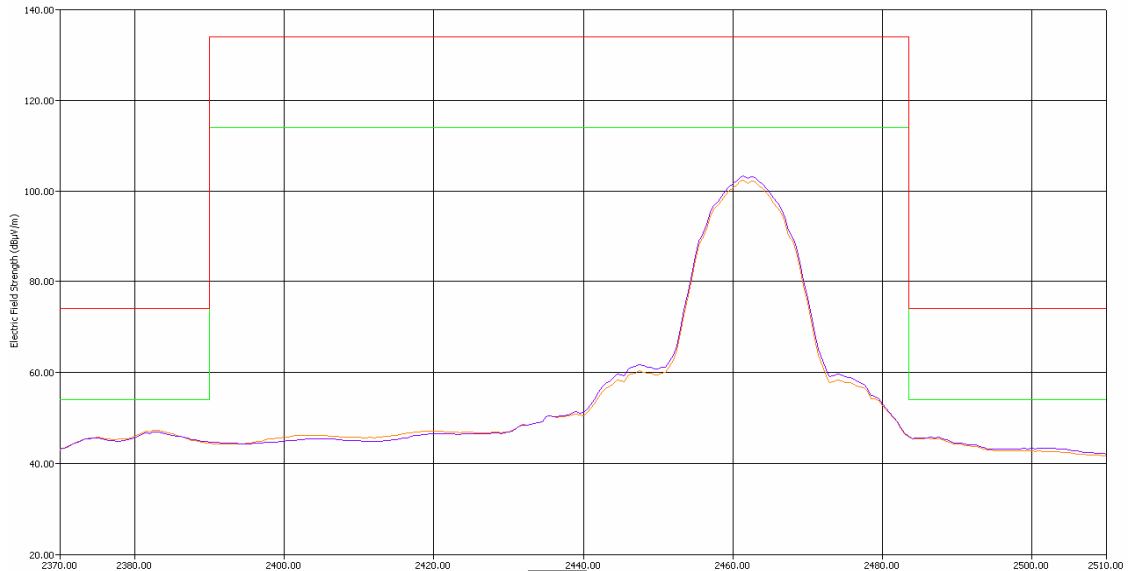

**High Band Edge Z Orientation**


### WLAN Band (g)

Only the worst band edge is displayed for WLAN band (g)

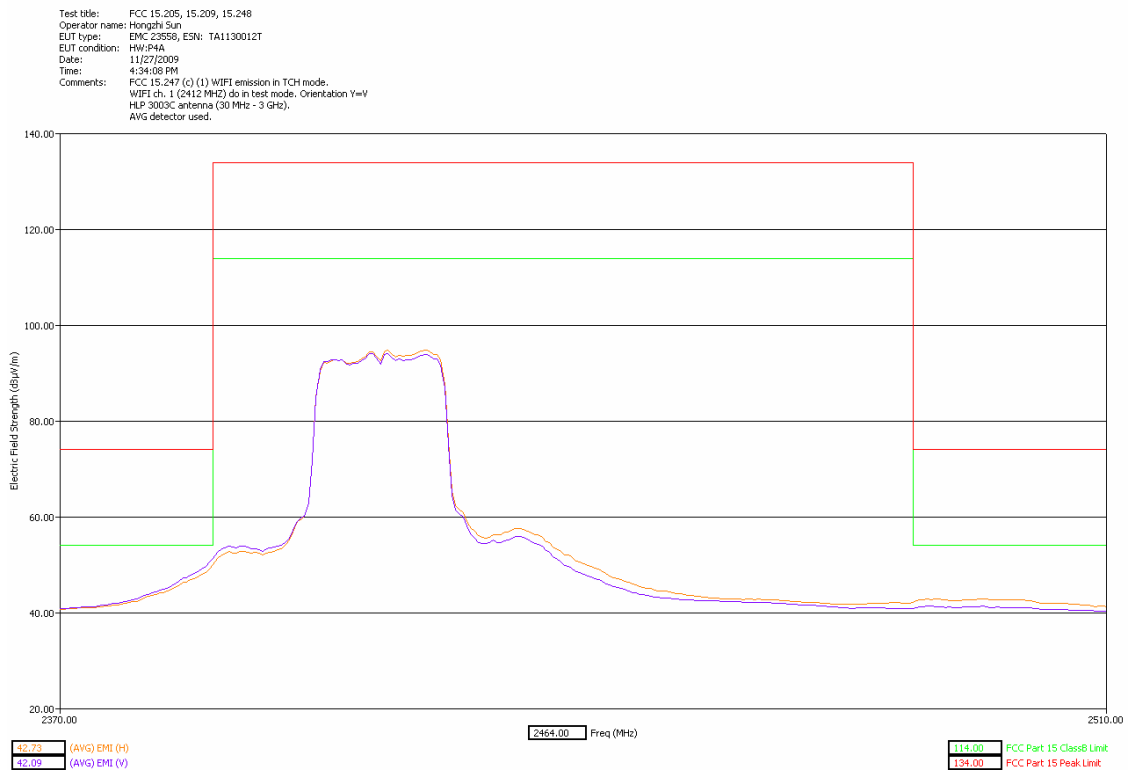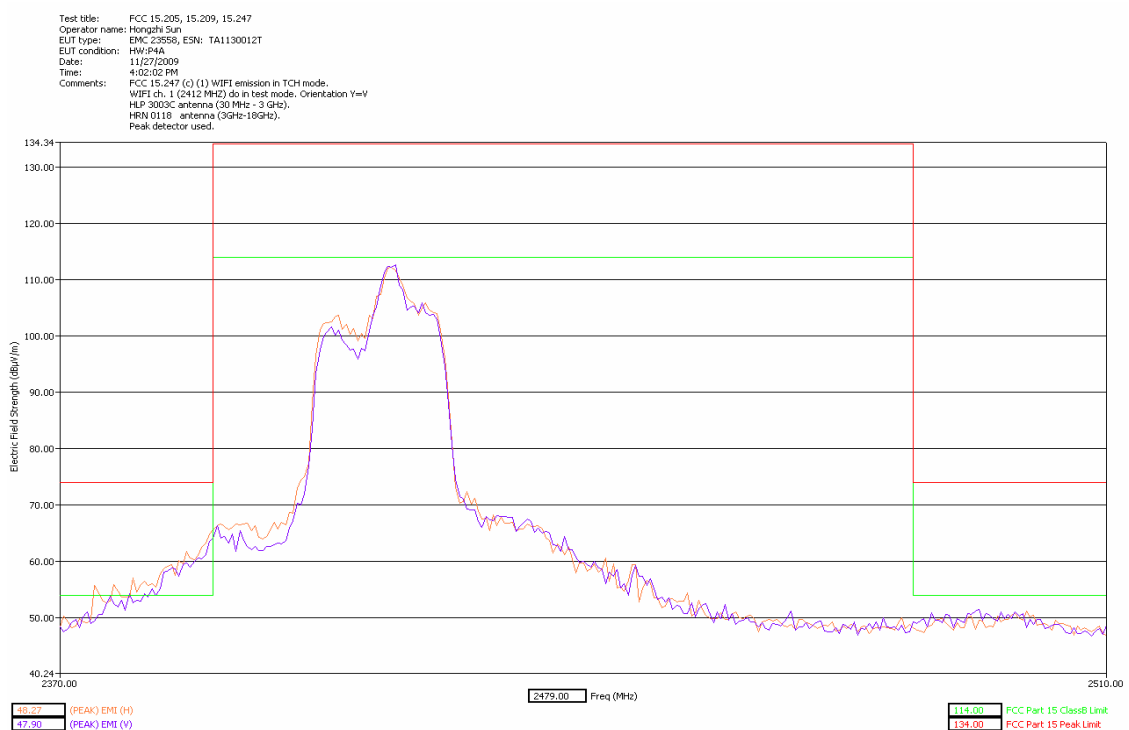


Low Band Edge Y Orientation

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW/PWA  
Date: 11/30/2009  
Time: 10:46:32 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
Peak detector used.

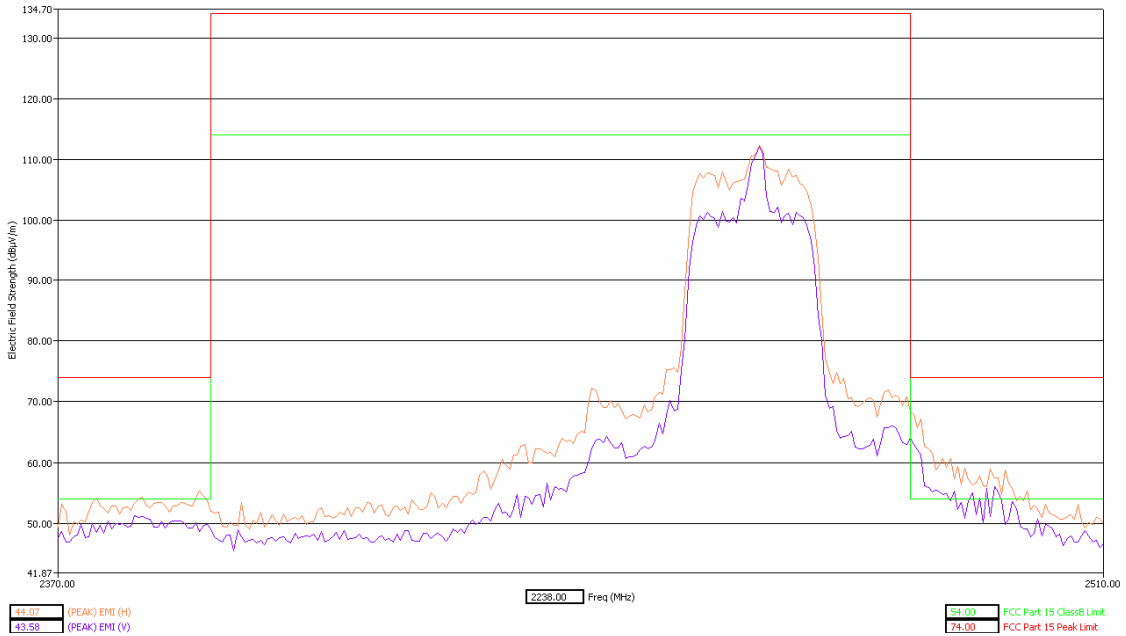

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Hongzhi Sun  
EUT type: EMC 23558, ESN: TA1130012T  
EUT condition: HW/PWA  
Date: 11/30/2009  
Time: 11:02:33 AM  
Comments: FCC 15.247 (c) (1) WIFI emission in TCH mode.  
WIFI ch. 11 (2462 MHz) do in test mode. Orientation Y=V  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3GHz-18GHz).  
AVG detector used.

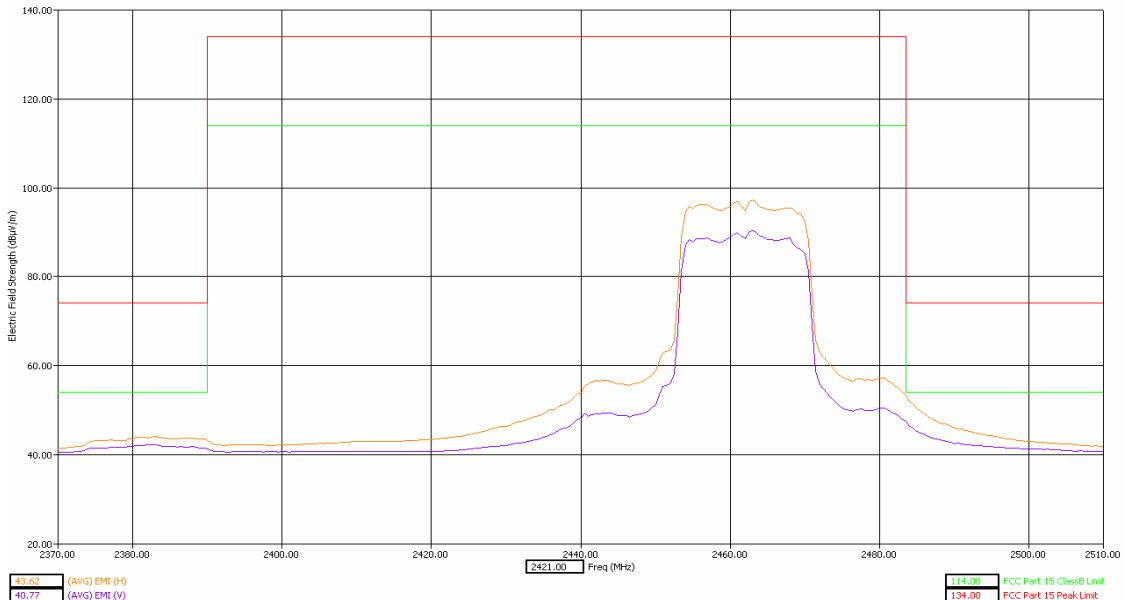

High Band Edge Y Orientation

End of Test Report