



SAR TEST REPORT

REPORT NO.: SA990421C04A

MODEL NO.: EX115, EX112

RECEIVED: Jun. 21, 2010

TESTED: Jul. 07 ~ Jul. 11, 2010

ISSUED: Jul. 22, 2010

APPLICANT: Motorola Inc

ADDRESS: Mobile Devices 600 N. U.S. Highway 45,
Libertyville, Illinois, United States, 60048-5343

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 35 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1.	CERTIFICATION	3
2.	GENERAL INFORMATION	4
2.1	GENERAL DESCRIPTION OF EUT.....	4
2.2	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	5
2.3	GENERAL INFORMATION OF THE SAR SYSTEM	6
2.4	TEST EQUIPMENT	9
2.5	GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION	10
3.	DESCRIPTION OF SUPPORT UNITS.....	13
4.	RECIPES FOR TISSUE SIMULATING LIQUIDS	14
5.	SYSTEM VALIDATION.....	21
5.1	TEST PROCEDURE	21
5.2	VALIDATION RESULTS	23
5.3	SYSTEM VALIDATION UNCERTAINTIES	24
6.	TEST RESULTS	25
6.1	TEST PROCEDURES.....	25
6.2	DESCRIPTION OF TEST CONDITION.....	26
6.3	MEASURED SAR RESULT	27
6.4	SAR LIMITS	34
7.	INFORMATION ON THE TESTING LABORATORIES.....	35
	APPENDIX A: TEST CONFIGURATIONS AND TEST DATA	
	APPENDIX B: ADT SAR MEASUREMENT SYSTEM	
	APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
	APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION	



1. CERTIFICATION

PRODUCT: GSM / EGPRS Mobile Phone
MODEL NO.: EX115 (refer to item 2.1 for more detail)
BRAND: MOTOROLA
APPLICANT: Motorola Inc
TESTED: Jul. 07 ~ Jul. 11, 2010
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 2 (Section 2.1093)**
FCC OET Bulletin 65, Supplement C (01-01)
RSS-102

The above equipment (model: EX115, EX112) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Jul. 22, 2010
Andrea Hsia / Specialist

TECHNICAL ACCEPTANCE : Mason Chang , **DATE:** Jul. 22, 2010
Responsible for RF Mason Chang / Engineer

APPROVED BY : Gary Chang , **DATE:** Jul. 22, 2010
Gary Chang / Assistant Manager



A D T

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	GSM / EGPRS Mobile Phone				
MODEL NO.	EX115 (Refer to Note for the more details)				
FCC ID	IHDP56LJ3				
POWER SUPPLY	3.7Vdc (battery) 5.0Vdc (adapter & host equipment)				
MODULATION TYPE	GMSK				
FREQUENCY RANGE	824MHz ~ 849MHz ; 1850MHz ~ 1910MHz				
CHANNEL FREQUENCIES UNDER TEST AND ITS CONDUCTED OUTPUT POWER	FOR MODEL: EX115				
	SIM 1				
	CH	FREQ.	GSM850	GPRS850	
				TS1	TS2
	190	836.6MHz	33.29dBm	33.21dBm	32.95dBm
	CH	FREQ.	PCS1900	GPRS1900	
				TS1	TS2
	661	1880.0MHz	29.95dBm	29.88dBm	29.01dBm
	SIM 2				
	CH	FREQ.	GSM850	GPRS850	
				TS2	
	190	836.6MHz	33.25dBm	32.89dBm	
	CH	FREQ.	PCS1900	GPRS1900	
				TS2	
	661	1880.0MHz	29.87dBm	28.98dBm	
FOR MODEL: EX112					
CH	FREQ.	GSM850	GPRS850		
			TS2		
190	836.6MHz	33.21dBm	32.60dBm		
CH	FREQ.	GSM850	GPRS850		
			TS2		
661	1880.0MHz	29.91dBm	28.95dBm		
MAX. AVERAGE SAR (1g)	HEAD:		GSM850 BAND: 0.665W/kg PCS1900 BAND: 0.794W/kg		
	BODY:		GSM850 BAND: 0.791W/kg PCS1900 BAND: 0.464W/kg		
ANTENNA TYPE	Embedded inverted-F				
ANTENNA GAIN	GSM850 BAND: -0.3dBi PCS1900 BAND: 0.17dBi				
ANTENNA CONNECTOR	NA				
DATA CABLE	Refer to note 5 as below				

I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to note 5 as below

NOTE:

1. This report is prepared for FCC class II permissive change. The differences compared with original report are changing speaker and adding one Earphone (model: SJYN0394A). Therefore, all the test items were performed for this addendum.
2. The EUT is a GSM / EGPRS Mobile Phone which the EGPRS function was for receive only.
3. The EUT is a GSM / EGPRS Mobile Phone which has dual SIM card design (Model: EX115) and single SIM card design (Model: EX112).

Brand	Model Name	Remark
MOTOROLA	EX115	dual SIM
MOTOROLA	EX112	single SIM

4. The EUT is a Smart Phone. The functions of EUT listed as below:

	REFERENCE REPORT
BLUETOOTH	SA990421C04A-1
GSM 850 + PCS 1900	SA990421C04A

5. The EUT has following accessories.

No.	Product	Brand	MODEL	Description	Remark
1	Adapter	MOTOROLA	DCH3-050US-0303	I/P: 100-240Vac, 50/60Hz, 0.2A O/P: 5Vdc, 550mA	
2	USB cable	-	-	1.3m shielded cable without core	
3	Battery	MOTOROLA	BK60	Rating: 3.7V, 930mAh, 3.4Wh	
4	Earphone1	MOTOROLA	SYN2356A	1.3m shielded cable without core	Original
5	Earphone2	MOTOROLA	SJYN0394A	1.4m shielded cable without core	New

6. IMEI Code: **Dual SIM:** 35202604000827-7, 35202604001526-4
Single SIM: 35202604000900-2
7. Software vision: STARLING_G_05.01.02D.
8. Hardware vision: EP1
9. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01- 01)

RSS-102

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.

2.3 GENERAL INFORMATION OF THE SAR SYSTEM

DASY4 (**Software 4.7 Build 80**) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4 software defined. The DASY4 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV4 ISOTROPIC E-FIELD PROBE

CONSTRUCTION	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
FREQUENCY	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
DIRECTIVITY	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
DYNAMIC RANGE	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
DIMENSIONS	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
APPLICATION	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.



TWIN SAM V4.0

CONSTRUCTION

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

SHELL THICKNESS

2 ± 0.2mm

FILLING VOLUME

Approx. 25liters

DIMENSIONS

Height: 810mm; Length: 1000mm; Width: 500mm

SYSTEM VALIDATION KITS:

CONSTRUCTION

Symmetrical dipole with 1/4 balun enables measurement of feedpoint impedance with NWA matched for use near flat phantoms filled with brain simulating solutions. Includes distance holder and tripod adaptor

CALIBRATION

Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions

FREQUENCY

835, 1900MHz

RETURN LOSS

> 20dB at specified validation position

POWER CAPABILITY

> 100W (f < 1GHz); > 40W (f > 1GHz)

OPTIONS

Dipoles for other frequencies or solutions and other calibration conditions upon request

DEVICE HOLDER FOR SAM TWIN PHANTOM

CONSTRUCTION

The device holder for the mobile phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\varepsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

DATA ACQUISITION ELECTRONICS

CONSTRUCTION

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

2.4 TEST EQUIPMENT

FOR SAR MEASUREMENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S & P	QD000 P40 CA	TP-1202	NA	NA
2	Signal Generator	Agilent	E8257C	MY43320668	Feb. 23, 2010	Feb. 22, 2011
3	E-Field Probe	S & P	EX3DV4	3590	Mar. 25, 2010	Mar. 24, 2011
4	DAE	S & P	DAE	861	Jan. 22, 2010	Jan. 21, 2011
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S & P	D835V2	4d021	Apr. 29, 2010	Apr. 28, 2011
7	Validation Dipole	S & P	D1900V2	5d036	Feb. 23, 2010	Feb. 22, 2011

NOTE: Before starting, all test equipment shall be warmed up for 30min.

FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E8257C	MY43320668	Feb. 23, 2010	Feb. 22, 2011
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

NOTE:

1. Before starting, all test equipment shall be warmed up for 30min.
2. The tolerance ($k=1$) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually $\pm 2.5\%$ and $\pm 5\%$ for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than $\pm 2.5\%$ ($k=1$). It can be substantially smaller if more accurate methods are applied

2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	F
	- Crest factor	Cf
Media parameters:	- Conductivity	σ
	- Density	ρ

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

V _i	=compensated signal of channel i	(i = x, y, z)
U _i	=input signal of channel I	(i = x, y, z)
Cf	=crest factor of exciting field	(DASY parameter)
dcp _i	=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

- V_i = compensated signal of channel I (i = x, y, z)
 Norm_i = sensor sensitivity of channel i $\mu\text{V}/(\text{V/m})^2$ for E-field Probes (i = x, y, z)
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

- SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

3. DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	104484

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 liters of tissue simulation liquid.

The following are some common ingredients :

- **WATER-** Deionized water (pure H₂O), resistivity ≈ 16 M - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125mPa.s, 2% in water, 20_C),
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 835MHz (HSL-835)	MUSCLE SIMULATING LIQUID 835MHz (MSL-835)
Water	40.28%	50.07%
Cellulose	02.41%	NA
Salt	01.38%	0.94%
Preventtol D-7	00.18%	0.09%
Sugar	57.97%	48.2%
Dielectric Parameters at 22°C	f = 835MHz $\epsilon = 41.5 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ S/m	f = 835MHz $\epsilon = 55.0 \pm 5\%$ $\sigma = 1.05 \pm 5\%$ S/m

THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 1900MHz (HSL-1900)	MUSCLE SIMULATING LIQUID 1900MHz (MSL-1900)
Water	55.24%	70.16%
DGMBE	44.45%	29.44%
Salt	0.306%	00.39%
Dielectric Parameters at 22°C	f= 1900MHz $\epsilon = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ S/m	f= 1900MHz $\epsilon = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ S/m

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with $>8\text{mm}$ thickness $\epsilon' = 10.0$, $\epsilon'' = 0.0$). If measured parameters do not fit within tolerance, repeat calibration (± 0.2 for ϵ' : ± 0.1 for ϵ'').
7. Conductivity can be calculated from ϵ'' by $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$.
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample ($\sim 50\text{ml}$) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900MHz) and press 'Option'-button).
14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900MHz).



FOR BAND SIMULATING LIQUID

LIQUID TYPE		HSL-835			
SIMULATING LIQUID TEMP.		22.6			
TEST DATE		Jul. 07, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
835.0	Permittivity (ϵ)	41.50	42.00	1.20	±5
836.6		41.50	41.90	0.96	
835.0	Conductivity (σ) S/m	0.90	0.91	1.11	
836.6		0.90	0.92	2.22	

LIQUID TYPE		MSL-835			
SIMULATING LIQUID TEMP.		22.6			
TEST DATE		Jul. 08, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
835.0	Permittivity (ϵ)	55.20	53.89	-2.37	±5
836.6		55.20	53.87	-2.41	
835.0	Conductivity (σ) S/m	0.97	0.95	-2.06	
836.6		0.97	0.95	-2.06	



A D T

LIQUID TYPE		MSL-835			
SIMULATING LIQUID TEMP.		22.8			
TEST DATE		Jul. 10, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
835.0	Permittivity	55.20	53.87	-2.41	±5
836.6	(ϵ)	55.20	53.85	-2.45	
835.0	Conductivity	0.97	0.94	-3.09	
836.6	(σ) S/m	0.97	0.94	-3.09	



FOR BAND SIMULATING LIQUID

LIQUID TYPE		HSL-1900			
SIMULATING LIQUID TEMP.		22.8			
TEST DATE		Jul. 07, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
1880	Permittivity (ϵ)	40.00	41.00	2.50	±5
1900		40.00	40.80	2.00	
1880	Conductivity (σ) S/m	1.40	1.40	0.00	
1900		1.40	1.43	2.14	

LIQUID TYPE		MSL-1900			
SIMULATING LIQUID TEMP.		22.8			
TEST DATE		Jul. 09, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
1880	Permittivity (ϵ)	53.30	54.00	1.31	±5
1900		53.30	53.80	0.94	
1880	Conductivity (σ) S/m	1.52	1.55	1.97	
1900		1.52	1.56	2.63	



LIQUID TYPE		MSL-1900			
SIMULATING LIQUID TEMP.		22.6			
TEST DATE		Jul. 11, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
1880	Permittivity (ϵ)	53.30	53.90	1.13	±5
1900		53.30	53.70	0.75	
1880	Conductivity (σ) S/m	1.52	1.54	1.32	
1900		1.52	1.55	1.97	

5. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

5.1 TEST PROCEDURE

Before the system performance check, we need only to tell the system which components (probe, medium, and device) are used for the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for mobile phones can be left in place but should be rotated away from the dipole.

1. The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ± 0.02 dB.
2. The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid.

3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.
4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY4 system is less than $\pm 0.1\text{mm}$.

$$SAR_{tolerance} [\%] = 100 \times \left(\frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance $SAR_{tolerance}[\%]$ is <2%.

5.2 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID					
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE
HSL835	2.37 (1g)	2.46	3.80	15mm	Jul. 07, 2010
HSL1900	10.00 (1g)	10.20	2.00	10mm	Jul. 07, 2010
MSL835	2.52 (1g)	2.64	4.76	15mm	Jul. 08, 2010
MSL1900	10.30 (1g)	10.70	3.88	10mm	Jul. 09, 2010
MSL835	2.52 (1g)	2.44	-3.17	15mm	Jul. 10, 2010
MSL1900	10.30 (1g)	10.50	1.94	10mm	Jul. 11, 2010
TESTED BY	Aaron Liang				

NOTE: Please see Appendix for the photo of system validation test.



5.3 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement System								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	0.25	Rectangular	√3	0.7	0.7	0.10	0.10	∞
Hemispherical Isotropy	1.30	Rectangular	√3	0.7	0.7	0.53	0.53	∞
Boundary effects	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Linearity	0.30	Rectangular	√3	1	1	0.17	0.17	∞
System Detection Limits	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	√3	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1	1.73	1.73	∞
Probe Positioner	0.40	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.90	Rectangular	√3	1	1	1.67	1.67	∞
Max. SAR Eval.	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Dipole Related								
Dipole Axis to Liquid Distance	2.00	Rectangular	√3	1	1	1.15	1.15	145
Input Power Drift	5.00	Rectangular	√3	1	1	2.89	2.89	∞
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	√3	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	√3	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	3.69	Normal	1	0.64	0.43	2.36	1.59	∞
Liquid Permittivity (target)	5.00	Rectangular	√3	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	3.21	Normal	1	0.6	0.49	1.93	1.57	∞
Combined Standard Uncertainty						8.58	8.16	
Coverage Factor for 95%						Kp=2		
Expanded Uncertainty (K=2)						17.17	16.31	

NOTE: About the system validation uncertainty assessment, please reference the section 7.

6. TEST RESULTS

6.1 TEST PROCEDURES

The EUT makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY4 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 / EN 62209-1, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan was performed for the highest spatial SAR location. The zoom scan with 30mm x 30mm x 30mm volume was performed for SAR value averaged over 1g and 10g spatial volumes.

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 3mm and maintained at a constant distance of ± 0.5 mm during a zoom scan to determine peak SAR locations. The distance is 3mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 8mm separation distance. The cube size is 7 x 7 x 7 points consists of 343 points and the grid space is 5mm.

The measurement time is 0.5s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 3mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.

6.2 DESCRIPTION OF TEST CONDITION

TEST DATE	TISSUE TYPE / FREQ.	TEMPERATURE (°C)		HUMIDITY (%RH)	TESTED BY
		AIMBENT	LIQUID		
Jul. 07, 2010	HSL 835	23.0	22.6	62	Aaron Liang
Jul. 07, 2010	HSL 1900	23.1	22.8	61	Aaron Liang
Jul. 08, 2010	MSL 835	23.0	22.6	62	Aaron Liang
Jul. 09, 2010	MSL 1900	23.1	22.8	61	Aaron Liang
Jul. 10, 2010	MSL 835	23.1	22.8	61	Aaron Liang
Jul. 11, 2010	MSL 1900	23.0	22.6	62	Aaron Liang

6.3 MEASURED SAR RESULT

FOR MODEL EX115, SIM 1

SAR (1g)				
HEAD	RIGHT		LEFT	
CH	CHEEK	TILT	CHEEK	TILT
GSM 850				
Middle	0.665	0.336	0.663	0.321
PCS 1900				
Middle	0.574	0.355	0.794	0.304

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

**FOR MODEL EX115, SIM 1
EUT with Earphone1: SYN2356A**

SAR (1g)		
	BODY/MSL	
CH	Front	Bottom
GSM 850		
Middle	0.378	0.52
GPRS 850 TS1		
Middle	0.374	0.494
GPRS 850 TS2		
Middle	0.626	0.791
PCS 1900		
Middle	0.246	0.306
GPRS 1900 TS1		
Middle	0.235	0.292
GPRS 1900 TS2		
Middle	0.378	0.464

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

**FOR MODEL EX115, SIM 1
EUT with Earphone 2: SJYN0394A**

SAR (1g)		
	BODY/MSL	
CH	Front	Bottom
GSM 850		
Middle	0.370	0.509
GPRS 850 TS1		
Middle	0.367	0.483
GPRS 850 TS2		
Middle	0.613	0.777
PCS 1900		
Middle	0.243	0.302
GPRS 1900 TS1		
Middle	0.232	0.286
GPRS 1900 TS2		
Middle	0.374	0.459

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

FOR MODEL EX115, SIM 2

SAR (1g)				
HEAD	RIGHT		LEFT	
CH	CHEEK	TILT	CHEEK	TILT
GSM 850				
Middle	0.650	/	/	/
PCS 1900				
Middle	/	/	0.775	/

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

FOR MODEL EX115, SIM 2

EUT with Earphone1: SYN2356A

SAR (1g)		
EUT	BODY/MSL	
	Front	Bottom
GPRS 850 TS2		
Middle	/	0.773
GPRS 1900 TS2		
Middle	/	0.452

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

FOR MODEL EX115, SIM 2

EUT with Earphone 2: SJYN0394A

SAR (1g)		
CH	BODY/MSL	
	Front	Bottom
GPRS 850 TS2		
Middle	/	0.756
GPRS 1900 TS2		
Middle	/	0.449

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

FOR MODEL EX112

SAR (1g)				
HEAD	RIGHT		LEFT	
CH	CHEEK	TILT	CHEEK	TILT
GSM 850				
Middle	0.650			
PCS 1900				
Middle			0.787	

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

FOR MODEL EX112
EUT with Earphone1: SYN2356A

SAR (1g)		
EUT	BODY/MSL	
	Front	Bottom
GPRS 850 TS2		
Middle	/	0.786
GPRS 1900 TS2		
Middle	/	0.460

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

FOR MODEL EX112
EUT with Earphone 2: SJYN0394A

SAR (1g)		
CH	BODY/MSL	
	Front	Bottom
GPRS 850 TS2		
Middle	/	0.756
GPRS 1900 TS2		
Middle	/	0.455

NOTE:

1. Please see the Appendix A for the data.
2. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
3. Distance between EUT and phantom is 15mm for test of body position.

6.4 SAR LIMITS

HUMAN EXPOSURE	SAR (W/kg)	
	(GENERAL POPULATION / UNCONTROLLED EXPOSURE ENVIRONMENT)	(OCCUPATIONAL / CONTROLLED EXPOSURE ENVIRONMENT)
Spatial Peak (averaged over 1 g)	1.6	8.0

NOTE:

1. This limits accord to 47 CFR 2.1093 – Safety Limit.
2. The EUT property been complied with the partial body exposure limit under the general population environment.



7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw


The address and road map of all our labs can be found in our web site also.

---END---

APPENDIX A: TEST DATA

Liquid Level Photo


HSL 835MHz D=151mm-7/7

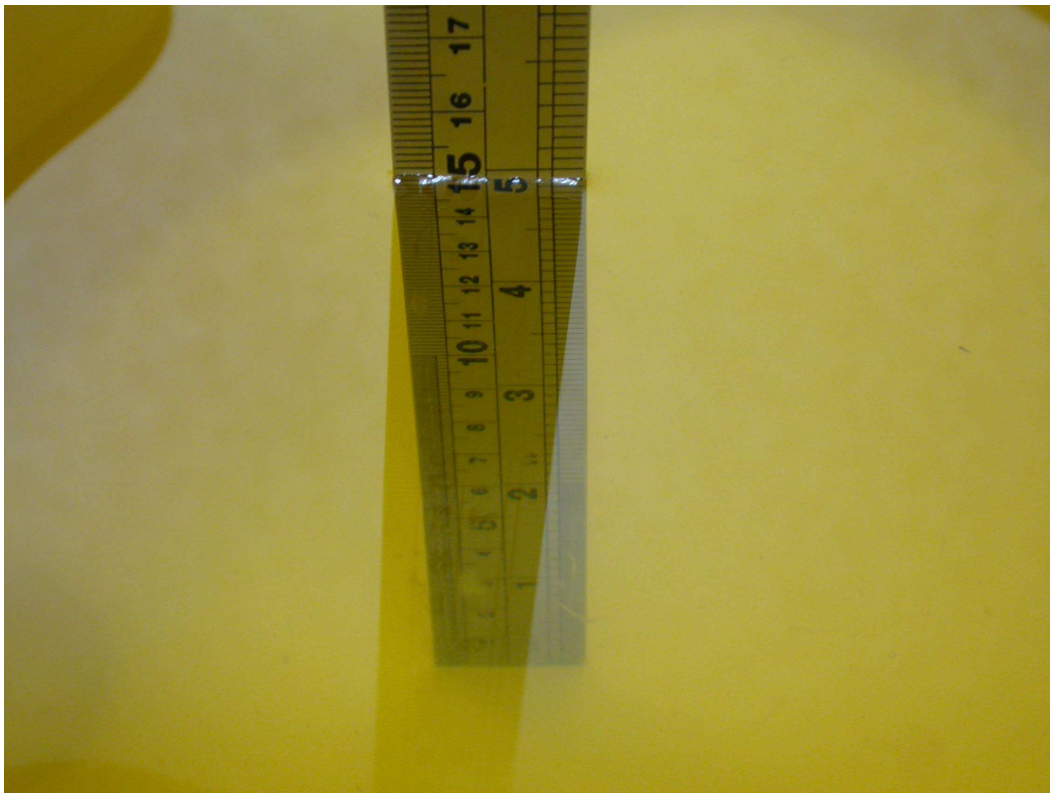

HSL 1900MHz D=152mm-7/7




MSL 835MHz D=151mm-7/8

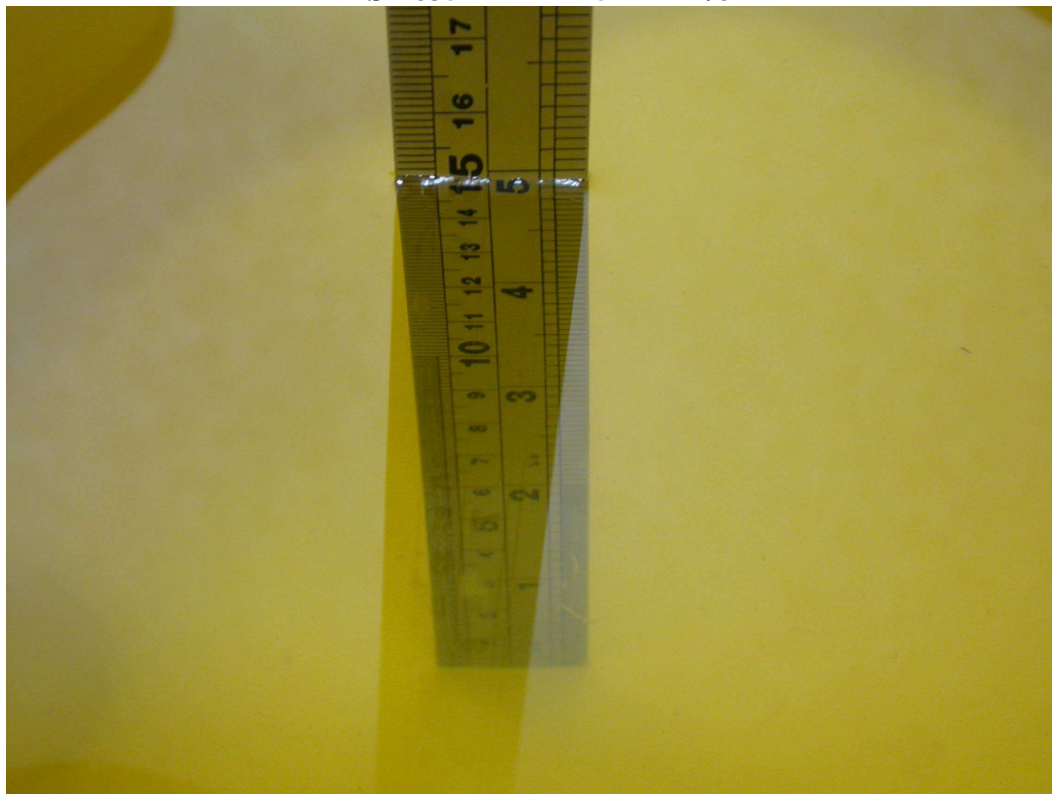

MSL 1900MHz D=150mm-7/9



MSL 835MHz D=152mm-7/10

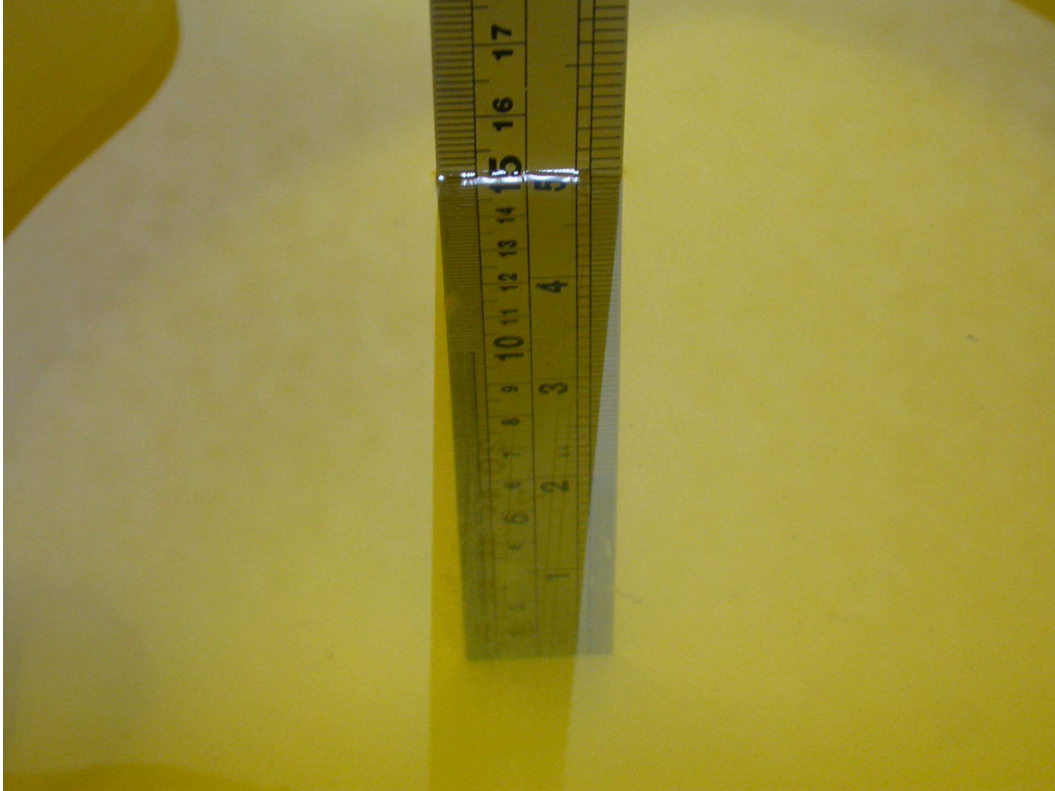

MSL 1900MHz D=151mm-7/11



Test Laboratory: Bureau Veritas ADT

M01-Right Head Cheek- GSM 850-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.660 mW/g


Mid Channel 190 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.05 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = **0.665** mW/g; SAR(10 g) = 0.546 mW/g

Maximum value of SAR (measured) = 0.697 mW/g

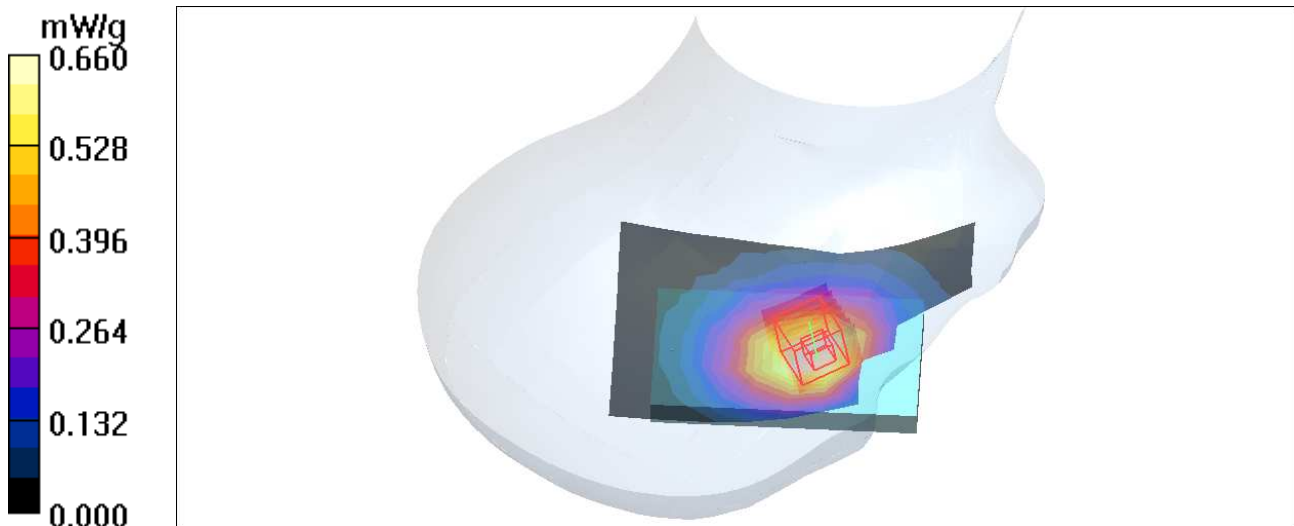

Test Laboratory: Bureau Veritas ADT

M02-Right Head Tilt- GSM 850-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190 Tilt/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.347 mW/g


Mid Channel 190 Tilt/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.0 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = **0.336 mW/g**; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.355 mW/g

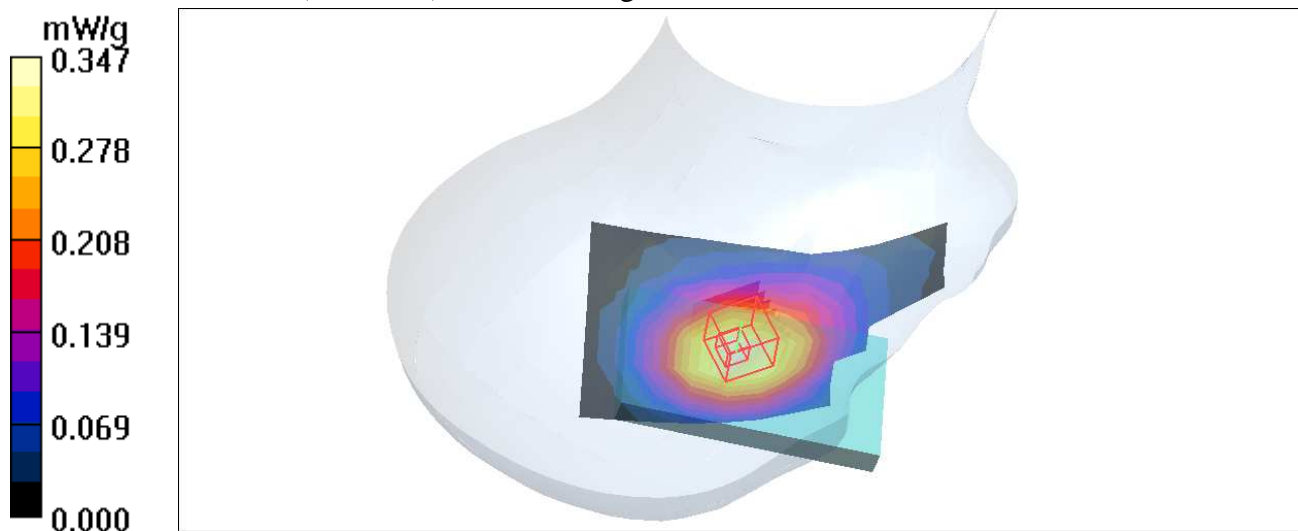

Test Laboratory: Bureau Veritas ADT

M03-Left Head Cheek- GSM 850-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.710 mW/g


Mid Channel 190 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.74 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = **0.663 mW/g**; SAR(10 g) = 0.536 mW/g

Maximum value of SAR (measured) = 0.714 mW/g

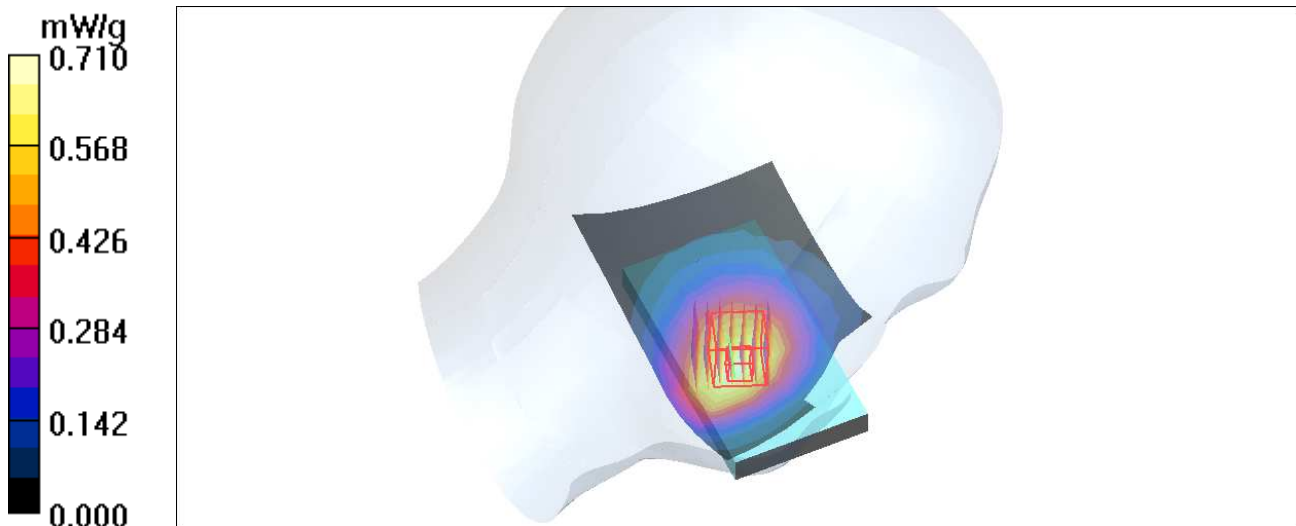

Test Laboratory: Bureau Veritas ADT

M04-Left Head Tilt- GSM 850-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190 Tilt/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.337 mW/g


Mid Channel 190 Tilt/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 11.8 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.342 mW/g

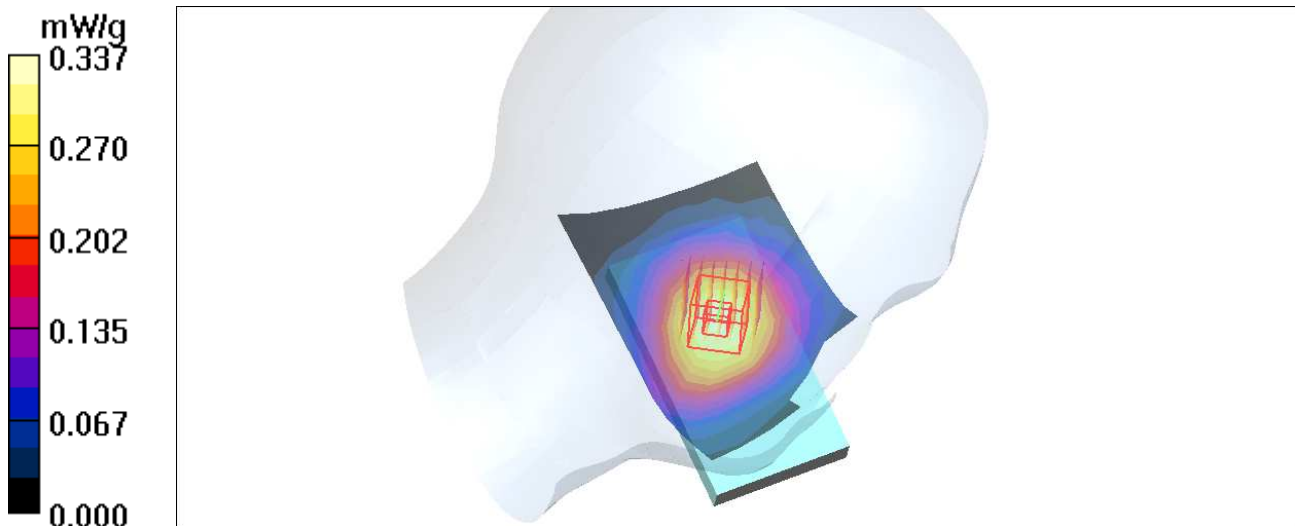

Test Laboratory: Bureau Veritas ADT

M05-Right Head Cheek- GSM 1900-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.673 mW/g


Mid Channel 661 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.0 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = **0.574 mW/g**; SAR(10 g) = **0.362 mW/g**

Maximum value of SAR (measured) = 0.678 mW/g

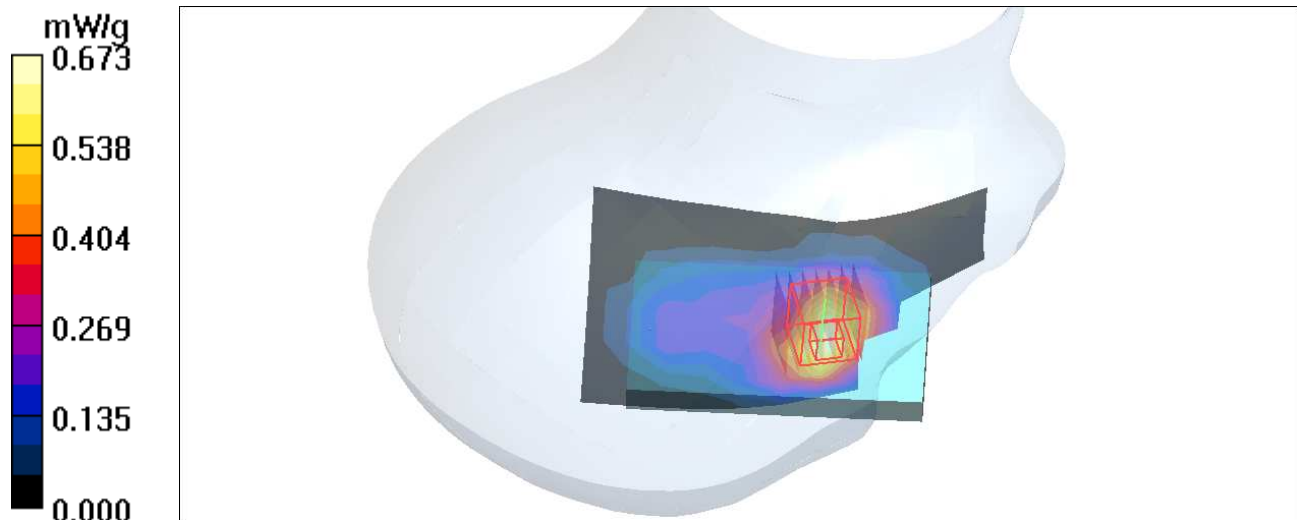

Test Laboratory: Bureau Veritas ADT

M06-Right Head Tilt- GSM 1900-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 Tilt/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.389 mW/g



Mid Channel 661 Tilt/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.1 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = **0.355** mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

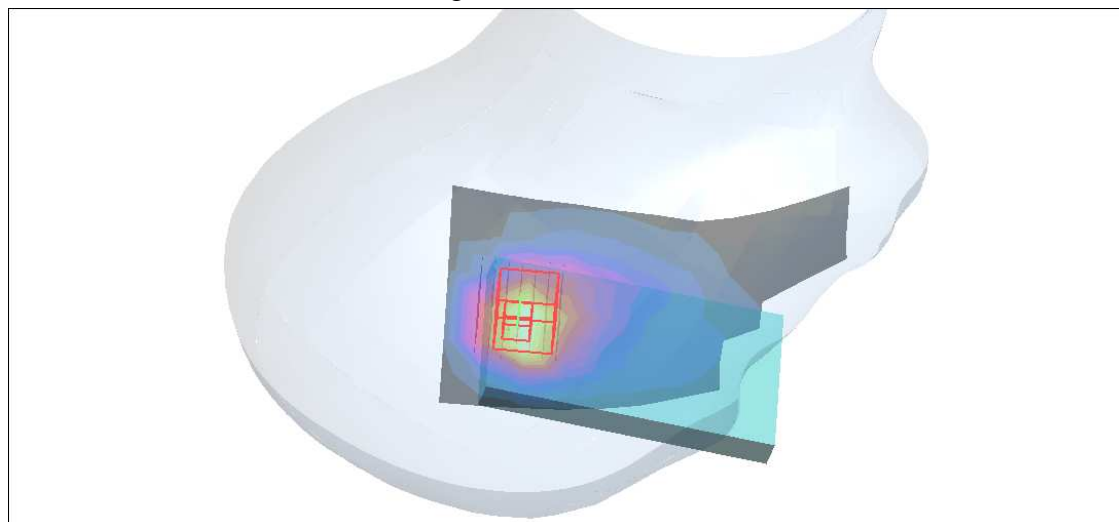

Test Laboratory: Bureau Veritas ADT

M07-Left Head Cheek- GSM 1900-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.812 mW/g



Mid Channel 661 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 9.81 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 1.3 W/kg

SAR(1 g) = **0.794 mW/g**; SAR(10 g) = **0.454 mW/g**

Maximum value of SAR (measured) = 0.950 mW/g

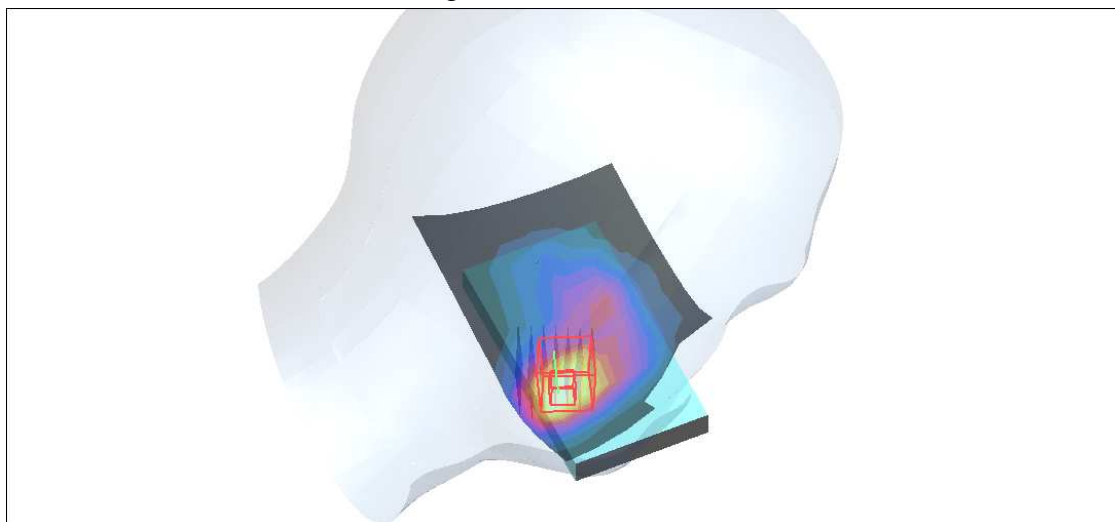

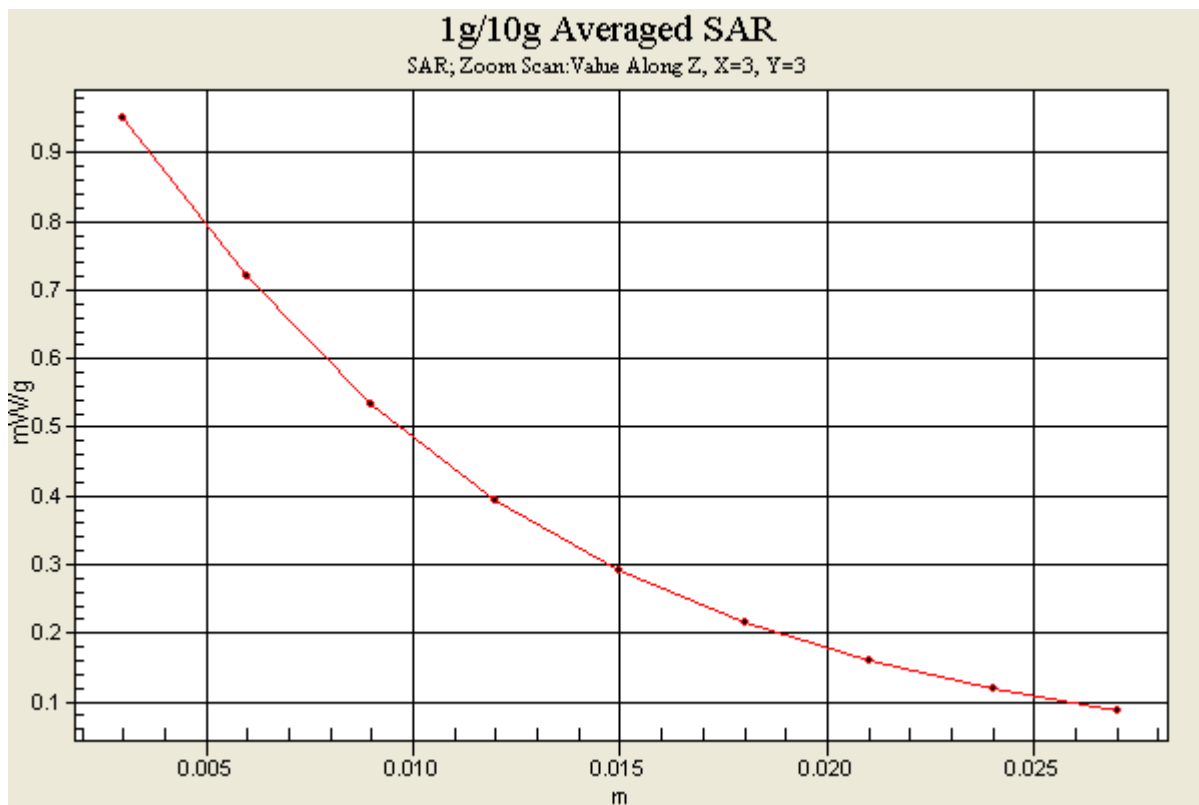

Test Laboratory: Bureau Veritas ADT

M08-Left Head Tilt- GSM 1900-Sim1

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 Tilt/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.364 mW/g



Mid Channel 661 Tilt/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.2 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = **0.304 mW/g**; SAR(10 g) = **0.184 mW/g**

Maximum value of SAR (measured) = 0.359 mW/g

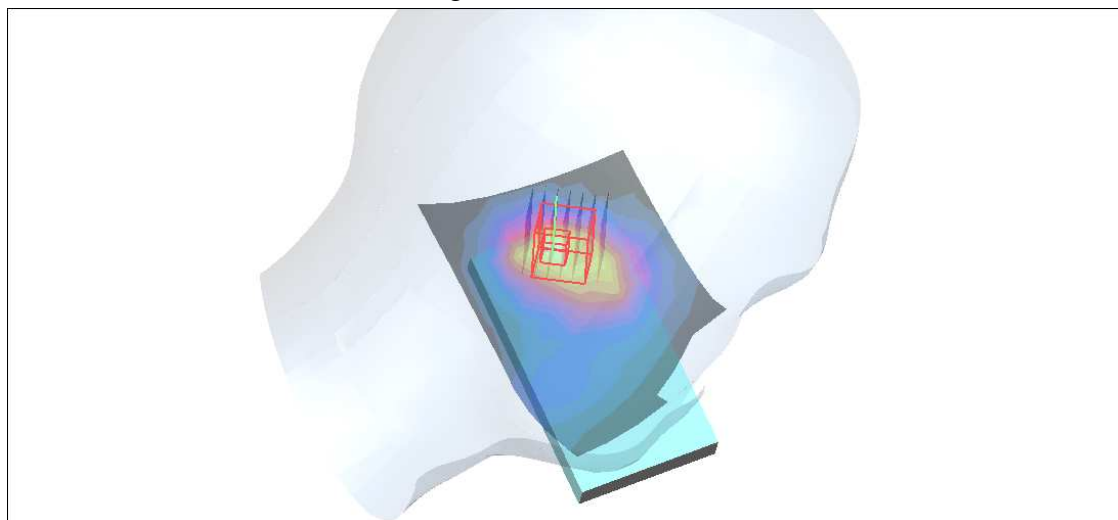

Test Laboratory: Bureau Veritas ADT

M09-Body Front - GSM 850-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.3 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.468 W/kg

SAR(1 g) = **0.378** mW/g; SAR(10 g) = **0.297** mW/g

Maximum value of SAR (measured) = 0.413 mW/g

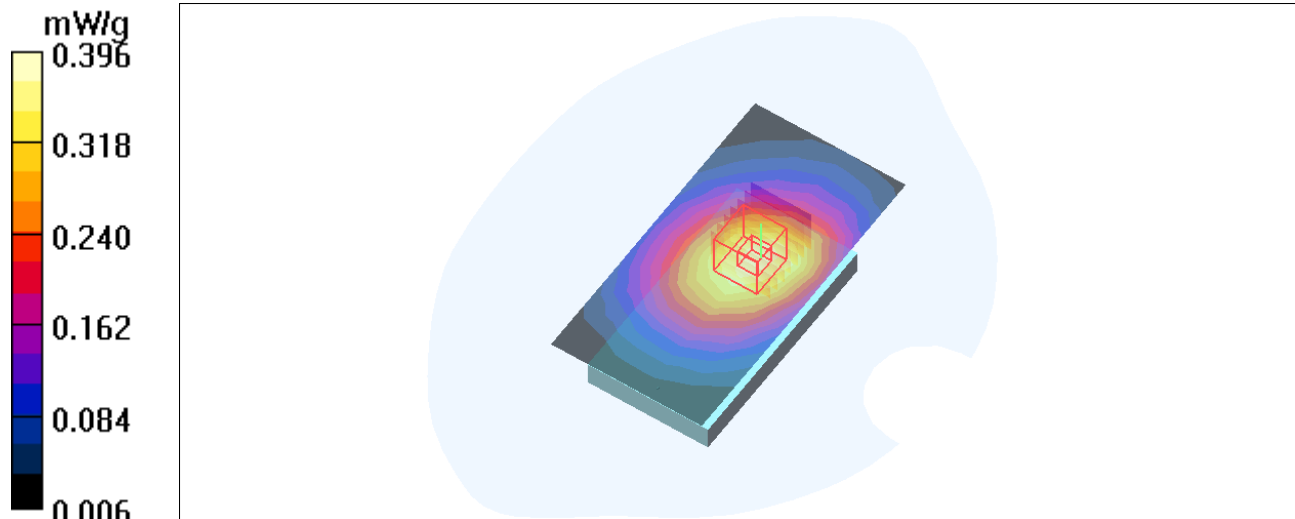

Test Laboratory: Bureau Veritas ADT

M10-Body Bottom - GSM 850-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 53.87$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.549 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 21.5 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.520 mW/g; SAR(10 g) = 0.401 mW/g

Maximum value of SAR (measured) = 0.572 mW/g

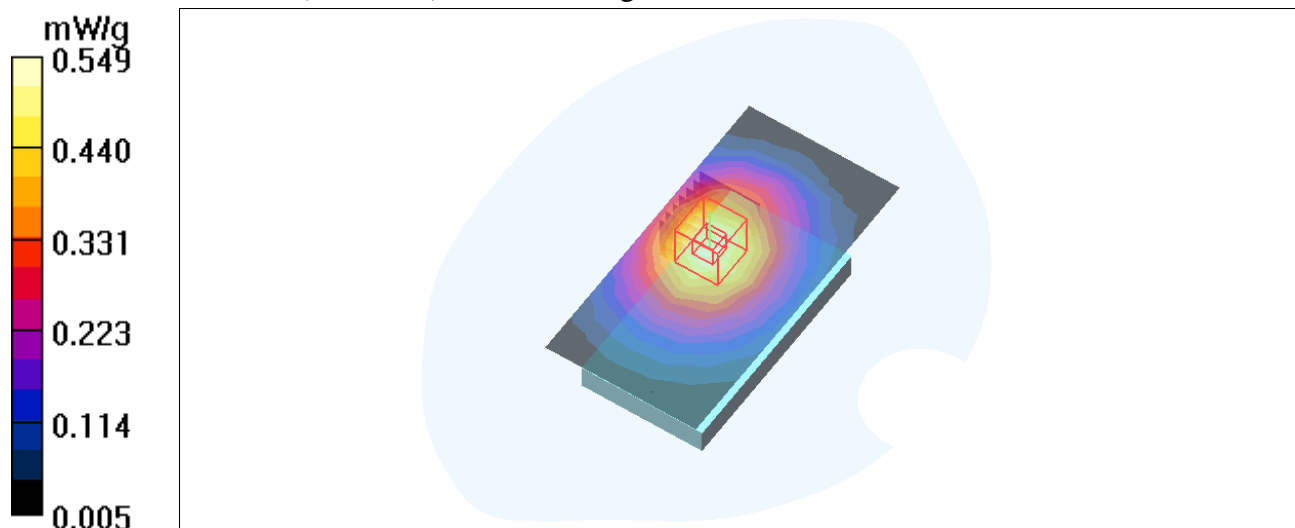

Test Laboratory: Bureau Veritas ADT

M11-Body Front - GPRS TS1 850-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.404 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = **0.374 mW/g**; SAR(10 g) = **0.294 mW/g**

Maximum value of SAR (measured) = 0.407 mW/g

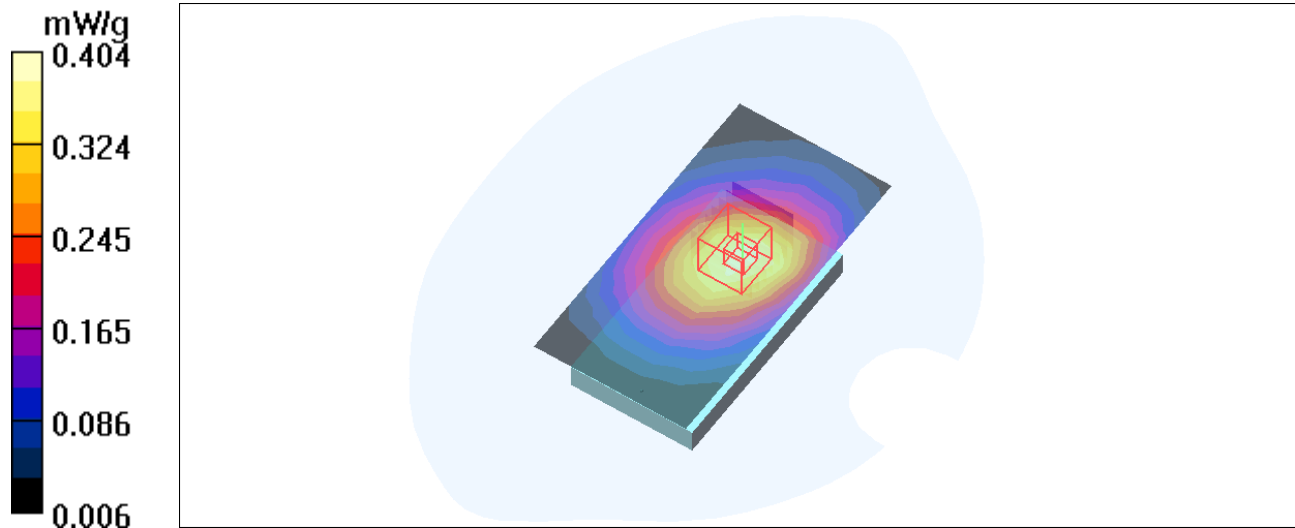

Test Laboratory: Bureau Veritas ADT

M12-Body Bottom - GPRS TS1 850-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 53.87$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.518 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 20.8 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = **0.494 mW/g**; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.544 mW/g

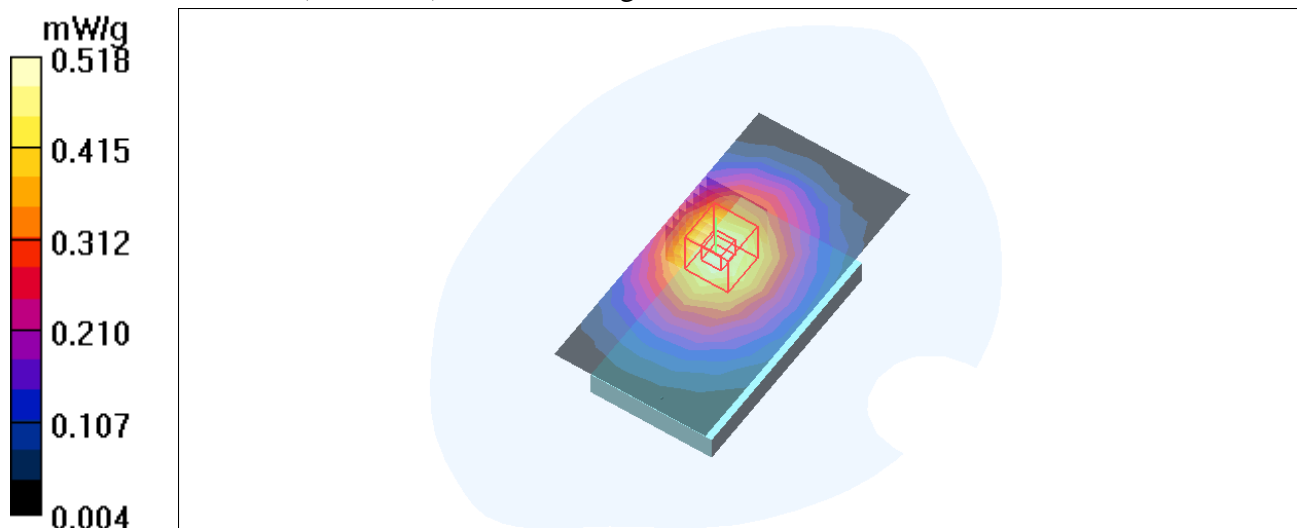

Test Laboratory: Bureau Veritas ADT

M13-Body Front - GPRS TS2 850-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.679 mW/g

Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 24.7 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = **0.626** mW/g; SAR(10 g) = 0.493 mW/g

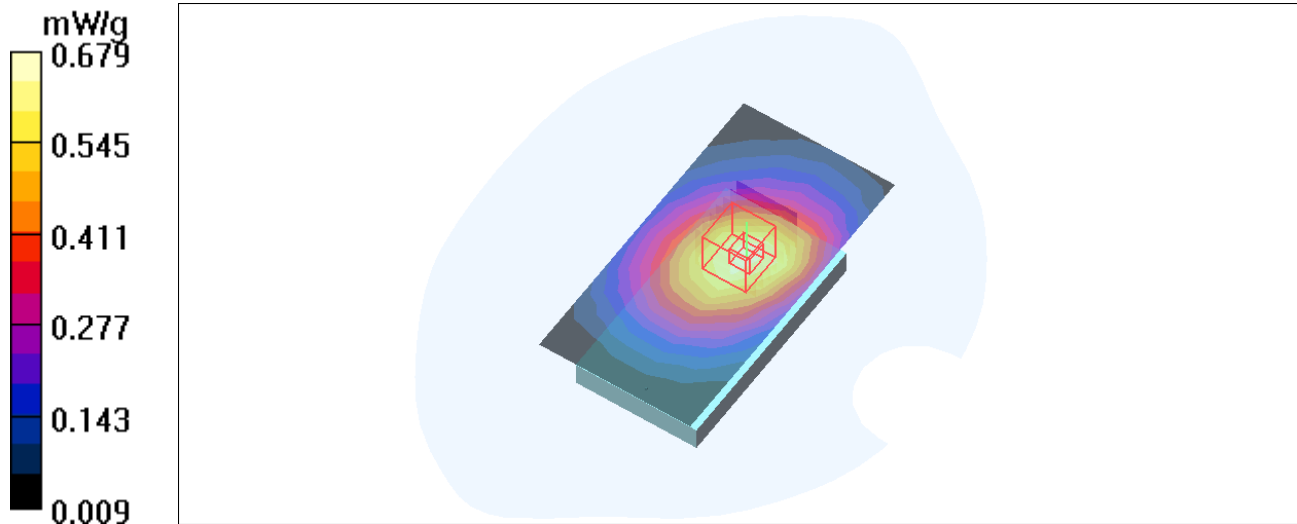

Test Laboratory: Bureau Veritas ADT

M14-Body Bottom - GPRS TS2 850-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 53.87$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.83 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 26.38 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.99 W/kg

SAR(1 g) = **0.791 mW/g**; SAR(10 g) = **0.611 mW/g**

Maximum value of SAR (measured) = 0.872 mW/g

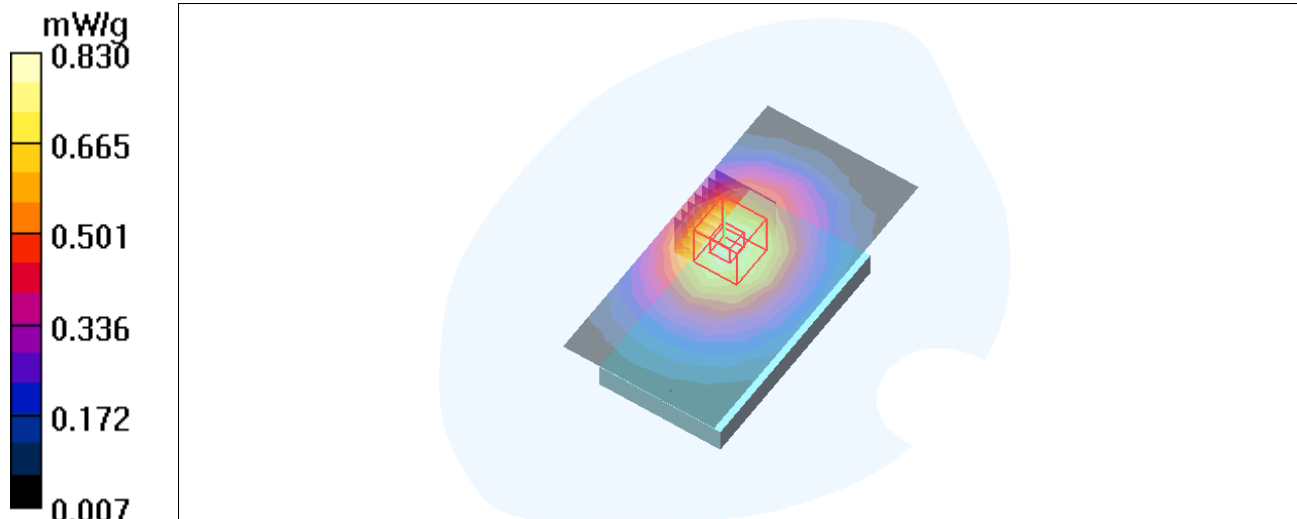

Test Laboratory: Bureau Veritas ADT

M15-Body Front - GSM 1900-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.265 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.81 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.298 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.81 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

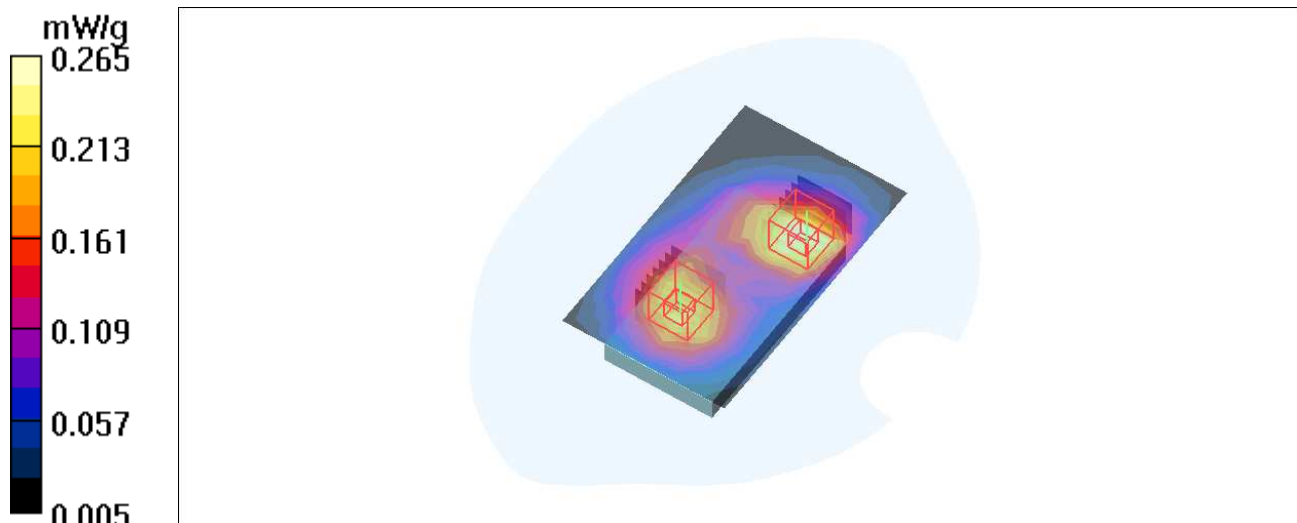

Test Laboratory: Bureau Veritas ADT

M16-Body bottom - GSM 1900-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.319 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.70 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

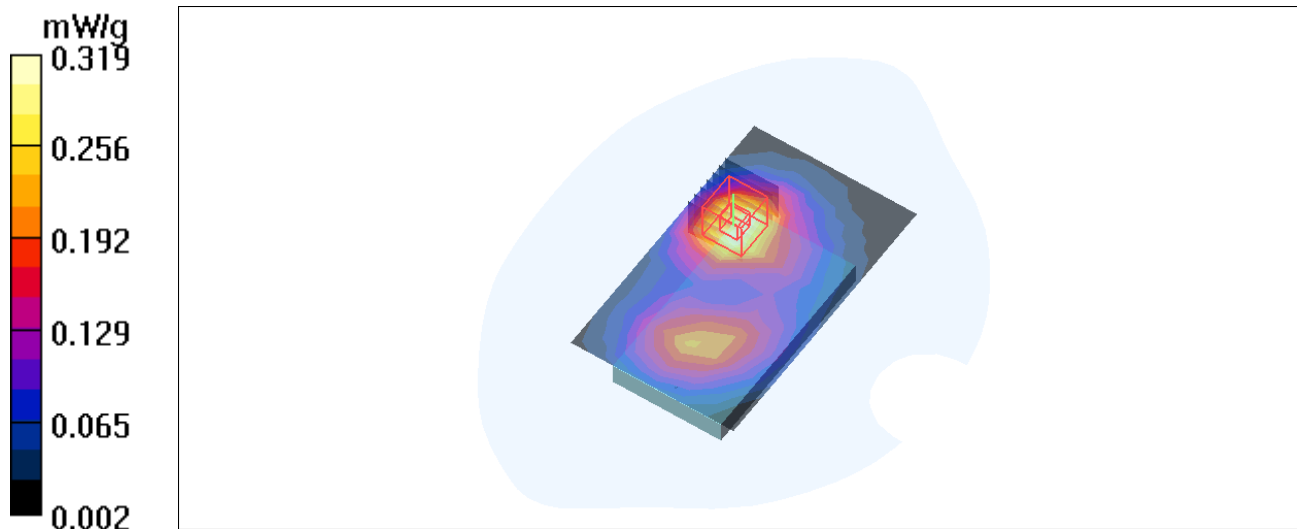

Test Laboratory: Bureau Veritas ADT

M17-Body Front- GPRS 1900-TS1-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.248 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.62 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.62 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.223 mW/g



Test Laboratory: Bureau Veritas ADT

M18-Body bottom - GPRS 1900-TS1-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.304 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.59 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = **0.292 mW/g**; SAR(10 g) = **0.168 mW/g**

Maximum value of SAR (measured) = 0.353 mW/g

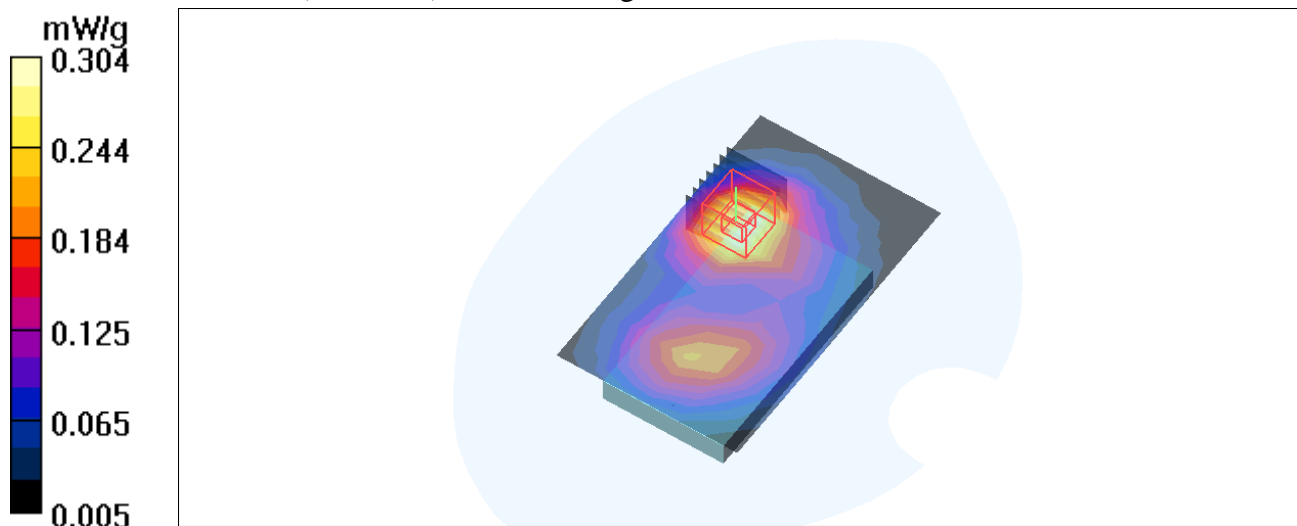

Test Laboratory: Bureau Veritas ADT

M19-Body Front- GPRS 1900-TS2-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.48 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.455 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.48 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.361 mW/g

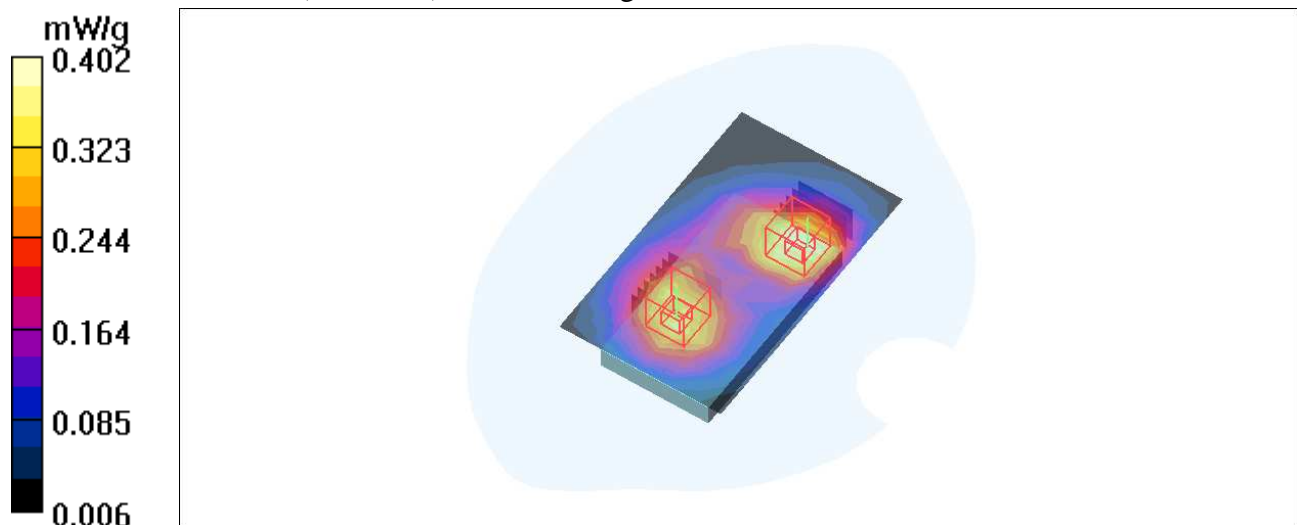

Test Laboratory: Bureau Veritas ADT

M20-Body bottom - GPRS 1900-TS2-Sim1 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.484 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.58 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = **0.464** mW/g; SAR(10 g) = **0.267** mW/g

Maximum value of SAR (measured) = 0.563 mW/g

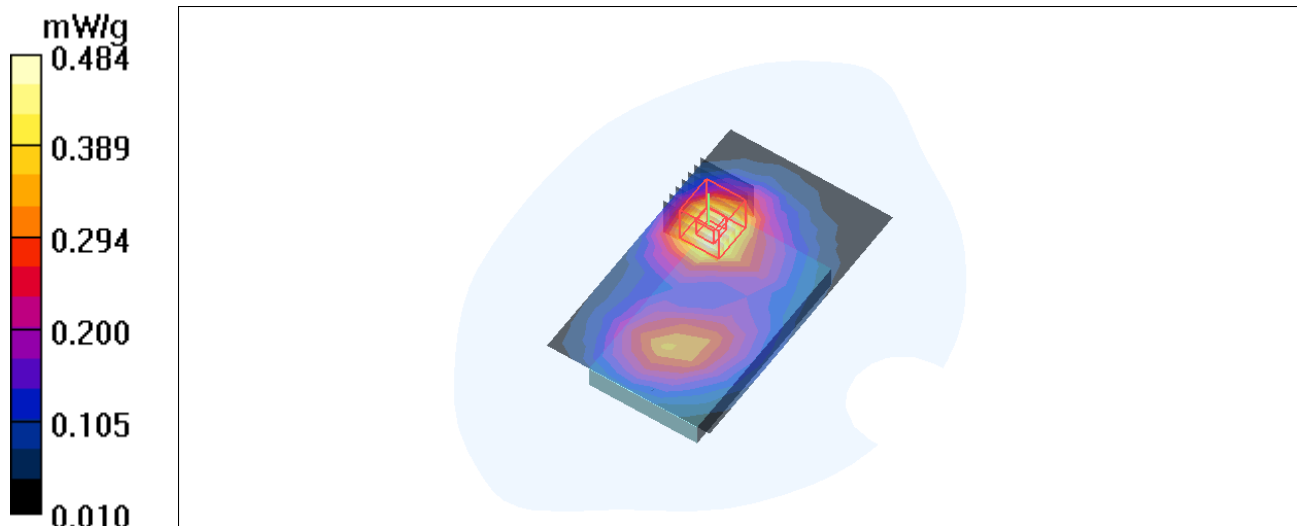

Test Laboratory: Bureau Veritas ADT

M21-Body Front - GSM 850-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 53.85$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.388 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.3 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = **0.370** mW/g; SAR(10 g) = **0.291** mW/g

Maximum value of SAR (measured) = 0.404 mW/g

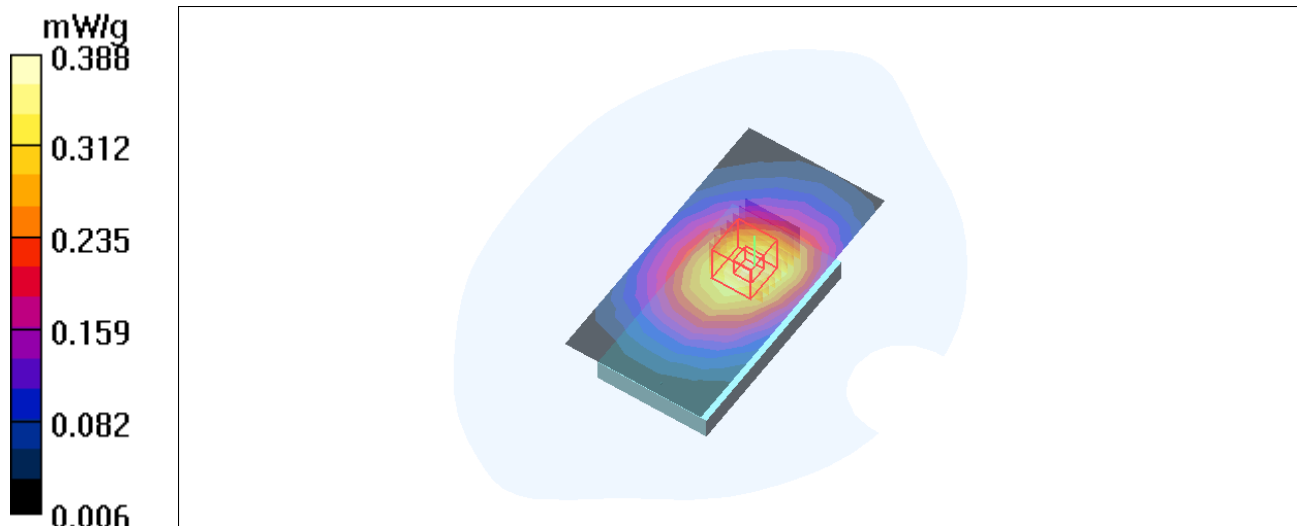

Test Laboratory: Bureau Veritas ADT

M22-Body Bottom - GSM 850-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 53.85$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.537 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 21.5 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = **0.509 mW/g**; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.560 mW/g

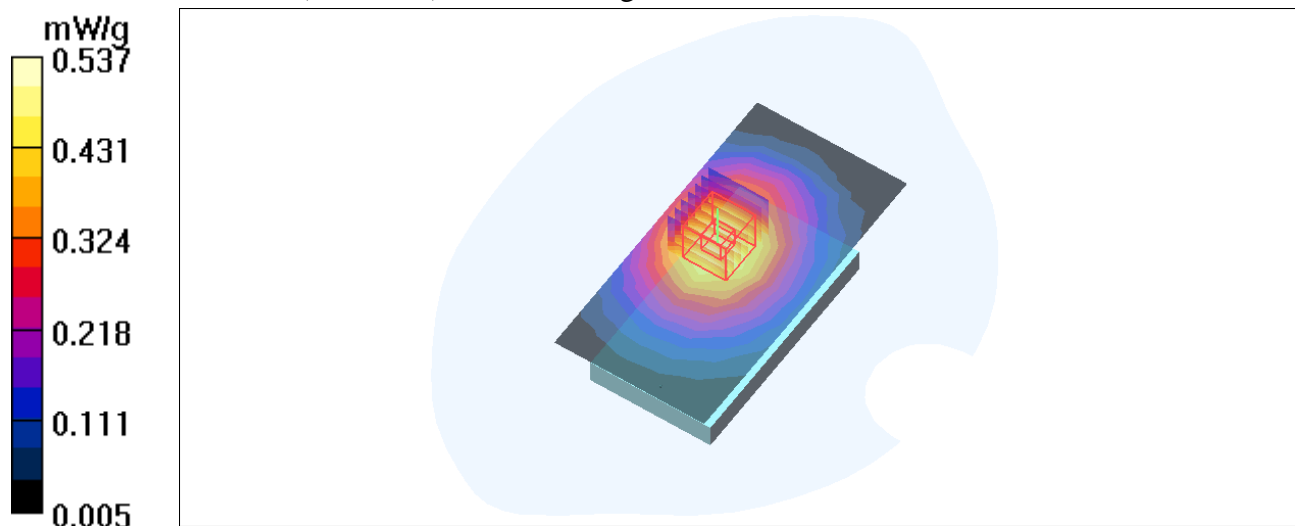

Test Laboratory: Bureau Veritas ADT

M23-Body Front - GPRS TS1 850-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 53.85$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.395 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.1 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = **0.367** mW/g; SAR(10 g) = **0.288** mW/g

Maximum value of SAR (measured) = 0.399 mW/g

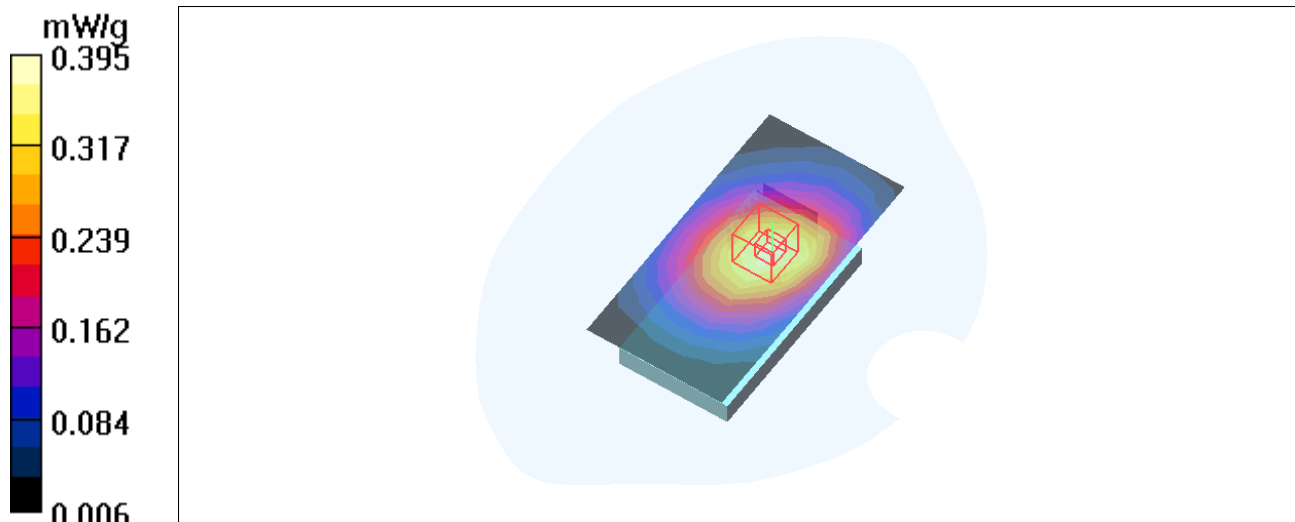

Test Laboratory: Bureau Veritas ADT

M24-Body Bottom - GPRS TS1 850-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 53.85$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.507 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 20.8 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = **0.483 mW/g**; SAR(10 g) = 0.372 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

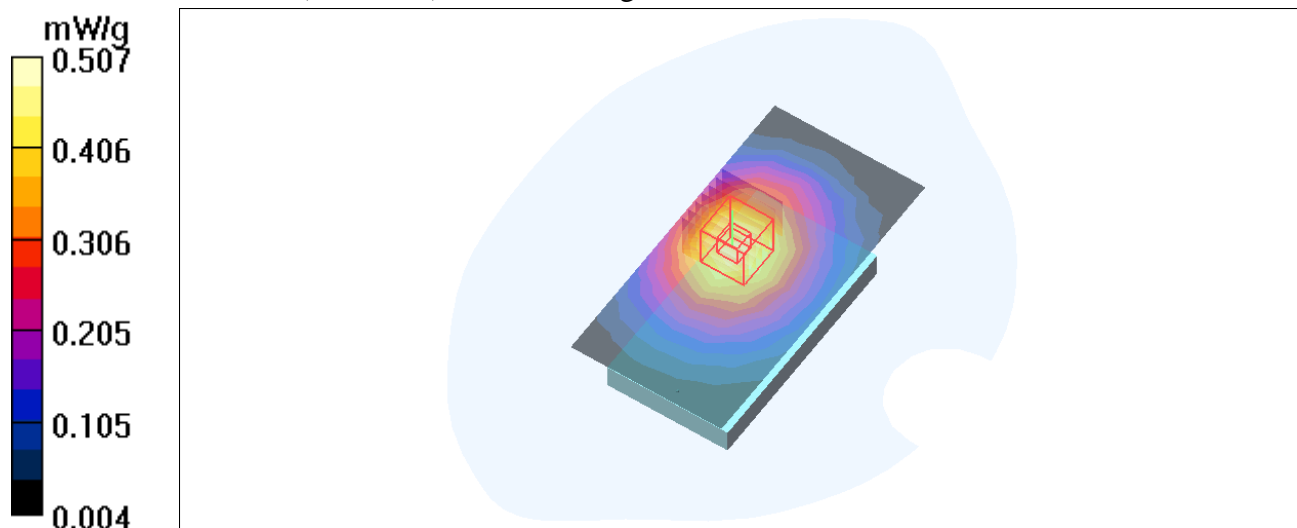

Test Laboratory: Bureau Veritas ADT

M25-Body Front - GPRS TS2 850-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 53.85$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.664 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 24.7 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = **0.613 mW/g**; SAR(10 g) = **0.482 mW/g**

Maximum value of SAR (measured) = 0.665 mW/g

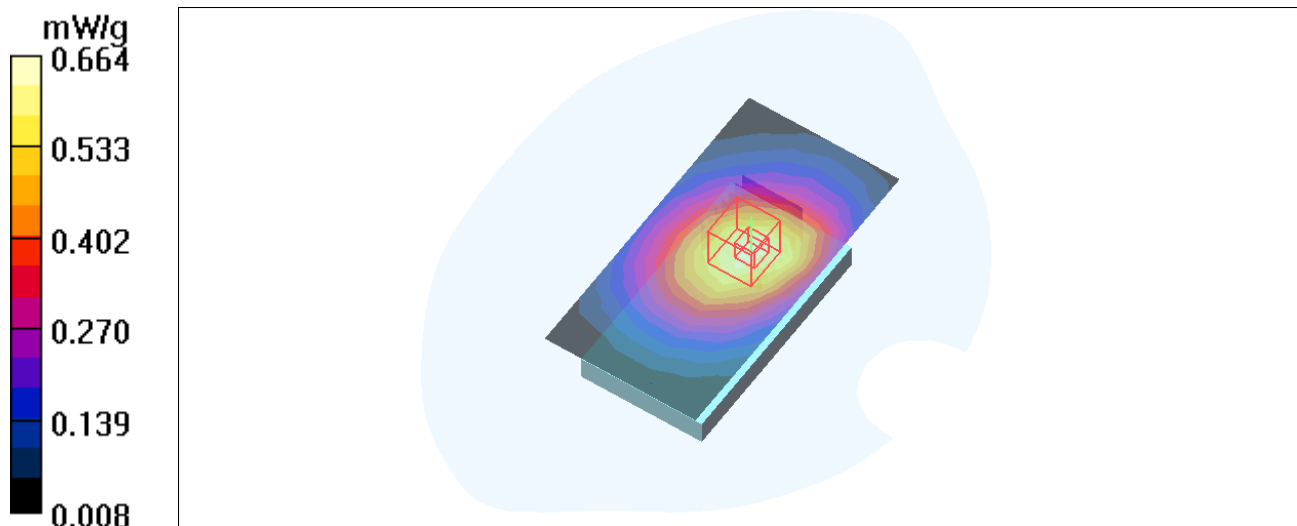

Test Laboratory: Bureau Veritas ADT

M26-Body Bottom - GPRS TS2 850-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 53.85$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.815 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.2 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.980 W/kg

SAR(1 g) = **0.777** mW/g; SAR(10 g) = **0.601** mW/g

Maximum value of SAR (measured) = 0.857 mW/g

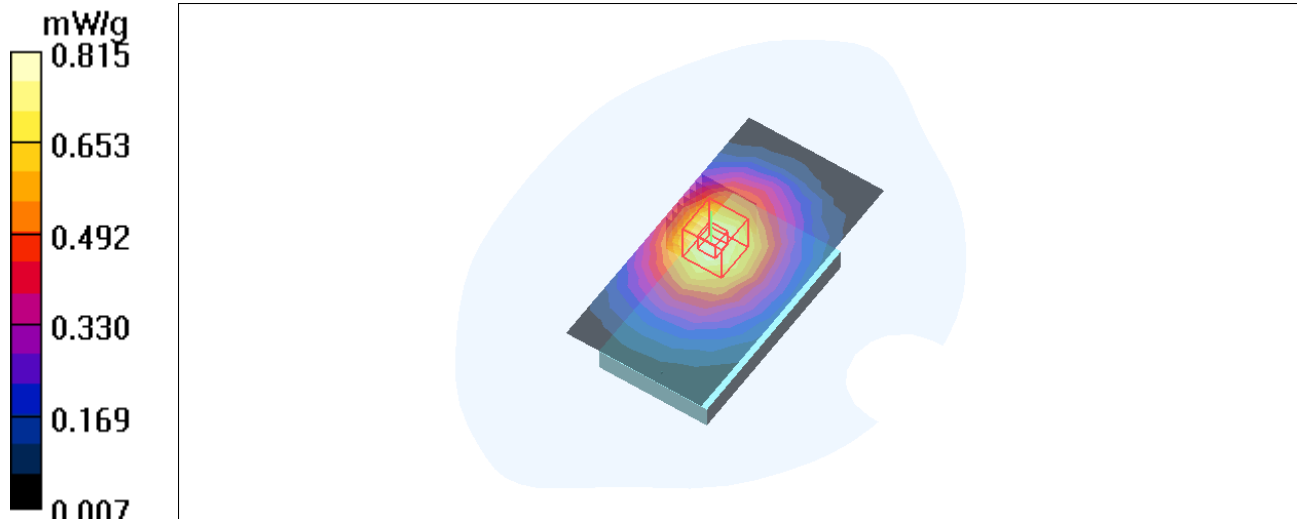

Test Laboratory: Bureau Veritas ADT

M27-Body Front - GSM 1900-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.261 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.81 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.294 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.81 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

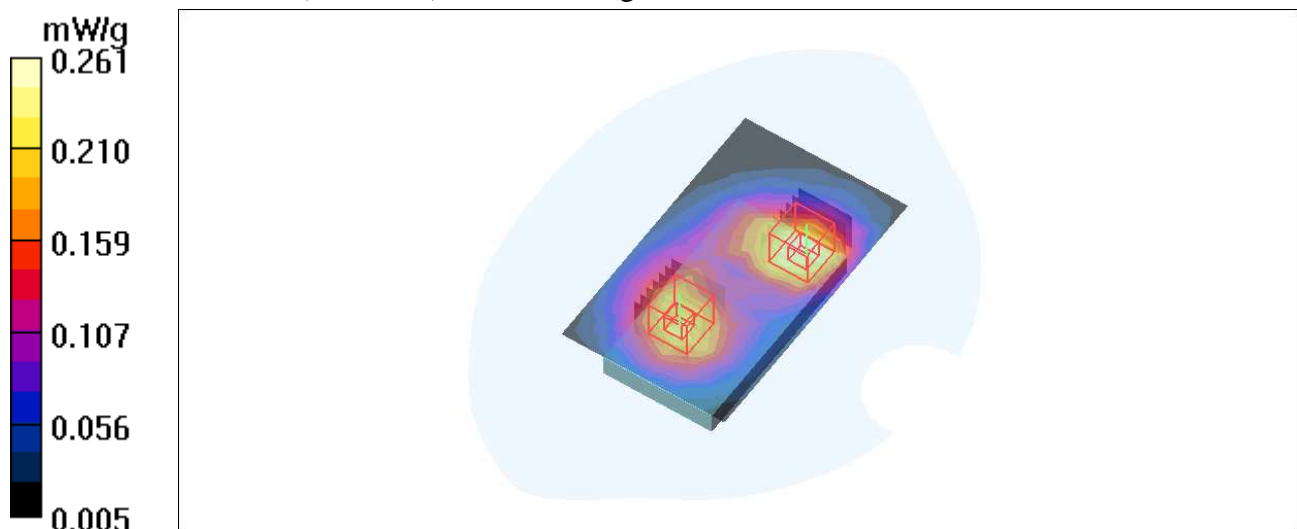

Test Laboratory: Bureau Veritas ADT

M28-Body bottom - GSM 1900-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.315 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.70 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = **0.302 mW/g**; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

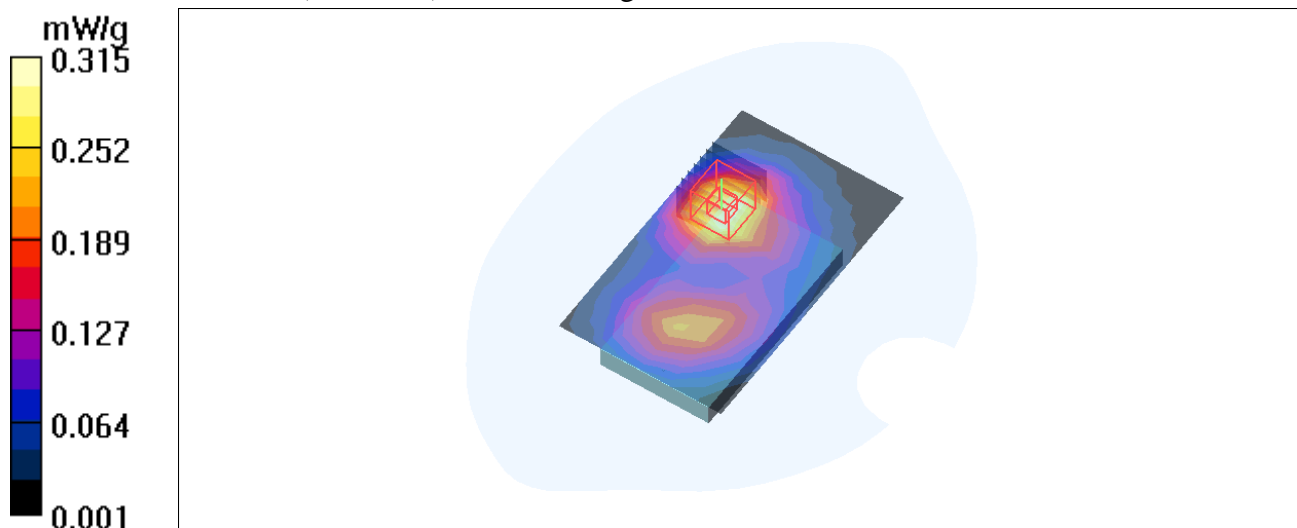

Test Laboratory: Bureau Veritas ADT

M29-Body Front- GPRS 1900-TS1-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.245 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.62 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.280 mW/g



Mid Channel 661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 7.62 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.220 mW/g

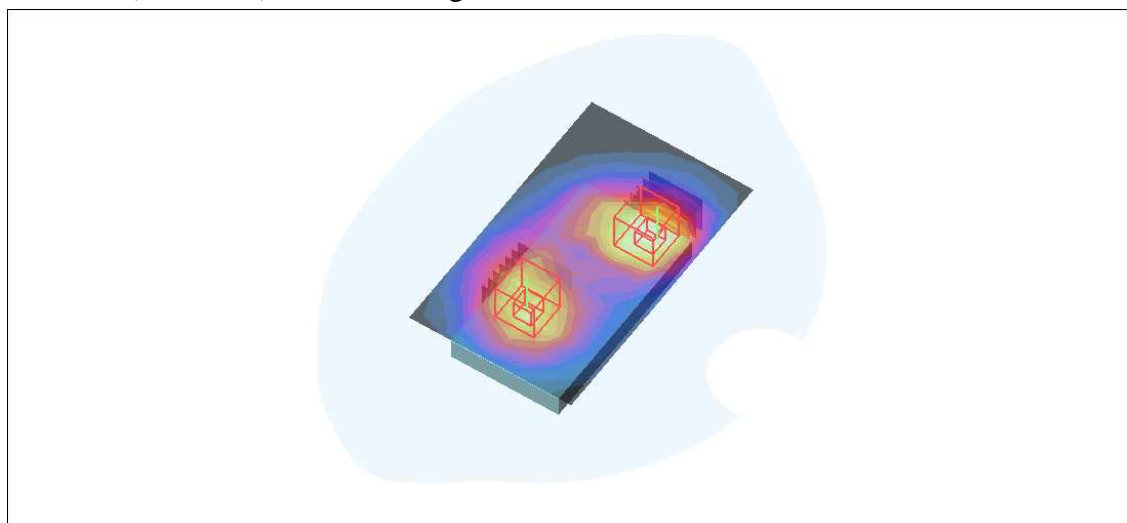

Test Laboratory: Bureau Veritas ADT

M30-Body bottom - GPRS 1900-TS1-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.59 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.346 mW/g

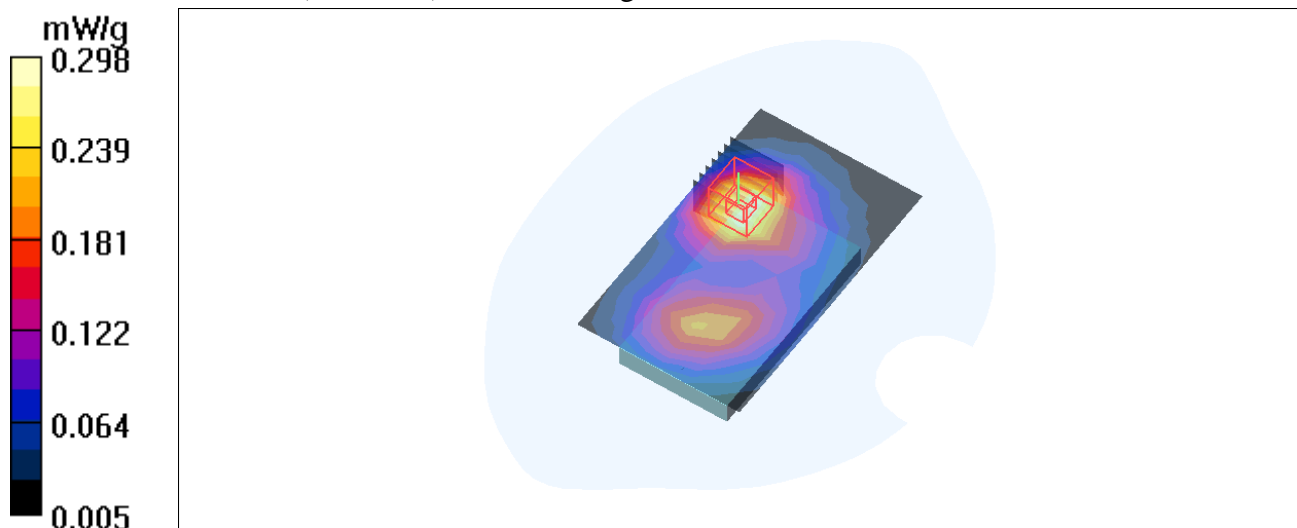

Test Laboratory: Bureau Veritas ADT

M31-Body Front- GPRS 1900-TS2-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.397 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 9.48 V/m; Power Drift = 0.135 dB

Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.449 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 9.48 V/m; Power Drift = 0.135 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

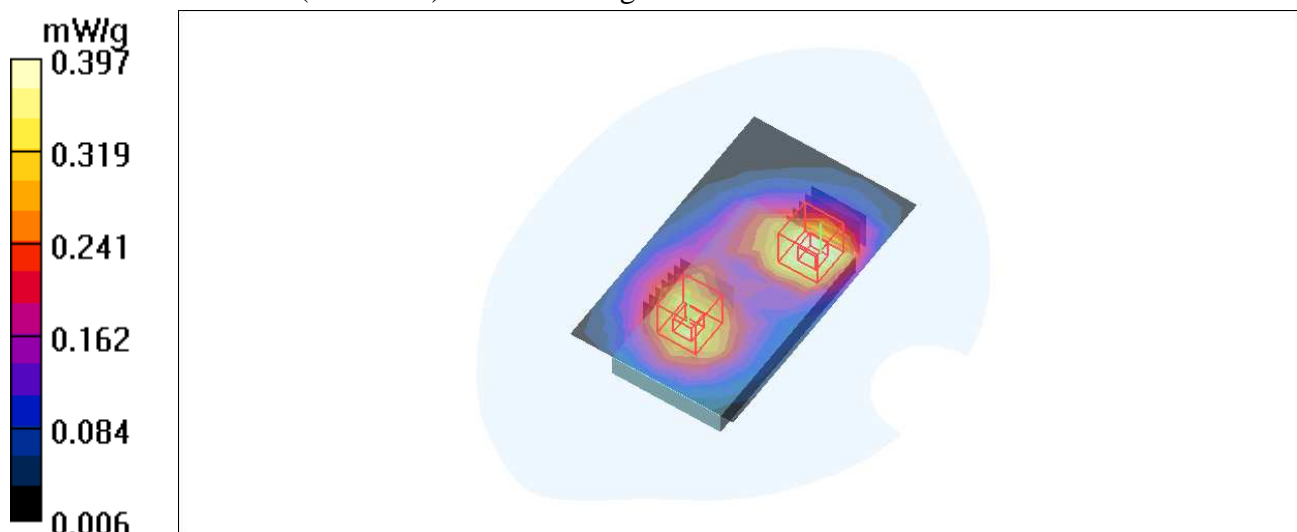

Test Laboratory: Bureau Veritas ADT

M32-Body bottom - GPRS 1900-TS2-Sim1 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.479 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.58 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.557 mW/g

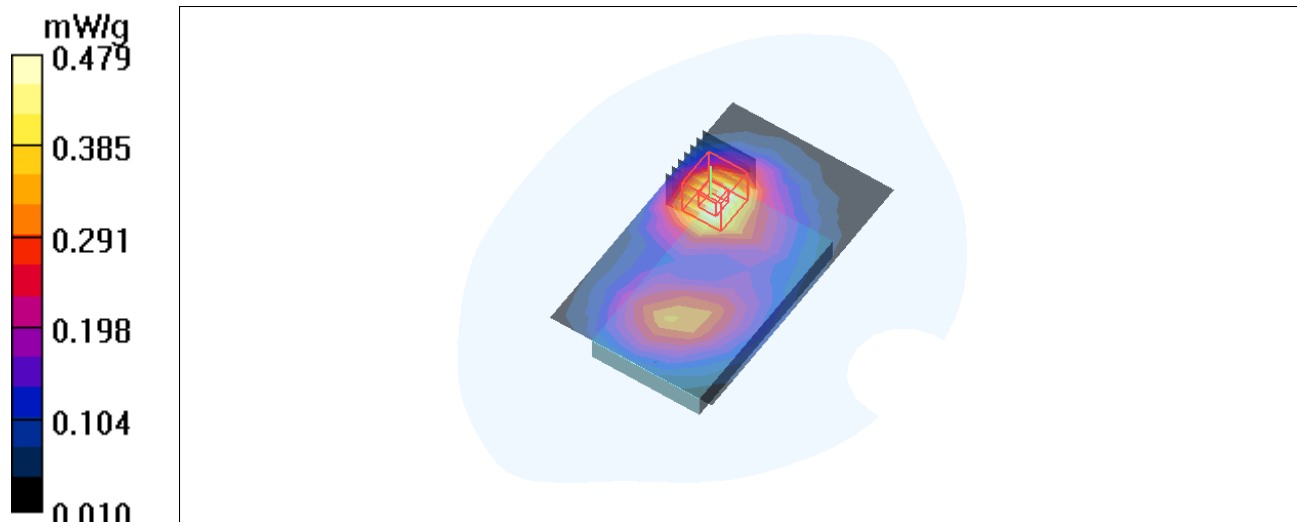

Test Laboratory: Bureau Veritas ADT

M33-Right Head Cheek- GSM 850-Sim2

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.646 mW/g


Mid Channel 190 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.05 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = **0.650** mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.682 mW/g

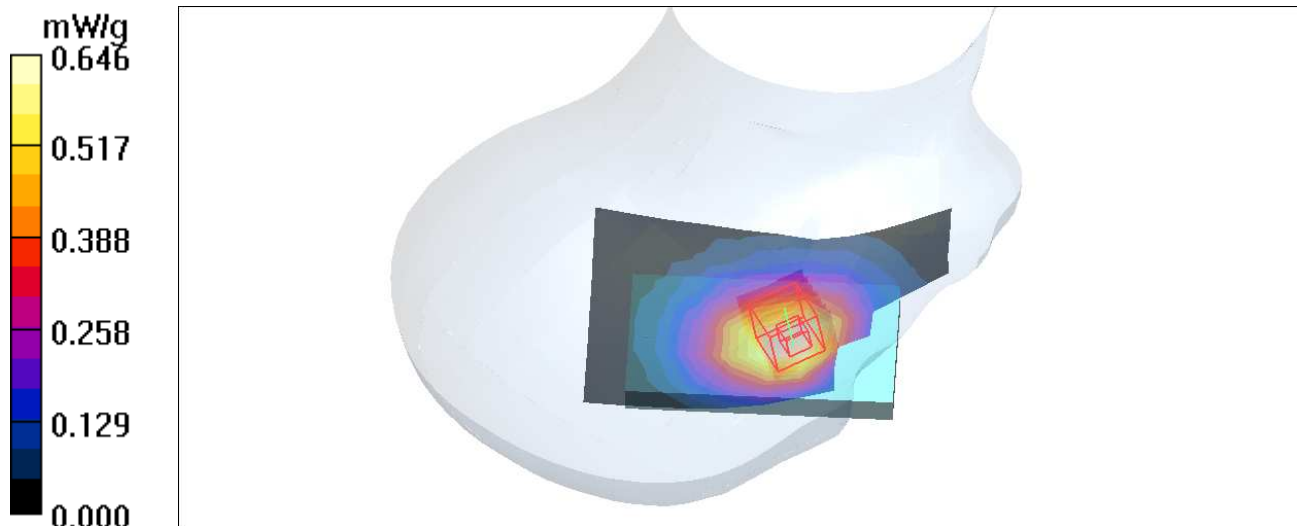

Test Laboratory: Bureau Veritas ADT

M34-Left Head Cheek- GSM 1900-Sim2

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.792 mW/g


Mid Channel 661 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.81 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = **0.775** mW/g; SAR(10 g) = **0.443** mW/g

Maximum value of SAR (measured) = 0.927 mW/g

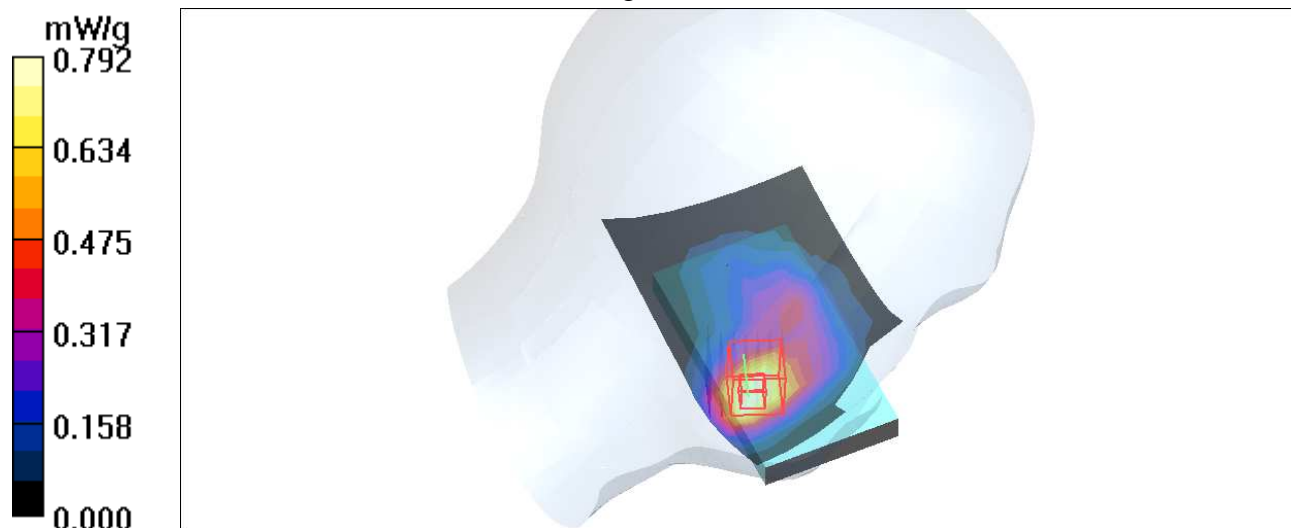

Test Laboratory: Bureau Veritas ADT

M35-Body Bottom - GPRS TS2 850-Sim2 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.811 mW/g



Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.2 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = **0.773** mW/g; SAR(10 g) = **0.597** mW/g

Maximum value of SAR (measured) = 0.852 mW/g

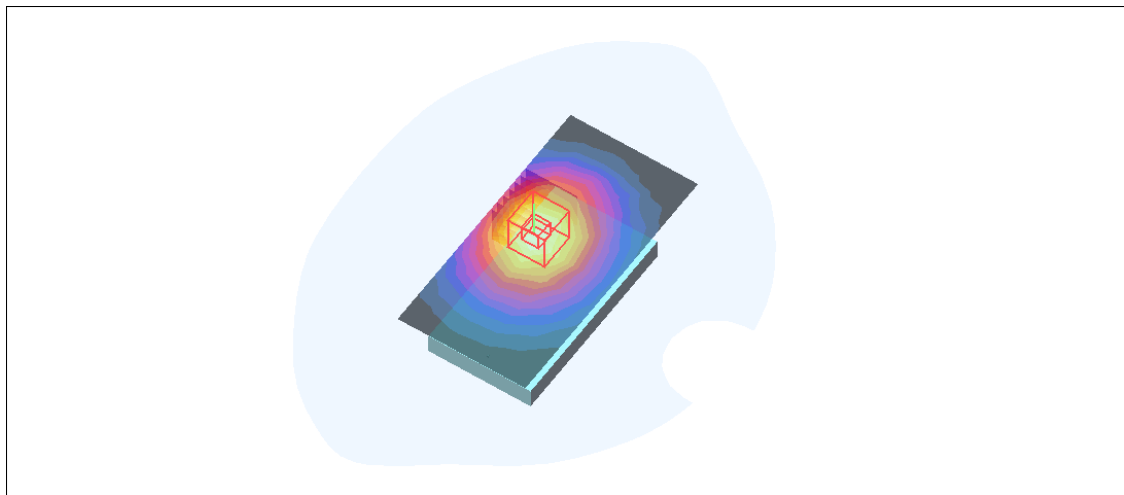

Test Laboratory: Bureau Veritas ADT

M36-Body bottom - GPRS 1900-TS2-Sim2 With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.472 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 9.58 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.549 mW/g

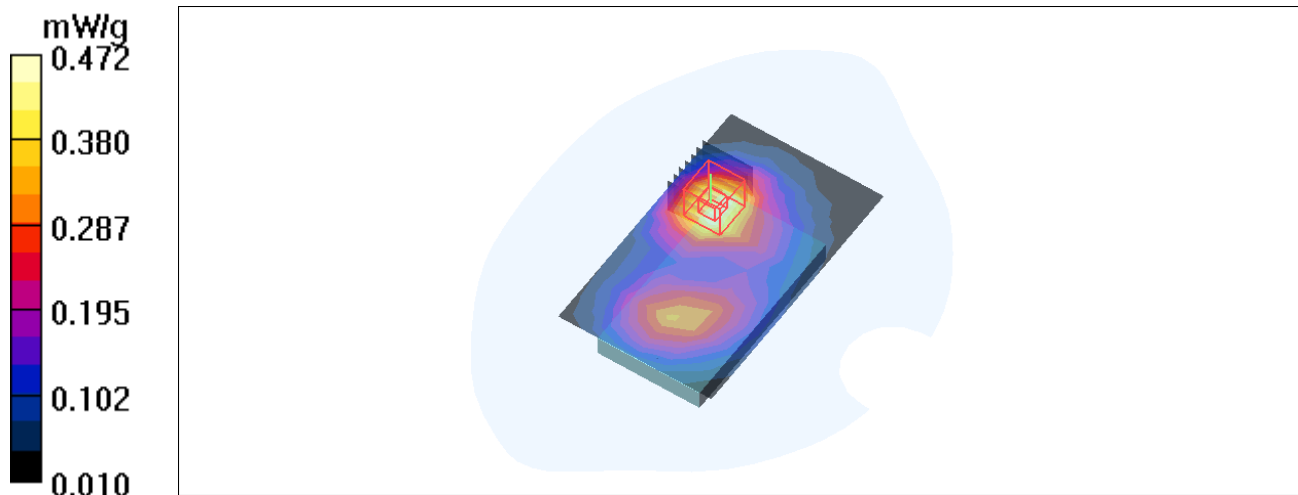

Test Laboratory: Bureau Veritas ADT

M37-Body Bottom - GPRS TS2 850- TS2-Sim2 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL835 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 53.85$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.793 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 27.2 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.583 mW/g

Maximum value of SAR (measured) = 0.833 mW/g

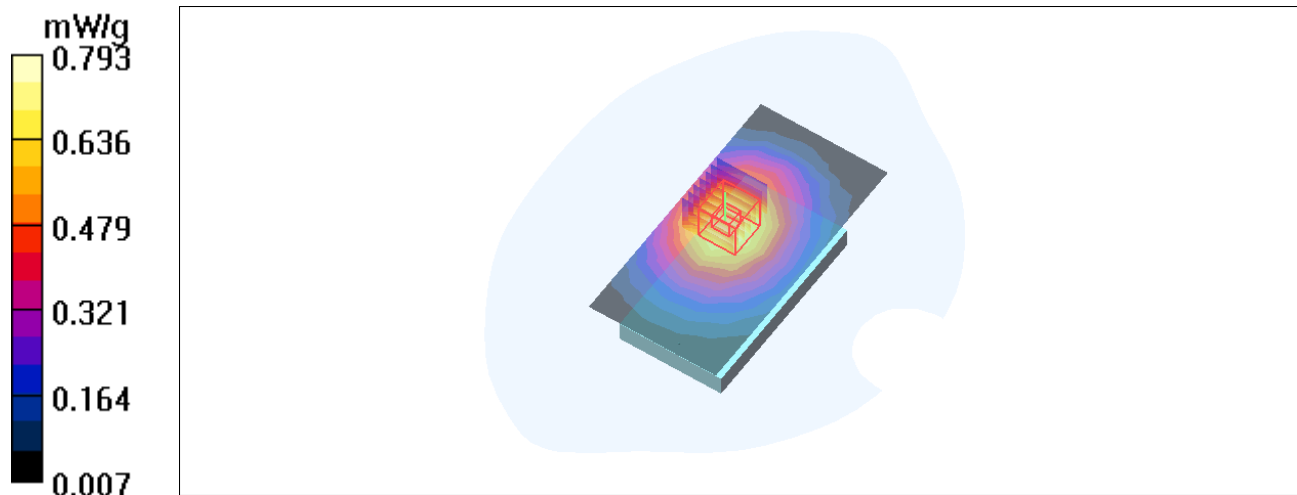

Test Laboratory: Bureau Veritas ADT

M38-Body bottom - GPRS 1900-TS2-Sim2 With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX115


Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.469 mW/g

Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
 Reference Value = 9.58 V/m; Power Drift = -0.105 dB
 Peak SAR (extrapolated) = 0.759 W/kg
SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.258 mW/g
 Maximum value of SAR (measured) = 0.545 mW/g

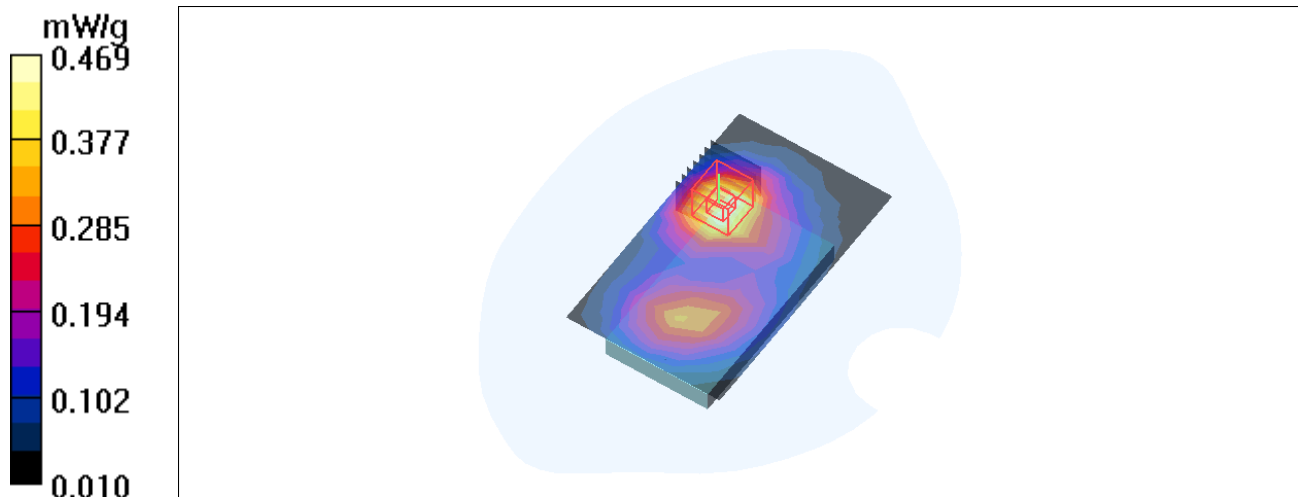

Test Laboratory: Bureau Veritas ADT

System Validation Check-HSL 835MHz-7/7

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW /Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.60 mW/g


d=15mm, Pin=250mW /Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.0 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.87 mW/g

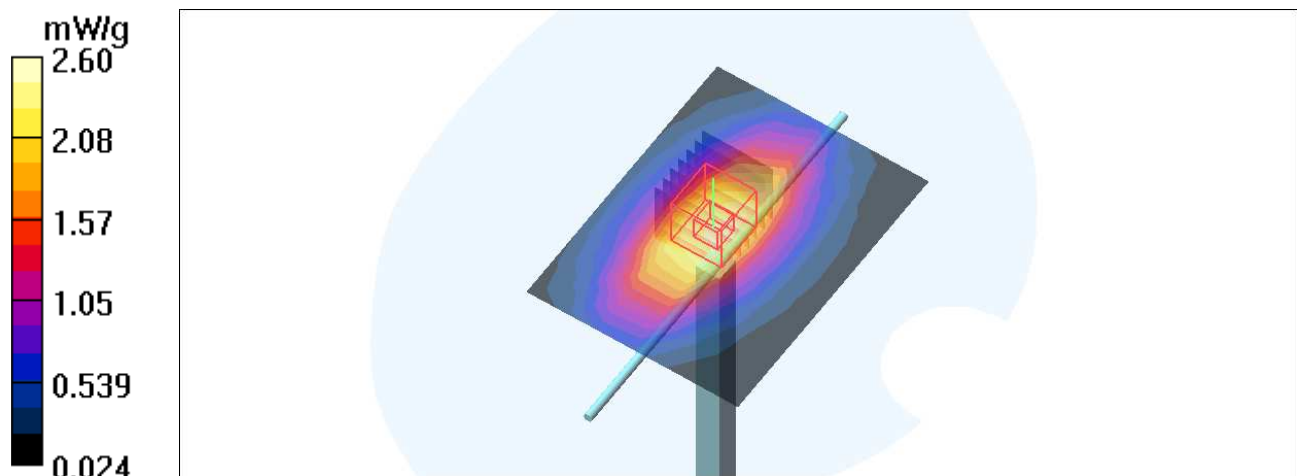

Test Laboratory: Bureau Veritas ADT

System Validation Check-HSL 1900MHz-7/7

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL1900; Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 152 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23.1 degrees ; Liquid temp. : 22.8 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 13.4 mW/g

d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = **10.2 mW/g**; SAR(10 g) = **5.23 mW/g**

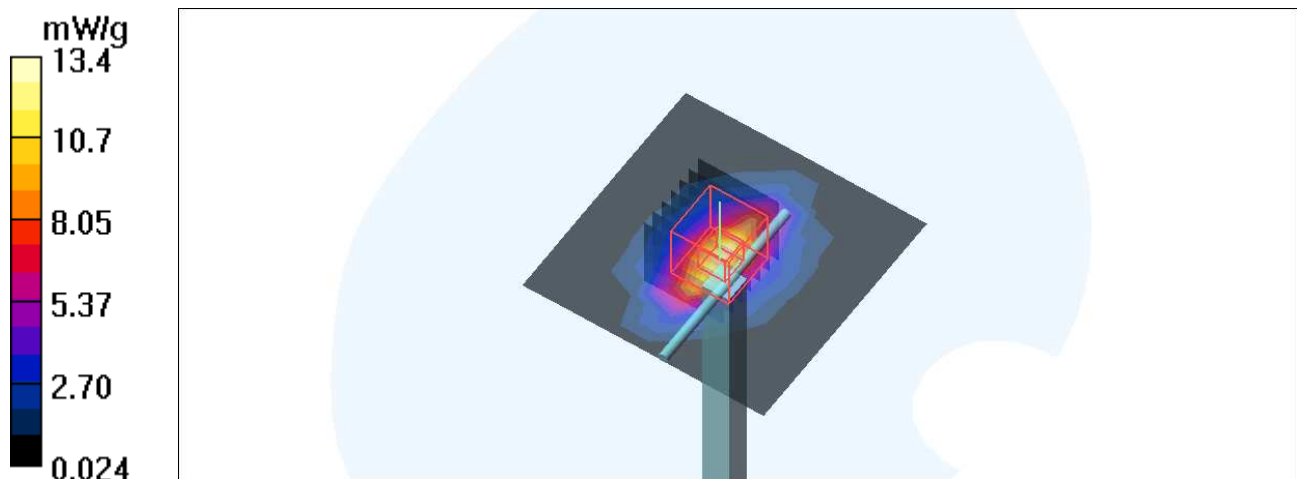

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 835MHz-7/8

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 53.89$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22

- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.64 mW/g


d=15mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.1 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 2.64 mW/g; SAR(10 g) = 1.73 mW/g

Maximum value of SAR (measured) = 3.07 mW/g

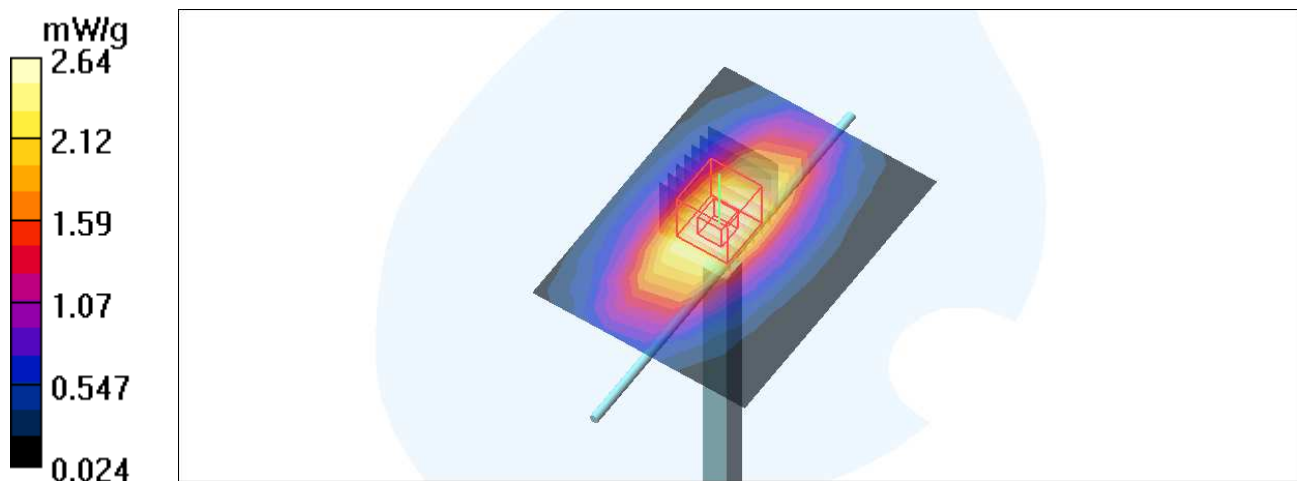

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 1900MHz-7/9

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23.1 degrees ; Liquid temp. : 22.8 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 13.6 mW/g


d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.2 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.3 mW/g

Maximum value of SAR (measured) = 13.8 mW/g

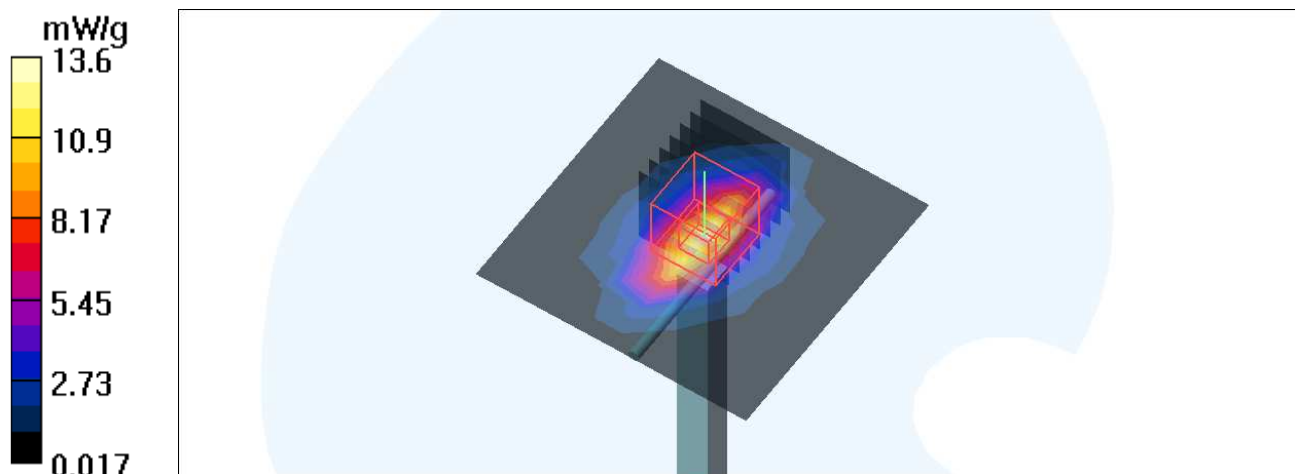

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 835MHz-7/10

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 53.87$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 152 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23.1 degrees ; Liquid temp. : 22.8 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.53 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.3 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.87 mW/g

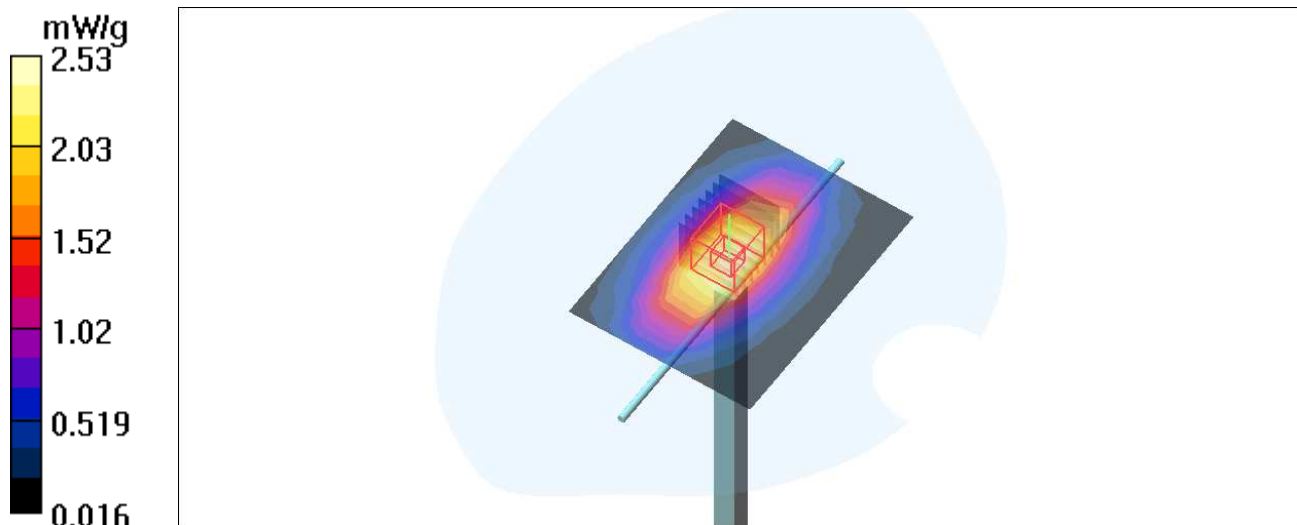

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 1900MHz-7/11

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 13.6 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 19.8 W/kg


SAR(1 g) = **10.5 mW/g**; SAR(10 g) = 5.37 mW/g

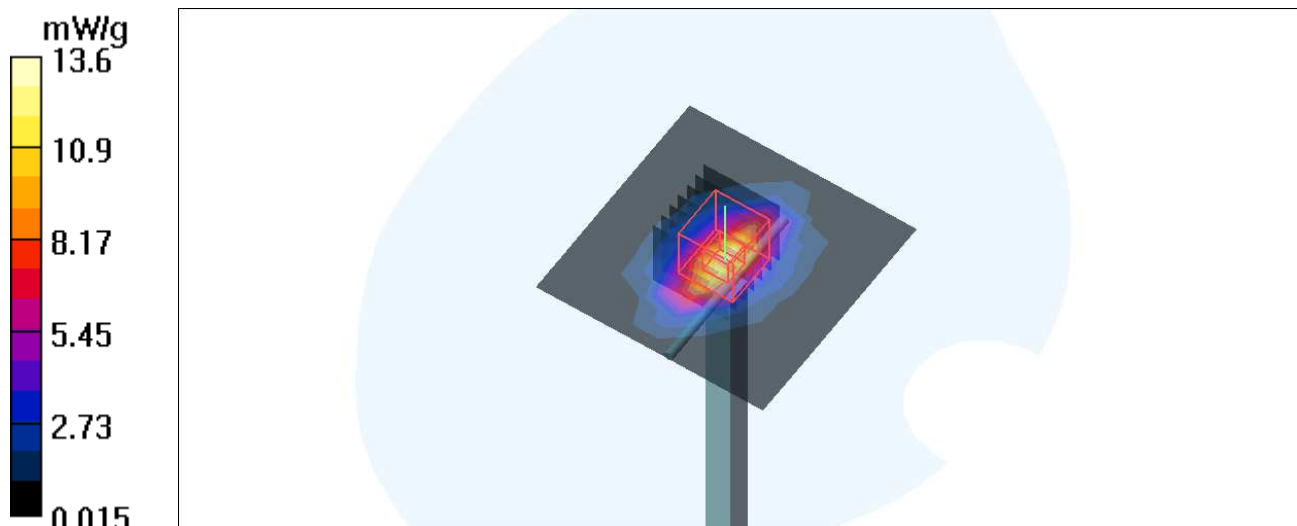

APPENDIX A: TEST DATA

Liquid Level Photo


HSL 835MHz D=151mm-7/7

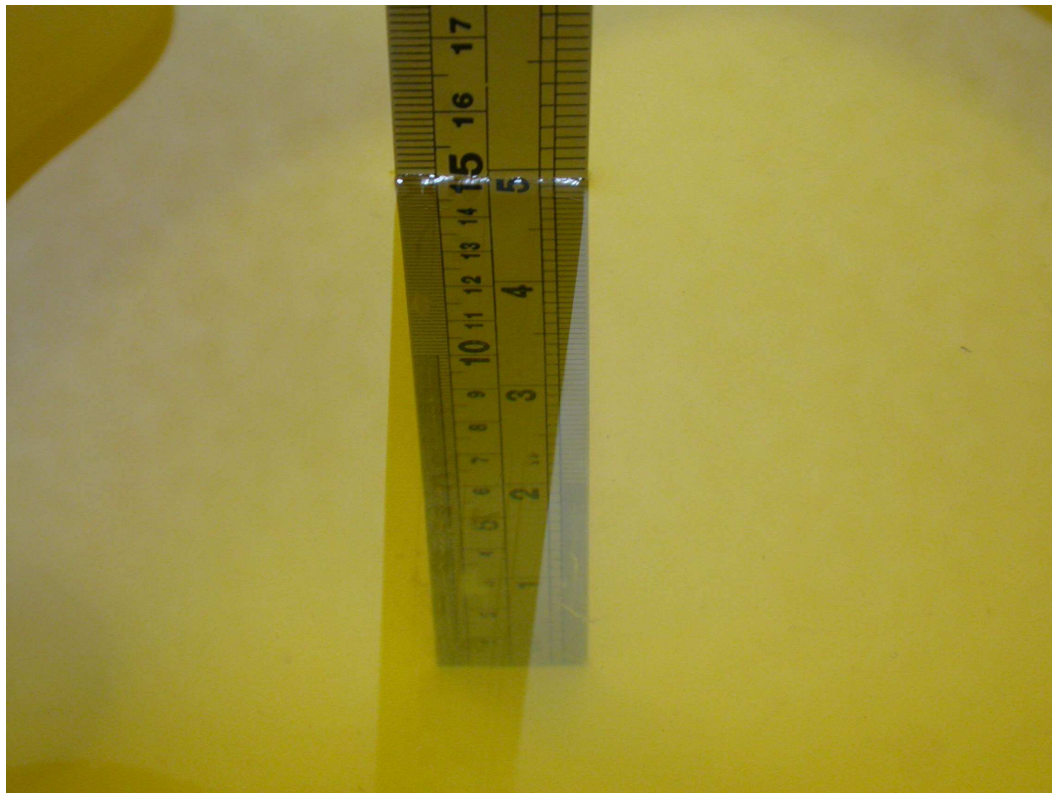

HSL 1900MHz D=152mm-7/7




MSL 835MHz D=151mm-7/8

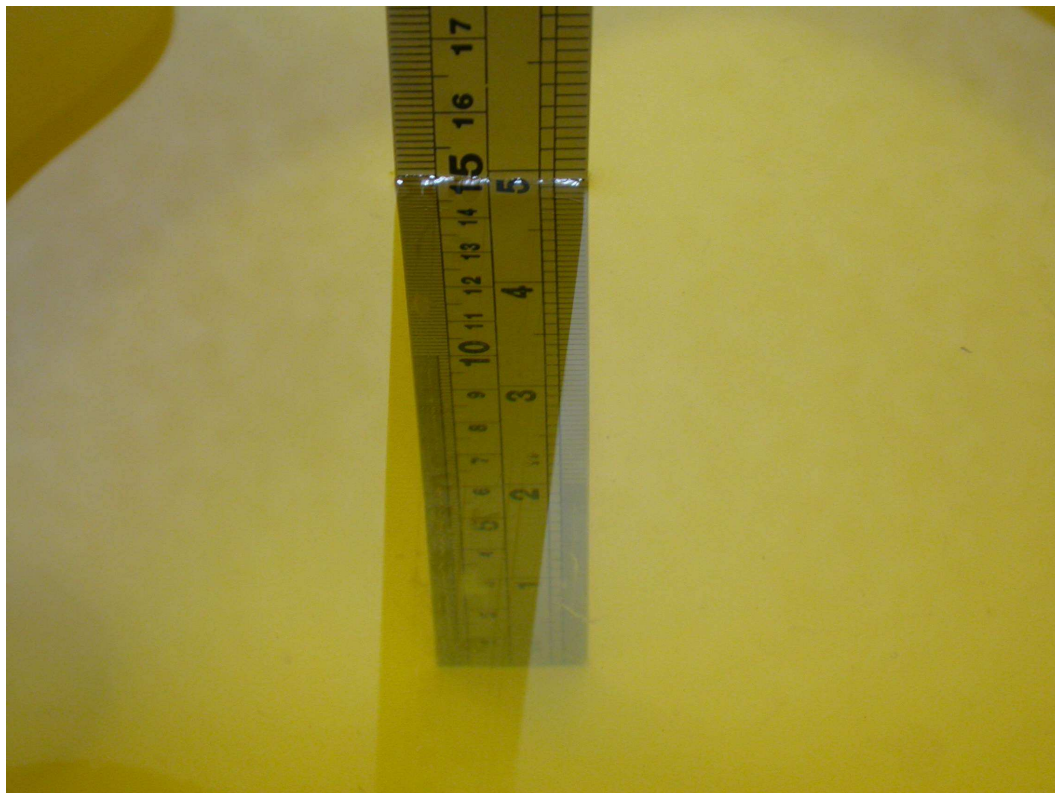

MSL 1900MHz D=150mm-7/9



MSL 835MHz D=152mm-7/10

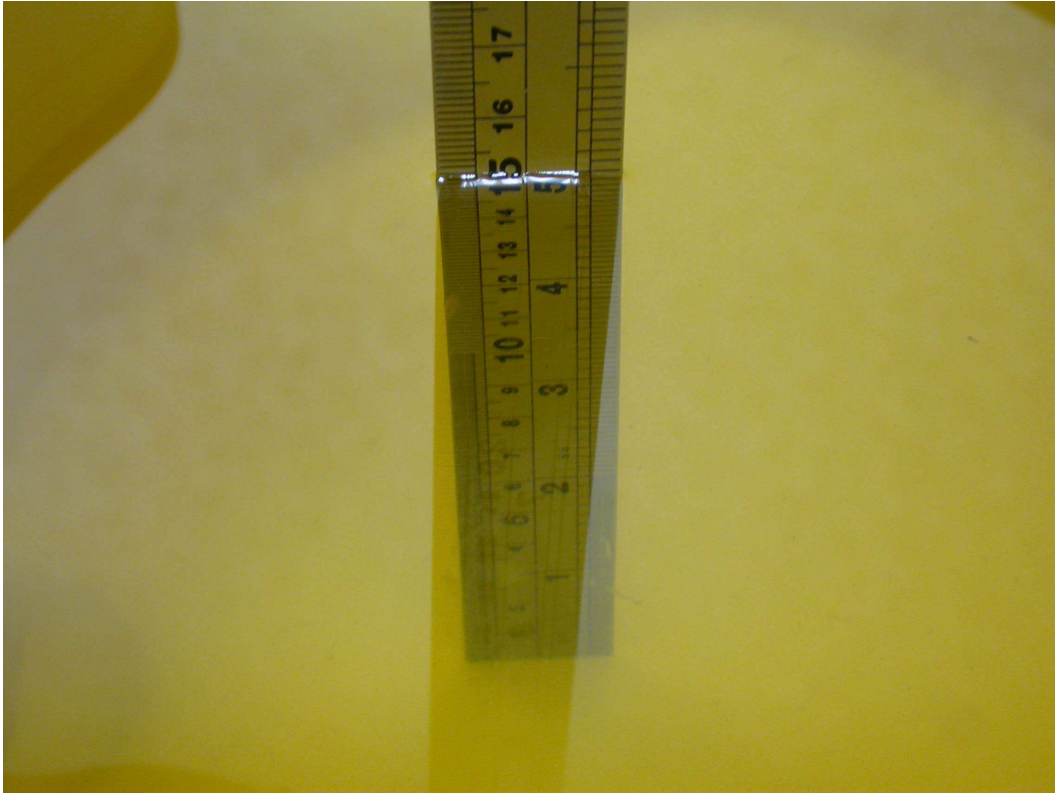

MSL 1900MHz D=151mm-7/11



Test Laboratory: Bureau Veritas ADT

M01-Right Head Cheek- GSM 850

DUT: GSM/EGPRS Mobile Phone ; Type: EX112

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:8.3

Medium: HSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.646 mW/g


Mid Channel 190 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.05 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = **0.650** mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.682 mW/g

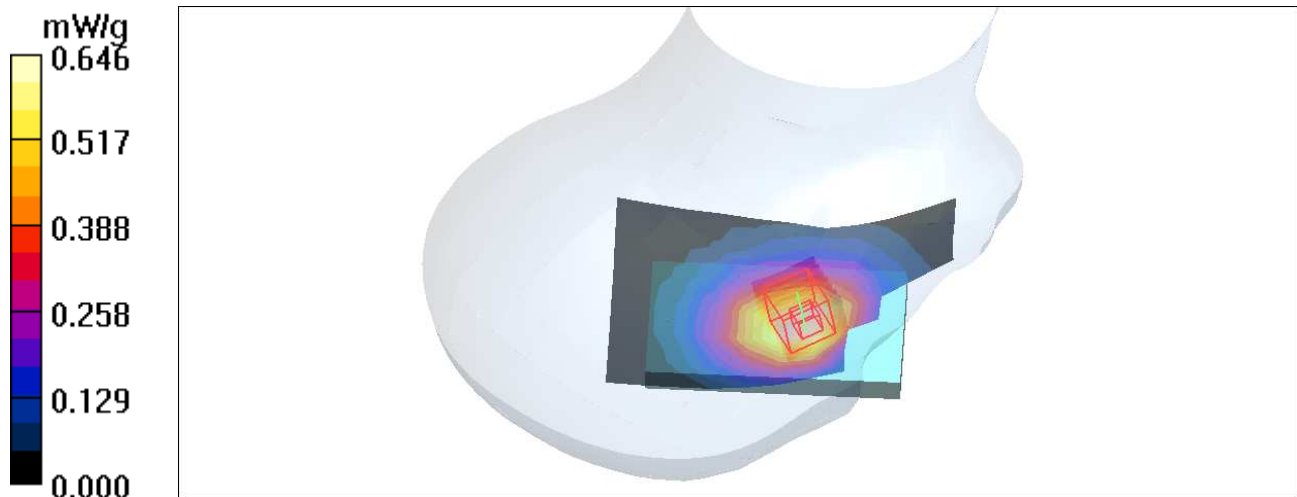

Test Laboratory: Bureau Veritas ADT

M02-Left Head Cheek- GSM 1900

DUT: GSM/EGPRS Mobile Phone ; Type: EX112

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 Cheek/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.804 mW/g



Mid Channel 661 Cheek/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 9.81 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = **0.787** mW/g; SAR(10 g) = **0.449** mW/g

Maximum value of SAR (measured) = 0.941 mW/g

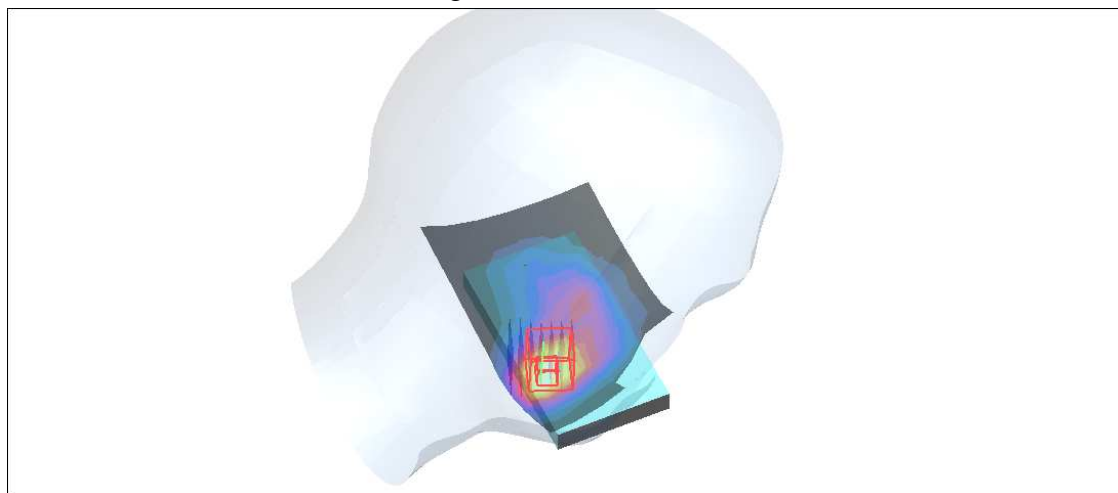

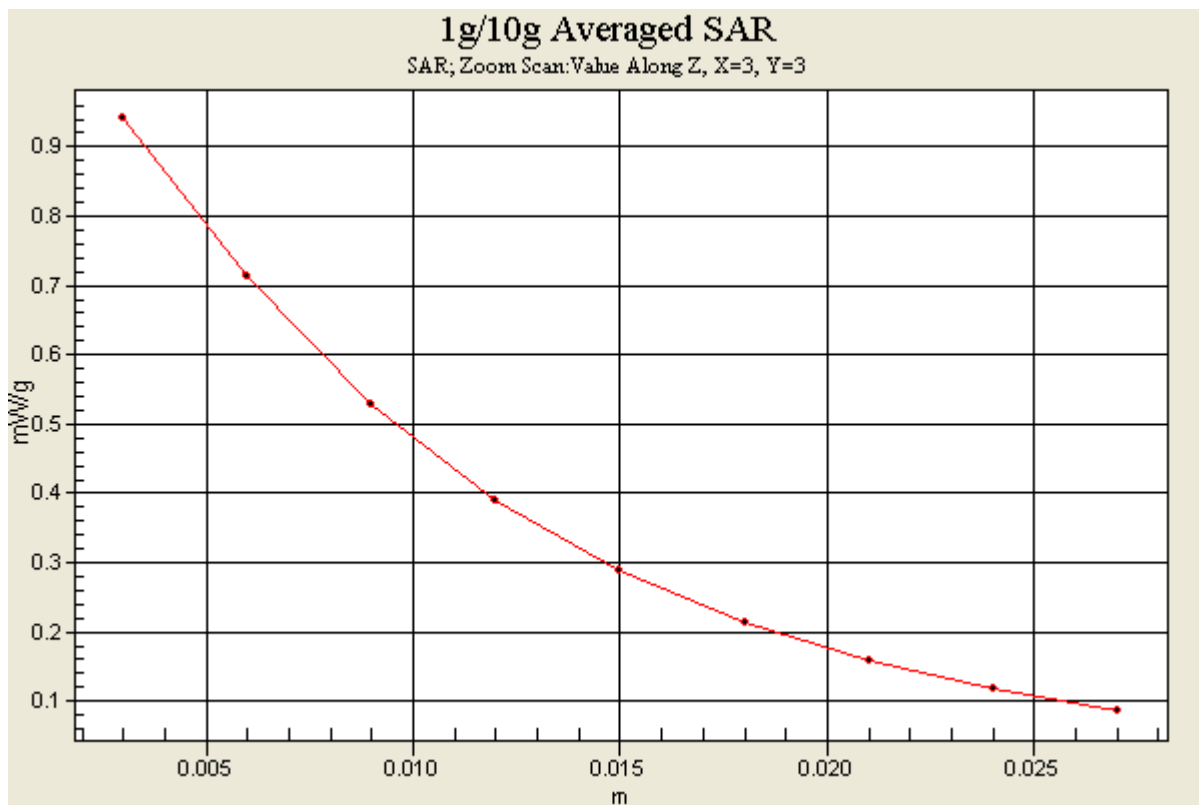

Test Laboratory: Bureau Veritas ADT

M03-Body Bottom - GPRS TS2 850- With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX112

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.824 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.2 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.991 W/kg

SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.606 mW/g

Maximum value of SAR (measured) = 0.866 mW/g

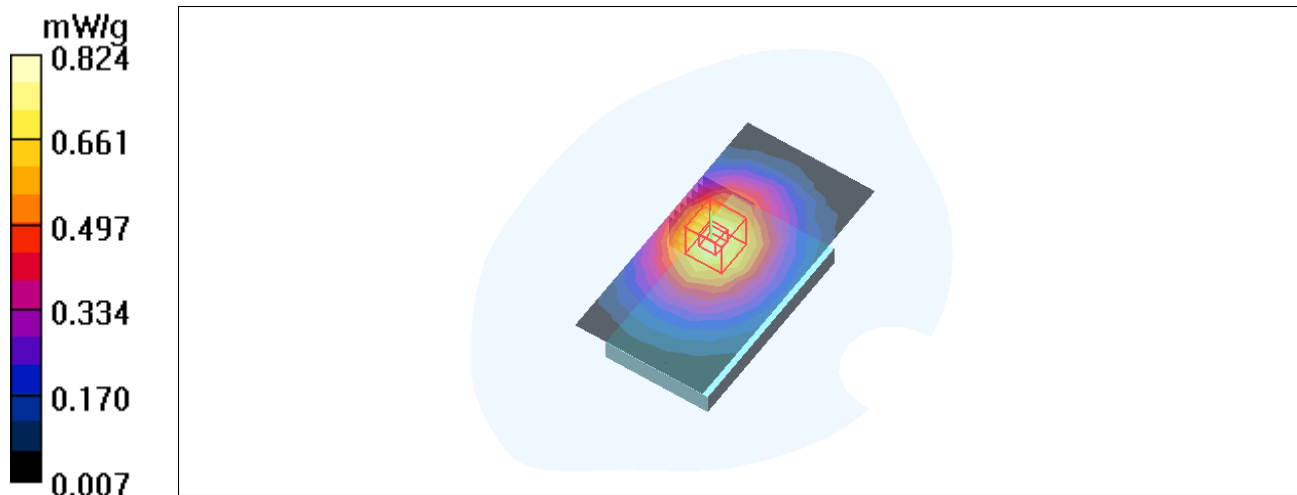

Test Laboratory: Bureau Veritas ADT

M04-Body bottom - GPRS 1900-TS2- With Headset : SYN2356A

DUT: GSM/EGPRS Mobile Phone ; Type: EX112

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.480 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.58 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = **0.460 mW/g**; SAR(10 g) = **0.264 mW/g**

Maximum value of SAR (measured) = 0.558 mW/g

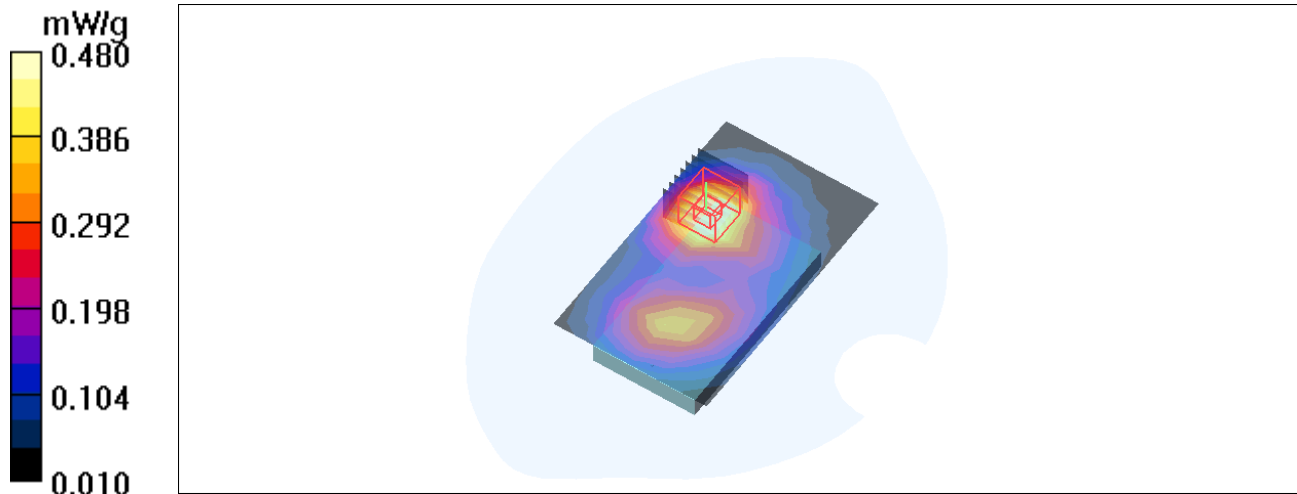

Test Laboratory: Bureau Veritas ADT

M05-Body Bottom - GPRS TS2 850- With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX112

Communication System: GSM 850 ; Frequency: 836.6 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
Medium: MSL835 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 53.85$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 190/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.793 mW/g


Mid Channel 190/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.2 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = **0.756** mW/g; SAR(10 g) = **0.583** mW/g

Maximum value of SAR (measured) = 0.833 mW/g

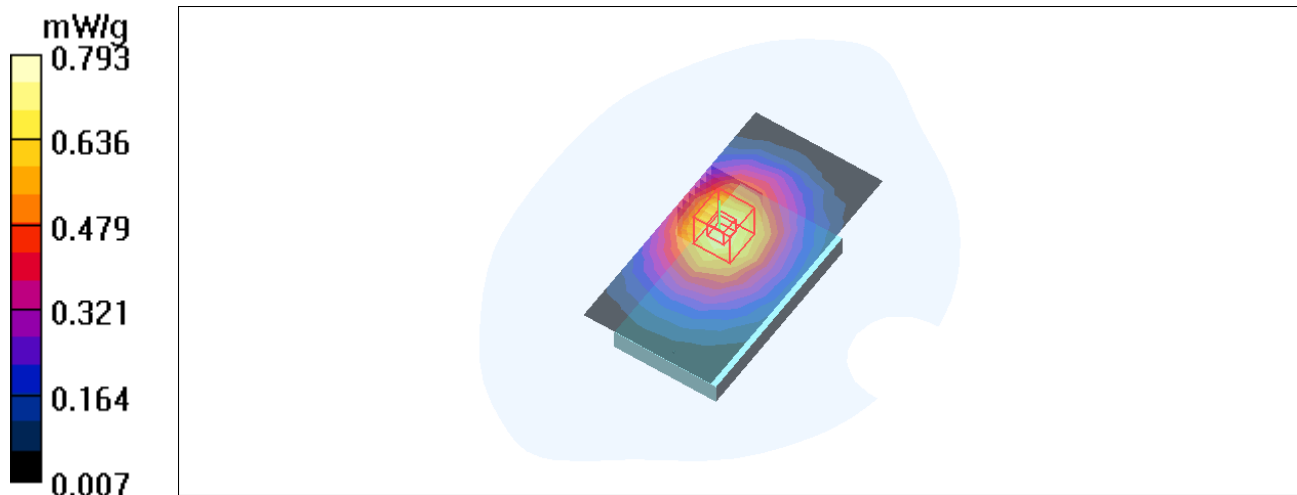

Test Laboratory: Bureau Veritas ADT

M06-Body bottom - GPRS 1900-TS2- With Headset : SJYN0394A

DUT: GSM/EGPRS Mobile Phone ; Type: EX112

Communication System: PCS 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:4 ; Modulation type: GMSK
 Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.475 mW/g


Mid Channel 661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.58 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = **0.455 mW/g**; SAR(10 g) = **0.262 mW/g**

Maximum value of SAR (measured) = 0.553 mW/g

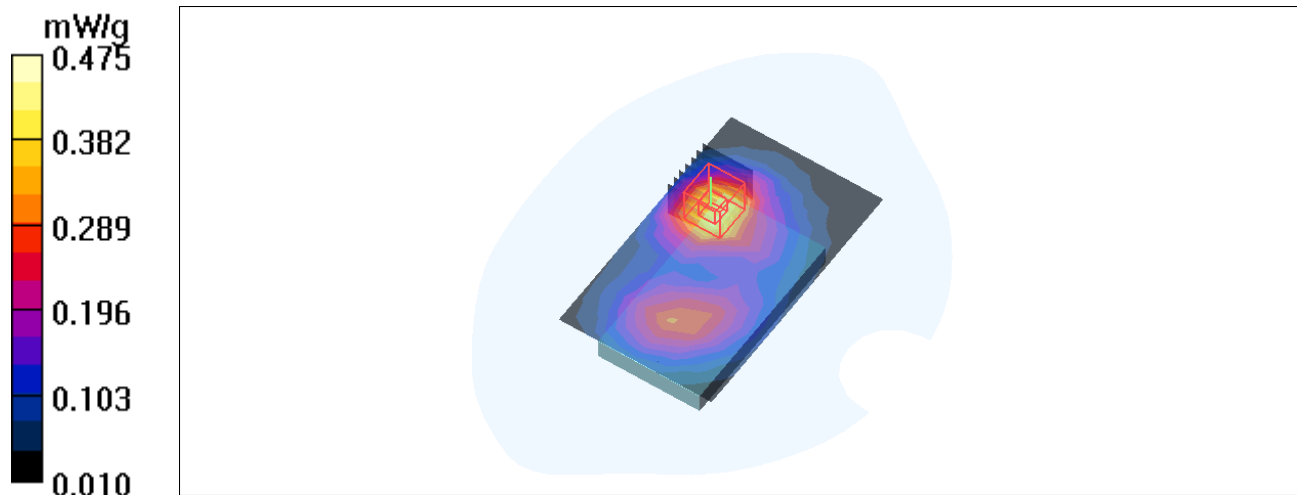

Test Laboratory: Bureau Veritas ADT

System Validation Check-HSL 835MHz-7/7

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.25, 10.25, 10.25) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW /Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.60 mW/g


d=15mm, Pin=250mW /Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.0 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.87 mW/g

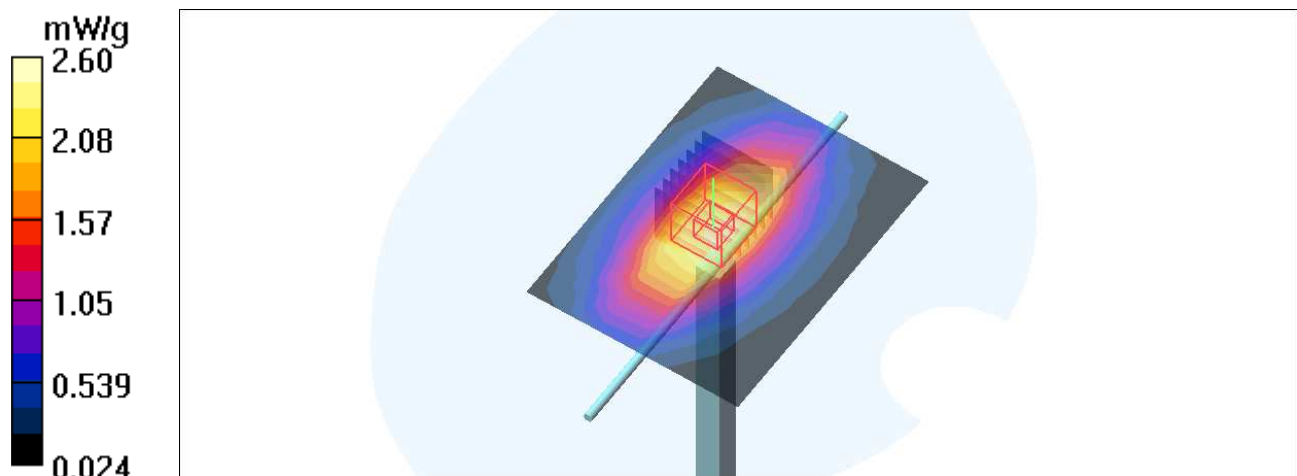

Test Laboratory: Bureau Veritas ADT

System Validation Check-HSL 1900MHz-7/7

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³ ;

Liquid level : 152 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23.1 degrees ; Liquid temp. : 22.8 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.33, 8.33, 8.33) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 13.4 mW/g

d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 20.5 W/kg

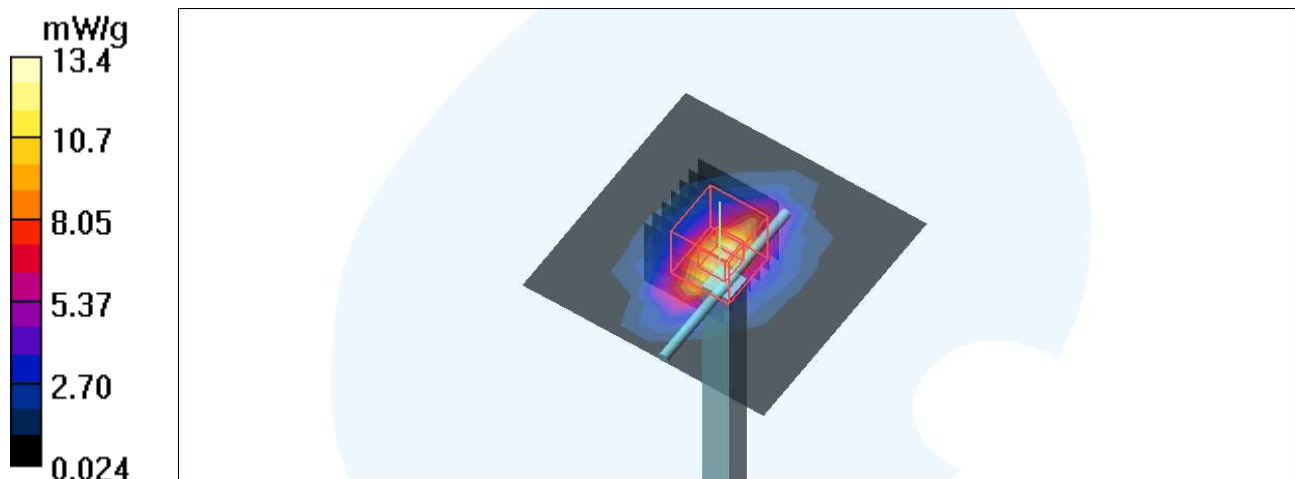SAR(1 g) = **10.2 mW/g**; SAR(10 g) = **5.23 mW/g**

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 835MHz-7/8

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 53.89$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22

- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.64 mW/g


d=15mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.1 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 2.64 mW/g; SAR(10 g) = 1.73 mW/g

Maximum value of SAR (measured) = 3.07 mW/g

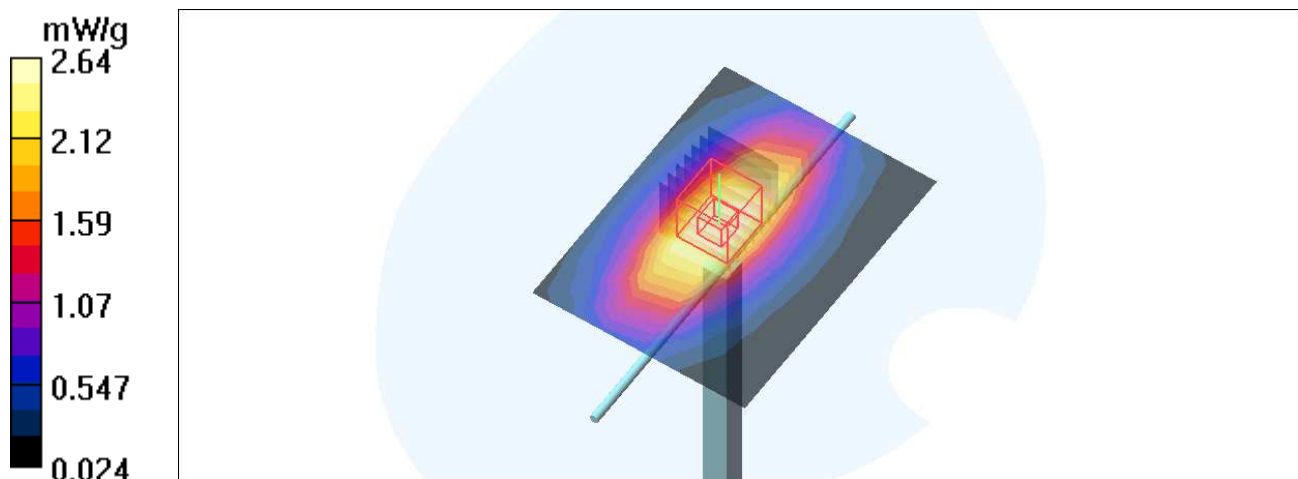

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 1900MHz-7/9

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23.1 degrees ; Liquid temp. : 22.8 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861 ; Calibrated: 2010/1/22
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80 ; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 13.6 mW/g


d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.2 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.3 mW/g

Maximum value of SAR (measured) = 13.8 mW/g

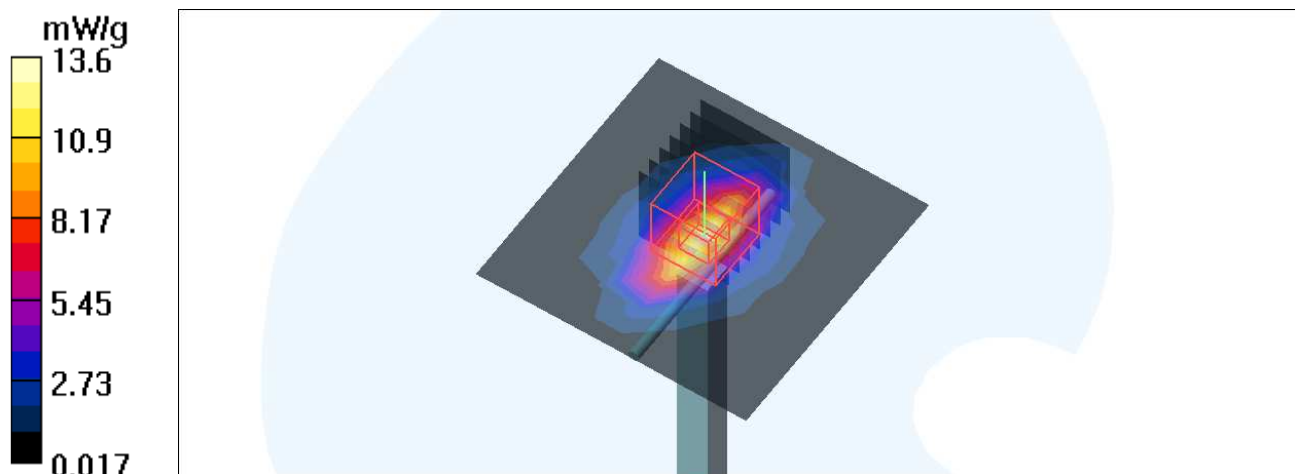

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 835MHz-7/10

DUT: Dipole 850 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 53.87$; $\rho = 1000 \text{ kg/m}^3$;

Liquid level : 152 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)

Air temp. : 23.1 degrees ; Liquid temp. : 22.8 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(10.2, 10.2, 10.2) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.53 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.3 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.87 mW/g

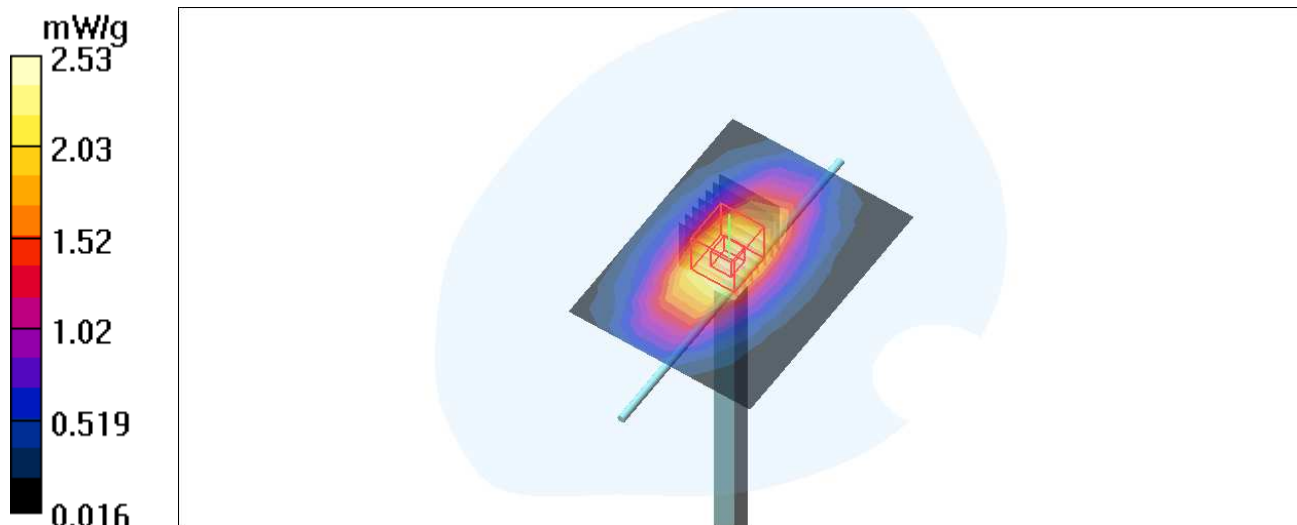

Test Laboratory: Bureau Veritas ADT

System Validation Check-MSL 1900MHz-7/11

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.61, 8.61, 8.61) ; Calibrated: 2010/3/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 13.6 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 19.8 W/kg

SAR(1 g) = **10.5 mW/g**; SAR(10 g) = 5.37 mW/g

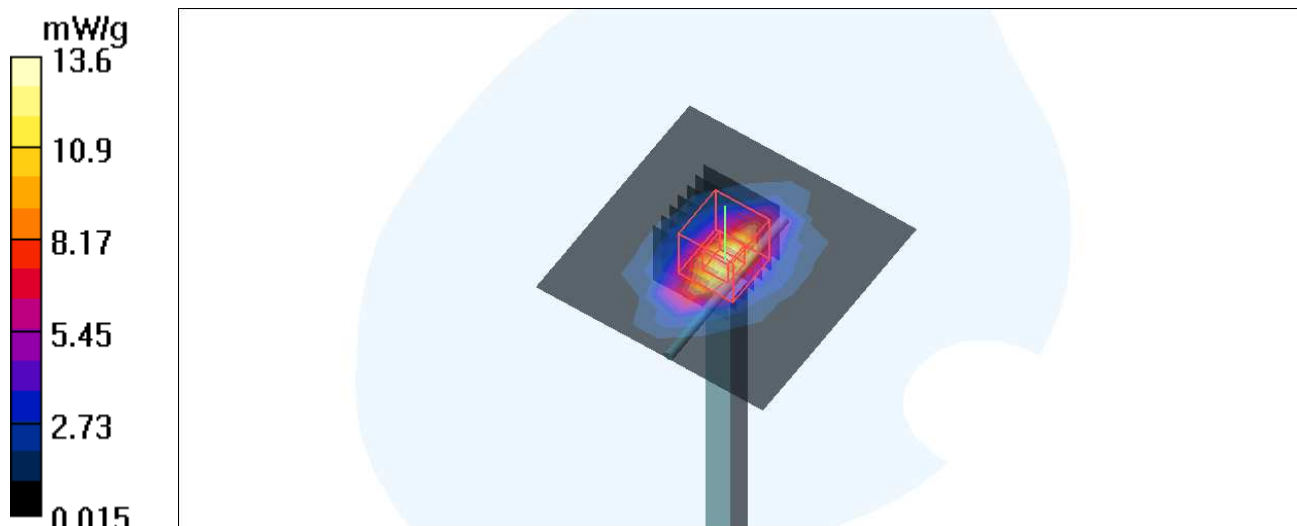

APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM



APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION

