



## PRODUCT SAFETY AND COMPLIANCE EMC LABORATORY

### EMC TEST REPORT - Addendum

**Test Report Number** – 24126-1 BT

**Report Date** – 2010-10-08

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2010-08-01 to 2010-09-03

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2010-10-08

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885

IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ  
ISO/IEC-17025:2005 accredited by UKAS



2404

Table of Contents

Test Report Details ..... 3  
Applicable Standards ..... 4  
Summary of Testing..... 5  
General and Special Conditions..... 5  
Equipment and Cable Configurations..... 6  
Measuring Equipment and Calibration Information ..... 6  
Description of Bluetooth (BT) Transmitter ..... 7  
Measurement Procedures and Data..... 8  
    FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 8  
        Measurement Procedure..... 8  
        Measurement Results ..... 8  
    BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS..... 12  
        Measurement Procedure..... 12  
        Measurement Results ..... 12

## **Test Report Details**

Tests Performed By: Motorola (Beijing) Mobility Technologies Co.,  
Ltd.  
Asia Global Compliance Labs  
No.1 Wang Jing East Road  
Chao Yang District  
Beijing, 100102, P. R. China  
Phone: +86 10 8473 2610  
FCC Registration Number: 177885  
IC Registration Number: 109AW-1

Tests Requested By: Motorola Mobility, Inc  
600 North US Hwy 45  
Libertyville, IL 60048  
United States

Product Type: Cell phone with embedded Bluetooth

Signaling Capability: WCDMA 1700, GSM 850/1900, EDGE,  
HSDPA, GPRS, Bluetooth, 802.11b/802.11g

IMEI: 352779040055799

FCC ID: IHDP56LQ1

Project number: 24126-1

Testing Complete Date: 2010-09-08

## Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart C – Intentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 27 - Wireless Communications Service
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: ANSI C63.4-2003, RSS-Gen Issue 2, RSS-210 Issue 7.

The following tests were performed according to the regulations:

- The **spurious radiated emission** requirements of § **15.247(d) of CFR47 Part 15 2006**, specifically” radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Under this project only 30 to 1000 MHz, 1 to 26.5 GHz radiated emissions and radiated band-edge measurements were performed.
- For frequencies below 1 GHz a 100 kHz RBW (6 dB) is used and above 1 GHz a 1 MHz RBW (6 dB) is used.

**Summary of Testing**

| Test | Test Name                                     | Pass/Fail |
|------|---|-----------|
| 1    | Field Strength of Spurious Emissions          | Pass      |
| 2    | Band-edge Compliance of RF Radiated Emissions | Pass      |

| Test | Test Name                                     | Results   |
|------|---|-----------|
| 1    | Field Strength of Spurious Emissions          | See plots |
| 2    | Band-edge Compliance of RF Radiated Emissions | See plots |

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

The test sample was tested using a fully charged model SNN5843A 1390mAh battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 25 ° C ± 1 ° C and relative humidity of 45 % ± 6 % over the dates used for testing.

## Equipment and Cable Configurations

The test sample was tested in a stand-alone configuration that is representative of typical use.

## Measuring Equipment and Calibration Information

Equipment related to the semi-anechoic chamber testing:

| <b>Equipment</b>   | <b>Model/type</b> | <b>Serial number</b> | <b>Operational range</b>                                      | <b>Date of calibration</b> |
|--------------------|-------------------|----------------------|---|----------------------------|
| EMI analyzers      | ESU 40            | 100036               | 20 Hz – 40 GHz  | 05.16.2010                 |
| Pre Amplifiers     | PA-02-0001:       | 2007343              | (10 kHz – 3 GHz)  | 06.26.2010                 |
|                    | PA-02-218         | 2007344              | 3 GHz – 18 GHz  | 06.26.2010                 |
|                    | PA-02-5           | 2007345              | 18 GHz – 40 GHz   | 06.26.2010                 |
| Radio com. Tester  | CMU 200           | 112790               | GSM<br>850/900/1800/1900<br>IS95,<br>UMTS, CDMA,<br>Bluetooth | N/A                        |
| Band Reject Filter | WRCD              | N/A                  | GSM<br>850/900/1800/1900<br>IS95,<br>UMTS, CDMA               | N/A                        |
|                    | 4N45-24241/3/6    | N/A                  | WLAN  | N/A                        |

The antennas used in the various tests are listed in the below table. The log-periodic antenna is used as communication and link establishment antenna for Bluetooth.

| <b>Antenna</b>            | <b>Type</b>   | <b>Serial number</b> | <b>Operational range</b> | <b>Date of calibration</b> |
|---------------------------|---------------|----------------------|--------------------------|----------------------------|
| Hybrid-log periodic       | TDK HLP 3003C | 130361               | 30 MHz – 3 GHz           | 11.07.08                   |
| Double ridged Horn        | TDK HRN0118   | 130303               | 1 GHz – 18 GHz           | 03.26.08                   |
| Double ridged Horn        | ETS HRN3116   | 00071938             | 18 GHz – 40 GHz          | 10.17.08                   |
| Double ridged Horn (link) | TDK HRN0118   | 130376               | 1 GHz – 18 GHz           | N/A                        |

Note that the hybrid antenna and horn antenna are on a three-year calibration cycle. All other equipments are on a one-year calibration cycle.

## **Description of Bluetooth (BT) Transmitter**

The 24126-1 cell phone sample offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483.5 MHz. The Bluetooth antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by the industrial standard. In this application, the test sample is battery-operated.

## **Measurement Procedures and Data**

### **FIELD STRENGTH OF SPURIOUS EMISSIONS**

CFR Part 2.1053, 15.205, 15.209, 15.247

#### **Measurement Procedure**

The test sample is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

Field Strength (dB $\mu$ V/m) = EMI Receiver Level (dB $\mu$ V) + Cable Loss (dB) -  
Amplifier Gain (dB) + Filter loss (dB) + Antenna  
Correction Factor (3/m)

For 18 GHz – 26.5 GHz:

Field Strength (dB $\mu$ V/m) = EMI Receiver Level (dB $\mu$ V) + Cable Loss (dB) -  
Amplifier Gain (dB) + Filter loss (dB) + Antenna  
Correction Factor (1/m)

A fully charged battery was used for the supply voltage.


**The test sample was operated during the measurements under the following conditions:**

- Tests were performed at low, mid and high channels.
- Tests were performed in both horizontal and vertical polarity.

#### **Measurement Results**


For peak emissions detected above 1 GHz, only those emissions that are higher than the AVG limit line plus 8 dB are selected for final emission analysis.

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Halliang Tang  
EUT type: 23946\_IHDP56LQ1-352795040055799  
EUT condition: HW-DVT2  
Date: 9/1/2010  
Time: 8:55:34 PM  
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
BT ch. 00 (2402 MHz) do in test mode. Orientation X=H  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3 GHz-18 GHz) -  
Peak detector used.

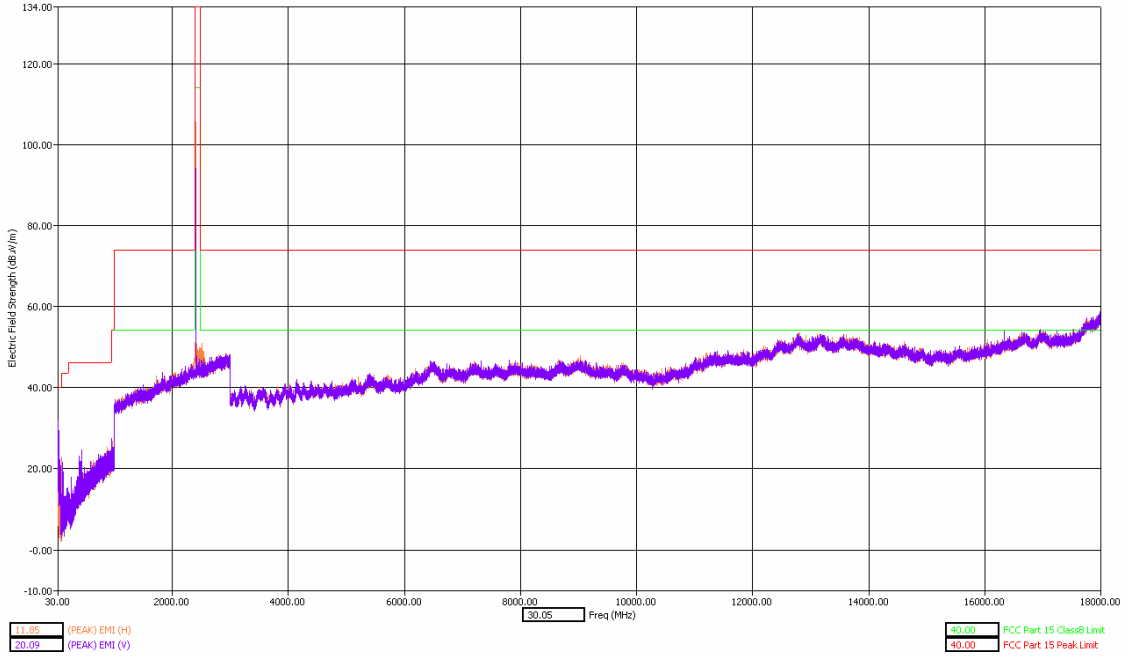


### 30 MHz – 18 GHz Low Channel Dual Polarization X\_open

Test title: FCC 15.205, 15.209, 15.247  
Operator name: Halliang Tang  
EUT type: 23946\_IHDP56LQ1-352795040055799  
EUT condition: HW-DVT2  
Date: 9/1/2010  
Time: 9:44:14 PM  
Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
BT ch. 00 (2402 MHz) do in test mode. Orientation X=H  
HLP 3003C antenna (30 MHz - 3 GHz).  
HRN 0118 antenna (3 GHz-18 GHz) -  
Peak detector used.

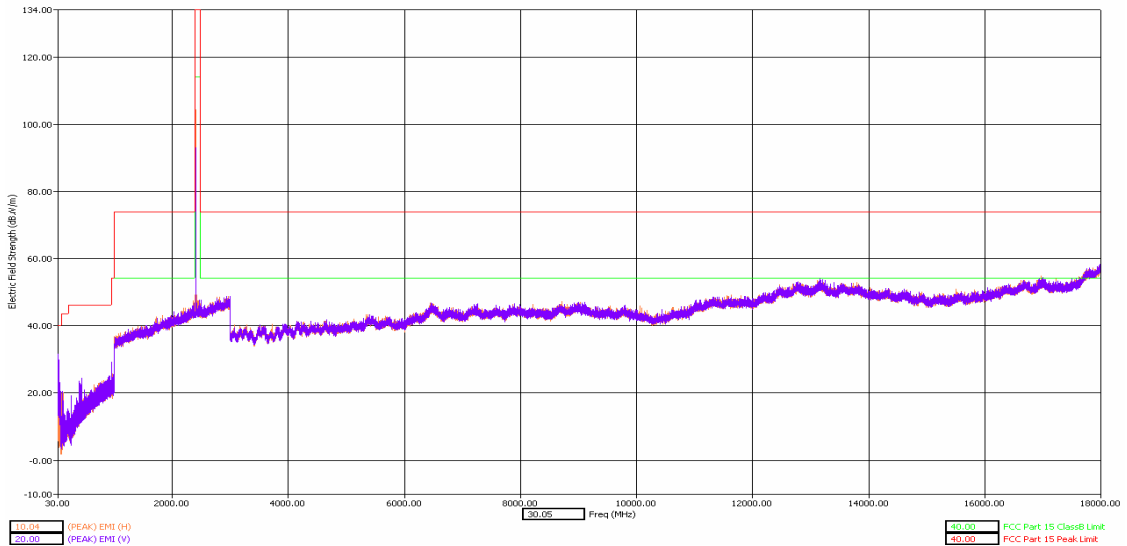


### 30 MHz – 18 GHz Low Channel Dual Polarization X\_close

Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Hallang Tang  
 EUT type: 23946,IMEI:352795040055799  
 EUT condition: HW:DV12  
 Date: 9/1/2010  
 Time: 9:09:39 PM  
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
 BT ch. 39 (2441 MHz) do in test mode. Orientation X=H  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3 GHz-18 GHz).  
 Peak detector used.

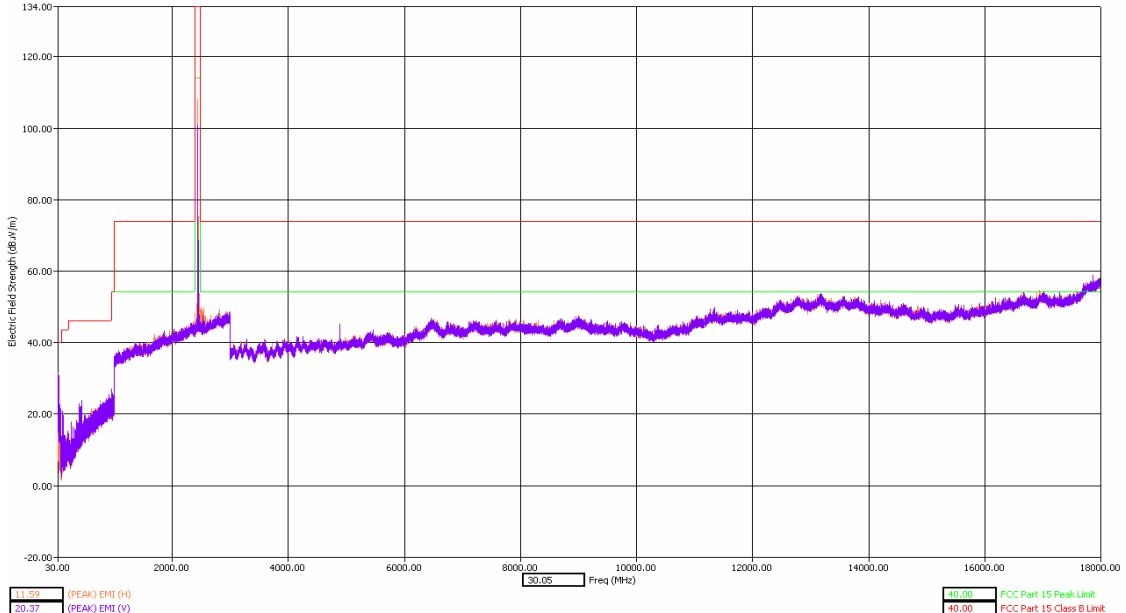


**30 MHz – 18 GHz Middle Channel Dual Polarization X\_open**


Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Hallang Tang  
 EUT type: 23946,IMEI:352795040055799  
 EUT condition: HW:DV12  
 Date: 9/1/2010  
 Time: 9:58:09 PM  
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
 BT ch. 39 (2441 MHz) do in test mode. Orientation X=H  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3 GHz-18 GHz).  
 Peak detector used.

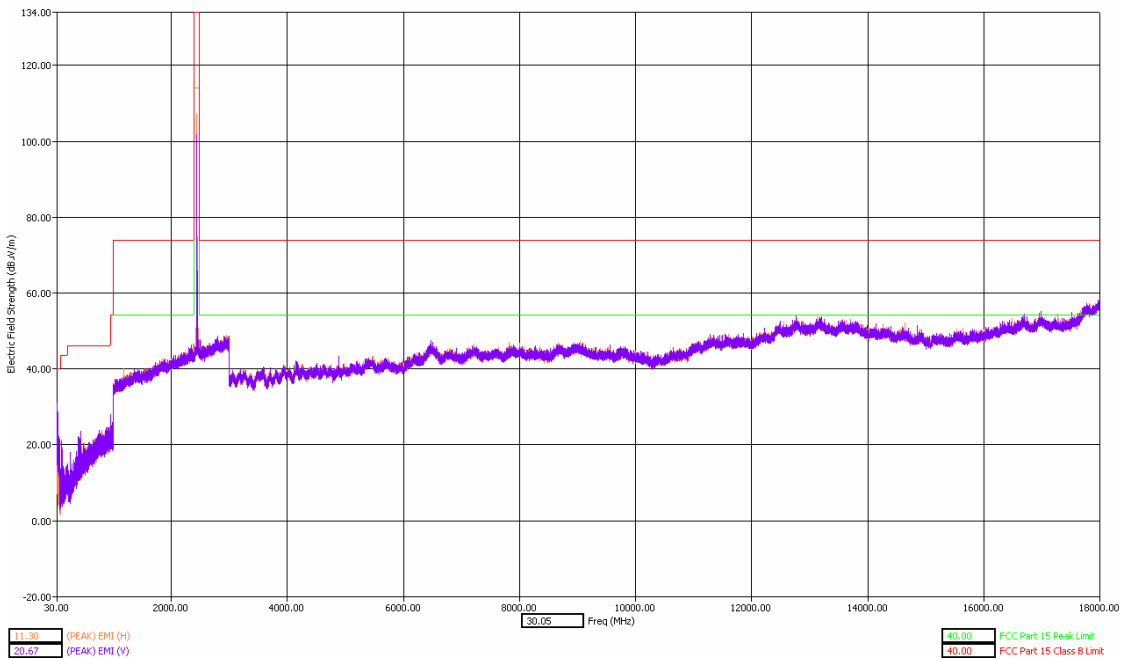

**30 MHz – 18 GHz Middle Channel Dual Polarization X\_close**

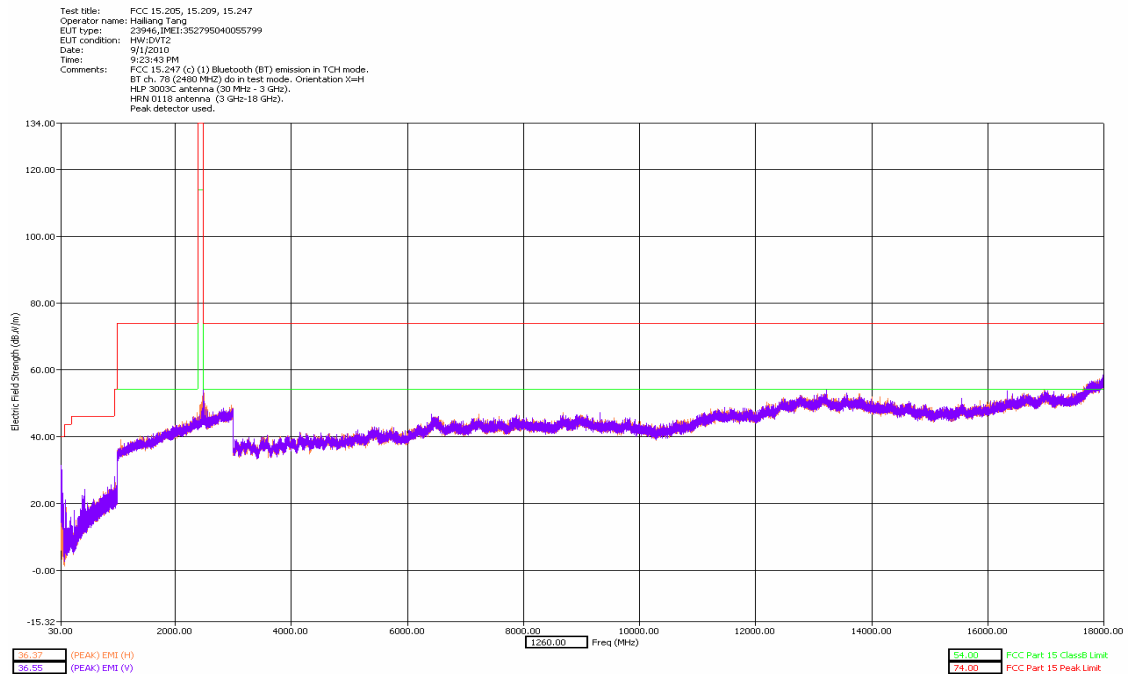

### 30 MHz – 18 GHz High Channel Dual Polarization X\_open

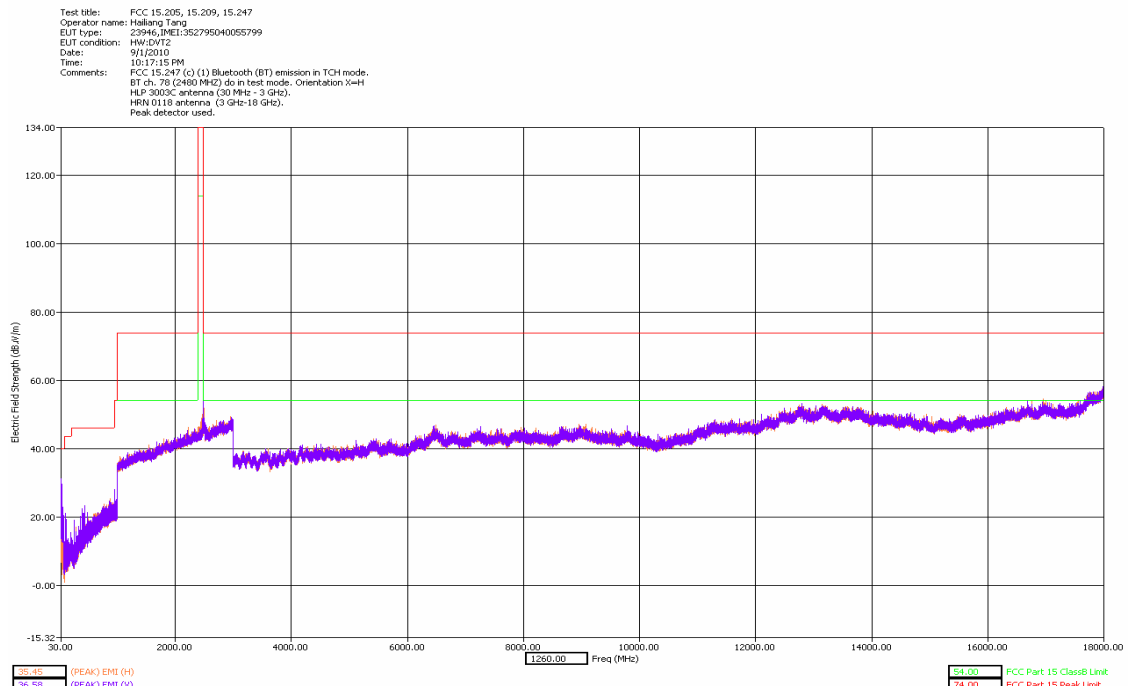

### 30 MHz – 18 GHz High Channel Dual Polarization X\_close

**There were no discernible emissions above the noise floor for 18 - 26.5 GHz for Low, Mid and High Channels and all polarizations in Bluetooth band.**

## **BAND-EDGE COMPLIANCE OF RF RADIATED EMISSIONS**

CFR Part 15.247

### **Measurement Procedure**

The test sample is placed inside the semi-anechoic chamber on a polystyrene table at the turntable center. Test is repeated for both horizontal and vertical polarizations of the receive antenna.

For 30 MHz – 18 GHz:

Field Strength (dB $\mu$ V/m) = EMI Receiver Level (dB $\mu$ V) + Cable Loss (dB) - Amplifier Gain (dB) + Filter loss (dB) + Antenna Correction Factor (3/m)

For 18 GHz – 26.5 GHz:

Field Strength (dB $\mu$ V/m) = EMI Receiver Level (dB $\mu$ V) + Cable Loss (dB) - Amplifier Gain (dB) + Filter loss (dB) + Antenna Correction Factor (1/m)

The test sample was operated in Bluetooth single channel test mode. A fully charged battery was used for the supply voltage.

### **Measurement Results**


Comments:

The band edge measurements crossing the corner for the low/high channel with respect to the average limit line is acceptable when applying the FCC rule specified in CFR 47 part 15.35(b) for the use of peak detector above 1 GHz. The peak detector limit line has been added to the graphical plots.

The peak detector limit line has been added to the graphical plots.


See Attached:

Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Hailiang Tang  
 EUT type: 23946,IMEI:352795040055799  
 EUT condition: HW:DVT2  
 Date: 9/1/2010  
 Time: 8:55:34 PM  
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
 BT ch. 00 (2402 MHz) do in test mode. Orientation X=H  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3 GHz-18 GHz).  
 Peak detector used.

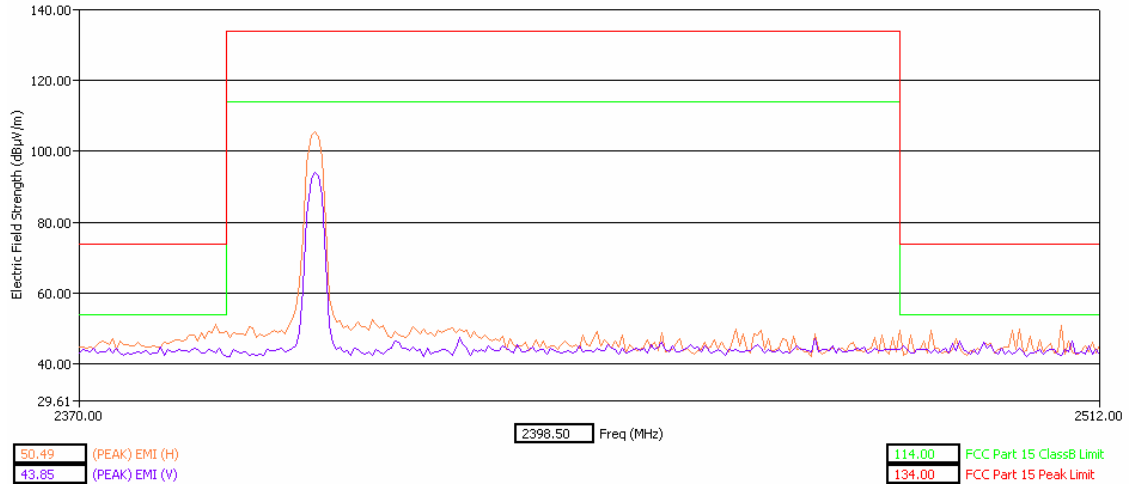


### Authorized Band Emissions Low Channel Dual Polarization X-open

Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Hailiang Tang  
 EUT type: 23946,IMEI:352795040055799  
 EUT condition: HW:DVT2  
 Date: 9/1/2010  
 Time: 9:44:14 PM  
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
 BT ch. 00 (2402 MHz) do in test mode. Orientation X=H  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3 GHz-18 GHz).  
 Peak detector used.

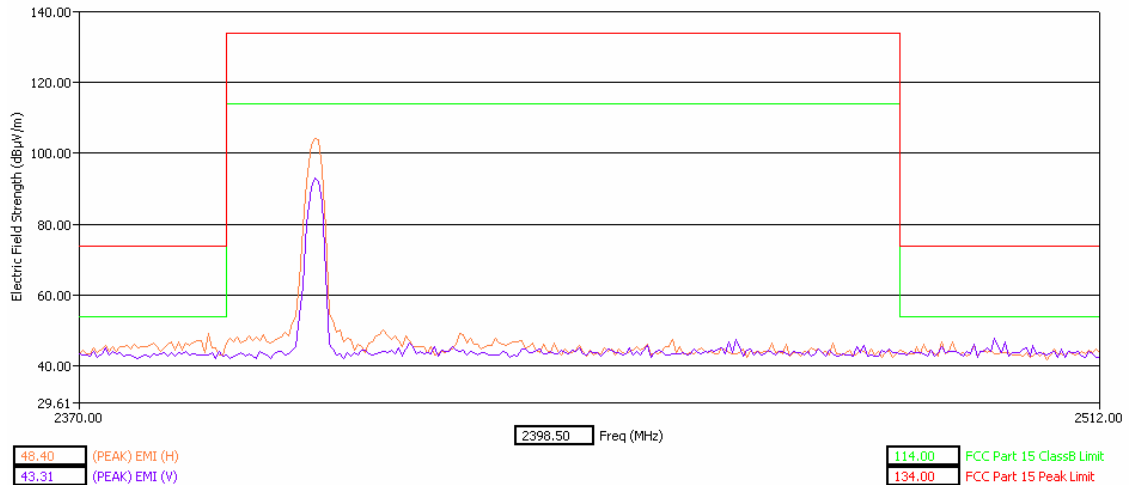


### Authorized Band Emissions Low Channel Dual Polarization X-Close

Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Hailiang Tang  
 EUT type: 23946,IMEI:352795040055799  
 EUT condition: HW:DVT2  
 Date: 9/1/2010  
 Time: 9:23:43 PM  
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
 BT ch. 78 (2480 MHz) do in test mode. Orientation X=H  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3 GHz-18 GHz).  
 Peak detector used.

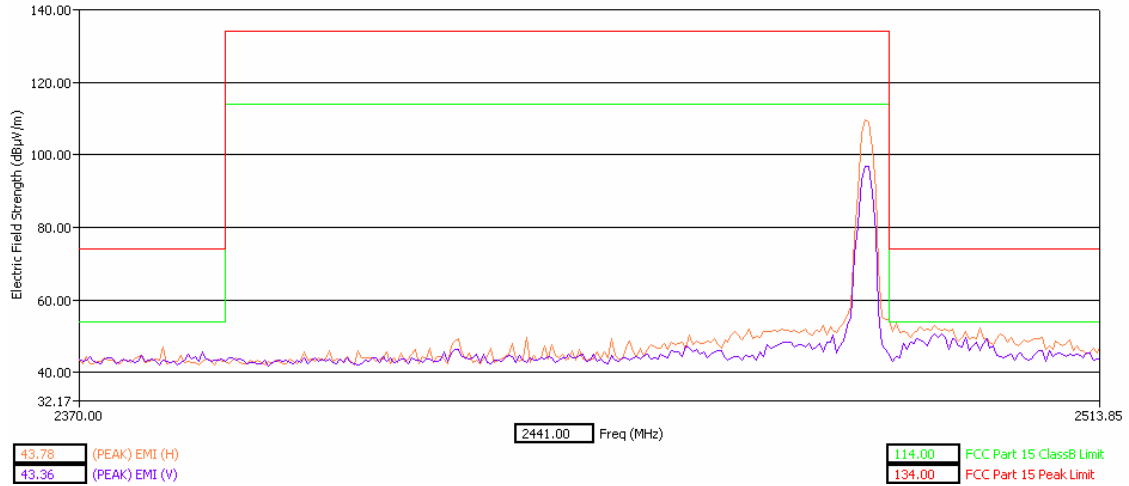

**Authorized Band Emissions High Channel Dual Polarization X\_open**

Test title: FCC 15.205, 15.209, 15.247  
 Operator name: Hailiang Tang  
 EUT type: 23946,IMEI:352795040055799  
 EUT condition: HW:DVT2  
 Date: 9/1/2010  
 Time: 10:17:15 PM  
 Comments: FCC 15.247 (c) (1) Bluetooth (BT) emission in TCH mode.  
 BT ch. 78 (2480 MHz) do in test mode. Orientation X=H  
 HLP 3003C antenna (30 MHz - 3 GHz).  
 HRN 0118 antenna (3 GHz-18 GHz).  
 Peak detector used.

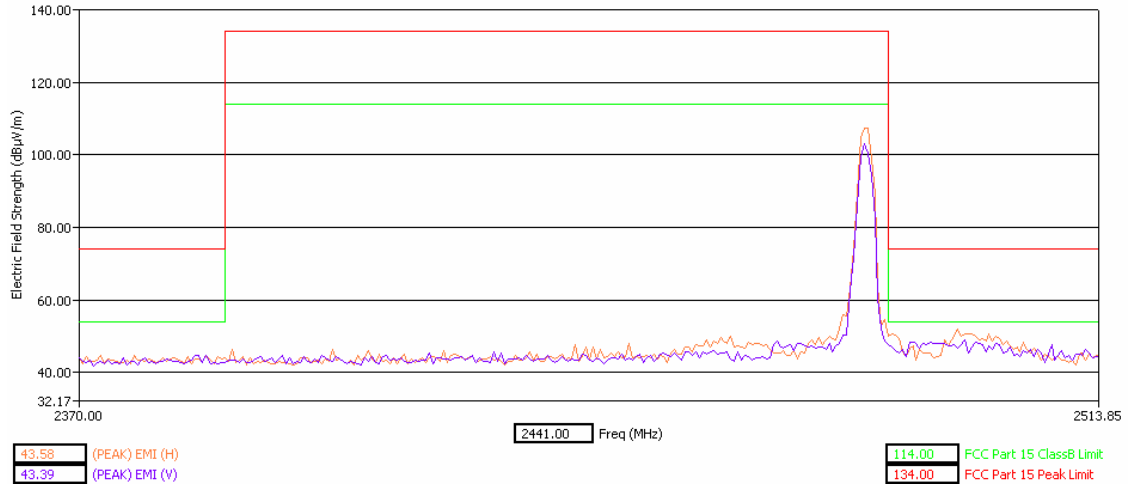

**Authorized Band Emissions High Channel Dual Polarization X\_close**

**End of Test Report**