



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. +1.410.290.6652 / Fax +1.410.290.6654
http://www.pctestlab.com



SAR COMPLIANCE EVALUATION REPORT

Applicant Name:
Motorola Mobility, Inc.
8000 W. Sunrise Blvd.
Plantation, FL 33322 USA

Date of Testing:
09/15/11 - 10/06/11
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Technical Report Serial No.:
0Y1109121620-R1.IHD

FCC ID: IHDP56MD3

APPLICANT: MOTOROLA MOBILITY, INC.

EUT Type: Portable Handset with Lapdock
Application Type: Class II Permissive Change
FCC Rule Part(s): CFR §2.1093; FCC/OET Bulletin 65 Supplement C [June 2001]
Test Device Serial No.: Pre-Production [S/N: LSNW230069]
Class II Permissive Changes: Adding Lapdock 500 (P/N: SJYN0918A)
Date of Original Grant: 09/09/2011

Band & Mode	Tx Frequency	Conducted Power [dBm]	SAR
			1 gm Body (W/kg)
Cell. CDMA/EVDO	824.70 - 848.31 MHz	25.19	0.75
PCS CDMA/EVDO	1851.25 - 1908.75 MHz	24.42	0.56
2.4 GHz WLAN	2412 - 2462 MHz	13.97	0.01
Bluetooth	2402 - 2480 MHz	9.05	N/A
Simultaneous SAR per KDB 690783 D01:			0.76 W/kg

Note: Powers in the above table represent output powers for the SAR test configurations applicable and may not represent the highest output powers for all capabilities.

This revised Test Report (S/N: 0Y1109121620-R1.IHD) supersedes and replaces the previously issued test report on the same subject EUT for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001), IEEE 1528-2003 and in applicable Industry Canada Radio Standards Specifications (RSS); for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez
President



FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type: Portable Handset with Lapdock		Page 1 of 30

T A B L E O F C O N T E N T S

1	INTRODUCTION.....	3
2	TEST SITE LOCATION.....	4
3	SAR MEASUREMENT SETUP.....	5
4	DASY E-FIELD PROBE SYSTEM.....	7
5	PROBE CALIBRATION PROCESS.....	8
6	PHANTOM AND EQUIVALENT TISSUES.....	9
7	DOSIMETRIC ASSESSMENT & PHANTOM SPECS.....	10
8	FCC RF EXPOSURE LIMITS.....	11
9	FCC 3G MEASUREMENT PROCEDURES.....	12
10	SAR TESTING WITH IEEE 802.11 TRANSMITTERS.....	15
11	SYSTEM VERIFICATION.....	19
12	SAR TEST SETUP PER KDB INQUIRY DISCUSSIONS.....	21
13	SAR DATA SUMMARY.....	22
14	SIMULTANEOUS TRANSMISSION.....	24
15	EQUIPMENT LIST.....	26
16	MEASUREMENT UNCERTAINTIES.....	27
17	CONCLUSION.....	28
18	REFERENCES.....	29

FCC ID: IHDP56MD3	 <small>ENGINEERING LABORATORY, INC.</small>	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock	Page 2 of 30	

1 INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

1.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1-1).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Figure 1-1
SAR Mathematical Equation



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 3 of 30

2 TEST SITE LOCATION

2.1 INTRODUCTION

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC.

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49' 38" W longitude. The facility is 1.5 miles north of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on January 27, 2006 and Industry Canada.





Figure 2-1
Map of the Greater Baltimore and Metropolitan Washington, D.C. area

2.2 Test Facility / Accreditations:

Measurements were performed at an independent accredited PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing-Aid Compatibility (HAC), Battery Safety, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and all Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS and CDMA, and EvDO mobile phones.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO Data, CDMA 1xRTT Data

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 4 of 30

3 SAR MEASUREMENT SETUP

3.1 Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the SAM phantom containing the head or body equivalent material. The robot is a six-axis industrial robot, performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure 3-1).

3.2 System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal from the DAE and transfers data to the PC card.

3.3 System Electronics

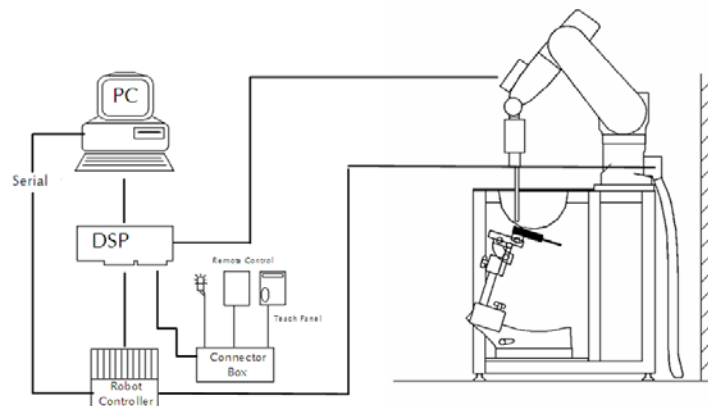




Figure 3-1
SAR Measurement System Setup

The DAE consists of a highly sensitive electrometer-grade auto-zeroing preamplifier, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 5 of 30

3.4 Automated Test System Specifications

Test Software: SPEAG DASY4 version 4.7 Measurement Software
 Robot: Stäubli Unimation Corp. Robot RX60L
 Repeatability: 0.02 mm
 No. of Axes: 6

Data Acquisition Electronic System (DAE)

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter & control logic
 Software: SEMCAD software
 Connecting Lines: Optical Downlink for data and status info
 Optical upload for commands and clock

PC Interface Card



Function: Link to DAE
 16-bit A/D converter for surface detection system
 Two Serial & Ethernet link to robotics
 Direct emergency stop output for robot

Phantom

Type: SAM Twin Phantom (V4.0)
 Shell Material: Composite
 Thickness: 2.0 ± 0.2 mm



Figure 3-2
SAR Measurement System

FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 6 of 30

4.1 Probe Measurement System



**Figure 4-1
SAR System**

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration (see Figure 5-3) and optimized for dosimetric evaluation [9]. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the


maximum using a 2nd order curve fitting (see Figure 5-1). The approach is stopped at reaching the maximum.

4.2 Probe Specifications



Model(s):	ES3DV2, ES3DV3, EX3DV4
Frequency Range:	10 MHz – 6.0 GHz (EX3DV4) 10 MHz – 4 GHz (ES3DV3, ES3DV2)
Calibration:	In head and body simulating tissue at Frequencies from 300 up to 6000MHz
Linearity:	± 0.2 dB (30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB (30 MHz to 4 GHz) for ES3DV3, ES3DV2
Dynamic Range:	10 mW/kg – 100 W/kg
Probe Length:	330 mm
Probe Tip Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9mm for ES3DV3)
Tip-Center:	1 mm (2.0 mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields



**Figure 4-2
Near-Field Probe**



**Figure 4-3
Triangular Probe Configuration**

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 7 of 30

5 PROBE CALIBRATION PROCESS

5.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

5.2 Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

5.3 Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- σ = simulated tissue conductivity,
- ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.




Figure 5-1 E-Field and Temperature measurements at 900MHz [9]

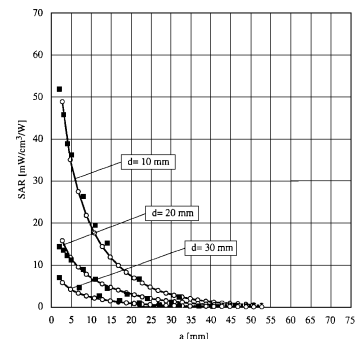




Figure 5-2 E-Field and temperature measurements at 1.9GHz [9]

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 8 of 30

6 PHANTOM AND EQUIVALENT TISSUES


6.1 SAM Phantoms



**Figure 6-1
SAM Phantoms**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population [12][13]. The phantom enables the dosimetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

6.2 Tissue Simulating Mixture Characterization





**Figure 6-2
SAM Phantom with
Simulating Tissue**

The mixture is characterized to obtain proper dielectric constant (permittivity) and conductivity of the tissue of interest. The tissue dielectric parameters recommended in IEEE 1528 and IEC 62209 have been used as targets for the compositions, and are to match within 5%, per the FCC recommendations.

**Table 6-1
Composition of the Tissue Equivalent Matter**

Frequency (MHz)	835	1900	2450
Tissue	Body	Body	Body
Ingredients (% by weight)			
Bactericide	0.1		
DGBE		29.44	26.7
HEC	1		
NaCl	0.94	0.39	0.1
Sucrose	44.9		
Water	53.06	70.17	73.2

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 9 of 30

7 DOSIMETRIC ASSESSMENT & PHANTOM SPECS

7.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm x 15mm.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during testing the 1 gram cube. This fixed point was measured and used as a reference value.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASYS manual for more details):
 - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete. If the value deviated by more than 5%, the evaluation was repeated.






Figure 7-1
Sample SAR Area Scan

7.2 Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Figure 7-2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimize reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15 cm.



Figure 7-2
SAM Twin Phantom Shell

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 10 of 30

8 FCC RF EXPOSURE LIMITS

8.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



8.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock	Page 11 of 30	

Power measurements were performed using a base station simulator under digital average power.

9.1 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. Any SAR measurements with power drifts greater than 5% were repeated.

9.2 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

9.2.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices" v02, October 2007. Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the "All Up" condition.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 9-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 13-2 was applied.
5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

Table 9-1
Parameters for Max. Power for RC1



Parameter	Units	Value
$\frac{I_{or}}{Pilot E_c}$	dBm/1.23 MHz	-104
$\frac{I_{or}}{Traffic E_c}$	dB	-7
$\frac{I_{or}}{Traffic E_c}$	dB	-7.4

Table 9-2
Parameters for Max. Power for RC3

Parameter	Units	Value
$\frac{I_{or}}{Pilot E_c}$	dBm/1.23 MHz	-86
$\frac{I_{or}}{Traffic E_c}$	dB	-7
$\frac{I_{or}}{Traffic E_c}$	dB	-7.4

9.2.2 Body SAR Measurements

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH_n) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: OY1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 12 of 30

measured on the maximum output channel (FCH + SCH_n) with FCH at full rate and SCH₀ enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR was measured using TDSO / SO32 with power control bits in the “All Up”

Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

9.2.3 Body SAR Measurements for EVDO Data Devices

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. SAR for Subtype 2 Physical layer configurations is not required for Rev. A when the maximum average output of each RF channels is less than that measured in Subtype 0/1 Physical layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configuration that results in the highest SAR for the RF channels in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations. Both FTAP and FETAP are configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. AT power control should be in “All Bits Up” conditions for TAP/ETAP.

FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT	 Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock	Page 13 of 30

9.3 RF Conducted Powers

9.3.1 CDMA Conducted Powers

Band	Channel	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	1013	25.18	25.17	25.19	25.18	25.15	25.18
	384	25.15	25.19	25.20	25.16	25.12	25.19
	777	25.08	24.96	25.05	25.14	25.19	25.18
PCS	25	24.13	24.11	24.14	24.13	23.99	24.00
	600	24.14	24.42	24.43	24.38	24.16	24.20
	1175	24.44	24.48	24.50	24.48	24.22	24.22



Note: RC1 is only applicable for IS-95 compatibility. Output powers are identical to the original filing since this permissive change is to add an external accessory.

Per KDB Publication 941225 D01:

CDMA Body SAR was tested under EVDO Rev. 0 per FCC 3G Guidance (See Section 9.2.3) per FCC KDB Publication 941225 D01. Rev. A and TDSO32 RC3 tests were not required since the maximum average output of each channel in Rev. A and RC3 (1x RTT) was not more than ¼ dB higher than that measured Rev 0.



Figure 9-1
Power Measurement Setup

FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 14 of 30

10 SAR TESTING WITH IEEE 802.11 TRANSMITTERS

Normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

10.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

10.2 Frequency Channel Configurations [27]

802.11 b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11 b/g/n modes are tested on channels 1, 6 and 11. These are referred to as the “default test channels”. 802.11g/n modes were evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

**Table 10-1
802.11 Test Channels per FCC Requirements**

Mode	GHz	Channel	Turbo Channel	“Default Test Channels”			
				§15.247	802.11b	802.11g	UNII
802.11 b/g	2.412	1		√	√		
	2.437	6	6	√	√		
	2.462	11		√	√		
802.11a	5.18	36	42 (5.21 GHz)			√	*
	5.20	40					*
	5.22	44					*
	5.24	48	50 (5.25 GHz)			√	*
	5.26	52	58 (5.29 GHz)			√	*
	5.28	56					*
	5.30	60					*
	5.32	64				√	*
	5.500	100	Unknown				*
	5.520	104				√	*
	5.540	108					*
	5.560	112					*
	5.580	116				√	*
	5.600	120					*
	5.620	124				√	*
	5.640	128					*
	5.660	132					*
	5.680	136				√	*
	5.700	140				*	
	UNII or §15.247	5.745	149		√		√
	5.765	153	152 (5.76 GHz)		*		*
	5.785	157		√			*
	5.805	161	160 (5.80 GHz)		*	√	*
§15.247	5.825	165		√			*



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: OY1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 15 of 30

Table 11-2
IEEE 802.11b Average RF Power

Freq [MHz]	Channel	Data Rate [Mbps]	Average Power (dBm)
2412	1	1	13.6
		2	13.7
		5.5	13.6
		11	13.75
2437	6	1	13.97
		2	13.91
		5.5	13.97
		11	13.82
2462	11	1	13.82
		2	13.97
		5.5	13.92
		11	13.96

Table 11-3
IEEE 802.11g Average RF Power

Freq [MHz]	Channel	Data Rate [Mbps]	Average Power (dBm)
2412	1	6	10.73
		9	10.76
		12	10.72
		18	10.75
		24	10.70
		36	10.70
		48	10.67
		54	10.66
2437	6	6	10.92
		9	11.02
		12	10.73
		18	10.77
		24	10.90
		36	10.82
		48	10.91
		54	10.90
2462	11	6	10.84
		9	10.85
		12	10.87
		18	10.90
		24	10.81
		36	10.95
		48	10.75
		54	10.80



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 16 of 30

Table 11-4
IEEE 802.11n (800ns) Average RF Power

Freq [MHz]	Channel	Data Rate [Mbps]	Average Power (dBm)
2412	1	6.5	9.50
		13	9.20
		19.5	9.20
		26	9.16
		29	9.20
		52	9.22
		58.5	9.15
		65	9.20
		2437	6
13	9.50		
19.5	9.50		
26	9.25		
29	9.45		
52	9.40		
58.5	9.45		
65	9.50		
2462	11		
		13	9.50
		19.5	9.40
		26	9.40
		29	9.45
		52	9.50
		58.5	9.40
		65	9.33

Table 11-5
IEEE 802.11n (400ns) Average RF Power

Freq [MHz]	Channel	Data Rate [Mbps]	Average Power (dBm)
2412	1	7.2	9.40
		14.4	9.30
		21.7	9.20
		28.9	9.30
		43.3	9.25
		57.8	9.20
		65	9.20
		72.2	9.25
2437	6	7.2	9.45
		14.4	9.30
		21.7	9.30
		28.9	9.50
		43.3	9.50
		57.8	9.56
		65	9.30
		72.2	9.40
2462	11	7.2	9.50
		14.4	9.61
		21.7	9.50
		28.9	9.60
		43.3	9.52
		57.8	9.50
		65	9.60
		72.2	9.52

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes: Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers were not greater than 0.25 dB than that of the tested channel in the lowest data rate IEEE 802.11b mode. The bolded powers in the above tables were tested for SAR.

Output powers are identical to the original filing since this permissive change is to add an external accessory only.






Figure 11-1
Power Measurement Setup

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock	Page 18 of 30	

11 SYSTEM VERIFICATION

11.1 Tissue Verification

**Table 11-1
Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
09/15/2011	835B	22.9	820	0.967	54.60	0.969	55.284	-0.21%	-1.24%
			835	0.975	54.52	0.970	55.200	0.52%	-1.23%
			850	0.985	54.37	0.988	55.154	-0.30%	-1.42%
10/06/2011	835B	22.0	820	0.961	54.51	0.969	55.284	-0.83%	-1.40%
			835	0.985	54.51	0.970	55.200	1.55%	-1.25%
			850	0.994	54.24	0.988	55.154	0.61%	-1.66%
09/18/2011	1900B	23.0	1850	1.493	52.07	1.520	53.300	-1.78%	-2.31%
			1880	1.508	51.97	1.520	53.300	-0.79%	-2.50%
			1910	1.549	51.83	1.520	53.300	1.91%	-2.76%
10/05/2011	1900B	23.8	1850	1.455	52.11	1.520	53.300	-4.28%	-2.23%
			1880	1.487	52.06	1.520	53.300	-2.17%	-2.33%
			1910	1.523	51.90	1.520	53.300	0.20%	-2.63%
09/19/2011	2450B	23.4	2401	1.867	50.81	1.903	52.765	-1.89%	-3.71%
			2450	1.932	50.67	1.950	52.700	-0.92%	-3.85%
			2499	2.003	50.48	2.019	52.638	-0.79%	-4.10%

Note: KDB Publication 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50 MHz of the DUT frequencies.



The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies (per IEEE 1528 6.6.1.2). The SAR test plots may slightly differ from the table above since the DASY software rounds to three significant digits.

11.2 Measurement Procedure for Tissue verification

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \frac{\cos\phi' \exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho' \cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 19 of 30

12.1 SAR Test Setup



The lapdock was placed below a SAM phantom with the base of the laptop in contact with the flat portion of the phantom and the screen opened 90 degrees. A cable connects the lapdock to the phone and the phone is positioned in a slot behind the screen. There is only one orientation for the phone with respect to the lapdock. The SAR test setup photographs show device positioning and setup.

12.2 Simultaneous Transmission

When in the lapdock configuration, this device supports simultaneous transmission scenarios, including CDMA/EVDO Hotspot and CDMA Voice + WIFI Data. See Section 14 for simultaneous transmission analysis.

12.3 Power Reduction

There is no power reduction in portable hotspot mode for this device when being used with the lapdock due to the manufacturer's algorithm for power reduction. The operational description contains details of the power reduction algorithm.

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock	Page 21 of 30	



13 SAR DATA SUMMARY

**Table 13-1
CDMA Body SAR Results**

MEASUREMENT RESULTS								
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Position	SAR (1g)
MHz	Ch.							(W/kg)
836.52	384	Cell. CDMA	EVDO	25.12	0.02	0.0 cm	Lap	0.743
836.52	384	Cell. CDMA	SO55	25.19	0.00	0.0 cm	Lap	0.749
1880.00	600	PCS CDMA	EVDO	24.16	0.02	0.0 cm	Lap	0.434
1880.00	600	PCS CDMA	SO55	24.42	-0.01	0.0 cm	Lap	0.556
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Body		
Spatial Peak						1.6 W/kg (mW/g)		
Uncontrolled Exposure/General Population						averaged over 1 gram		

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration (See Section 12.1). Test procedures used were according to FCC/OET Bulletin 65, Supplement C [June 2001].
2. Batteries are fully charged for all readings. Standard battery was used.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth was at least 15.0 cm.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (June 2001) and Public Notice DA-02-1438, if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
6. CDMA Body SAR was tested under EVDO Rev. 0 per FCC 3G Guidance (See Section 9.2.3) per FCC KDB Publication 941225 D01. Rev. A and TDSO32 RC3 tests were not required since the maximum average output of each channel in Rev. A and RC3 (1x RTT) was not more than ¼ dB higher than that measured Rev 0.
7. CDMA Body SAR was additionally tested with RC3/SO55 to cover the simultaneous transmission scenario of CDMA Voice + WLAN data.
8. To confirm the proper SAR liquid depth, the z-axis plots are included from the system verification using with the same liquid as the SAR tests.



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 22 of 30

**Table 13-2
WLAN Body SAR Results**

MEASUREMENT RESULTS									
FREQUENCY		Mode	Service	Conducted Power [dBm]	Power Drift [dB]	Spacing	Data Rate (Mbps)	Position	SAR (1g)
MHz	Ch.								(W/kg)
2437	6	IEEE 802.11b	DSSS	13.97	0.06	0.0 cm	1	Lap	0.008
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Body			
Spatial Peak						1.6 W/kg (mW/g)			
Uncontrolled Exposure/General Population						averaged over 1 gram			

Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration (See Section 12.1). Test procedures used were according to FCC/OET Bulletin 65, Supplement C [June 2001].
2. Batteries are fully charged for all readings. Standard battery was used.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Liquid tissue depth was at least 15.0 cm.
5. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 and April 2010 FCC/TCB Meeting Notes: Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
6. WLAN transmission was verified with a spectrum analyzer.
7. To confirm the proper SAR liquid depth, the z-axis plots are included from the system verification using with the same liquid as the SAR tests.

FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 23 of 30

14 SIMULTANEOUS TRANSMISSION

14.1 Multiple Antenna/Transmission Information

The separation distance between the main antenna and the Bluetooth/WLAN antenna is 28.9 mm.

Peak RF Conducted Power of Bluetooth Tx is 16.943 mW. Peak RF Conducted Power of WLAN 802.11b mode is 44.57 mW. Peak RF Conducted Power of WLAN 802.11g mode is 69.98 mW. Peak RF Conducted Power of WLAN 802.11n mode is 60.26 mW.

Maximum average RF Conducted Power of Bluetooth Tx is 8.04 mW. Maximum average RF Conducted Power of WLAN 802.11b mode is 24.95 mW. Maximum average RF Conducted Power of WLAN 802.11g mode is 12.65 mW. Maximum average RF Conducted Power of WLAN 802.11n mode is 9.33 mW.

Per April 2011 FCC/TCB Workshop Guidance, p.20, Bluetooth SAR was not required since

1. Bluetooth and 2.4GHz Wi-Fi are implemented in the same chipset, using the same antenna and RF components
2. Bluetooth time-averaged power is < 60/2.4 mW (or 25 mW)
3. The maximum peak and average Bluetooth power is less than the respective peak and average output powers in all Wi-Fi modes.
4. The measured Wi-Fi SAR is < 0.4 W/kg for all applicable Bluetooth configurations (Body-Worn).
5. Simultaneous transmission SAR exclusion applies to all applicable configurations involving Wi-Fi or Bluetooth.

14.2 Simultaneous Transmission Scenarios

Bluetooth cannot transmit with WIFI (same RF path) but can additionally transmit with CDMA/EVDO for Body SAR conditions only. Bluetooth was not required to be measured and is 0 W/kg for all summation analysis. CDMA voice can transmit simultaneously with WLAN data. EVDO hotspot is also supported. CDMA and EVDO cannot transmit simultaneously (same RF path).



CDMA support voice and data modes. WIFI support data communication only.

14.3 Simultaneous Transmission Analysis

Table 14-1
Simultaneous Transmission Scenario (CDMA Voice Calls with WLAN Data at 0.0 cm)

Configuration	Mode	CDMA SAR (W/kg)	2.4 GHz WIFI SAR (W/kg)	Σ SAR (W/kg)
Lap	Cell. CDMA	0.749	0.008	0.757
Lap	PCS CDMA	0.556	0.008	0.564

The above table represents scenarios with CDMA voice call with WLAN Data.

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 24 of 30



**Table 14-2
Simultaneous Transmission Scenario (Portable Hotspot at 0.0 cm)**

Configuration	Mode	EVDO SAR (W/kg)	2.4 GHz WIFI SAR (W/kg)	Σ SAR (W/kg)
Lap	Cell. CDMA	0.743	0.008	0.751
Lap	PCS CDMA	0.434	0.008	0.442

The above table represents portable hotspot conditions using the lapdock.



14.4 Simultaneous Transmission Conclusion

Per FCC KDB Publication 648474 D01, no aggregate volumetric simultaneous transmission is required for the device, since the sum of the standalone SAR values is <1.6 W/kg for all configurations.

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 25 of 30

15 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/13/2010	Annual	10/13/2011	3613A00315
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/21/2011	Annual	4/21/2012	JP38020182
Agilent	E5515C	Wireless Communications Test Set	10/11/2010	Annual	10/11/2011	GB46110872
Agilent	E5515C	Wireless Communications Test Set	10/8/2010	Annual	10/8/2011	GB46310798
Agilent	E5515C	Wireless Communications Test Set	7/6/2011	Annual	7/6/2012	GB41450275
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/8/2011	Annual	4/8/2012	MY45470194
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/11/2010	Annual	10/11/2011	1833460
Gigatronics	8651A	Universal Power Meter	10/11/2010	Annual	10/11/2011	8650319
Index SAR	IXTL-010	Dielectric Measurement Kit	N/A		N/A	N/A
Index SAR	IXTL-030	30MM TEM line for 6 GHz	N/A		N/A	N/A
Pasternack	PE2208-6	Bidirectional Coupler	N/A		N/A	N/A
Pasternack	PE2209-10	Bidirectional Coupler	N/A		N/A	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	11/11/2010	Annual	11/11/2011	836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	6/1/2011	Annual	6/1/2012	833855/0010
Rohde & Schwarz	CMU200	Base Station Simulator	4/19/2011	Annual	4/19/2012	107826
Rohde & Schwarz	CMU200	Base Station Simulator	11/4/2009	Annual	11/4/2010	109892
Rohde & Schwarz	NRVD	Dual Channel Power Meter	4/8/2011	Biennial	4/8/2013	101695
SPEAG	D1900V2	1900 MHz SAR Dipole	2/17/2011	Annual	2/17/2012	502
SPEAG	D1900V2	1900 MHz SAR Dipole	7/22/2011	Annual	7/22/2012	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	8/19/2011	Annual	8/19/2012	719
SPEAG	D835V2	835 MHz SAR Dipole	2/9/2011	Annual	2/9/2012	4d047
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/21/2011	Annual	2/21/2012	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/19/2011	Annual	5/19/2012	859
SPEAG	ES3DV3	SAR Probe	4/18/2011	Annual	4/18/2012	3209
Rohde & Schwarz	SMIQ03B	Signal Generator	4/6/2011	Annual	4/6/2012	DE27259
Anritsu	MA2481A	Power Sensor	2/7/2011	Annual	2/7/2012	5318
Anritsu	MA2481A	Power Sensor	2/7/2011	Annual	2/7/2012	5442
Anritsu	ML2438A	Power Meter	2/7/2011	Annual	2/7/2012	1190013
Anritsu	ML2438A	Power Meter	2/7/2011	Annual	2/7/2012	98150041
Agilent	8648D	Signal Generator	4/5/2011	Annual	4/5/2012	3629U00687
Anritsu	ML2438A	Power Meter	2/7/2011	Annual	2/7/2012	1070030
Anritsu	MA2481A	Power Sensor	2/7/2011	Annual	2/7/2012	5821
Anritsu	MA2481A	Power Sensor	2/7/2011	Annual	2/7/2012	8013
Anritsu	MA2481A	Power Sensor	2/7/2011	Annual	2/7/2012	5605
Anritsu	MA2481A	Power Sensor	2/7/2011	Annual	2/7/2012	2400
Agilent	E5515C	Wireless Communications Test Set	7/6/2011	Annual	7/6/2012	GB43304447
Agilent	E5515C	Wireless Communications Tester	4/21/2011	Annual	4/21/2012	US41140256
Amplifier Research	5S1G4	5W, 800MHz-4.2GHz	N/A		N/A	21910
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	N/A		N/A	N/A
Agilent	E5515C	Wireless Communications Test Set	2/8/2011	Annual	2/8/2012	GB45360985
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	3/11/2011	Annual	3/11/2012	103962
Control Company	61220-416	Long-Stem Thermometer	2/15/2011	Biennial	2/15/2013	111331322
Control Company	61220-416	Long-Stem Thermometer	2/15/2011	Biennial	2/15/2013	111331323
Control Company	61220-416	Long-Stem Thermometer	2/15/2011	Biennial	2/15/2013	111331330
Control Company	61220-416	Long-Stem Thermometer	2/15/2011	Biennial	2/15/2013	111331332
Control Company	61220-416	Long-Stem Thermometer	3/16/2011	Biennial	3/16/2013	111391601
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286445
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286460
VWR	36934-158	Wall-Mounted Thermometer	5/26/2010	Biennial	5/26/2012	101718589
VWR	36934-158	Wall-Mounted Thermometer	1/21/2011	Biennial	1/21/2013	111286454
VWR	36934-158	Wall-Mounted Thermometer	2/26/2010	Biennial	2/26/2012	101536273
SPEAG	ES3DV3	SAR Probe	4/8/2011	Annual	4/8/2012	3258
SPEAG	D1750V2	1750 MHz SAR Dipole	5/24/2011	Annual	5/24/2012	1051
MiniCircuits	SLP-2400+	Low Pass Filter	N/A		N/A	R8979500903
Narda	4772-3	Attenuator (3dB)	N/A		N/A	9406
Narda	BW-S3W2	Attenuator (3dB)	N/A		N/A	120
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	8/5/2011	Annual	8/5/2012	112347
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	N/A		N/A	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	N/A		N/A	N/A



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 26 of 30

16 MEASUREMENT UNCERTAINTIES

Applicable for 750 – 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k	
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i	
Measurement System										
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞	
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞	
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞	
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞	
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞	
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞	
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞	
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞	
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞	
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞	
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞	
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞	
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞	
Test Sample Related										
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287	
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞	
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞	
Phantom & Tissue Parameters										
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞	
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞	
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6	
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞	
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6	
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5	

The above measurement uncertainties are according to IEEE Std. 1528-2003



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 27 of 30

17 CONCLUSION

17.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 28 of 30

18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: IHDP56MD3	 PCTEST ENGINEERING LABORATORY, INC.	SAR COMPLIANCE REPORT	 MOTOROLA	Reviewed by: Quality Manager
Technical Report S/N: OY1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 29 of 30

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Measurement Procedures for 3G Devices KDB Publication 941225
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publication 648474
- [29] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, KDB Publication 450824
- [30] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, KDB Publication 616217
- [31] FCC SAR Measurement Requirements for 3 – 6 GHz, KDB Publication 865664
- [32] FCC Mobile Portable RF Exposure Procedure, KDB Publication 447498
- [33] FCC SAR Procedures for Dongle Transmitters, KDB Publication 447498
- [34] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [35] FCC SAR Test Considerations for LTE Handsets and Data Modems, KDB Publication 941225.
- [36] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.
- [37] FCC Hot Spot SAR v01, KDB Publication 941225 D06.

FCC ID: IHDP56MD3		SAR COMPLIANCE REPORT		Reviewed by: Quality Manager
Technical Report S/N: 0Y1109121620-R1.IHD	Test Dates: 09/15/11 - 10/06/11	EUT Type Portable Handset with Lapdock		Page 30 of 30