




# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC PART 15.247 / IC RSS-210 WLAN 802.11a/b/g/n

**Applicant Name:**  
Motorola Mobility, Inc.  
8000 West Sunrise Blvd.  
Plantation, FL 33322  
United States

**Date of Testing:**  
September 14 - 27, 2011  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1109131629.IHD

<b>FCC ID:</b>	<b>IHDP56ME2</b>
<b>APPLICANT:</b>	<b>Motorola Mobility, Inc.</b>

**Application Type:** Certification

**EUT Type:** Portable Handset

**Max. RF Output Power:** 41.21 mW (16.15 dBm) Conducted (b)  
36.31 mW (15.6 dBm) Conducted (g)  
30.41 mW (14.83 dBm) Conducted (n) - 2.4GHz  
11.46 mW (10.59 dBm) Conducted (a) - 5.8GHz  
13.12 mW (11.18 dBm) Conducted (n) - 5.8GHz

**Frequency Range:** 2412 - 2462 MHz (DSSS/OFDM), 5745 – 5825 MHz (OFDM)

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247


**IC Specification(s):** RSS-210 Issue 8

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. Test results reported herein relate only to the item(s) tested.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Grant Conditions: Listed output power is conducted.*

*PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*



  
Randy Ortanez  
President




<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 1 of 69	

# TABLE OF CONTENTS


FCC PART 15.247 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST.....		6
3.1 EVALUATION PROCEDURE.....		6
3.2 CONDUCTED EMISSIONS.....		6
3.3 RADIATED EMISSIONS.....		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS.....		10
6.1 SUMMARY.....		10
6.2 6DB BANDWIDTH MEASUREMENT – 802.11A/B/G/N.....		11
6.3 OUTPUT POWER MEASUREMENT – 802.11B/G.....		20
6.4 OUTPUT POWER MEASUREMENT – 802.11N (2.4GHZ).....		21
6.5 OUTPUT POWER MEASUREMENT – 802.11A/N (5.8GHZ).....		22
6.6 POWER SPECTRAL DENSITY (802.11A/B/G/N).....		23
6.7 CONDUCTED EMISSIONS AT THE BAND EDGE.....		33
6.8 CONDUCTED SPURIOUS EMISSIONS.....		40
6.9 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		48
6.10 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....		56
6.11 LINE-CONDUCTED TEST DATA.....		59
7.0 CONCLUSION.....		69

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 2 of 69



# MEASUREMENT REPORT

## FCC Part 15.247



### § 2.1033 General Information

**APPLICANT:** Motorola Mobility, Inc.

**APPLICANT ADDRESS:** 8000 West Sunrise Blvd.  
Plantation, FL 33322, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA

**FCC RULE PART(S):** Part 15.247

**IC SPECIFICATION(S):** RSS-210 Issue 8

**FCC ID:** IHDP56ME2

**Test Device Serial No.:** LS3A2K0003,  Production  Pre-Production  Engineering  
LS3A280072

**FCC CLASSIFICATION:** Digital Transmission System (DTS)

**DATE(S) OF TEST:** September 14 - 27, 2011


**TEST REPORT S/N:** 0Y1109131629.IHD



### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> IHDP56ME2	 <b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 3 of 69	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

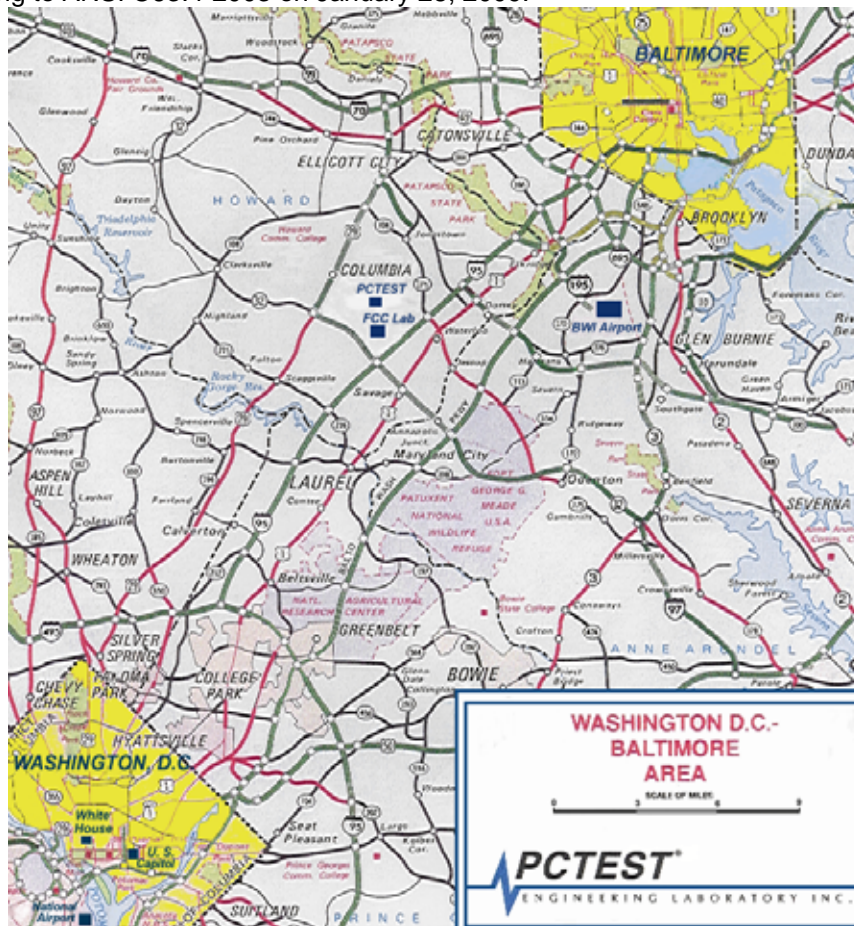


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 4 of 69

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Portable Handset FCC ID: IHDP56ME2**. The EUT consisted of the following component(s):

Manufacturer	FCC ID	Description
Motorola	IHDP56ME2	Portable Handset

**Table 2-1. EUT Equipment Description**

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11a/b/g/n WLAN, 802.11a/n UNII, Bluetooth, Bluetooth (LE)

### 2.3 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 5 of 69	


## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure


The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC procedure dated March 23, 2005 entitled "Measurements of Digital Transmission Systems Operating Under Section 15.247" were used in the measurement of the **Motorola Portable Handset** FCC ID: IHDP56ME2.

Deviation from measurement procedure.....None


### 3.2 Conducted Emissions




**Figure 3-1. Shielded Enclosure Line-Conducted Test Facility**



**Figure 3-2. Line Conducted Emission Test Set-Up**



**Figure 3-3. Wooden Table & Bonded LISNs**




**Figure 3-4. LISN Schematic Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.


The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: IHDP56ME2	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)	<b>MOTOROLA</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 6 of 69


### 3.3 Radiated Emissions




**Figure 3-5. 3-Meter Test Site**



**Figure 3-6. Dimensions of Outdoor Test Site**

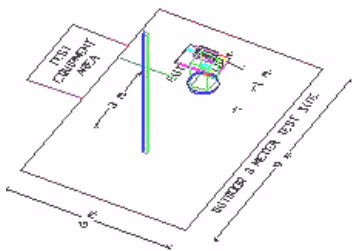

**Figure 3-7. Turntable and System Setup**

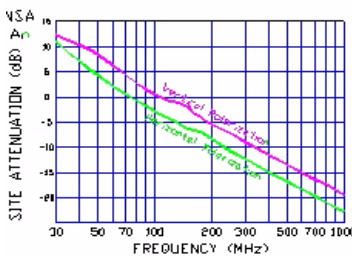

**Figure 3-8. Normalized Site Attenuation Curves (H&V)**

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 7 of 69

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.



**Conclusion:**

The **Motorola Portable Handset FCC ID: IHDP56ME2** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	163	5815
155	5775	165	5825
157	5785		

**Table 4-1. Frequency/ Channel Operations**



<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 8 of 69	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	8447D	Broadband Amplifier	3/17/2011	Annual	3/17/2012	1937A03348
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/8/2011	Annual	2/8/2012	3008A00985
Agilent	N9020A	MXA Signal Analyzer	10/8/2010	Annual	10/8/2011	US46470561
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	8/5/2012	MY51210133
Anritsu	ML2495A	Power Meter	10/13/2010	Annual	10/13/2011	941001
Anritsu	MA2411B	Pulse Sensor	N/A		N/A	1027293
Emco	3116	Horn Antenna (18 - 40GHz)	10/9/2008	Triennial	10/9/2011	9203-2178
Emco	3816/2	LISN	11/5/2010	Biennial	11/5/2012	9707-1077
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	7/5/2011	Biennial	7/5/2013	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	10/17/2009	Biennial	10/17/2011	A051107

**Table 5-1. Annual Test Equipment Calibration Schedule**

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 9 of 69	

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Motorola Mobility, Inc.  
 FCC ID: IHDP56ME2  
 FCC Classification: Digital Transmission System (DTS)  
 Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)  
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
15.247(a)(2)	RSS-210 [A8.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.247(b)(3)	RSS-210 [A8.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3, 6.4
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 6.6
15.247(d)	RSS-210 [A8.5]	Band Edge / Out-of-Band Emissions	Conducted < 20dBc		PASS	Sections 6.7, 6.8
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 6.9, 6.10
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.11
<b>RECEIVER MODE (RX) / DIGITAL EMISSIONS</b>						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits	LINE CONDUCTED	PASS	Part 15B Test Report
15.109	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B Test Report

**Table 6-1. Summary of Test Results**

**Note:**

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- The conducted power for channel 11 in 802.11g and 802.11n (2.4GHz) modes were reduced in order to bring the device into compliance with the field strength limit at the 2483.5MHz restricted band edge. As a result, data is provided herein for channel 10 to show that this device still complies when transmitting on channel 10 at maximum power.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 10 of 69

## 6.2 6dB Bandwidth Measurement – 802.11a/b/g/n §15.247(a)(2); RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**

Frequency [MHz]	Channel No.	802.11 Mode	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	9.08	0.500	Pass
2437	6	b	9.10	0.500	Pass
2462	11	b	9.10	0.500	Pass
2412	1	g	15.30	0.500	Pass
2437	6	g	15.14	0.500	Pass
2462	11	g	15.32	0.500	Pass
2412	1	n	15.62	0.500	Pass
2437	6	n	15.64	0.500	Pass
2462	11	n	15.14	0.500	Pass
5745	149	a	15.12	0.500	Pass
5785	157	a	15.12	0.500	Pass
5825	165	a	15.12	0.500	Pass
5745	149	n	15.12	0.500	Pass
5785	157	n	15.48	0.500	Pass
5825	165	n	15.12	0.500	Pass

Table 6-2. Conducted Bandwidth Measurements






Figure 6-1. Test Instrument & Measurement Setup

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset	Page 11 of 69	



Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)




Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 12 of 69




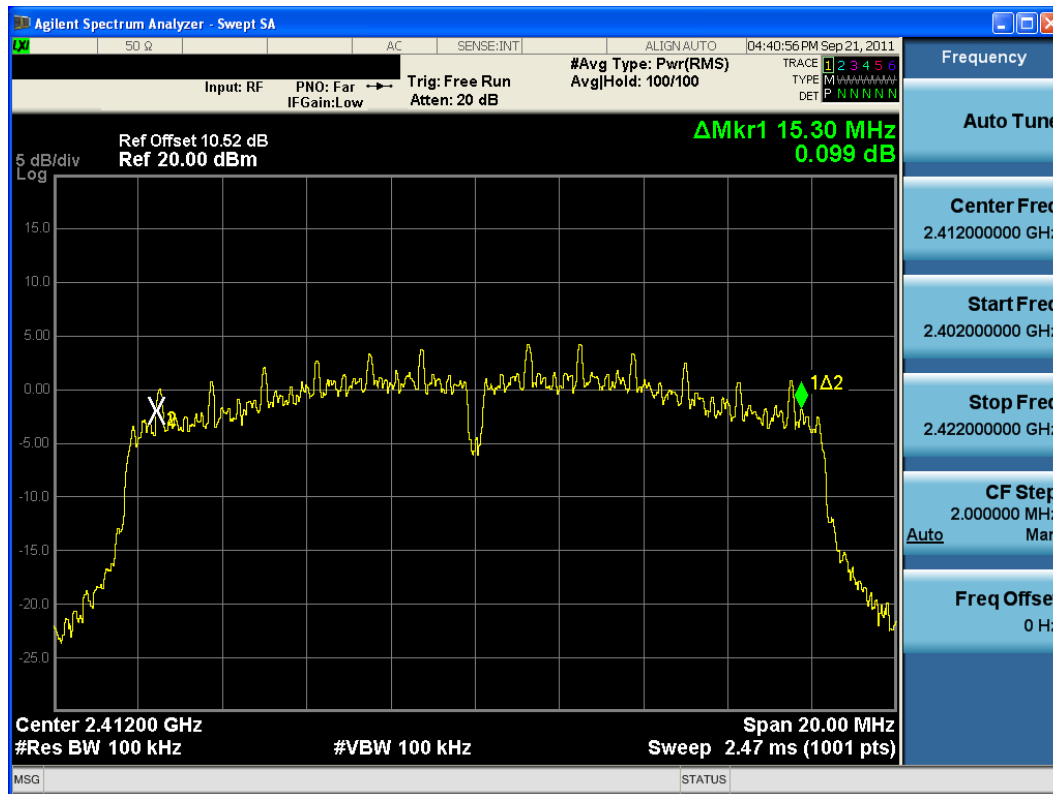Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)




Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 13 of 69

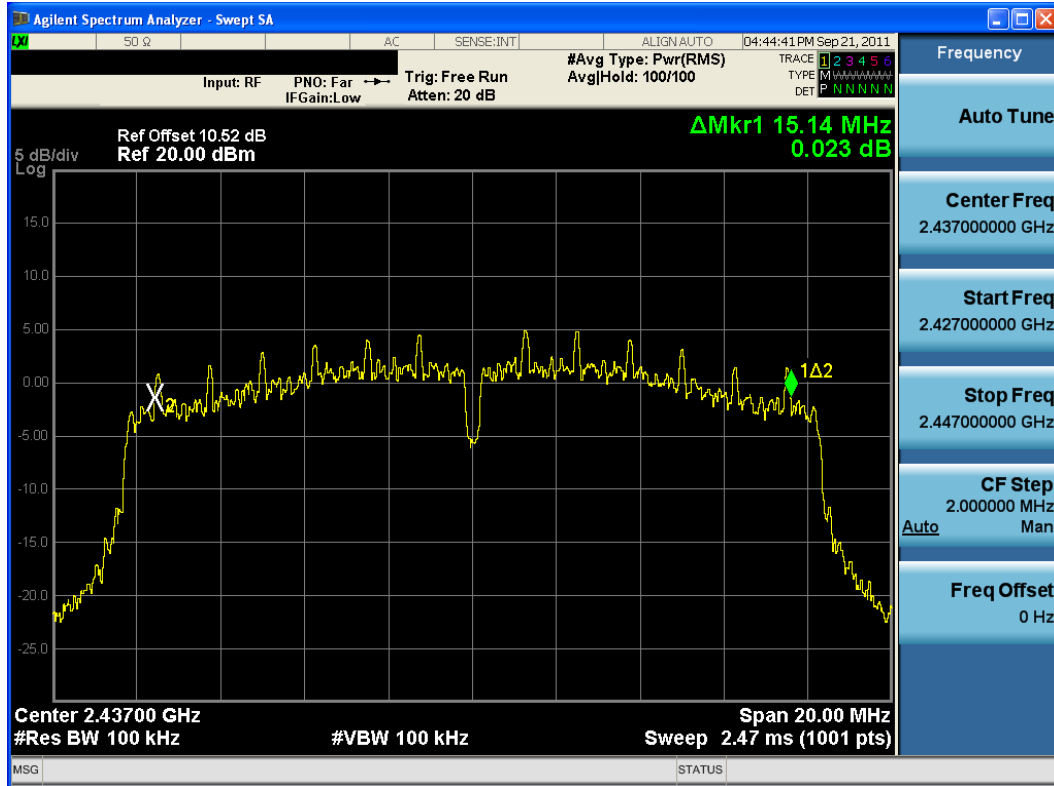


Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

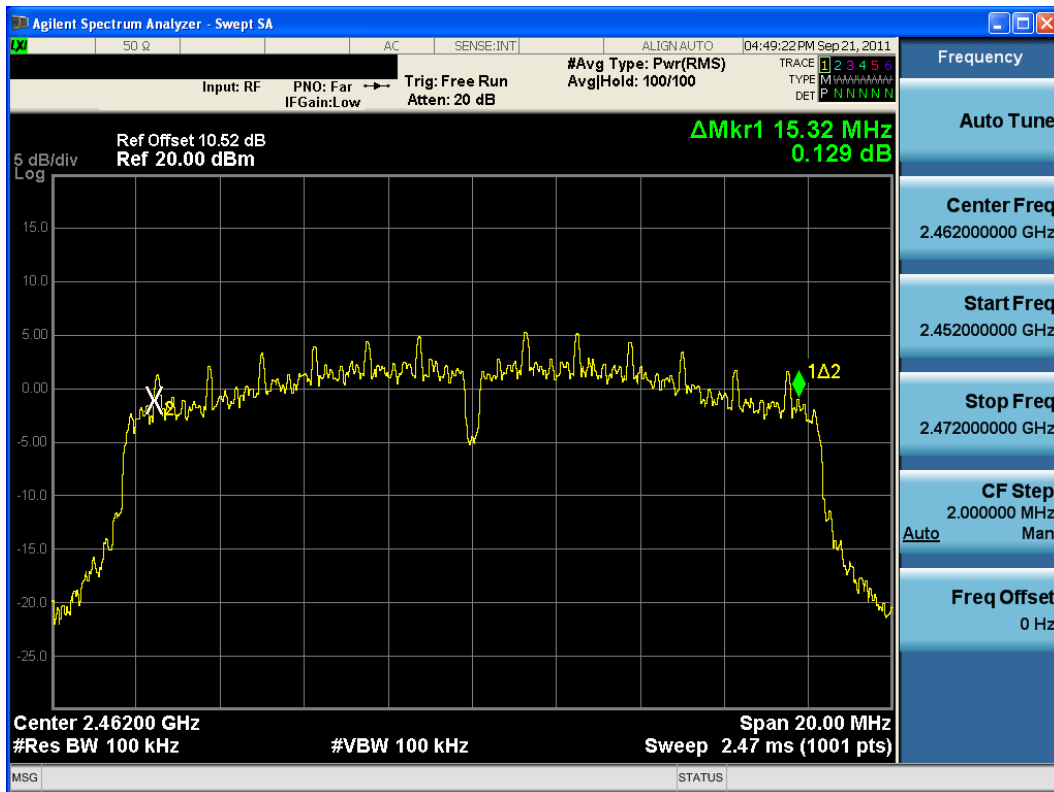


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 14 of 69

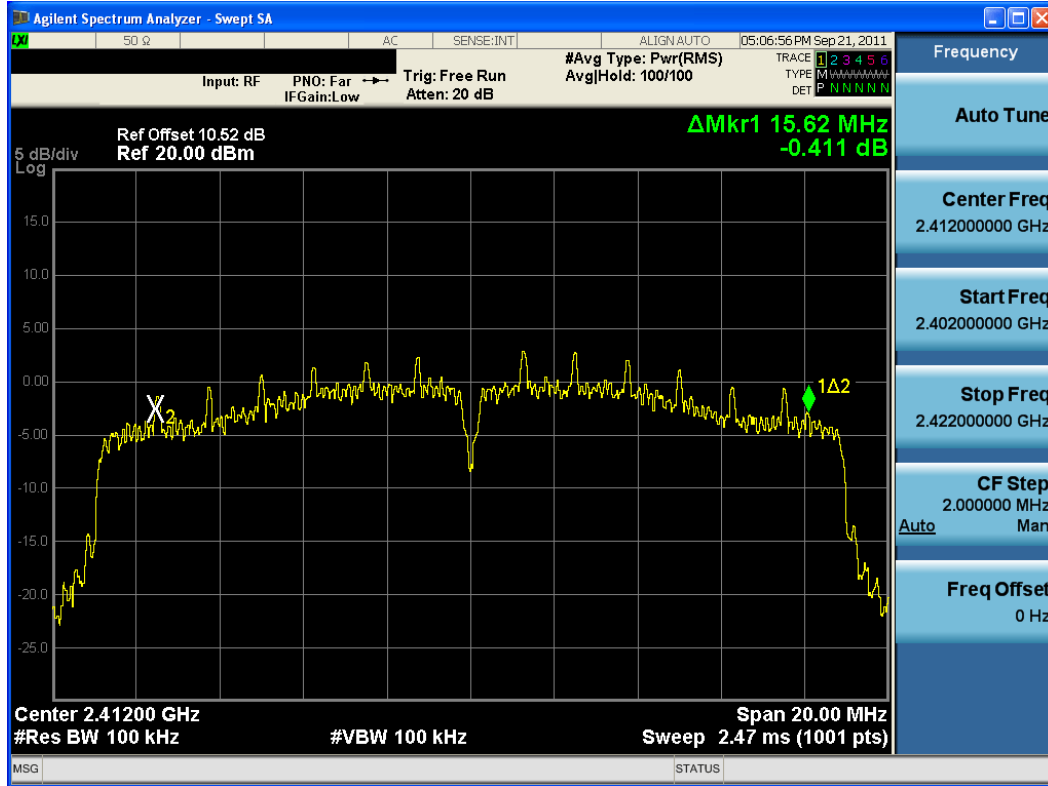


Plot 6-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

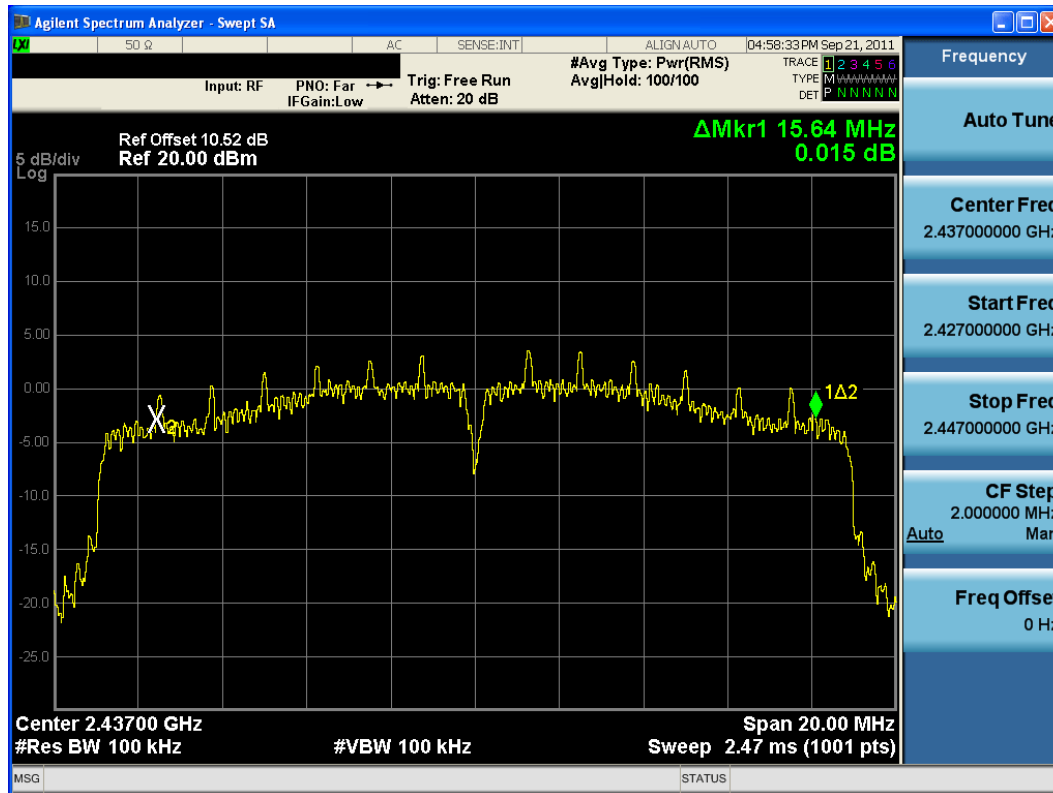


Plot 6-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 15 of 69

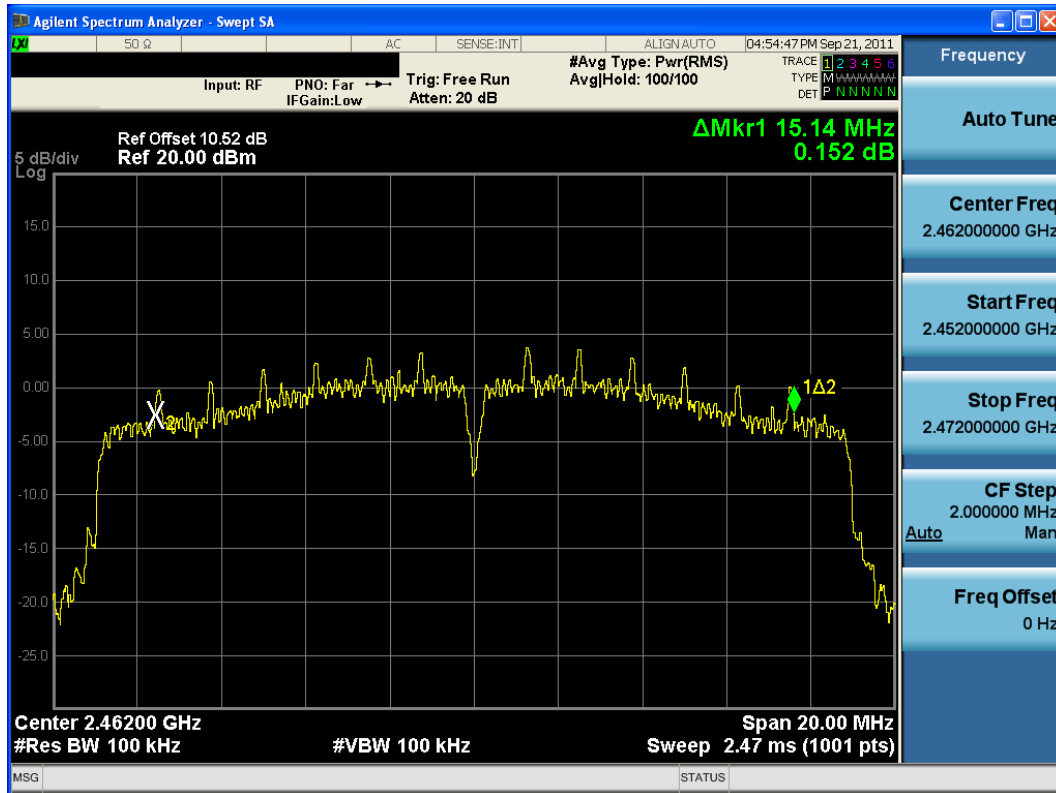


Plot 6-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

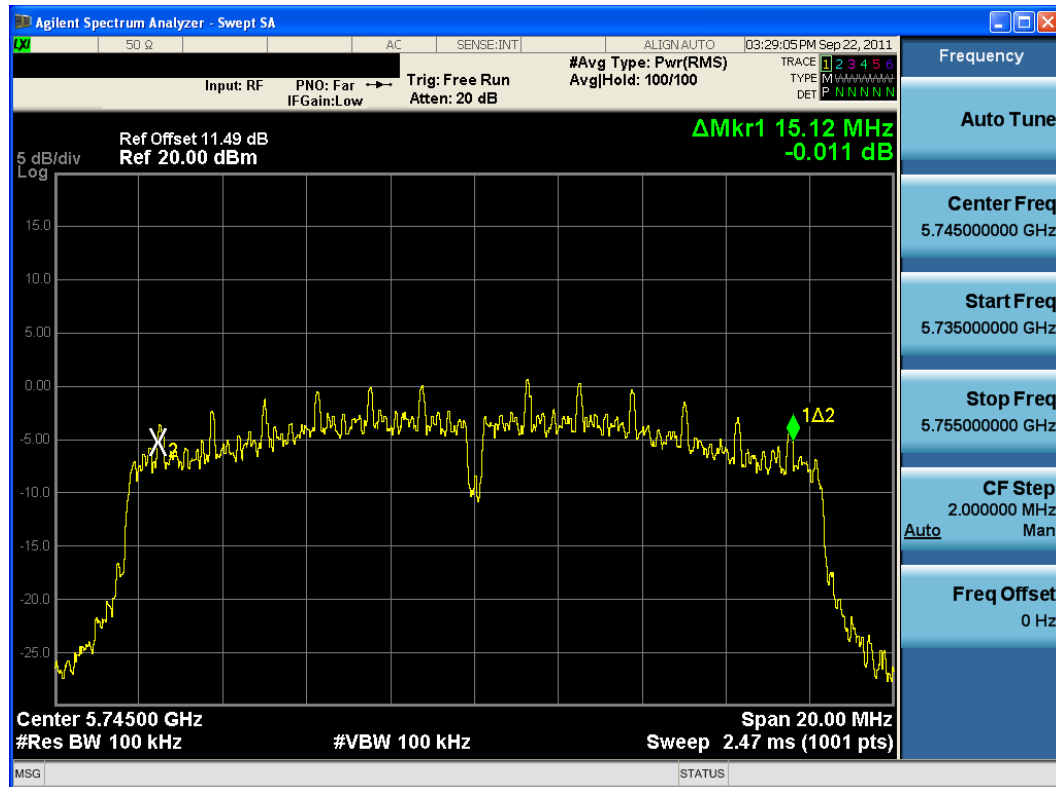


Plot 6-10. 6dB Bandwidth Plot (802.11a – Ch. 149)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 16 of 69

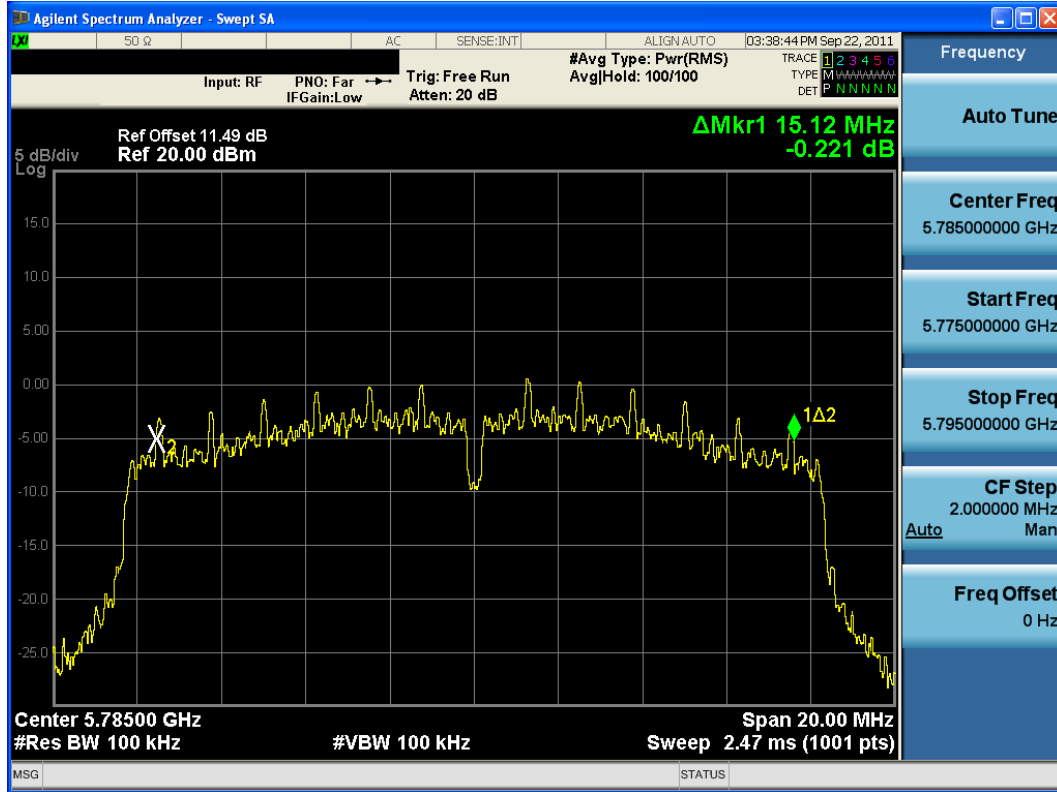


Plot 6-11. 6dB Bandwidth Plot (802.11a – Ch. 157)

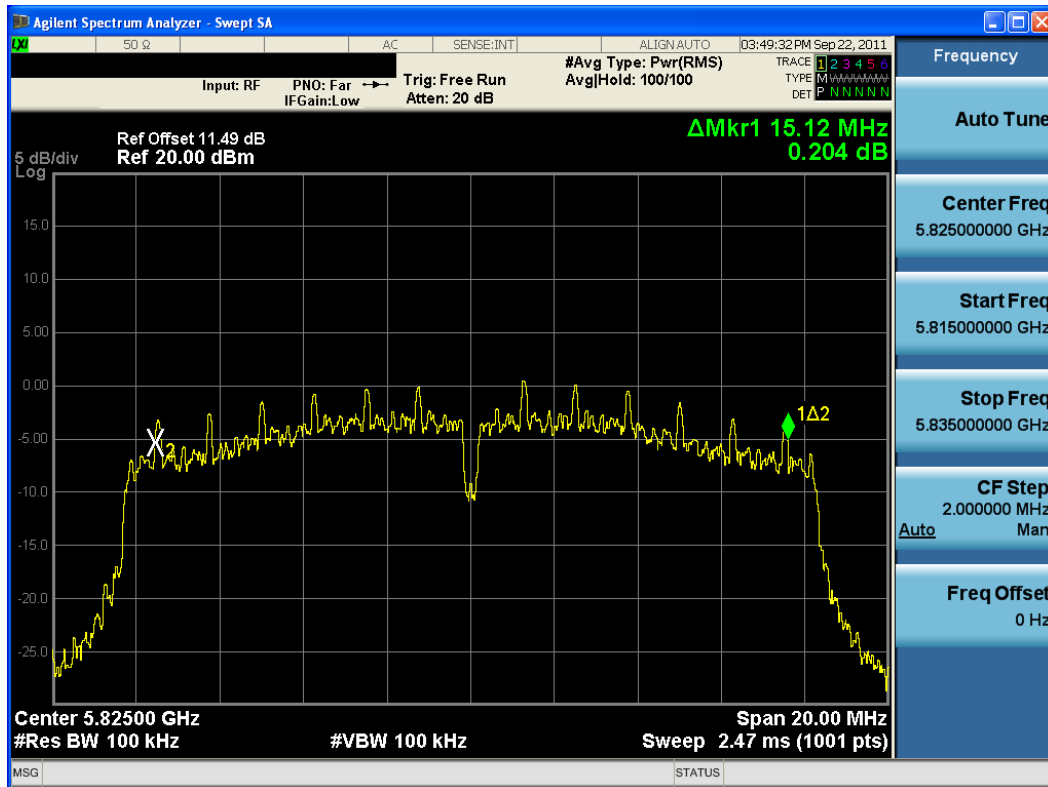


Plot 6-12. 6dB Bandwidth Plot (802.11a – Ch. 165)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 17 of 69

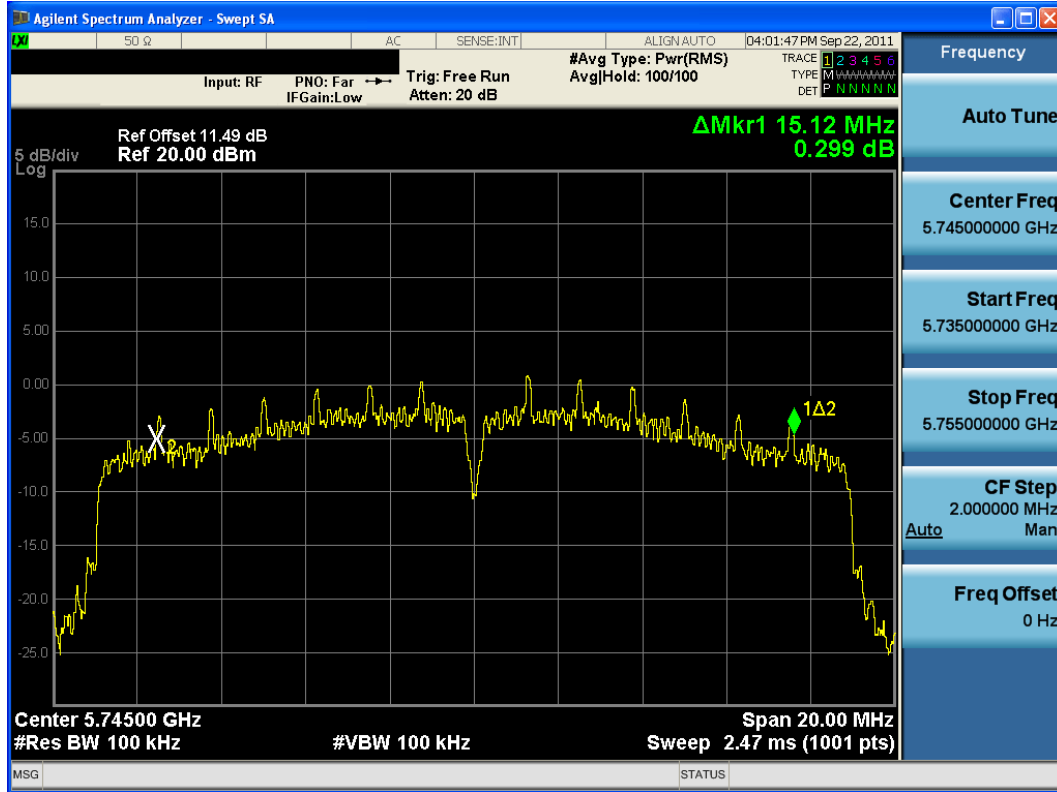

Plot 6-13. 6dB Bandwidth Plot (802.11n (5.8GHz) – Ch. 149)

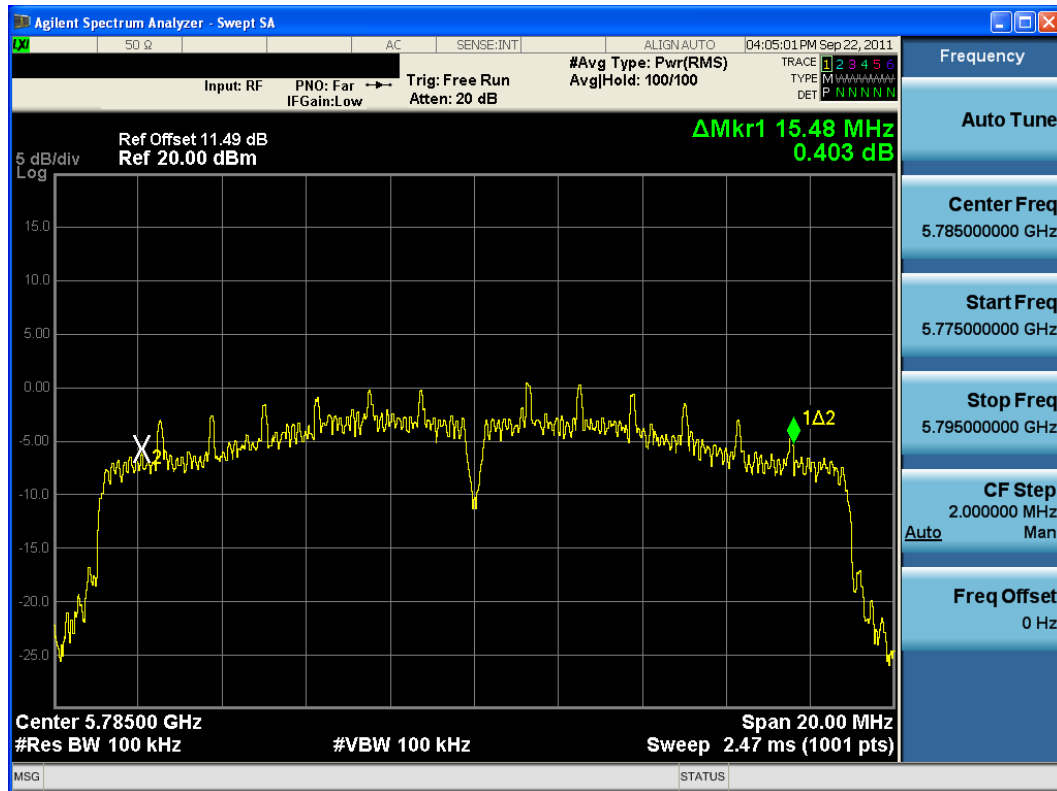

Plot 6-14. 6dB Bandwidth Plot (802.11n (5.8GHz) – Ch. 157)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 18 of 69



### 6.3 Output Power Measurement – 802.11b/g §15.247(b)(3); RSS-210 [A8.4]


A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Mode	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	Average	15.25	15.27	15.26	15.34
			Peak	17.40	17.50	17.12	17.19
802.11b	2437	6	Average	15.62	15.68	15.67	15.63
			Peak	17.84	17.81	17.45	17.51
802.11b	2462	11	Average	16.15	16.08	16.14	16.09
			Peak	18.27	18.29	17.91	17.92



**Table 6-3. 802.11b Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	Average	15.11	15.11	14.02	14.02	12.11	12.14	12.10	12.06
			Peak	22.53	22.65	21.39	21.41	19.67	19.65	19.65	19.78
802.11g	2437	6	Average	15.60	15.55	14.50	14.52	12.58	12.54	12.56	12.70
			Peak	23.05	23.04	21.91	21.95	20.15	20.02	20.05	20.25
802.11g	2457	10	Average	15.82	15.81	14.79	14.84	12.88	12.75	12.81	12.86
			Peak	23.05	22.91	21.88	22.11	20.23	20.15	20.04	20.34
802.11g	2462	11	Average	14.01	13.99	13.99	13.92	12.95	12.94	12.98	12.93
			Peak	21.39	21.42	21.25	21.23	20.21	20.44	20.39	20.26

**Table 6-4. 802.11g Conducted Output Power Measurements**



**Figure 6-2. Test Instrument & Measurement Setup**

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 20 of 69

## 6.4 Output Power Measurement – 802.11n (2.4GHz)

### §15.247(b)(3); RSS-210 [A8.4]

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Mode	Freq [MHz]	Channel	Detector	Conducted Power [dBm]							
				Data Rate [Mbps] 400ns Guard Interval							
				7.2	14.4	22	29	43	58	65	72
802.11n	2412	1	Average	13.46	13.89	13.90	12.08	12.05	11.98	11.98	9.63
			Peak	20.87	21.56	21.46	19.51	19.72	19.66	19.63	17.17
802.11n	2437	6	Average	13.93	14.53	14.47	12.61	12.67	12.59	12.50	10.10
			Peak	21.42	21.90	21.92	20.23	20.08	20.08	20.00	17.65
802.11n	2457	10	Average	14.55	15.01	15.03	13.31	13.22	11.76	11.69	10.84
			Peak	22.21	22.73	22.75	21.19	20.78	19.49	19.41	18.35
802.11n	2462	11	Average	14.18	14.09	14.10	13.27	13.36	11.81	11.80	10.95
			Peak	22.06	21.43	21.56	20.74	20.86	19.20	19.23	18.46

Table 6-5. 802.11n (2.4GHz – 400ns Guard Interval) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	Conducted Power [dBm]							
				Data Rate [Mbps] 800ns Guard Interval							
				6.5	13	20	26	39	52	58	65
802.11n	2412	1	Average	13.45	13.95	13.91	12.10	12.09	11.95	12.10	9.55
			Peak	20.89	21.23	21.35	19.52	19.69	19.56	19.66	17.23
802.11n	2437	6	Average	13.89	14.55	14.44	12.60	12.65	12.61	12.50	10.00
			Peak	21.22	21.72	21.89	20.21	20.05	20.11	20.10	17.57
802.11n	2457	10	Average	14.48	15.00	15.06	13.21	13.22	11.65	11.70	10.91
			Peak	21.98	22.39	22.41	20.55	20.89	19.13	19.15	18.42
802.11n	2462	11	Average	14.14	14.17	14.25	13.29	13.24	11.81	11.73	10.96
			Peak	21.83	21.62	21.67	20.71	20.65	19.30	19.28	18.45

Table 6-6. 802.11n (2.4GHz – 800ns Guard Interval) Conducted Output Power Measurements




Figure 6-3. Test Instrument & Measurement Setup

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 21 of 69

## 6.5 Output Power Measurement – 802.11a/n (5.8GHz)

**§15.247(b)(3); RSS-210 [A8.4]**

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

Mode	Freq [MHz]	Channel	Detector	Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	Average	10.50	10.45	10.52	10.49	10.45	10.40	10.48	10.52
			Peak	17.80	17.76	18.00	17.96	17.95	17.75	17.92	18.01
802.11a	5765	153	Average	10.51	10.48	10.54	10.59	10.42	10.45	10.42	10.44
			Peak	17.87	17.86	17.84	17.99	17.81	17.85	17.90	18.04
802.11a	5785	157	Average	10.55	10.57	10.50	10.46	10.40	10.39	10.45	10.40
			Peak	17.80	17.73	18.04	17.86	17.70	17.65	17.90	17.76
802.11a	5805	161	Average	10.52	10.49	10.42	10.50	10.45	10.40	10.40	10.47
			Peak	18.03	17.74	17.79	17.99	17.70	17.85	17.76	17.82
802.11a	5825	165	Average	10.49	10.42	10.47	10.50	10.39	10.40	10.35	10.43
			Peak	18.11	17.93	18.17	17.90	17.85	17.74	17.77	17.82


**Table 6-7. 802.11a Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Cable Loss [dB]	Conducted Power [dBm]							
				Data Rate [Mbps] 400ns Guard Interval							
				7.2	14.4	22	29	43	58	65	72
802.11n	5745	149	Average	10.81	10.77	10.75	10.86	10.87	10.77	10.81	10.94
			Peak	19.38	19.45	19.47	19.54	19.58	19.49	19.55	19.78
802.11n	5765	153	Average	10.78	10.80	10.72	10.84	10.88	10.80	10.81	10.91
			Peak	19.33	19.40	19.41	19.60	19.66	19.57	19.60	19.52
802.11n	5785	157	Average	10.76	10.75	10.74	10.78	10.82	10.76	10.75	10.88
			Peak	19.23	19.32	19.36	19.25	19.71	19.38	19.43	19.68
802.11n	5805	161	Average	10.71	10.74	10.68	10.79	10.82	10.78	10.79	10.90
			Peak	19.11	19.66	19.39	19.48	19.67	19.44	19.43	19.59
802.11n	5825	165	Average	10.73	10.77	10.71	10.85	10.83	10.79	10.75	10.90
			Peak	19.25	19.4	19.40	19.58	19.50	19.56	19.49	19.56

**Table 6-8. 802.11n (5.8GHz – 400ns Guard Interval) Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Cable Loss [dB]	Conducted Power [dBm]							
				Data Rate [Mbps] 800ns Guard Interval							
				6.5	13	20	26	39	52	58	65
802.11n	5745	149	Average	10.87	10.85	10.80	10.92	10.89	10.85	10.84	11.00
			Peak	19.42	19.47	19.48	19.67	19.58	19.55	19.66	19.74
802.11n	5765	153	Average	10.80	10.80	10.79	10.86	10.91	10.85	10.86	10.97
			Peak	19.24	19.47	19.18	19.54	19.52	19.52	19.42	19.62
802.11n	5785	157	Average	10.80	10.79	10.79	10.89	10.92	10.79	10.78	10.98
			Peak	19.24	19.62	19.44	19.54	19.57	19.53	19.33	19.65
802.11n	5805	161	Average	10.81	10.81	10.82	10.86	10.88	10.81	10.80	10.92
			Peak	19.18	19.27	19.54	19.47	19.44	19.49	19.49	19.62
802.11n	5825	165	Average	10.25	10.30	10.27	10.37	10.33	10.37	10.31	10.46
			Peak	17.71	17.62	17.90	17.78	17.70	17.68	17.75	17.82

**Table 6-9. 802.11n (5.8GHz – 800ns Guard Interval) Conducted Output Power Measurements**



**Figure 6-4. Test Instrument & Measurement Setup**

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 22 of 69

## 6.6 Power Spectral Density (802.11a/b/g/n)

§15.247(e); RSS-210 [A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible power spectral density is 8 dBm in any 3 kHz band.**

Frequency [MHz]	Channel No.	802.11 Mode	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2412	1	b	-8.17	8.0	-16.17
2437	6	b	-8.21	8.0	-16.21
2462	11	b	-9.39	8.0	-17.39
2412	1	g	-9.02	8.0	-17.02
2437	6	g	-8.78	8.0	-16.78
2457	10	g	-6.99	8.0	-14.99
2462	11	g	-8.51	8.0	-16.51
2412	1	n (400ns)	-10.98	8.0	-18.98
2437	6	n (400ns)	-10.64	8.0	-18.64
2457	10	n (400ns)	-10.24	8.0	-18.24
2462	11	n (400ns)	-9.78	8.0	-17.78
5745	149	a	-13.70	8.0	-21.70
5785	157	a	-13.54	8.0	-21.54
5825	165	a	-13.20	8.0	-21.20
5745	149	n (400ns)	-13.68	8.0	-21.68
5785	157	n (400ns)	-13.77	8.0	-21.77
5825	165	n (400ns)	-13.33	8.0	-21.33

Table 6-10. Conducted Power Density Measurements





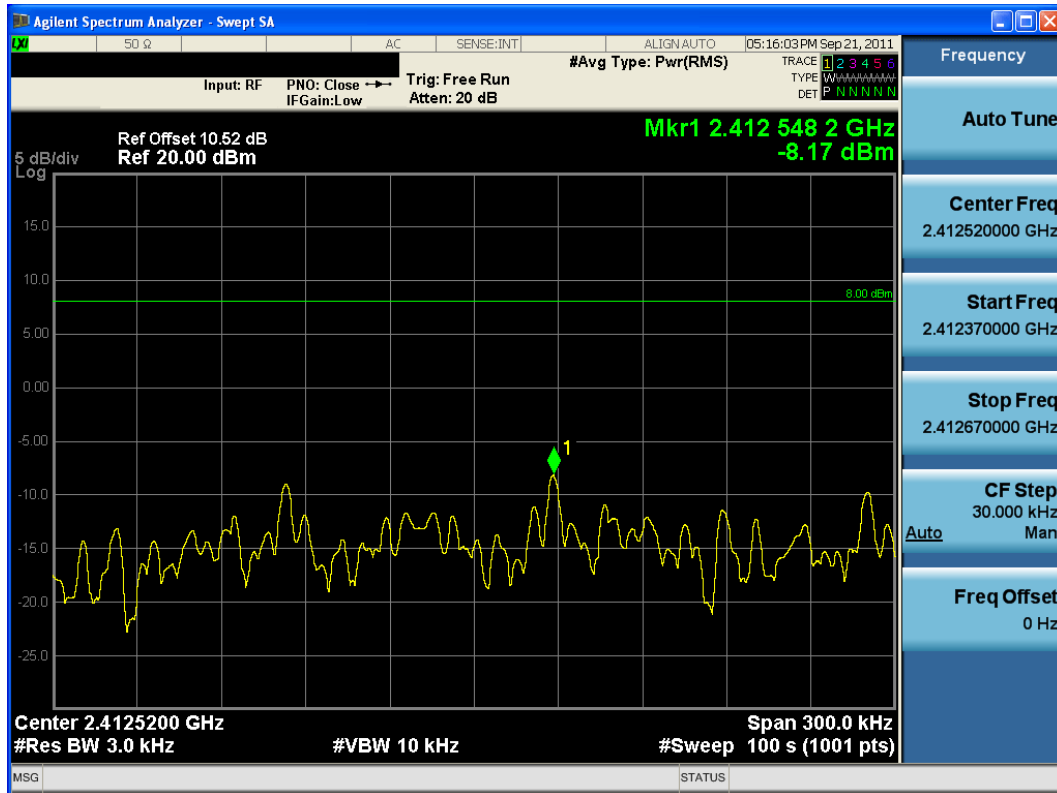


Figure 6-5. Test Instrument & Measurement Setup

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 23 of 69

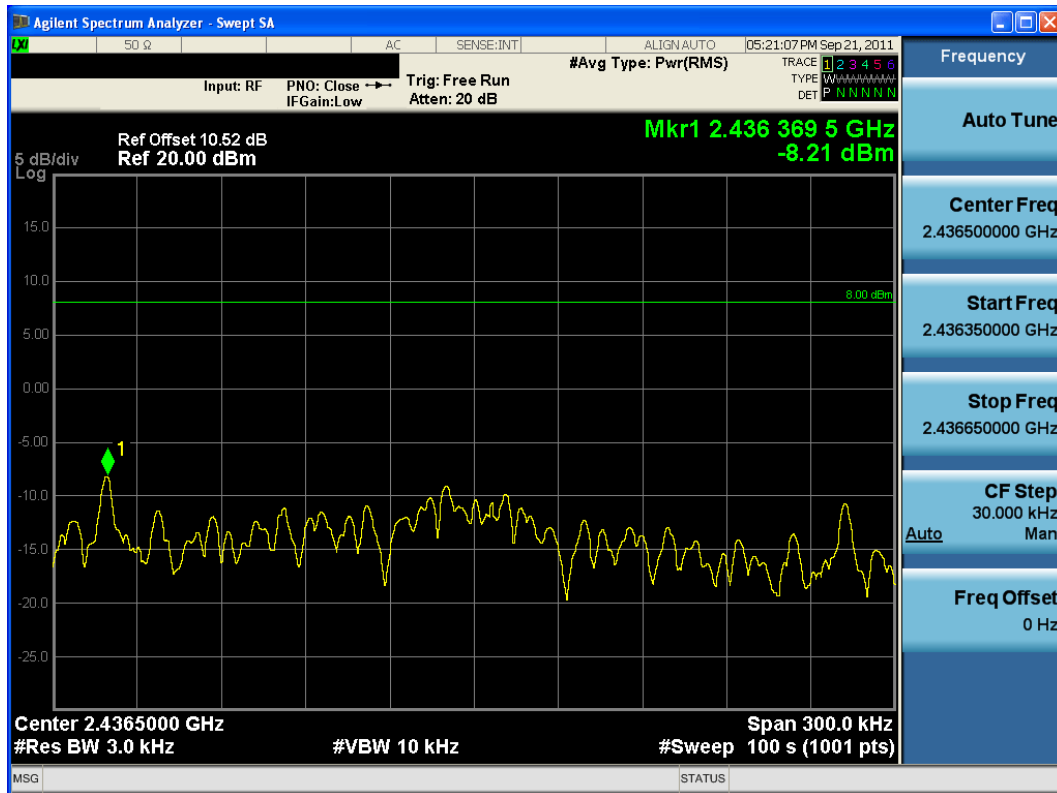


Plot 6-16. Power Spectral Density Plot (802.11b – Ch. 1)




Plot 6-17. Power Spectral Density Plot (802.11b – Ch. 6)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 24 of 69

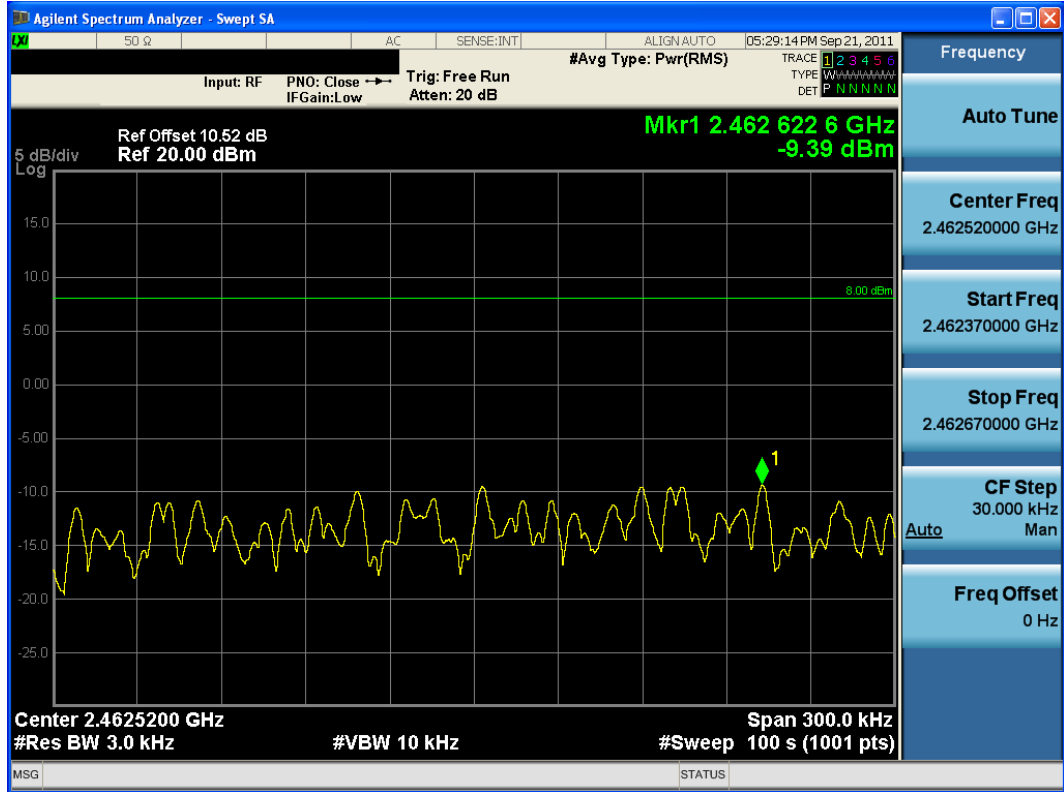


Plot 6-18. Power Spectral Density Plot (802.11b – Ch. 11)

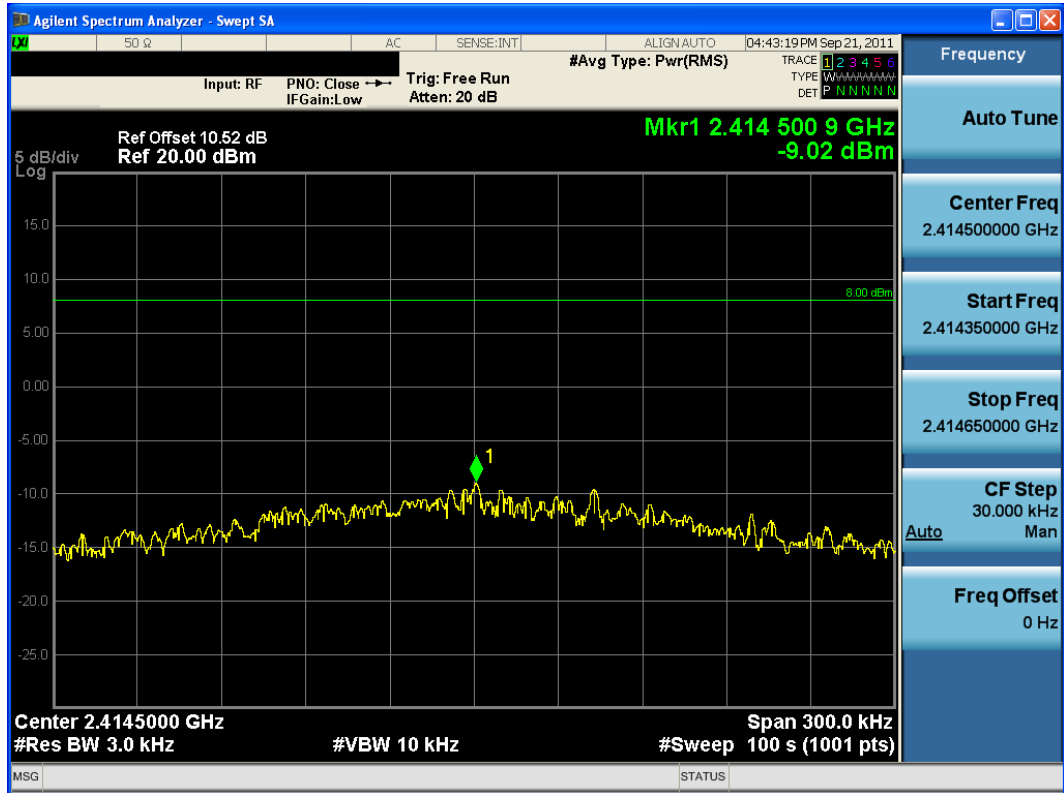


Plot 6-19. Power Spectral Density Plot (802.11g – Ch. 1)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 25 of 69

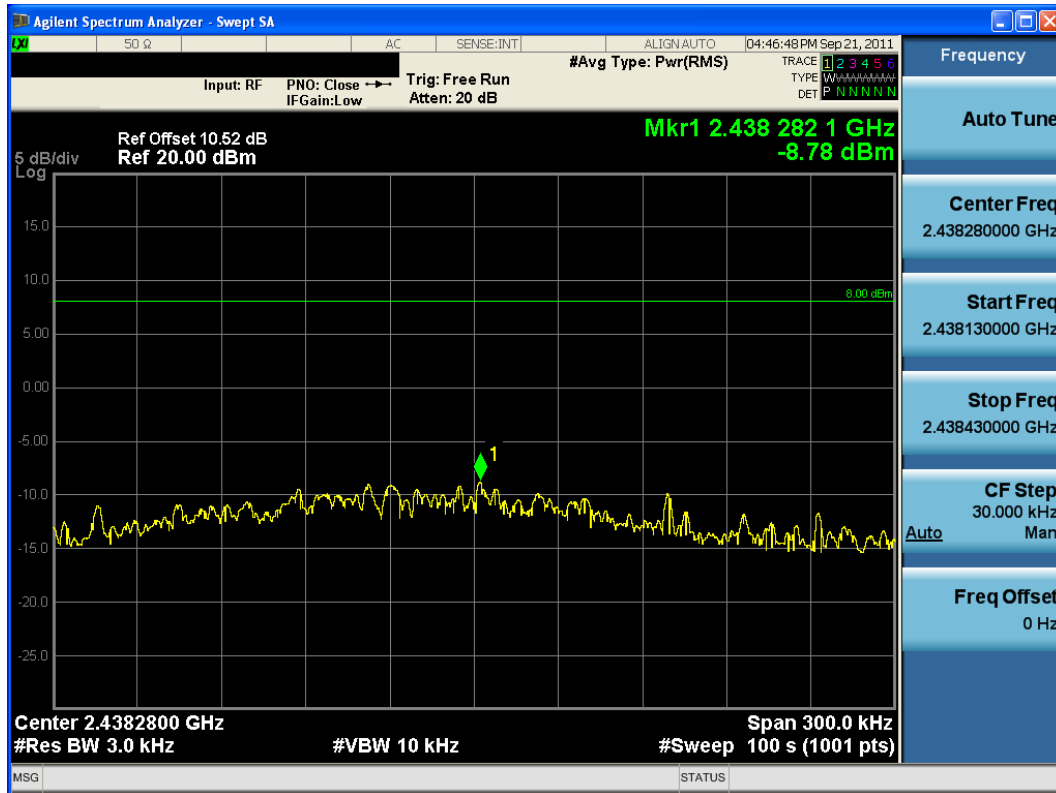


Plot 6-20. Power Spectral Density Plot (802.11g – Ch. 6)

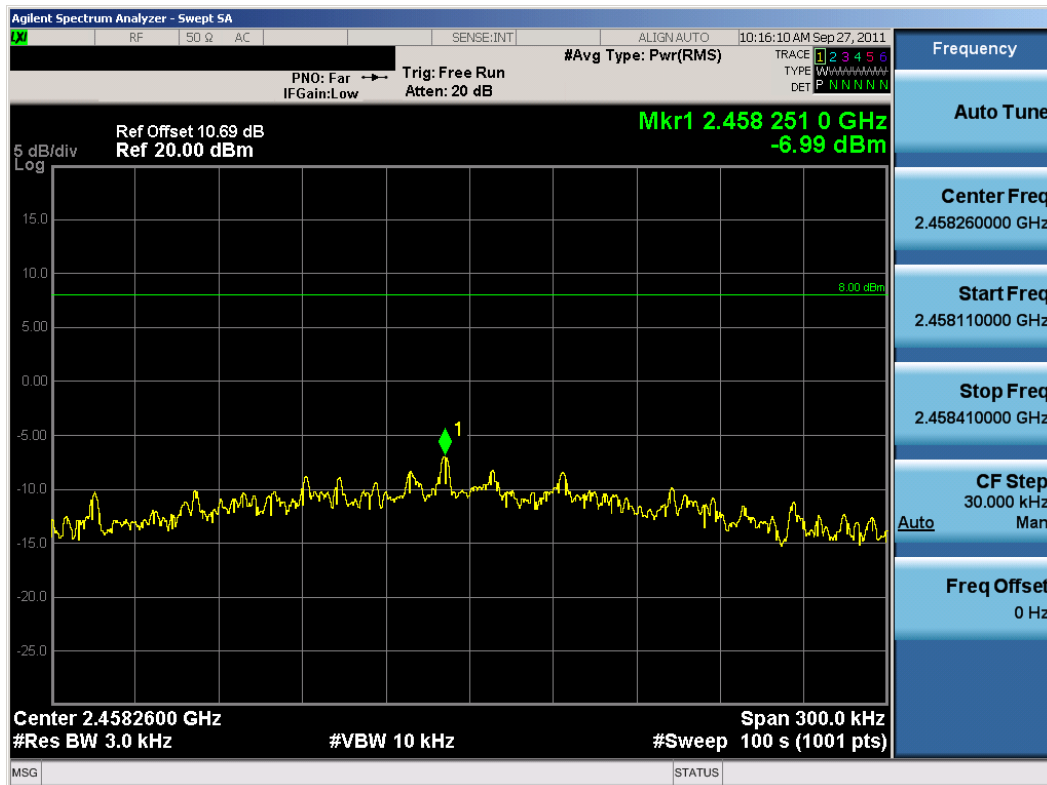


Plot 6-21. Power Spectral Density Plot (802.11g – Ch. 10)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 26 of 69

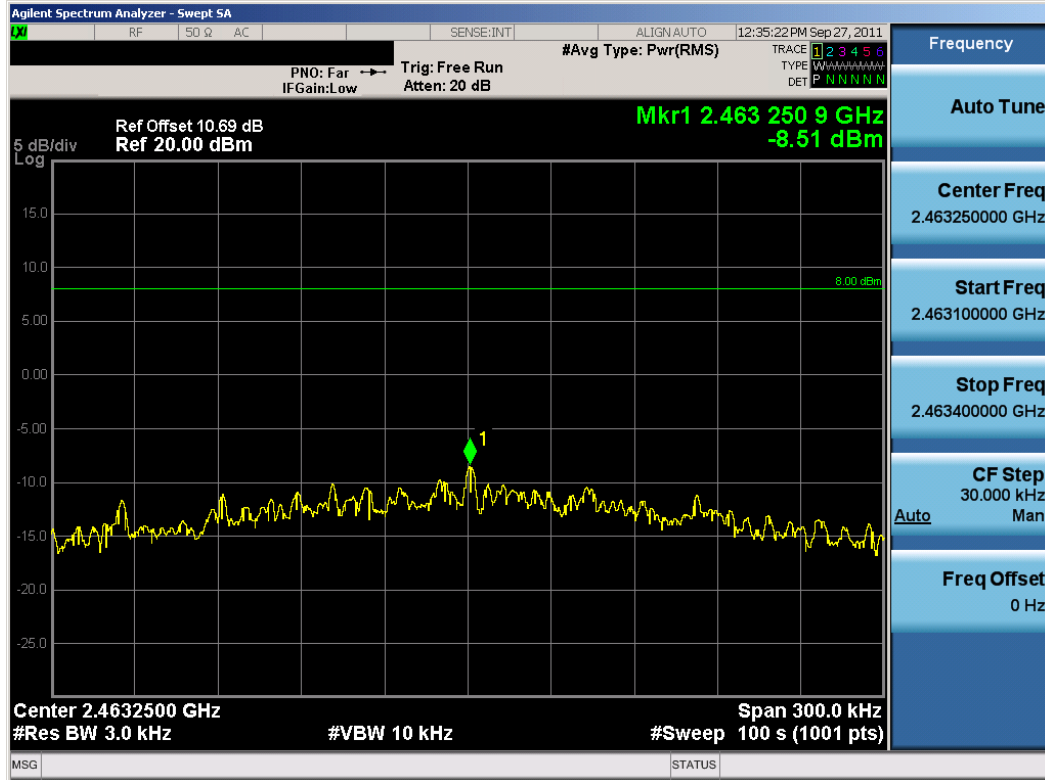


Plot 6-22. Power Spectral Density Plot (802.11g – Ch. 11)

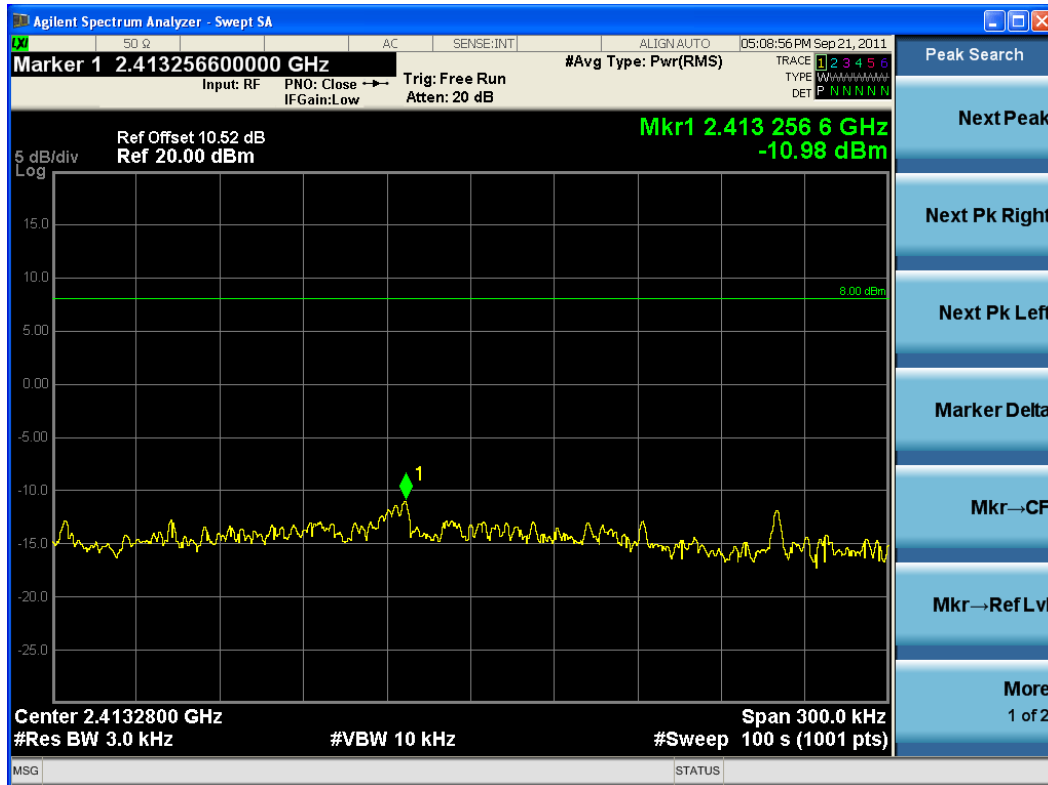


Plot 6-23. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 27 of 69



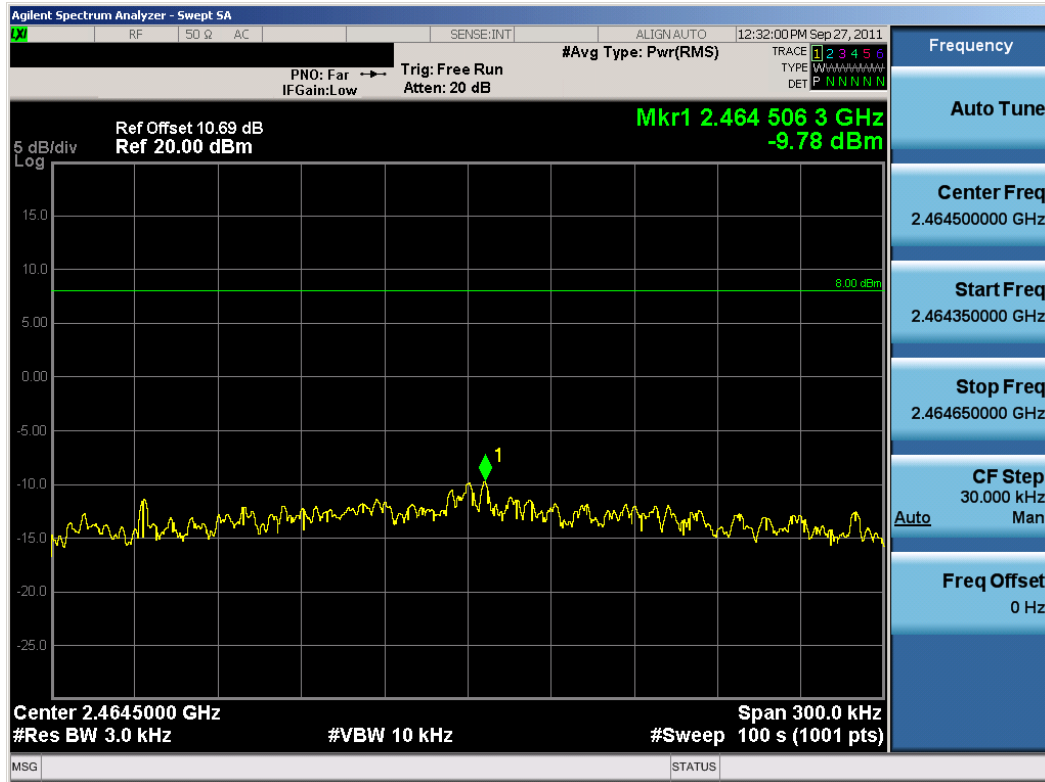


Plot 6-26. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

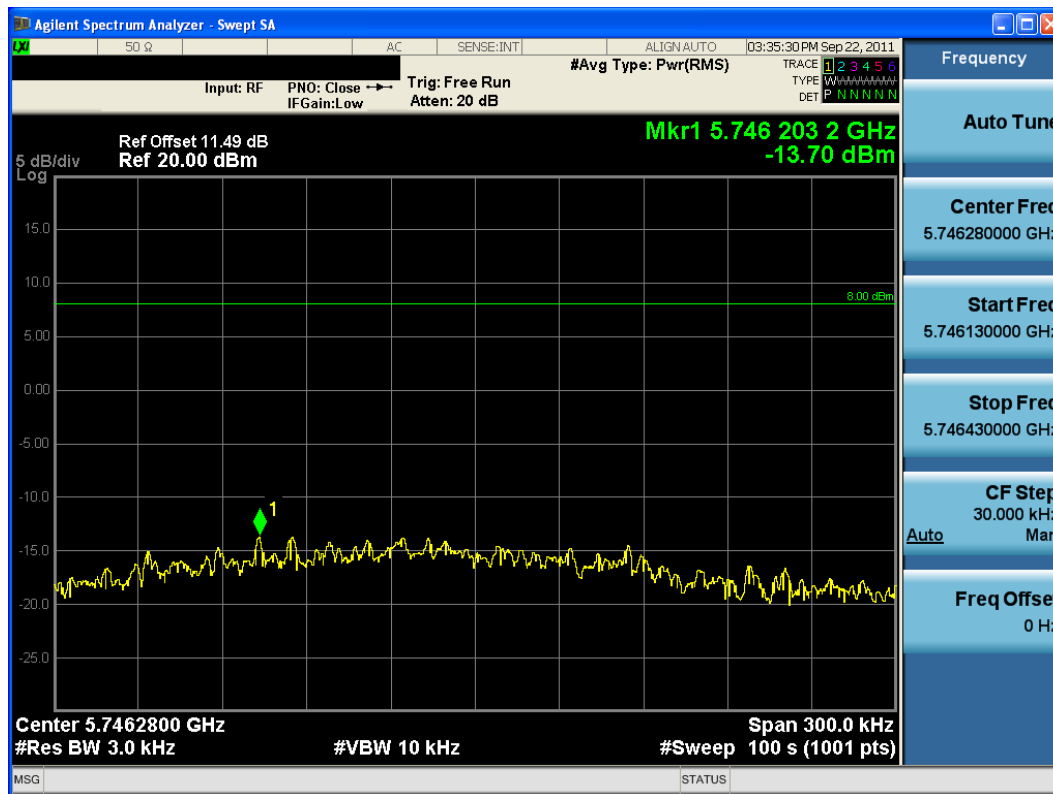


Plot 6-27. Power Spectral Density Plot (802.11a – Ch. 149)

FCC ID: IHDP56ME2			FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset			Page 29 of 69

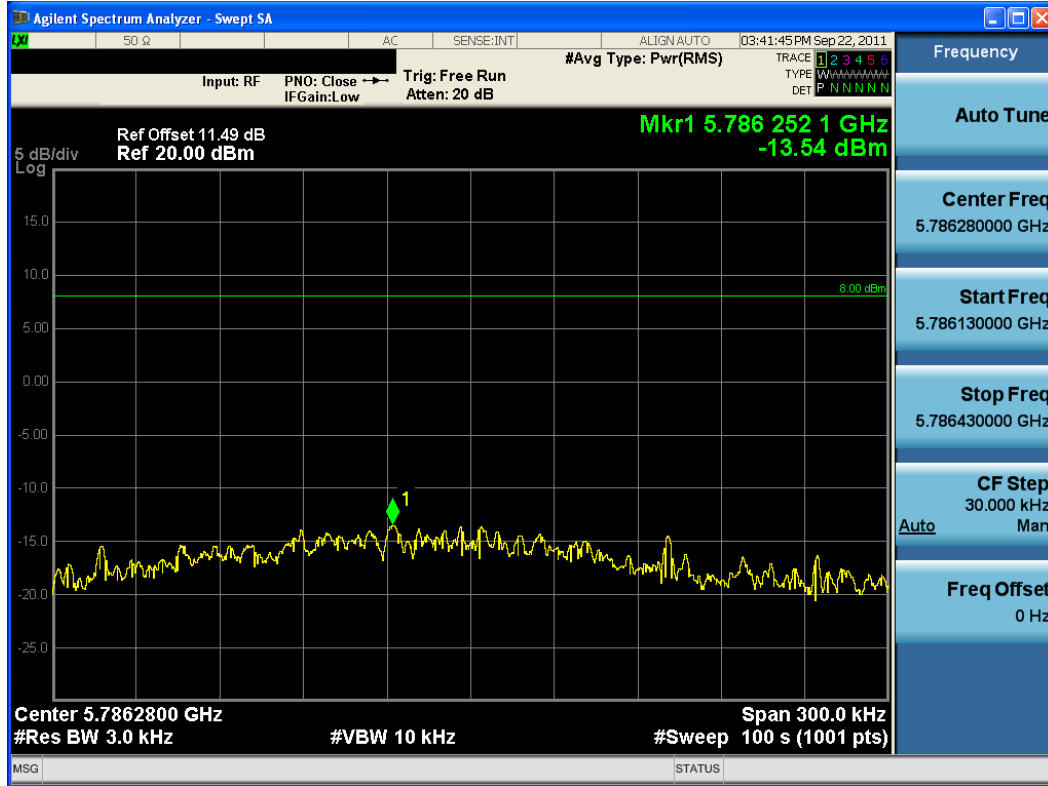


Plot 6-28. Power Spectral Density Plot (802.11a – Ch. 157)

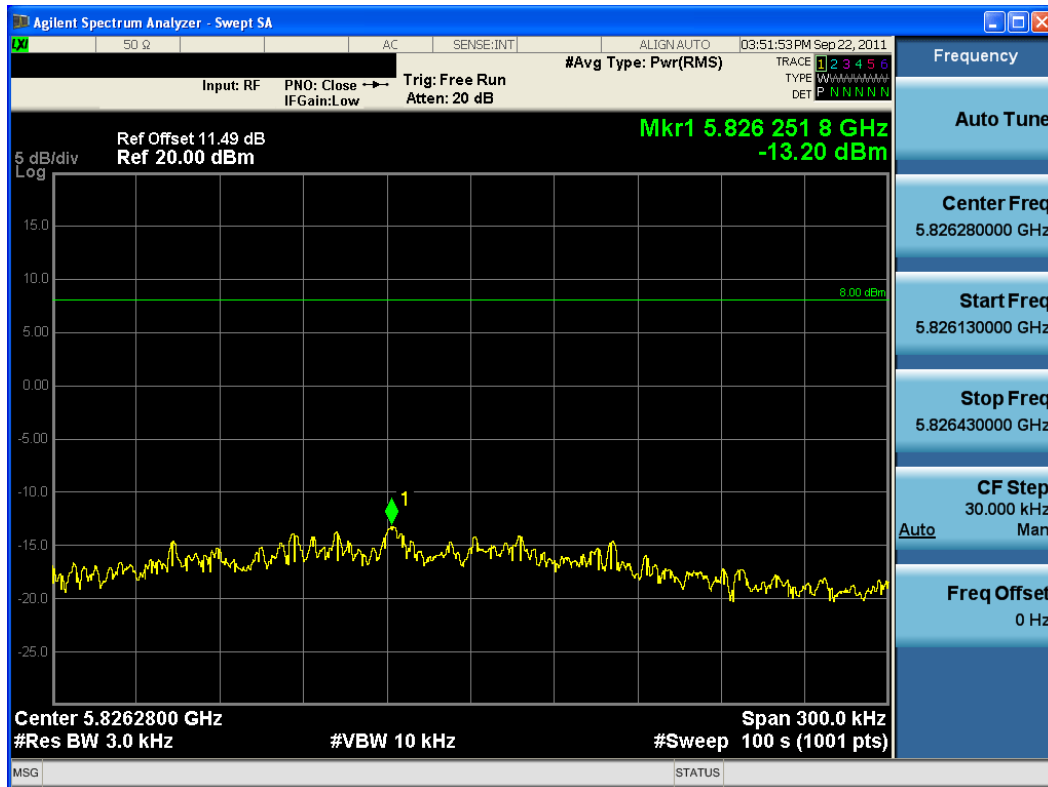


Plot 6-29. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 30 of 69

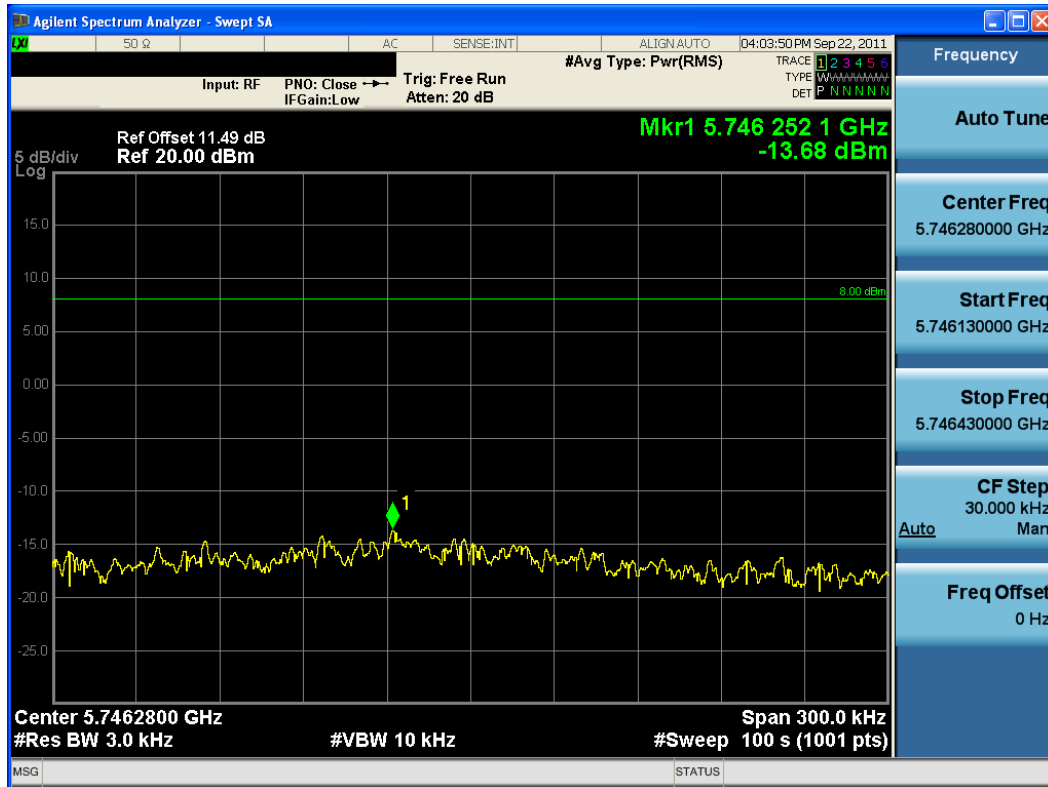


Plot 6-30. Power Spectral Density Plot (802.11n (5.8GHz) – Ch. 149)

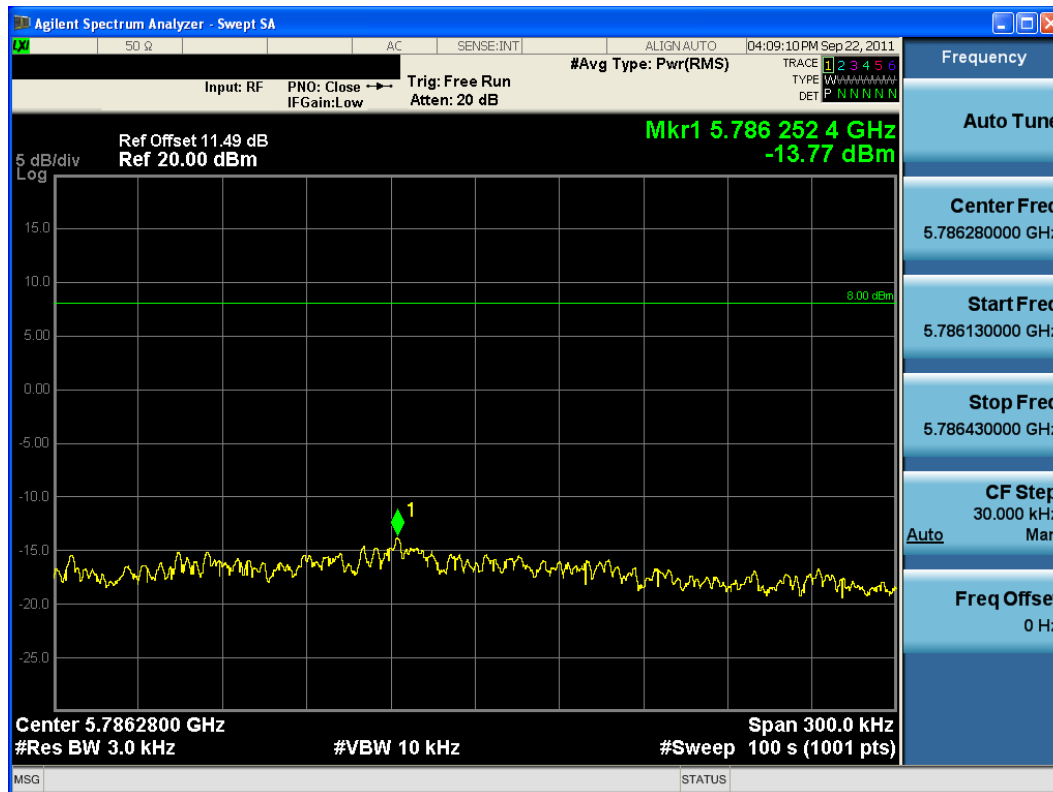

Plot 6-31. Power Spectral Density Plot (802.11n (5.8GHz) – Ch. 157)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 31 of 69

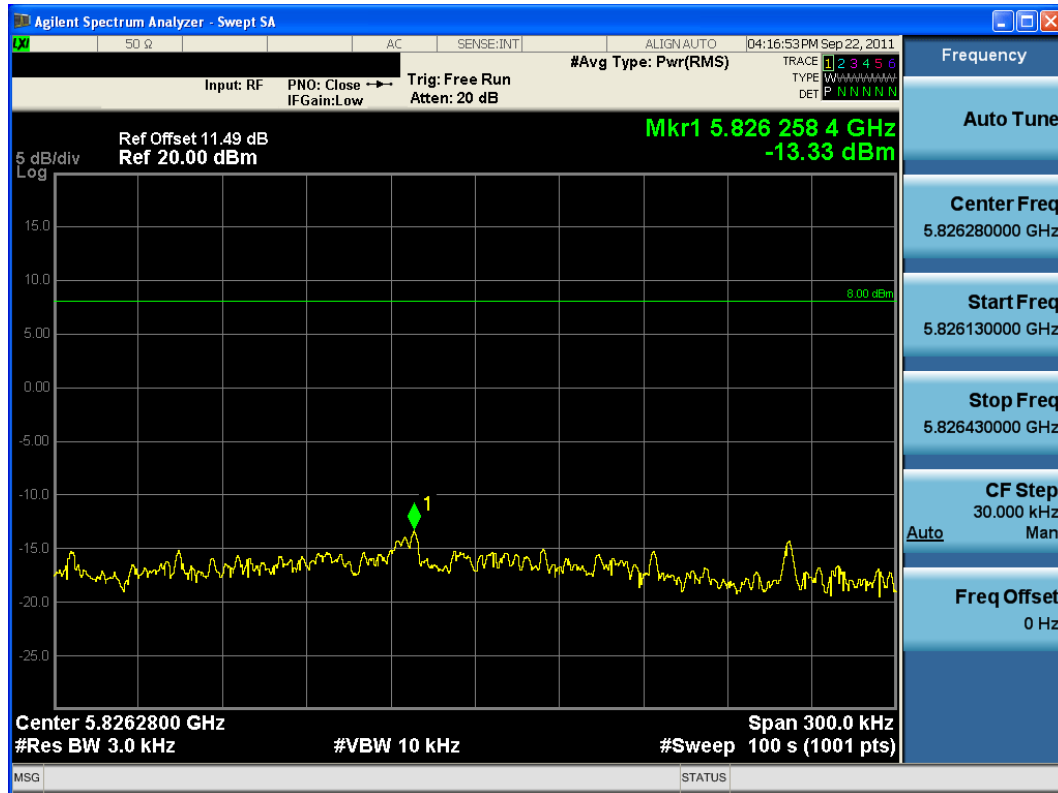

Plot 6-32. Power Spectral Density Plot (802.11n (5.8GHz) – Ch. 165)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 32 of 69

## 6.7 Conducted Emissions at the Band Edge


### §15.247(d); RSS-210 [A8.5]

For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6 Mbps for “a” mode, and 6.5/7.2Mbps for “n” mode. These settings produced the worst-case emissions.




Plot 6-33. Band Edge Plot (802.11b – Ch. 1)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 33 of 69

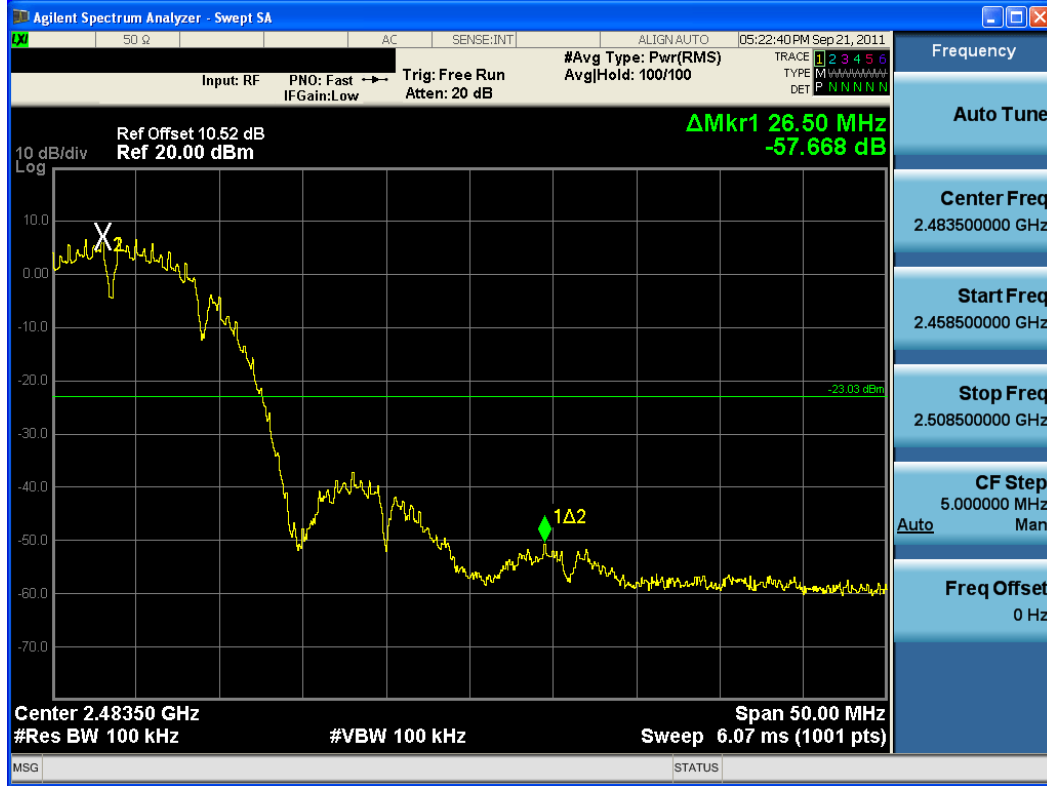


Plot 6-34. Band Edge Plot (802.11b – Ch. 11)

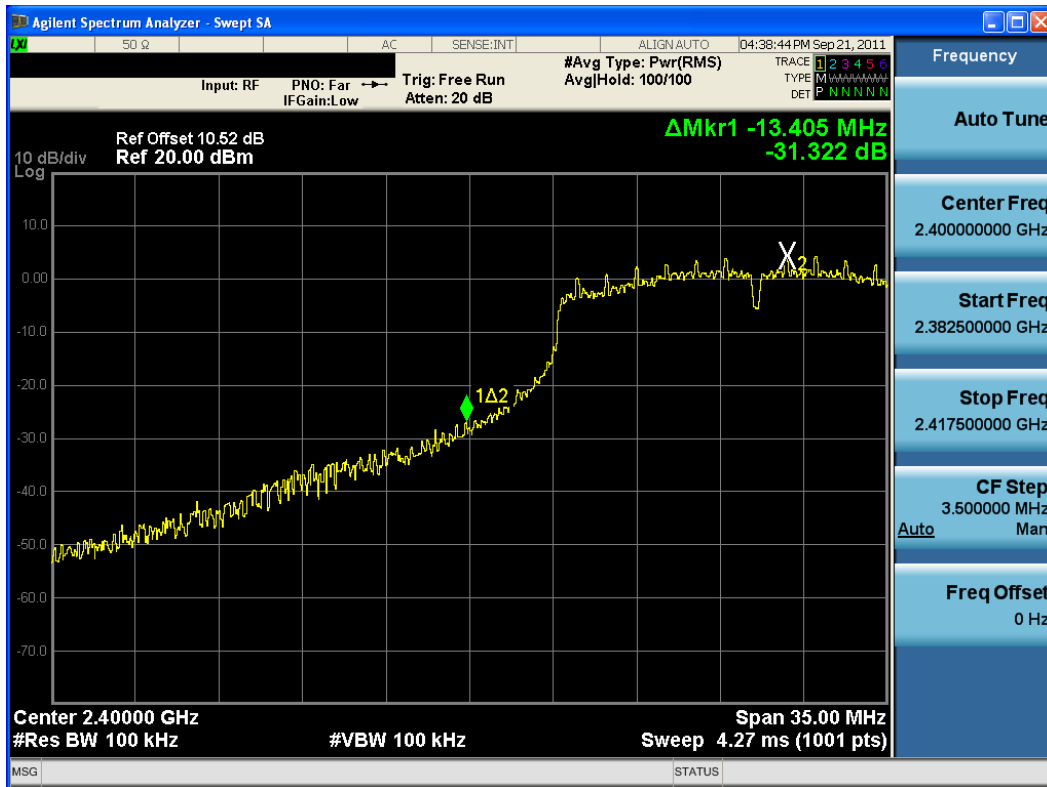


Plot 6-35. Band Edge Plot (802.11g– Ch. 1)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 34 of 69

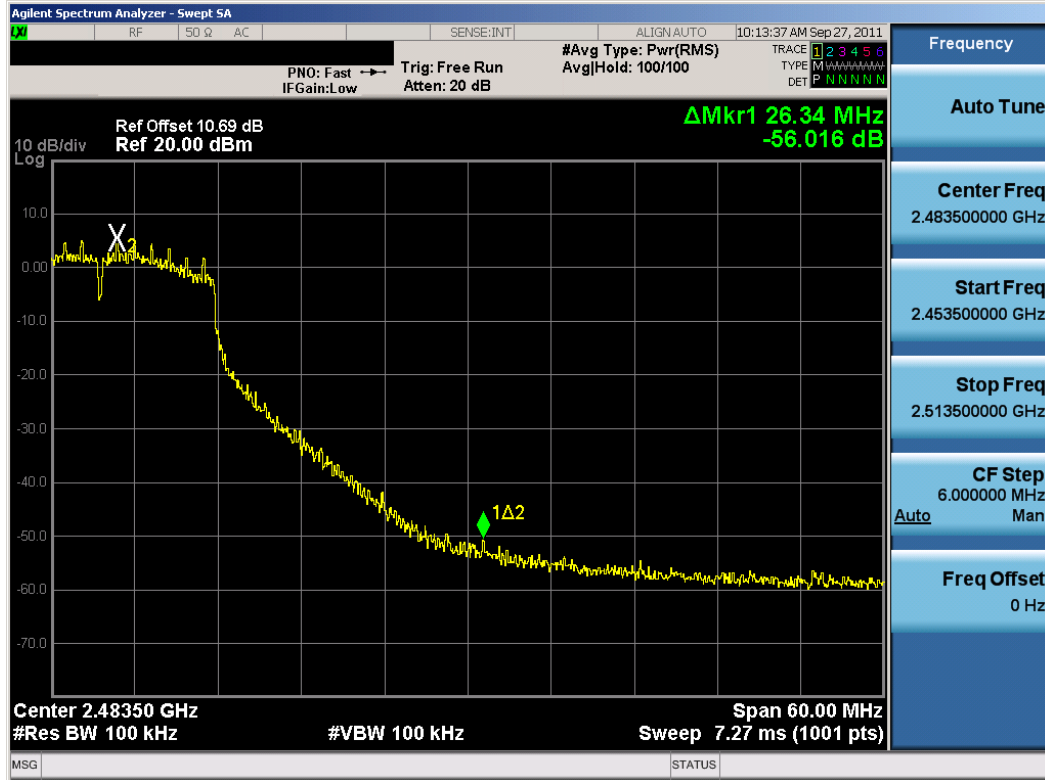


Plot 6-36. Band Edge Plot (802.11g– Ch. 10)

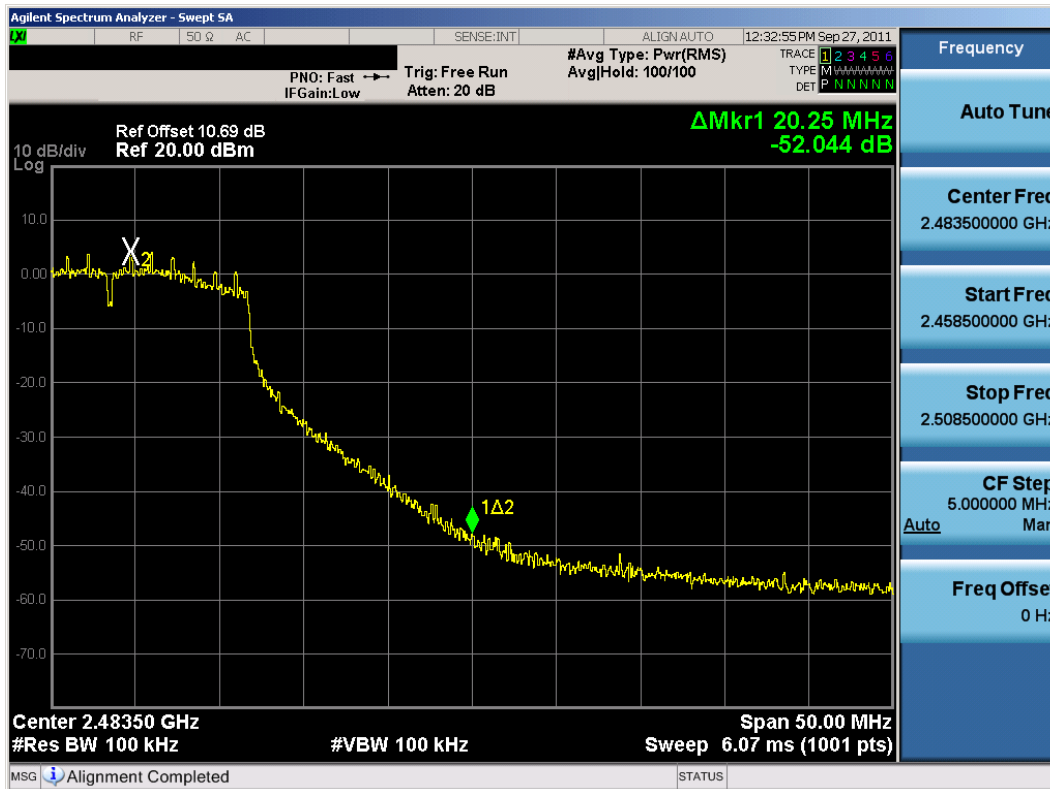


Plot 6-37. Band Edge Plot (802.11g – Ch. 11)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 35 of 69

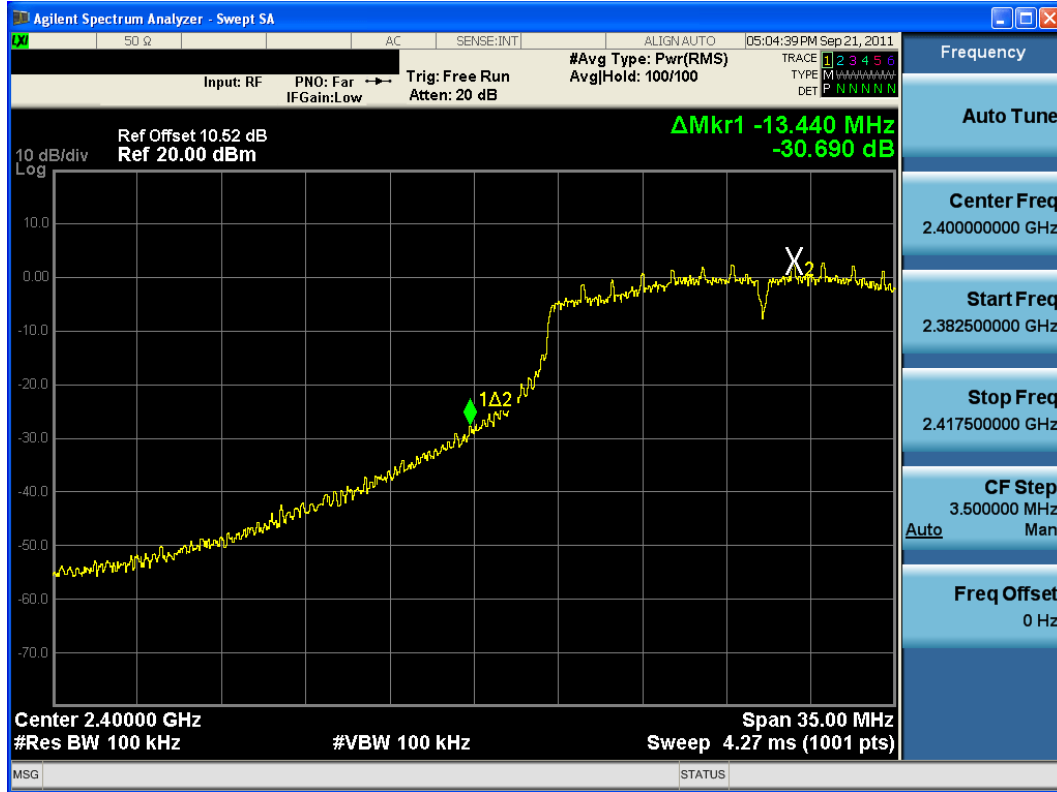


Plot 6-38. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

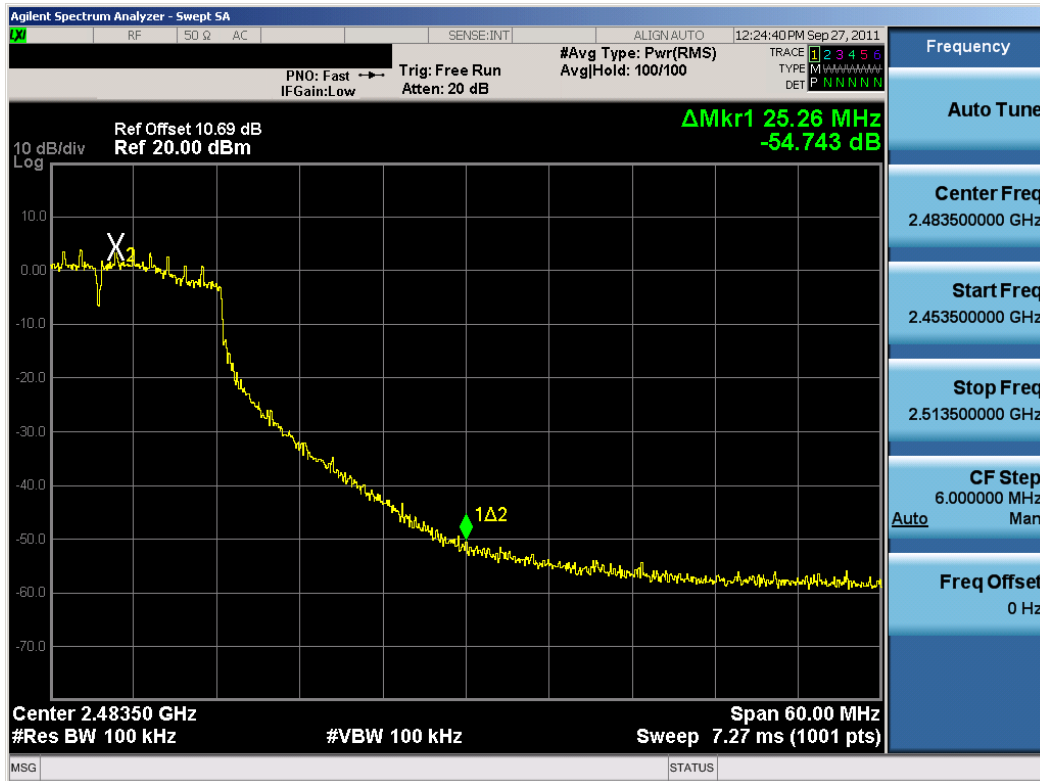


Plot 6-39. Band Edge Plot (802.11n (2.4GHz) – Ch. 10)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 36 of 69

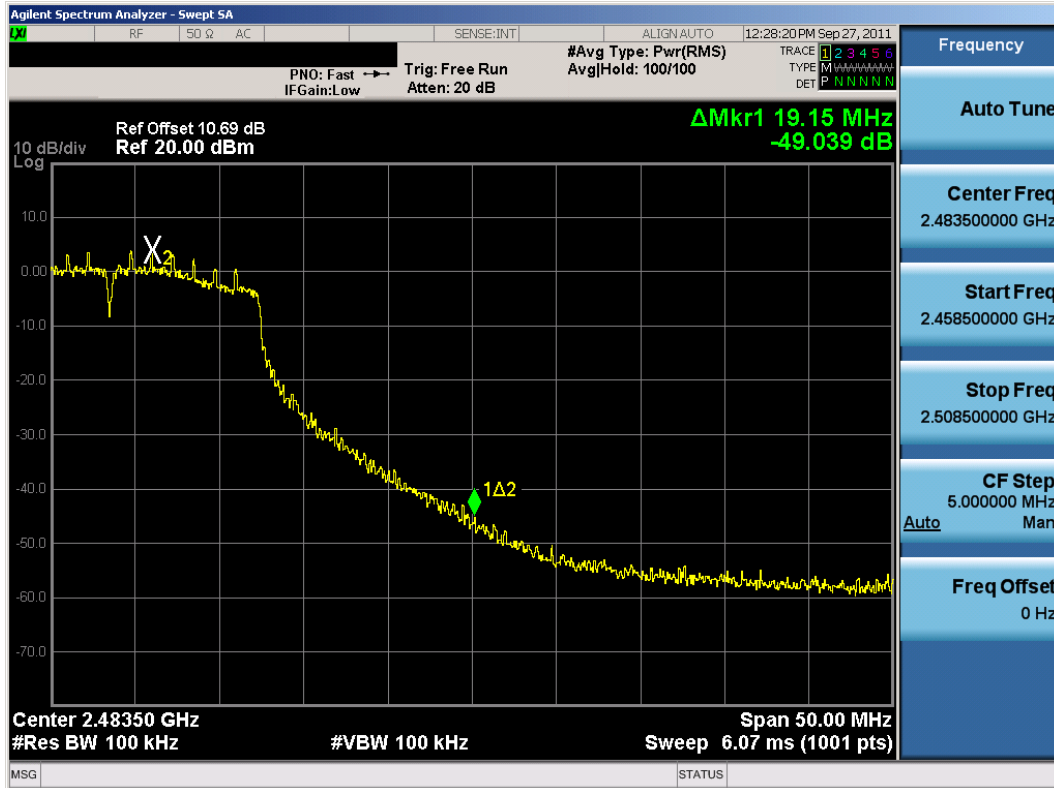


Plot 6-40. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

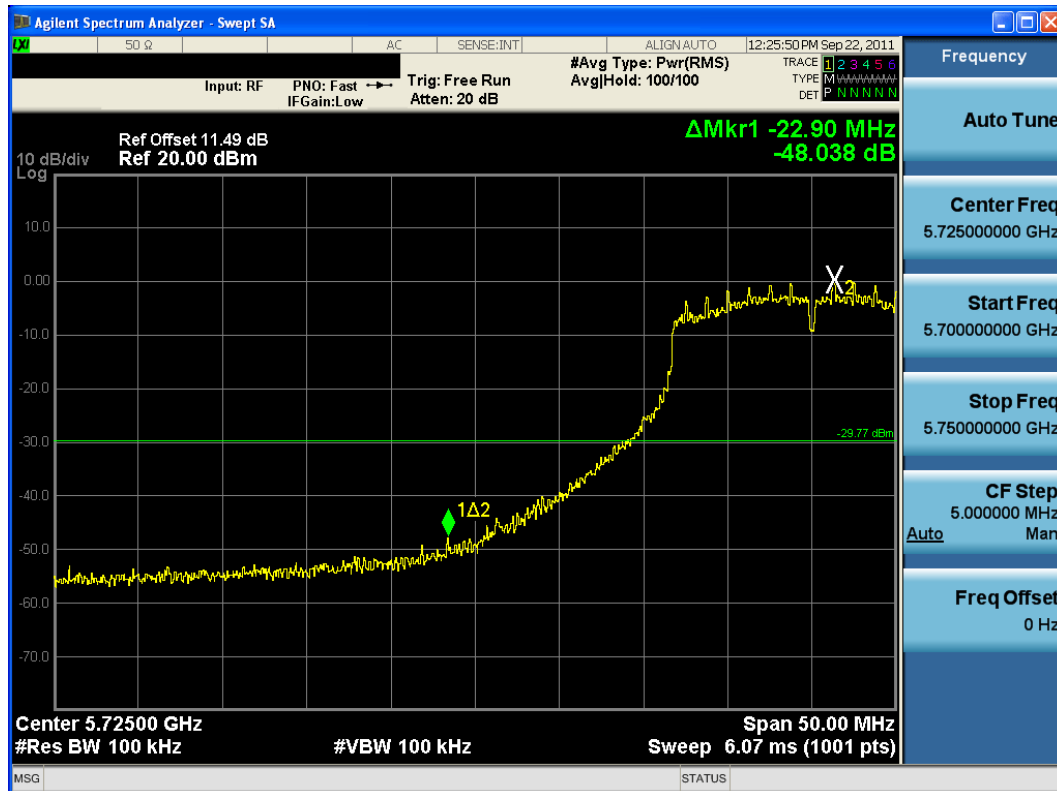


Plot 6-41. Band Edge Plot (802.11a – Ch. 149)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 37 of 69

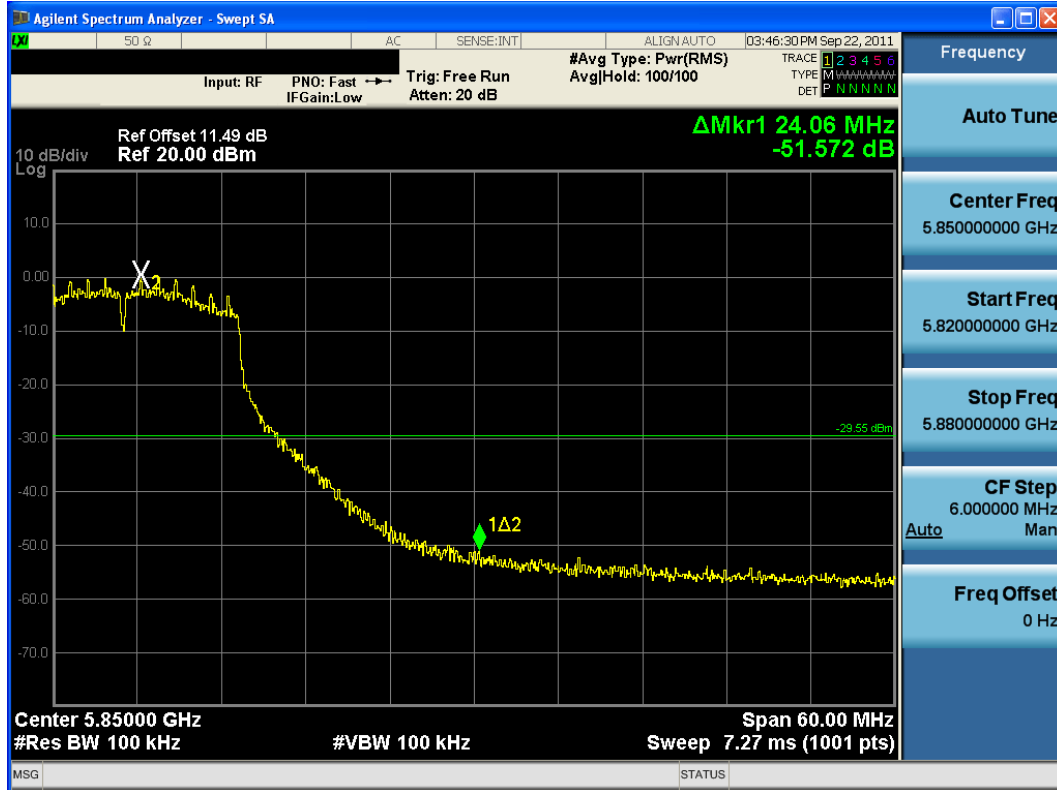


Plot 6-42. Band Edge Plot (802.11a – Ch. 165)

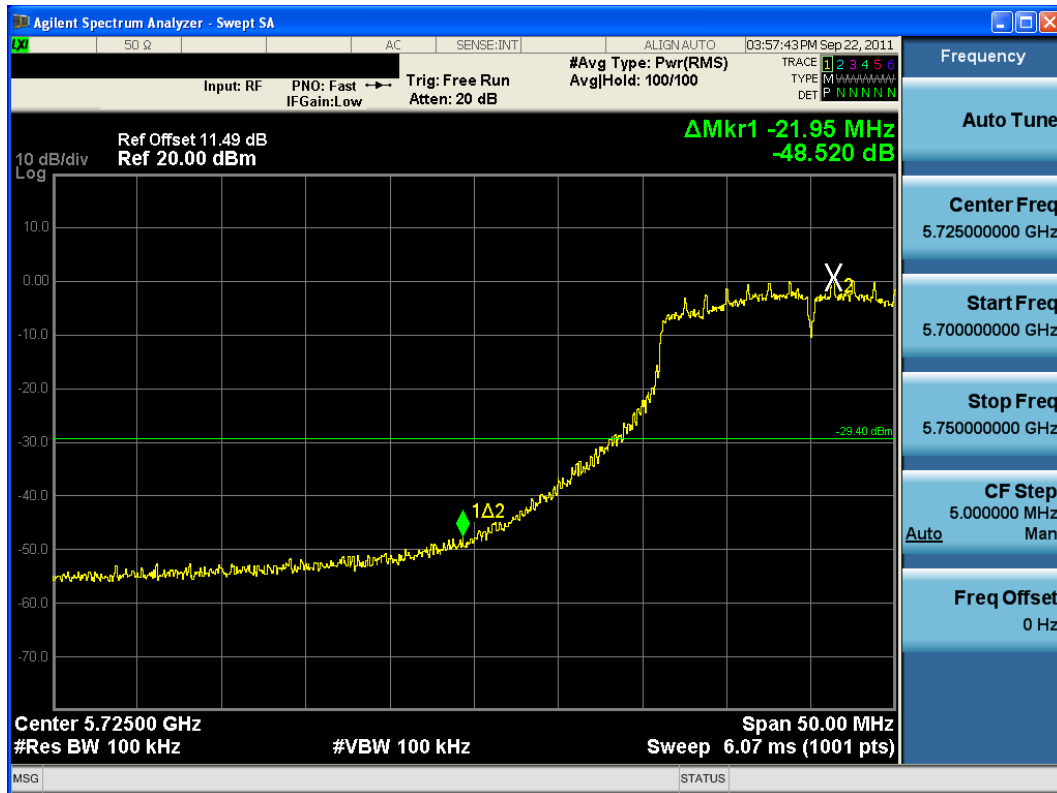

Plot 6-43. Band Edge Plot (802.11n (5.8GHz) – Ch. 149)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 38 of 69

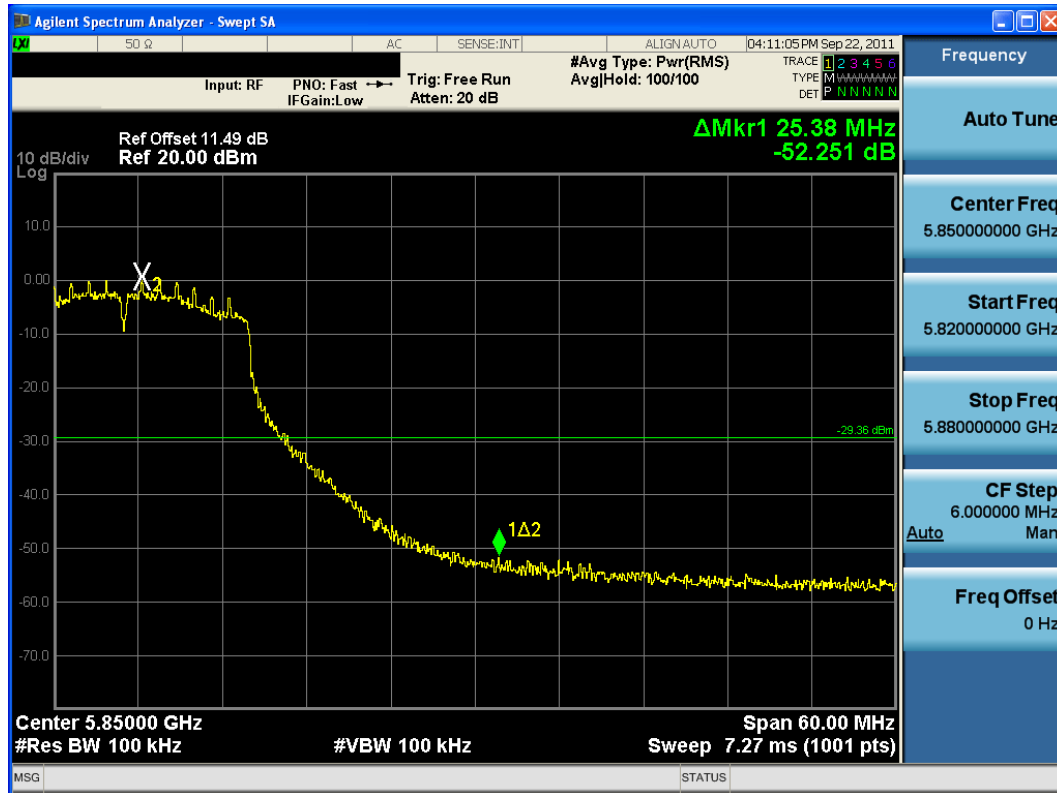

Plot 6-44. Band Edge Plot (802.11n (5.8GHz) – Ch. 165)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 39 of 69


## 6.8 Conducted Spurious Emissions
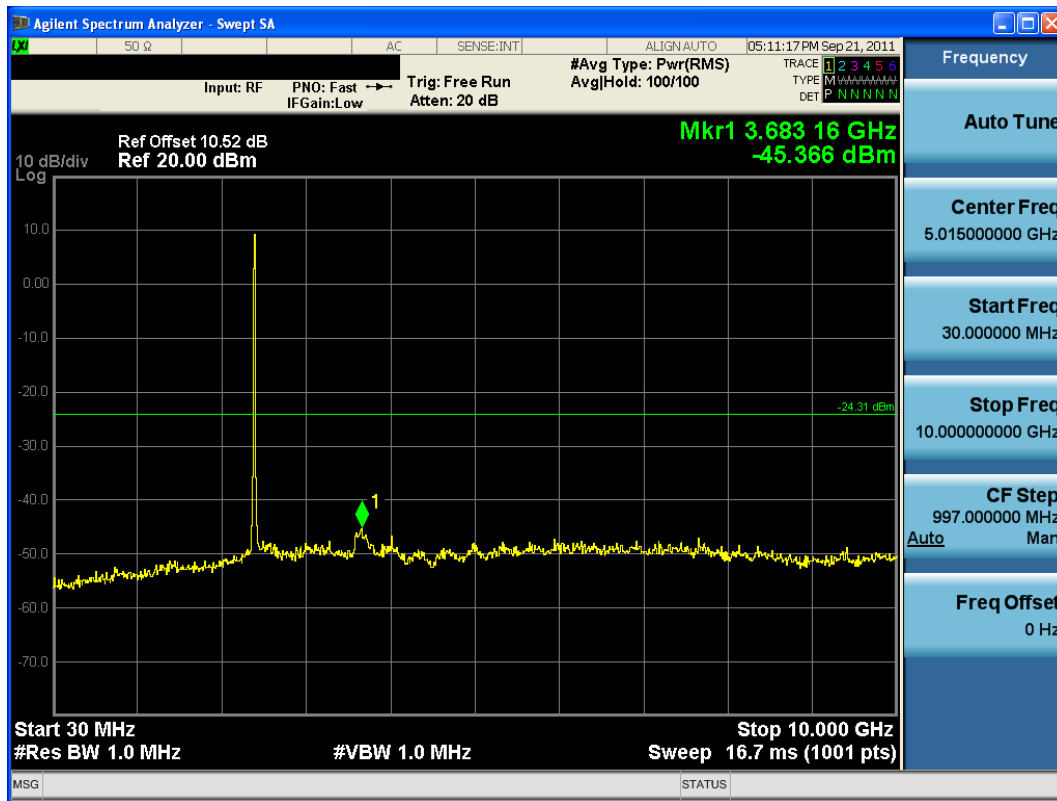
### §15.247(d); RSS-210 [A8.5]

For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “a”, and “n” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below. The worst case spurious emissions for the 5.8GHz band were found while transmitting in “a” mode at 6 Mbps and are shown in the plots below.


The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.

For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present. Cable losses at these frequencies were also taken into account and it was determined that all emissions were compliant.




Plot 6-45. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 40 of 69

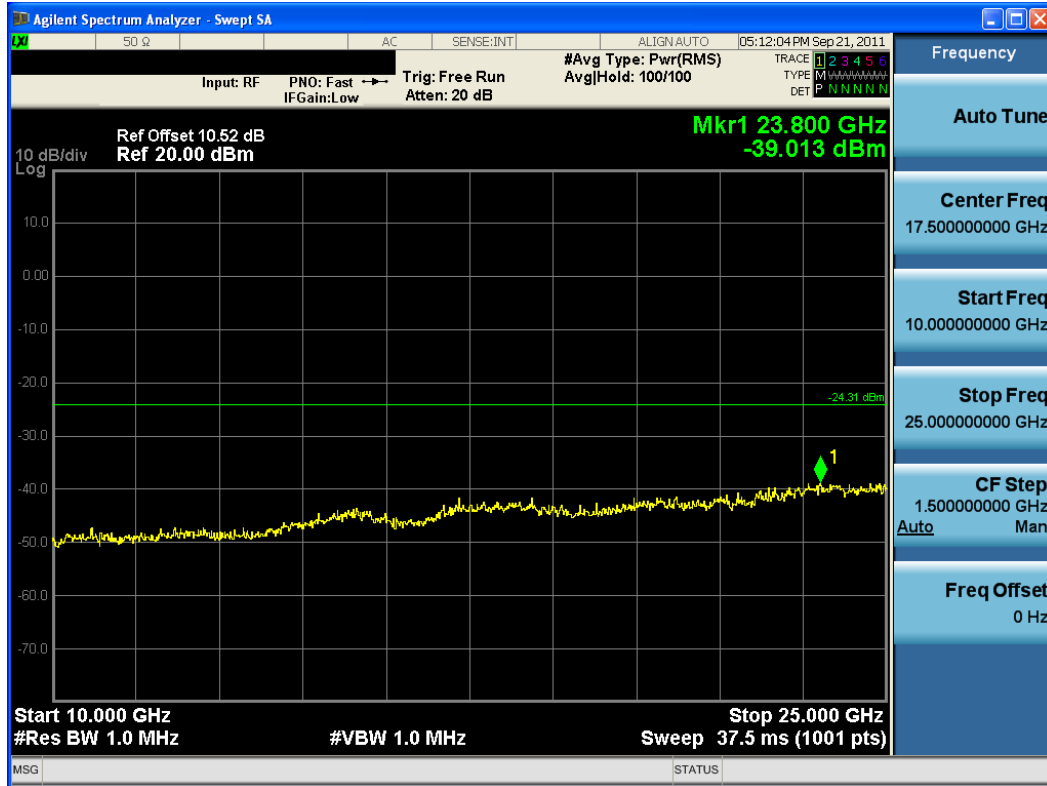

Plot 6-46. Conducted Spurious Plot (802.11b – Ch. 1)

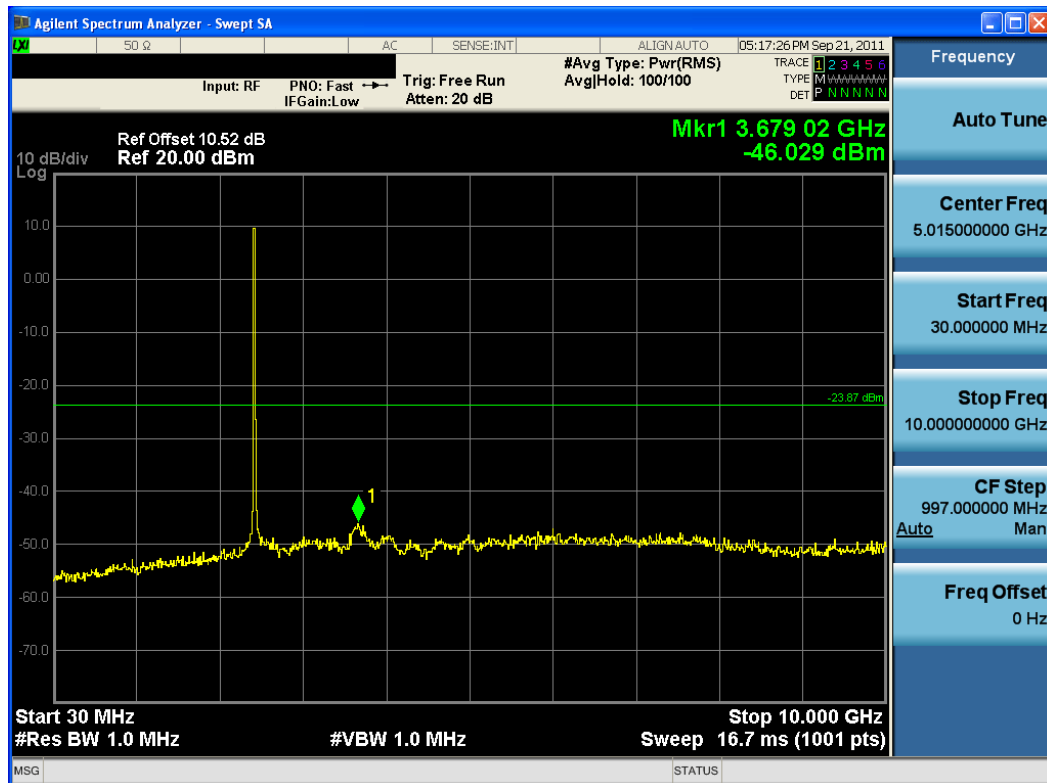


Plot 6-47. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 41 of 69



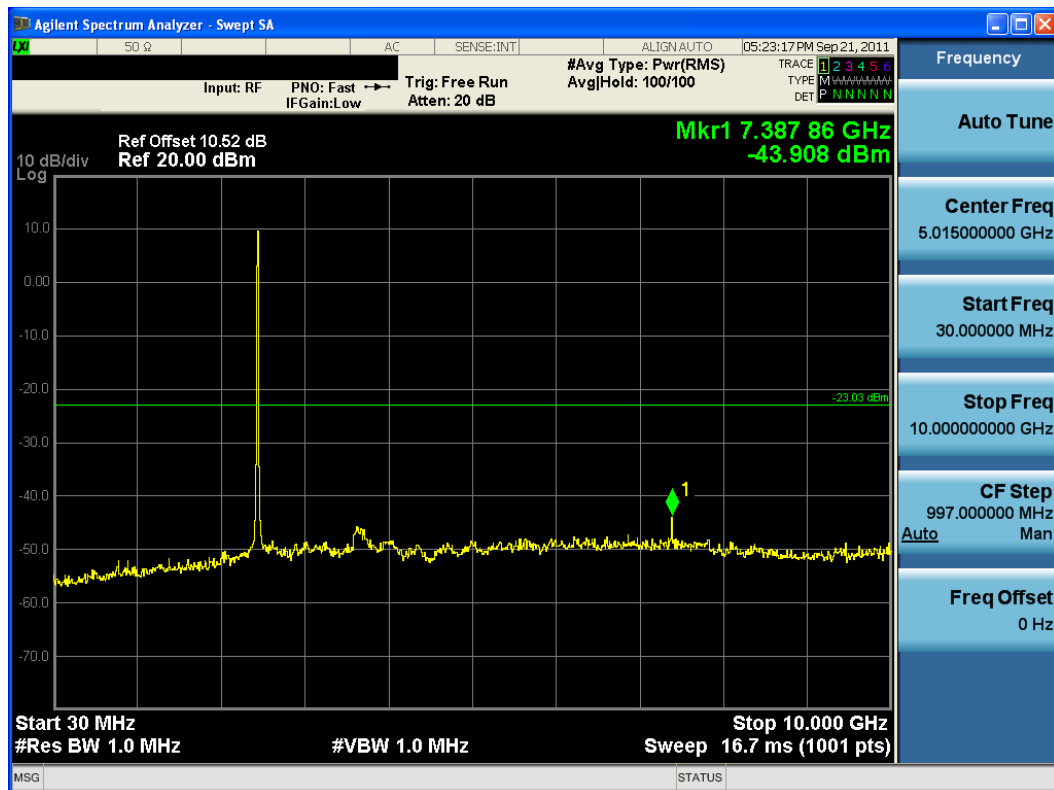Plot 6-48. Conducted Spurious Plot (802.11b – Ch. 6)




Plot 6-49. Conducted Spurious Plot (802.11b – Ch. 11)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 42 of 69




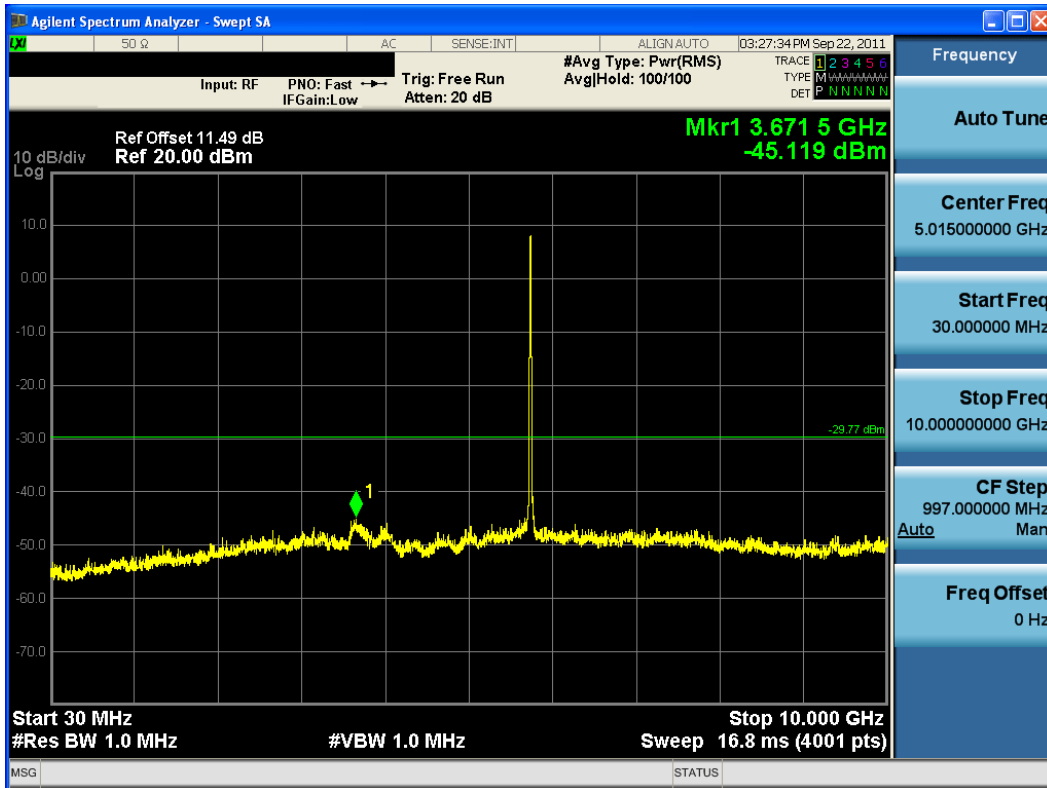Plot 6-50. Conducted Spurious Plot (802.11b – Ch. 11)




Plot 6-51. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 43 of 69

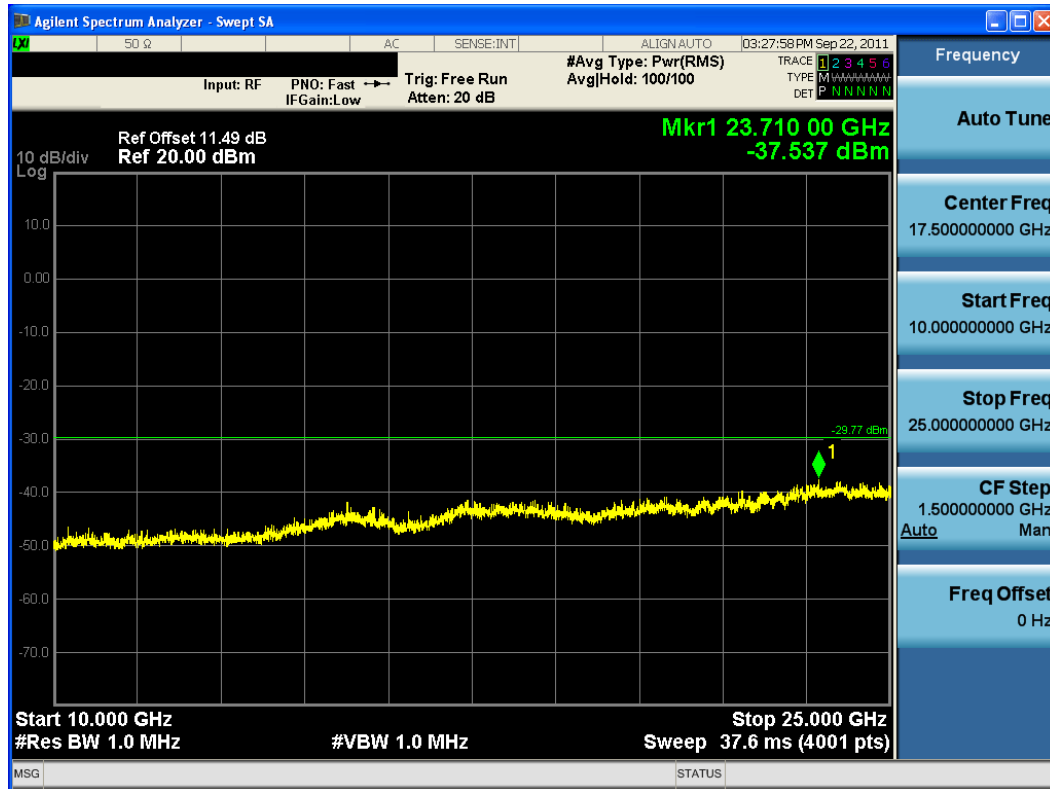


Plot 6-52. Conducted Spurious Plot (802.11a – Ch. 149)

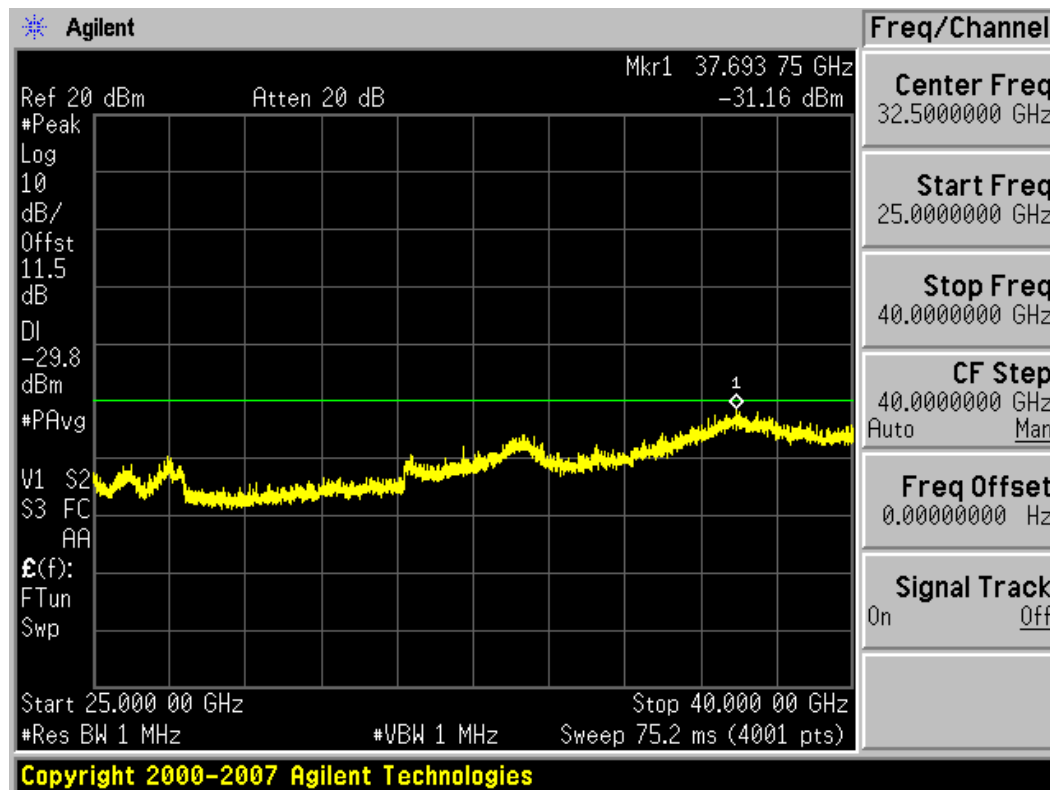

Plot 6-53. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 44 of 69

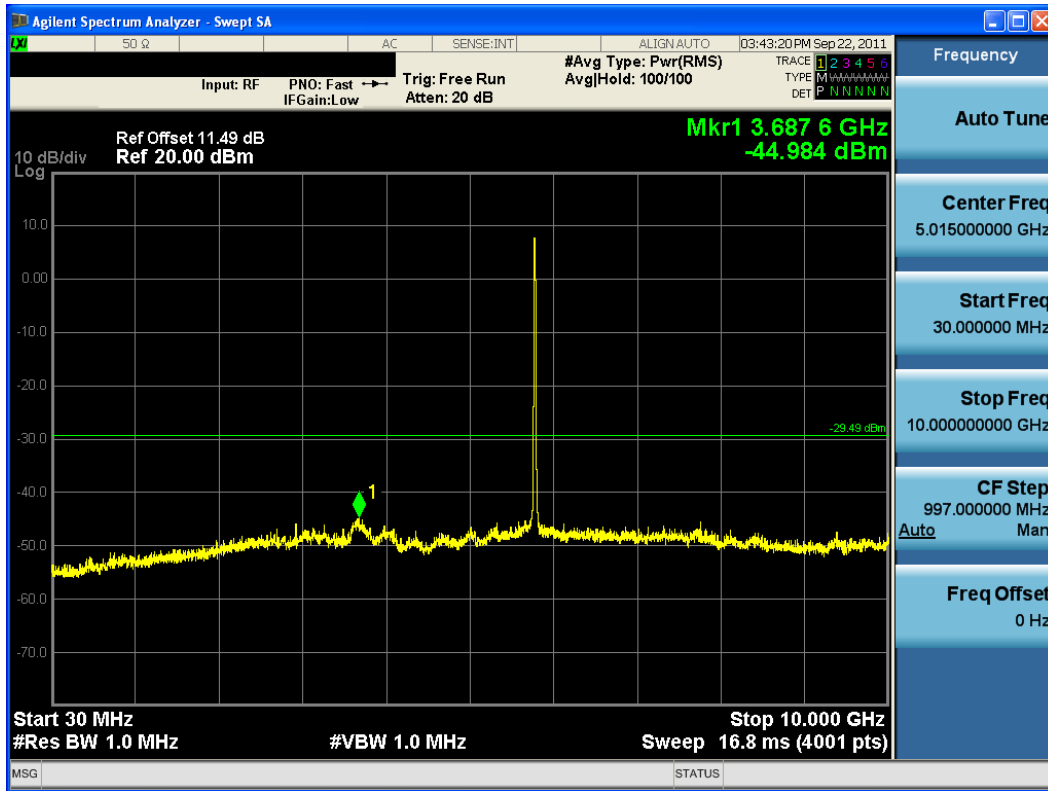


Plot 6-54. Conducted Spurious Plot (802.11a – Ch. 157)




Plot 6-55. Conducted Spurious Plot (802.11a – Ch. 157)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 45 of 69

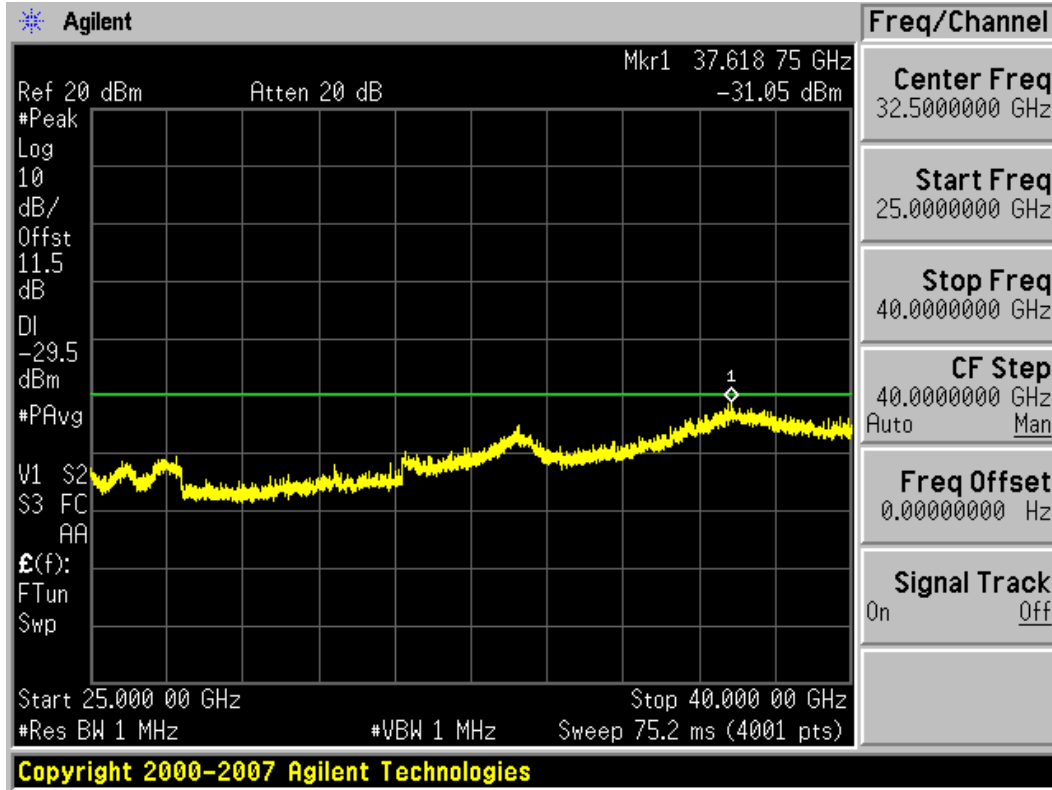

Plot 6-56. Conducted Spurious Plot (802.11a – Ch. 157)

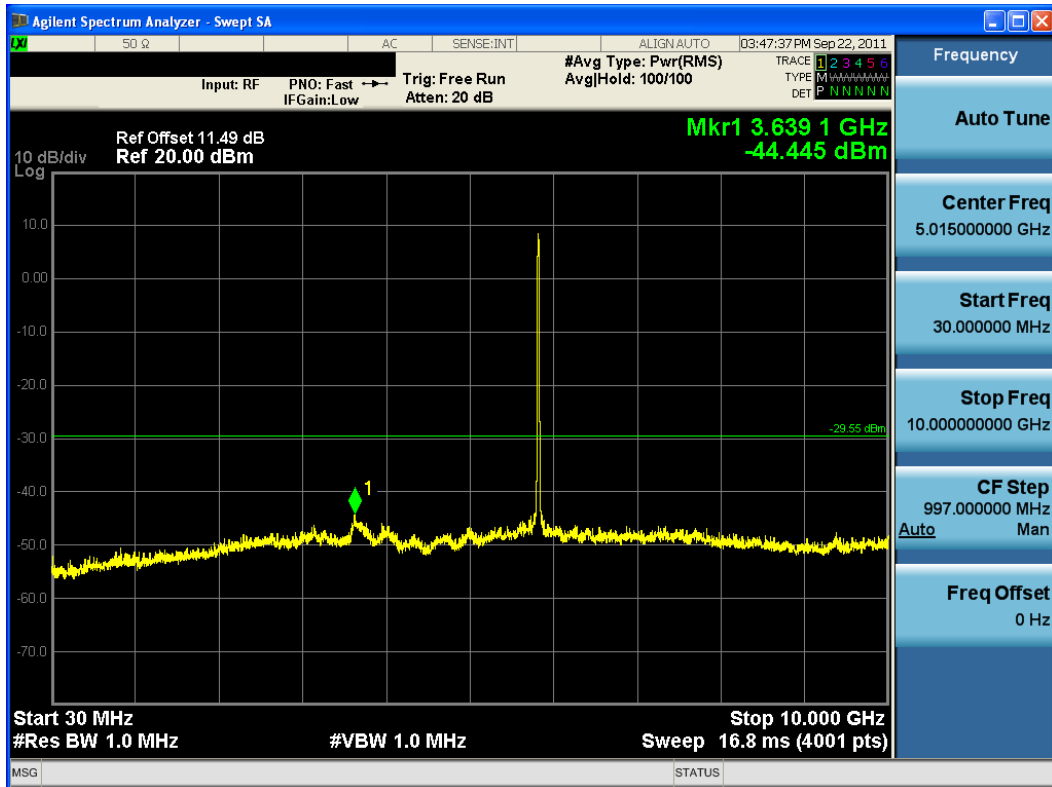


Plot 6-57. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 46 of 69



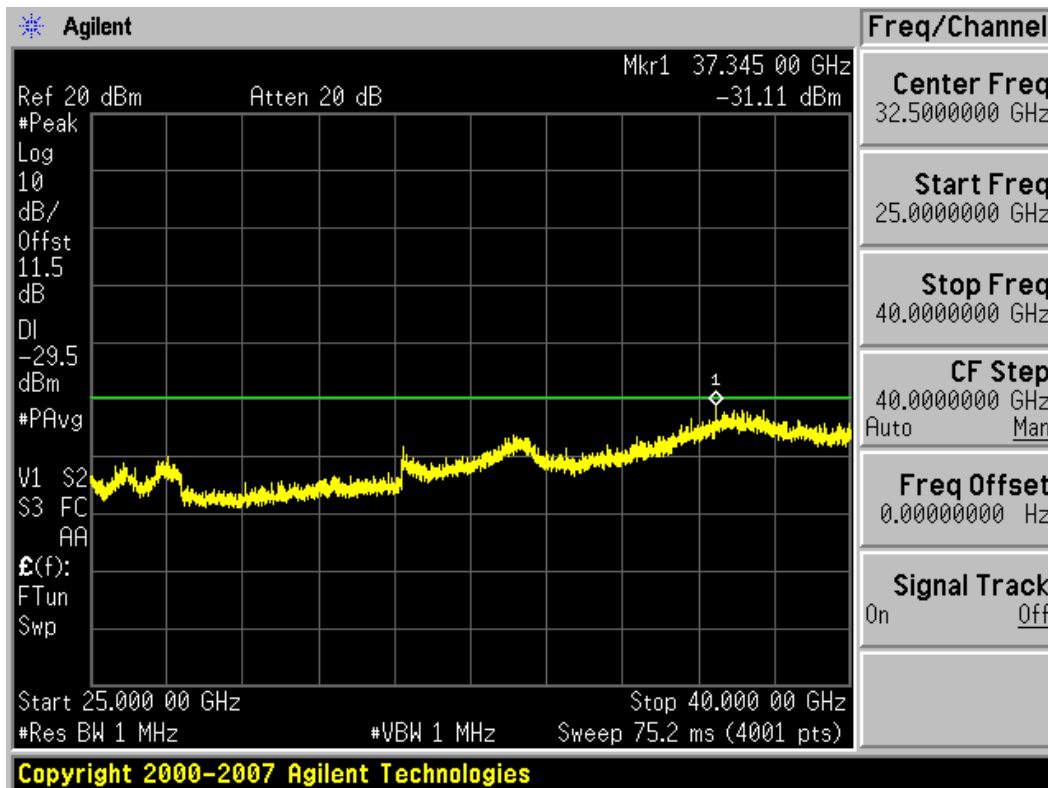Plot 6-58. Conducted Spurious Plot (802.11a – Ch. 165)



Plot 6-59. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 47 of 69

## 6.9 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

The EUT was tested from 9kHz up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurements were taken using RBW = 1MHz, VBW = 10Hz, and linearly polarized horn antennas. Peak measurements were taken using RBW = VBW = 1MHz. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-11 per Section 15.209.

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3



**Table 6-11. Radiated Limits**

### Sample Calculation

- Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB}$ ]

### Notes:

- AFCL = Antenna Factor [ $\text{dB}$ ] + Cable Loss [ $\text{dB}$ ]

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 48 of 69

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz



Channel: 01

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	-108.31	Avg	H	42.88	41.58	53.98	-12.40
4824.00	-97.67	Peak	H	42.88	52.22	73.98	-21.76
12060.00	-135.00	Avg	H	62.67	34.67	53.98	-19.31
12060.00	-125.00	Peak	H	62.67	44.67	73.98	-29.31

**Table 6-12. Radiated Measurements @ 3 meters**

### NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 49 of 69

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2437MHz



Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	-108.20	Avg	H	43.04	41.84	53.98	-12.14
4874.00	-98.24	Peak	H	43.04	51.80	73.98	-22.18
7311.00	-135.00	Avg	H	49.77	21.77	53.98	-32.21
7311.00	-125.00	Peak	H	49.77	31.77	73.98	-42.21
12185.00	-135.00	Avg	H	63.49	35.49	53.98	-18.49
12185.00	-125.00	Peak	H	63.49	45.49	73.98	-28.49

**Table 6-13. Radiated Measurements @ 3 meters**

**NOTES:**

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 50 of 69

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz



Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	-108.27	Avg	H	43.23	41.97	53.98	-12.01
4924.00	-97.98	Peak	H	43.23	52.26	73.98	-21.72
7386.00	-135.00	Avg	H	49.79	21.79	53.98	-32.19
7386.00	-125.00	Peak	H	49.79	31.79	73.98	-42.19
12310.00	-135.00	Avg	H	63.91	35.91	53.98	-18.07
12310.00	-125.00	Peak	H	63.91	45.91	73.98	-28.07

**Table 6-14. Radiated Measurements @ 3 meters**

### NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 51 of 69

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Mode: 802.11b

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2457MHz



Channel: 10

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4914.00	-107.95	Avg	H	43.13	42.18	53.98	-11.80
4914.00	-98.00	Peak	H	43.13	52.13	73.98	-21.85
7371.00	-135.00	Avg	H	49.80	21.80	53.98	-32.18
7371.00	-160.59	Peak	H	49.80	31.80	73.98	-42.18
12285.00	-135.00	Avg	H	63.67	35.67	53.98	-18.31
12285.00	-160.99	Peak	H	63.67	45.67	73.98	-28.31

**Table 6-15. Radiated Measurements @ 3 meters**

### NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 52 of 69

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5745MHz



Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11490.00	-108.82	Avg	H	55.49	-9.54	44.1	53.98	-9.85
11490.00	-98.38	Peak	H	55.49	-9.54	54.6	73.98	-19.41
22980.00	-135.00	Avg	H	71.90	0.00	43.9	53.98	-10.08
22980.00	-125.00	Peak	H	71.90	0.00	53.9	73.98	-20.08

**Table 6-16. Radiated Measurements @ 1 meter**

### NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 53 of 69

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5785MHz



Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11570.00	-109.50	Avg	H	55.56	-9.54	43.5	53.98	-10.47
11570.00	-98.62	Peak	H	55.56	-9.54	54.4	73.98	-19.59

**Table 6-17. Radiated Measurements @ 1 meter**

**NOTES:**

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 54 of 69

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11610.00	-108.51	Avg	H	55.81	-9.54	44.8	53.98	-9.23
11610.00	-98.37	Peak	H	55.81	-9.54	54.9	73.98	-19.09

**Table 6-18. Radiated Measurements @ 1 meter**

**NOTES:**

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 55 of 69

## 6.10 Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

Mode: 802.11g

Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz



Channel: 1

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\sqrt{W/m}$ ]	Limit [dB $\sqrt{W/m}$ ]	Margin [dB]
2387.92	-93.30	Avg	H	36.12	49.82	53.98	-4.16
2387.92	-73.87	Peak	H	36.12	69.25	73.98	-4.73
2389.52	-91.31	Avg	H	36.14	51.83	53.98	-2.15
2389.52	-70.94	Peak	H	36.14	72.20	73.98	-1.78
2390.00	-90.59	Avg	H	36.14	52.55	53.98	-1.43
2390.00	-69.92	Peak	H	36.14	73.22	73.98	-0.76

**Table 6-19. Radiated Restricted Band Measurements at 3-meters**

### NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 56 of 69

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

Mode: 802.11g

Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2457MHz



Channel: 10

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
2483.50	-89.39	Avg	H	35.98	53.59	53.98	-0.39
2483.50	-70.45	Peak	H	35.98	72.53	73.98	-1.45
2484.14	-89.53	Avg	H	35.98	53.45	53.98	-0.53
2484.14	-71.02	Peak	H	35.98	71.96	73.98	-2.02
2484.62	-89.84	Avg	H	35.98	53.14	53.98	-0.84
2484.62	-71.00	Peak	H	35.98	71.98	73.98	-2.00

**Table 6-20. Radiated Restricted Band Measurements at 3-meters**

**NOTES:**

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 57 of 69

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

Mode: 802.11g

Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz



Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
2483.50	-91.70	Avg	H	36.56	51.86	53.98	-2.12
2483.50	-70.22	Peak	H	36.56	73.34	73.98	-0.64
2483.61	-91.85	Avg	H	36.56	51.71	53.98	-2.27
2483.61	-70.80	Peak	H	36.56	72.76	73.98	-1.22
2484.94	-92.87	Avg	H	36.57	50.70	53.98	-3.28
2484.94	-70.98	Peak	H	36.57	72.59	73.98	-1.39

**Table 6-21. Radiated Restricted Band Measurements at 3-meters**

### NOTES:

- All emissions shown lie in the restricted bands specified in §15.205 are below the limit shown in Table 6-11.
- Average measurements > 1GHz are performed using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz are performed using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.


FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 58 of 69

**6.11 Line-Conducted Test Data**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Motorola Mobility, Inc.  
 FCC ID Code : IHDP56ME2  
 Standard : FCC Part 15C, 15.207

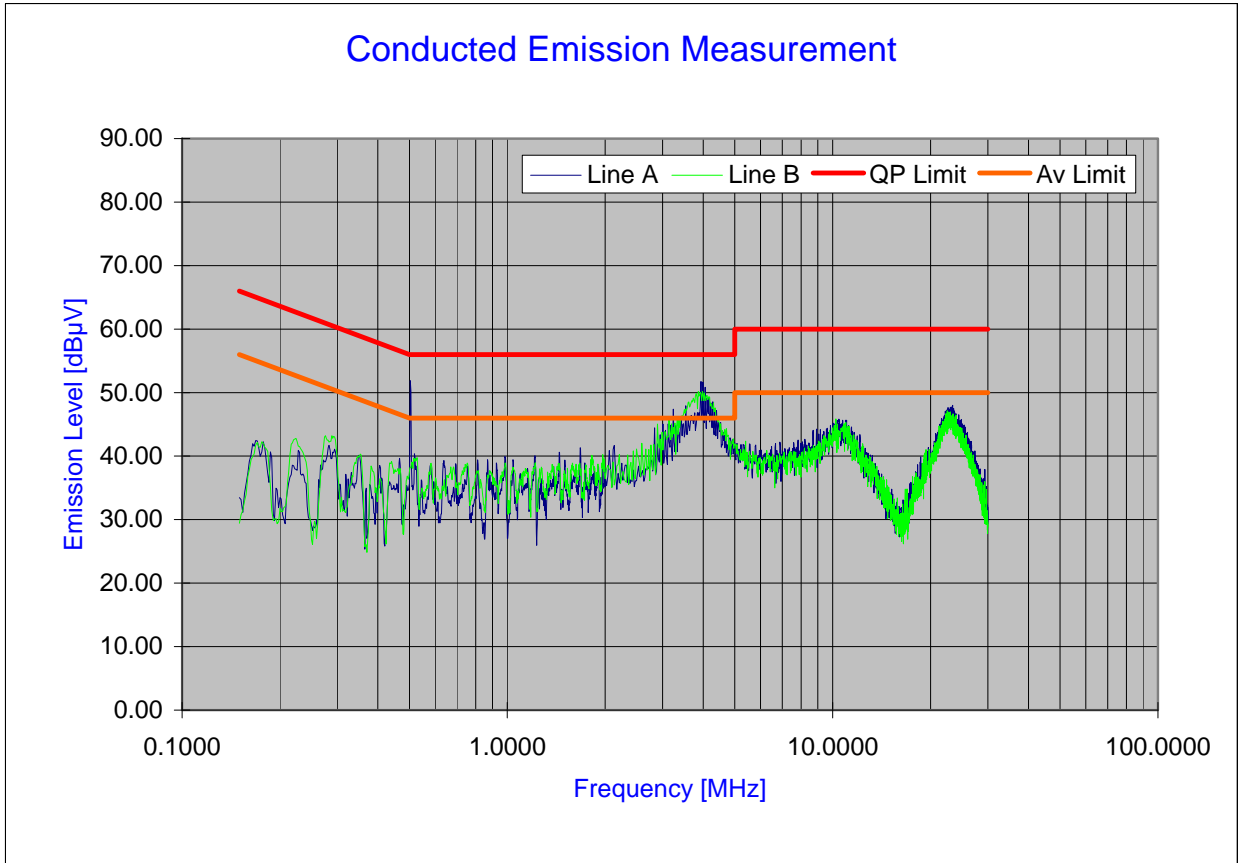Power Source : AC120V/60Hz  
 Tested Date : 09/24/2011  
 Note : Tested with 802.11b ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-60. Line Conducted Plot with 802.11b**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 1Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>	
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	<b>Reviewed by:</b> Quality Manager
			Page 59 of 69

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.522	6.97	34.98	56.00	-21.02	24.47	46.00	-21.53
2	A	3.008	7.27	39.59	56.00	-16.41	25.29	46.00	-20.71
3	A	3.238	7.29	41.28	56.00	-14.72	26.22	46.00	-19.78
4	A	3.241	7.29	41.29	56.00	-14.71	27.87	46.00	-18.13
5	A	3.989	7.35	45.81	56.00	-10.19	31.78	46.00	-14.22
6	A	3.994	7.35	45.90	56.00	-10.10	31.45	46.00	-14.55
7	A	4.218	7.36	44.18	56.00	-11.82	29.43	46.00	-16.57
8	A	4.220	7.36	44.26	56.00	-11.74	29.94	46.00	-16.06
9	A	23.110	8.85	42.12	60.00	-17.88	34.09	50.00	-15.91
10	A	23.332	8.88	41.88	60.00	-18.12	34.09	50.00	-15.91
11	B	3.997	7.36	46.02	56.00	-9.98	32.84	46.00	-13.16
12	B	4.644	7.40	39.69	56.00	-16.31	27.75	46.00	-18.25
13	B	22.208	8.86	40.71	60.00	-19.29	32.52	50.00	-17.48
14	B	22.512	8.90	41.25	60.00	-18.75	32.79	50.00	-17.21
15	B	22.609	8.92	41.21	60.00	-18.79	33.08	50.00	-16.92
16	B	22.761	8.94	41.20	60.00	-18.80	33.29	50.00	-16.71
17	B	22.921	8.96	41.45	60.00	-18.55	33.38	50.00	-16.62
18	B	22.928	8.96	41.43	60.00	-18.57	33.51	50.00	-16.49
19	B	23.440	9.02	40.86	60.00	-19.14	33.76	50.00	-16.24
20	B	23.918	9.08	40.07	60.00	-19.93	33.28	50.00	-16.72

Table 6-22. Line Conducted Data with 802.11b

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 1Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.


FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 60 of 69

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Motorola Mobility, Inc.  
 FCC ID Code : IHDP56ME2  
 Standard : FCC Part 15C, 15.207

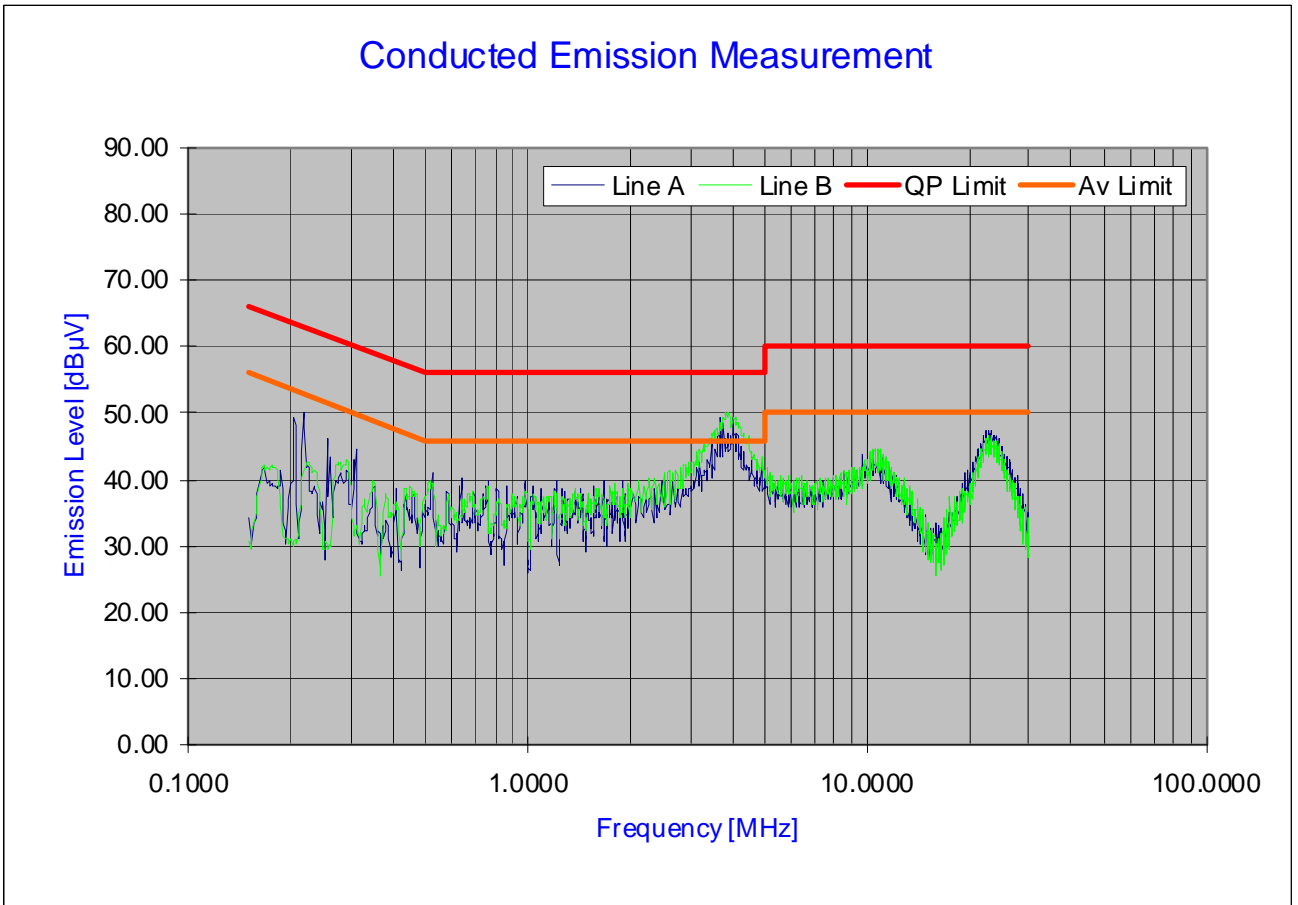Power Source : AC120V/60Hz  
 Tested Date : 09/24/2011  
 Note : Tested with 802.11g ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-61. Line Conducted Plot with 802.11g**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>	
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	<b>Reviewed by:</b> Quality Manager
			Page 61 of 69

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.218	6.88	35.52	62.90	-27.38	27.97	52.90	-24.93
2	A	3.700	7.32	43.64	56.00	-12.36	30.29	46.00	-15.71
3	A	4.043	7.35	41.91	56.00	-14.09	31.23	46.00	-14.77
4	A	22.130	8.74	40.99	60.00	-19.01	32.50	50.00	-17.50
5	A	22.575	8.79	41.45	60.00	-18.55	33.45	50.00	-16.55
6	A	22.893	8.83	41.60	60.00	-18.40	34.05	50.00	-15.95
7	A	23.157	8.86	41.60	60.00	-18.40	34.11	50.00	-15.89
8	A	23.393	8.89	41.36	60.00	-18.64	34.27	50.00	-15.73
9	A	23.793	8.93	40.70	60.00	-19.30	33.96	50.00	-16.04
10	A	23.832	8.94	40.79	60.00	-19.21	34.00	50.00	-16.00
11	B	2.546	7.22	36.78	56.00	-19.22	22.54	46.00	-23.46
12	B	2.601	7.23	37.17	56.00	-18.83	24.72	46.00	-21.28
13	B	3.210	7.29	40.20	56.00	-15.80	25.37	46.00	-20.63
14	B	3.928	7.35	45.58	56.00	-10.42	31.24	46.00	-14.76
15	B	4.426	7.39	41.86	56.00	-14.14	28.34	46.00	-17.66
16	B	21.899	8.82	39.95	60.00	-20.05	31.77	50.00	-18.23
17	B	22.454	8.90	40.98	60.00	-19.02	32.83	50.00	-17.17
18	B	22.755	8.94	41.31	60.00	-18.69	33.52	50.00	-16.48
19	B	23.172	8.99	40.41	60.00	-19.59	33.63	50.00	-16.37
20	B	24.450	9.15	39.70	60.00	-20.30	32.61	50.00	-17.39

Table 6-23. Line Conducted Data with 802.11g

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.


FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 62 of 69

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Motorola Mobility, Inc.  
 FCC ID Code : IHDP56ME2  
 Standard : FCC Part 15C, 15.207

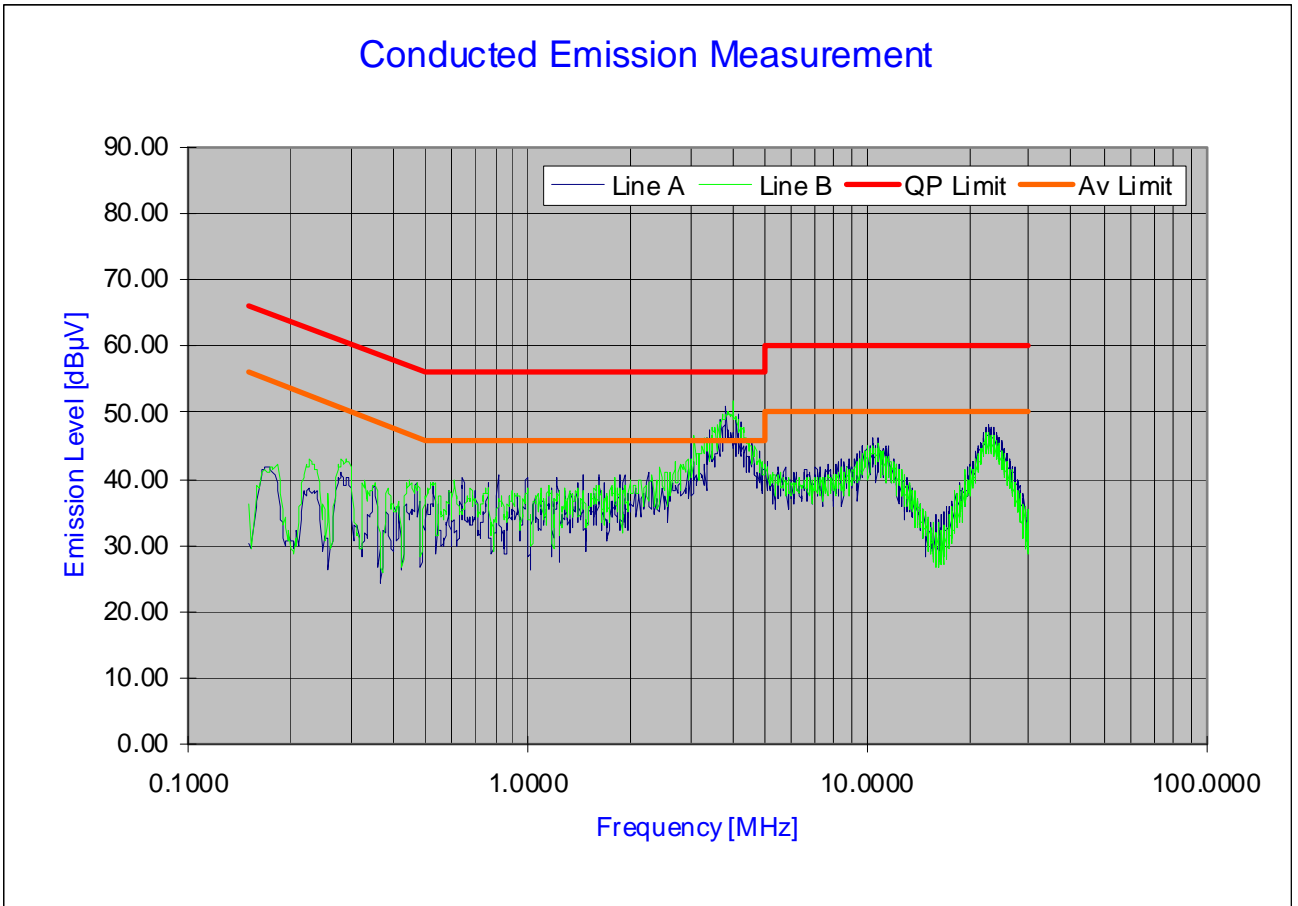Power Source : AC120V/60Hz  
 Tested Date : 09/24/2011  
 Note : Tested with 2.4GHz 802.11n ON



Ver.1.1 ©PCTEST 2006.08

**Plot 6-62. Line Conducted Plot with 802.11n (2.4GHz)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5/7.2Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>	
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	<b>Reviewed by:</b> Quality Manager
			Page 63 of 69

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	3.025	7.27	39.03	56.00	-16.97	25.09	46.00	-20.91
2	A	3.034	7.27	39.07	56.00	-16.93	25.24	46.00	-20.76
3	A	3.433	7.30	42.70	56.00	-13.30	28.57	46.00	-17.43
4	A	3.896	7.34	46.27	56.00	-9.73	30.11	46.00	-15.89
5	A	4.195	7.36	43.28	56.00	-12.72	31.07	46.00	-14.93
6	A	21.858	8.71	41.30	60.00	-18.70	31.96	50.00	-18.04
7	A	22.907	8.83	42.36	60.00	-17.64	34.09	50.00	-15.91
8	A	23.313	8.88	42.52	60.00	-17.48	34.31	50.00	-15.69
9	A	23.716	8.92	41.88	60.00	-18.12	34.19	50.00	-15.81
10	A	24.127	8.97	41.19	60.00	-18.81	33.67	50.00	-16.33
11	B	2.938	7.27	38.45	56.00	-17.55	23.92	46.00	-22.08
12	B	3.107	7.28	40.21	56.00	-15.79	25.49	46.00	-20.51
13	B	3.436	7.31	42.04	56.00	-13.96	25.98	46.00	-20.02
14	B	3.992	7.36	46.11	56.00	-9.89	32.56	46.00	-13.44
15	B	22.477	8.90	40.96	60.00	-19.04	33.13	50.00	-16.87
16	B	22.763	8.94	41.30	60.00	-18.70	33.75	50.00	-16.25
17	B	23.253	9.00	41.06	60.00	-18.94	33.99	50.00	-16.01
18	B	23.313	9.01	40.71	60.00	-19.29	33.93	50.00	-16.07
19	B	23.389	9.02	40.90	60.00	-19.10	33.73	50.00	-16.27
20	B	23.528	9.03	40.75	60.00	-19.25	34.03	50.00	-15.97

Table 6-24. Line Conducted Data with 802.11n (2.4GHz)

**Notes:**

- All Modes of operation were investigated and the worst-case emissions are reported using 6.5/7.2Mbps.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Line A = Phase; Line B = Neutral
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.


FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 64 of 69

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Motorola Mobility, Inc.  
 FCC ID Code : IHDP56ME2  
 Standard : FCC Part 15C, 15.207

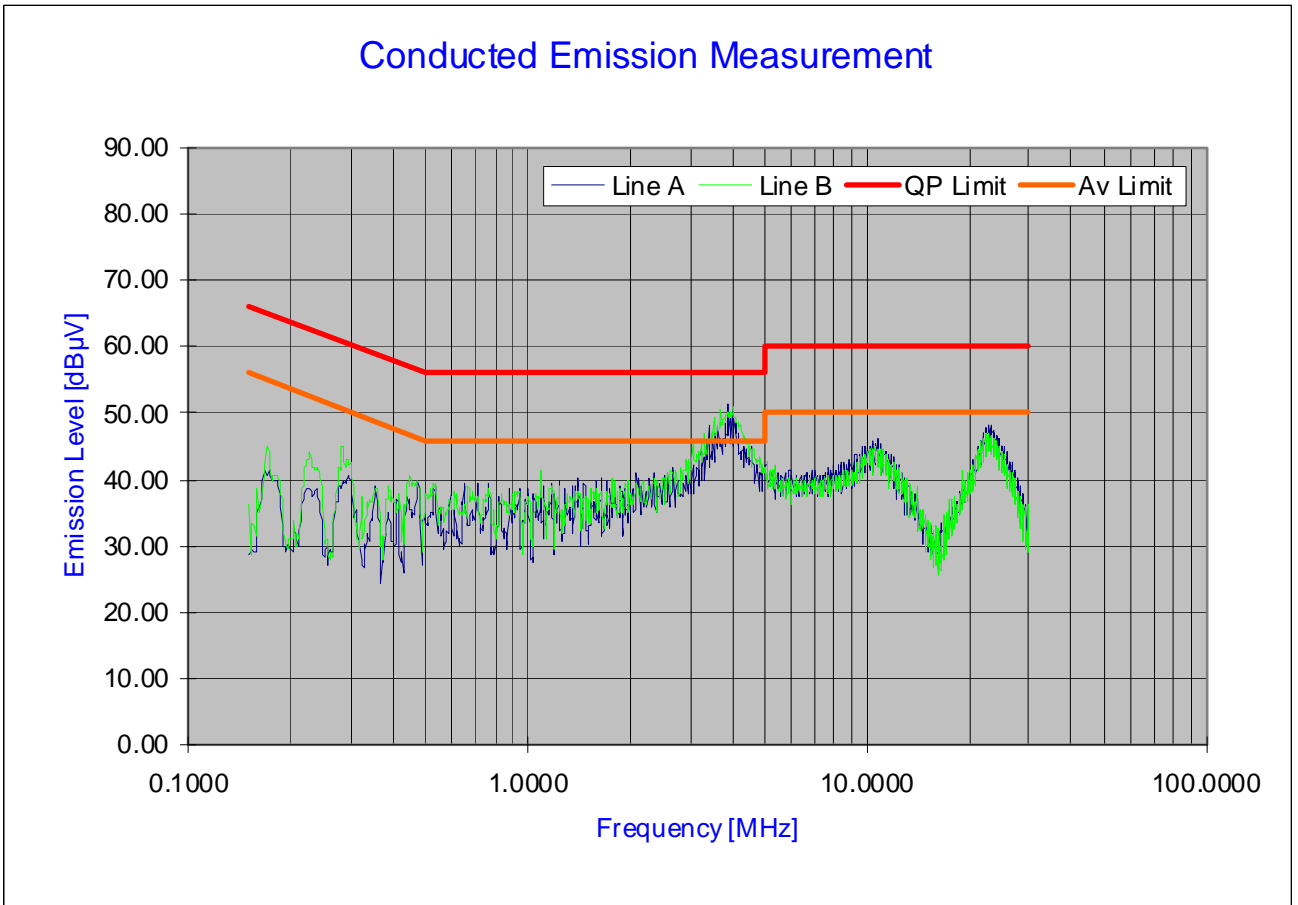Power Source : AC120V/60Hz  
 Tested Date : 09/24/2011  
 Note : Tested with 802.11a ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-63. Line Conducted Plot with 802.11a**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>	
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	<b>Reviewed by:</b> Quality Manager
			Page 65 of 69

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	3.229	7.29	40.79	56.00	-15.21	27.36	46.00	-18.64
2	A	3.350	7.30	40.67	56.00	-15.33	27.52	46.00	-18.48
3	A	3.409	7.30	42.23	56.00	-13.77	27.73	46.00	-18.27
4	A	3.639	7.32	43.93	56.00	-12.07	29.34	46.00	-16.66
5	A	3.877	7.34	45.59	56.00	-10.41	32.58	46.00	-13.42
6	A	3.995	7.35	44.05	56.00	-11.95	30.74	46.00	-15.26
7	A	4.583	7.38	41.27	56.00	-14.73	27.49	46.00	-18.51
8	A	22.698	8.81	42.40	60.00	-17.60	33.90	50.00	-16.10
9	A	23.312	8.88	42.21	60.00	-17.79	34.46	50.00	-15.54
10	A	23.403	8.89	42.08	60.00	-17.92	34.45	50.00	-15.55
11	B	2.983	7.27	37.85	56.00	-18.15	24.25	46.00	-21.75
12	B	3.068	7.28	40.18	56.00	-15.82	25.77	46.00	-20.23
13	B	3.952	7.35	45.66	56.00	-10.34	29.48	46.00	-16.52
14	B	22.143	8.85	40.42	60.00	-19.58	32.40	50.00	-17.60
15	B	22.212	8.86	40.99	60.00	-19.01	32.78	50.00	-17.22
16	B	22.423	8.89	40.67	60.00	-19.33	33.31	50.00	-16.69
17	B	22.828	8.94	40.73	60.00	-19.27	34.03	50.00	-15.97
18	B	22.917	8.96	41.07	60.00	-18.93	33.72	50.00	-16.28
19	B	23.023	8.97	41.10	60.00	-18.90	34.13	50.00	-15.87
20	B	23.242	9.00	40.81	60.00	-19.19	34.04	50.00	-15.96

Table 6-25. Line Conducted Data with 802.11a

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.


FCC ID: IHDP56ME2		FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1109131629.IHD	Test Dates: September 14 - 27, 2011	EUT Type: Portable Handset		Page 66 of 69

**Line-Conducted Test Data (Cont'd)**  
 §15.207; RSS-Gen [7.2.2]

# PCTEST Engineering Laboratory Inc.

Company : Motorola Mobility, Inc.  
 FCC ID Code : IHDP56ME2  
 Standard : FCC Part 15C, 15.207

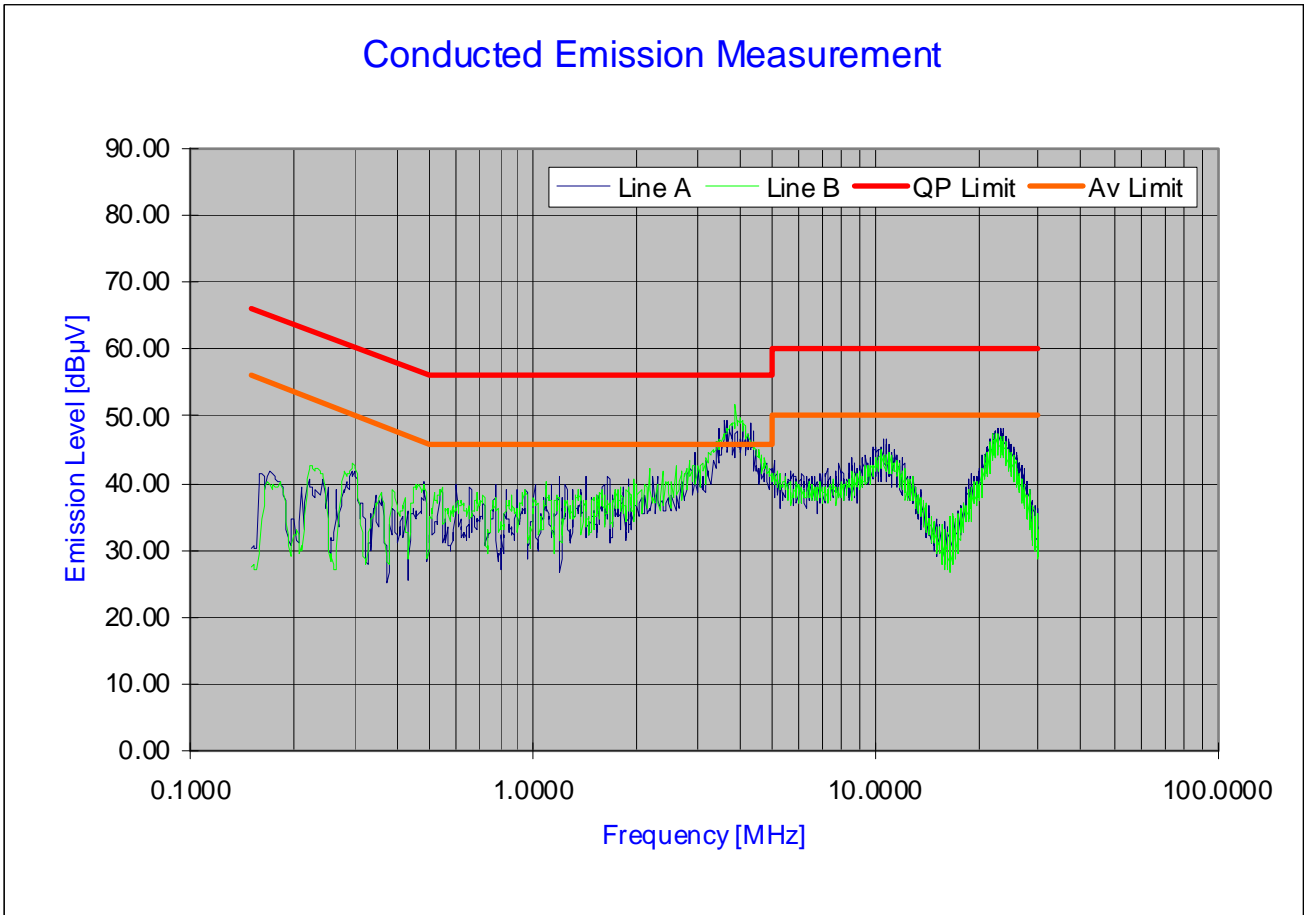Power Source : AC120V/60Hz  
 Tested Date : 09/24/2011  
 Note : Tested with 5.8GHz 802.11n ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-64. Line Conducted Plot with 802.11n (5.8GHz)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5/7.2Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 67 of 69	



**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	2.968	7.26	39.64	56.00	-16.36	26.00	46.00	-20.00
2	A	3.675	7.32	44.03	56.00	-11.97	30.31	46.00	-15.69
3	A	3.855	7.34	45.55	56.00	-10.45	31.49	46.00	-14.51
4	A	3.908	7.34	43.61	56.00	-12.39	31.67	46.00	-14.33
5	A	4.328	7.37	43.75	56.00	-12.25	29.04	46.00	-16.96
6	A	4.574	7.38	40.87	56.00	-15.13	27.85	46.00	-18.15
7	A	22.602	8.80	43.25	60.00	-16.75	34.14	50.00	-15.86
8	A	22.890	8.83	43.26	60.00	-16.74	34.60	50.00	-15.40
9	A	23.085	8.85	42.44	60.00	-17.56	34.36	50.00	-15.64
10	A	23.413	8.89	42.64	60.00	-17.36	34.31	50.00	-15.69
11	B	2.863	7.26	38.16	56.00	-17.84	25.20	46.00	-20.80
12	B	3.103	7.28	37.60	56.00	-18.40	25.82	46.00	-20.18
13	B	3.877	7.35	45.30	56.00	-10.70	32.73	46.00	-13.27
14	B	22.184	8.86	41.12	60.00	-18.88	32.62	50.00	-17.38
15	B	22.515	8.90	41.83	60.00	-18.17	33.59	50.00	-16.41
16	B	22.962	8.96	41.44	60.00	-18.56	33.88	50.00	-16.12
17	B	23.099	8.98	41.28	60.00	-18.72	33.82	50.00	-16.18
18	B	23.115	8.98	41.14	60.00	-18.86	33.74	50.00	-16.26
19	B	23.355	9.01	40.55	60.00	-19.45	33.68	50.00	-16.32
20	B	23.565	9.04	40.47	60.00	-19.53	33.63	50.00	-16.37

**Table 6-26. Line Conducted Data with 802.11n (5.8GHz)**



**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5/7.2Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 68 of 69	

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Motorola Portable Handset FCC ID: IHDP56ME2** is in compliance with Part 15C of the FCC Rules and RSS-210 of the Industry Canada Rules.

<b>FCC ID:</b> IHDP56ME2		<b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1109131629.IHD	<b>Test Dates:</b> September 14 - 27, 2011	<b>EUT Type:</b> Portable Handset	Page 69 of 69	