



**MOTOROLA MOBILITY**

**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 24876-1

**Report Date** – January 4, 2012

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature:

A handwritten signature in black ink that reads "Albert J. Patapack".

Name: Albert J. Patapack

Title: EMC Engineer

Date: January 4, 2012

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY UKAS OR ANY AGENCY OF THE U.S. GOVERNMENT.



UKAS Certificate Number: 2404

**Table of Contents**

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
RF Power Output	6
Measurement results	6
Radiated Power	9
Measurement results	9
Occupied Bandwidth	10
Measurement results	11
Spurious Emissions at Antenna Terminals	25
Measurement results	26
Field Strength of Spurious Emissions	36
Measurement results	37
Frequency Stability	41
Measurement results	42

**Test Report Details**

Tests Performed By: ADR Testing Service  
 Location Code: ADR LV  
 Motorola Mobility Inc  
 Product Safety and Compliance Group  
 600 North US Hwy 45  
 Libertyville, IL 60048  
 PH (847) 523-6167 Fax (847) 523-4538  
 FCC Registration Number: 316588  
 Industry Canada Number: 1090-1

Tests Requested By: Motorola Mobility Inc.  
 600 North US Hwy 45  
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: CDMA 800, CDMA EV-DO Release A  
 WCDMA 850/1900, GSM 850/1900,  
 HSDPA, HSUPA, EDGE, GPRS,  
 Bluetooth LE + EDR  
 802.11a/802.11b/802.11g/802.11n

FCC ID: IHDP56ME5

Serial Numbers: TA594000D7, TA594000BS, TA594000CR

Testing Complete Date: January 4, 2012

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X   Part 2
- X   Part 22 Subpart H - Public Mobile Services
- X   Part 24 Subpart E – Personal Communications Services

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004,  
 RSS-Gen Issue 3, RSS-132 Issue 2, RSS-133 Issue 5

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	EIRP (Effective Isotropic Radiated Power)	Pass
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	EIRP (Effective Isotropic Radiated Power)	See results
4	Occupied Bandwidth	See Plots
5	Spurious Emissions at Antenna Terminal	See results
6	Field Strength of Spurious Emissions	See results
7	Frequency Stability	See results

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

This product utilizes an internal battery that is not removable. All EMC testing was performed with the internal battery fully charged. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4 2003 Standard requirements during the entire duration of testing.

**Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

<b>Manufacturer</b>	<b>Equipment Type</b>	<b>Model No.</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	Receiver	ESIB40	100226	3/30/2012
Hewlett Packard	EMC Analyzer	E7405	US39440191	9/23/2012
Agilent	MXA Signal Analyzer	N9020A	US46470586	12/18/2011
Rohde & Schwarz	FSU Spectrum Analyzer	FSU26	FC354000	11/12/2012
Agilent	Signal Generator	83712A	3429A00286	3/26/2013
ETS	DRG Horn Antenna	3115	6222	3/16/2012
A. H. Systems	DRG Horn Antenna	SAS 200/571	365	8/24/2012
ETS	Log-Periodic Antenna	3148	1189	1/19/2012
ETS	Biconical Antenna	3110B	3370	1/19/2012
Attenuator	Weinschel	AS-6	6675	NCR
Attenuator	Weinschel	AS-6	6677	NCR
Thermotron	Environmental Chamber	S-4	31580	11/16/2012
Agilent	Power Meter	E4416A	GB41293258	7/15/2013
Agilent	Power Sensor	E9323A	US40412063	8/19/2012
Agilent	Microwave Preamplifier	8449B	3008A01442	9/22/2012

Note that the Agilent power meter and signal generator are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle. All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service.

## Measurement Procedures and Data

### RF POWER OUTPUT

#### Measurement Procedure

The RF output port of the Equipment Under Test, EUT, is directly coupled to the input of an Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector. The average power output is measured for all channels.

#### Measurement Results

##### GSM 850

Frequency (MHz)	Power (dBm)
824.2	33.66
836.6	33.62
848.8	33.47

##### GSM 1900

Frequency (MHz)	Power (dBm)
1850.2	31.04
1880.0	30.90
1909.8	31.10

##### EDGE 850

Frequency (MHz)	Power (dBm)
824.2	28.76
836.6	28.70
848.8	28.42

##### EDGE 1900

Frequency (MHz)	Power (dBm)
1850.2	27.62
1880.0	27.64
1909.8	27.76

##### CDMA 800

Frequency (MHz)	Power (dBm)
824.70	24.99
836.52	24.98
848.31	24.86

Conducted Power was measured according to the “SAR Measurement Procedure for 3G Devices” released on October, 2007. .

Band	Channel	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes			
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4
WCDMA 850	4132	23.83	23.18	23.69	23.74	23.68	23.65
	4180	23.76	23.12	23.56	23.62	23.58	23.58
	4233	23.88	23.37	23.72	23.8	23.75	23.76
WCDMA 1900	9262	23.71	23.29	23.74	23.71	23.8	23.72
	9400	23.70	23.26	23.71	23.72	23.70	23.70
	9538	23.63	23.24	23.70	23.68	23.77	23.6

Band	Channel	Conducted Power (dBm) for WCDMA – HSPA (HSUPA/HSDPA-Rel 6) Modes				
		Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
WCDMA 850	4132	23.75	23.7	23.72	23.68	23.75
	4180	23.67	23.64	23.63	23.61	23.62
	4233	23.83	23.56	23.77	23.78	23.76
WCDMA 1900	9262	23.75	23.72	23.74	23.75	23.78
	9400	23.71	23.72	23.74	23.72	23.78
	9538	23.7	23.68	23.74	23.67	23.66

Based on the power measurements, all WCDMA testing was performed in RMC mode.

Band	Channel	Measured Conducted Power (dBm) for CDMA modes							
		Loopback				Data		EVDO Rev O	EVDO Rev A
		RC3		RC1		TDSO SO32		RTAP 153.6K	Subtest 2 RETAP
		SO55	SO2	SO55	SO2	+FCH-SCH	+SCH		
CDMA 800	1013	24.99	24.91	24.91	24.92	24.95	24.98	25.08	24.85
	384	24.98	24.85	24.84	24.88	24.82	24.85	24.97	24.6
	777	24.86	24.75	24.82	24.83	24.80	24.76	24.96	24.56

Based on the power measurements, all testing was performed in RC3/SO55 CDMA mode

**RADIATED POWER (EIRP AND ERP)**

**Measurement Procedure**

The EUT was tested in a 16’ anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT’s radiation patterns. For all tests, the EUT was supported in a free space type environment, vertically oriented in the chamber.

All measurements were made with the EUT placed in a call using a mobile station test set. The EUT was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Rhode & Schwarz FSP Spectrum Analyzer using the Peak Detector for all bands. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

The EUT was tested in all configurations and the highest power level is reported.

**Measurement Results**

<b>Band</b>	<b>EIRP dBm</b>	<b>ERP dBm</b>
GSM 850	31.3	<b>29.2</b>
GSM 1900	<b>32.5</b>	30.4
EDGE 850	29.8	<b>27.7</b>
EDGE 1900	<b>32.2</b>	30.1
WCDMA 850	26.8	<b>24.7</b>
WCDMA 1900	<b>30.0</b>	27.9
CDMA 800	28.7	<b>26.6</b>

## OCCUPIED BANDWIDTH

### Measurement Procedure


The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples ( $\geq$ #)
Reference Plot - GSM 850	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 850	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Reference Plot - GSM 1900	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 1900	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Reference Plot - CDMA 800	3000	Auto	2001	Max Hold	Peak	100
OCBW - CDMA 800	30	Auto	1601	Max Hold	Peak	100
Lower Band Edge - CDMA 800	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - CDMA 800	1	Auto	2004	Max Hold	Peak	30

- Notes:
- 1) When the video bandwidth is set to Auto, the video bandwidth self adjusts for the resolution bandwidth.
  - 2) The GSM plotted data shown for the band edge measurements is representative of data taken with a true 3kHz resolution bandwidth filter. The raw data was taken using a 1kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 3kHz resolution bandwidth filter.
  - 3) The CDMA plotted data shown for the band edge measurements is representative of data taken with a true 13kHz resolution bandwidth filter. The raw data was taken using a 1kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 13kHz resolution bandwidth filter.


**Measurement Results – GSM 850**

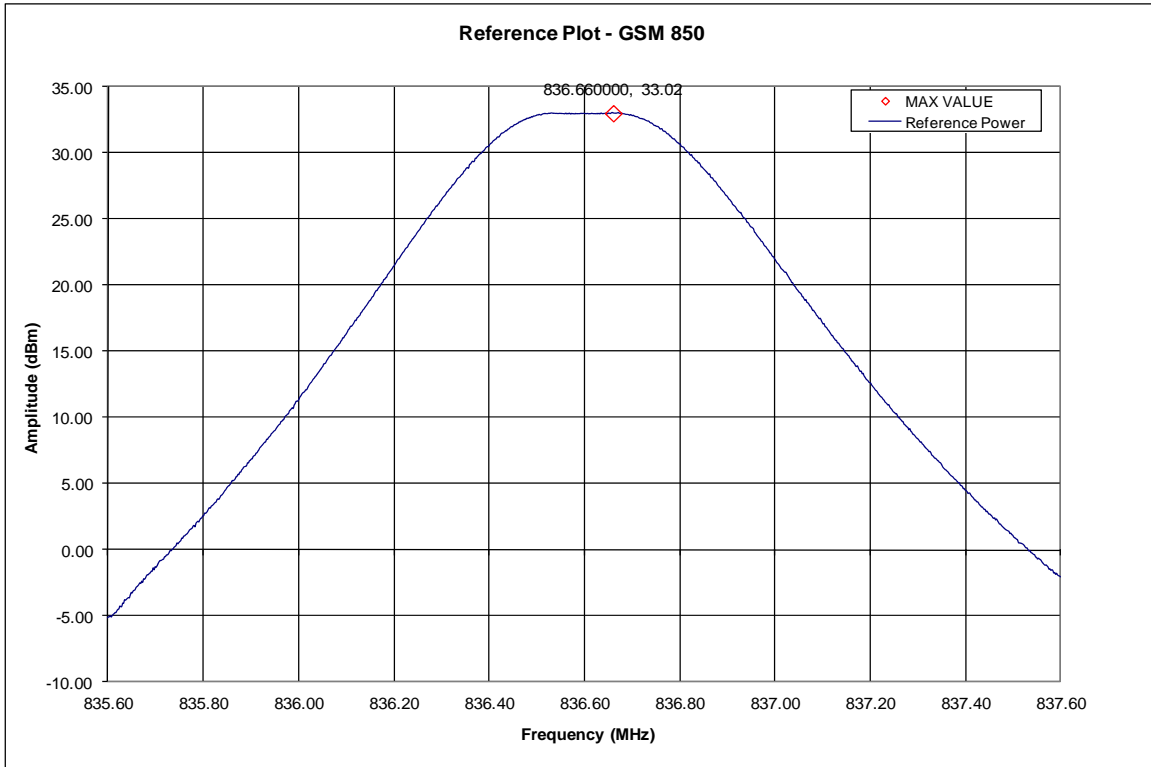


**GSM 850 – Reference Level Plot – Channel 190 (836.60 MHz)**



**GSM 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

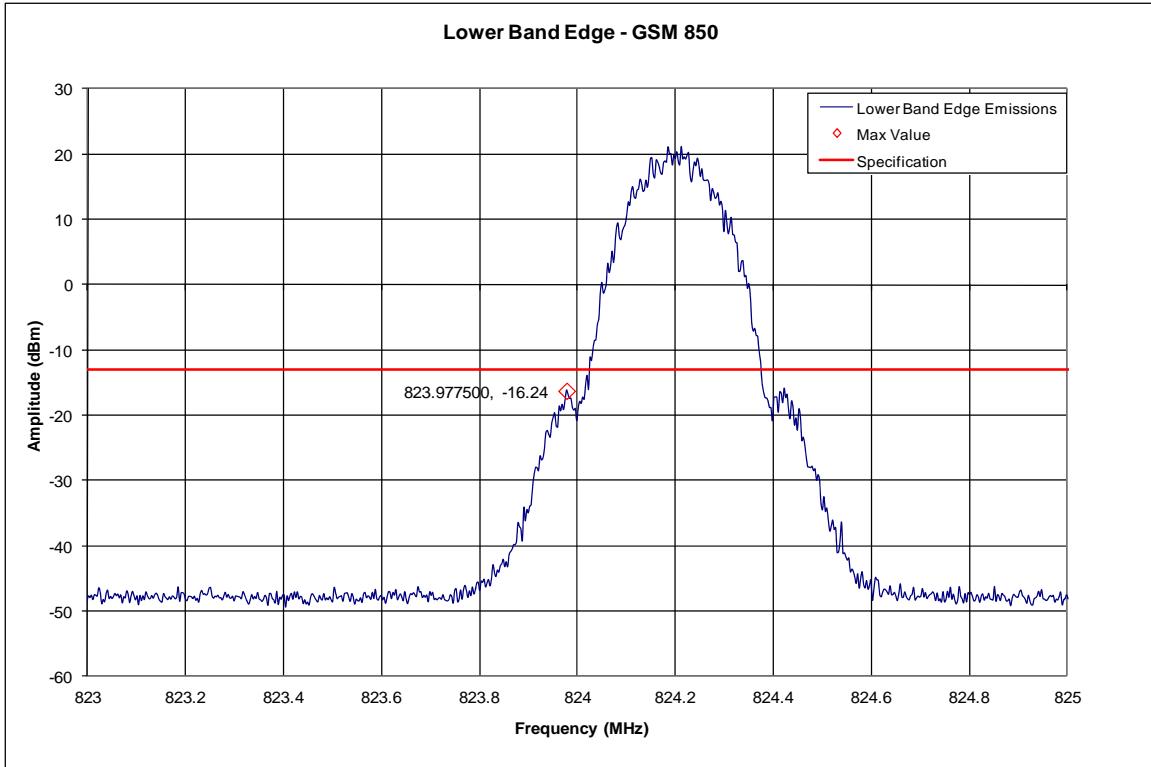


**GSM 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

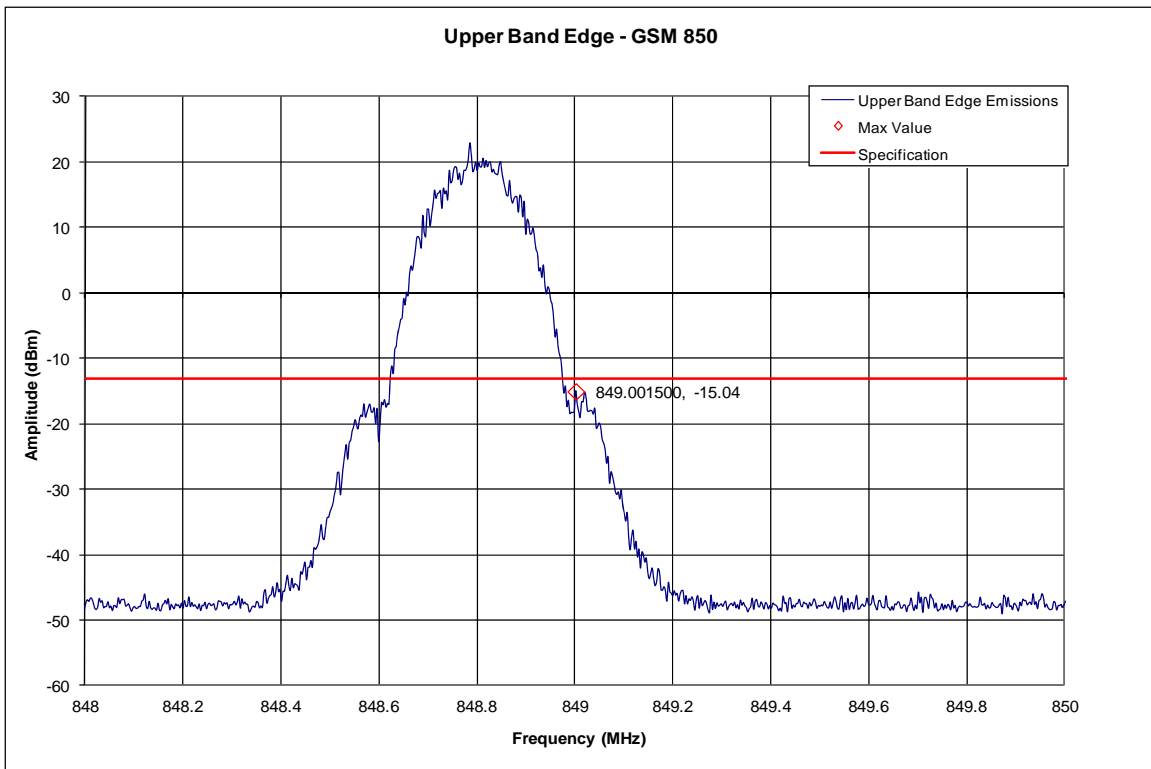


**GSM 850 – Upper Band Edge – Channel 251 (848.8 MHz)**


**Measurement Results – EDGE 850**

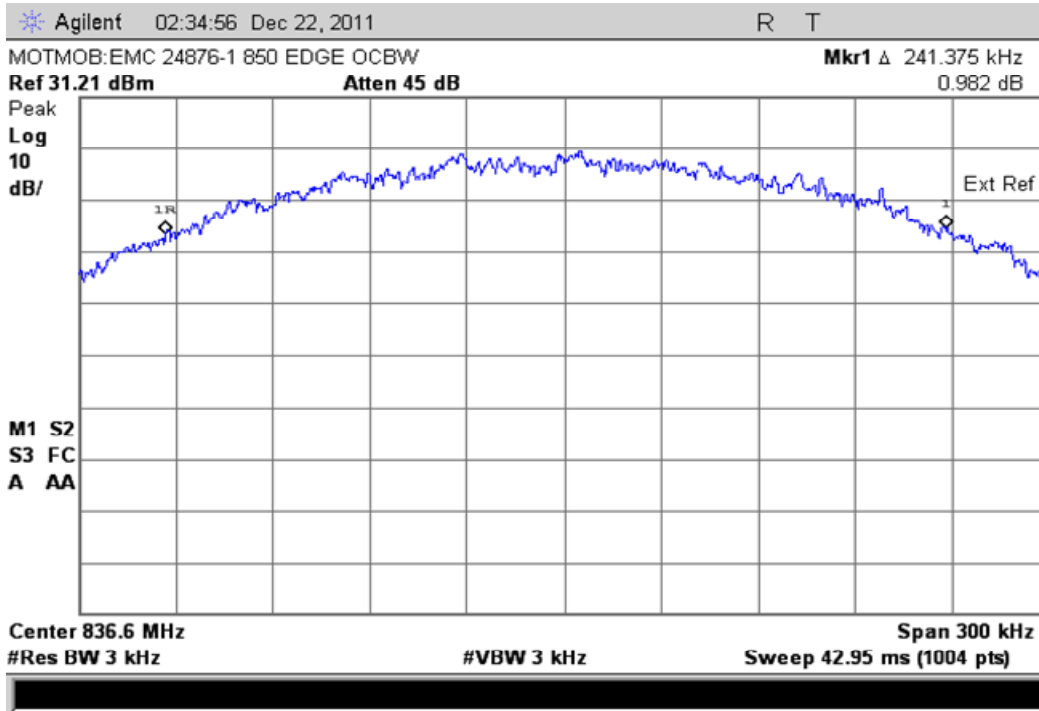

**EDGE 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

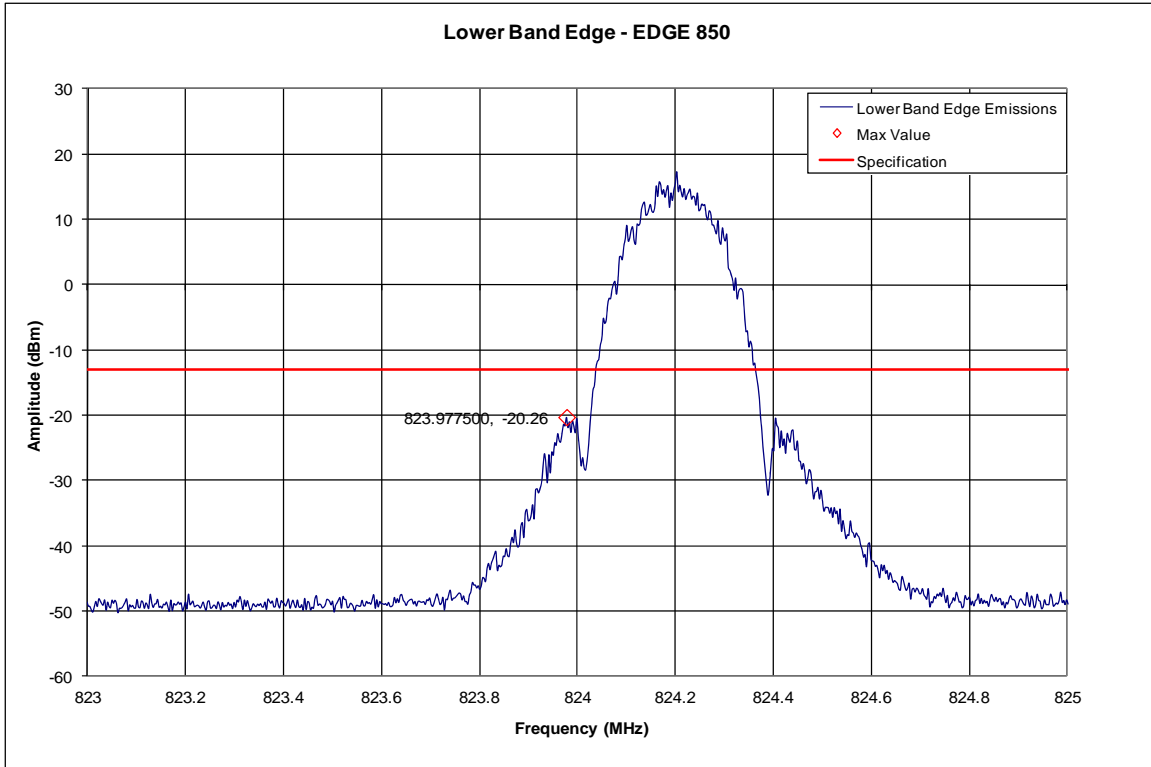


**EDGE 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

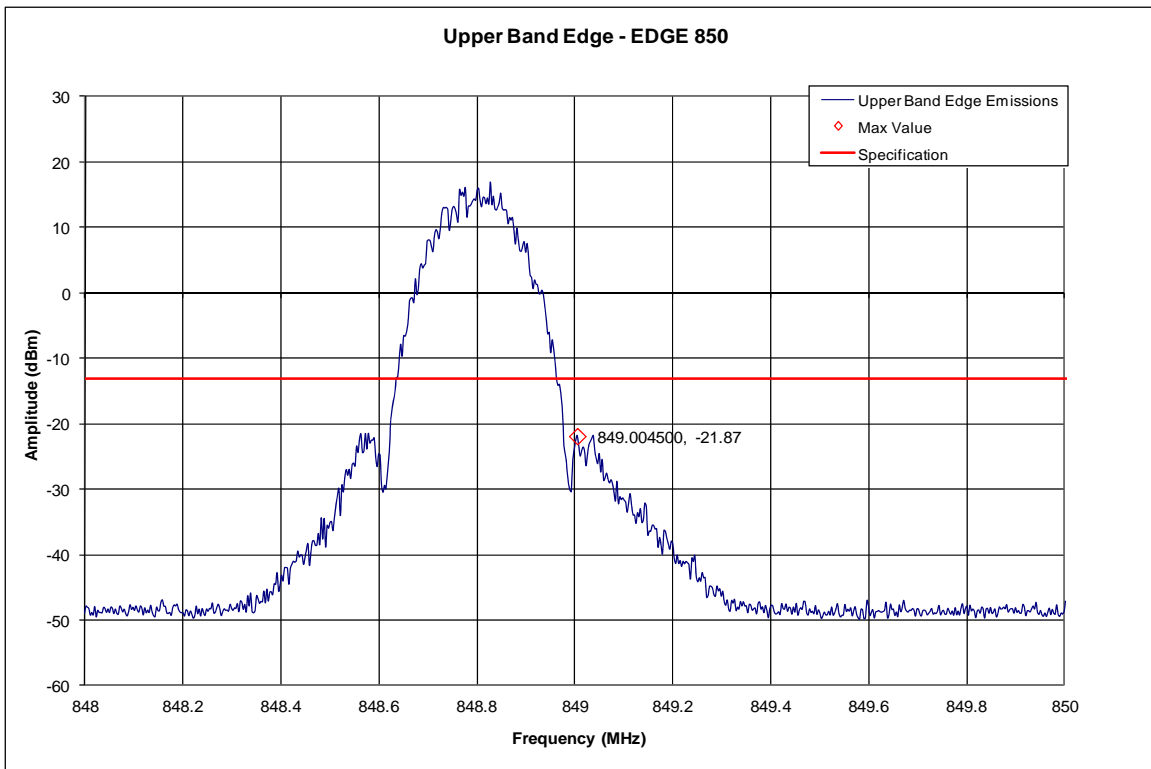


**EDGE 850 – Upper Band Edge – Channel 251 (848.8 MHz)**


**Measurement Results – GSM 1900**

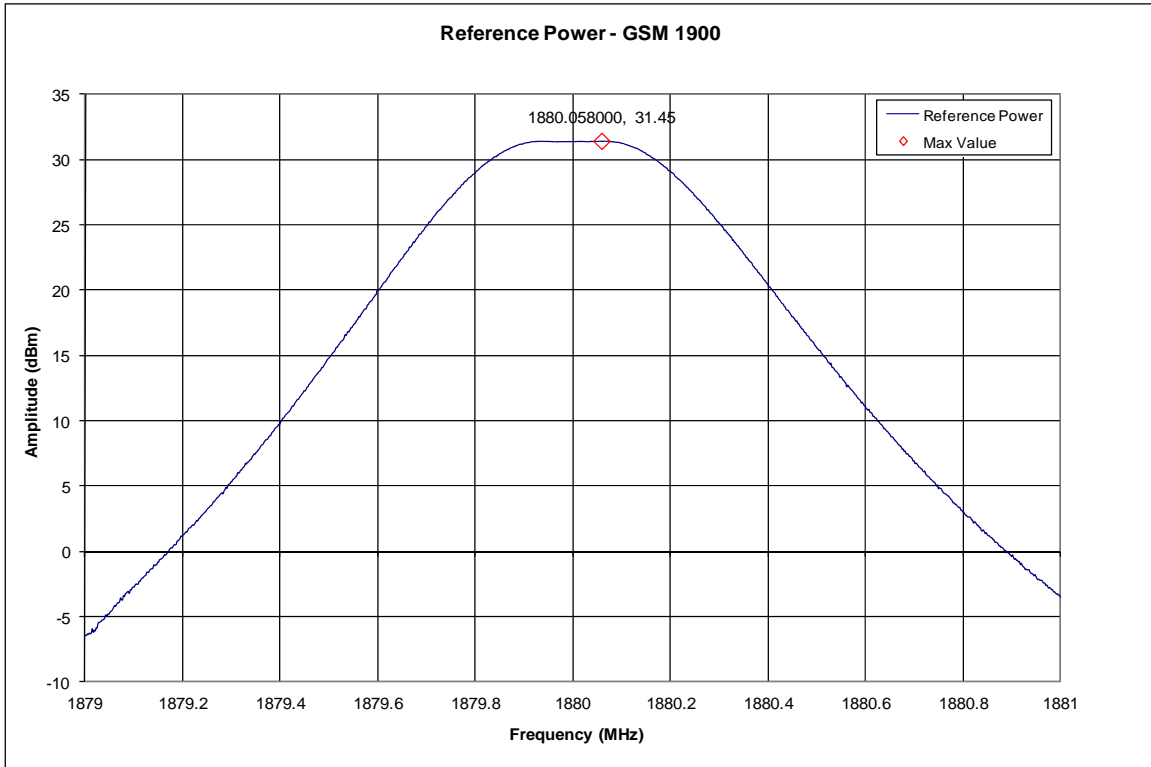


**GSM 1900 – Reference Level Plot – Channel 661 (1880.00MHz)**

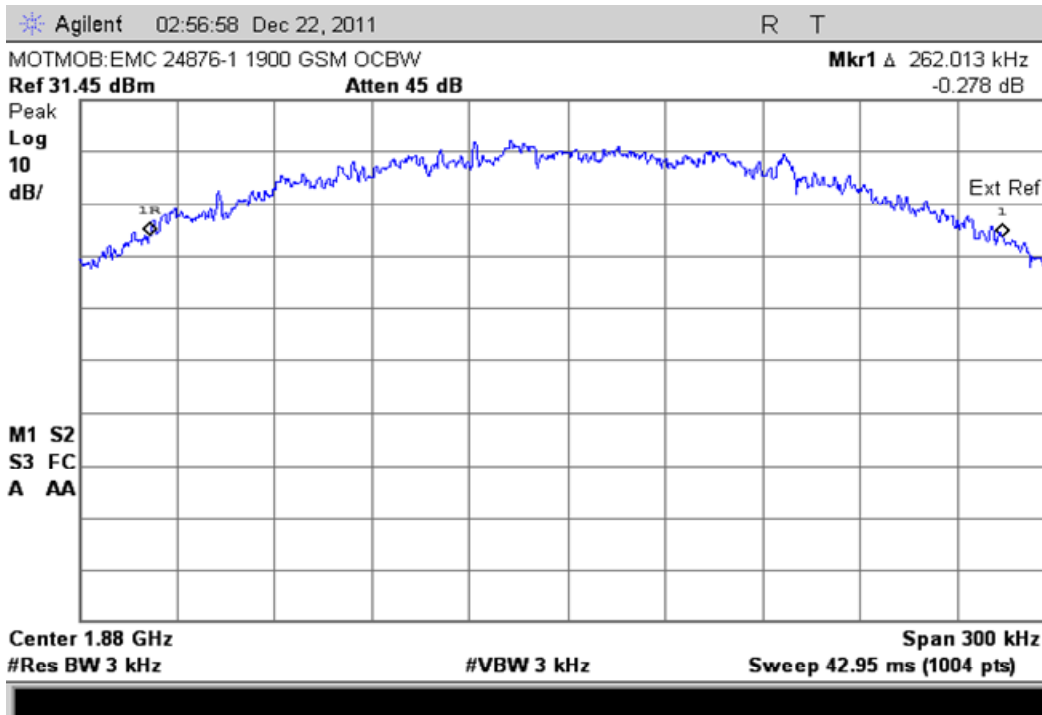

**GSM 1900 – Occupied Bandwidth – Channel 661 (1880.00MHz)**

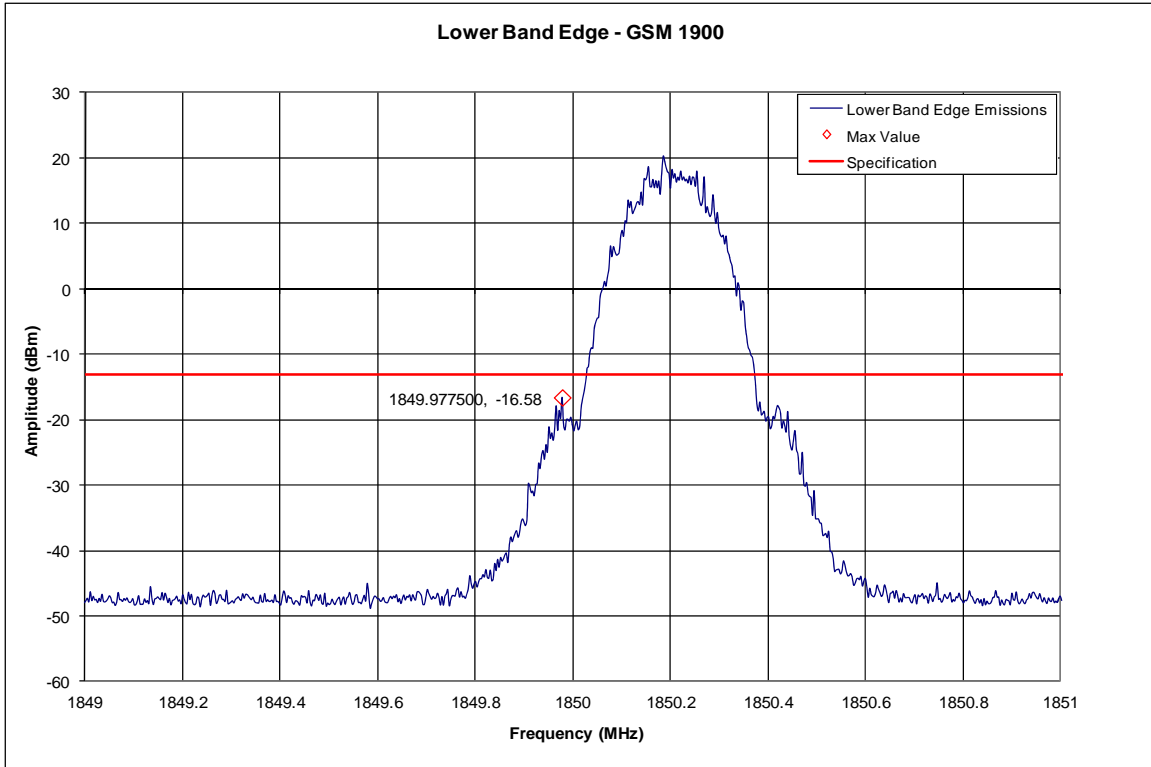


**GSM 1900 – Lower Band Edge – Channel 512 (1850.2MHz)**

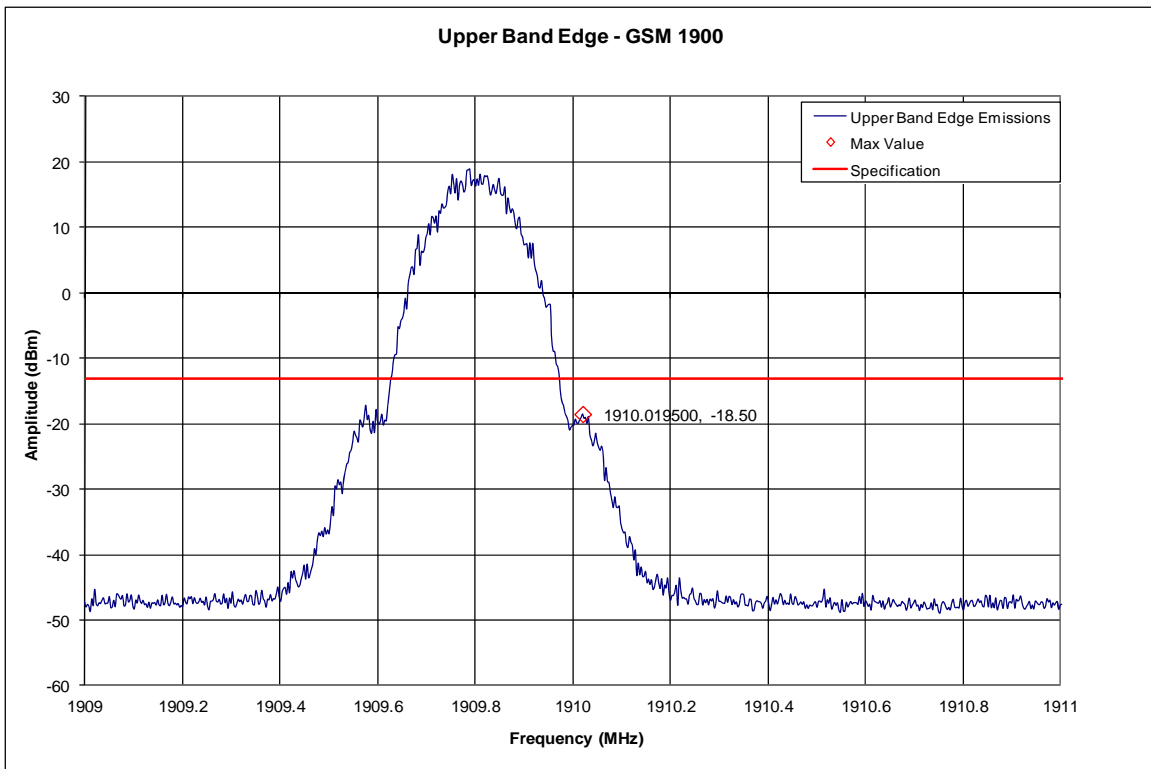


**GSM 1900 – Upper Band Edge – Channel 810 (1909.8MHz)**


**Measurement Results – EDGE 1900**

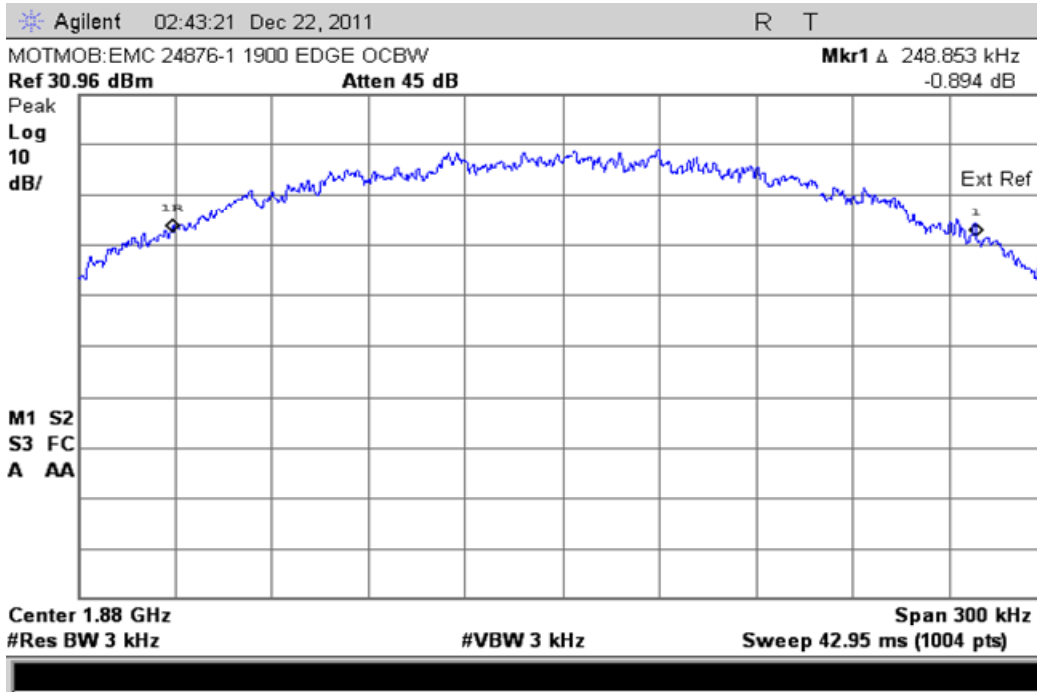

**GSM 1900 EDGE – Occupied Bandwidth – Channel 661 (1880.00MHz)**

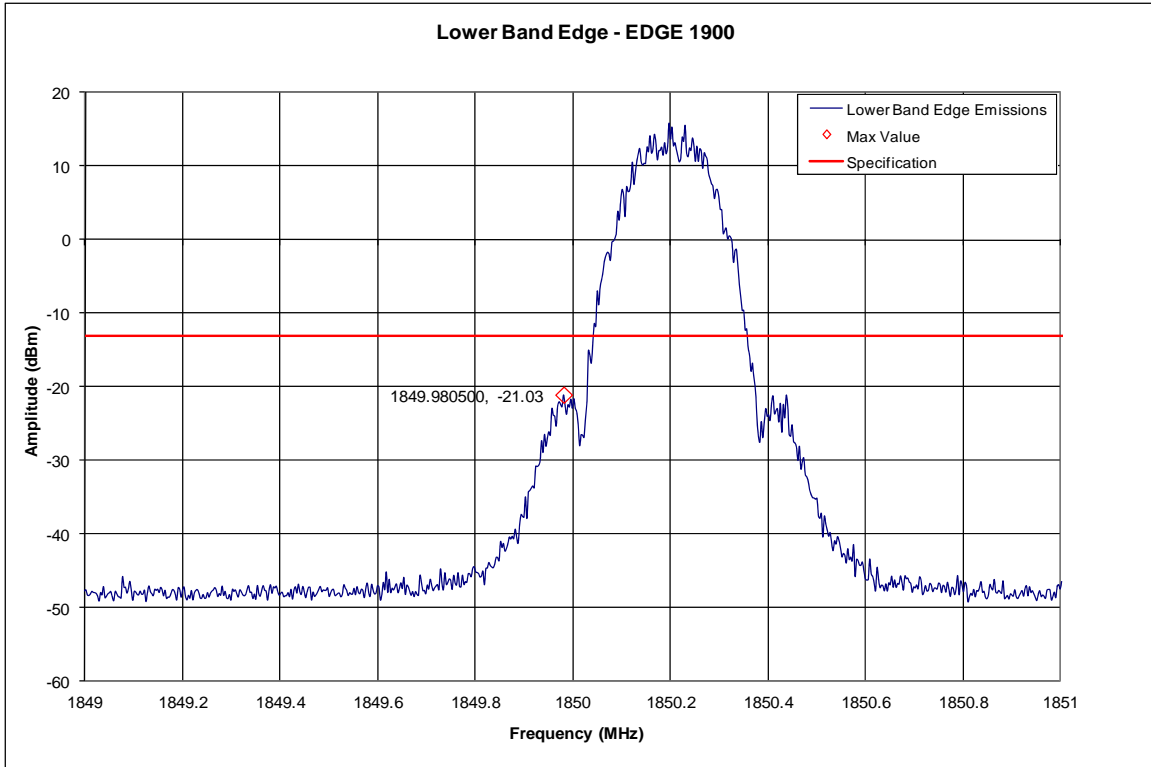


**GSM 1900 EDGE – Lower Band Edge – Channel 512 (1850.2MHz)**

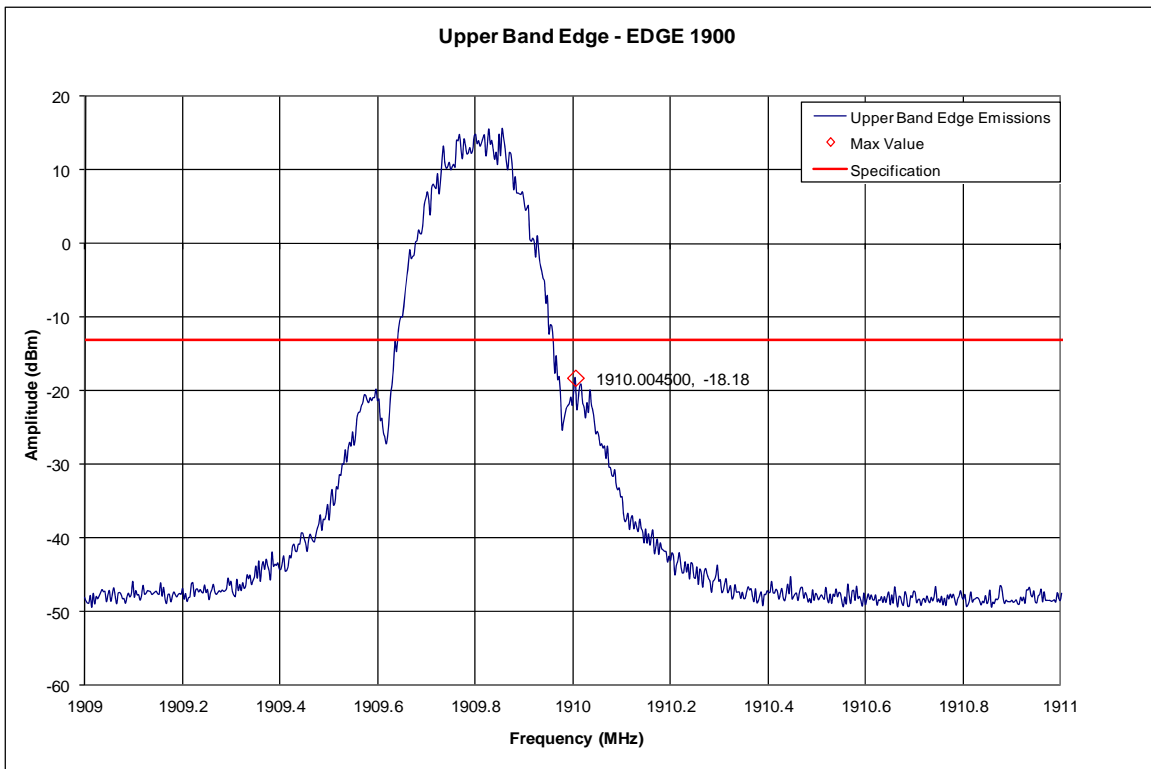


**GSM 1900 EDGE – Upper Band Edge – Channel 810 (1909.8MHz)**


**Measurement Results – CDMA 800**

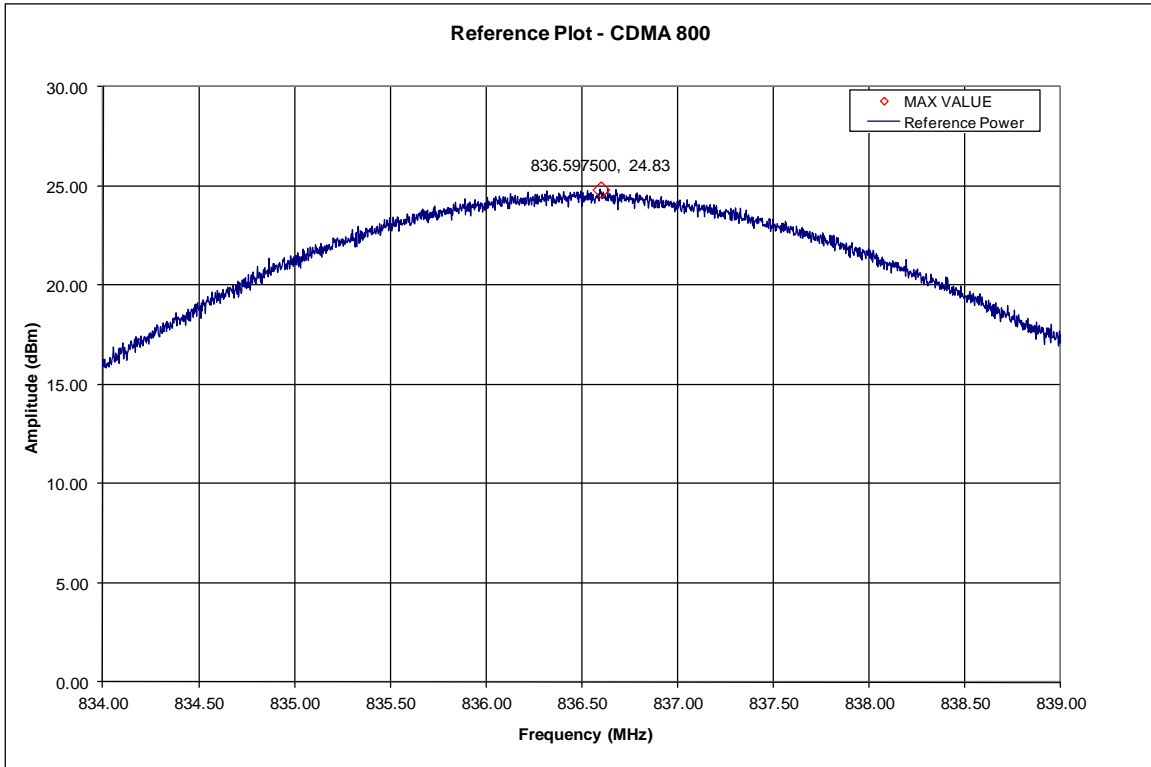


**CDMA 800 – Reference Level Plot – Channel 384 (836.52MHz)**

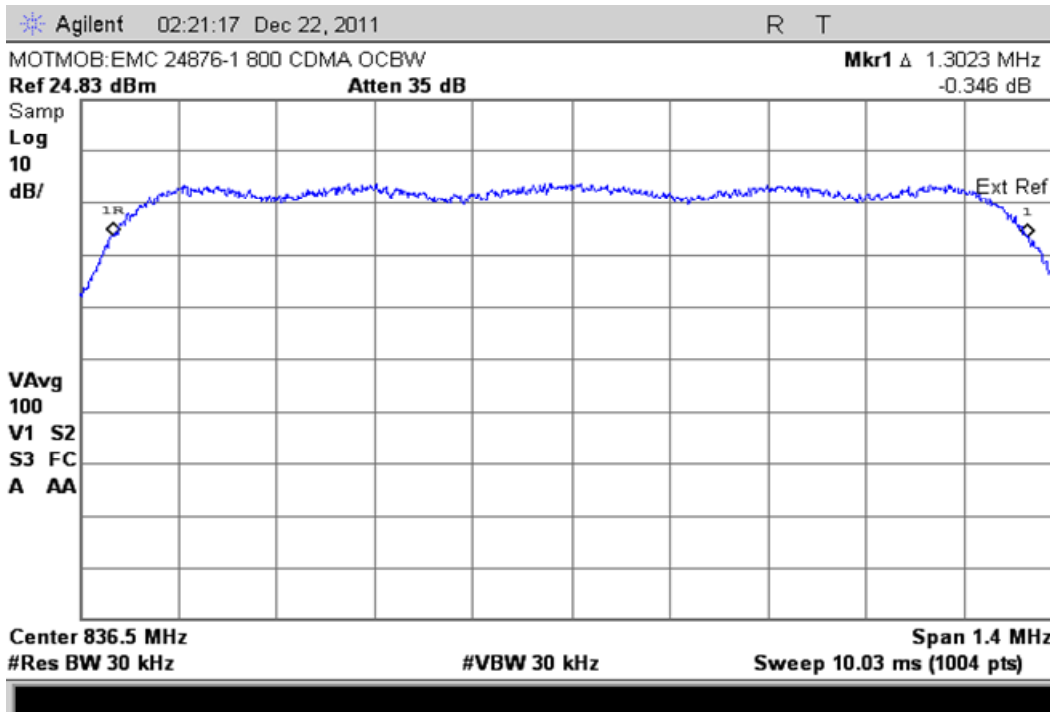

**CDMA 800 – Occupied Bandwidth – Channel 384 (836.52MHz)**

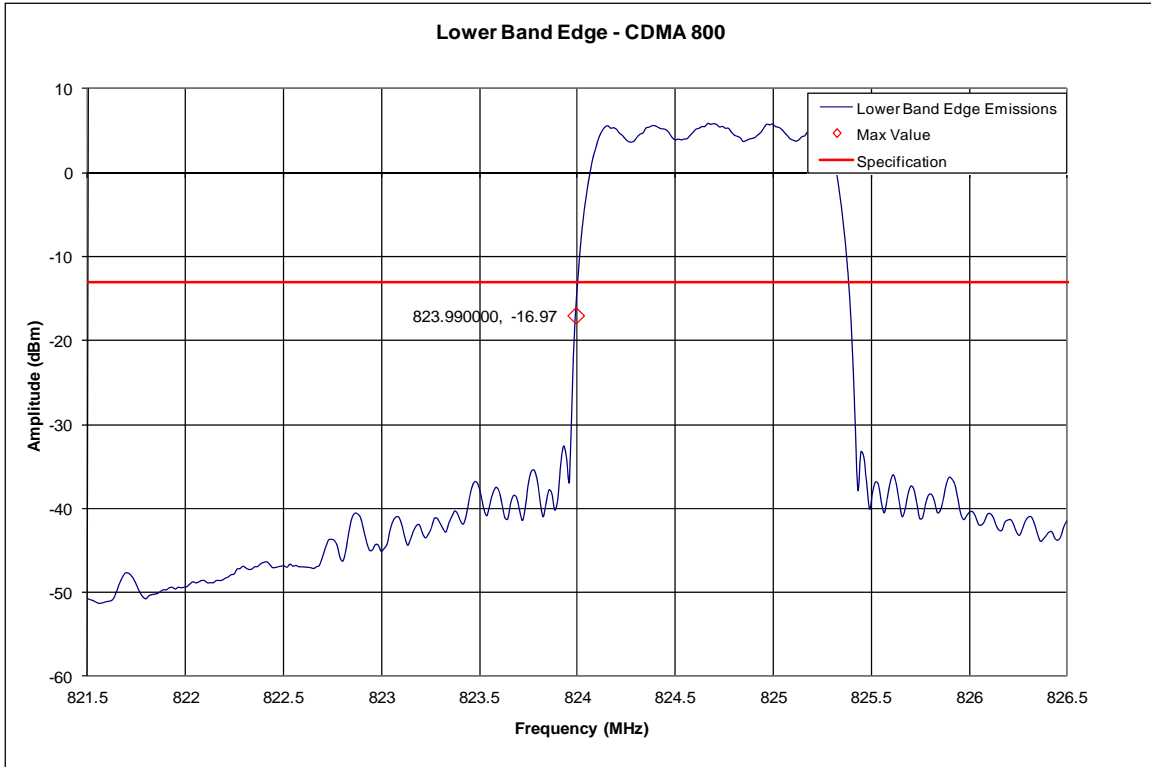

**CDMA 800 – Lower Band Edge – Channel 1013 (824.702MHz)**

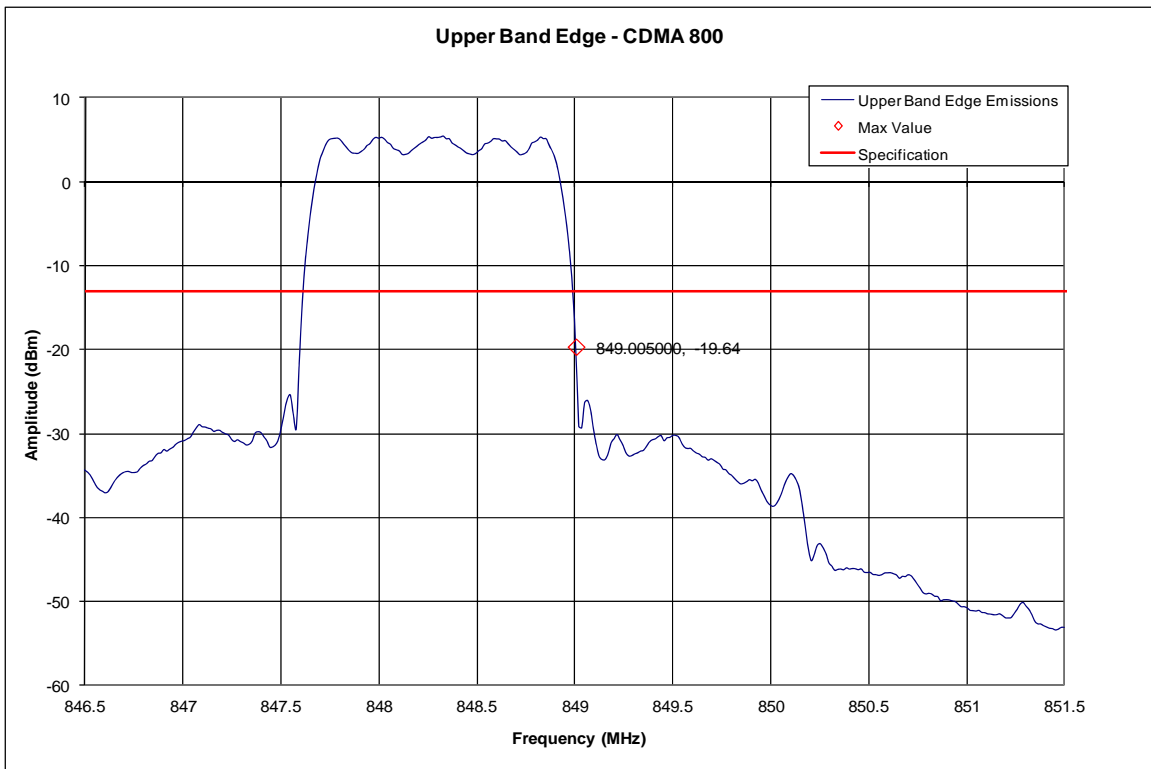


**CDMA 800 – Upper Band Edge – Channel 777 (848.31MHz)**


**Measurement Results – WCDMA 850**




**WCDMA 850 – Reference Level Plot – Channel 4180 (836.0MHz)**

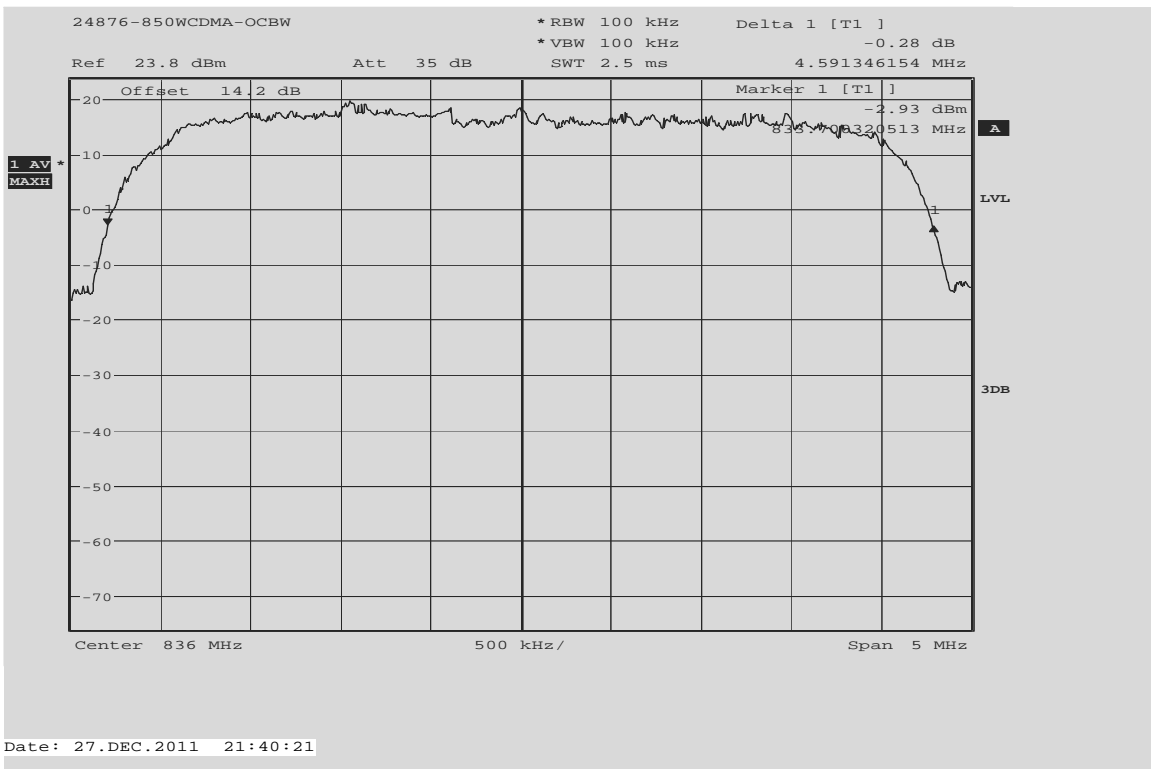

**WCDMA 850 – Occupied Bandwidth – Channel 4180 (836.0MHz)**

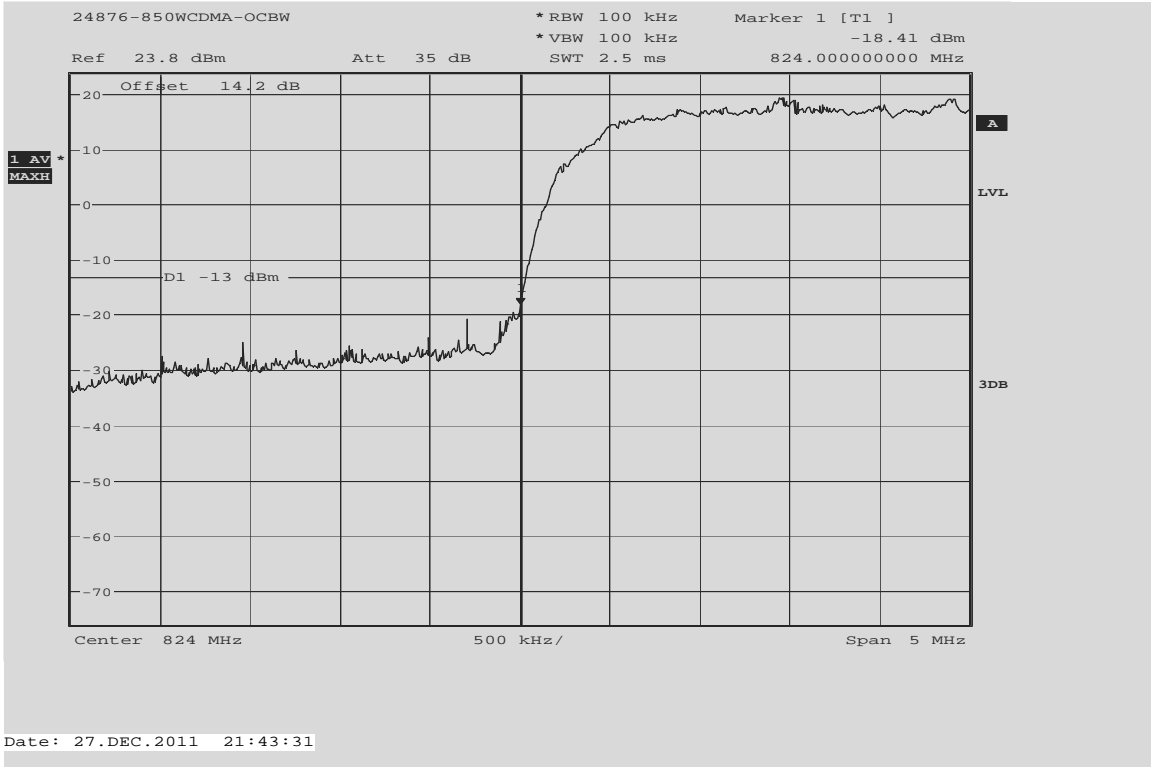


WCDMA 850 – Lower Band Edge – Channel 4132 (826.4 MHz)

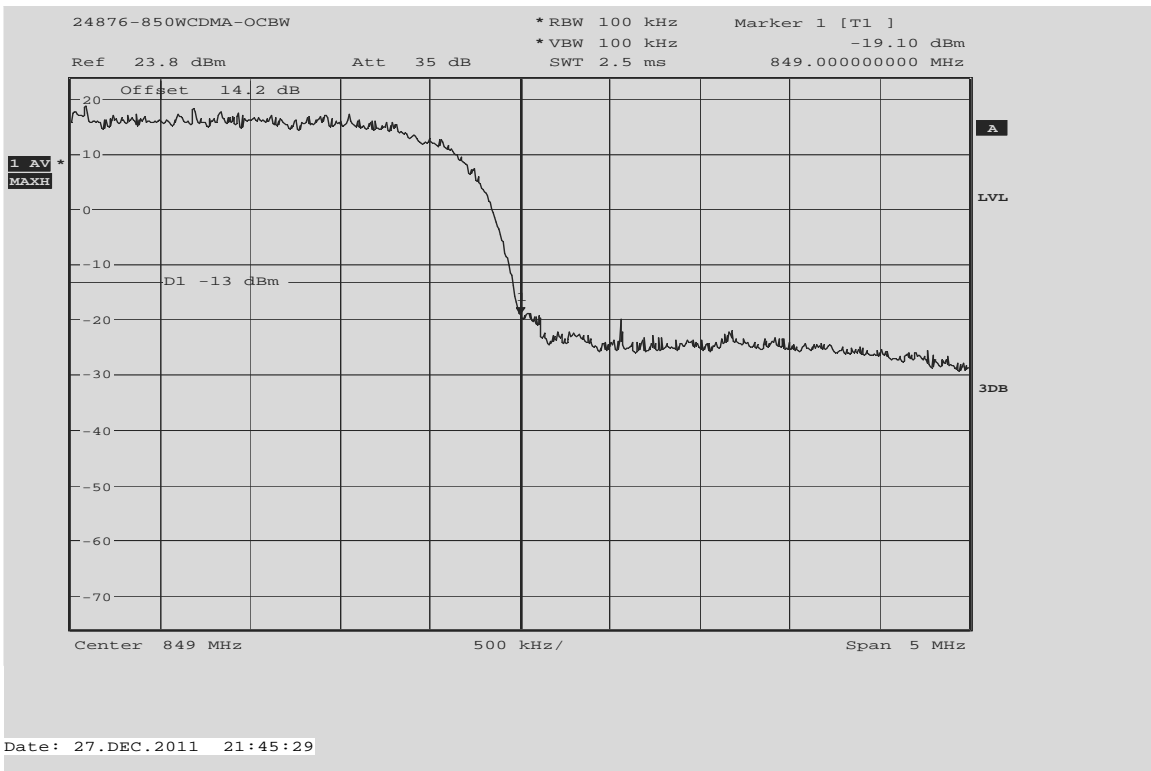


WCDMA 850 – Upper Band Edge – Channel 4233 (848.6 MHz)


**Measurement Results – WCDMA 1900**

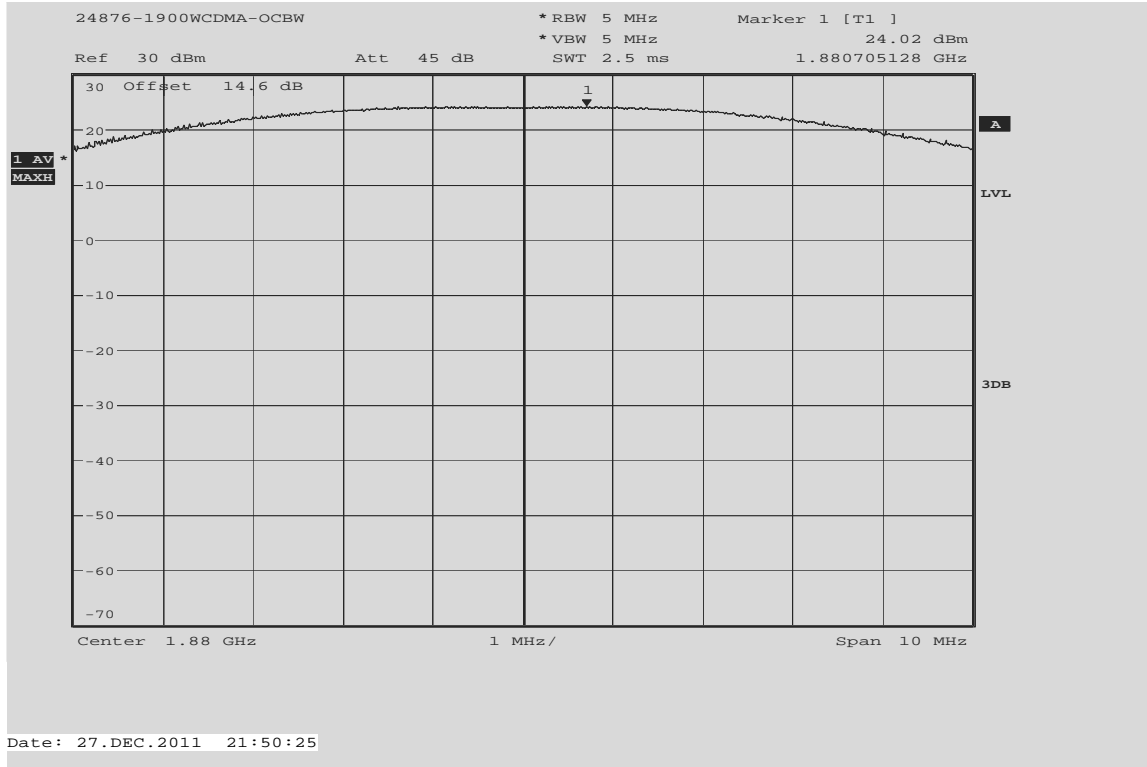


**WCDMA 1900 – Reference Level Plot – Channel 9400 (1880.00 MHz)**

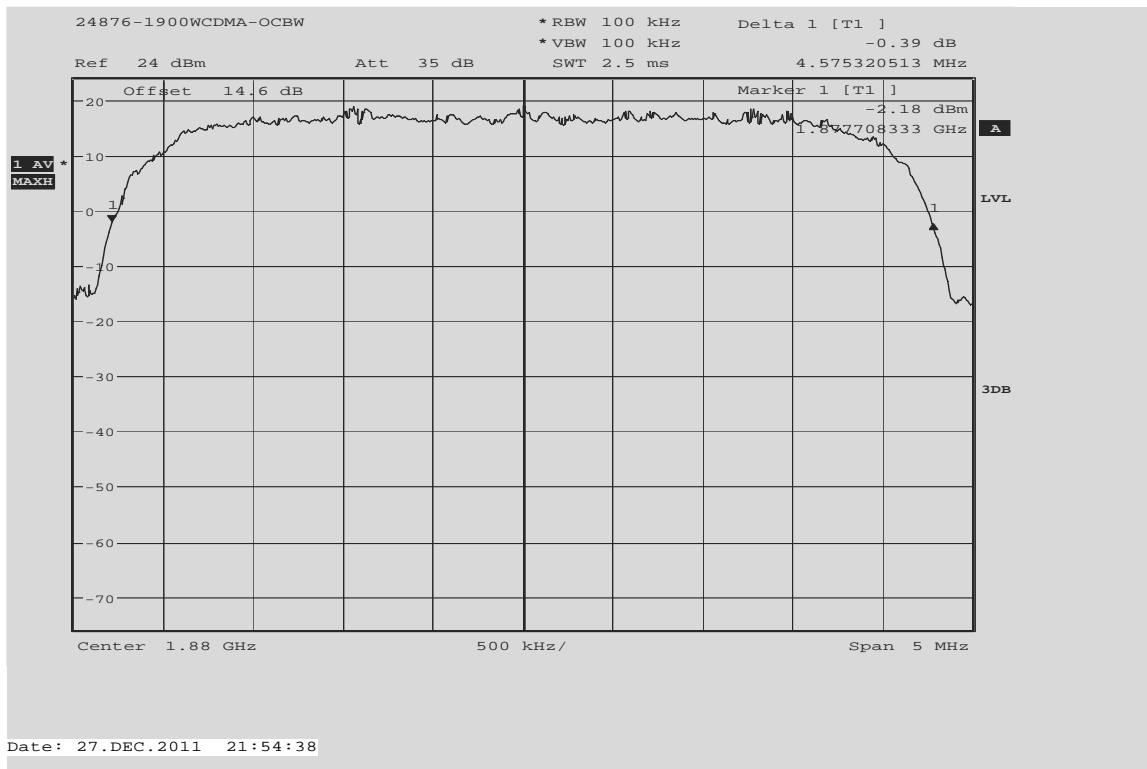

**WCDMA 1900 – Occupied Bandwidth – Channel 9400 (1880.00 MHz)**

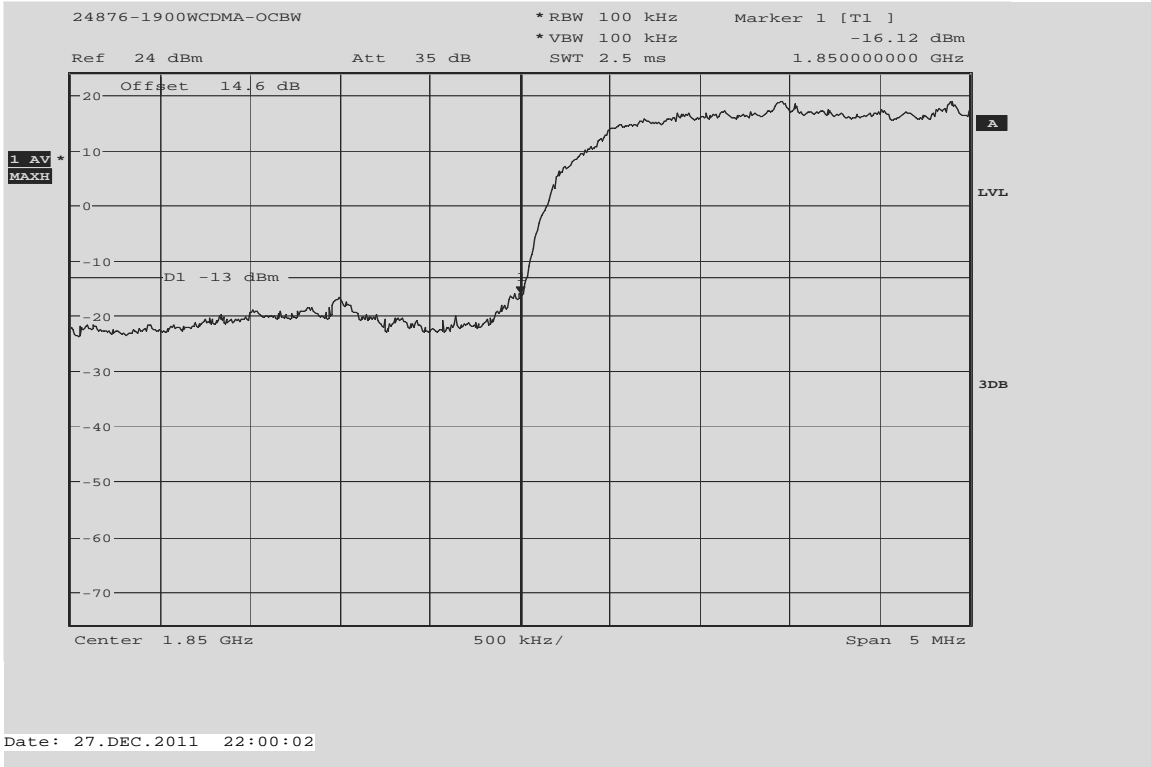

**WCDMA 1900 – Lower Band Edge – Channel 9262 (1852.40 MHz)**

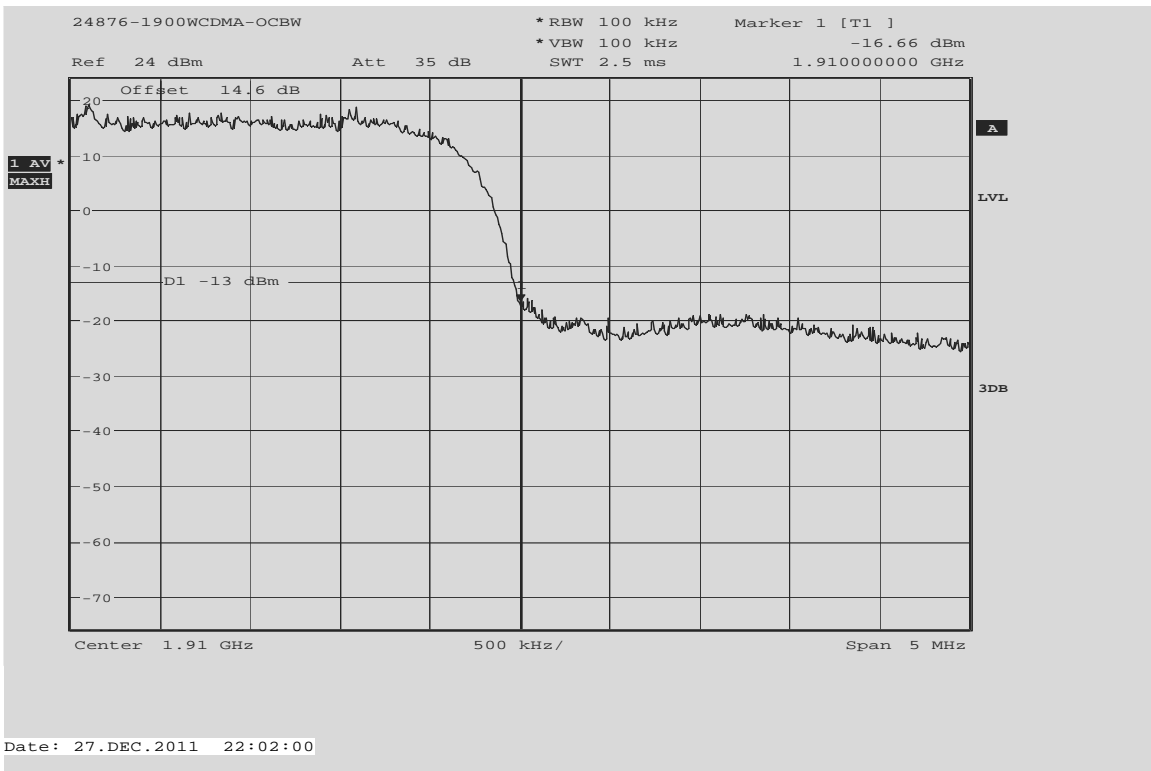

**WCDMA 1900 – Upper Band Edge – Channel 9538 (1907.60 MHz)**

## **SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### **Measurement Procedure**

The RF output port of the EUT is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:


Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

### **Measurement Results**

Attached

**Measurement Results**  
**Modulation: GSM 850**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-37.91
3rd harmonic	-13	-36.13
4th harmonic	-13	-53.16
5th harmonic	-13	*
6th harmonic	-13	-52.15
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

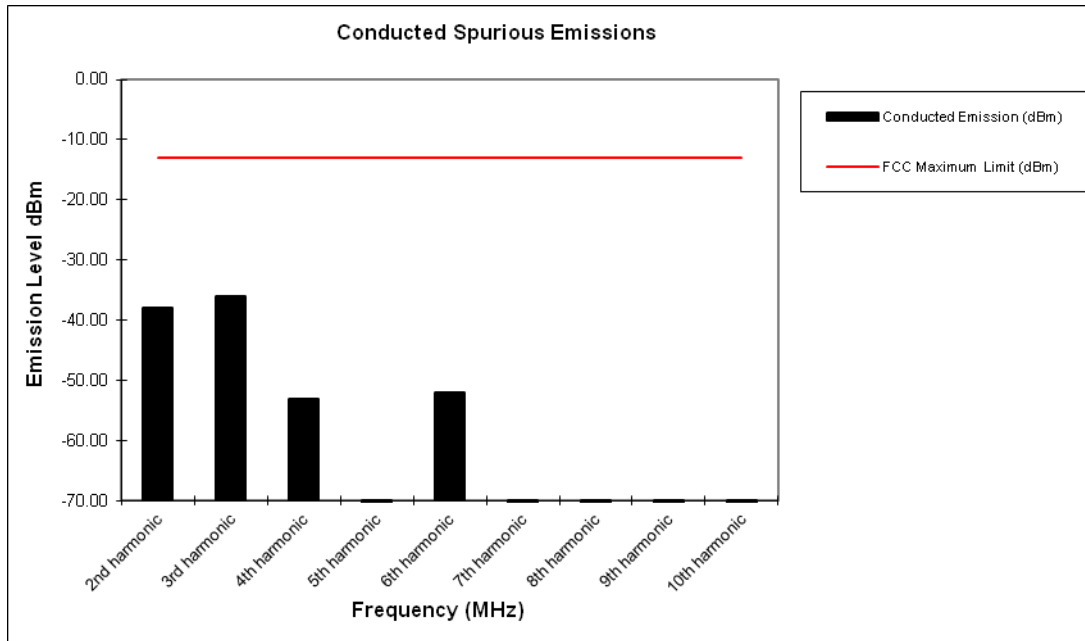


**Notes:**

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: EDGE 850**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-38.69
3rd harmonic	-13	-44.04
4th harmonic	-13	-55.99
5th harmonic	-13	*
6th harmonic	-13	-52.85
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

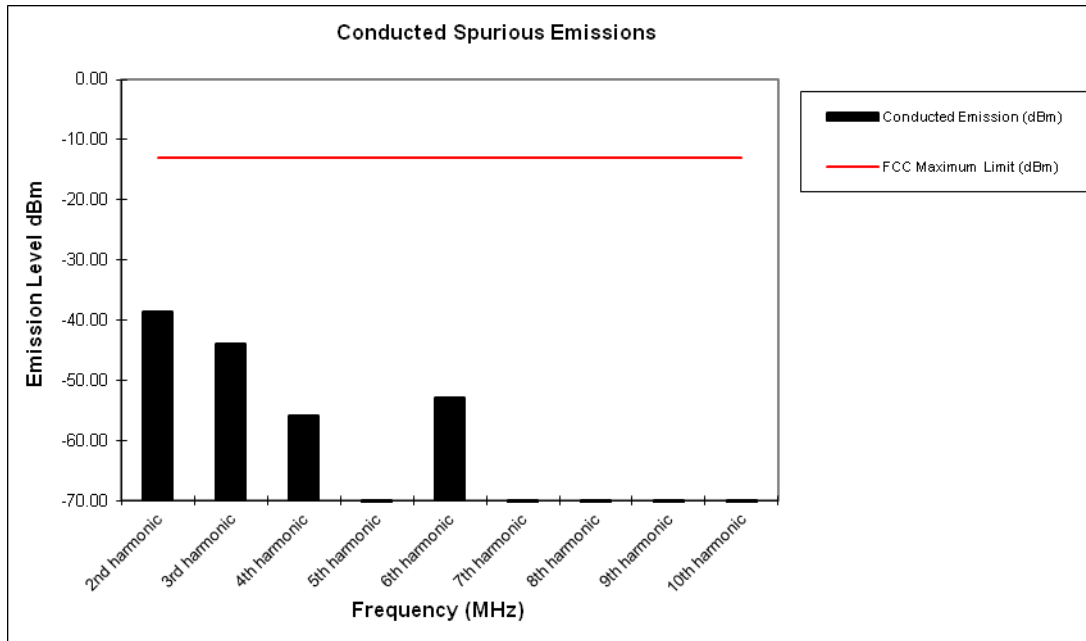


Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: GSM 1900**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-40.56
3rd harmonic	-13	-30.52
4th harmonic	-13	*
5th harmonic	-13	-50.23
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

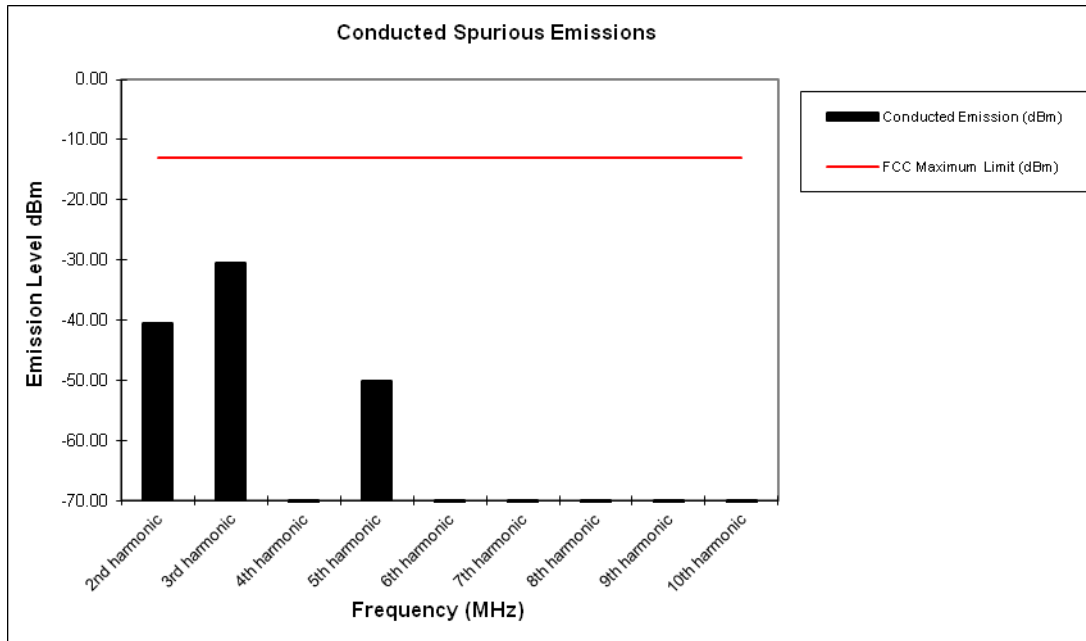


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results**  
**Modulation: EDGE 1900**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-44.69
3rd harmonic	-13	-36.17
4th harmonic	-13	*
5th harmonic	-13	-49.80
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

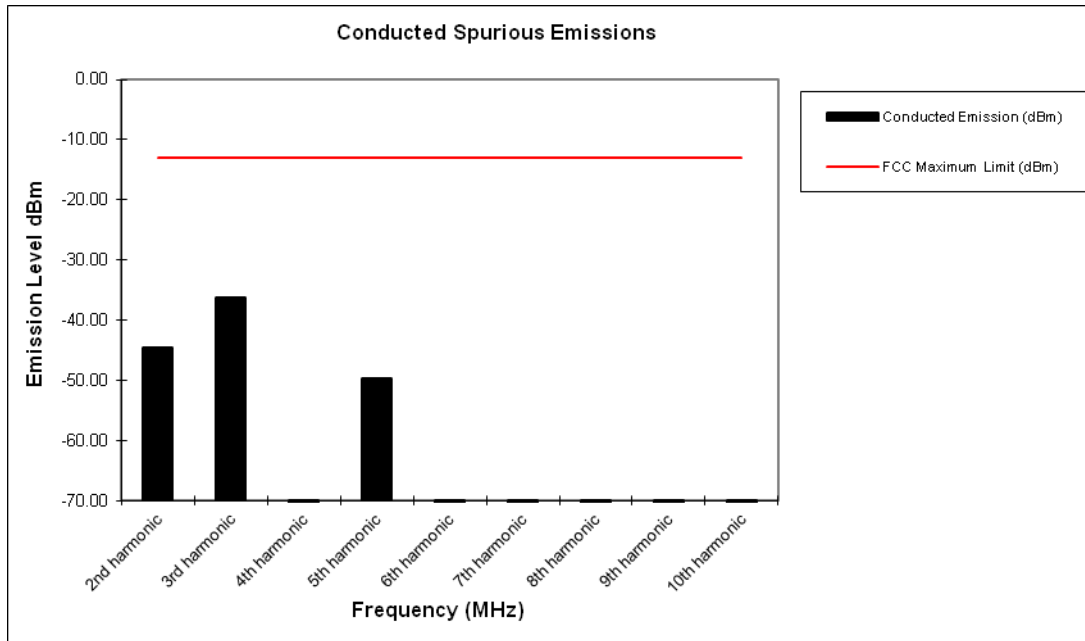


Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.


**Measurement Results**  
**Modulation: CDMA 800**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-33.88
3rd harmonic	-13	-56.31
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

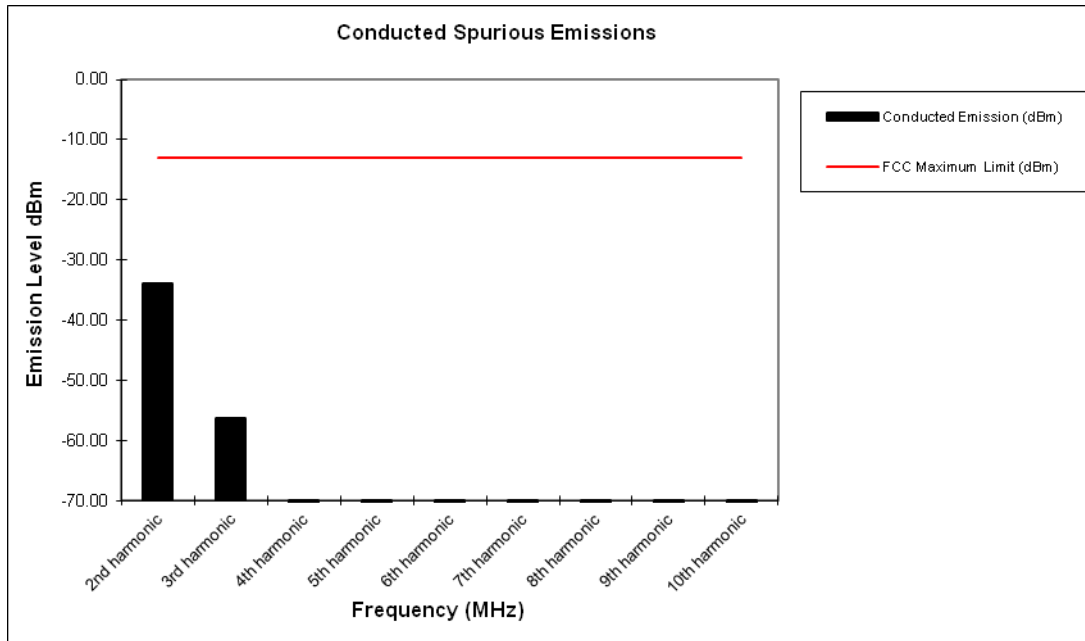


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

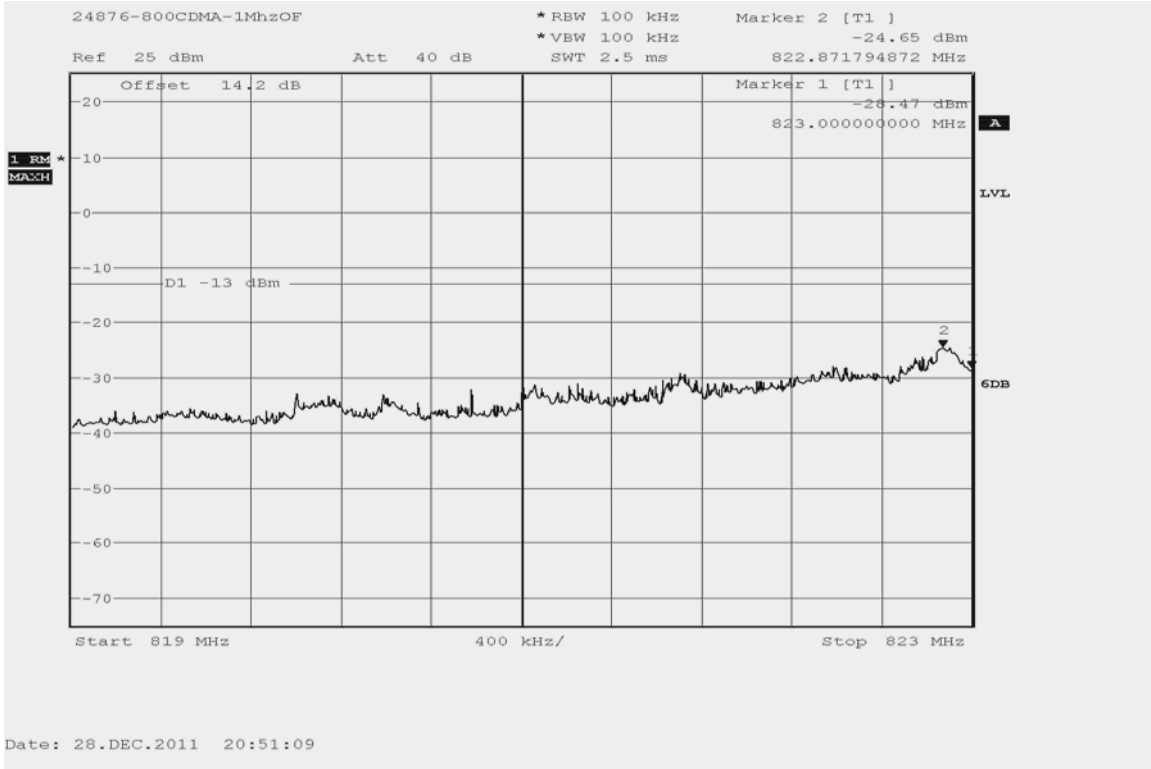


**800 CDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)**

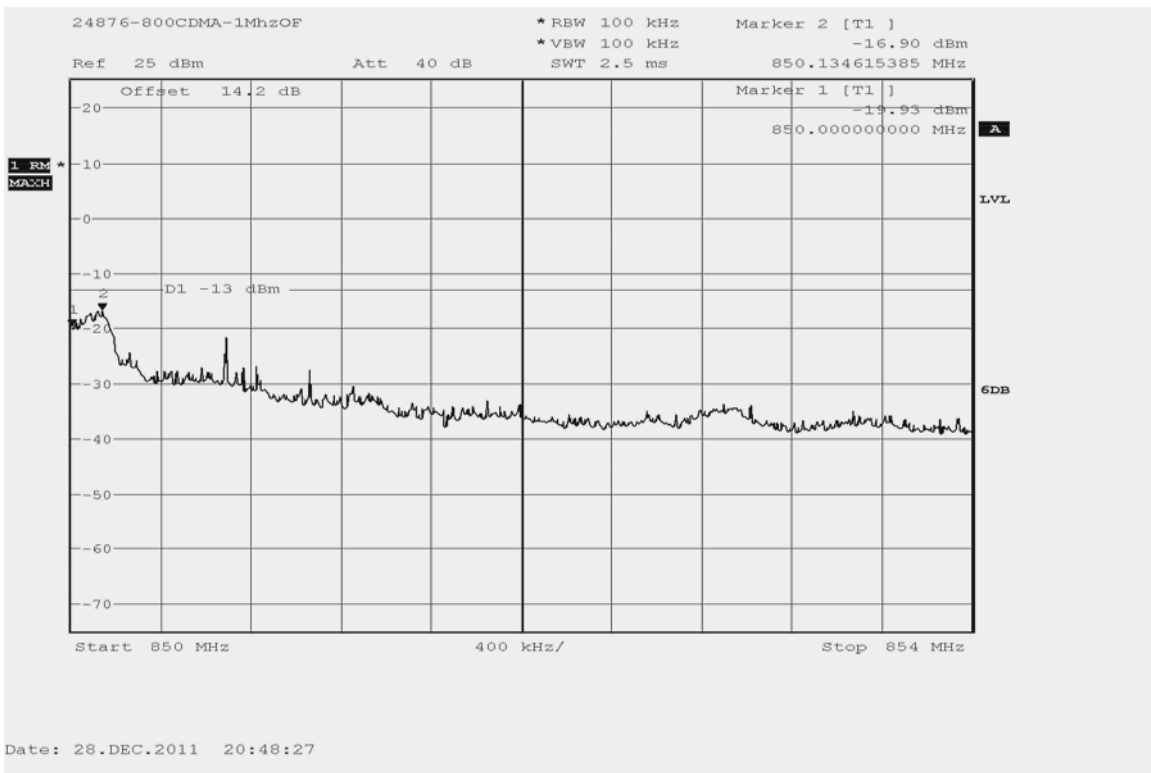

**800 CDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)**

**Measurement Results**  
**Modulation: WCDMA 850**


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-37.94
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

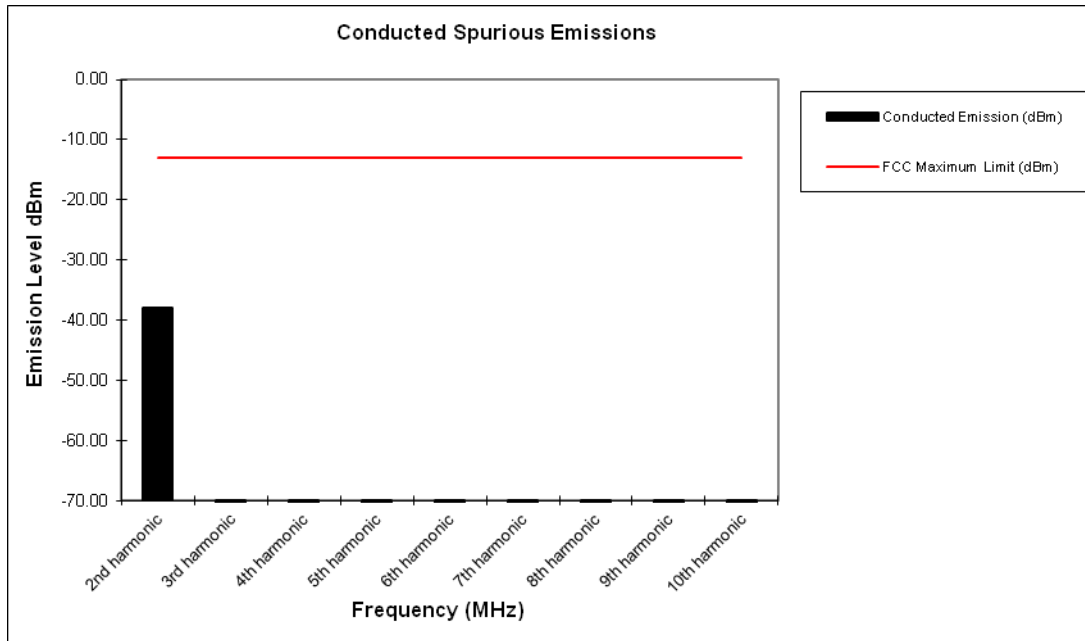


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

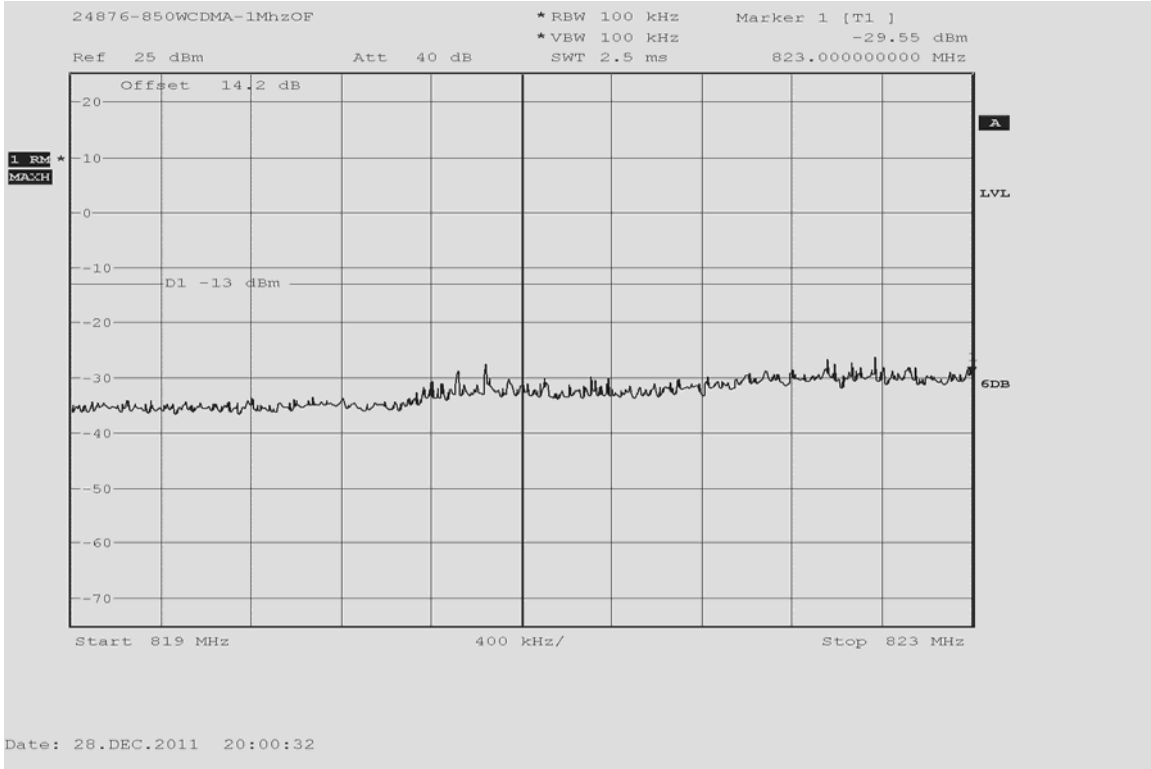


**850 WCDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)**

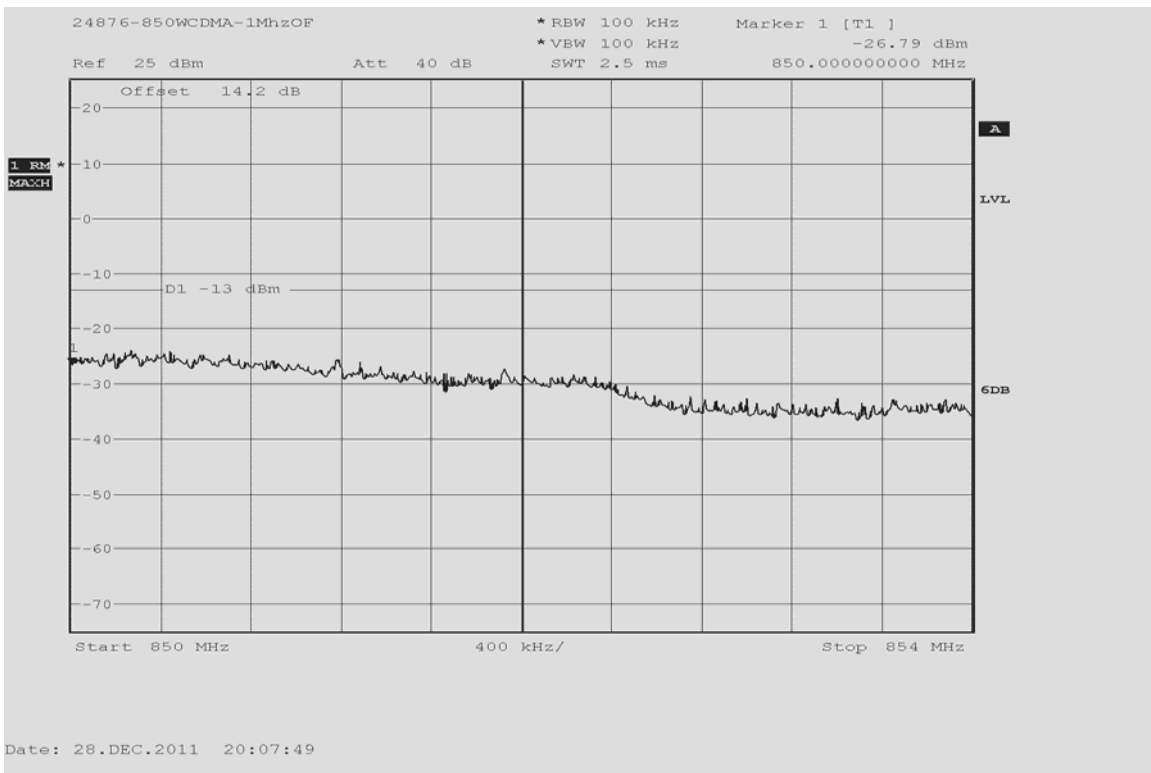

**850 WCDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)**

**Measurement Results**  
**Modulation: WCDMA 1900**


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-37.36
3rd harmonic	-13	-45.60
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

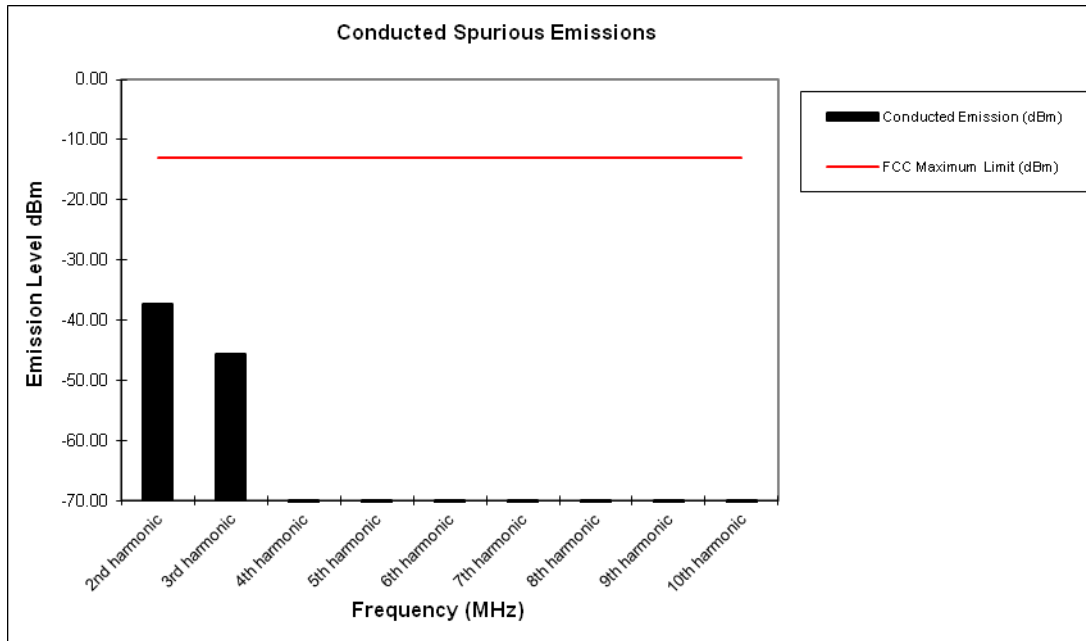


**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

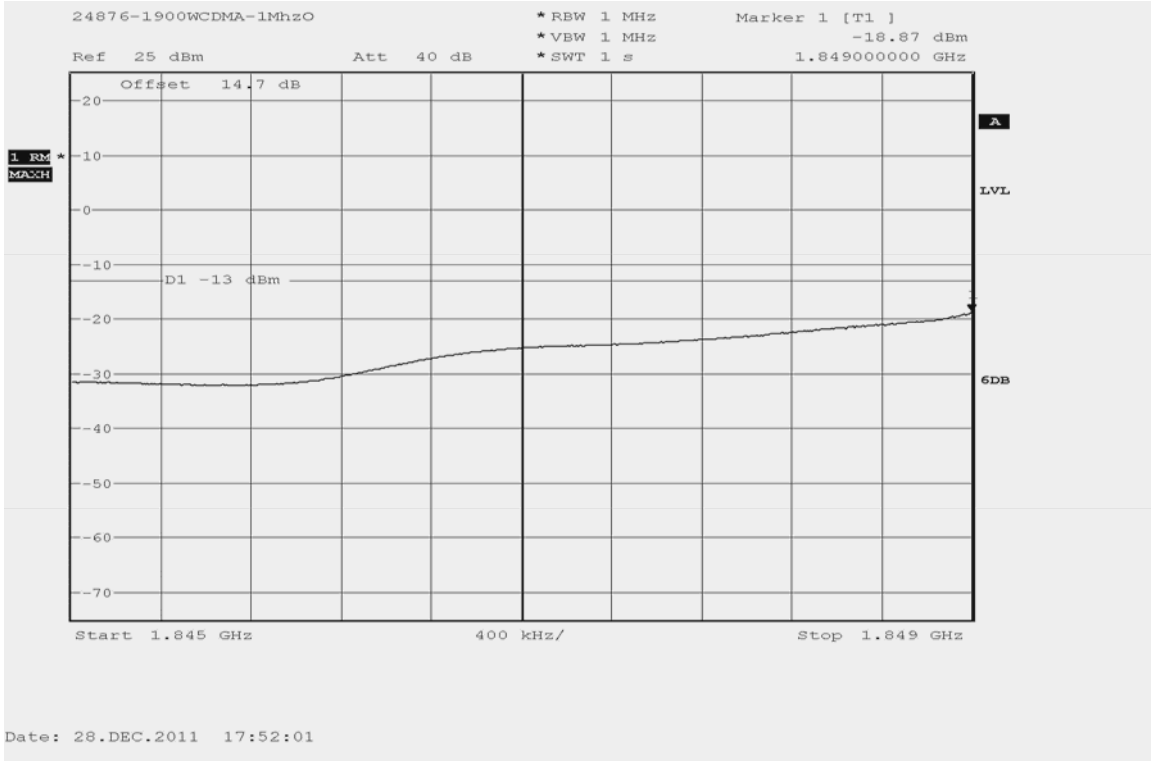

**1900 WCDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)**

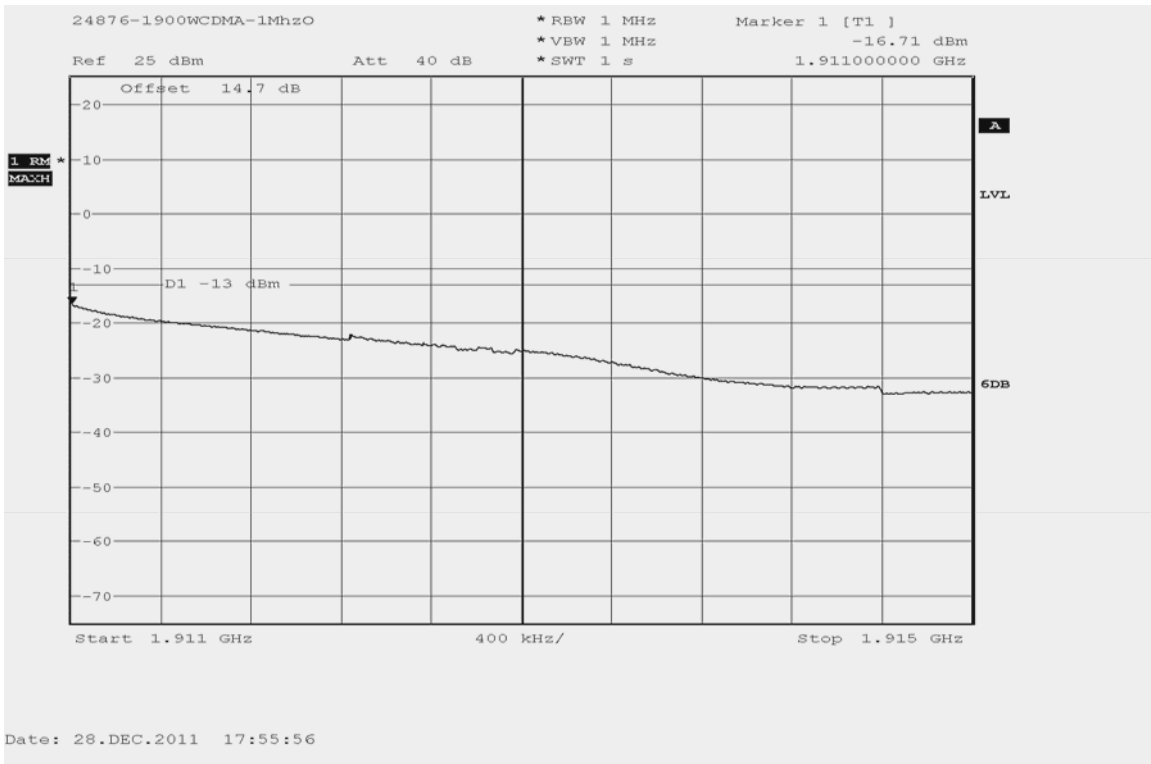

**1900 WCDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)**

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Measurement Procedure**

The EUT is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The EUT is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage. Testing was performed in three orthogonal planes where the X plane is with the EUT orientated vertically, the Y plane is with the EUT orientated on its side and the Z plane with the EUT laying flat on the table. The worst case emission is reported for each tested mode.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

**Measurement Results**


Attached

**Measurement Results –**

**EDGE 850, GSM 1900, EDGE 1900 and WCDMA 1900; all planes**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

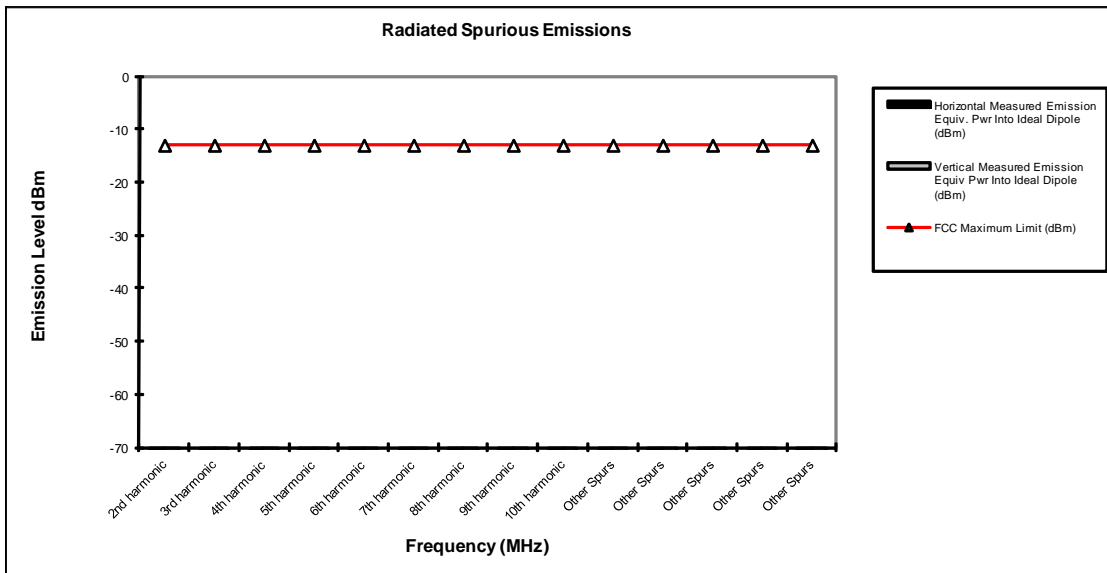


Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results –GSM 850; Y plane**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr r Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr r Into Ideal Dipole (dBm)
2nd harmonic	-13	-34.4	-31.5
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

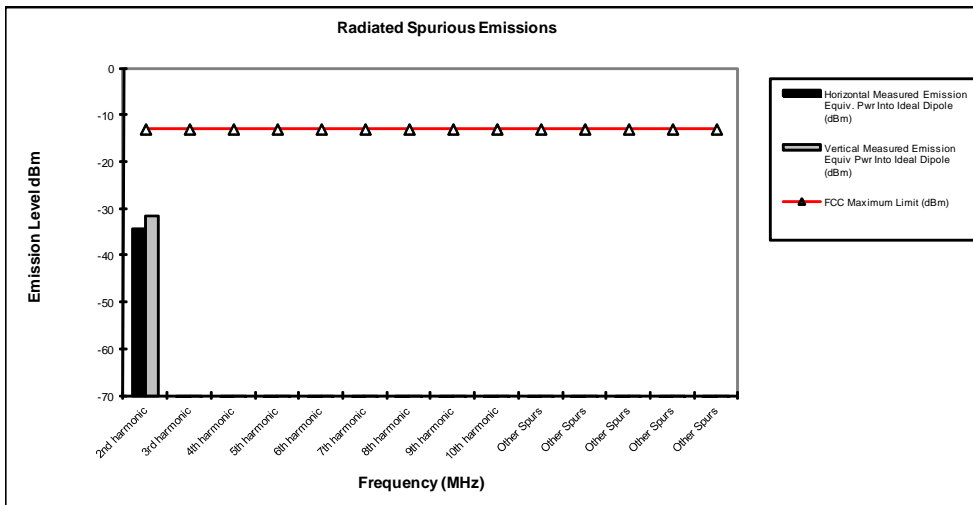


Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – WCDMA 850; Y plane**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-31.4	-28.5
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

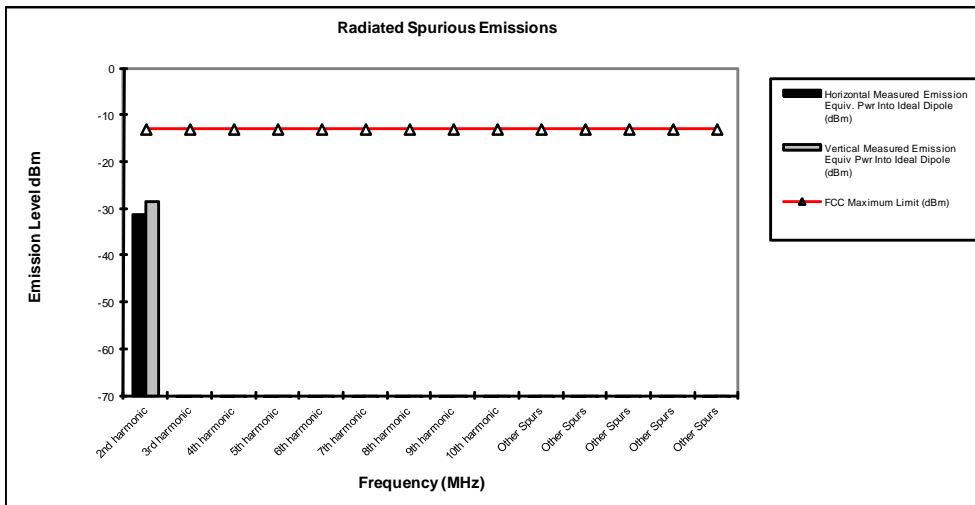


Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results –CDMA 800; Z plane**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr r Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr r Into Ideal Dipole (dBm)
2nd harmonic	-13	-27.7	-34.6
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*
Other Spurs	-13	*	*

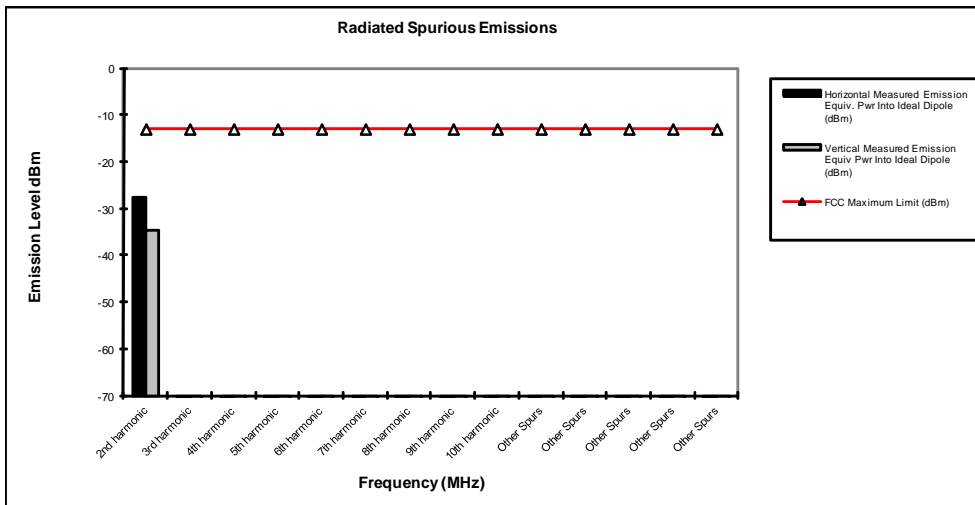

Notes:

- \* Indicates the spurious emission could not be detected due to noise limitations or ambients or the emissions are lower than -33 dBm.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

## **FREQUENCY STABILITY**

### **Measurement Procedure**

The EUT is placed in an environmental chamber. The antenna port of the EUT is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

### **Measurement Results**

Attached


**Measurement Results**  
**Modulation: GSM 850**

# Frequency Stability

**Mode:** EDGE 850  
**Channel:** 190

**Operating Frequency:** 836.6 MHz  
**Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-21.83	-0.012	100%	3.80
-20 C	-25.80	-0.014	100%	3.80
-10 C	-12.59	-0.007	100%	3.80
0 C	34.86	0.019	100%	3.80
10 C	21.43	0.011	100%	3.80
20 C	-18.41	-0.010	100%	3.80
30 C	-30.18	-0.016	100%	3.80
40 C	25.11	0.013	100%	3.80
50 C	-34.93	-0.019	100%	3.80
60 C	-32.43	-0.017	100%	3.80
20 C	22.81	0.012	Battery Endpoint	3.43

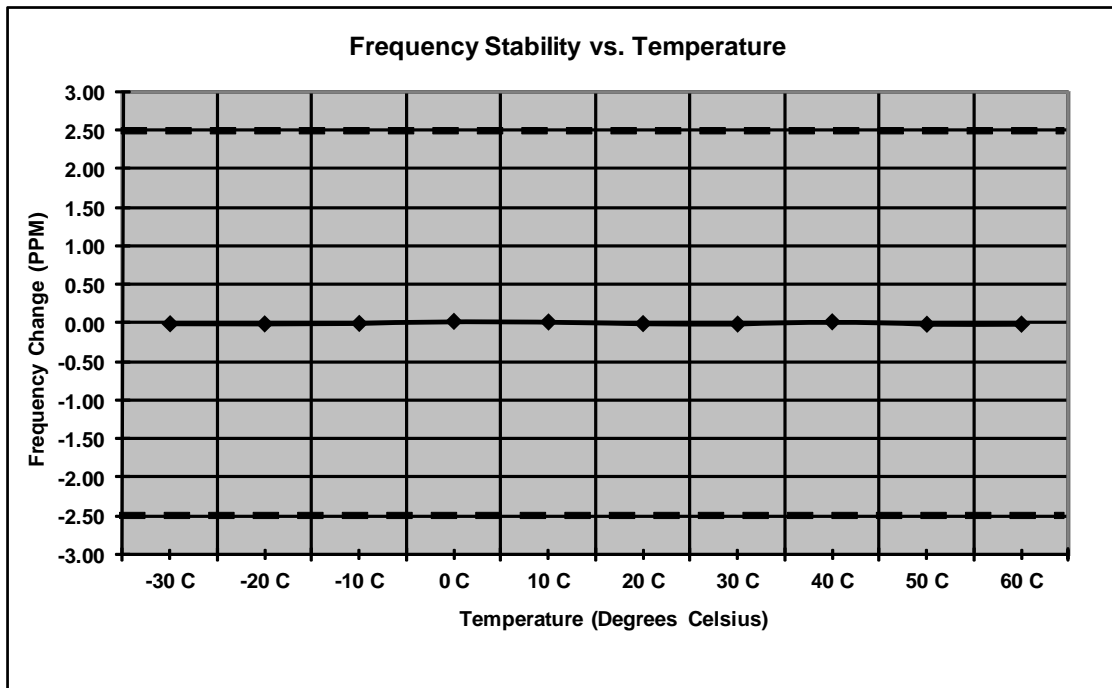


**Measurement Results**  
**Modulation: EDGE 850**

# Frequency Stability

**Mode:** EDGE 850      **Operating Frequency:** 897.4 MHz  
**Channel:** 836.6      **Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-21.83	-0.012	100%	3.80
-20 C	-25.80	-0.014	100%	3.80
-10 C	-12.59	-0.007	100%	3.80
0 C	34.86	0.019	100%	3.80
10 C	21.43	0.011	100%	3.80
20 C	-18.41	-0.010	100%	3.80
30 C	-30.18	-0.016	100%	3.80
40 C	25.11	0.013	100%	3.80
50 C	-34.93	-0.019	100%	3.80
60 C	-32.43	-0.017	100%	3.80
20 C	22.81	0.012	Battery Endpoint	3.43

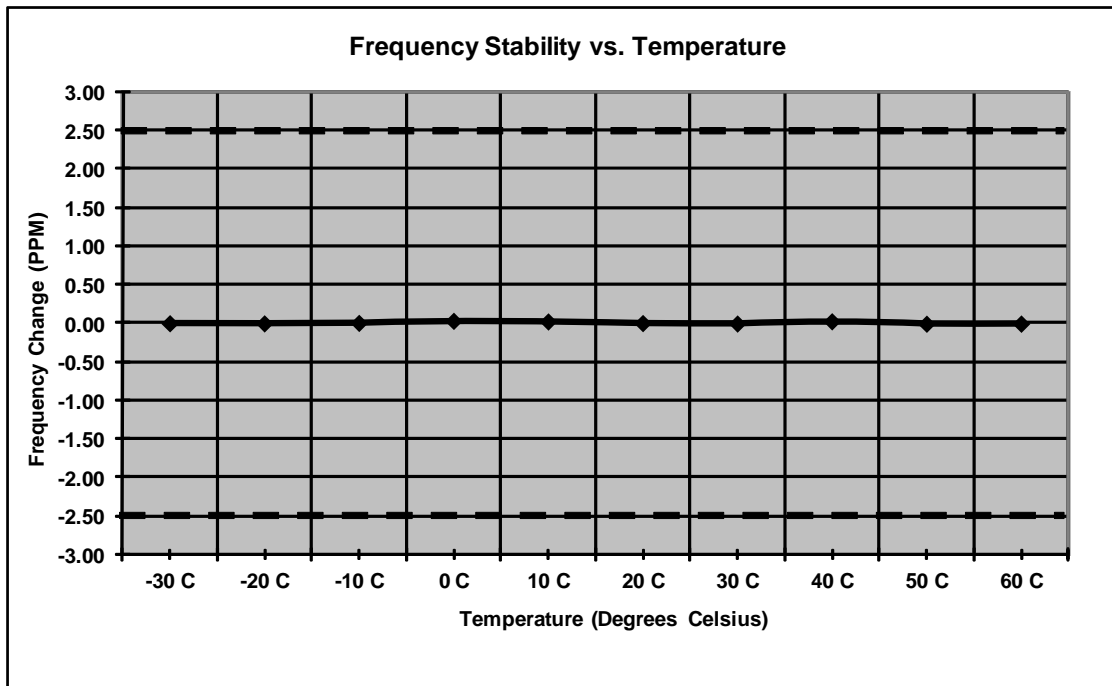


**Measurement Results**  
**Modulation: CDMA 800**

# Frequency Stability

**Mode:** CDMA 800      **Operating Frequency:** 836.52 MHz  
**Channel:** 384      **Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	4.57	0.005	100%	3.80
-20 C	-3.97	-0.005	100%	3.80
-10 C	-3.77	-0.005	100%	3.80
0 C	2.56	0.003	100%	3.80
10 C	-3.84	-0.005	100%	3.80
20 C	8.06	0.010	100%	3.80
30 C	-11.49	-0.014	100%	3.80
40 C	3.16	0.004	100%	3.80
50 C	11.59	0.014	100%	3.80
60 C	13.56	0.016	100%	3.80
20 C	11.58	0.014	Battery Endpoint	3.43

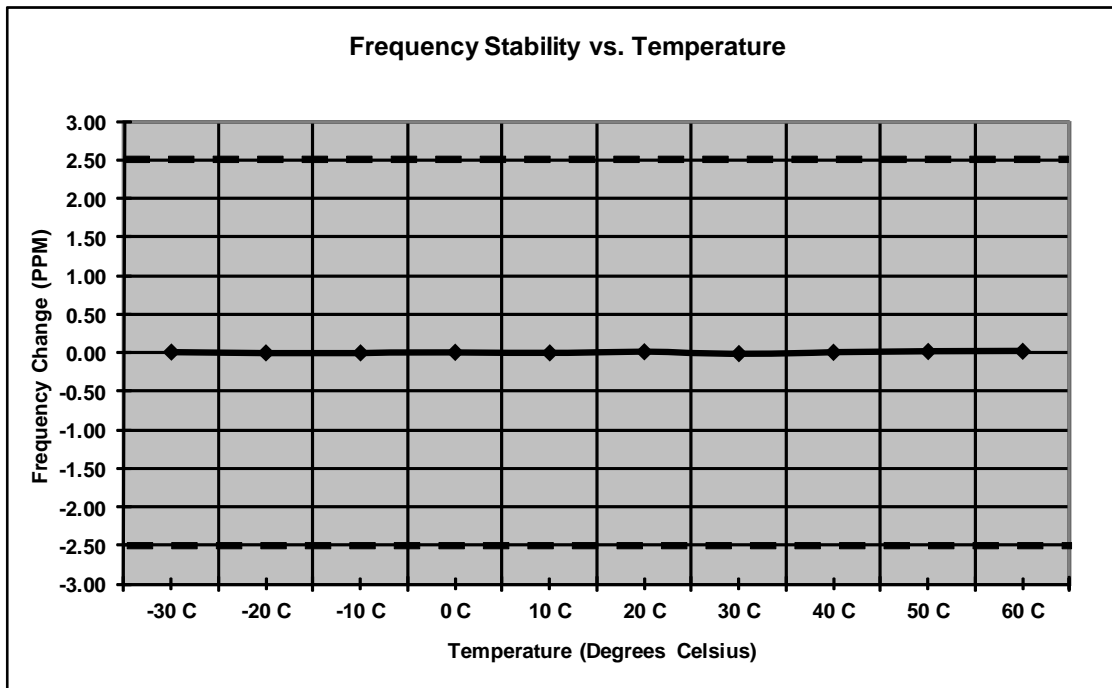


**Measurement Results**  
**Modulation: GSM 1900**

# Frequency Stability

**Mode:** GSM 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661      **Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	27.05	0.014	100%	3.80
-20 C	32.90	0.018	100%	3.80
-10 C	24.56	0.013	100%	3.80
0 C	52.68	0.028	100%	3.80
10 C	30.22	0.016	100%	3.80
20 C	37.75	0.020	100%	3.80
30 C	-20.86	-0.011	100%	3.80
40 C	-11.45	-0.006	100%	3.80
50 C	-22.93	-0.012	100%	3.80
60 C	-24.54	-0.013	100%	3.80
20 C	33.54	0.018	Battery Endpoint	3.43

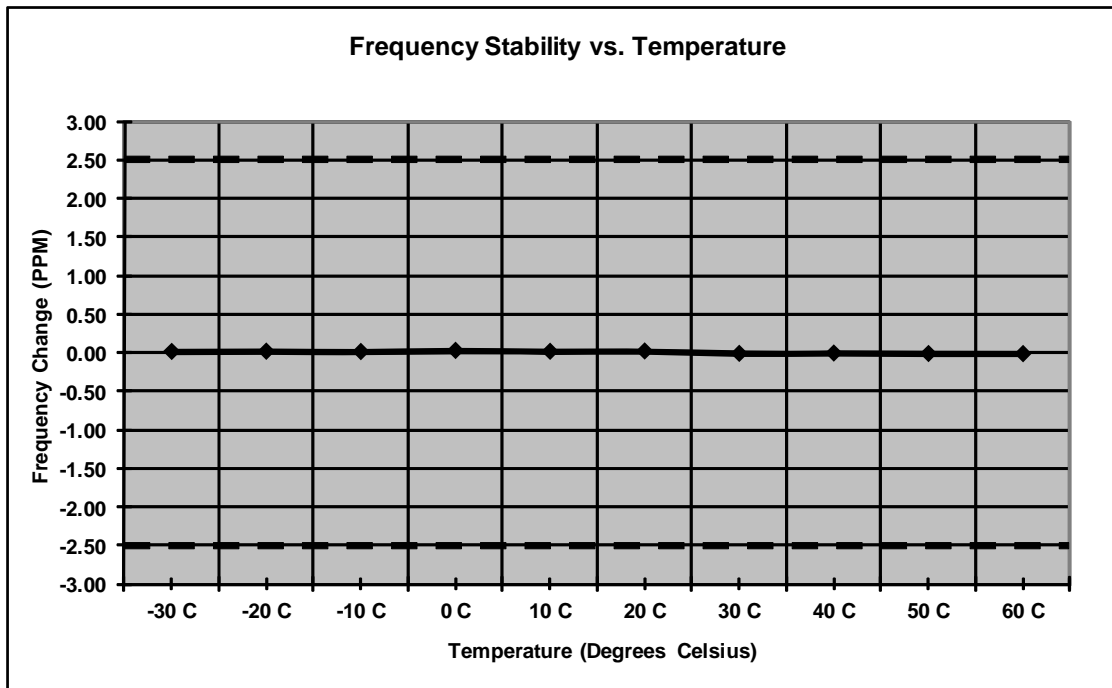


**Measurement Results**  
**Modulation: EDGE 1900**

# Frequency Stability

**Mode:** EDGE 1900  
**Channel:** 661

**Operating Frequency:** 1880.0 MHz  
**Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-16.82	-0.009	100%	3.80
-20 C	20.38	0.011	100%	3.80
-10 C	32.28	0.017	100%	3.80
0 C	67.92	0.036	100%	3.80
10 C	77.08	0.041	100%	3.80
20 C	43.37	0.023	100%	3.80
30 C	45.30	0.024	100%	3.80
40 C	-20.51	-0.011	100%	3.80
50 C	-17.80	-0.009	100%	3.80
60 C	23.61	0.013	100%	3.80
20 C	68.27	0.036	Battery Endpoint	3.43

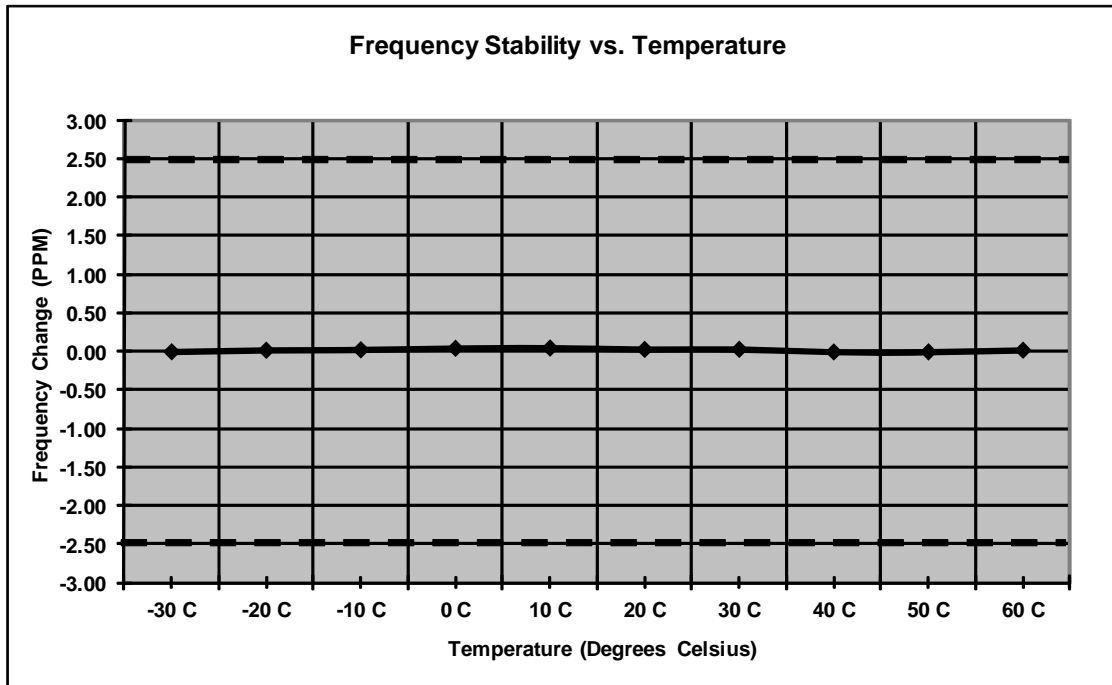


**Measurement Results**  
**Modulation: WCDMA 850**

# Frequency Stability

**Mode:** WCDMA 850      **Operating Frequency:** 836.00 MHz  
**Channel:** 4180      **Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	17.21	0.021	100%	3.80
-20 C	-19.67	-0.024	100%	3.80
-10 C	-23.73	-0.028	100%	3.80
0 C	-20.90	-0.025	100%	3.80
10 C	-21.14	-0.025	100%	3.80
20 C	-17.60	-0.021	100%	3.80
30 C	17.39	0.021	100%	3.80
40 C	-18.69	-0.022	100%	3.80
50 C	-13.65	-0.016	100%	3.80
60 C	-20.12	-0.024	100%	3.80
20 C	-19.38	-0.023	Battery Endpoint	3.43

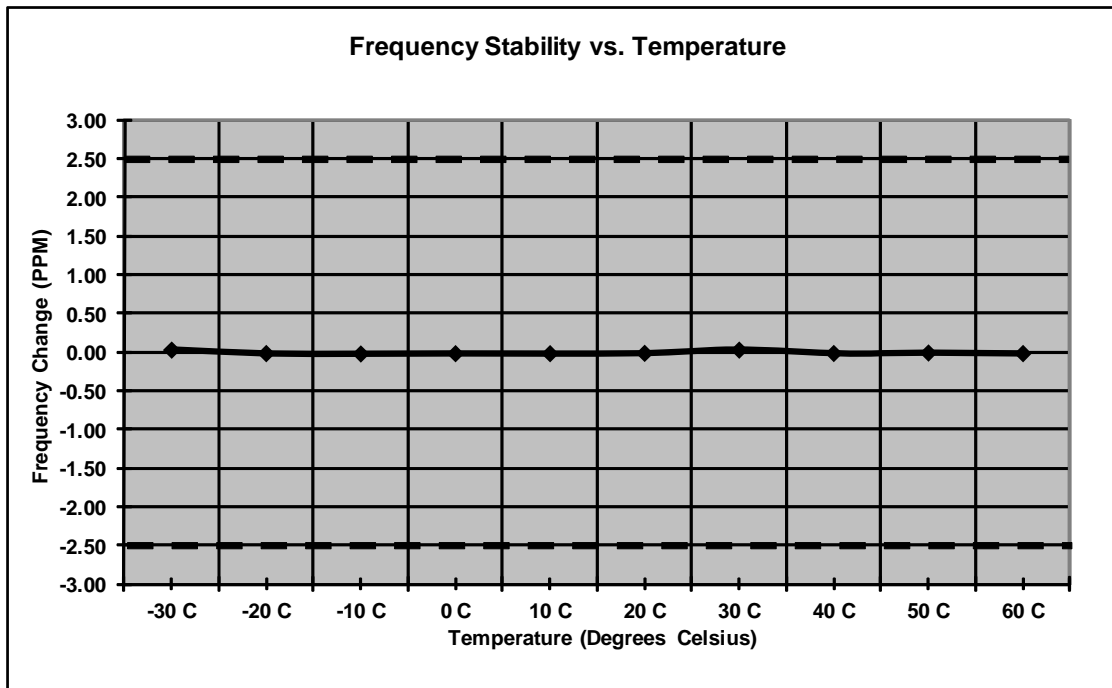


**Measurement Results**  
**Modulation: WCDMA 1900**

# Frequency Stability

**Mode:** 1900 WCDMA      **Operating Frequency:** 1880  
**Channel:** 9400            **Deviation Limit (PPM):** ±2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-33.95	-0.041	100%	3.80
-20 C	-38.83	-0.046	100%	3.80
-10 C	-40.24	-0.048	100%	3.80
0 C	-38.96	-0.047	100%	3.80
10 C	-25.59	-0.031	100%	3.80
20 C	-40.63	-0.049	100%	3.80
30 C	-35.01	-0.042	100%	3.80
40 C	-34.92	-0.042	100%	3.80
50 C	-36.40	-0.044	100%	3.80
60 C	-36.14	-0.043	100%	3.80
20 C	-38.98	-0.047	Battery Endpoint	3.43

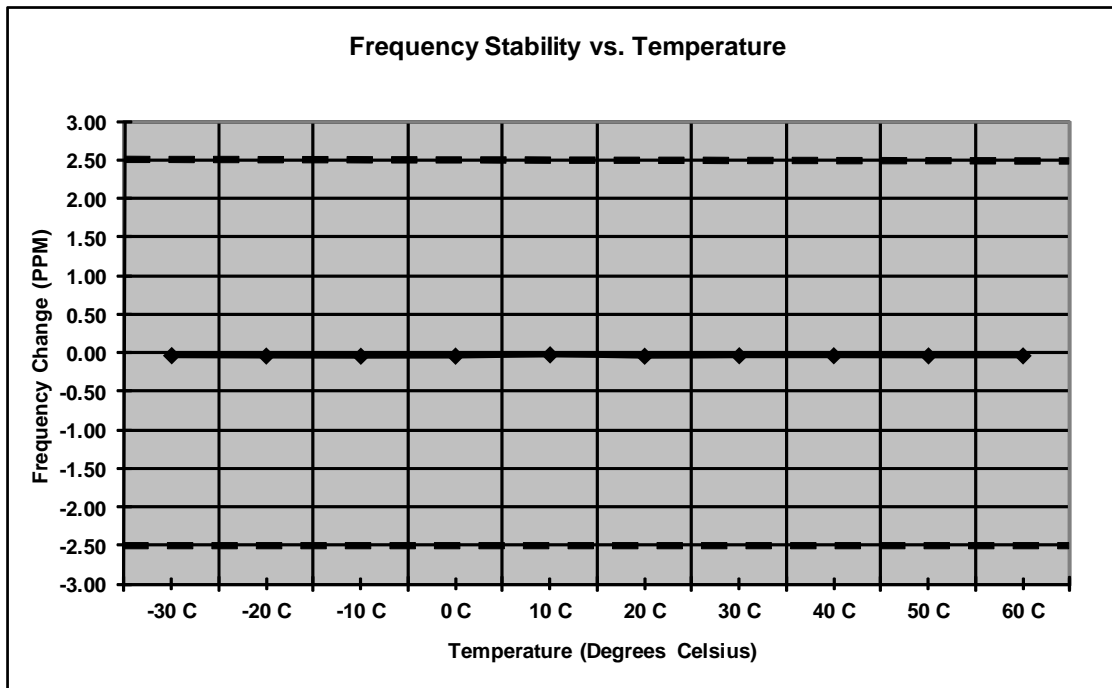

**End of Test Report**