

FCC Test Report

APPLICANT : Motorola Mobility, Inc.
EQUIPMENT : Mobile Phone
BRAND NAME : MOTOROLA
MODEL NAME : XT611
GPPD Number : 3150
FCC ID : IHDP56MM3
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Dec. 23, 2011 and completely tested on Jan. 04, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant 5

 1.2. Manufacturer 5

 1.3. Feature of Equipment Under Test 5

 1.4. Test Site 6

 1.5. Applied Standards 6

 1.6. Ancillary Equipment List 6

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1. Test Mode 7

 2.2. Connection Diagram of Test System 9

 2.3. Test Software 10

3. TEST RESULT 11

 3.1. Test of AC Conducted Emission Measurement 11

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 22

5. UNCERTAINTY OF EVALUATION 23



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.4	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 4.60 dB at 1.838 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 5.51 dB at 173.370 MHz



1. General Description

1.1. Applicant

Motorola Mobility, Inc.

600 N. US Highway 45 Libertyville, IL 60048-1286 U.S.A.

1.2. Manufacturer

Chi Mei Communication Systems, Inc.

No. 4, Mingsheng Street, Tucheng District, New Taipei City, 23678, Taiwan

1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Mobile Phone
Brand Name	MOTOROLA
Model Name	XT611
FCC ID	IHDP56MM3
Tx Frequency Range	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz
Rx Frequency Range	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz GPS : 1.57542 GHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : Fixed Internal Antenna WLAN / Bluetooth: PIFA Antenna
HW Version	V3.2
SW Version	4_510_9000
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) GPS : BPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Test Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	722060/4086B-1

1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 3

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
6.	Notebook	DELL	P20G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
8.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT uses a USB interface and microprocessor operating 800MHz which is the maximum frequency used.

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	Note 1
2.	Data application transferred mode (EUT with notebook)	☒	☒	☒

Abbreviations:


- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.


Remark: For signal above 1GHz, the worst case was test item 2.

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	<p>Mode 1 : GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + MPEG4 + USB Cable (Charging from Adapter) <Fig. 1></p> <p>Mode 2 : GSM1900 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + Camera + USB Cable (Charging from Adapter) <Fig. 1></p> <p>Mode 3 : GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + GPS Rx + USB Cable (Data Link with Notebook) <Fig. 2></p>
Radiated Emissions < 1GHz	1/2	<p>Mode 1 : GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + MPEG4 + USB Cable (Charging from Adapter) <Fig. 1></p> <p>Mode 2 : GSM1900 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + Camera + USB Cable (Charging from Adapter) <Fig. 1></p> <p>Mode 3 : GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + GPS Rx + USB Cable (Data Link with Notebook) <Fig. 2></p>
Radiated Emissions ≥ 1GHz	2	<p>Mode 1 : GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + GPS Rx + USB Cable (Data Link with Notebook) <Fig. 2></p>
<p>Remark:</p> <ol style="list-style-type: none"> 1. The worst case of AC is mode 2; only the test data of this mode was reported. 2. The worst case of RE < 1G is mode 3; only the test data of this mode was reported. 3. Link with Notebook means data application transferred mode between EUT and Notebook. 		

2.2. Connection Diagram of Test System

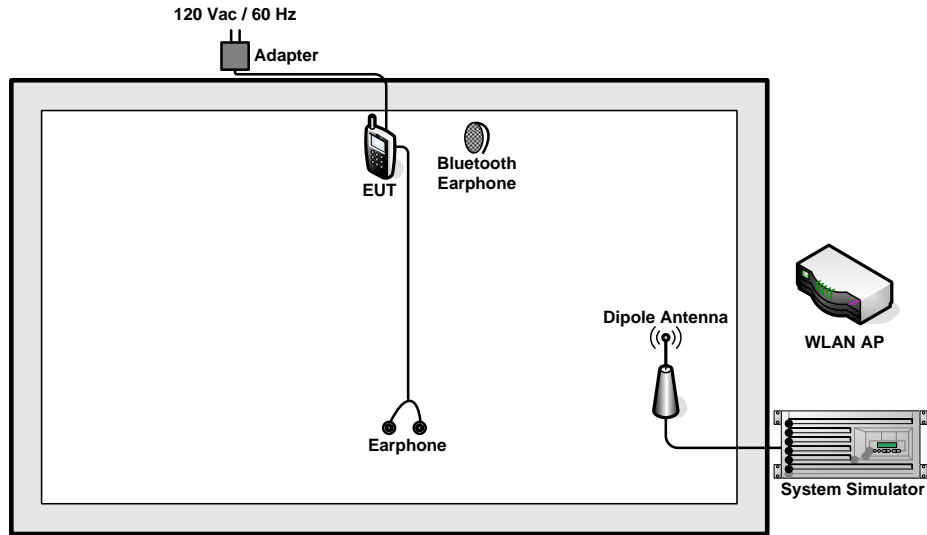

<Fig. 1>

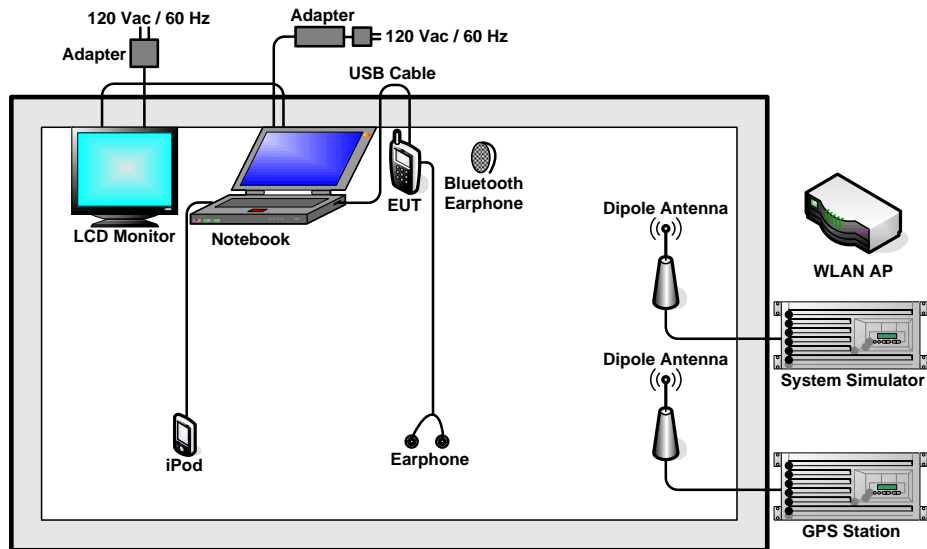

<Fig. 2>



2.3. Test Software

The EUT was in GSM idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Winthrax", installed in notebook for active sync files transfer with EUT via USB cable.
2. Execute "GPS Test" to make the EUT receive signals from GPS station continuously.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 KHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.1.4 Test Setup

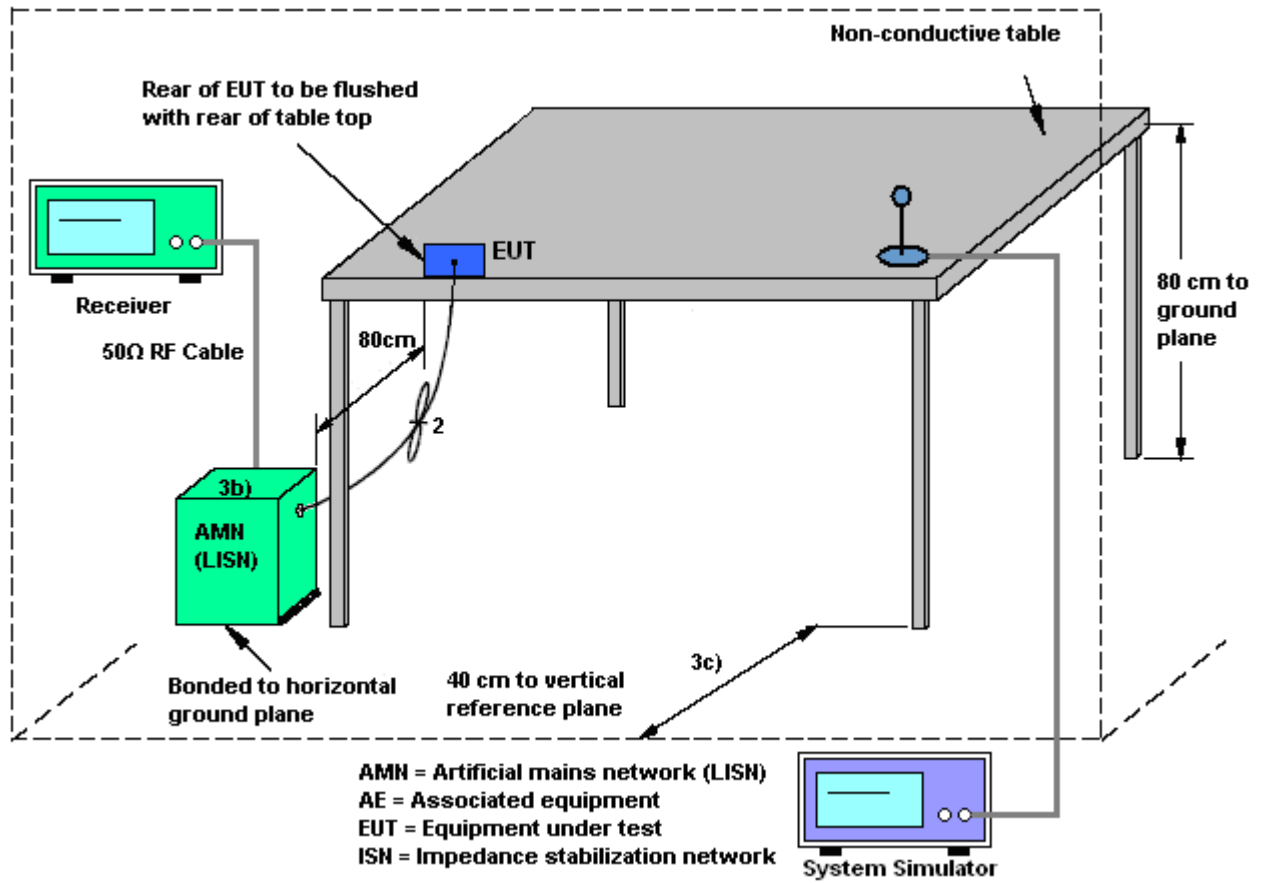

3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	21~23°C
Test Engineer :	Avis Chuang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + Camera + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

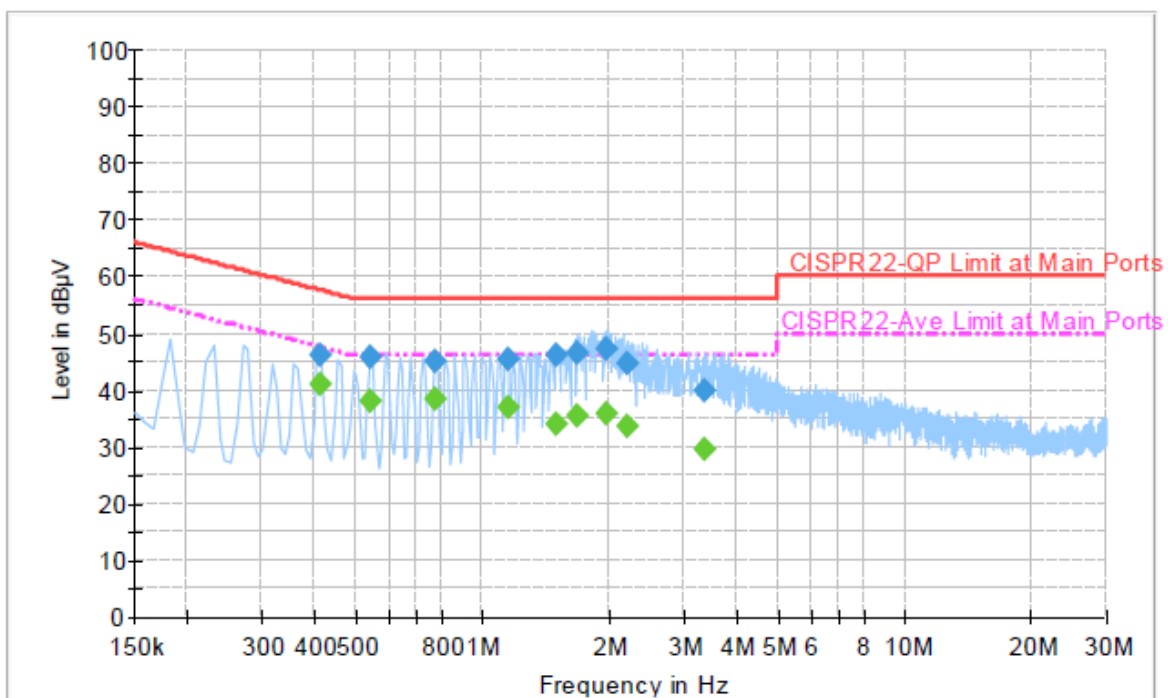

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.414000	46.2	Off	L1	19.4	11.4	57.6
0.542000	45.9	Off	L1	19.3	10.1	56.0
0.774000	45.2	Off	L1	19.4	10.8	56.0
1.150000	45.4	Off	L1	19.4	10.6	56.0
1.502000	46.1	Off	L1	19.4	9.9	56.0
1.678000	46.4	Off	L1	19.4	9.6	56.0
1.974000	47.1	Off	L1	19.4	8.9	56.0
2.198000	44.6	Off	L1	19.5	11.4	56.0
3.366000	40.0	Off	L1	19.5	16.0	56.0



Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.414000	41.1	Off	L1	19.4	6.5	47.6
0.542000	38.1	Off	L1	19.3	7.9	46.0
0.774000	38.5	Off	L1	19.4	7.5	46.0
1.150000	36.8	Off	L1	19.4	9.2	46.0
1.502000	33.9	Off	L1	19.4	12.1	46.0
1.678000	35.4	Off	L1	19.4	10.6	46.0
1.974000	35.9	Off	L1	19.4	10.1	46.0
2.198000	33.5	Off	L1	19.5	12.5	46.0
3.366000	29.5	Off	L1	19.5	16.5	46.0

Test Mode :	Mode 2	Temperature :	21~23°C
Test Engineer :	Avis Chuang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + Camera + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

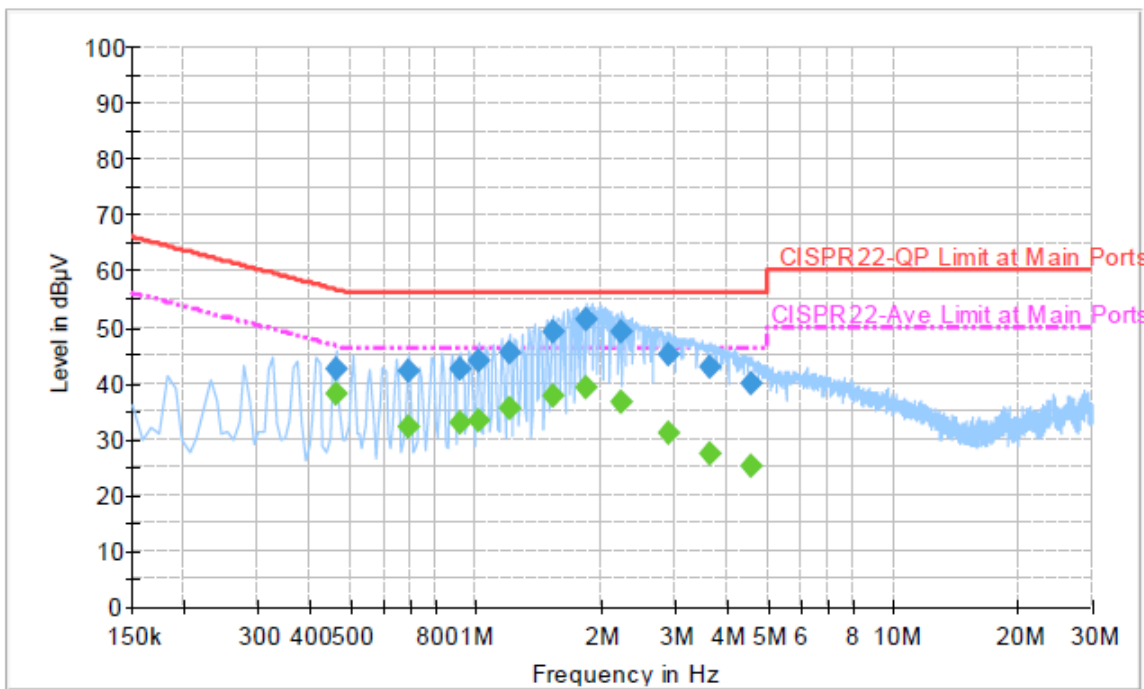

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.462000	42.3	Off	N	19.3	14.4	56.7
0.694000	42.1	Off	N	19.5	13.9	56.0
0.918000	42.3	Off	N	19.4	13.7	56.0
1.014000	43.7	Off	N	19.5	12.3	56.0
1.206000	45.5	Off	N	19.5	10.5	56.0
1.526000	49.2	Off	N	19.4	6.8	56.0
1.838000	51.4	Off	N	19.5	4.6	56.0
2.222000	49.0	Off	N	19.5	7.0	56.0
2.918000	45.0	Off	N	19.5	11.0	56.0
3.662000	42.9	Off	N	19.5	13.1	56.0
4.590000	39.8	Off	N	19.6	16.2	56.0



Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.462000	38.0	Off	N	19.3	8.7	46.7
0.694000	31.9	Off	N	19.5	14.1	46.0
0.918000	32.7	Off	N	19.4	13.3	46.0
1.014000	33.1	Off	N	19.5	12.9	46.0
1.206000	35.6	Off	N	19.5	10.4	46.0
1.526000	37.8	Off	N	19.4	8.2	46.0
1.838000	39.1	Off	N	19.5	6.9	46.0
2.222000	36.4	Off	N	19.5	9.6	46.0
2.918000	31.1	Off	N	19.5	14.9	46.0
3.662000	27.3	Off	N	19.5	18.7	46.0
4.590000	25.0	Off	N	19.6	21.0	46.0

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

See list of measuring instruments of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions below 30MHz

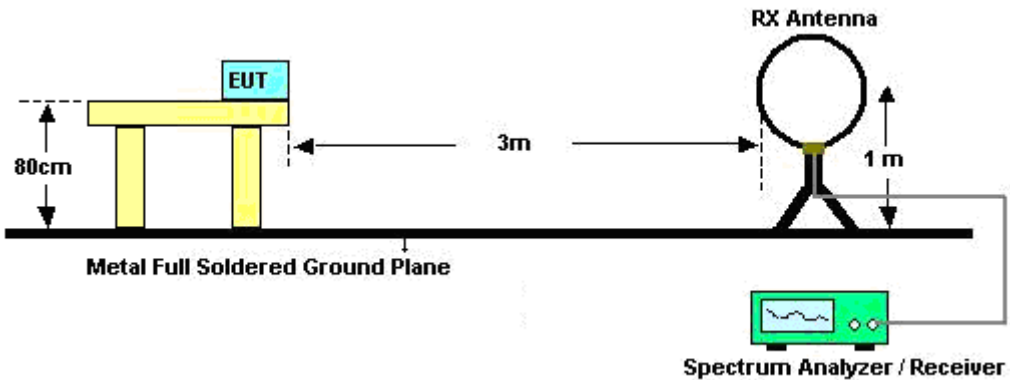

For radiated emissions above 30MHz

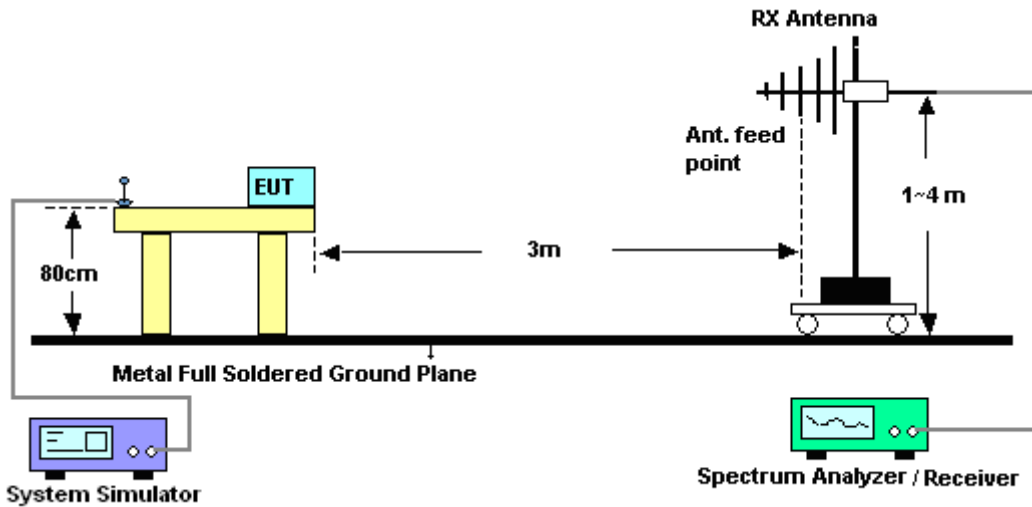


3.2.5. Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.2.6. Test Result of Radiated Emission

Test Mode :	Mode 3	Temperature :	22~23°C
Test Engineer :	David Yang	Relative Humidity :	45~47%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + GPS Rx + USB Cable (Data Link with Notebook)		
Remark :	#7 is system simulator signal which can be ignored.		

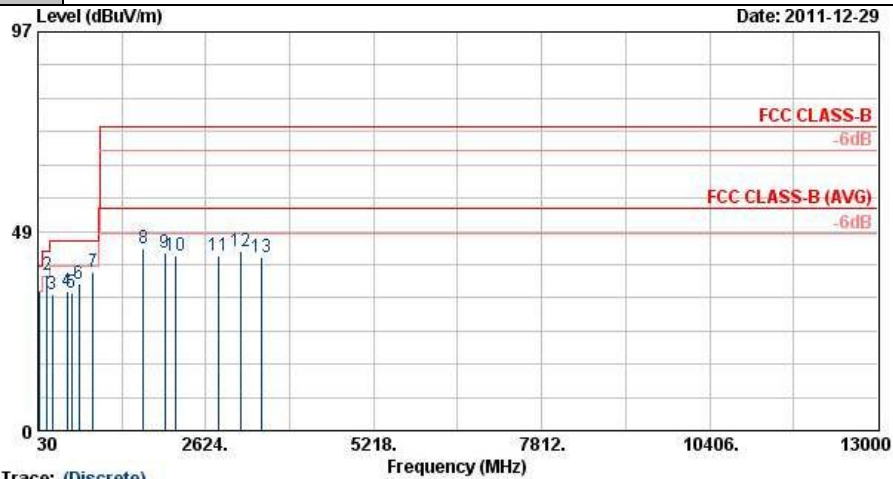


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B HF-ANT_110816 HORIZONTAL
 Power : From System
 Mode : Mode 3

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	49.71	33.74	-6.26	40.00	56.09	8.50	0.69	31.54	---	---	Peak
2 @	173.37	37.99	-5.51	43.50	59.08	9.19	1.24	31.52	121	103	Peak
3	251.94	33.16	-12.84	46.00	50.40	12.63	1.54	31.41	---	---	Peak
4	483.40	34.06	-11.94	46.00	44.99	17.74	2.39	31.06	---	---	Peak
5	545.70	33.56	-12.44	46.00	43.13	18.88	2.54	30.99	---	---	Peak
6	663.30	35.80	-10.20	46.00	43.48	20.30	2.87	30.86	---	---	Peak
7	881.70	38.58			43.06	22.92	3.31	30.71	---	---	Peak
8	1660.00	44.44	-29.56	74.00	69.11	28.97	4.90	58.55	100	0	Peak
9	1996.00	43.16	-30.84	74.00	64.57	31.50	5.43	58.34	---	---	Peak
10	2156.00	42.63	-31.37	74.00	63.61	31.72	5.66	58.36	---	---	Peak
11	2822.00	42.46	-31.54	74.00	61.99	32.52	6.54	58.58	---	---	Peak
12	3156.00	43.75	-30.25	74.00	62.75	32.73	7.08	58.81	---	---	Peak
13	3486.00	42.35	-31.65	74.00	60.80	32.80	7.81	59.06	---	---	Peak



Test Mode :	Mode 3	Temperature :	22~23°C
Test Engineer :	David Yang	Relative Humidity :	45~47%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + Earphone + Battery + GPS Rx + USB Cable (Data Link with Notebook)		
Remark :	#7 is system simulator signal which can be ignored.		

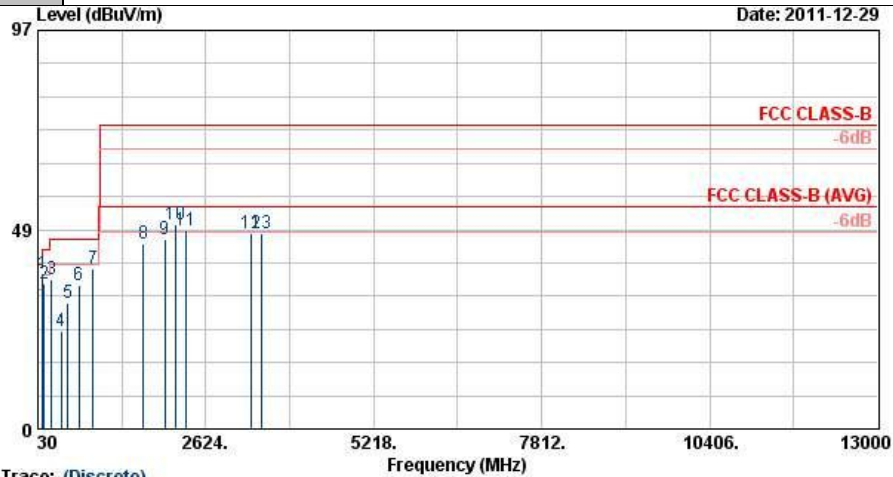

Site : 03CH07-HY
 Condition : FCC CLASS-B HF-ANT_110816 VERTICAL
 Power : From System
 Mode : Mode 3

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	99.66	37.82	-5.68	43.50	58.57	9.80	0.99	31.54	100	121	Peak
2	126.93	35.19	-8.31	43.50	53.96	11.66	1.14	31.57	---	---	Peak
3	240.33	36.46	-9.54	46.00	54.42	11.93	1.53	31.42	---	---	Peak
4	391.70	23.73	-22.27	46.00	37.02	15.79	2.12	31.20	---	---	Peak
5	498.10	30.74	-15.26	46.00	41.31	18.06	2.44	31.07	---	---	Peak
6	665.40	34.86	-11.14	46.00	42.52	20.32	2.87	30.86	---	---	Peak
7	881.70	38.78			43.27	22.92	3.31	30.71	---	---	Peak
8	1662.00	45.22	-28.78	74.00	69.90	28.97	4.90	58.55	---	---	Peak
9	1990.00	46.26	-27.74	74.00	67.84	31.37	5.39	58.35	---	---	Peak
10	2158.00	49.67	-24.33	74.00	70.65	31.72	5.66	58.36	100	0	Peak
11	2326.00	48.45	-25.55	74.00	68.94	31.96	5.92	58.37	---	---	Peak
12	3318.00	47.71	-26.29	74.00	66.43	32.76	7.45	58.93	---	---	Peak
13	3484.00	47.60	-26.40	74.00	66.05	32.80	7.81	59.06	---	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Dec. 30, 2011~ Jan. 04, 2012	Aug. 21, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz~30MHz	Dec. 09, 2011	Dec. 30, 2011~ Jan. 04, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz~30MHz	Dec. 06, 2011	Dec. 30, 2011~ Jan. 04, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Dec. 30, 2011~ Jan. 04, 2012	N/A	Conduction (CO05-HY)
GPS Station	Pendulum	GSG-54	N/A	N/A	N/A	Dec. 30, 2011~ Jan. 04, 2012	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Dec. 29, 2011	Oct. 21, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Dec. 29, 2011	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Dec. 29, 2011	Aug. 09, 2012	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 05, 2011	Dec. 29, 2011	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 29, 2011	Dec. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
EMI TEST RECEIVER	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Dec. 29, 2011	Aug. 21, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	159088	1GHz ~ 18GHz	Feb. 21, 2011	Dec. 29, 2011	Feb. 20, 2012	Radiation (03CH07-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	Dec. 29, 2011	N/A	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Dec. 29, 2011	Jul. 28, 2012	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	116457	N/A	Jun. 24, 2011	Dec. 29, 2011~ Jan. 04, 2012	Jun. 23, 2012	-

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				