



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

**FCC PART 15.247 AND IC RSS-210 (issue 8)
TEST REPORT
DIGITAL SPREAD SPECTRUM**

Applicant	MOTOROLA MOBILITY LLC
Address	8000 W. SUNRISE BLVD, SUITE A MAIL STOP 52-5JJ PLANTATION FLORIDA 33322 USA
FCC ID	IHDP56NB1
IC ID:	1090-P56NB1
Model Number	H3060241031A
Product Description	i460 FAIRHILL iDEN
Date Sample Received	12/19/2012
Date Tested	1/9/2013
Tested By	JOHN A. DAY
Approved By	JOHN A. DAY
Report Number	3179CUT12TestReport_Rev.doc
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Testing Certificate # 0955-01



TABLE OF CONTENT

GENERAL REMARKS 3
GENERAL INFORMATION 4
EMC EQUIPMENT LIST 5
TEST PROCEDURES 6
RADIATION INTERFERENCE 7
POWER LINE CONDUCTED INTERFERENCE 9
RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND 12

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

John Day
Testing Technician

Date: January/11/2013

GENERAL INFORMATION

DUT Specification

Applicable Standard	FCC Part 15.247 and IC RSS-210 (issue 8), RSS-GEN (issue 3)		
DUT Description	i460 FAIRHILL iDEN		
FCC ID:	IHDP56NB1		
IC ID:	1090 - P56NB1		
Serial Number	364BNW1V37		
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz		
Test Item	<input checked="" type="checkbox"/> DC Power		
	<input type="checkbox"/> Battery Operated Exclusively		
	<input type="checkbox"/> Prototype		
Type of Equipment	<input type="checkbox"/> Fixed	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Antenna Connector	N/A	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable
Antenna	Internal		
Test Facility	Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669 USA.		
Test Conditions	Temperature: 26°C Relative humidity: 50%		
Test Exercise	The DUT was placed in continuous transmit mode of operation.		

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	12/31/11	12/31/13
3-Meter OATS	TEI	N/A	N/A	12/31/11	12/31/13
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/11	12/31/13
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	10/28/11	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	10/28/11	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	10/28/11	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	10/28/11	10/28/13
Antenna: Biconnical	Eaton	94455-1	1057	05/31/11	05/31/13
Antenna: Biconnical	Eaton	94455-1	1096	05/04/11	05/04/13
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	06/13/12	06/13/14
Antenna: Log-Periodic	Eaton	96005	1243	05/31/11	05/31/13
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	05/04/11	05/04/13
LISN	Electro-Metrics	ANS-25/2	2604	10/28/11	10/28/13
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	06/14/12	06/14/14
Horn antenna 18-26 GHz	Systron-Donner	DBE-520-0	NA	STD Gain	STD Gain
Horn Antenna	ETS-Lindgren	3117	35923	12/07/11	12/07/13
LISN	Electro-Metrics	EM-7820	2682	02/01/11	02/01/13
Signal Generator	HP	8640B	2308A21464	02/23/12	02/23/14

APPLICANT: MOTOROLA MOBILITY LLC

FCC ID: IHDP56NB1

REPORT: W:\M\MOTOROLA FL JL\3179CUT12\3179CUT12TestReport_Rev.doc

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dBμV	+ 10.36 dB	+ 0.5 = 30.86 dBμV/m @ 3m

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

Bandwidth 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=1 MHz and the video bandwidth (VBW) =3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW=100 kHz, VBW=300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

RADIATION INTERFERENCE

Rules Part No.: 15.247, 15.209, RSS-210, RSS-GEN
Requirements:

Frequency	Limits
Part 15.209, RSS-210	
9 to 490 kHz	2400/F (kHz) $\mu\text{V}/\text{m}$ @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu\text{V}/\text{m}$ @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu\text{V}/\text{m}$ @ 30 meters
30 – 88	40.0 dB $\mu\text{V}/\text{m}$ @ 3 meters
80 – 216	43.5 dB $\mu\text{V}/\text{m}$ @ 3 meters
216 – 960	46.0 dB $\mu\text{V}/\text{m}$ @ 3 meters
Above 960	54.0 dB $\mu\text{V}/\text{m}$ @ 3 meters
Part 15.247, RSS-210	
Fundamental 902 – 928 MHz	127.37 dB $\mu\text{V}/\text{m}$ @ 3 meters
Fundamental 2.4 – 2.4835 MHz	127.37 dB $\mu\text{V}/\text{m}$ @ 3 meters
Harmonics	54.0 dB $\mu\text{V}/\text{m}$ @ 3 meters


Any emissions that fall in the restricted bands (15.205) must be less than or equal to 54 dB $\mu\text{V}/\text{m}$. Spurious emissions not in a restricted band must be 20 dBc. Spurious emissions were checked from the lowest frequency generated or 9 kHz to the tenth harmonic.

Test Data: All values are peak unless noted.
 Items mark with an * designate a frequency in a restricted band.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,402.0	2,402.00	71.5	H	3.18	32.40	107.08	20.30
2,402.0	2,402.00	73.1	V	3.18	32.40	108.68	18.70
2,402.0	4,804.00 *	8.1	H	4.90	34.38	47.38	6.62
2,402.0	4,804.00 *	8.4	V	4.90	34.38	47.68	6.32
2,402.0	7,206.00	7.2	V	5.72	36.16	49.08	39.60
2,402.0	7,206.00	7.4	H	5.72	36.16	49.28	39.40
2,402.0	9,608.00	8.2	V	6.78	36.73	51.71	36.97
2,402.0	9,608.00	8.9	H	6.78	36.73	52.41	36.27
2,441.0	2,441.00	69.8	V	3.21	32.48	105.49	21.89
2,441.0	2,441.00	70.1	H	3.21	32.48	105.79	21.59
2,441.0	4,882.00 *	8.1	H	4.94	34.43	47.47	6.53
2,441.0	4,882.00 *	8.5	V	4.94	34.43	47.87	6.13
2,441.0	7,323.00 *	7.8	H	5.79	36.14	49.73	4.27
2,441.0	7,323.00 *	8.8	V	5.79	36.14	50.73	3.27
2,441.0	9,764.00	8.2	V	6.83	36.92	51.95	33.84
2,441.0	9,764.00	8.6	H	6.83	36.92	52.35	33.44
2,480.0	2,480.00	68.3	H	3.24	32.56	104.10	23.28
2,480.0	2,480.00	71.1	V	3.24	32.56	106.90	20.48
2,480.0	4,960.00 *	8.1	H	4.98	34.48	47.56	6.44
2,480.0	4,960.00 *	9.1	V	4.98	34.48	48.56	5.44
2,480.0	7,440.00 *	8.2	V	5.86	36.11	50.17	3.83
2,480.0	7,440.00 *	8.3	H	5.86	36.11	50.27	3.73
2,480.0	9,920.00	8.1	H	6.88	37.10	52.08	34.82
2,480.0	9,920.00	8.5	V	6.88	37.10	52.48	34.42

Method of Measuring Radiated Spurious Emissions

Antenna is Calibrated
and appropriate one.
Raised from 1 to 4 M.

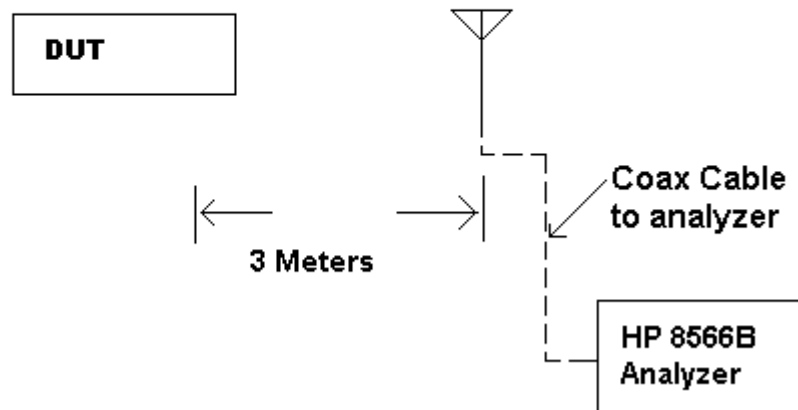

METHOD OF MEASUREMENT: The procedure used was ANSI standard C63.4-2003 & the FCC/OET Guidance on Measurements for Spread Spectrum Systems – KDB 558074 D01; V02.

POWER LINE CONDUCTED INTERFERENCE


Rules Part No.: Part 15.207, RSS-GEN

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBμV)	Average Limits (dBμV)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50
* Decrease with logarithm of frequency		


Test Data: The following plots represent the emissions read for power line conducted. Both lines were observed.

POWERLINE CONDUCTED PLOT - LINE 1

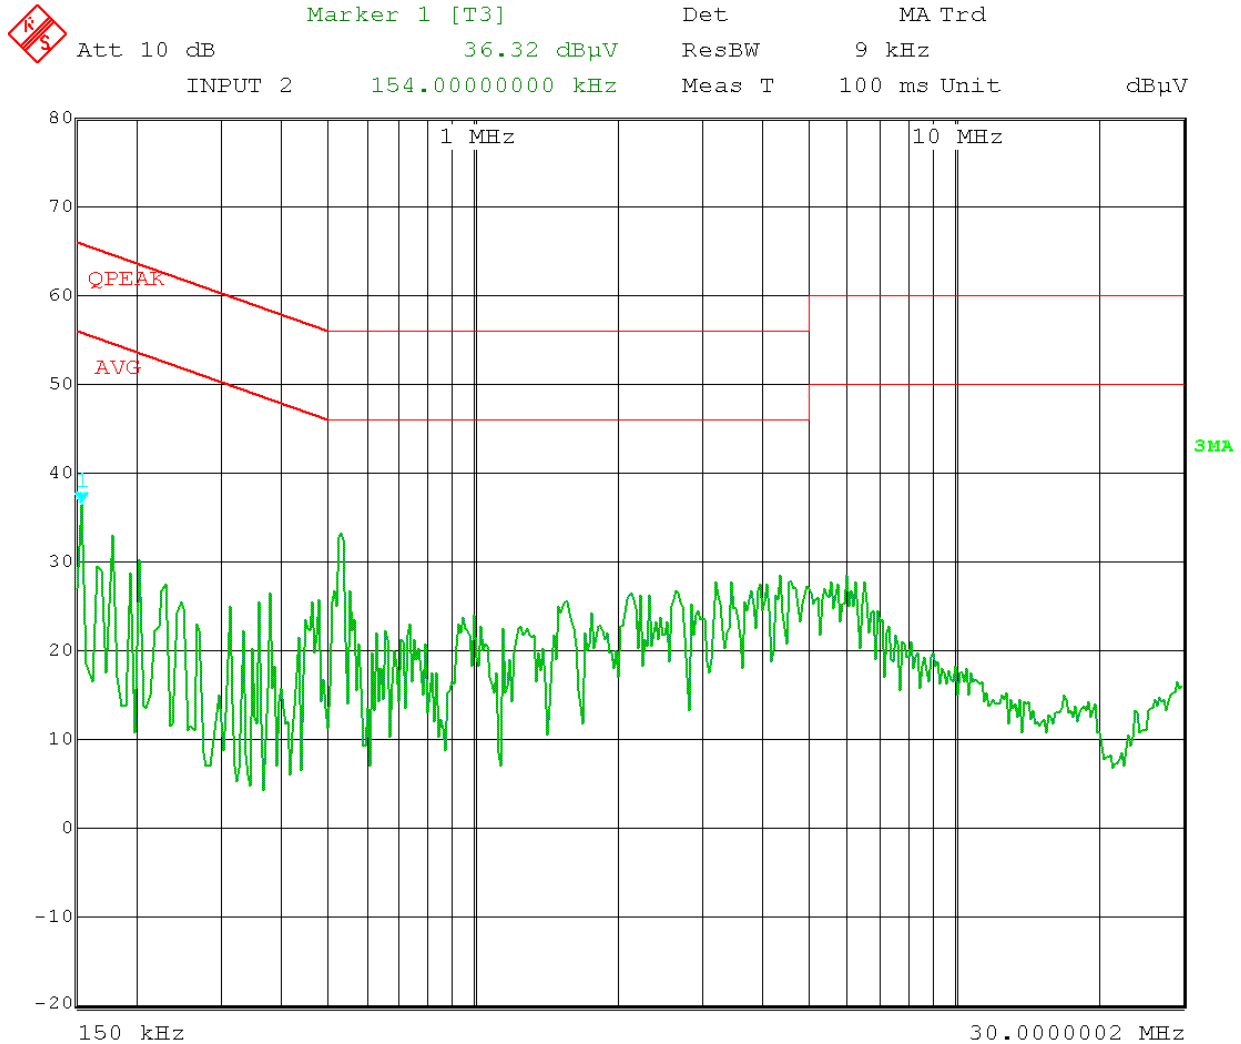

Date: 9.JAN.2013 15:35:51

POWERLINE CONDUCTED PLOT – LINE 2

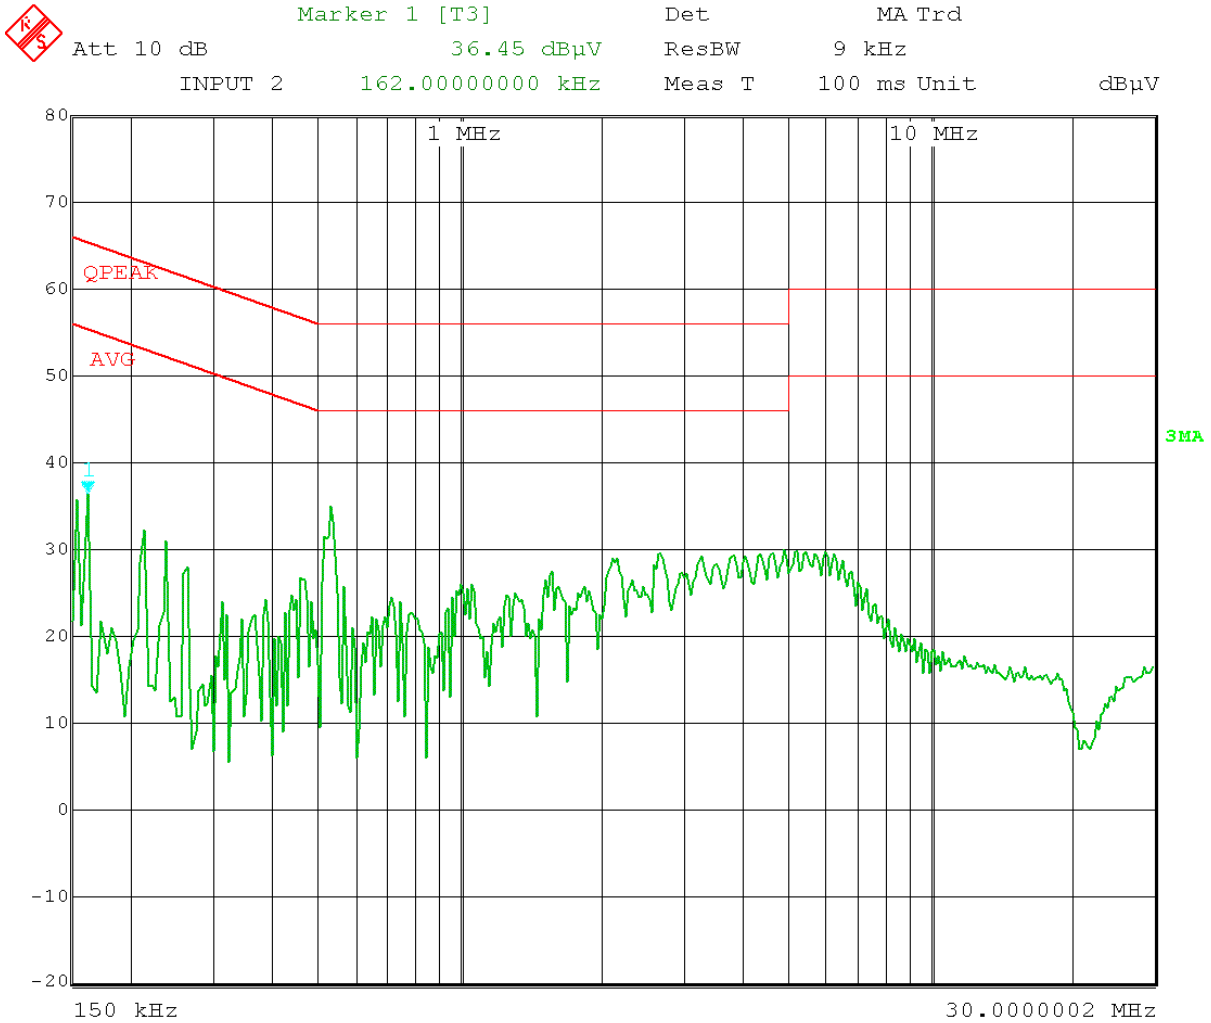


Date: 9.JAN.2013 15:37:13

RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

Requirements: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 $\mu\text{V}/\text{m}$ (54 $\text{dB}\mu\text{V}/\text{m}$).


Test Procedure: An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.

Lower adjacent restricted band Peak.

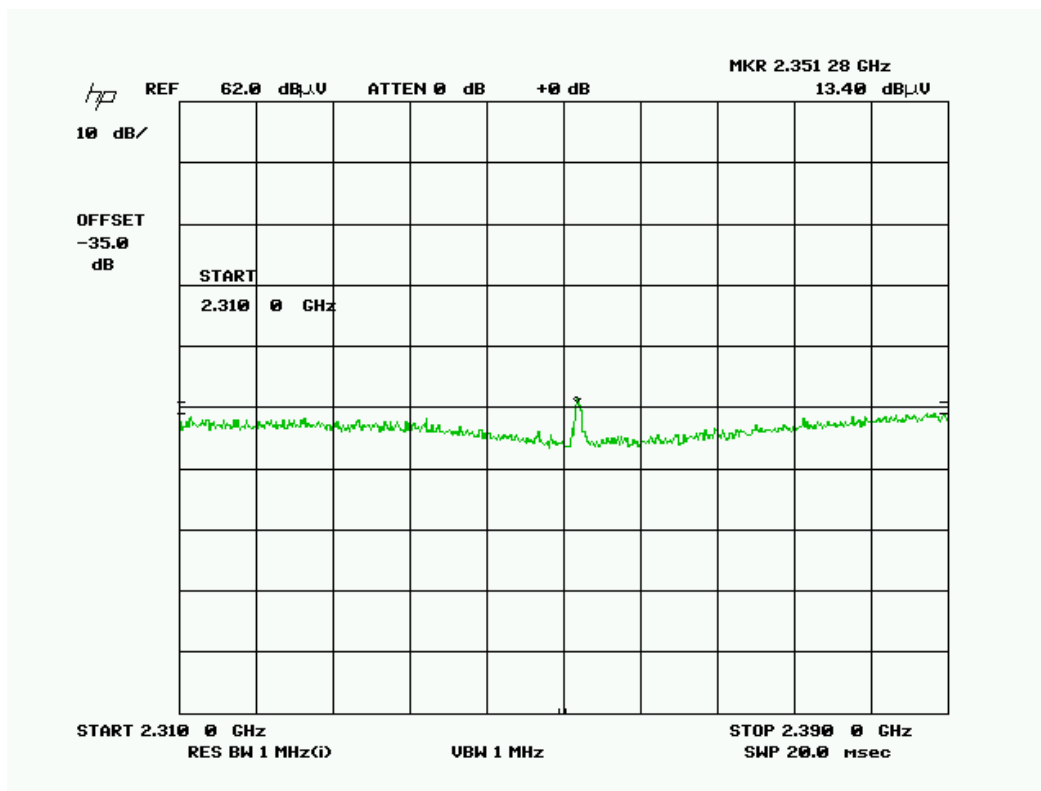


Emission Frequency MHz	Meter Reading dB μV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu\text{V}/\text{m}$	Margin dB
2,351.00	13.4	V	3.15	32.30	48.85	5.15


LOWER BAND EDGE PEAK

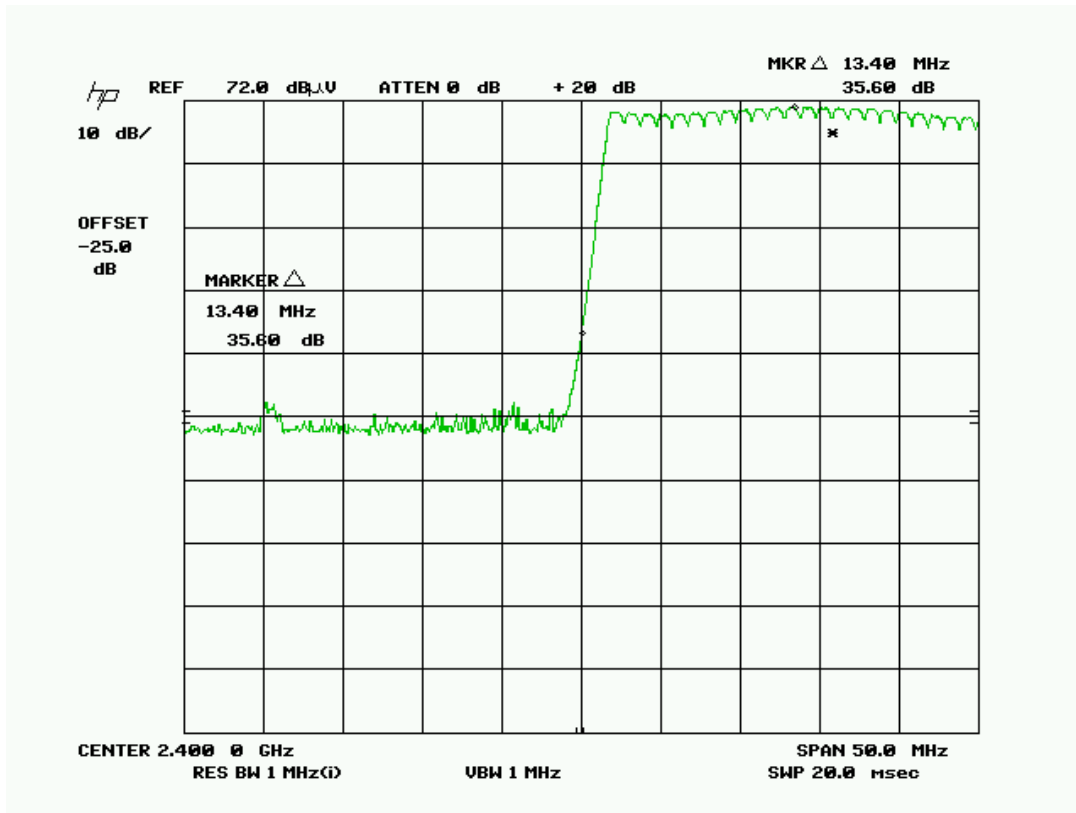

UPPER BAND EDGE PEAK

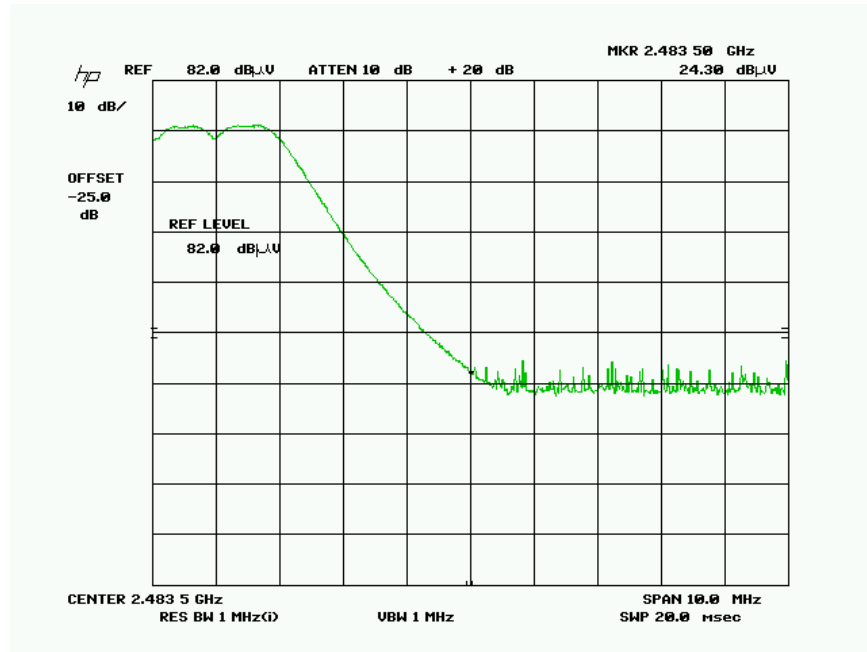

UPPER BAND EDGE AVERAGE

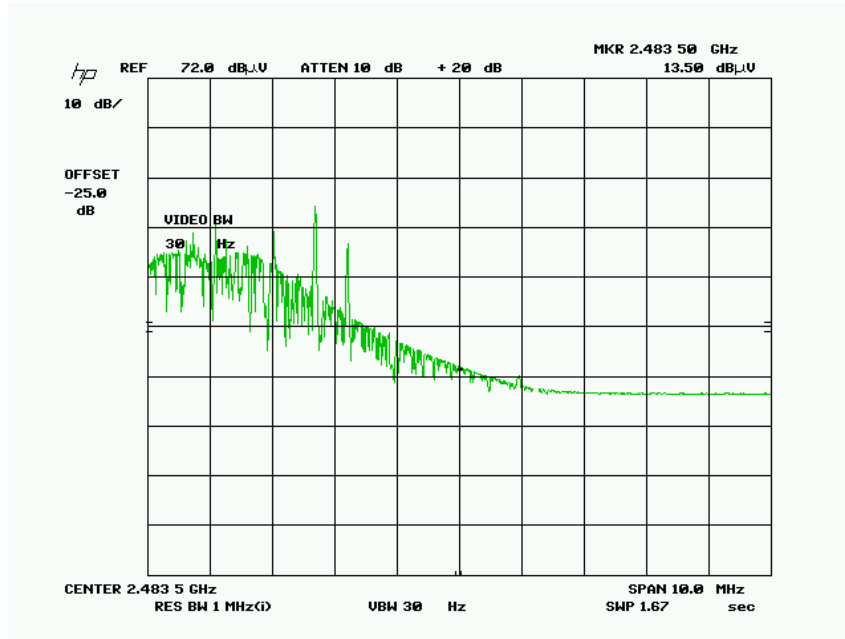

Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
2,483.50	24.2	V	3.24	32.57	60.01	13.99
2,483.50	13.5	V	3.24	32.57	49.31	4.69

APPLICANT: MOTOROLA MOBILITY LLC

FCC ID: IHDP56NB1

REPORT: W:\M\MOTOROLA FL JL\3179CUT12\3179CUT12TestReport_Rev.doc