

30_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9400

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.940 W/kg; SAR (10g) = 0.498 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 1.11 W/kg; SAR (10g) = 0.534 W/kg;

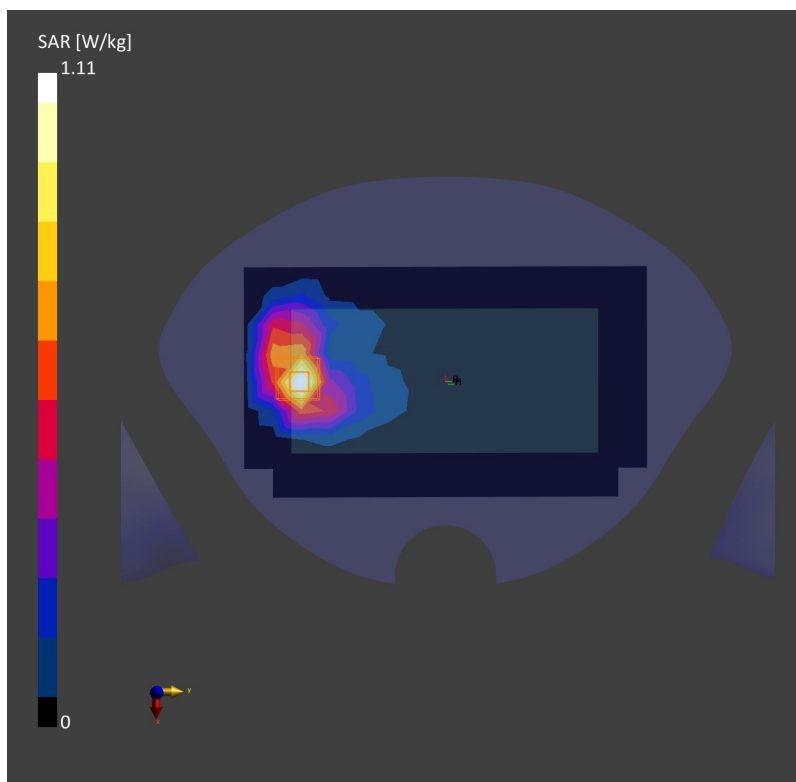

31_LTE Band 2_20M_QPSK_1RB_0Offset_Back_5mm_Ch18700

Communication System: Band 2, E-UTRA/FDD; Frequency: 1860.0

Medium: HSL. Medium parameters used: $f = 1860.0$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.679 W/kg; SAR (10g) = 0.376 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.10 dB

SAR (1g) = 0.961 W/kg; SAR (10g) = 0.465 W/kg;

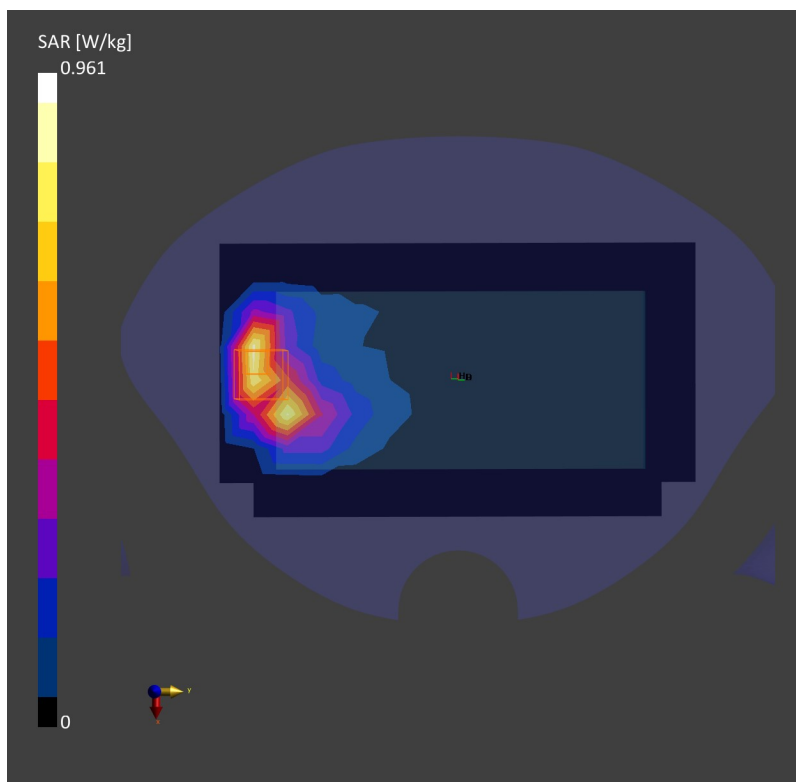

32_LTE Band 7_20M_QPSK_50RB_0Offset_Front_5mm_Ch21350

Communication System: Band 7, E-UTRA/FDD; Frequency: 2560.0

Medium: HSL. Medium parameters used: $f = 2560.0$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.522 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.858 W/kg; SAR (10g) = 0.434 W/kg;

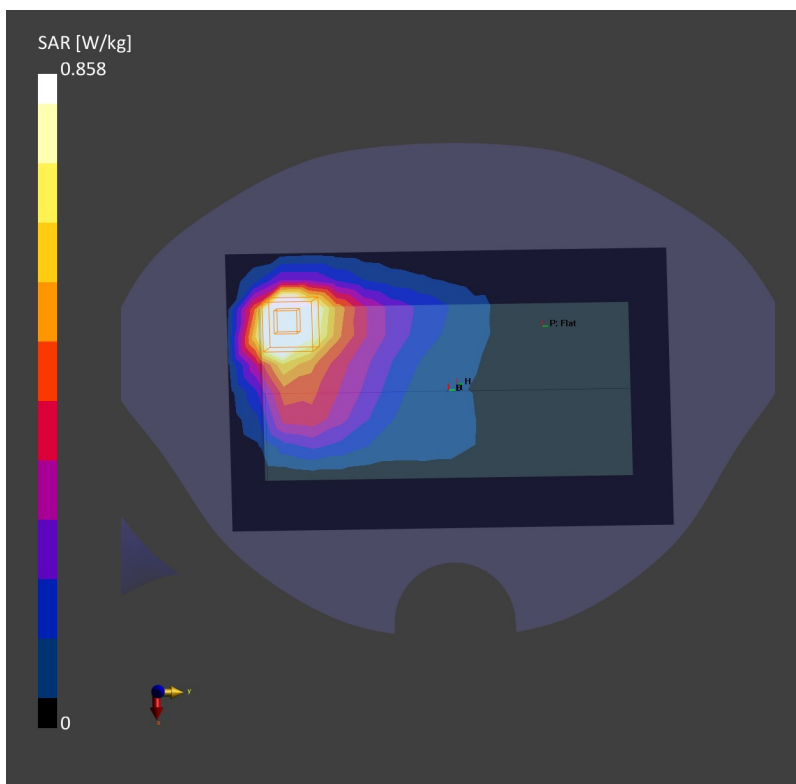

33_LTE Band 41_20M_QPSK_1RB_0Offset_Back_5mm_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.800 W/kg; SAR (10g) = 0.398 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.10 dB

SAR (1g) = 0.903 W/kg; SAR (10g) = 0.411 W/kg;

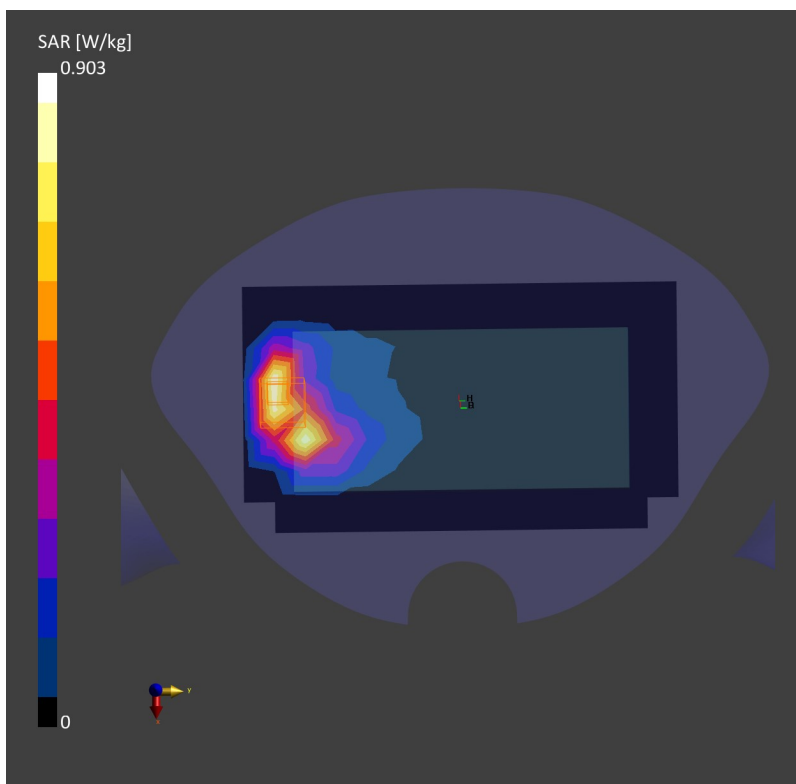

34_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.0

Medium: HSL. Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.279 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 0.548 W/kg; SAR (10g) = 0.303 W/kg;

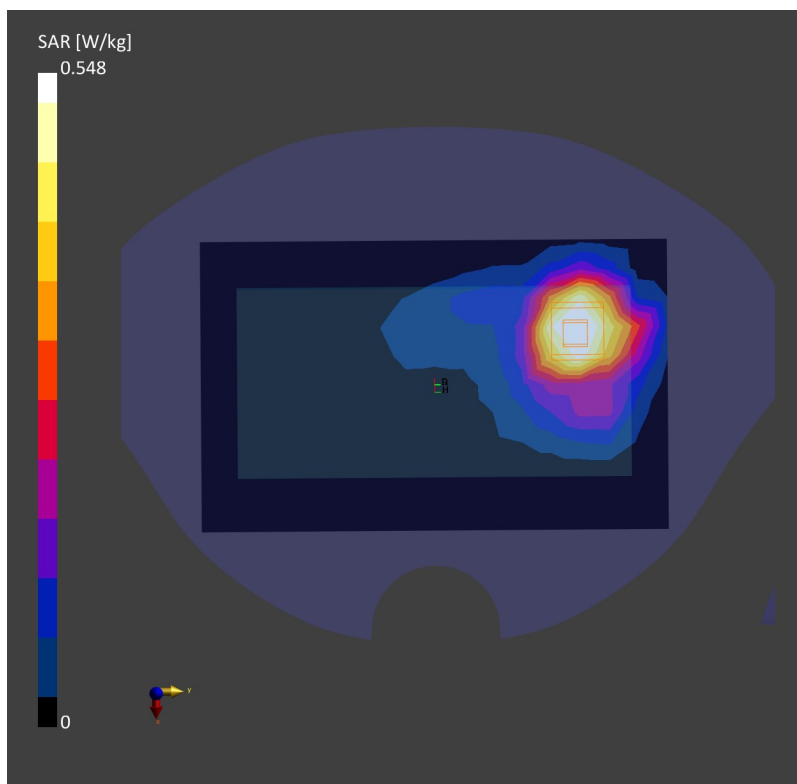

35_Bluetooth_1Mbps_Back_5mm_Ch78

Communication System: ISM 2.4 GHz Band; Frequency: 2480.0

Medium: HSL. Medium parameters used: $f = 2480.0$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.29, 8.29, 8.29); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.139 W/kg; SAR (10g) = 0.078 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.132 W/kg; SAR (10g) = 0.073 W/kg;

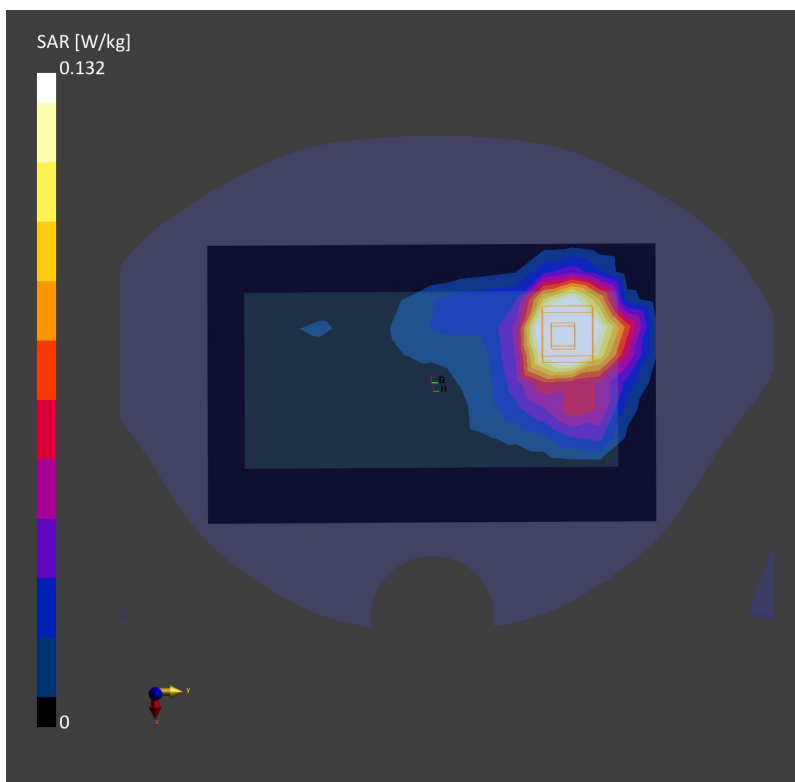

36_WLAN5GHz_802.11n-HT40 MCS0_Back_5mm_Ch54

Communication System: WLAN 5GHz; Frequency: 5270.0

Medium: HSL. Medium parameters used: $f = 5270.0$ MHz; $\sigma = 4.63$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.07, 6.07, 6.07); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.754 W/kg; SAR (10g) = 0.257 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.746 W/kg; SAR (10g) = 0.251 W/kg;

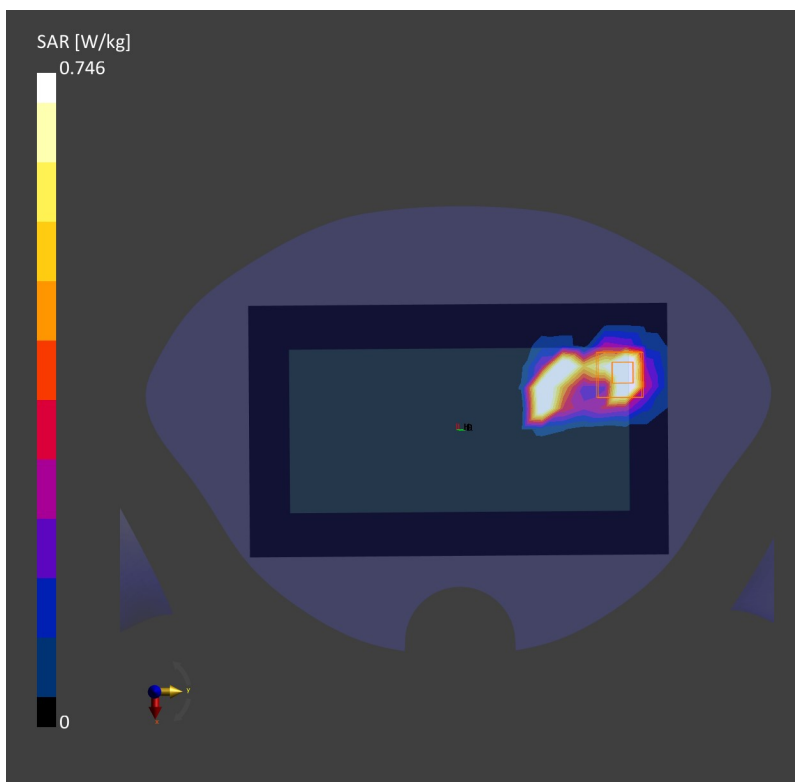

37_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch122

Communication System: WLAN 5GHz; Frequency: 5610.0

Medium: HSL. Medium parameters used: $f = 5610.0$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.3, 5.3, 5.3); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.194 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.732 W/kg; SAR (10g) = 0.212 W/kg;

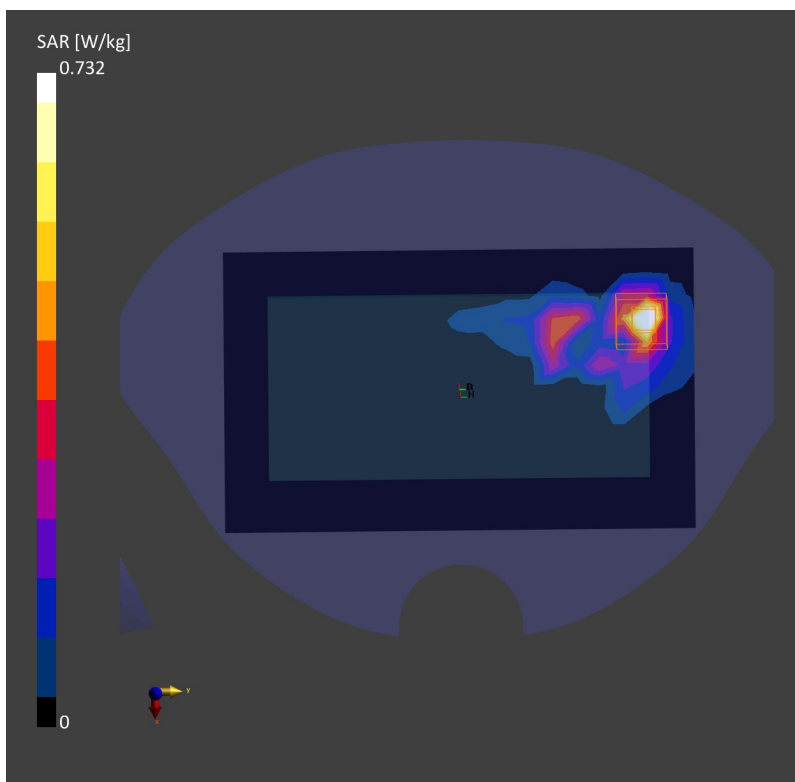

38_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.49, 5.49, 5.49); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.618 W/kg; SAR (10g) = 0.199 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.689 W/kg; SAR (10g) = 0.219 W/kg;

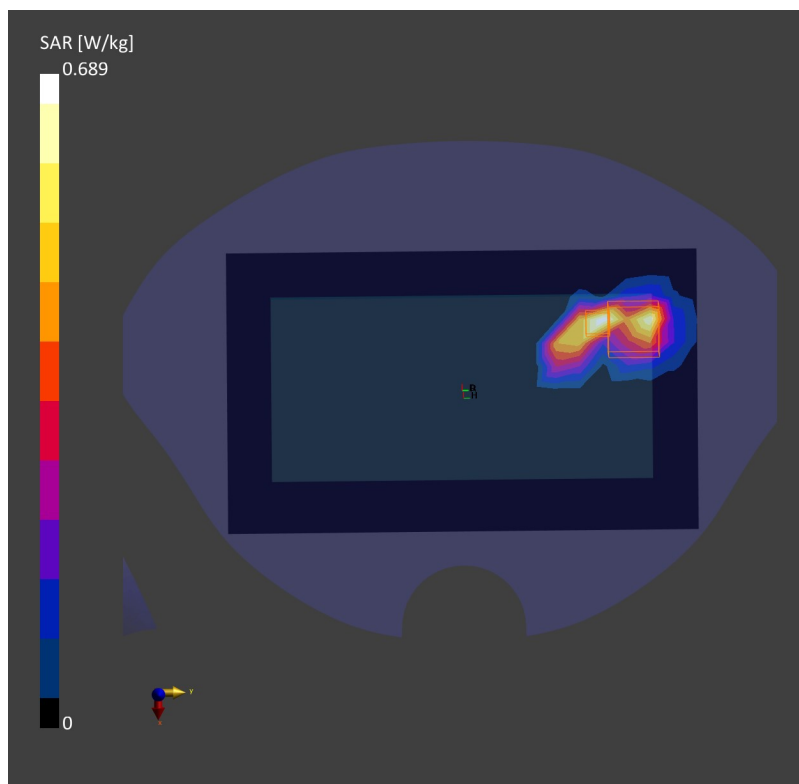

39_GSM850_GPRS (2 Tx slots)_Back_0mm_Ch128

Communication System: GSM 850; Frequency: 824.2

Medium: HSL. Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.58 W/kg; SAR (10g) = 2.68 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 4.47 W/kg; SAR (10g) = 2.13 W/kg;

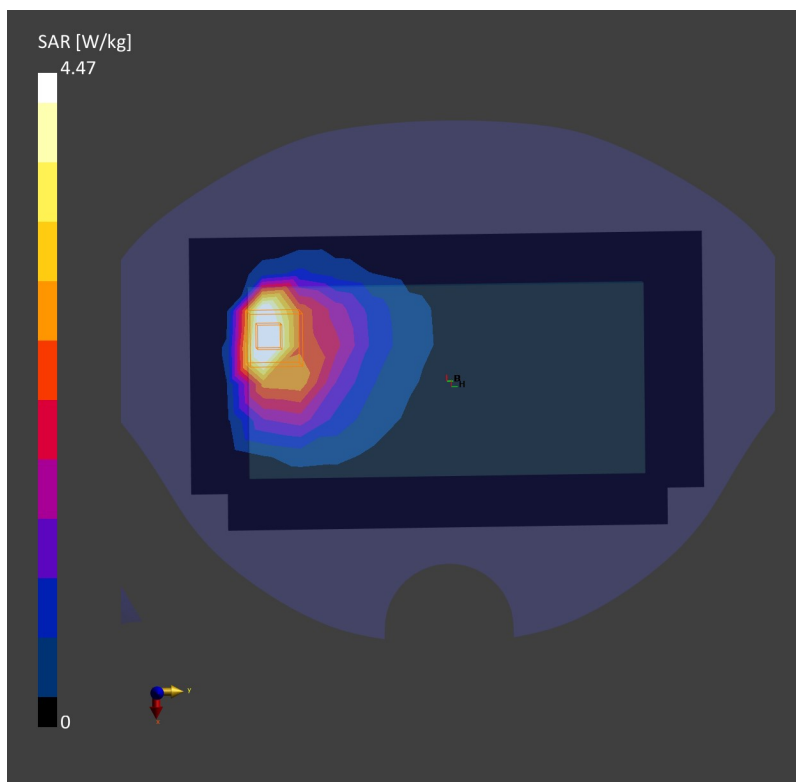

40_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4182

Communication System: Band 5, UTRA/FDD; Frequency: 836.4

Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.52 W/kg; SAR (10g) = 2.04 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 3.16 W/kg; SAR (10g) = 1.52 W/kg;

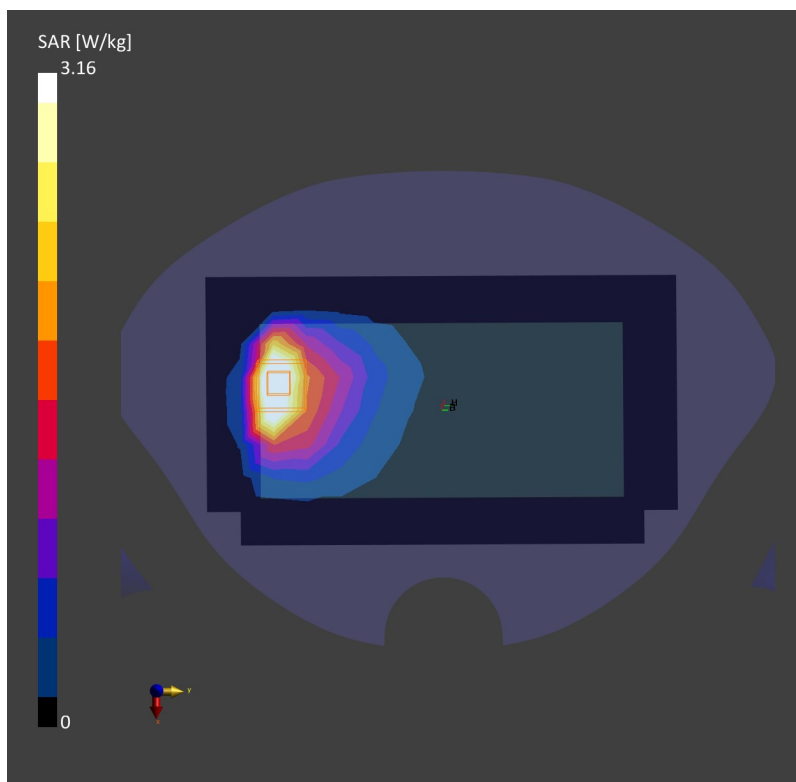

41_LTE Band 26_15M_QPSK_1RB_0Offset_Back_0mm_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.57, 10.57, 10.57); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.39 W/kg; SAR (10g) = 1.04 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.09 dB

SAR (1g) = 2.58 W/kg; SAR (10g) = 1.21 W/kg;

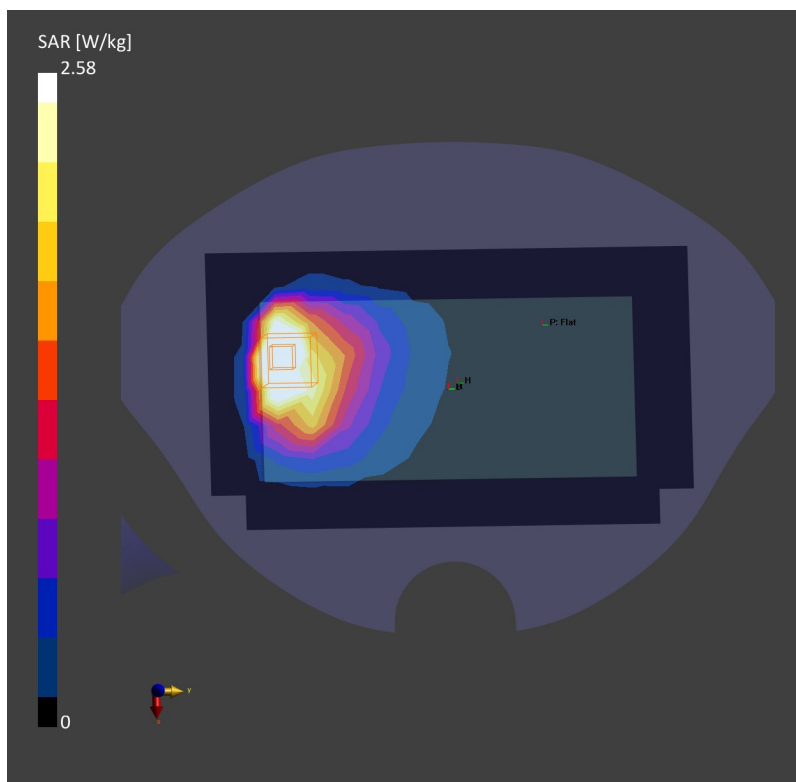

42_GSM1900_GPRS (2 Tx slots)_Bottom Side_0mm_Ch512

Communication System: PCS 1900; Frequency: 1850.2

Medium: HSL. Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.70 W/kg; SAR (10g) = 2.51 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 5.60 W/kg; SAR (10g) = 2.37 W/kg;

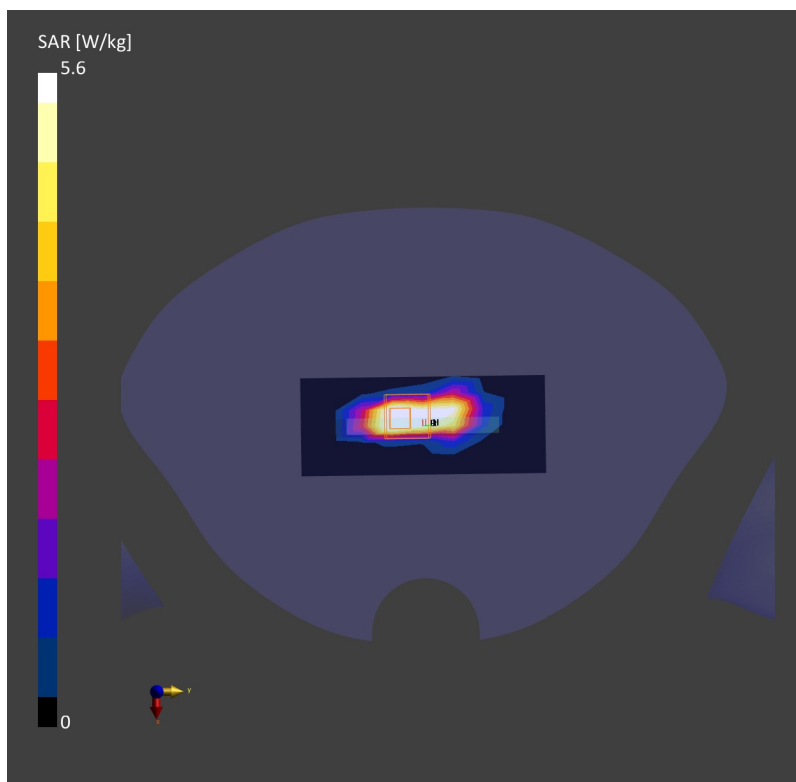

43_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9262

Communication System: Band 2, UTRA/FDD; Frequency: 1852.4

Medium: HSL. Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.01 W/kg; SAR (10g) = 2.54 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 5.98 W/kg; SAR (10g) = 2.33 W/kg;

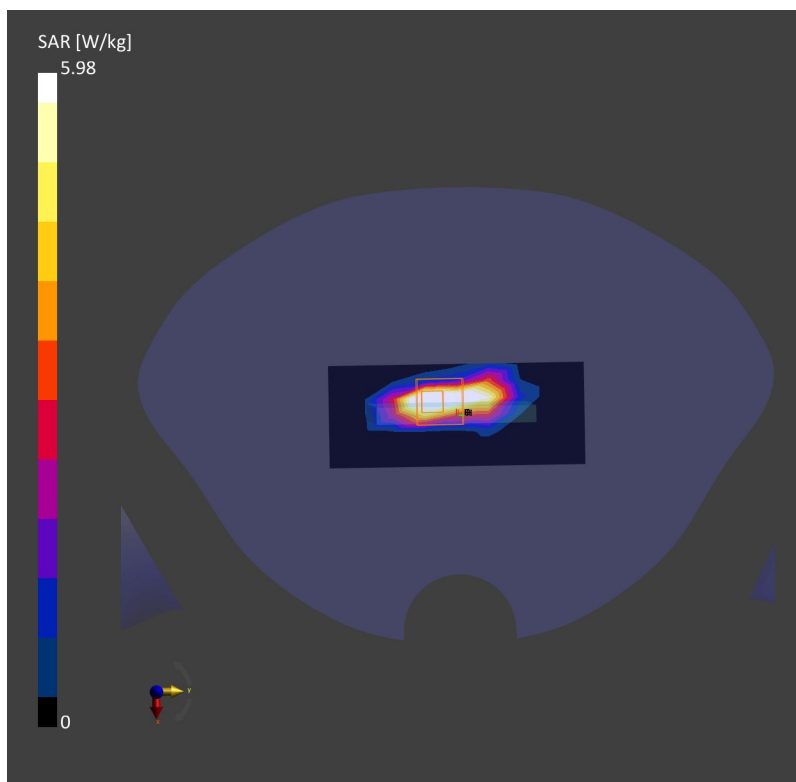

44_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Side_0mm_Ch19100

Communication System: Band 2, E-UTRA/FDD; Frequency: 1900.0

Medium: HSL. Medium parameters used: $f = 1900.0$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.8, 8.8, 8.8); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.42 W/kg; SAR (10g) = 2.34 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 5.54 W/kg; SAR (10g) = 2.10 W/kg;

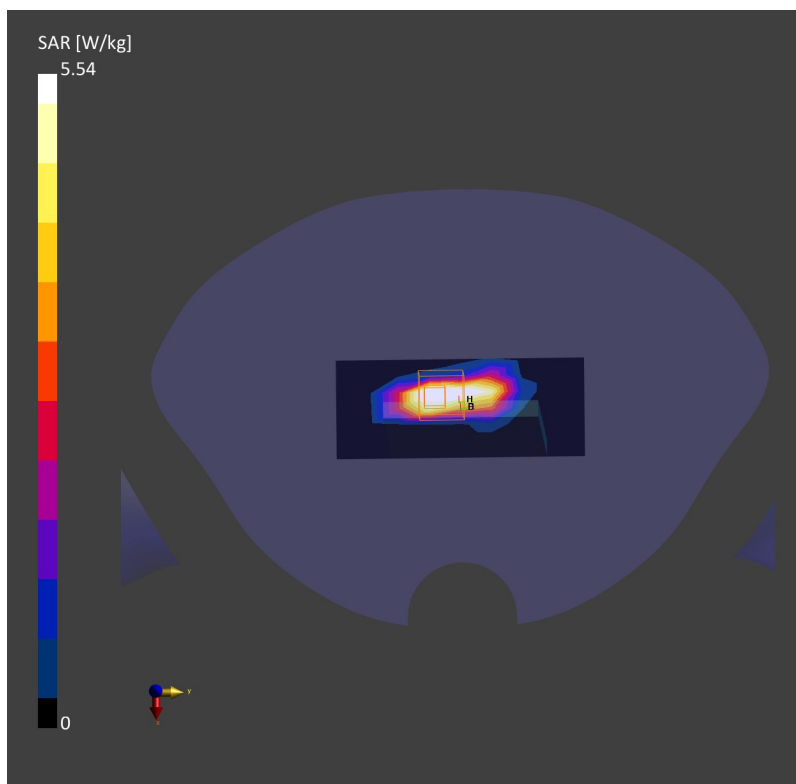

45_LTE Band 7_20M_QPSK_1RB_0Offset_Front_0mm_Ch21100

Communication System: Band 7, E-UTRA/FDD; Frequency: 2535.0

Medium: HSL. Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 2.17 W/kg; SAR (10g) = 1.14 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.16 dB

SAR (1g) = 2.88 W/kg; SAR (10g) = 1.32 W/kg;

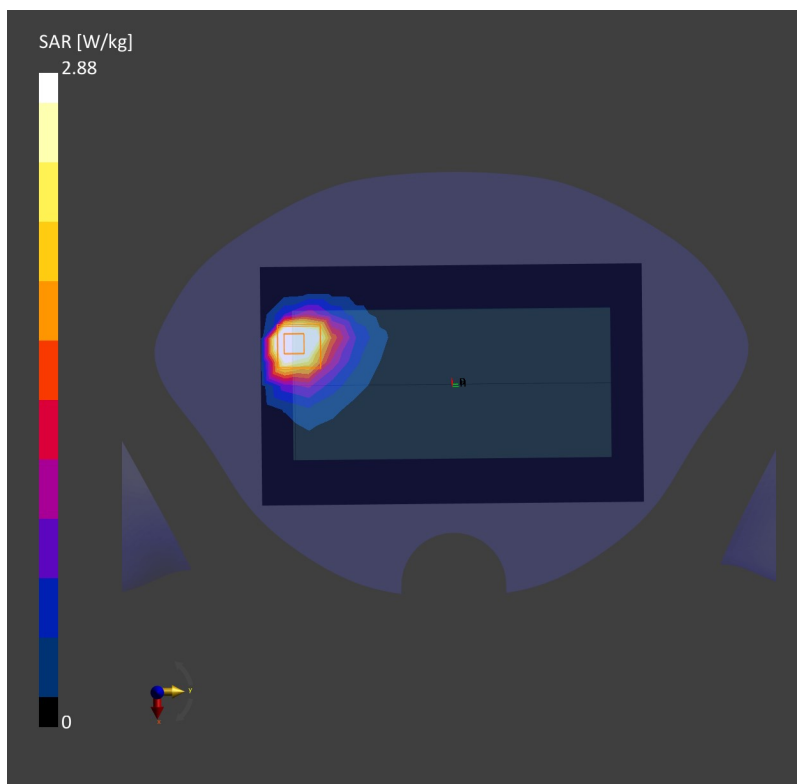

46_LTE Band 41_20M_QPSK_50RB_0Offset_Back_0mm_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.02, 8.02, 8.02); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 3.36 W/kg; SAR (10g) = 1.20 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 3.59 W/kg; SAR (10g) = 1.47 W/kg;

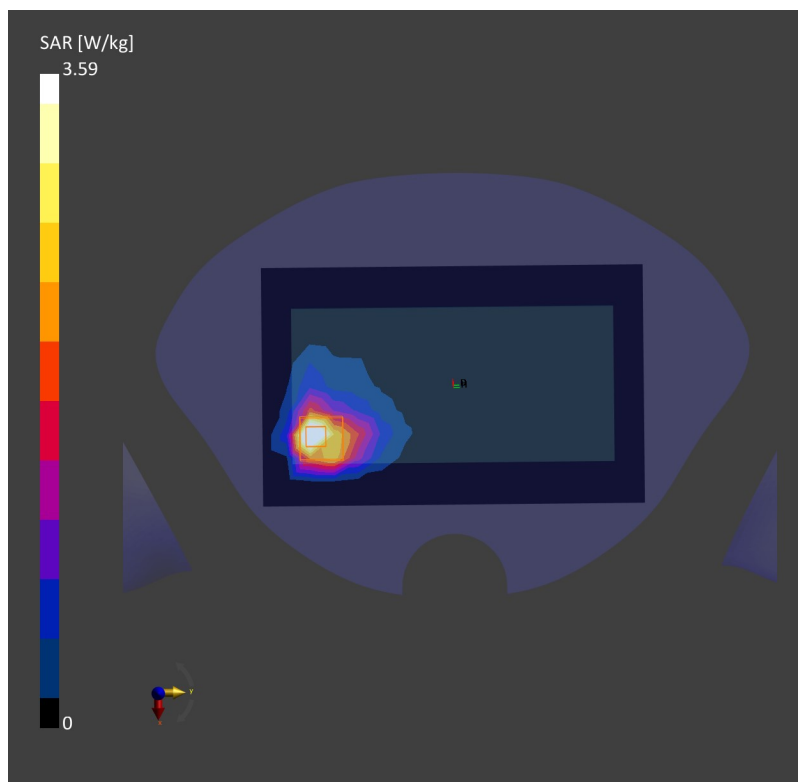

47_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch44

Communication System: WLAN 5GHz; Frequency: 5220.0

Medium: HSL. Medium parameters used: $f = 5220.0$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.07, 6.07, 6.07); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.85 W/kg; SAR (10g) = 0.774 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 2.96 W/kg; SAR (10g) = 0.802 W/kg;

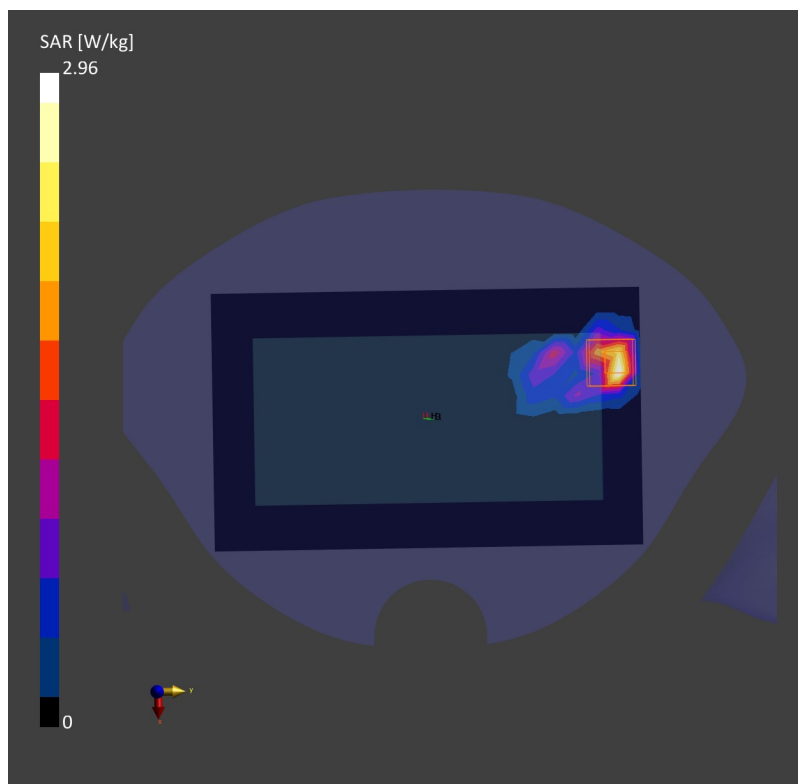

48_WLAN5GHz_802.11a 6Mbps_Top Side_0mm_Ch60

Communication System: WLAN 5GHz; Frequency: 5300.0

Medium: HSL. Medium parameters used: $f = 5300.0$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.07, 6.07, 6.07); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.93 W/kg; SAR (10g) = 0.918 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 4.68 W/kg; SAR (10g) = 1.04 W/kg;

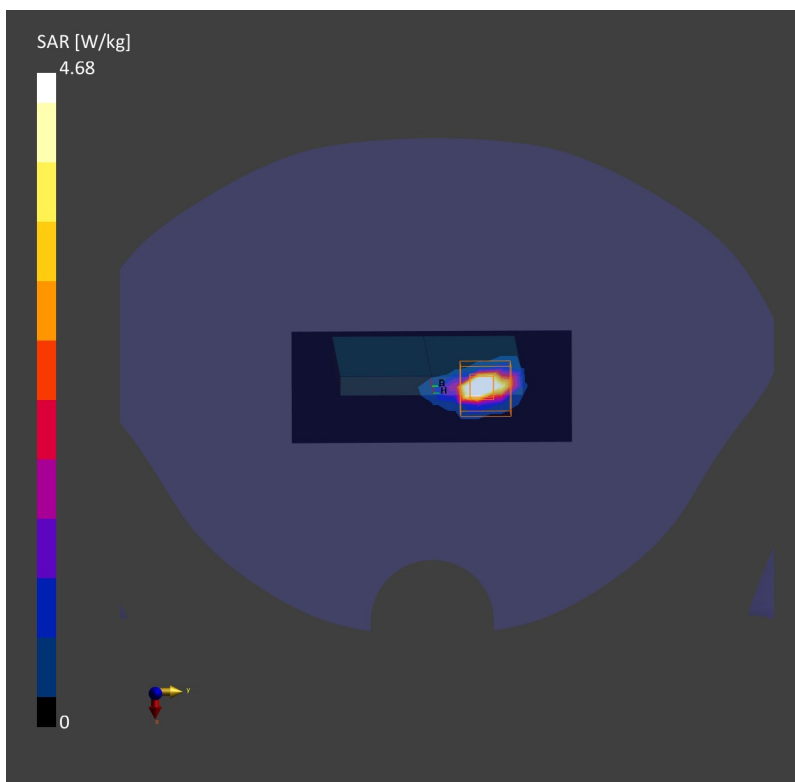

49_WLAN5GHz_802.11a 6Mbps_Top Side_0mm_Ch124

Communication System: WLAN 5GHz; Frequency: 5620.0

Medium: HSL. Medium parameters used: $f = 5620.0$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.3, 5.3, 5.3); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.40 W/kg; SAR (10g) = 1.29 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 5.30 W/kg; SAR (10g) = 1.38 W/kg;

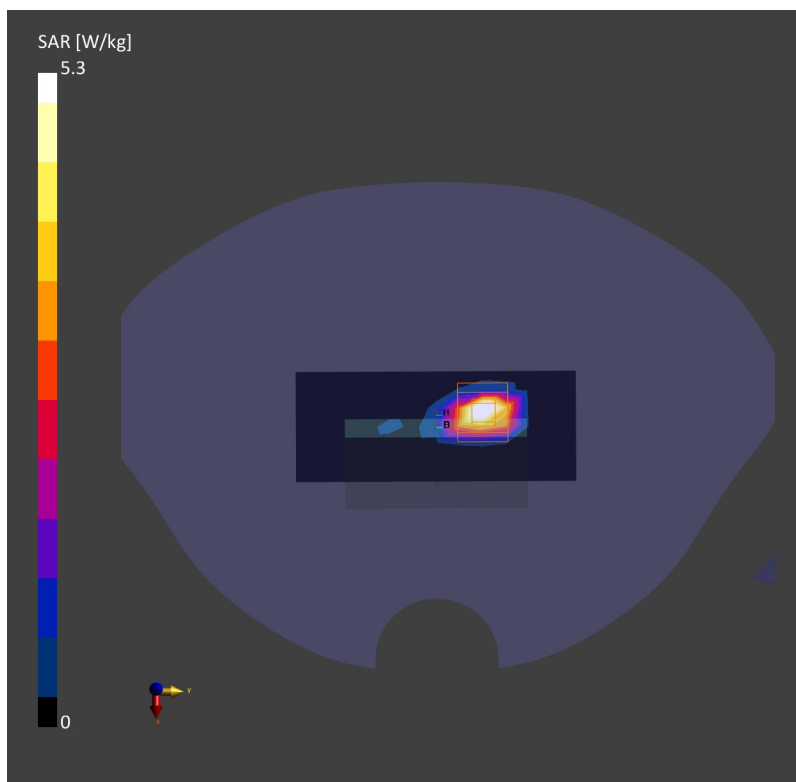

50_WLAN5G_802.11a 6Mbps_Top Side_0mm_Ch165

Communication System: WLAN 5GHz; Frequency: 5825.0

Medium: HSL. Medium parameters used: $f = 5825.0$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.49, 5.49, 5.49); Calibrated: 2022-01-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2022-03-30
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.47 W/kg; SAR (10g) = 1.31 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 5.35 W/kg; SAR (10g) = 1.47 W/kg;

