



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2301-4
FCC ID : IHDT56AH3
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Sep. 08, 2022 ~ Sep. 29, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Specification of Accessory 7

 1.6 Modification of EUT 7

 1.7 Maximum ERP/EIRP, and Emission Designator 8

 1.8 Testing Location 8

 1.9 Test Software 8

 1.10 Applicable Standards 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Test Mode..... 10

 2.2 Connection Diagram of Test System 11

 2.3 Support Unit used in test configuration 11

 2.4 Measurement Results Explanation Example 11

 2.5 Frequency List of Low/Middle/High Channels..... 12

3 CONDUCTED TEST RESULT..... 13

 3.1 Measuring Instruments..... 13

 3.2 Test Setup 13

 3.3 Test Result of Conducted Test..... 13

 3.4 Conducted Output Power and ERP/EIRP 14

 3.5 Peak-to-Average Ratio 14

 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 15

 3.7 Conducted Band Edge 16

 3.8 Conducted Spurious Emission 17

 3.9 Frequency Stability..... 18

4 RADIATED TEST ITEMS 19

 4.1 Measuring Instruments..... 19

 4.2 Test Setup 19

 4.3 Test Result of Radiated Test..... 20

 4.4 Field Strength of Spurious Radiation Measurement 21

5 LIST OF MEASURING EQUIPMENT 22

6 UNCERTAINTY OF EVALUATION 23

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053; §22.917(a); §24.238(a); §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 27.67 dB at 2510.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2301-4
FCC ID	IHDT56AH3
IMEI Code	Conducted: 354336350017059/354336350017067 Radiation: 354336350016416
HW Version	DVT2
SW Version	TTR33.76
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824 MHz ~ 849 MHz 1900: 1850MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990 MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: Ant:0 850: 32.65 dBm WCDMA: Band V: 24.22 dBm GSM/GPRS/EDGE: Ant:1 850: 32.78 dBm 1900: 29.53 dBm WCDMA: Band V: 24.03 dBm Band II: 20.33 dBm Band IV: 20.99 dBm GSM/GPRS/EDGE: Ant:2 1900: 29.54 dBm WCDMA: Band II: 21.42 dBm Band IV: 21.82 dBm
Antenna Type	Ant:0/1: IFA Antenna Ant:2: LOOP Antenna
Antenna Gain	Ant:0 Cellular Band: -5 dBi Ant:1 Cellular Band: -5.76 dBi PCS Band: -0.58 dBi AWS Band: -1.91 dBi Ant:2 PCS Band: -3.1 dBi AWS Band: -3.5 dBi



Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM
---------------------------	---

Remark: The maximum ERP/EIRP is calculated from max Output power and antenna gain, only the maximum ERP/EIRP are shown in the report, GSM850/WCDMA Band V for Antenna 0, GSM1900/WCDMA Band IV/II for Antenna 1.

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola(Chenyang)	Model Name	MC-1251
AC Adapter 1 (EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-1252
AC Adapter 1 (UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-1253
AC Adapter 1 (AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-1255
AC Adapter 1 (AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-1256
AC Adapter 1 (BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-1257
AC Adapter 2 (US)	Brand Name	Motorola(AOHAI)	Model Name	MC-1251
AC Adapter 2 (EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-1252
AC Adapter 2 (UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-1253
AC Adapter 2 (IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-1254
AC Adapter 2 (AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-1255
AC Adapter 2 (AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-1256
AC Adapter 2 (BR)	Brand Name	Motorola(AOHAI)	Model Name	MC-1257
AC Adapter 2 (CHILE)	Brand Name	Motorola(AOHAI)	Model Name	MC-1259
Battery	Brand Name	Motorola(ATL)	Model Name	PF46
Earphone	Brand Name	Motorola(Lyand)	Model Name	MI181C(SH38D62338)
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SC18D24968
C to HDMI HDMI/USBC Cable 1	Brand Name	Motorola (Linxee)	Model Name	SC18D02146
C to HDMI HDMI/USBC Cable 2	Brand Name	Motorola (Linxee)	Model Name	SC18D38847

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Maximum ERP/EIRP, and Emission Designator

FCC Rule	Frequency Band	Frequency Range (MHz)	Type of Modulation	Maximum ERP/EIRP (W)	Emission Designator
Part 22	GSM850 (GSM)	824.2 ~ 848.8	GMSK	0.3548	242KGXW
Part 22	GSM850 (EDGE)	824.2 ~ 848.8	8PSK	0.0719	241KG7W
Part 22	WCDMA Band V	826.4 ~ 846.6	BPSK	0.0509	4M15F9W
Part 24	GSM1900 (GSM)	1850.2 ~ 1909.8	GMSK	0.7852	244KGXW
Part 24	GSM1900 (EDGE)	1850.2 ~ 1909.8	8PSK	0.2178	244KG7W
Part 24	WCDMA Band II	1852.4 ~ 1907.6	BPSK	0.0944	4M16F9W
Part 27	WCDMA Band IV	1712.4 ~ 1752.6	BPSK	0.0809	4M16F9W

1.8 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al



1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission (Z plane).

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GSM 1 TX slot Link ■ EDGE 1 Tx slots Link 	<ul style="list-style-type: none"> ■ GSM 1 TX slot Link ■ EDGE 1 Tx slots Link
GSM 1900	<ul style="list-style-type: none"> ■ GSM 1 TX slot Link ■ EDGE 1 Tx slots Link 	<ul style="list-style-type: none"> ■ GSM 1 TX slot Link ■ EDGE 1 Tx slots Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band IV	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

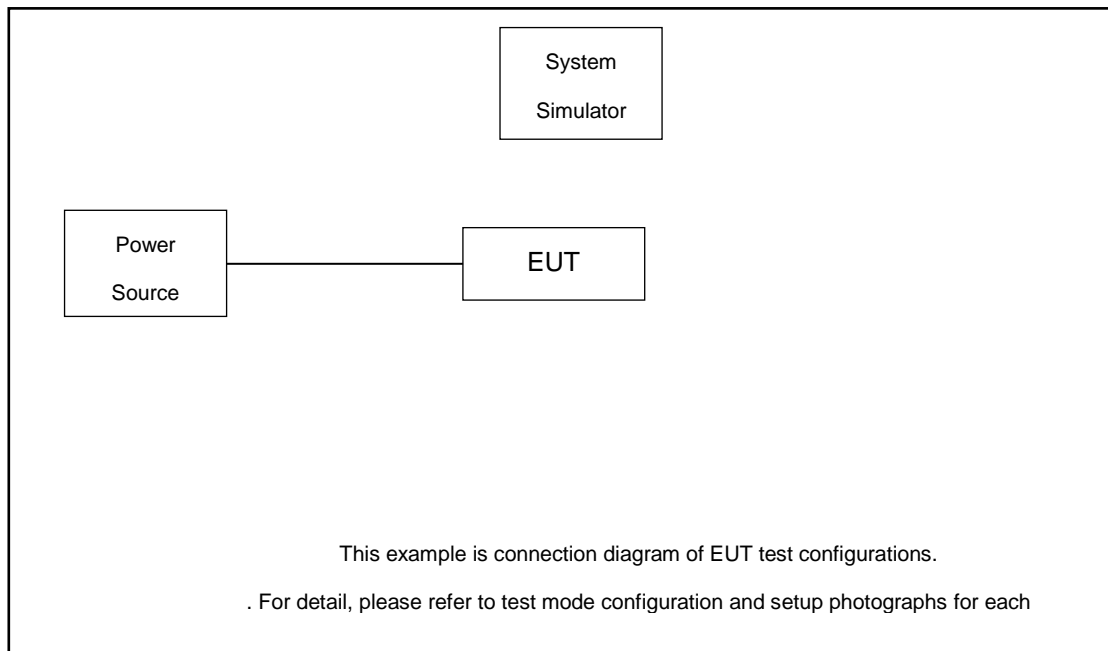

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded,1.8m
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.60 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.60 + 10 = 14.60 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

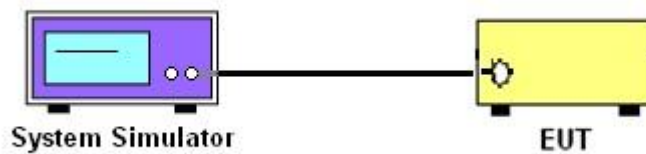

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

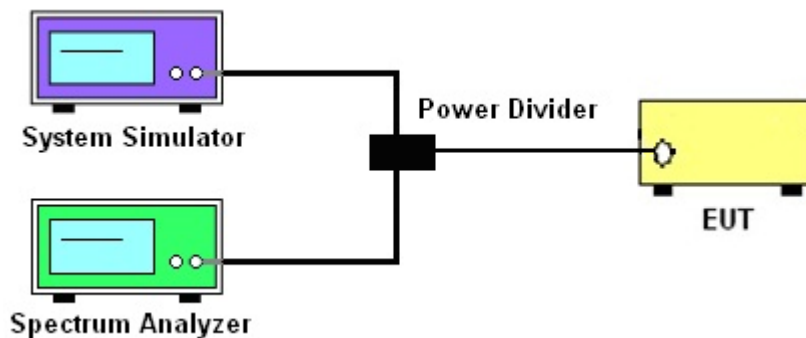

3.2.3 Frequency Stability

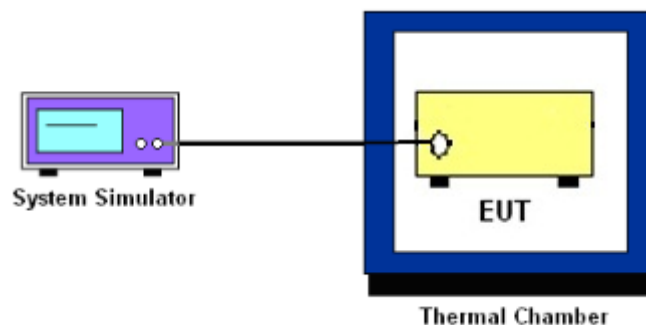

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

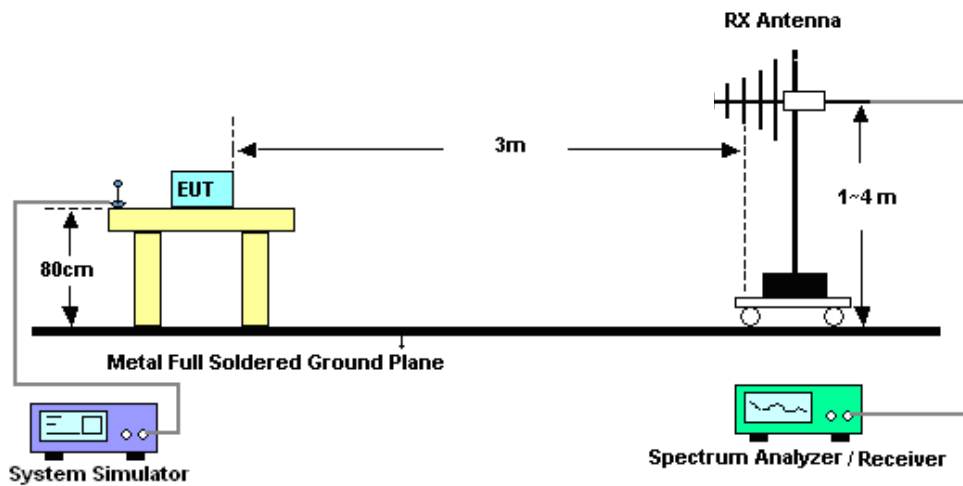

4.2.3 For radiated test above 1GHz

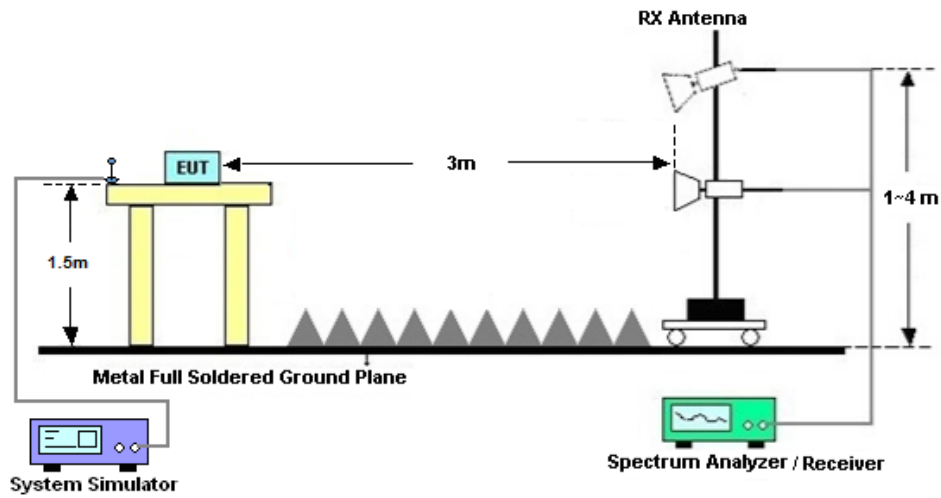

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 14, 2021	Sep 29, 2022	Oct. 13, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Sep. 29, 2022	Oct. 29, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Sep 29, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Sep 29, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Sep 29, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Sep 29, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Sep 29, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060839	1Ghz-18Ghz	Oct. 14, 2021	Sep 29, 2022	Oct. 13, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 13, 2021	Sep 29, 2022	Oct. 12, 2022	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep 29, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep 29, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep 29, 2022	NCR	Radiation (03CH04-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-2805-3000-18000-40ST	2	3G High Pass	Jun. 14, 2022	Sep 29, 2022	Jun. 13, 2023	Radiation (03CH04-KS)
High Pass Filter	Wainwright Instruments Gmbh	WHKX12-935-1000-15000-40ST	2	1G High Pass	Jun. 14, 2022	Sep 29, 2022	Jun. 13, 2023	Radiation (03CH04-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Sep 08, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2022	Sep 08, 2022	Aug. 25, 2023	Conducted (TH01-KS)
Temperature & humidity	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Sep 08, 2022	Jul. 14, 2023	Conducted (TH01-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and ERP/EIRP

GSM850-Ant:0 TX Channel	Burst Average Power (dBm)			ERP(W)		
	128	189	251	L	M	H
Frequency (MHz)	824.2	836.4	848.8			
GSM 1 Tx slot	32.61	32.65	32.57	0.3516	0.3548	0.3483
GPRS 1 Tx slot	32.56	32.64	32.51	0.3475	0.3540	0.3436
GPRS 2 Tx slots	29.18	29.66	29.49	0.1596	0.1782	0.1714
GPRS 3 Tx slots	28.00	28.36	28.15	0.1216	0.1321	0.1259
GPRS 4 Tx slots	25.99	26.02	25.97	0.0766	0.0771	0.0762
EDGE 1 Tx slot	25.36	25.72	25.42	0.0662	0.0719	0.0671
EDGE 2 Tx slots	23.76	23.87	23.72	0.0458	0.0470	0.0454
EDGE 3 Tx slots	22.54	22.77	22.54	0.0346	0.0365	0.0346
EDGE 4 Tx slots	20.46	20.65	20.48	0.0214	0.0224	0.0215

GSM1900- Ant:1 TX Channel	Burst Average Power (dBm)			EIRP(W)		
	512	661	810	L	M	H
Frequency (MHz)	1850.2	1880	1909.8			
GSM 1 Tx slot	29.32	29.53	29.41	0.7482	0.7852	0.7638
GPRS 1 Tx slot	29.21	29.45	29.33	0.7295	0.7709	0.7499
GPRS 2 Tx slots	25.68	25.96	25.82	0.3236	0.3451	0.3342
GPRS 3 Tx slots	24.10	24.35	24.11	0.2249	0.2382	0.2254
GPRS 4 Tx slots	21.67	21.91	21.77	0.1285	0.1358	0.1315
EDGE 1 Tx slot	23.65	23.96	23.83	0.2028	0.2178	0.2113
EDGE 2 Tx slots	22.03	22.27	22.06	0.1396	0.1476	0.1406
EDGE 3 Tx slots	20.76	21.06	20.92	0.1042	0.1117	0.1081
EDGE 4 Tx slots	18.46	18.79	18.56	0.0614	0.0662	0.0628



Band		WCDMA II-Ant:1			EIRP(W)		
TX Channel		9262	9400	9538			
Rx Channel		9662	9800	9938			
Frequency (MHz)		1852.4	1880	1907.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	20.09	20.28	20.15	0.0893	0.0933	0.0906
3GPP Rel 99	RMC 12.2Kbps	20.14	20.33	20.23	0.0904	0.0944	0.0923
3GPP Rel 6	HSDPA Subtest-1	19.96	20.12	19.86	0.0867	0.0899	0.0847
3GPP Rel 6	HSDPA Subtest-2	19.90	20.20	19.95	0.0855	0.0916	0.0865
3GPP Rel 6	HSDPA Subtest-3	19.51	19.56	19.45	0.0782	0.0791	0.0771
3GPP Rel 6	HSDPA Subtest-4	19.54	19.53	19.54	0.0787	0.0785	0.0787
3GPP Rel 8	DC-HSDPA Subtest-1	19.79	20.17	19.99	0.0834	0.0910	0.0873
3GPP Rel 8	DC-HSDPA Subtest-2	19.99	20.20	20.02	0.0873	0.0916	0.0879
3GPP Rel 8	DC-HSDPA Subtest-3	19.37	19.35	19.26	0.0757	0.0753	0.0738
3GPP Rel 8	DC-HSDPA Subtest-4	19.42	19.34	19.39	0.0766	0.0752	0.0760
3GPP Rel 6	HSUPA Subtest-1	19.96	20.07	20.03	0.0867	0.0889	0.0881
3GPP Rel 6	HSUPA Subtest-2	17.99	17.97	17.94	0.0551	0.0548	0.0545
3GPP Rel 6	HSUPA Subtest-3	18.91	18.93	18.94	0.0681	0.0684	0.0685
3GPP Rel 6	HSUPA Subtest-4	17.94	17.96	17.97	0.0545	0.0547	0.0548
3GPP Rel 6	HSUPA Subtest-5	19.86	20.15	20.04	0.0847	0.0906	0.0883

Band		WCDMA IV-Ant:1			EIRP(W)		
TX Channel		1312	1413	1513			
Rx Channel		1537	1638	1738			
Frequency (MHz)		1712.4	1732.6	1752.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	20.56	20.85	20.75	0.0733	0.0783	0.0766
3GPP Rel 99	RMC 12.2Kbps	20.74	20.99	20.84	0.0764	0.0809	0.0782
3GPP Rel 6	HSDPA Subtest-1	20.65	20.87	20.75	0.0748	0.0787	0.0766
3GPP Rel 6	HSDPA Subtest-2	20.61	20.74	20.74	0.0741	0.0764	0.0764
3GPP Rel 6	HSDPA Subtest-3	20.45	20.60	20.40	0.0714	0.0740	0.0706
3GPP Rel 6	HSDPA Subtest-4	20.26	20.44	20.54	0.0684	0.0713	0.0729
3GPP Rel 8	DC-HSDPA Subtest-1	20.62	20.70	20.69	0.0743	0.0757	0.0755
3GPP Rel 8	DC-HSDPA Subtest-2	20.49	20.74	20.56	0.0721	0.0764	0.0733
3GPP Rel 8	DC-HSDPA Subtest-3	20.29	20.50	20.46	0.0689	0.0723	0.0716
3GPP Rel 8	DC-HSDPA Subtest-4	20.39	20.35	20.37	0.0705	0.0698	0.0701
3GPP Rel 6	HSUPA Subtest-1	20.71	20.79	20.83	0.0759	0.0773	0.0780
3GPP Rel 6	HSUPA Subtest-2	19.49	19.74	19.48	0.0573	0.0607	0.0571
3GPP Rel 6	HSUPA Subtest-3	20.39	20.60	20.50	0.0705	0.0740	0.0723
3GPP Rel 6	HSUPA Subtest-4	19.40	19.58	19.64	0.0561	0.0585	0.0593
3GPP Rel 6	HSUPA Subtest-5	20.41	20.45	20.43	0.0708	0.0714	0.0711



Band		WCDMA V-Ant:0			ERP(W)		
TX Channel		4132	4182	4233			
Rx Channel		4357	4407	4458			
Frequency (MHz)		826.4	836.4	846.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	23.88	24.13	23.96	0.0471	0.0499	0.0480
3GPP Rel 99	RMC 12.2Kbps	23.92	24.22	24.05	0.0475	0.0509	0.0490
3GPP Rel 6	HSDPA Subtest-1	22.90	23.27	23.15	0.0376	0.0409	0.0398
3GPP Rel 6	HSDPA Subtest-2	22.92	23.11	23.19	0.0378	0.0394	0.0402
3GPP Rel 6	HSDPA Subtest-3	22.34	22.73	22.51	0.0330	0.0361	0.0344
3GPP Rel 6	HSDPA Subtest-4	22.42	22.71	22.62	0.0337	0.0360	0.0352
3GPP Rel 8	DC-HSDPA Subtest-1	22.90	23.16	23.08	0.0376	0.0399	0.0392
3GPP Rel 8	DC-HSDPA Subtest-2	22.81	23.07	23.01	0.0368	0.0391	0.0385
3GPP Rel 8	DC-HSDPA Subtest-3	22.34	22.61	22.62	0.0330	0.0352	0.0352
3GPP Rel 8	DC-HSDPA Subtest-4	22.30	22.59	22.46	0.0327	0.0350	0.0340
3GPP Rel 6	HSUPA Subtest-1	22.84	23.11	23.00	0.0371	0.0394	0.0385
3GPP Rel 6	HSUPA Subtest-2	21.01	21.22	20.95	0.0243	0.0255	0.0240
3GPP Rel 6	HSUPA Subtest-3	21.92	22.17	22.01	0.0300	0.0318	0.0306
3GPP Rel 6	HSUPA Subtest-4	20.73	21.08	21.08	0.0228	0.0247	0.0247
3GPP Rel 6	HSUPA Subtest-5	22.89	23.23	23.12	0.0375	0.0406	0.0395



A1. GSM

Peak-to-Average Ratio


Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.17	3.16	PASS
Middle CH	0.12	3.33	
Highest CH	0.20	3.25	

Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.17	3.39	PASS
Middle CH	0.17	3.62	
Highest CH	0.17	3.45	



GSM850 (GSM)


Lowest Channel

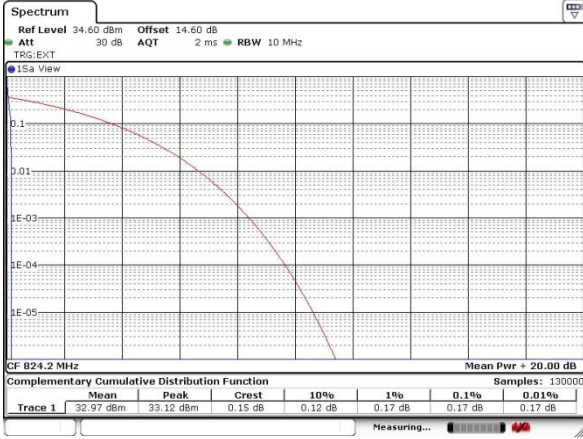

Date: 8 SEP 2022 03:52:07


GSM850 (EDGE class 8)

Lowest Channel

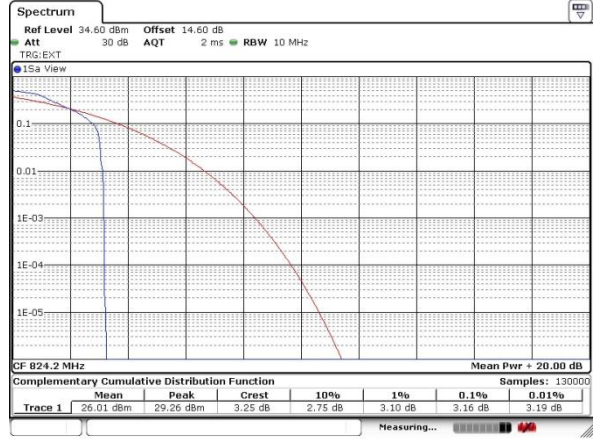


Date: 8 SEP 2022 05:07:21

Middle Channel

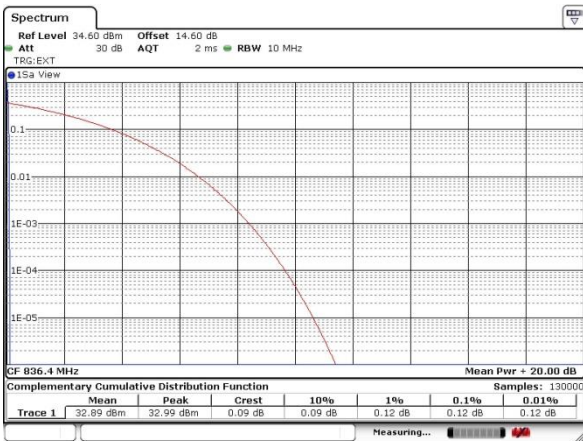


Date: 8 SEP 2022 03:52:21

Middle Channel

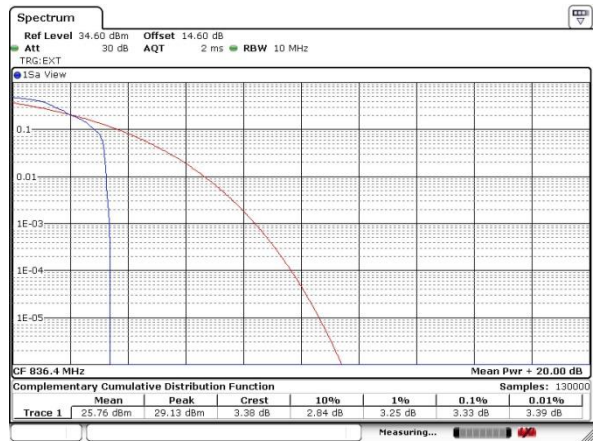


Date: 8 SEP 2022 05:07:31

Highest Channel

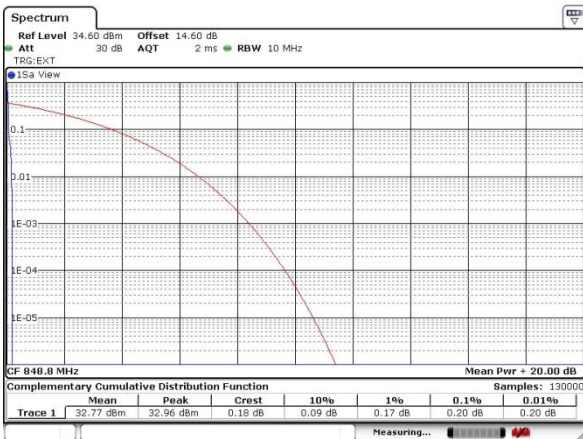

Date: 8 SEP 2022 03:52:37

Highest Channel

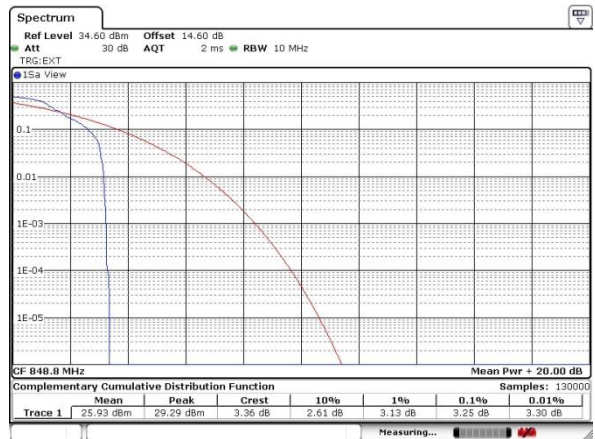


Date: 8 SEP 2022 05:07:40



GSM1900 (GSM)


Lowest Channel

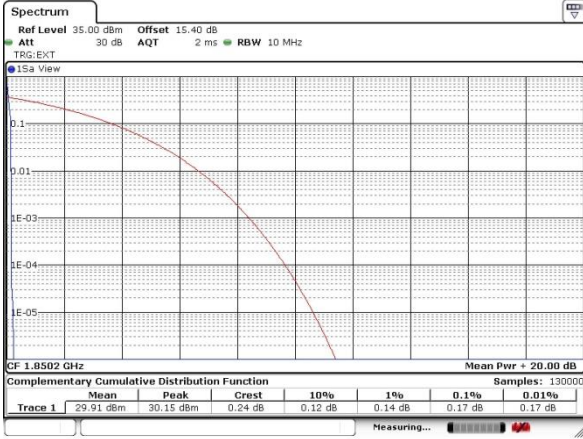

Date: 8 SEP 2022 04:14:01


GSM1900 (EDGE class 8)

Lowest Channel

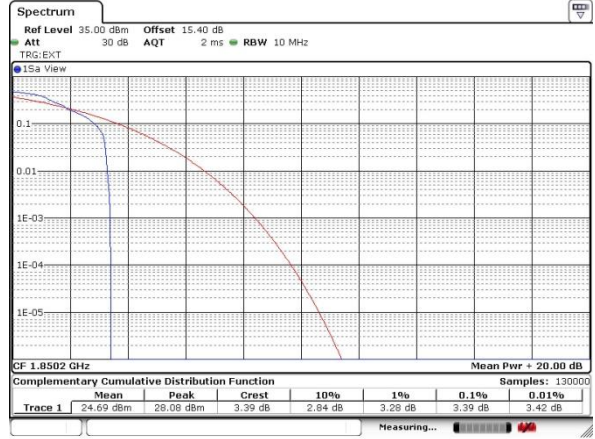


Date: 8 SEP 2022 04:32:17

Middle Channel

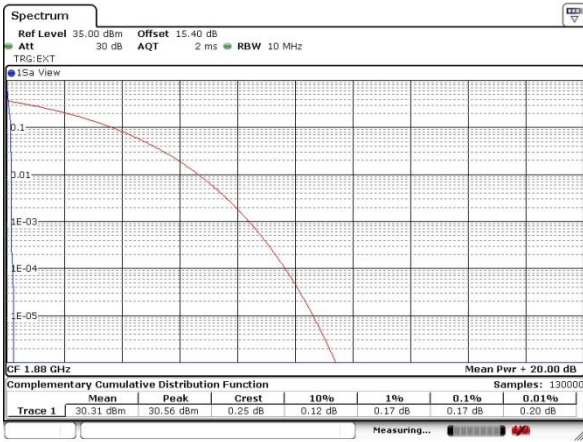


Date: 8 SEP 2022 04:14:16

Middle Channel

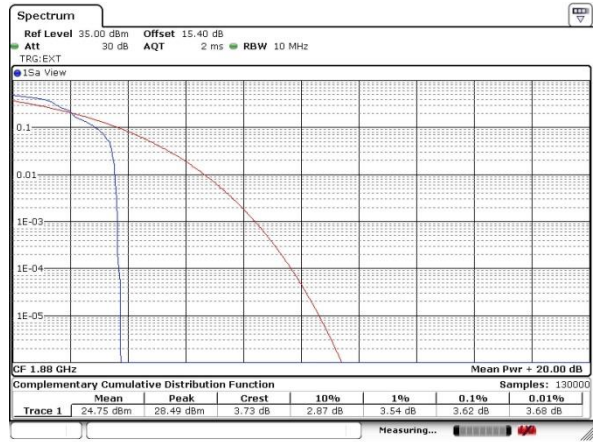


Date: 8 SEP 2022 04:32:33

Highest Channel

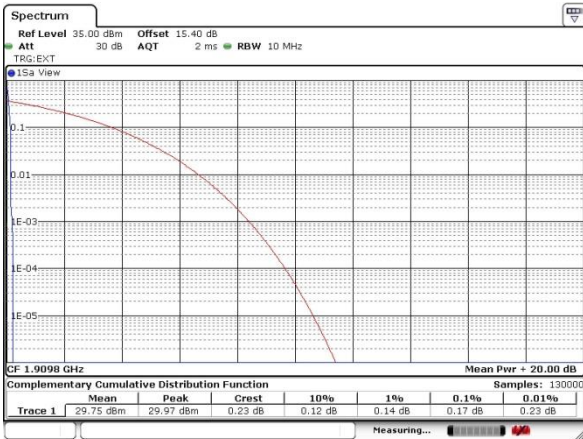

Date: 8 SEP 2022 04:14:37

Highest Channel

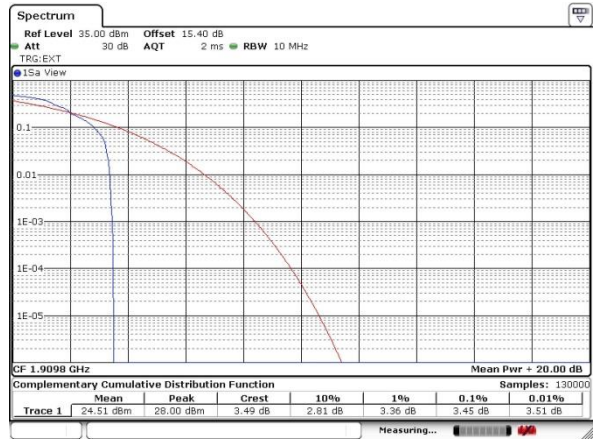

Date: 8 SEP 2022 04:32:45



26dB Bandwidth


Mode	GSM850(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.312	0.311
Middle CH	0.313	0.314
Highest CH	0.313	0.311

Mode	GSM1900(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.312	0.314
Middle CH	0.312	0.313
Highest CH	0.314	0.311



GSM850 (GSM)


Lowest Channel

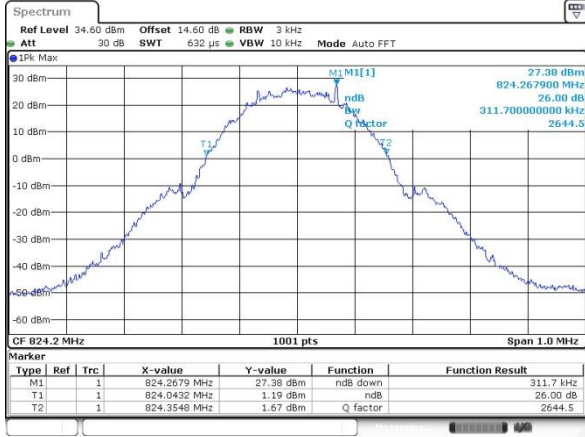

Date: 8 SEP.2022 03:30:00


GSM850 (EDGE class 8)

Lowest Channel

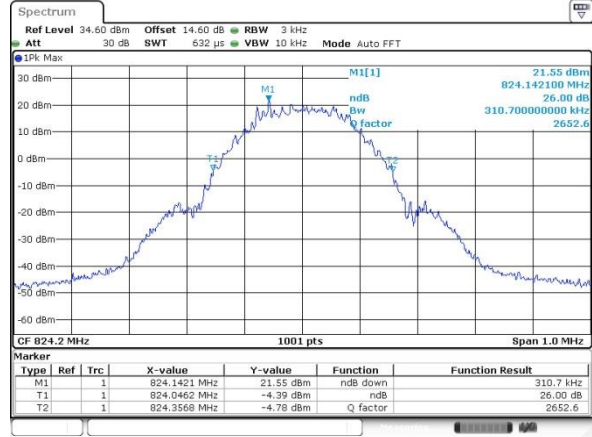


Date: 8 SEP.2022 04:35:54

Middle Channel

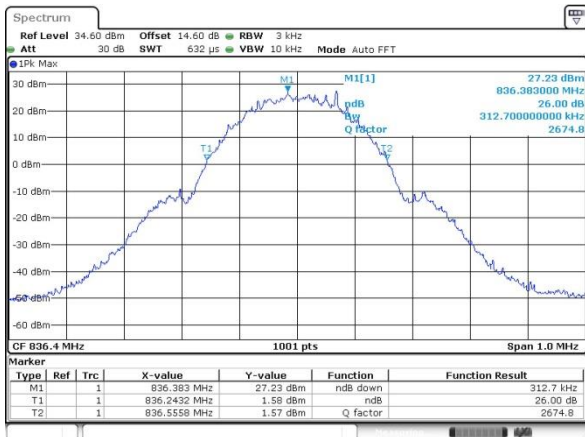


Date: 8 SEP.2022 03:30:27

Middle Channel

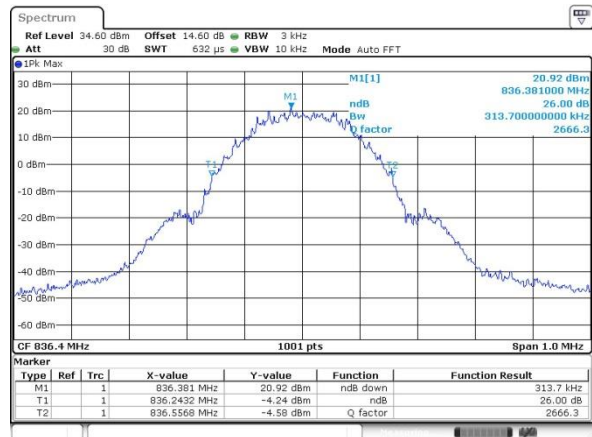


Date: 8 SEP.2022 04:36:18

Highest Channel

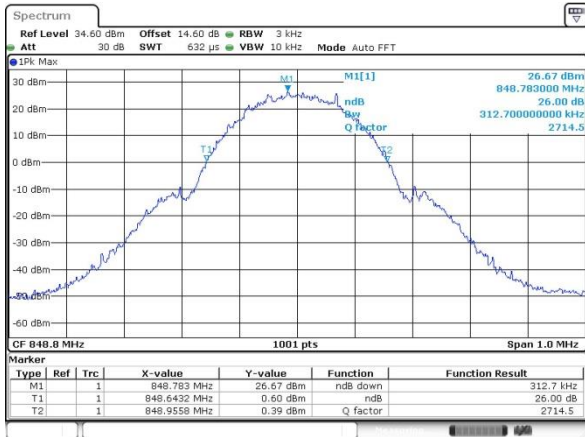

Date: 8 SEP.2022 03:31:06

Highest Channel

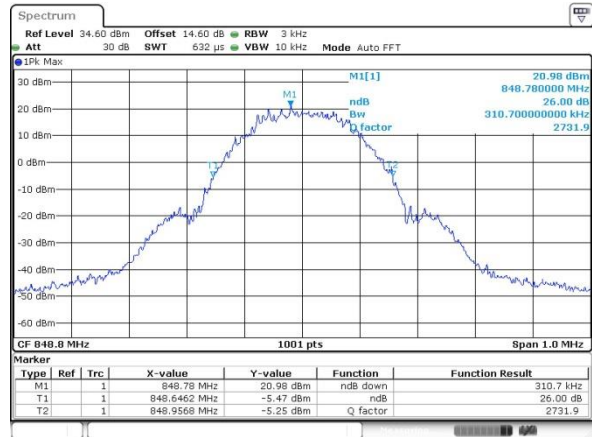

Date: 8 SEP.2022 04:36:41



GSM1900 (GSM)


Lowest Channel



Date: 8 SEP.2022 03:55:34


GSM1900 (EDGE class 8)

Lowest Channel

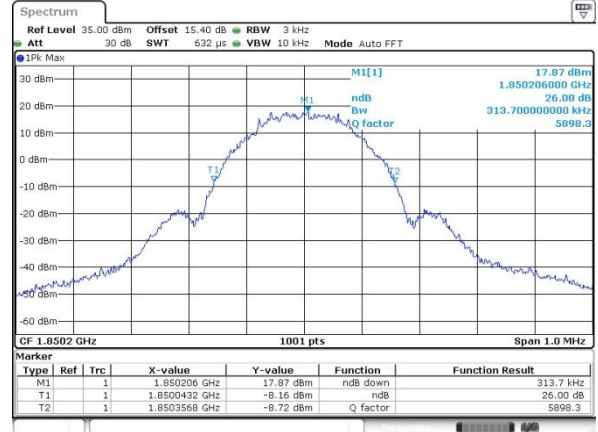


Date: 8 SEP.2022 04:18:22

Middle Channel

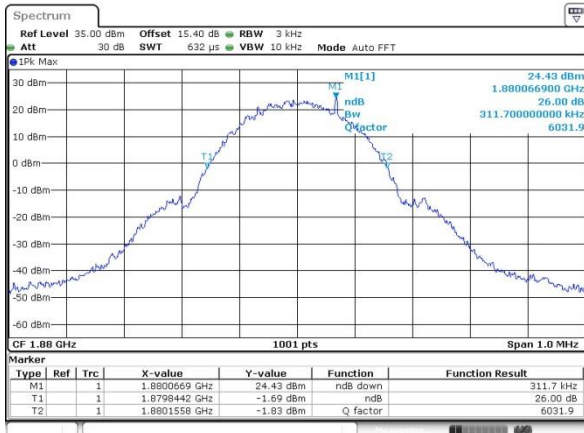


Date: 8 SEP.2022 03:55:58

Middle Channel

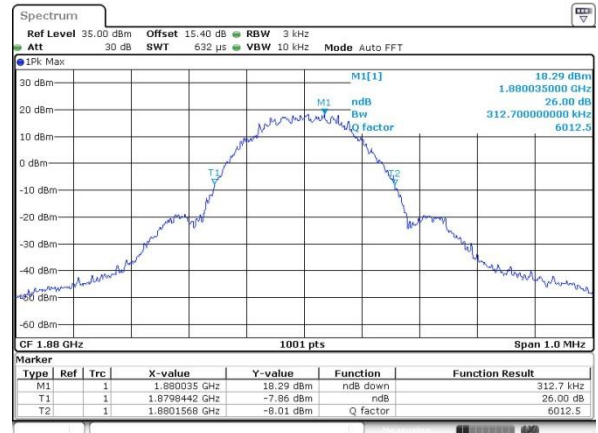


Date: 8 SEP.2022 04:18:47

Highest Channel

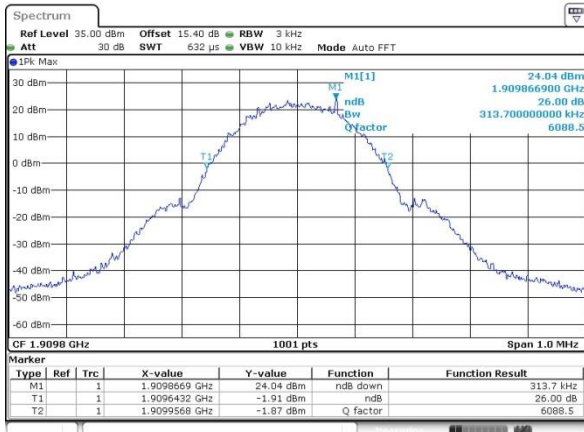

Date: 8 SEP.2022 03:56:21

Highest Channel

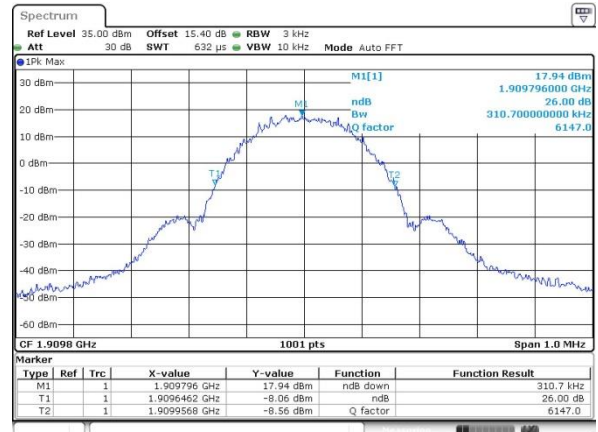

Date: 8 SEP.2022 04:19:36



Occupied Bandwidth


Mode	GSM850(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.242	0.241
Middle CH	0.241	0.237
Highest CH	0.242	0.239

Mode	GSM1900(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.244	0.240
Middle CH	0.242	0.238
Highest CH	0.242	0.244



GSM850 (GSM)

Lowest Channel

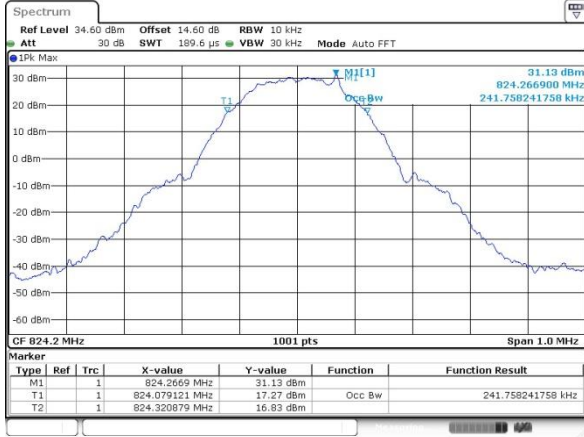

Date: 8 SEP.2022 03:34:55


GSM850 (EDGE class 8)

Lowest Channel




Date: 8 SEP.2022 04:38:20

Middle Channel

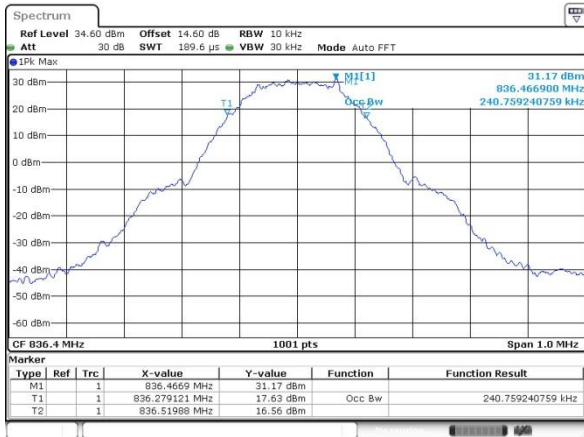


Date: 8 SEP.2022 03:35:17

Middle Channel

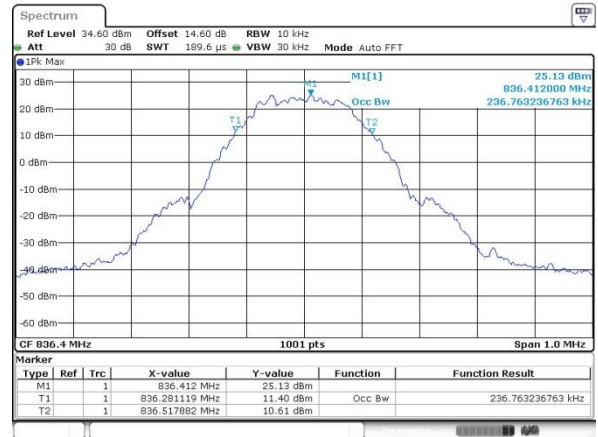

Date: 8 SEP.2022 04:38:43

Highest Channel

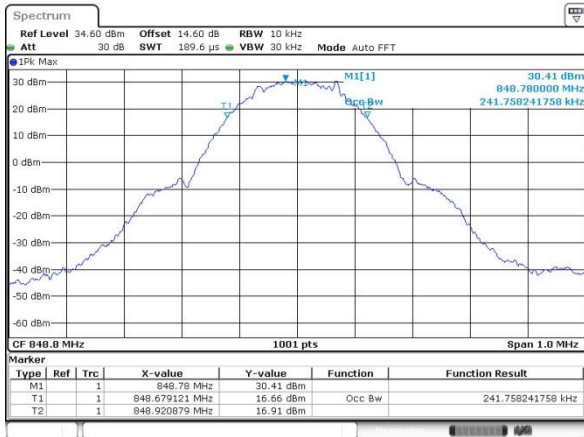

Date: 8 SEP.2022 03:35:40

Highest Channel



Date: 8 SEP.2022 04:38:05



GSM1900 (GSM)

Lowest Channel



Date: 8 SEP. 2022 04:05:54

GSM1900 (EDGE class 8)

Lowest Channel




Date: 8 SEP. 2022 04:23:21

Middle Channel




Date: 8 SEP. 2022 04:06:23

Middle Channel

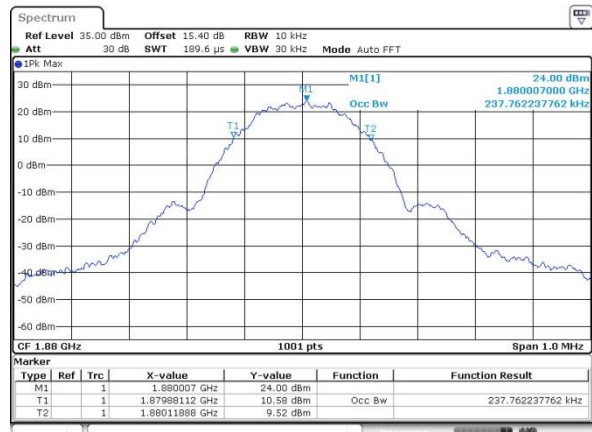


Date: 8 SEP. 2022 04:23:43

Highest Channel

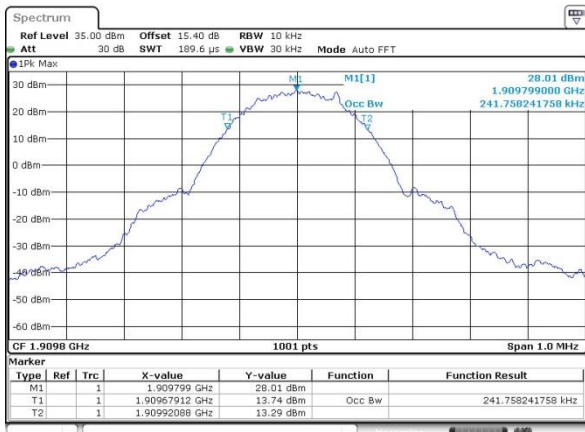

Date: 8 SEP. 2022 04:06:46

Highest Channel

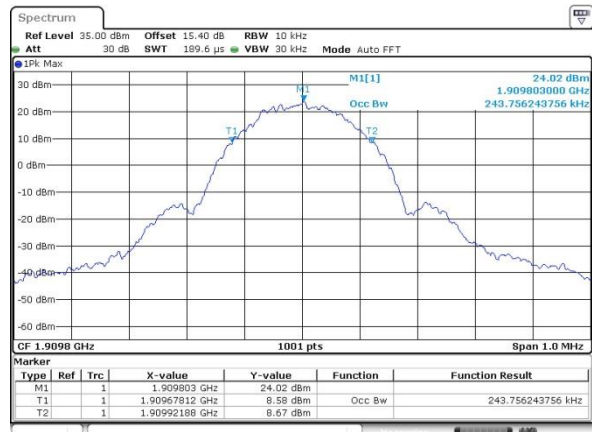


Date: 8 SEP. 2022 04:24:04



Conducted Band Edge


GSM850 (GSM)

Lowest Band Edge

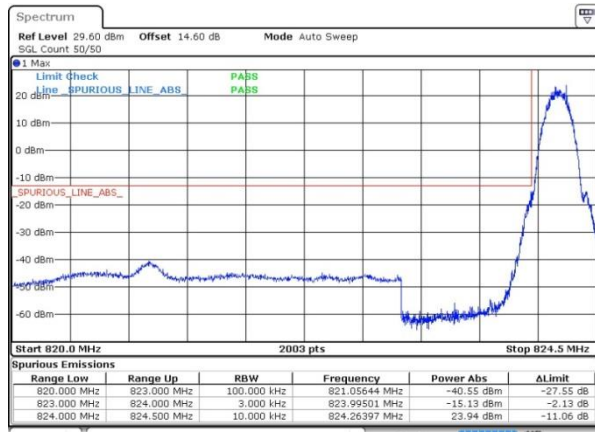

Date: 8 SEP. 2022 03:37:51


Highest Band Edge

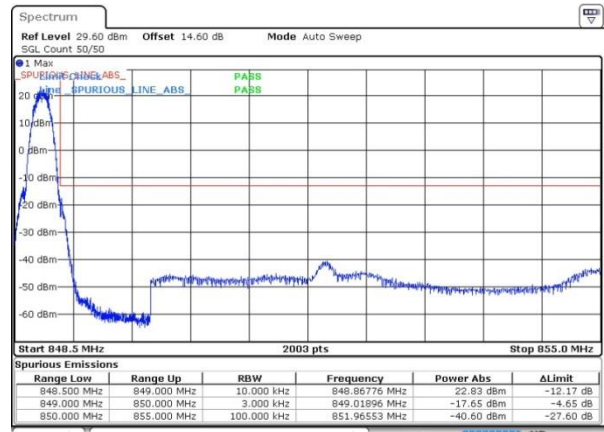

Date: 8 SEP 2022 03:39:27


GSM850 (EDGE class 8)

Lowest Band Edge

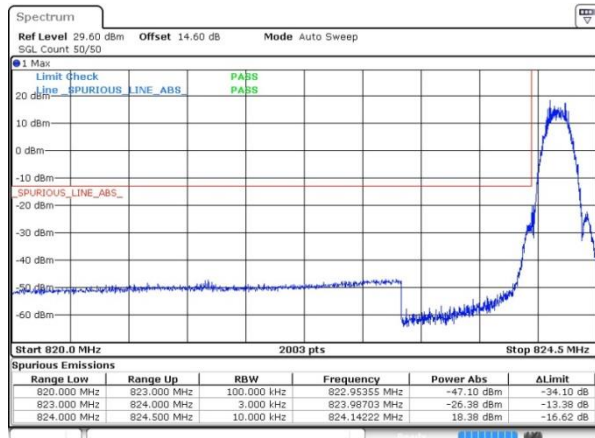

Date: 8 SEP. 2022 04:43:26

Highest Band Edge

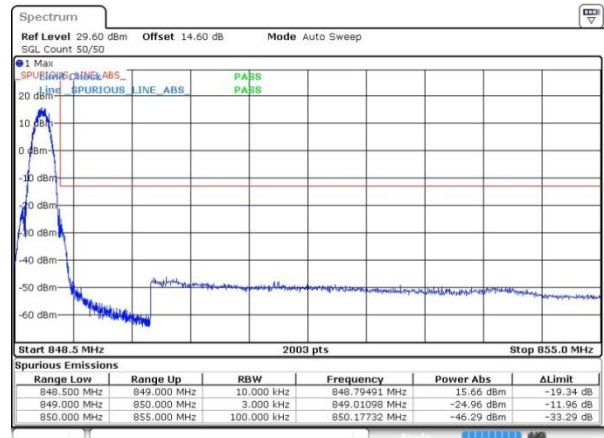


Date: 8 SEP 2022 04:45:04




GSM1900 (GSM)

Lowest Band Edge

Highest Band Edge

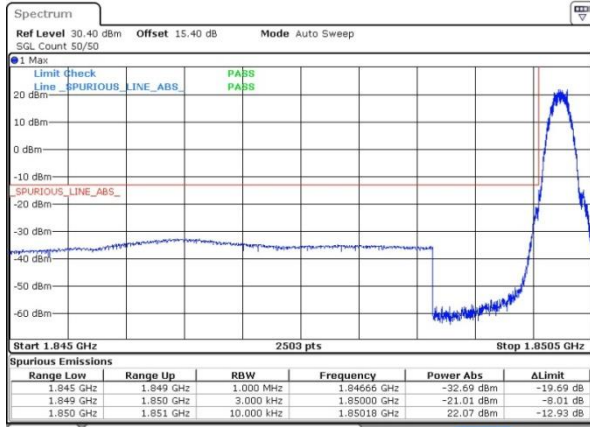

Date: 8 SEP.2022 04:08:46

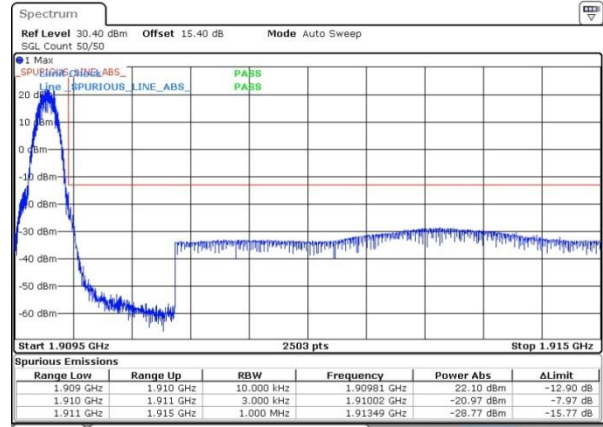


Date: 8 SEP.2022 04:10:23


GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

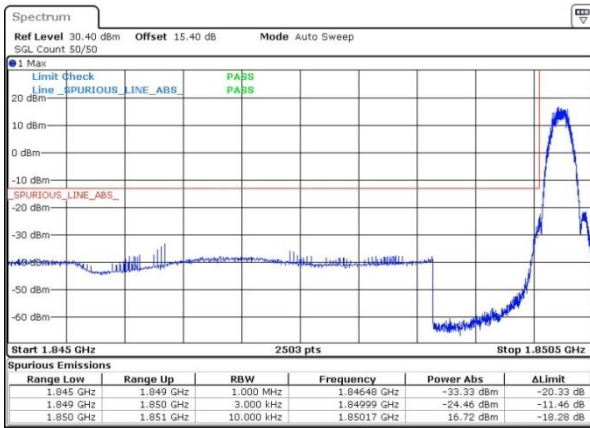

Date: 8 SEP.2022 04:26:03

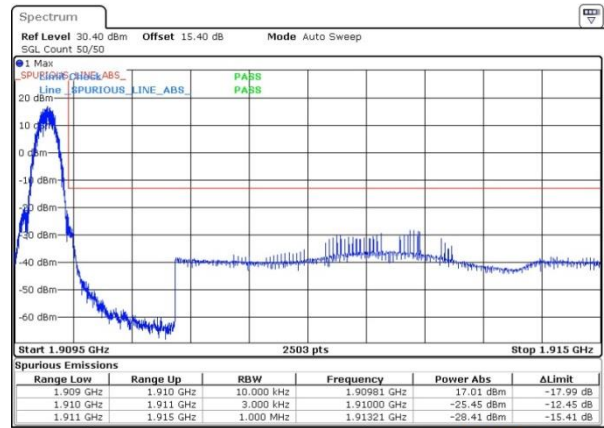


Date: 8 SEP.2022 04:27:39



Conducted Spurious Emission

GSM850 (GSM)

Lowest Channel

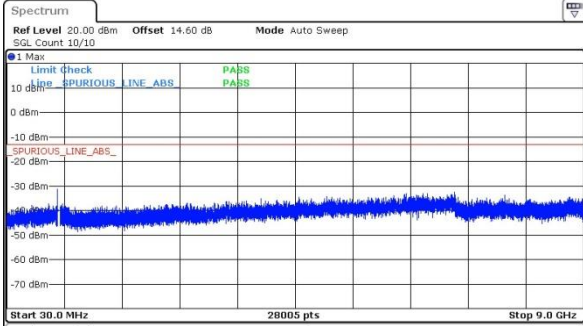


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	820.000 MHz	1.000 MHz	817.82859 MHz	-31.47 dBm	-18.47 dB
855.000 MHz	1.000 GHz	1.000 MHz	887.86232 MHz	-37.41 dBm	-24.41 dB
1.000 GHz	3.000 GHz	1.000 MHz	2.83615 GHz	-37.12 dBm	-24.12 dB
3.000 GHz	7.000 GHz	1.000 MHz	6.98675 GHz	-32.42 dBm	-19.42 dB
7.000 GHz	9.000 GHz	1.000 MHz	7.77178 GHz	-33.61 dBm	-20.61 dB

Date: 8 SEP 2022 03:40:05

GSM850 (EDGE class 8)


Lowest Channel

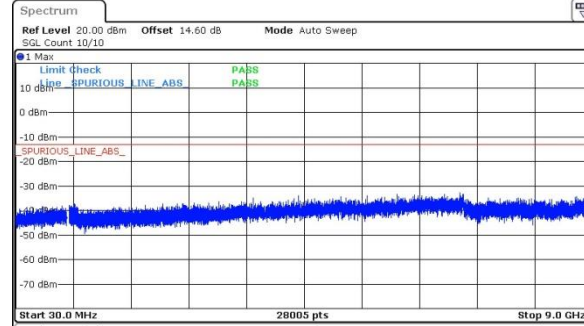

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	820.000 MHz	1.000 MHz	744.79010 MHz	-38.16 dBm	-25.16 dB
855.000 MHz	1.000 GHz	1.000 MHz	942.64493 MHz	-37.42 dBm	-24.42 dB
1.000 GHz	3.000 GHz	1.000 MHz	2.80515 GHz	-37.12 dBm	-24.12 dB
3.000 GHz	7.000 GHz	1.000 MHz	6.93676 GHz	-32.91 dBm	-19.91 dB
7.000 GHz	9.000 GHz	1.000 MHz	8.74666 GHz	-34.23 dBm	-21.23 dB

Date: 8 SEP 2022 05:05:55


Middle Channel

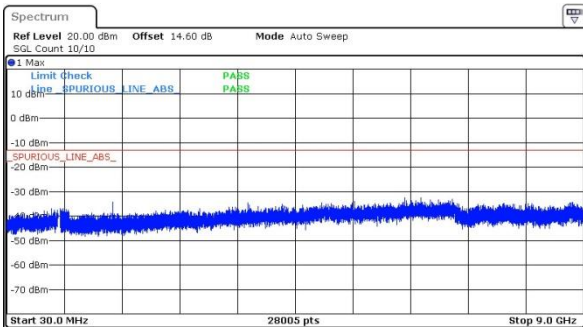

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	820.000 MHz	1.000 MHz	721.10195 MHz	-36.99 dBm	-23.99 dB
855.000 MHz	1.000 GHz	1.000 MHz	856.48551 MHz	-37.03 dBm	-24.03 dB
1.000 GHz	3.000 GHz	1.000 MHz	1.67329 GHz	-34.42 dBm	-21.42 dB
3.000 GHz	7.000 GHz	1.000 MHz	6.46382 GHz	-32.51 dBm	-19.51 dB
7.000 GHz	9.000 GHz	1.000 MHz	8.92565 GHz	-34.44 dBm	-21.44 dB

Date: 8 SEP 2022 03:40:31


Middle Channel

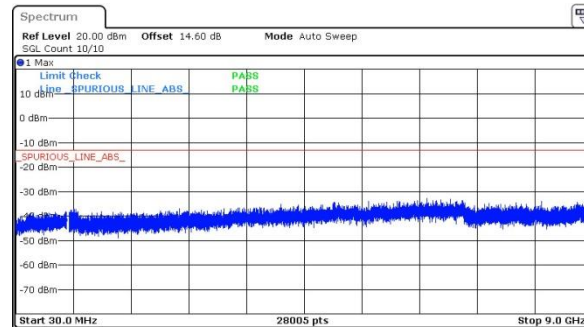

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	820.000 MHz	1.000 MHz	836.77411 MHz	-38.28 dBm	-25.28 dB
855.000 MHz	1.000 GHz	1.000 MHz	941.05072 MHz	-37.28 dBm	-24.28 dB
1.000 GHz	3.000 GHz	1.000 MHz	2.57593 GHz	-37.07 dBm	-24.07 dB
3.000 GHz	7.000 GHz	1.000 MHz	6.42330 GHz	-32.85 dBm	-19.85 dB
7.000 GHz	9.000 GHz	1.000 MHz	8.20497 GHz	-33.99 dBm	-20.99 dB

Date: 8 SEP 2022 05:06:16


Highest Channel

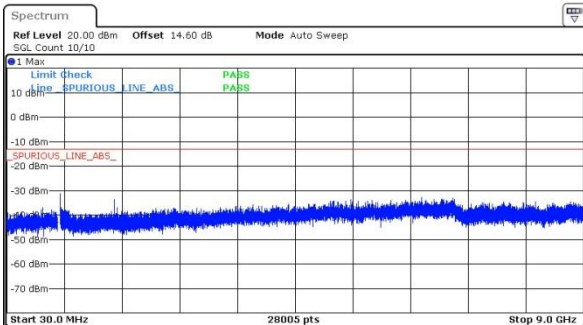

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	820.000 MHz	1.000 MHz	584.50025 MHz	-37.15 dBm	-24.15 dB
855.000 MHz	1.000 GHz	1.000 MHz	855.32609 MHz	-31.39 dBm	-18.39 dB
1.000 GHz	3.000 GHz	1.000 MHz	1.69779 GHz	-33.68 dBm	-20.68 dB
3.000 GHz	7.000 GHz	1.000 MHz	6.47682 GHz	-32.79 dBm	-19.79 dB
7.000 GHz	9.000 GHz	1.000 MHz	7.75078 GHz	-34.58 dBm	-21.58 dB

Date: 8 SEP 2022 03:51:32

Highest Channel

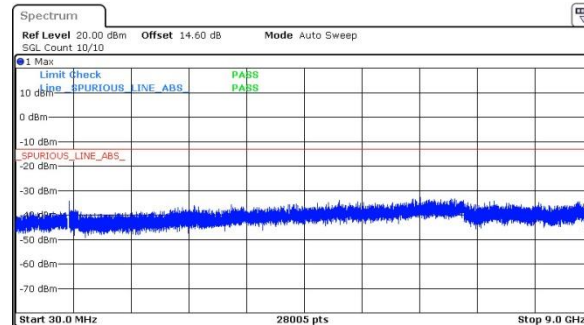


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	820.000 MHz	1.000 MHz	723.86557 MHz	-38.81 dBm	-25.81 dB
855.000 MHz	1.000 GHz	1.000 MHz	858.80435 MHz	-34.18 dBm	-21.18 dB
1.000 GHz	3.000 GHz	1.000 MHz	2.79965 GHz	-36.21 dBm	-23.21 dB
3.000 GHz	7.000 GHz	1.000 MHz	6.31984 GHz	-32.70 dBm	-19.70 dB
7.000 GHz	9.000 GHz	1.000 MHz	7.46182 GHz	-34.19 dBm	-21.19 dB

Date: 8 SEP 2022 05:06:59



GSM1900 (GSM)


Lowest Channel

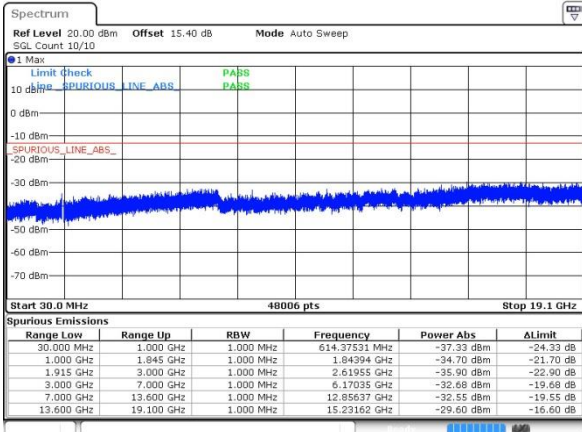

Date: 8 SEP.2022 04:10:55


GSM1900 (EDGE class 8)

Lowest Channel

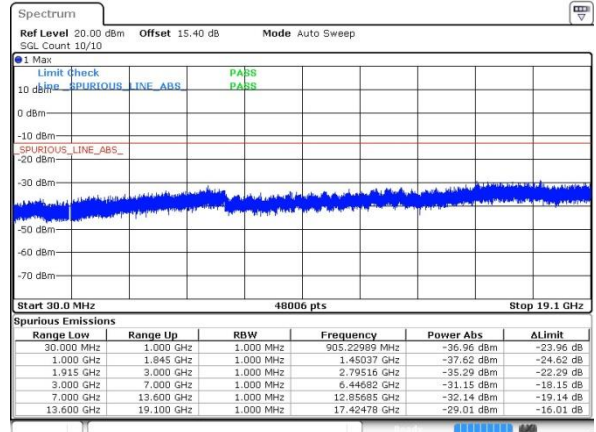


Date: 8 SEP.2022 04:28:25

Middle Channel

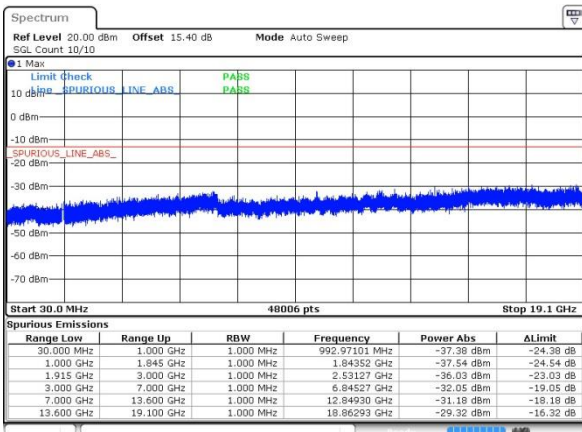


Date: 8 SEP.2022 04:11:16

Middle Channel

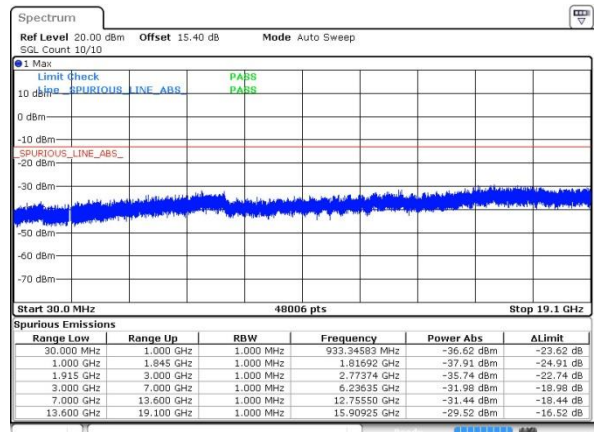


Date: 8 SEP.2022 04:28:45

Highest Channel

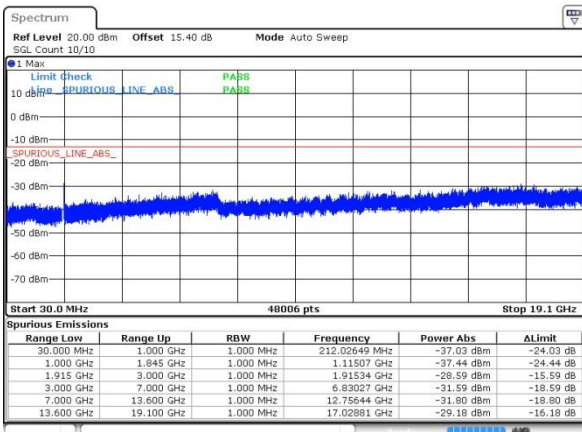

Date: 8 SEP.2022 04:12:43

Highest Channel

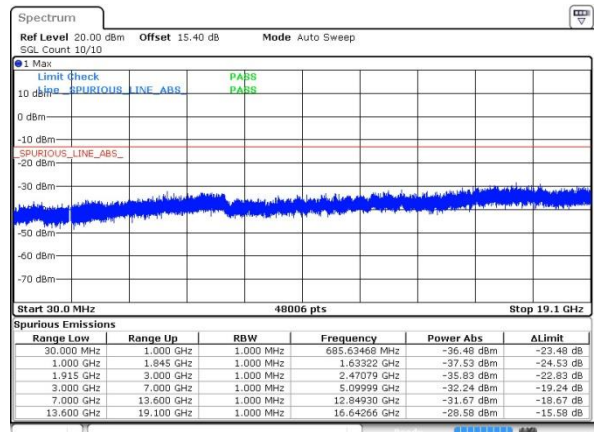

Date: 8 SEP.2022 04:31:51



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit
				2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0042	0.0038	PASS
40	Normal Voltage	0.0017	0.0027	
30	Normal Voltage	0.0009	0.0012	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0013	0.0019	
0	Normal Voltage	0.0022	0.0026	
-10	Normal Voltage	0.0019	0.0027	
-20	Normal Voltage	0.0028	0.0034	
-30	Normal Voltage	0.0034	0.0028	
20	Maximum Voltage	0.0015	0.0016	
20	Normal Voltage	0.0019	0.0009	
20	Battery End Point	0.0028	0.0018	



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0032	0.0034	PASS
40	Normal Voltage	0.0028	0.0027	
30	Normal Voltage	0.0019	0.0016	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0014	0.0019	
0	Normal Voltage	0.0017	0.0022	
-10	Normal Voltage	0.0028	0.0026	
-20	Normal Voltage	0.0031	0.0032	
-30	Normal Voltage	0.0033	0.0028	
20	Maximum Voltage	0.0027	0.0018	
20	Normal Voltage	0.0014	0.0009	
20	Battery End Point	0.0019	0.0021	

Note:


1. Normal Voltage = 3.89V ; Battery End Point (BEP) =3.4V. ; Maximum Voltage =4.48V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.




A2. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.72	2.87	2.81	PASS
Middle CH	3.01	2.81	2.72	
Highest CH	2.81	2.81	2.81	

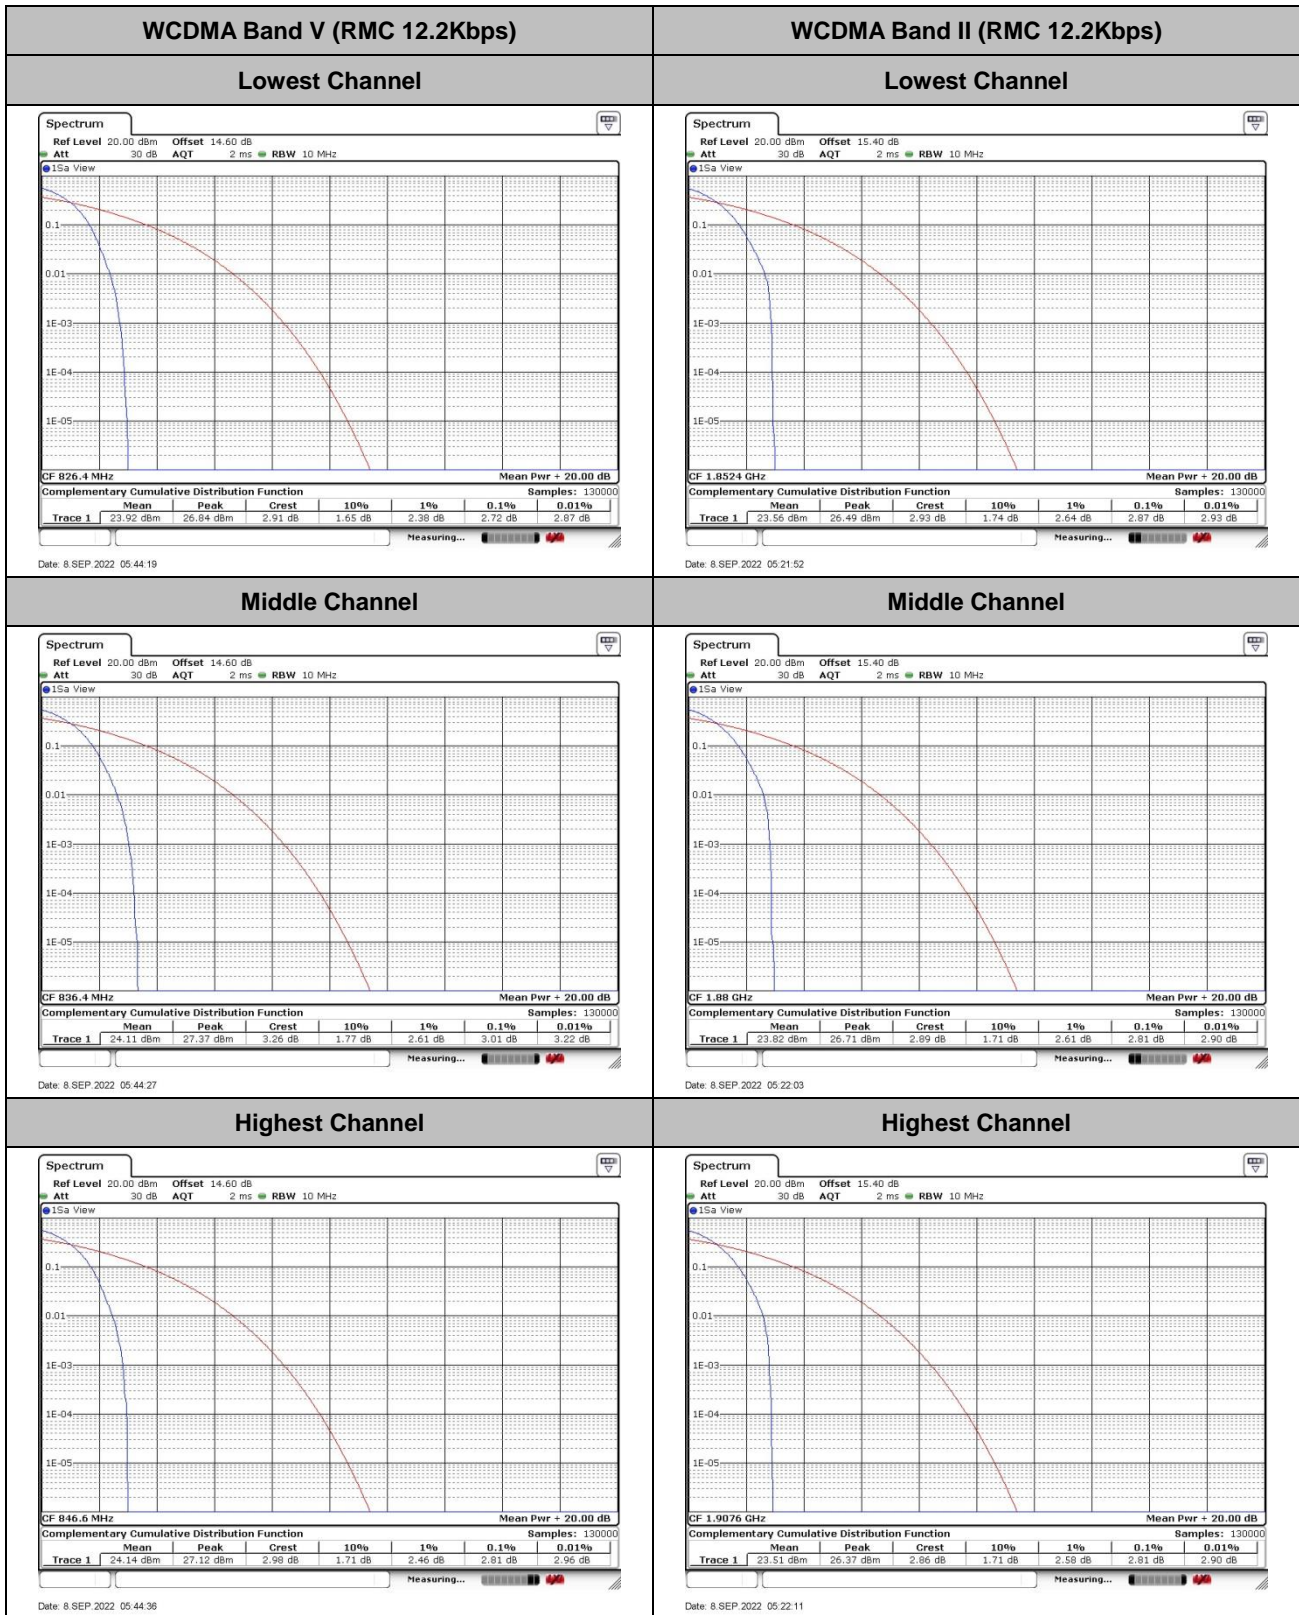

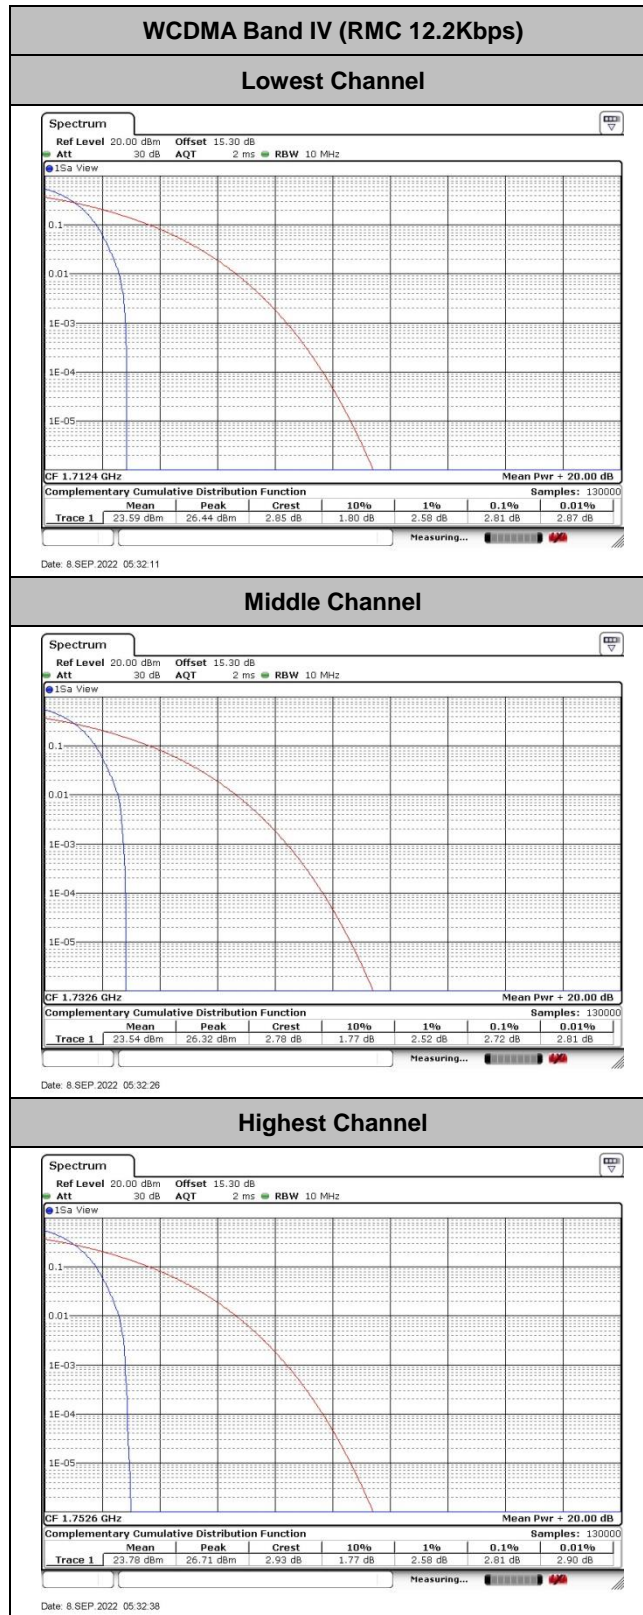



26dB Bandwidth

Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)	WCDMA Band IV(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.725	4.725	4.725
Middle CH	4.715	4.725	4.735
Highest CH	4.735	4.725	4.725