



# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2323-2,XT2323-5,XT2323-6  
FCC ID : IHDT56AL9  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Apr. 27, 2023 ~ May 23, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 8

    1.6. Specification of Accessory ..... 8

    1.7. Test Location ..... 8

    1.8. Test Software ..... 9

    1.9. Applicable Standards ..... 9

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 13

    2.4. EUT Operation Test Setup ..... 14

**3. TEST RESULT ..... 15**

    3.1. Test of AC Conducted Emission Measurement ..... 15

    3.2. Test of Radiated Emission Measurement ..... 19

**4. LIST OF MEASURING EQUIPMENT ..... 24**

**5. MEASUREMENT UNCERTAINTY ..... 25**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC340401-01	Rev. 01	Initial issue of report	Jun. 05, 2023



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.74 dB at 1.602 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 11.42 dB at 70.74 MHz

**Conformity Assessment Condition:**

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1. General Description

## 1.1. Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2. Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2323-2,XT2323-5,XT2323-6
FCC ID	IHDT56AL9
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE GNSS/NFC/WPT
IMEI Code	Conduction Radiation 351606570016138/351606570016146
HW Version	DVT2
SW Version	T2TV33.23
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The three models XT2323-2,XT2323-5,XT2323-6 are only for market differentiation, all the others are the same
3. The device support single SIM + eSIM.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 14 : 788 MHz ~ 798 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 25 : 1850 MHz ~ 1915 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 30 : 2305 MHz ~ 2315 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz; 5G NR n78 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz; 802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz 802.11a/ax: 5925 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
<b>Rx Frequency</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz



	<p>LTE Band 5 : 869 MHz ~ 894 MHz          LTE Band 7 : 2620 MHz ~ 2690 MHz          LTE Band 12 : 729 MHz ~ 746 MHz          LTE Band 13 : 746 MHz ~ 756 MHz          LTE Band 14 : 758 MHz ~ 768 MHz          LTE Band 17 : 734 MHz ~ 746 MHz          LTE Band 25 : 1930 MHz ~ 1995 MHz          LTE Band 26 : 859 MHz ~ 894 MHz          LTE Band 29 : 717 MHz ~ 728 MHz          LTE Band 30 : 2350 MHz ~ 2360 MHz          LTE Band 38: 2570 MHz ~ 2620 MHz          LTE Band 41 : 2496 MHz ~ 2690 MHz          LTE Band 48 : 3550 MHz ~ 3700 MHz          LTE Band 66 : 2110 MHz~ 2200 MHz          LTE Band 71 : 617 MHz ~ 652 MHz          5G NR n2 : 1930 MHz ~ 1990 MHz          5G NR n5 : 869 MHz ~ 894 MHz          5G NR n7 : 2620 MHz ~ 2690 MHz          5G NR n12 : 729 MHz ~ 746 MHz          5G NR n14 : 758 MHz ~ 768 MHz          5G NR n25 : 1930 MHz ~ 1995 MHz          5G NR n26 : 859 MHz ~ 894 MHz          5G NR n29 : 717 MHz ~ 728 MHz          5G NR n30 : 2350 MHz ~ 2360 MHz          5G NR n41 : 2496 MHz ~ 2690 MHz          5G NR n48 : 3550 MHz ~ 3700 MHz          5G NR n66 : 2110 MHz~ 2200 MHz          5G NR n70 : 1995 MHz ~ 2020 MHz          5G NR n71 : 617 MHz ~ 652 MHz          5G NR n77 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz;          5G NR n78 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz;          802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz          802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz;                            5250 MHz ~ 5350 MHz;                            5470 MHz ~ 5725 MHz                            5725 MHz ~ 5850 MHz          802.11a/ax: 5925 MHz ~ 7125 MHz          Bluetooth: 2400 MHz ~ 2483.5 MHz          NFC : 13.56 MHz          GNSS : 1559 MHz ~ 1610 MHz, 1164 MHz ~ 1215 MHz          WPT: 100kHz~ 148 kHz</p>
<b>Antenna Type</b>	<p>WWAN :          &lt;Ant0&gt; Monopole Antenna          &lt;Ant1/2/3&gt; IFA Antenna          Bluetooth/WLAN : IFA Antenna          GNSS: IFA Antenna          NFC: coil-loop Antenna          WPT: coil-loop Antenna</p>
<b>Type of Modulation</b>	<p>GSM/GPRS: GMSK          EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK          WCDMA : BPSK          HSPA : QPSK          HSPA+ : 16QAM(16QAM not support uplink)          DC-HSDPA : 64QAM</p>



	LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK WPT: ASK
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	Motorola(Salom)	Model Name	MC-301
Base Battery	Brand Name	Motorola (ATL)	Model Name	PM29
Flip Battery	Brand Name	Motorola (ATL)	Model Name	PV11
USB Cable 1	Brand Name	Motorola(Cabletech)	Model Name	SC18D13216
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18D13217
USB Cable 3	Brand Name	Motorola(Saibao)	Model Name	SC18D13215
USB Cable 4	Brand Name	Motorola(Saibao)	Model Name	SC18D86732

### 1.7. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH07-KS	CN1257	314309



### 1.8. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + open folding screen + USB Cable1 (Charging from Adapter1) + SIM 1
	Mode 2: WCDMA Band 5 Rx(Middle) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + open folding screen + USB Cable2 (Charging from Adapter1 ) + ESIM
	Mode 3: LTE Band 17 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + open folding screen + USB Cable3 (Charging from Adapter1 ) + SIM1
	Mode 4: n5 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + open folding screen + USB Cable1(Charging from Adapter1 ) + SIM1
	Mode 5: n12 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Battery + USB Cable 1(Data Link with Notebook) + open folding screen + EUT (eMMC) USB Data Link to PC/NB + SIM1
	Mode 6: n13 Rx(High) Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable 1(Data Link with Notebook)+ open folding screen+ PC/NB USB Data Link to EUT (eMMC)+SIM1
	Mode 7: n14 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable 2(Data Link with Notebook) + open folding screen + EUT (eMMC) USB Data Link to PC/NB + SIM1
	Mode 8: n26 Rx(Middle) Bluetooth Idle + WLAN 6E Idle + MPEG4(Run Color Bar) + Battery + USB Cable 3(Data Link with Notebook) + open folding screen + EUT (eMMC) USB Data Link to PC/NB + SIM1
	Mode 9: n71 Rx(High) Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable1 (EUT Charging from Wireless charger ) + AdapterConnect to Wireless charger + open folding screen + SIM1
	Mode 10 : n71 Rx(High) Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable(1) (EUT Charging from Wireless charger ) + AdapterConnect to Wireless charger + Closed folding screen + SIM1



Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + open folding screen + USB Cable1 (Charging from Adapter1 ) + SIM 1</p> <p>Mode 2: WCDMA Band 5 Rx(Middle) Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + open folding screen + USB Cable2 (Charging from Adapter1 ) + ESIM</p> <p>Mode 3: LTE Band 17 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + open folding screen + USB Cable3 (Charging from Adapter1 ) + SIM1</p> <p>Mode 4: n5 Rx(Low) Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Earphone + open folding screen + SIM 1</p> <p>Mode 5: n12 Rx(Middle) Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Battery + open folding screen + USB Cable 1(Data Link with Notebook) + EUT (eMMC) USB Data Link to PC/NB + SIM1</p> <p>Mode 6: n13 Rx(High) Bluetooth Idle + WLAN (5G) Idle + NFC On + Battery + open folding screen + USB Cable 1(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM1</p> <p>Mode 7: n14 Rx(Low) Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + open folding screen + USB Cable 2(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM1</p> <p>Mode 8: n26 Rx(Middle) Bluetooth Idle + WLAN 6E Idle + NFC On + Battery + open folding screen + USB Cable 3(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC) + SIM 1</p> <p>Mode 9: n71 Rx(High) Bluetooth Idle + WLAN 6E Idle + NFC On + Battery + open folding screen + USB Cable(3) (EUT Charging from Wireless charger ) + Adapter Connect to Wireless charger + SIM1</p> <p>Mode 10 : n26 Rx(Middle) Bluetooth Idle + WLAN 6E Idle + NFC On + Battery + Closed folding screen + USB Cable 3(Data Link with Notebook) + PC/NB USB Data Link to EUT (eMMC)</p>
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 9; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 8; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.</li> <li>4. Pre-scanned Low/Middle/High channel for the frequency band which fall into 30~960MHz, the worst channel was recorded in this report.</li> <li>5. USB cable 4 and USB cable 3 are the same, only the model is different, so only evaluate and test USB cable 3.</li> </ol>	

## 2.2.Connection Diagram of Test System

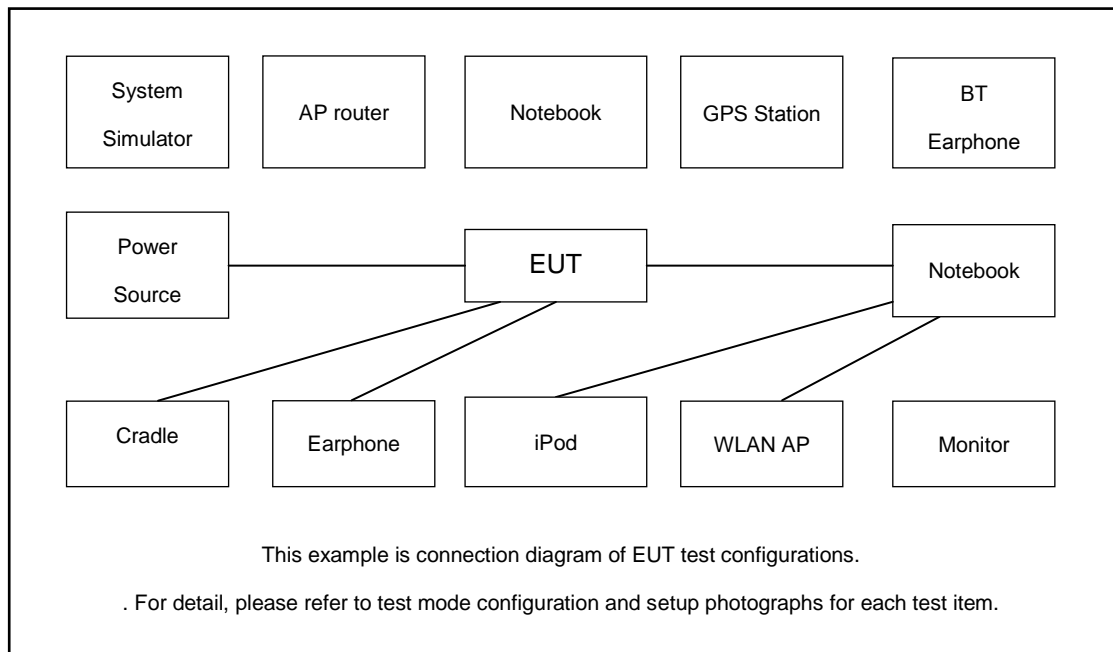

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application



### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
2.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
3.	5G NR Base Station	Anritus	MT8000A	N/A	N/A	Unshielded,1.8m
4.	VectorSignal Generator	R&S	SMBV100A	258305	N/A	N/A
5.	Notebook	Lenovo	S730-13IWL	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
6.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
9.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
10.	Bluetooth Earphone	XIAOMI	LYEJ02LM	N/A	N/A	N/A
11.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
12.	Hard DISK	WD	C6B	N/A	N/A	N/A
13.	SD Card	Kingston	8GB	N/A	N/A	N/A
14.	Wireless charger	N/A	N/A	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

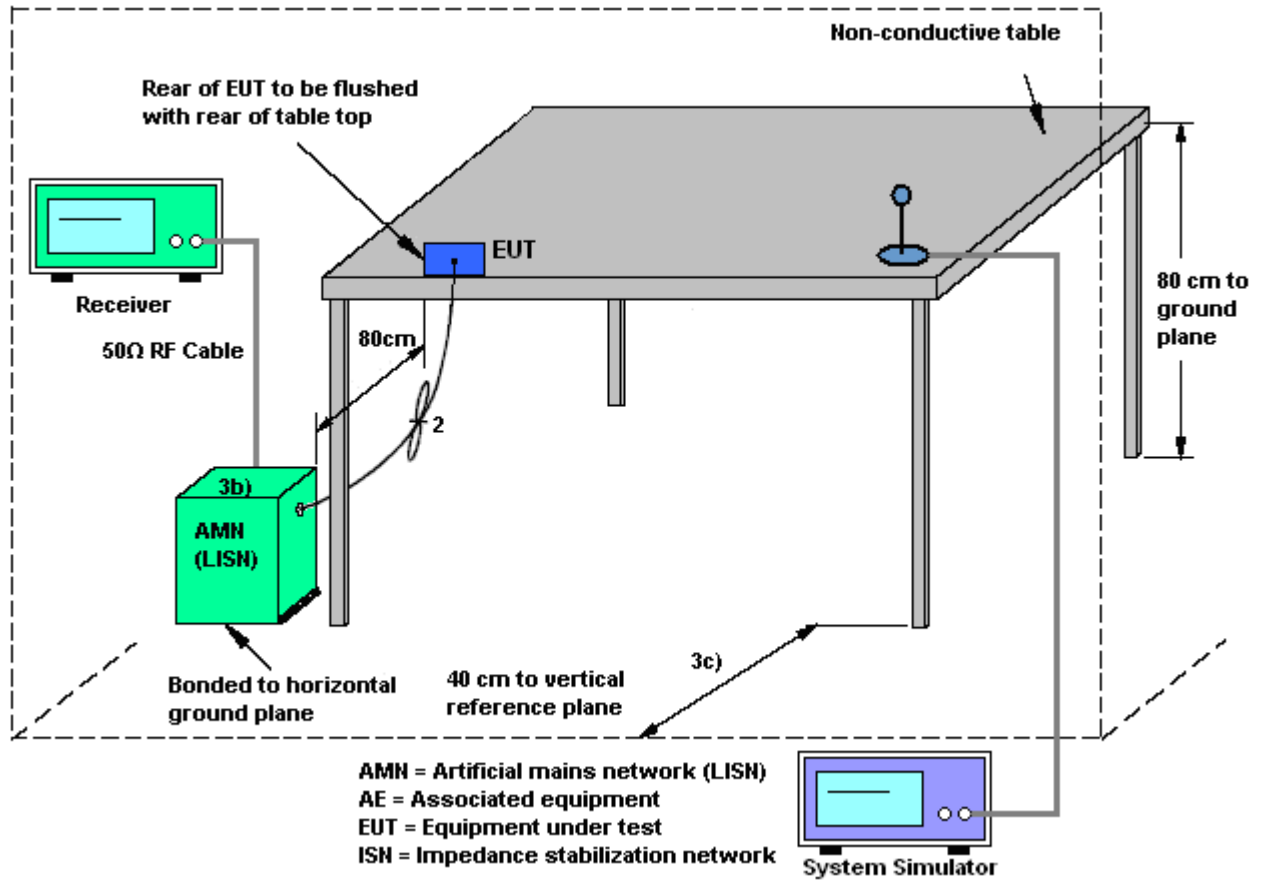



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

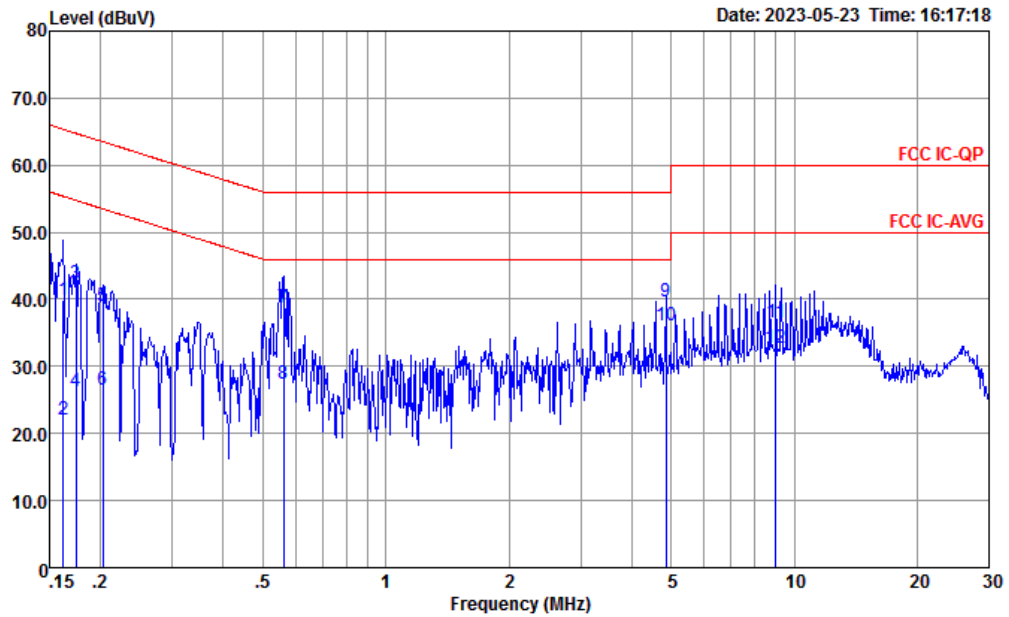


Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	39.98	-25.36	65.34	29.49	0.06	10.43	QP
2	0.162	22.08	-33.26	55.34	11.59	0.06	10.43	Average
3	0.174	42.37	-22.40	64.77	31.91	0.04	10.42	QP
4	0.174	26.37	-28.40	54.77	15.91	0.04	10.42	Average
5	0.203	38.94	-24.55	63.49	28.50	0.02	10.42	QP
6	0.203	26.54	-26.95	53.49	16.10	0.02	10.42	Average
7	0.561	38.74	-17.26	56.00	28.60	-0.05	10.19	QP
8	0.561	27.34	-18.66	46.00	17.20	-0.05	10.19	Average
9	4.848	39.63	-16.37	56.00	29.70	-0.13	10.06	QP
10 *	4.848	36.13	-9.87	46.00	26.20	-0.13	10.06	Average
11	9.011	36.57	-23.43	60.00	26.20	-0.16	10.53	QP
12	9.011	32.87	-17.13	50.00	22.50	-0.16	10.53	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

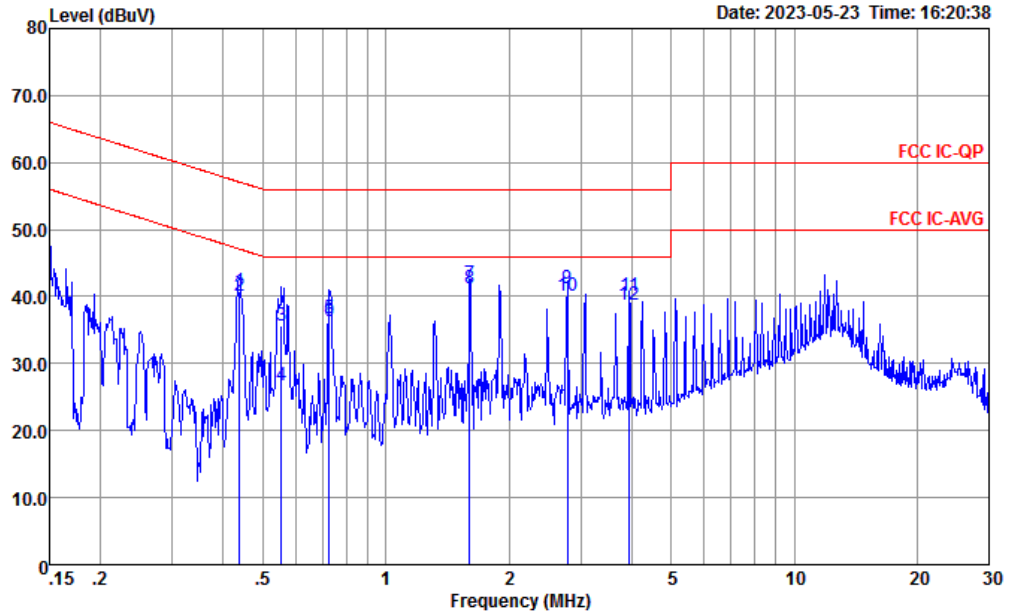

Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.437	40.69	-16.42	57.11	30.50	-0.07	10.26	QP
2	0.437	40.09	-7.02	47.11	29.90	-0.07	10.26	Average
3	0.555	35.71	-20.29	56.00	25.60	-0.08	10.19	QP
4	0.555	26.71	-19.29	46.00	16.60	-0.08	10.19	Average
5	0.727	36.86	-19.14	56.00	26.80	-0.09	10.15	QP
6	0.727	36.36	-9.64	46.00	26.30	-0.09	10.15	Average
7	1.602	41.86	-14.14	56.00	31.90	-0.12	10.08	QP
8 *	1.602	41.26	-4.74	46.00	31.30	-0.12	10.08	Average
9	2.779	41.13	-14.87	56.00	31.20	-0.13	10.06	QP
10	2.779	40.13	-5.87	46.00	30.20	-0.13	10.06	Average
11	3.943	40.14	-15.86	56.00	30.20	-0.12	10.06	QP
12	3.943	38.84	-7.16	46.00	28.90	-0.12	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

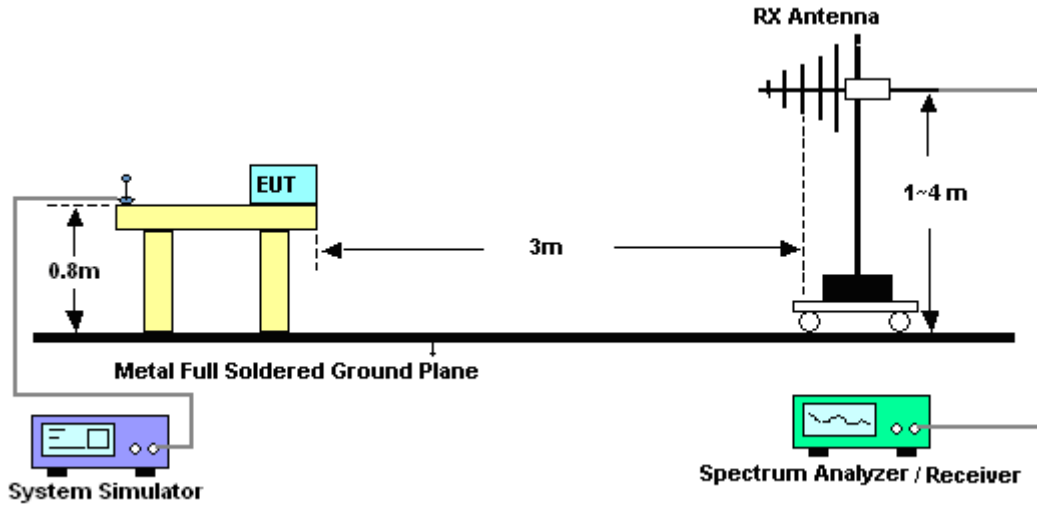


For radiated emissions above 1GHz

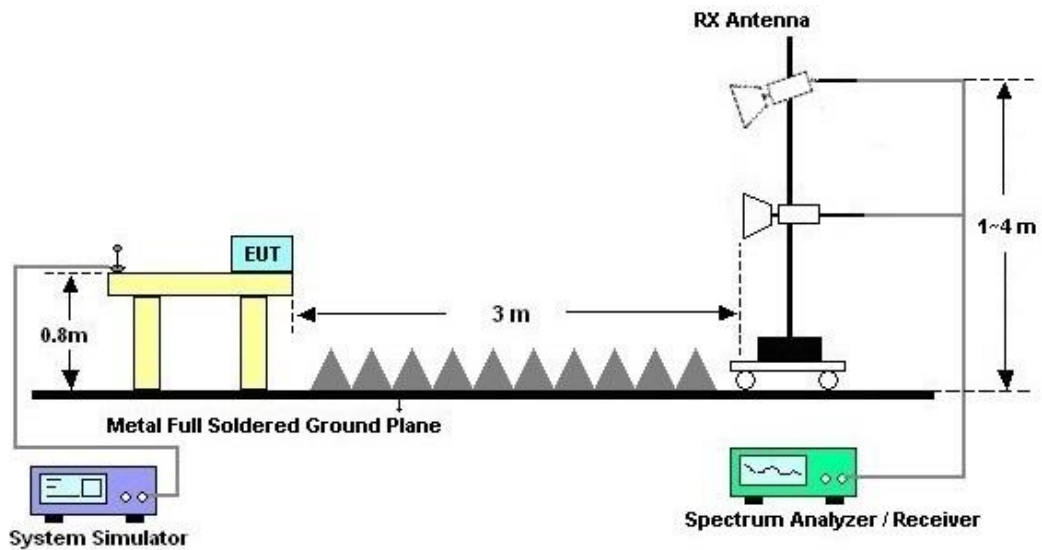



3.2.5. Test Result of Radiated Emission

Test Engineer :	Zhou	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

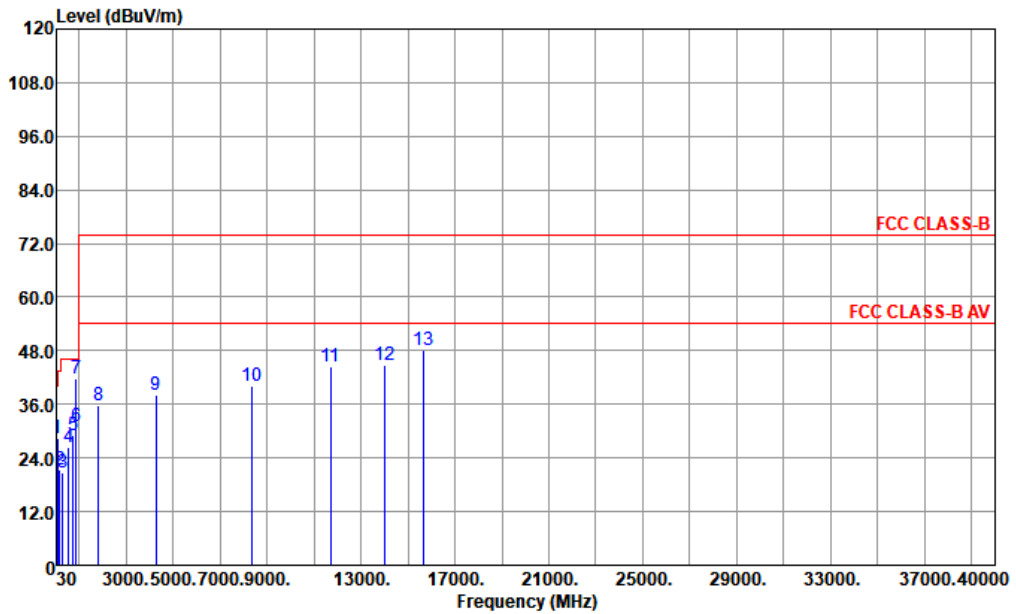


Site : 03CH07-KS  
 Condition : FCC CLASS-B 3m 3117 SN00240138 HORIZONTAL

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	70.74	28.58	-11.42	40.00	47.17	12.39	1.06	32.04	---	---	Peak
2	186.17	21.41	-22.09	43.50	36.80	14.60	1.99	31.98	---	---	Peak
3	290.93	20.83	-25.17	46.00	31.27	19.07	2.50	32.01	---	---	Peak
4	558.65	26.38	-19.62	46.00	29.11	26.03	3.44	32.20	---	---	Peak
5	744.89	29.00	-17.00	46.00	29.02	28.11	3.98	32.11	---	---	Peak
6	857.41	31.24	-14.76	46.00	29.06	29.45	4.26	31.53	---	---	Peak
7 p	881.66	41.78			39.82	29.05	4.32	31.41	---	---	Peak
8	1816.00	35.79	-38.21	74.00	62.16	30.05	6.19	62.61	---	---	Peak
9	4264.00	38.04	-35.96	74.00	58.32	33.59	9.68	63.55	---	---	Peak
10	8378.00	40.12	-33.88	74.00	54.13	35.80	13.86	63.67	---	---	Peak
11	11693.00	44.46	-29.54	74.00	51.12	38.43	16.25	61.34	---	---	Peak
12	13988.00	44.84	-29.16	74.00	49.27	38.70	17.99	61.12	---	---	Peak
13	15637.00	48.10	-25.90	74.00	51.17	40.22	18.82	62.11	---	---	Peak



Test Engineer :	Zhou	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

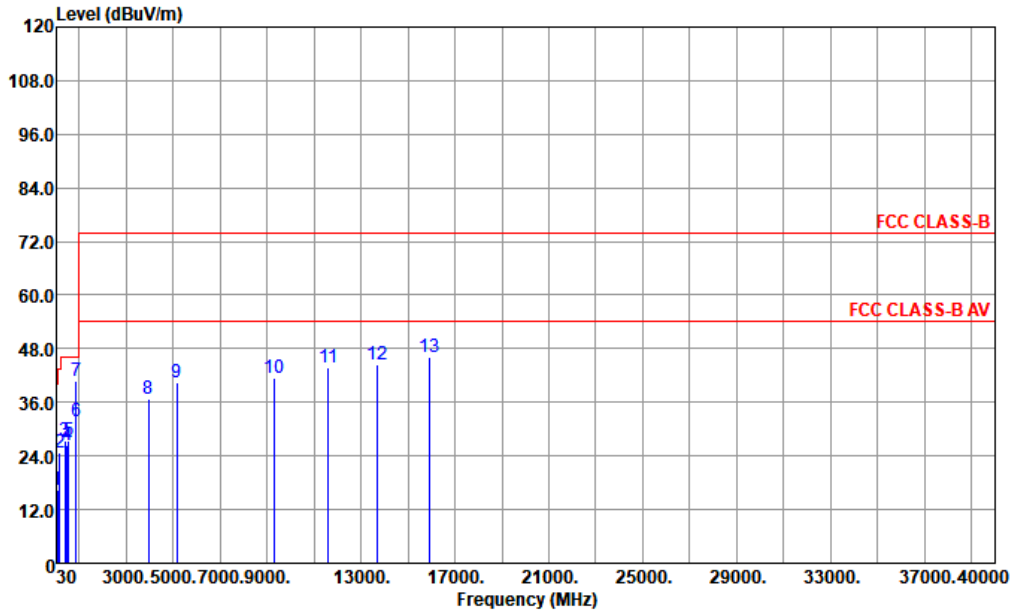

Site : 03CH07-KS  
 Condition : FCC CLASS-B 3m 3117 SN00240138 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	70.74	16.29	-23.71	40.00	34.88	12.39	1.06	32.04	---	---	Peak
2	180.35	24.58	-18.92	43.50	39.80	14.82	1.95	31.99	---	---	Peak
3	388.90	27.52	-18.48	46.00	35.45	21.24	2.88	32.05	---	---	Peak
4	480.08	26.56	-19.44	46.00	32.03	23.43	3.19	32.09	---	---	Peak
5	559.62	27.52	-18.48	46.00	30.19	26.10	3.44	32.21	---	---	Peak
6	866.14	31.59	-14.41	46.00	29.37	29.43	4.28	31.49	---	---	Peak
7 p	881.66	40.73			38.77	29.05	4.32	31.41	---	---	Peak
8	3958.00	36.68	-37.32	74.00	57.59	33.34	9.45	63.70	---	---	Peak
9	5165.00	40.45	-33.55	74.00	59.16	34.20	10.63	63.54	---	---	Peak
10	9330.00	41.48	-32.52	74.00	52.63	36.43	14.46	62.04	---	---	Peak
11	11608.00	43.95	-30.05	74.00	50.90	38.32	16.21	61.48	---	---	Peak
12	13665.00	44.48	-29.52	74.00	49.02	38.77	17.74	61.05	---	---	Peak
13	15926.00	46.26	-27.74	74.00	48.66	40.69	18.97	62.06	---	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 23, 2023	May 23, 2023	May 22, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	May 23, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 23, 2023	May 23, 2023	May 22, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	May 23, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 12, 2022	Apr. 27, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 12, 2022	Apr. 27, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 26, 2022	Apr. 27, 2023	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240132	1GHz~18GHz	Jul. 08, 2022	Apr. 27, 2023	Jul. 07, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 17, 2022	Apr. 27, 2023	Oct. 16, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060851	18~40GHz	Jan. 05, 2023	Apr. 27, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2023	Apr. 27, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Apr. 27, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 27, 2023	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Apr. 27, 2023	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Apr. 27, 2023	NCR	Radiation (03CH07-KS)

NCR: No Calibration Required



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.94 dB
-------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.20 dB
-------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.86 dB
-------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.24 dB
-------------------------------------------------------------------------	---------