





Conducted Spurious Emission



Test Result



TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant7	2402	Reference	14.57	14.57	---	PASS
			30~1000	14.57	-45.6	≤-5.43	PASS
			1000~26500	14.57	-36.18	≤-5.43	PASS
	Ant5	2402	Reference	14.06	14.06	---	PASS
			30~1000	14.06	-45.27	≤-5.94	PASS
			1000~26500	14.06	-35.97	≤-5.94	PASS
	Ant7	2441	Reference	15.19	15.19	---	PASS
			30~1000	15.19	-45.03	≤-4.81	PASS
			1000~26500	15.19	-36.06	≤-4.81	PASS
	Ant5	2441	Reference	14.33	14.33	---	PASS
			30~1000	14.33	-45.93	≤-5.67	PASS
			1000~26500	14.33	-36.3	≤-5.67	PASS
	Ant7	2480	Reference	13.71	13.71	---	PASS
			30~1000	13.71	-45.29	≤-6.29	PASS
			1000~26500	13.71	-36.01	≤-6.29	PASS
	Ant5	2480	Reference	13.60	13.60	---	PASS
			30~1000	13.60	-45.51	≤-6.4	PASS
			1000~26500	13.60	-35.95	≤-6.4	PASS
2DH5	Ant7	2402	Reference	11.34	11.34	---	PASS
			30~1000	11.34	-45.82	≤-8.66	PASS
			1000~26500	11.34	-35.97	≤-8.66	PASS
	Ant5	2402	Reference	10.91	10.91	---	PASS
			30~1000	10.91	-45.92	≤-9.09	PASS
			1000~26500	10.91	-36.25	≤-9.09	PASS
	Ant7	2441	Reference	11.77	11.77	---	PASS
			30~1000	11.77	-45.76	≤-8.23	PASS
			1000~26500	11.77	-36.33	≤-8.23	PASS
	Ant5	2441	Reference	11.15	11.15	---	PASS
			30~1000	11.15	-46.06	≤-8.85	PASS
			1000~26500	11.15	-35.47	≤-8.85	PASS
	Ant7	2480	Reference	10.56	10.56	---	PASS
			30~1000	10.56	-45.62	≤-9.44	PASS
			1000~26500	10.56	-36.68	≤-9.44	PASS
	Ant5	2480	Reference	10.47	10.47	---	PASS
			30~1000	10.47	-45.8	≤-9.53	PASS
			1000~26500	10.47	-36.14	≤-9.53	PASS
3DH5	Ant7	2402	Reference	11.37	11.37	---	PASS
			30~1000	11.37	-45.35	≤-8.63	PASS
			1000~26500	11.37	-36.12	≤-8.63	PASS
	Ant5	2402	Reference	10.98	10.98	---	PASS
			30~1000	10.98	-45.19	≤-9.02	PASS
			1000~26500	10.98	-35.89	≤-9.02	PASS
	Ant7	2441	Reference	11.84	11.84	---	PASS
			30~1000	11.84	-45.89	≤-8.16	PASS
			1000~26500	11.84	-36.08	≤-8.16	PASS
	Ant5	2441	Reference	11.24	11.24	---	PASS
			30~1000	11.24	-46.02	≤-8.76	PASS
			1000~26500	11.24	-35.93	≤-8.76	PASS
	Ant7	2480	Reference	10.56	10.56	---	PASS
			30~1000	10.56	-45.96	≤-9.44	PASS
			1000~26500	10.56	-35.67	≤-9.44	PASS
	Ant5	2480	Reference	10.54	10.54	---	PASS
			30~1000	10.54	-45.59	≤-9.46	PASS
			1000~26500	10.54	-36.05	≤-9.46	PASS






Test Graphs

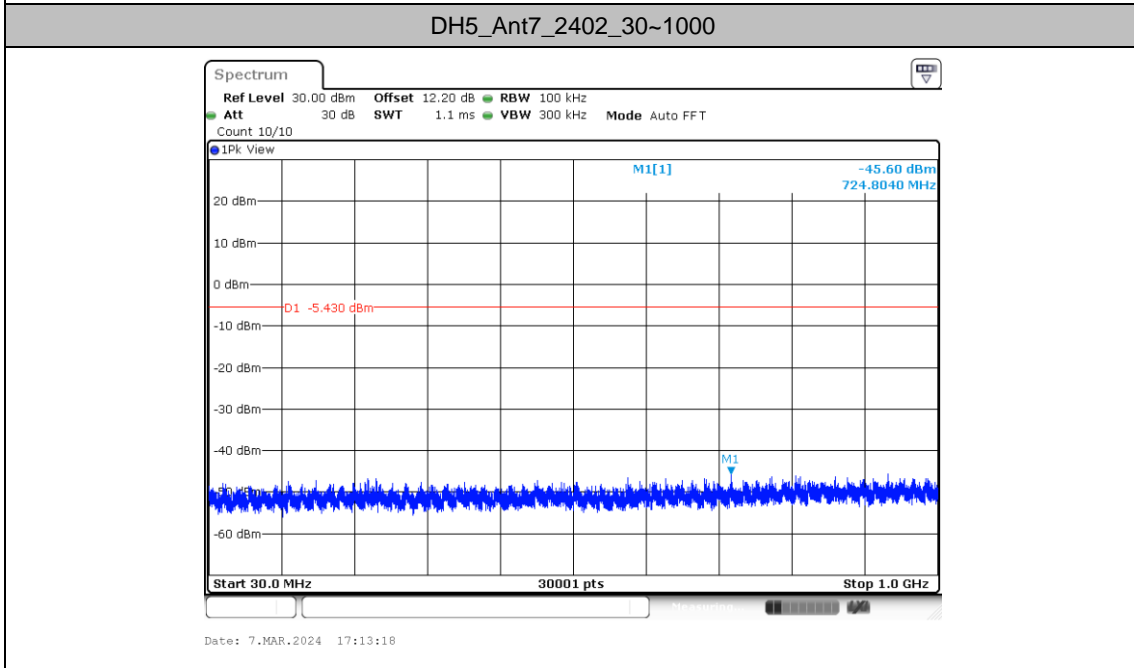
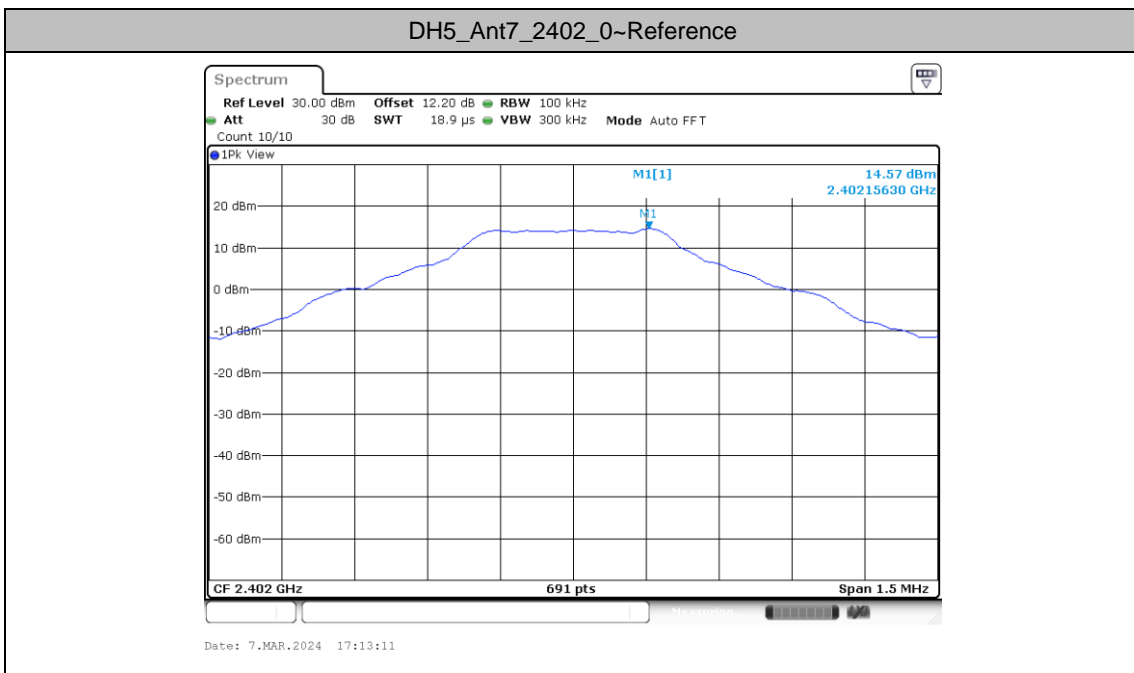


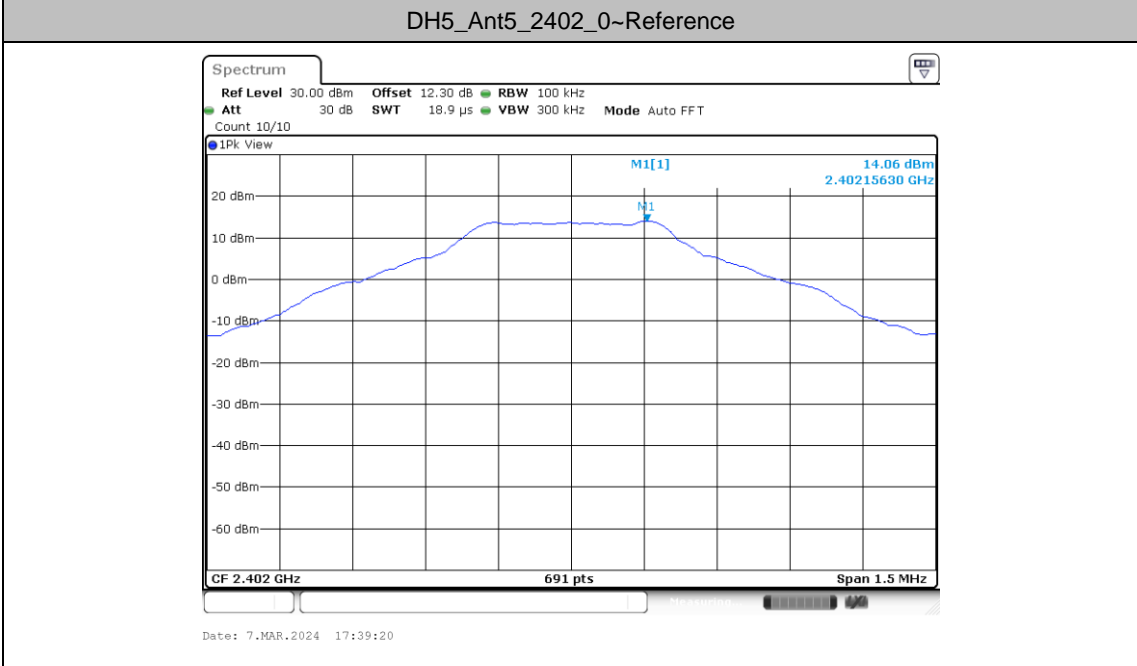
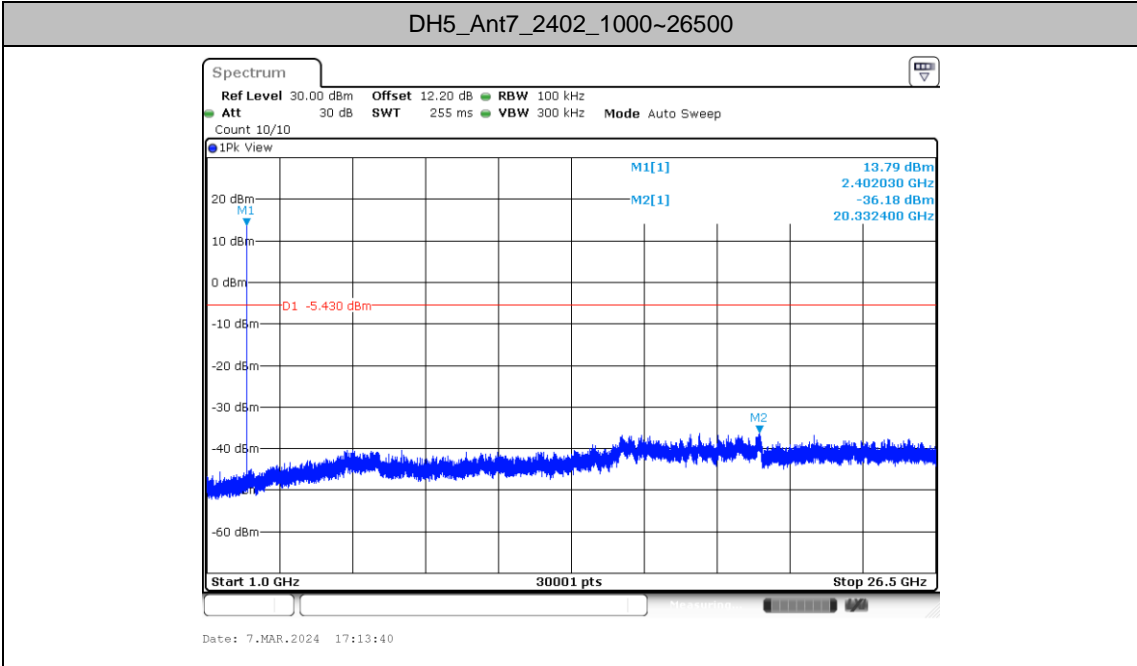


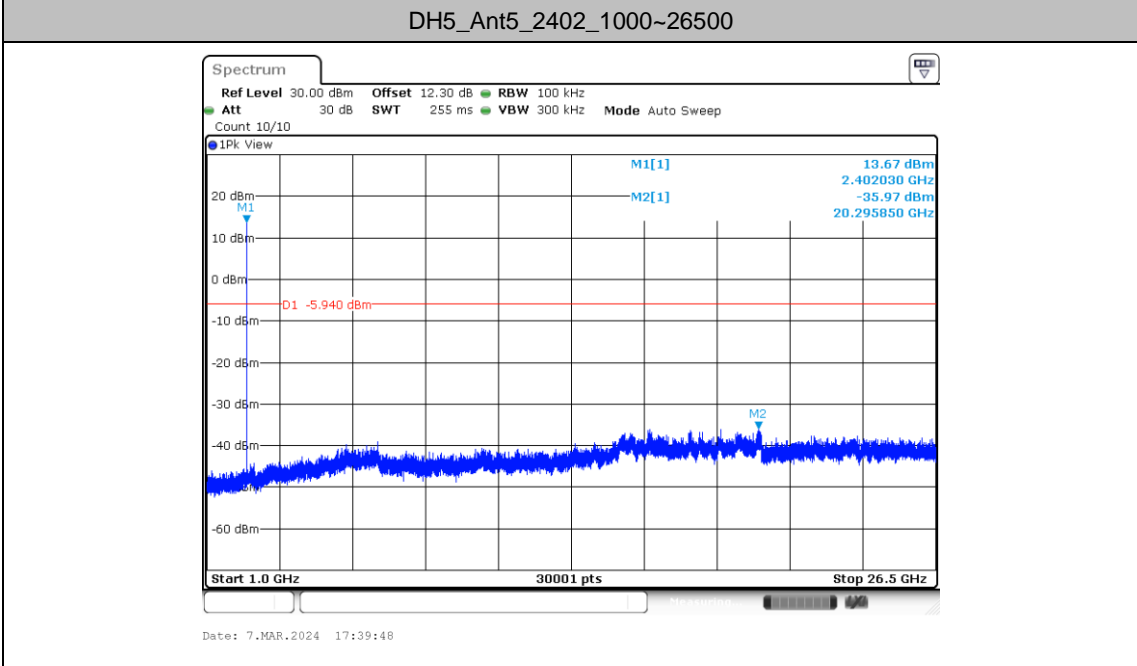
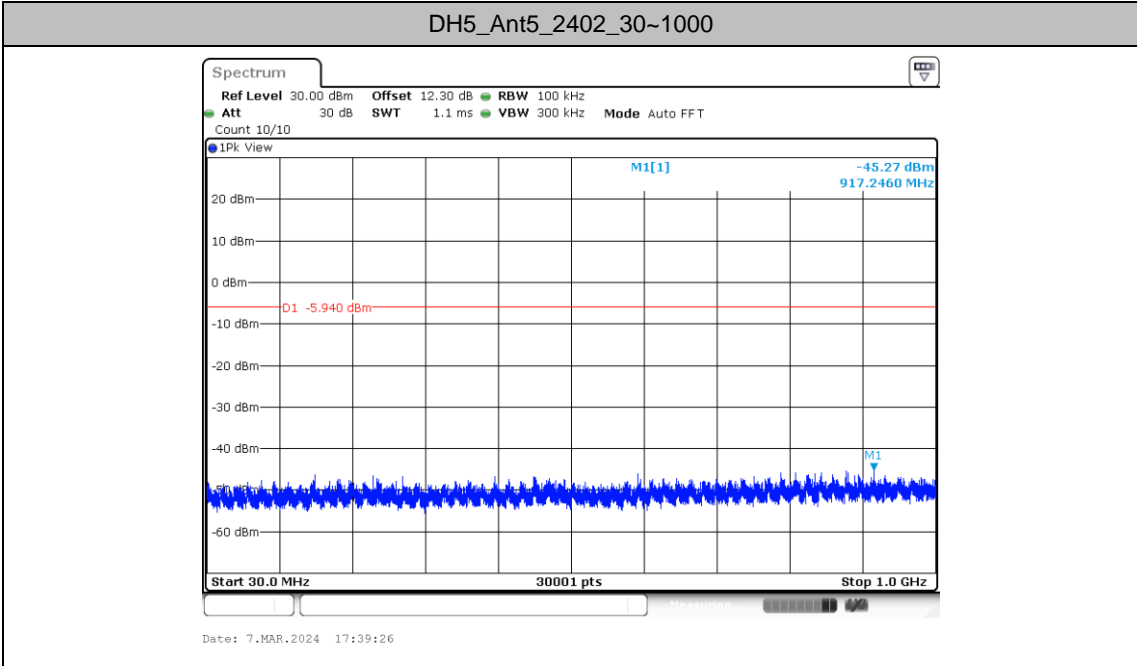



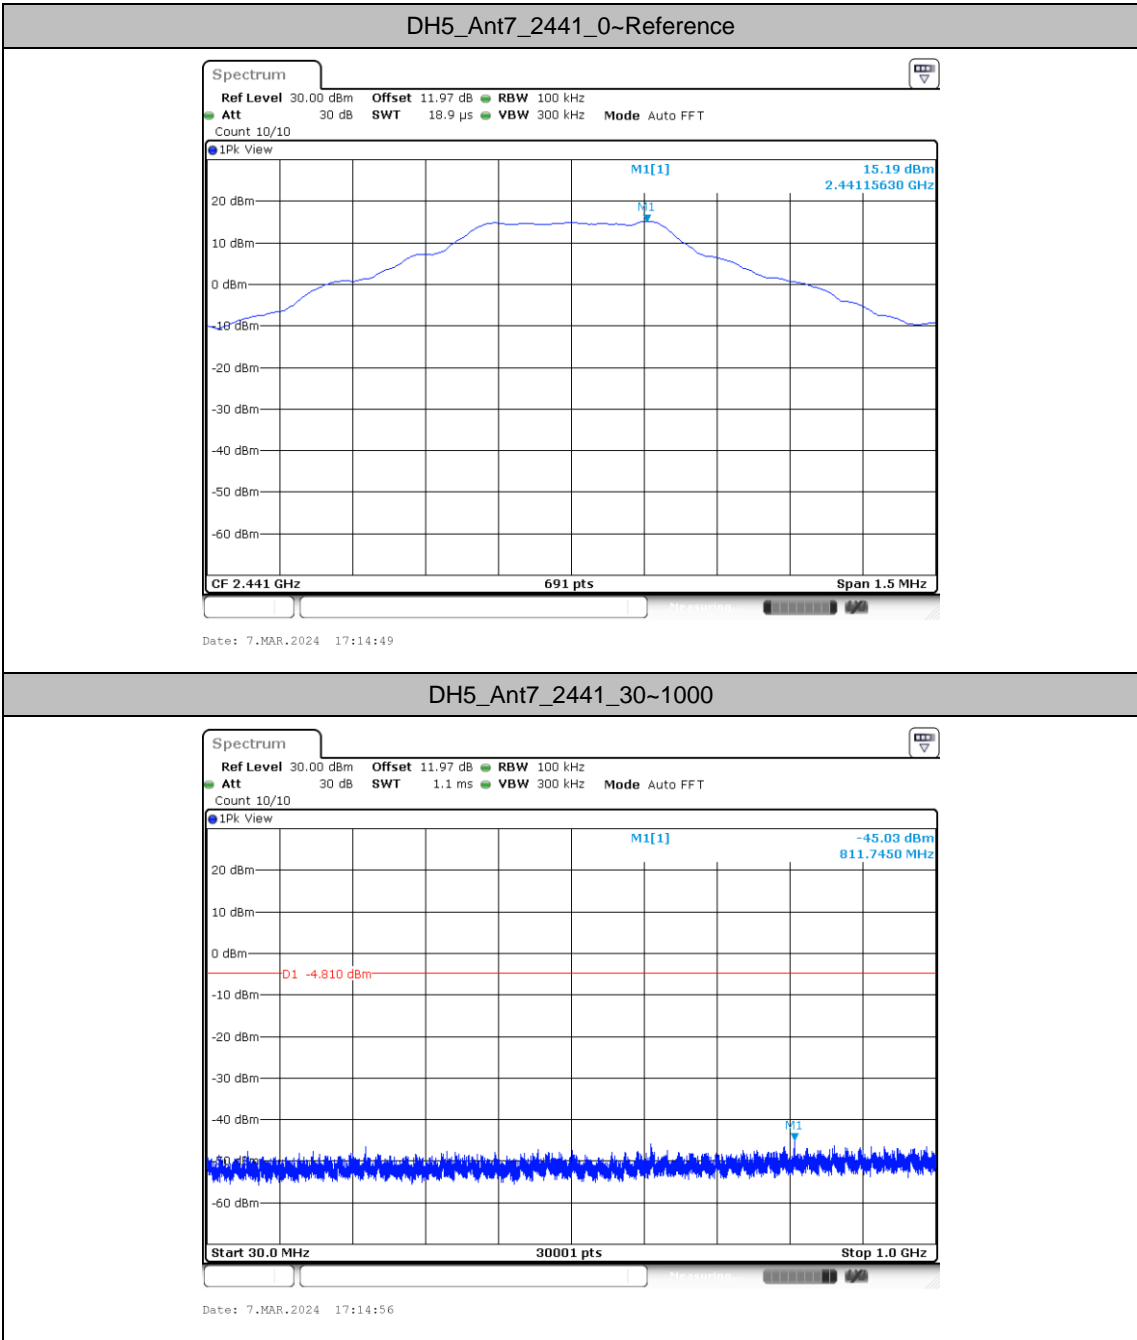


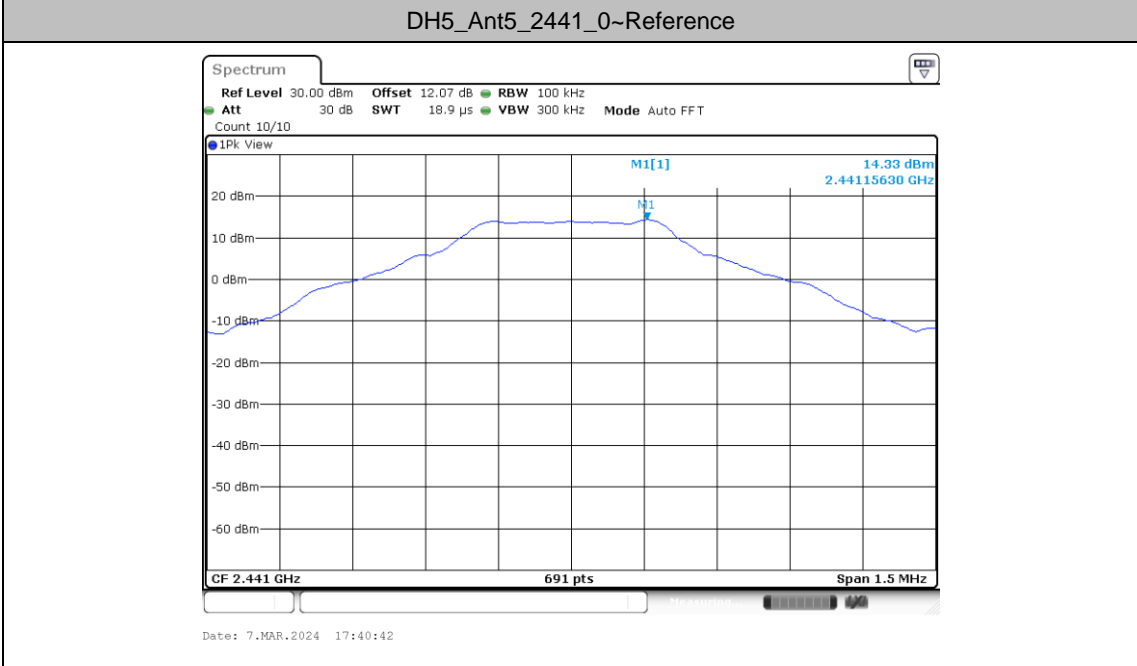
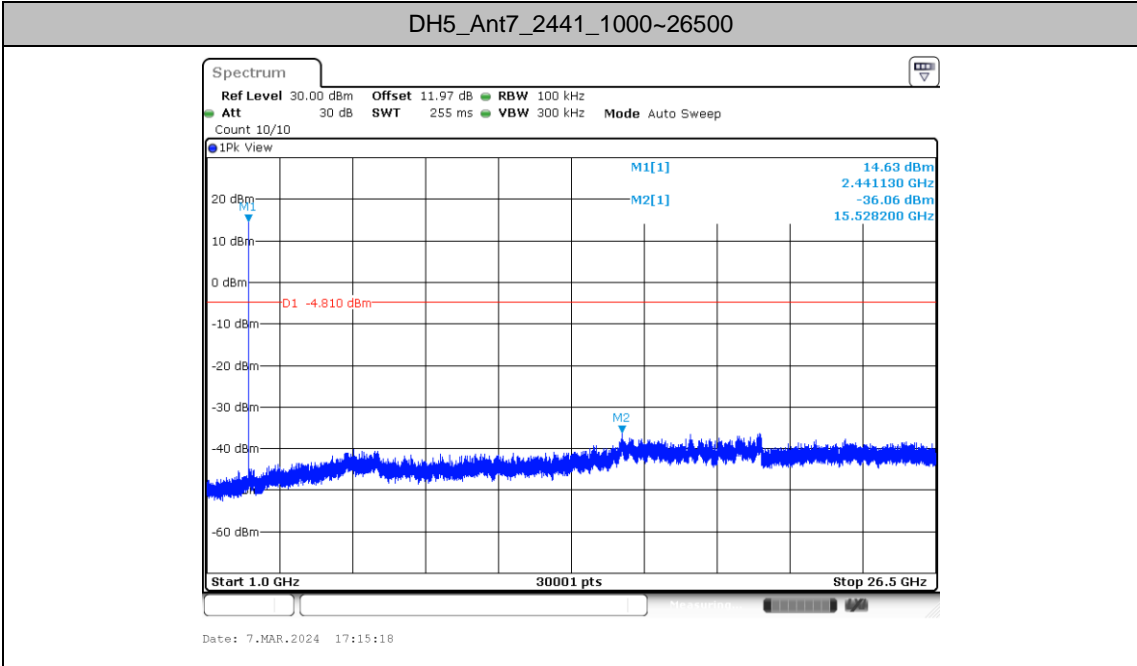


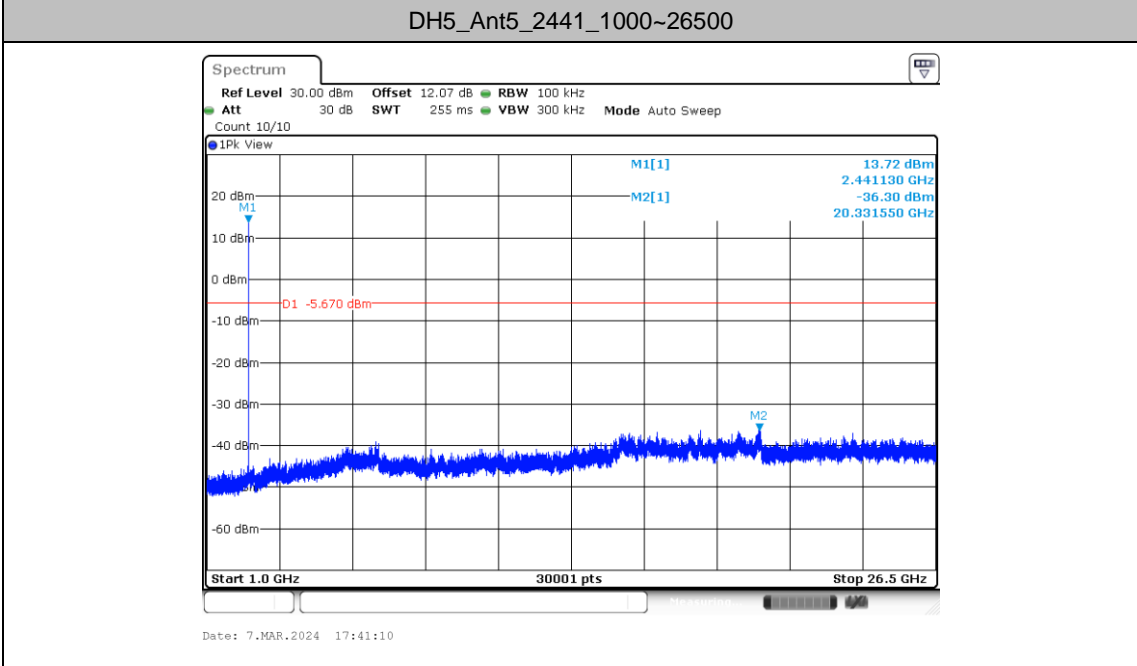
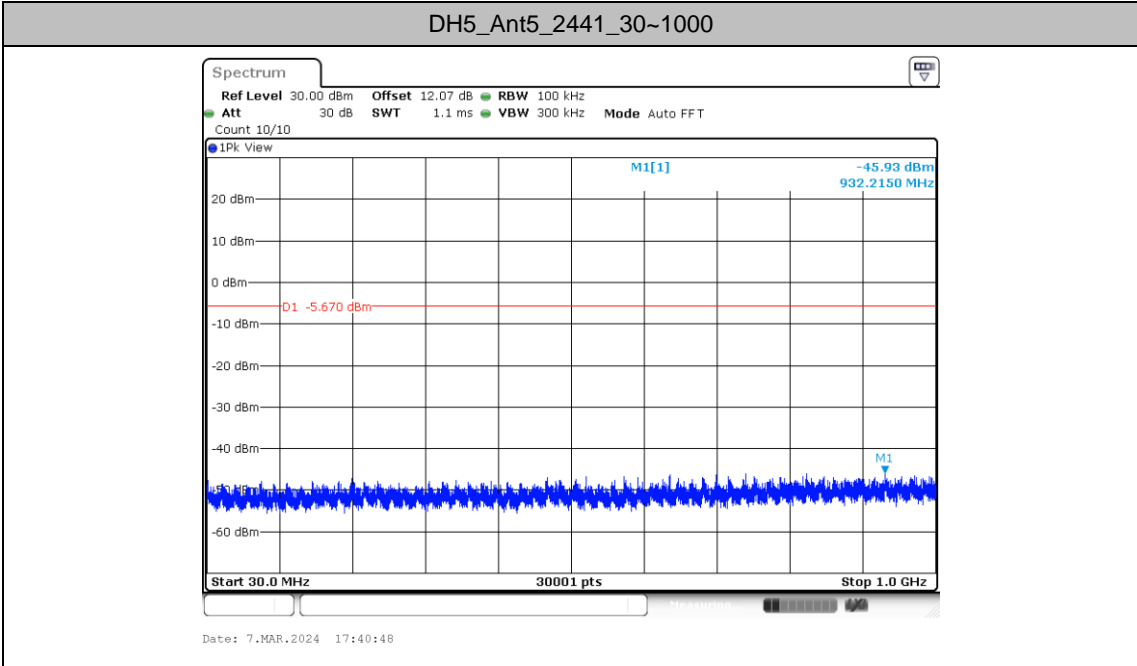


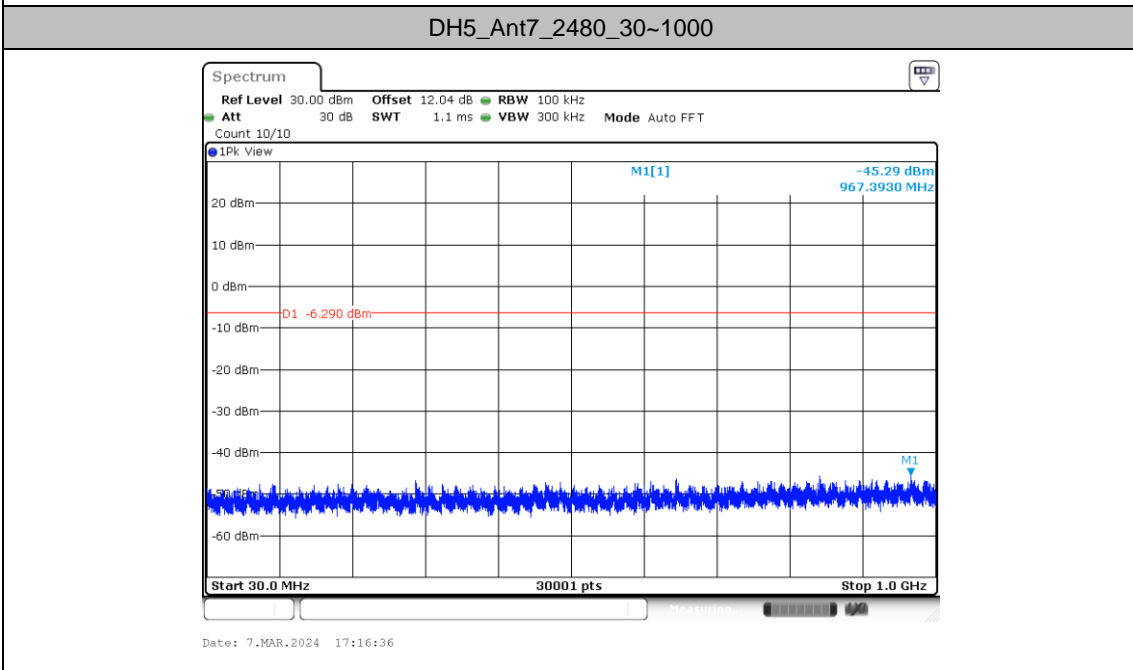
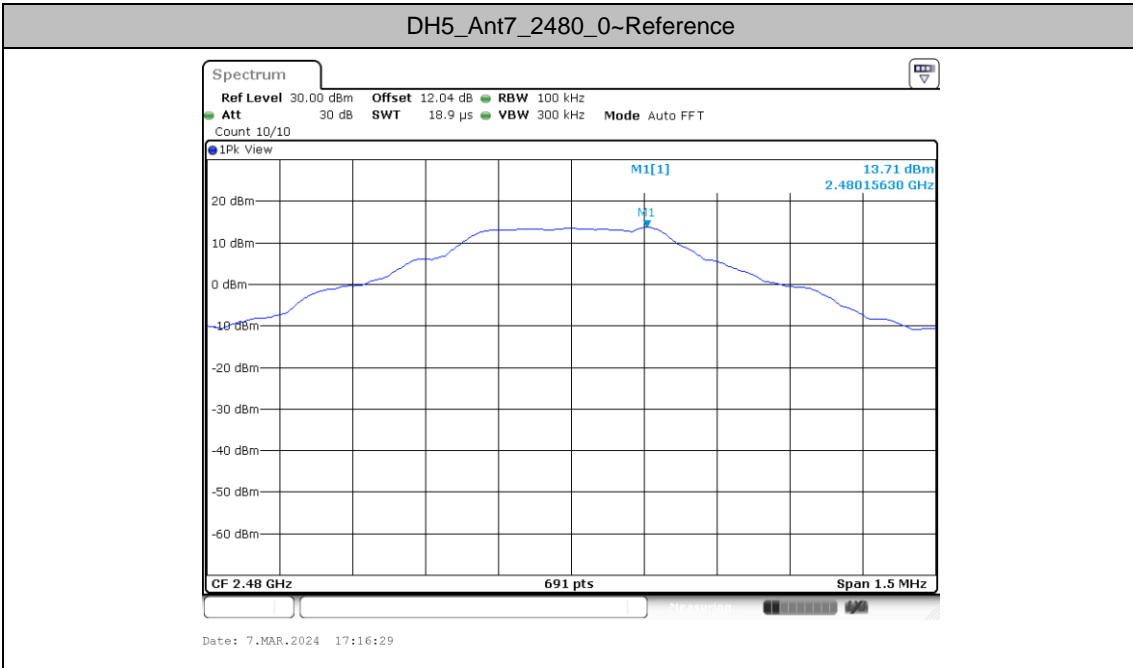


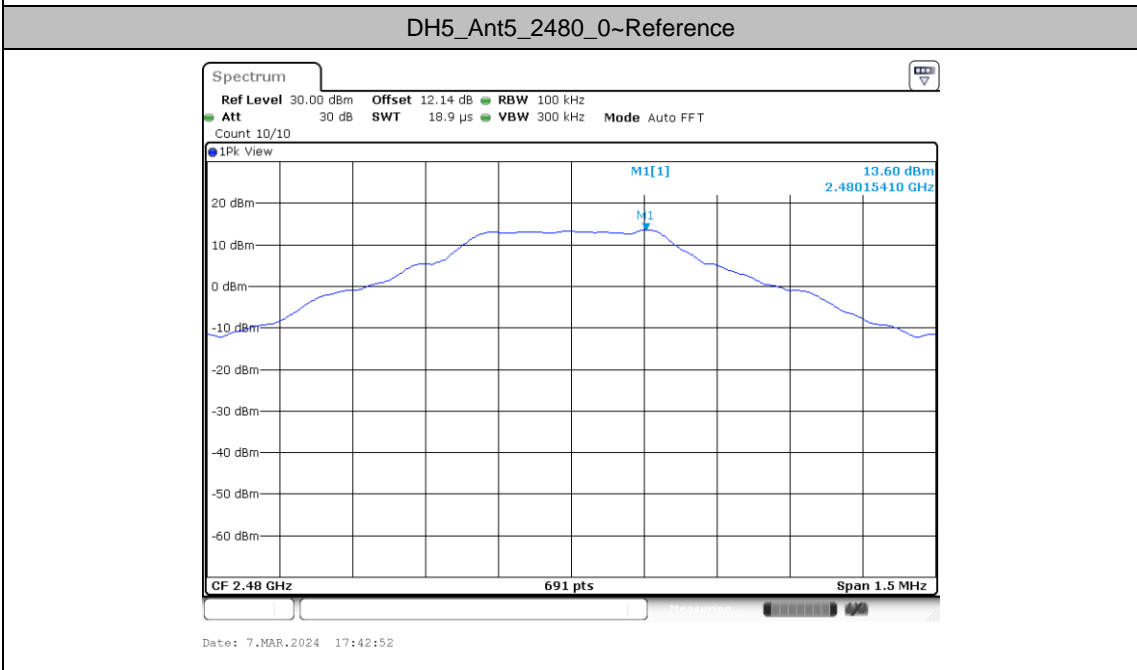
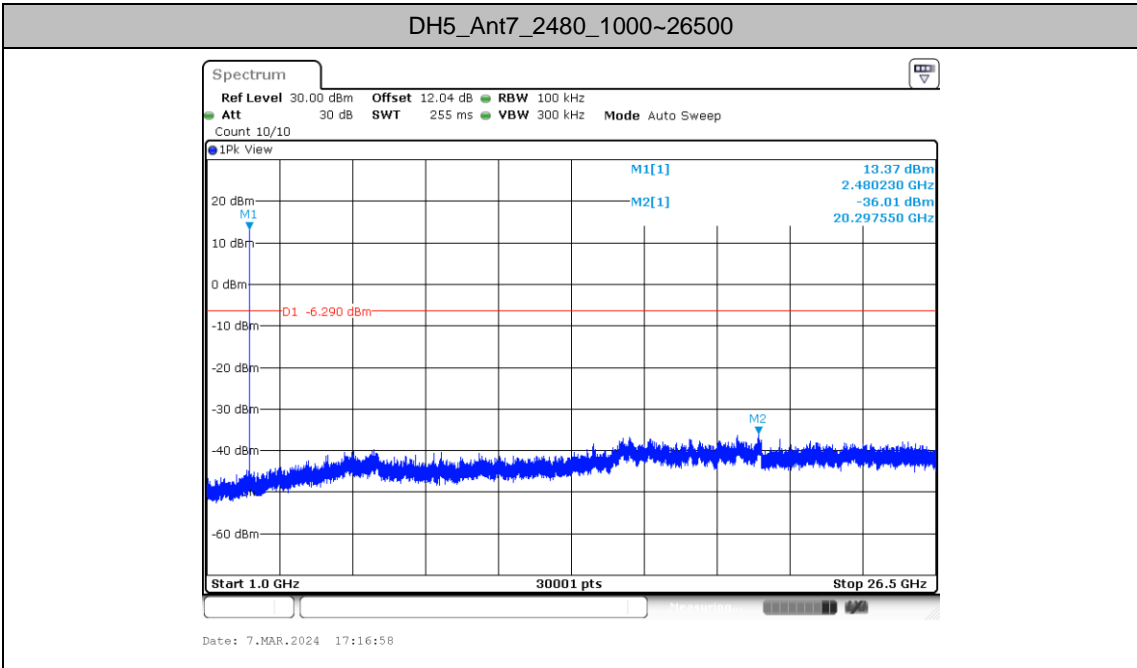


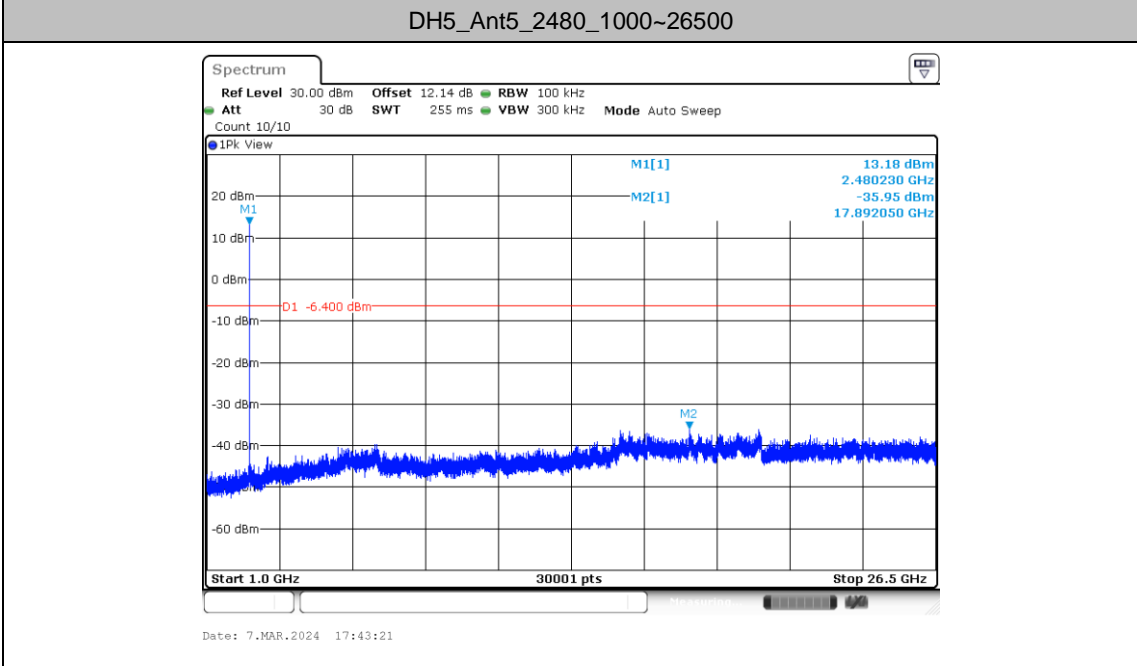
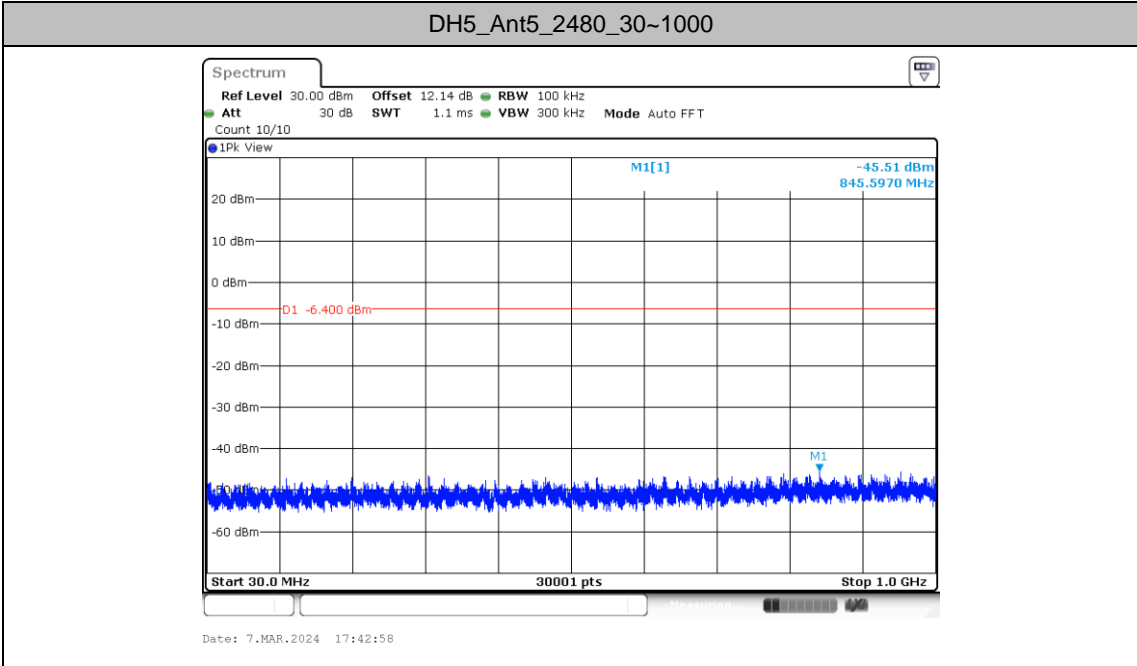


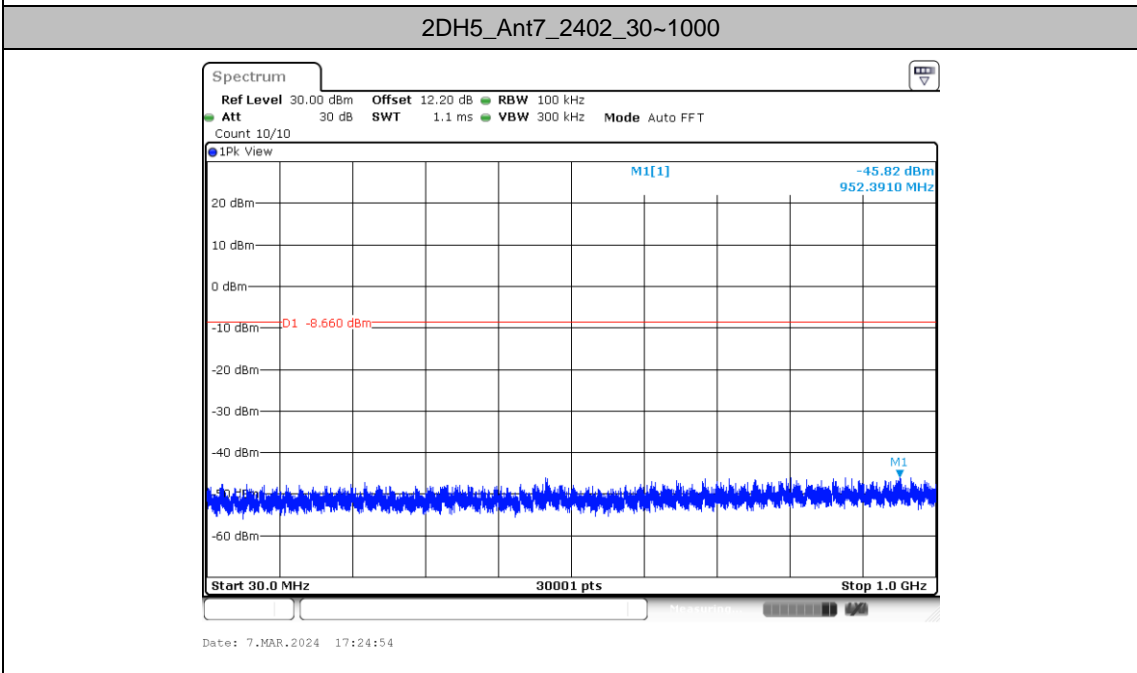
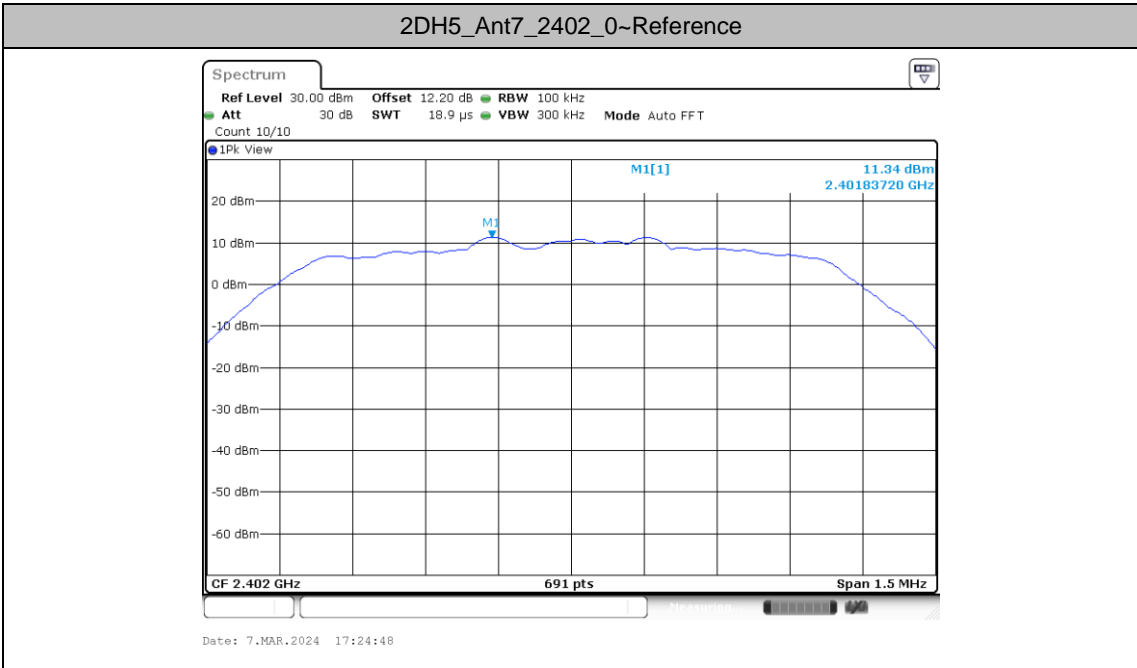


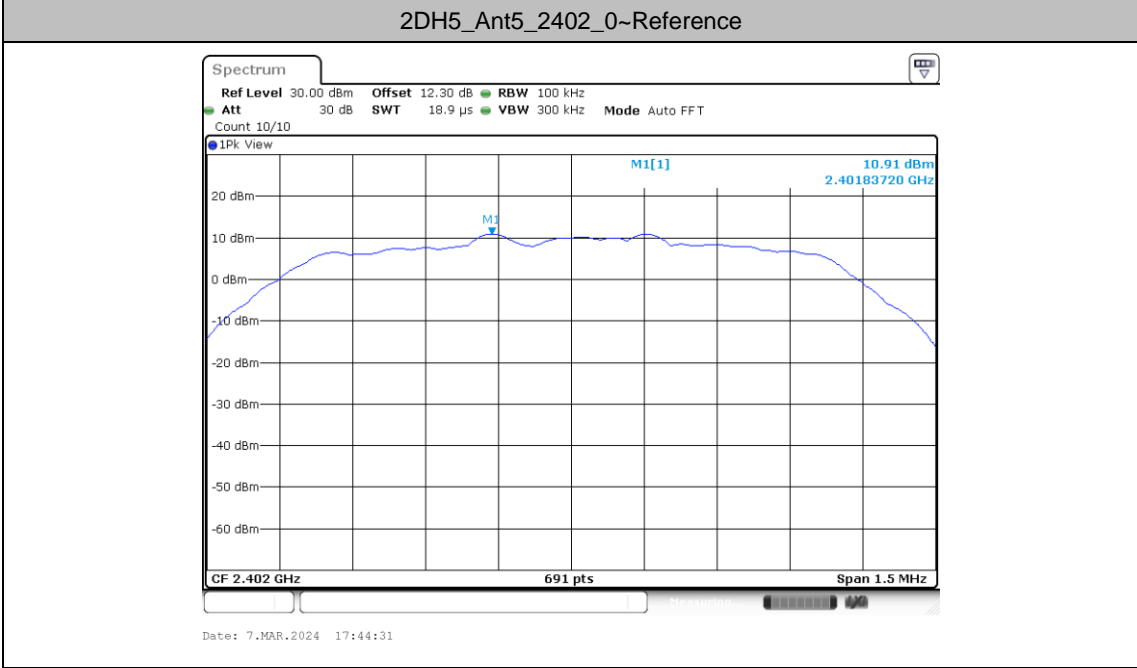
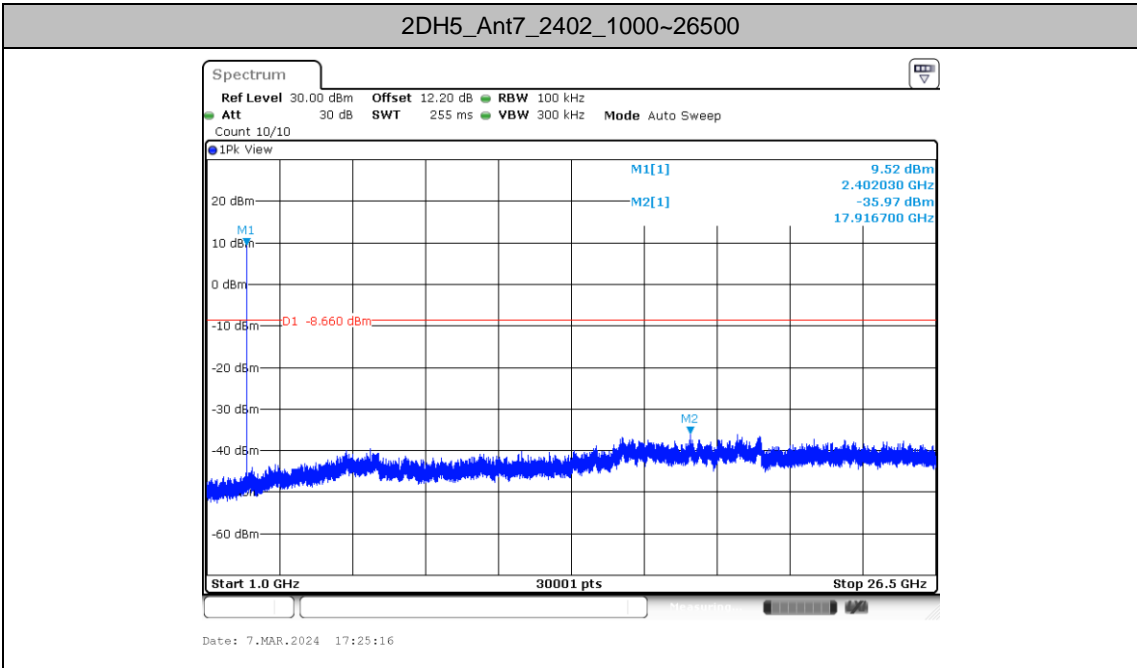


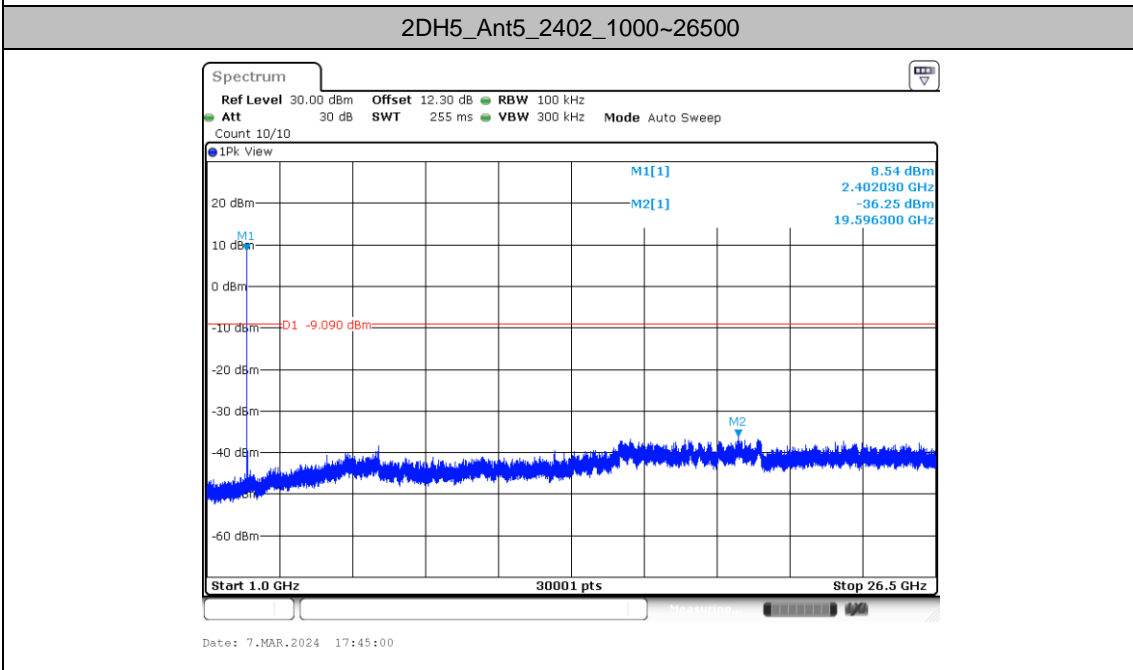
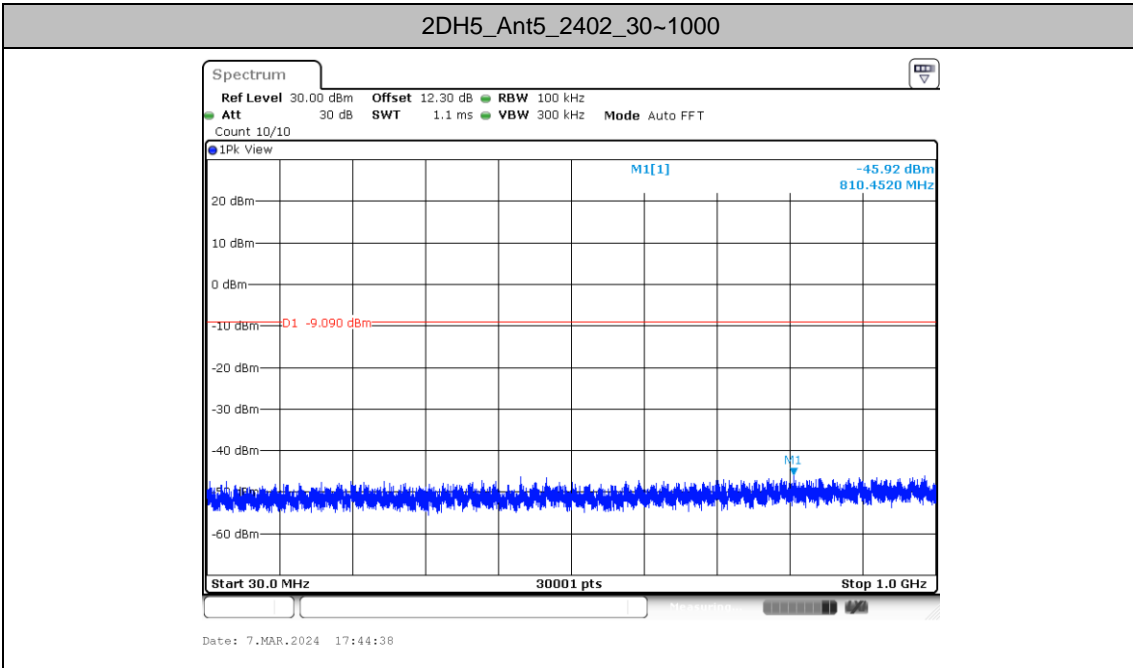


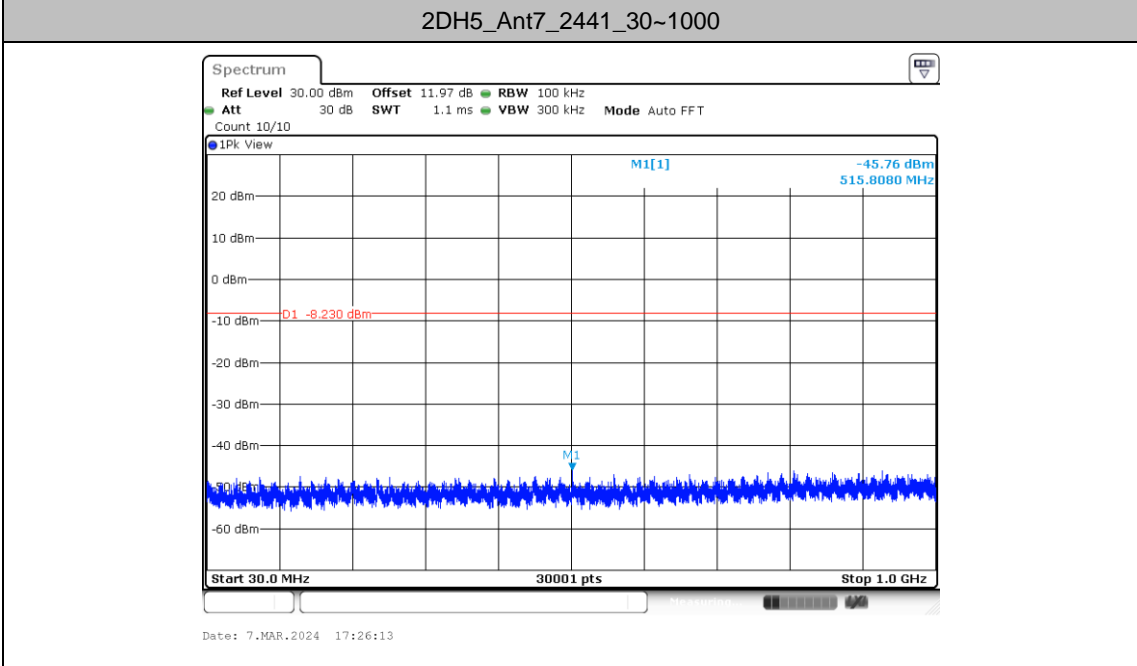
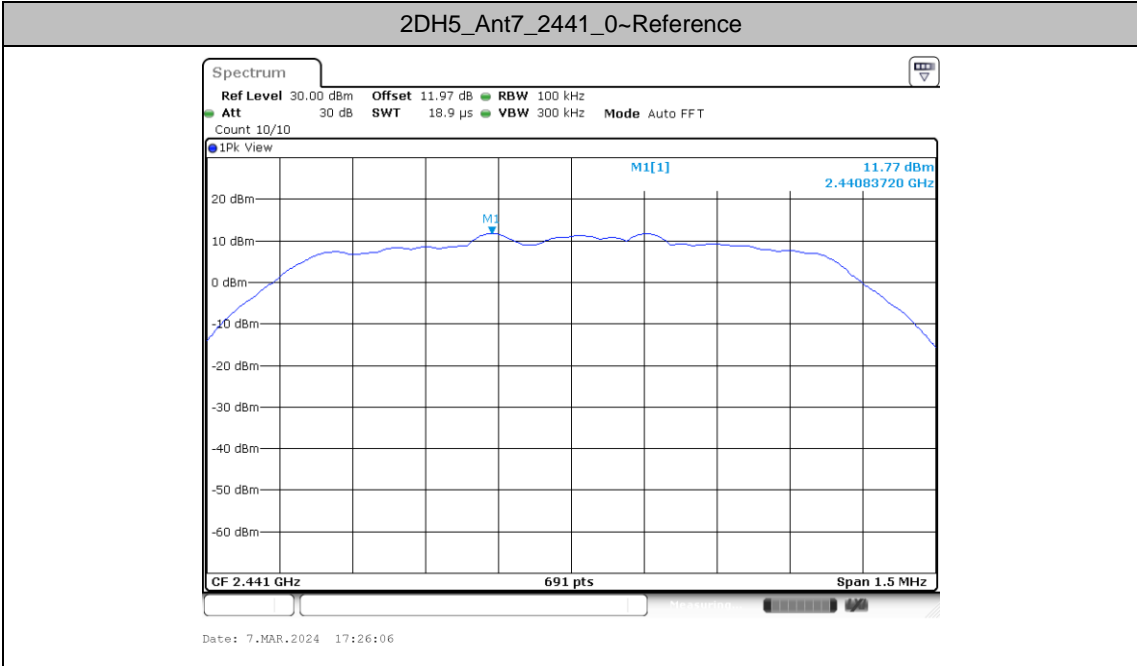


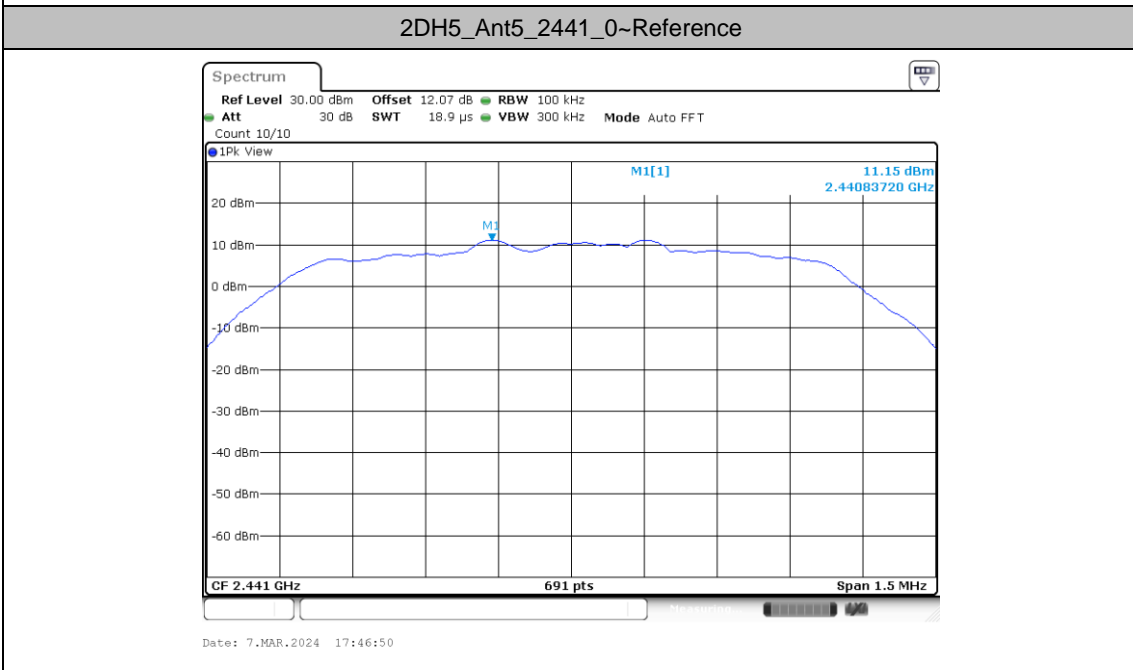
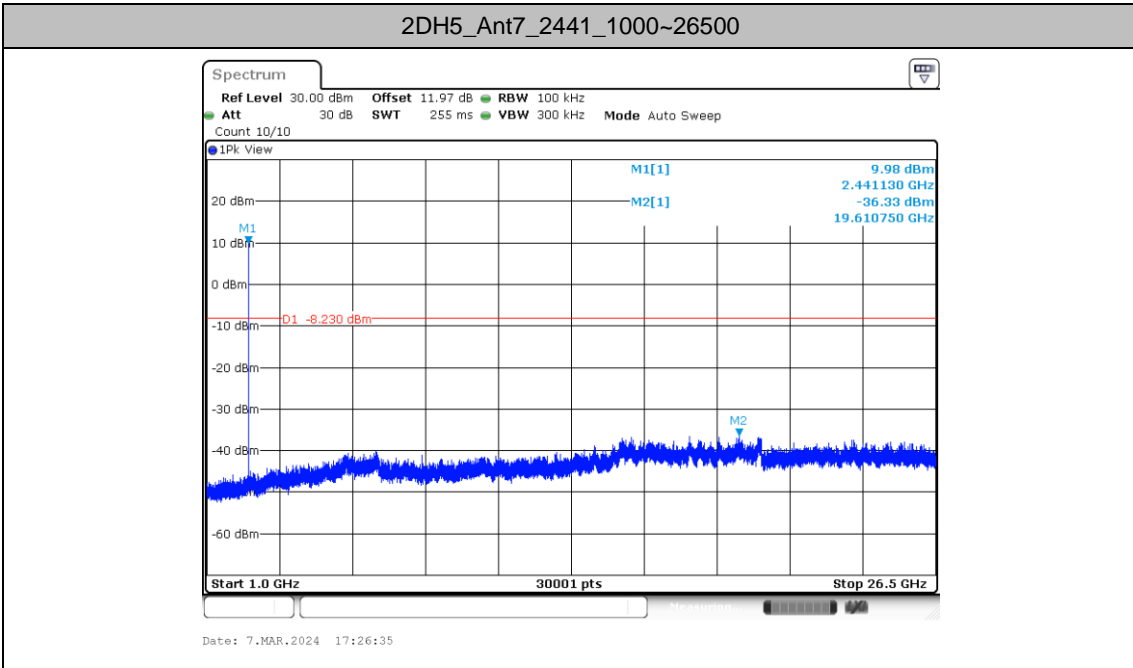


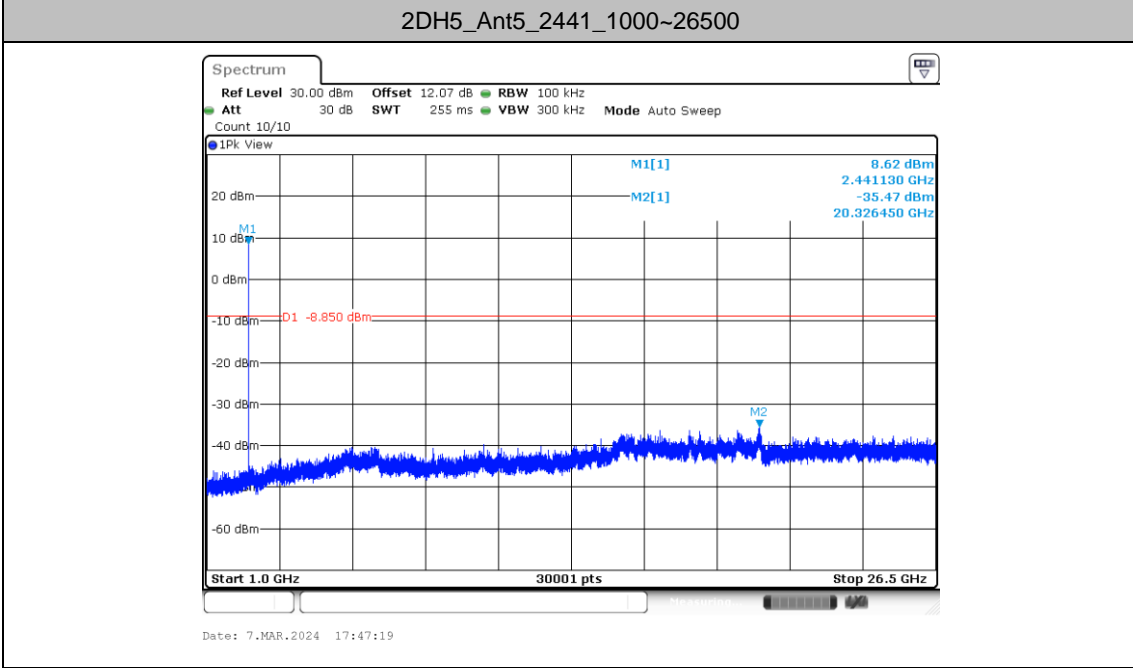
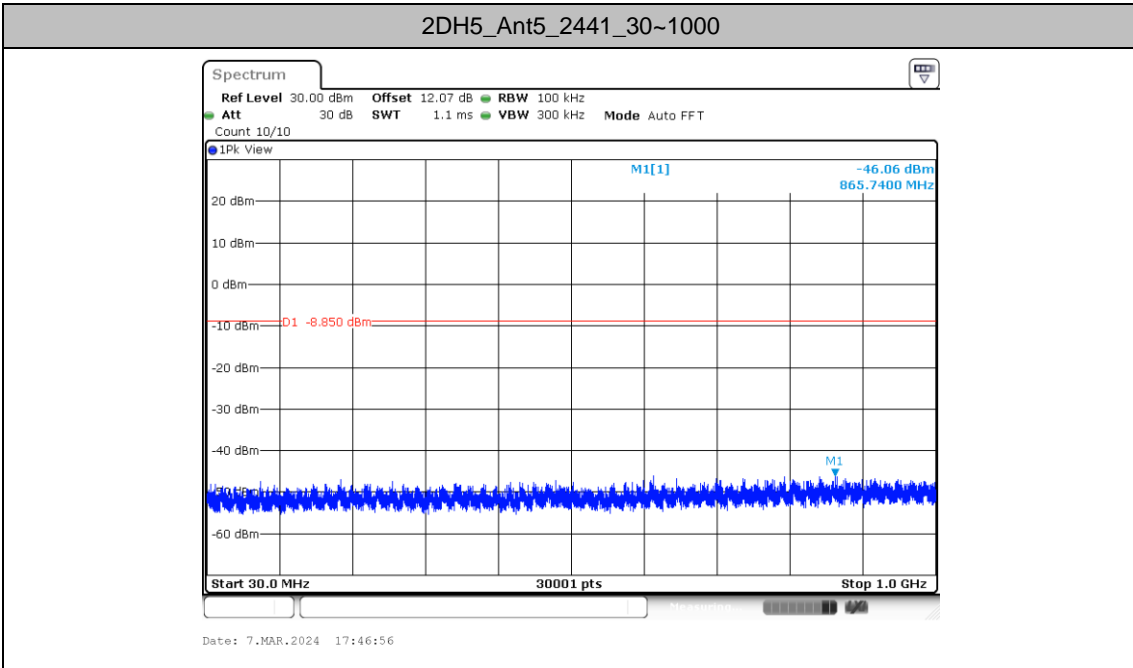


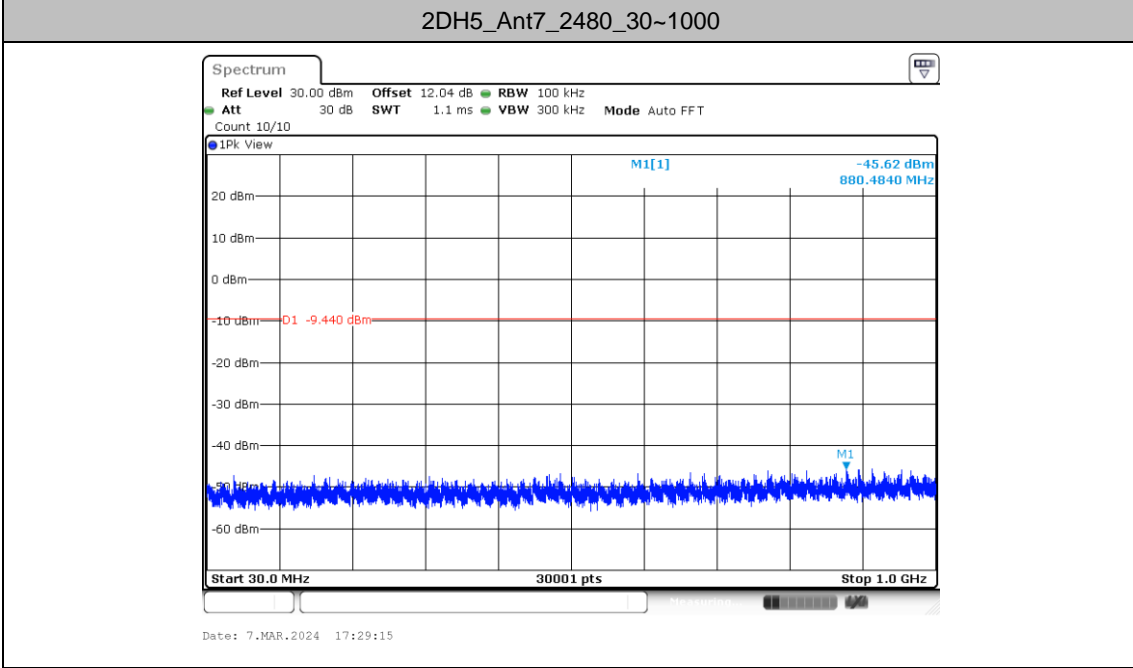
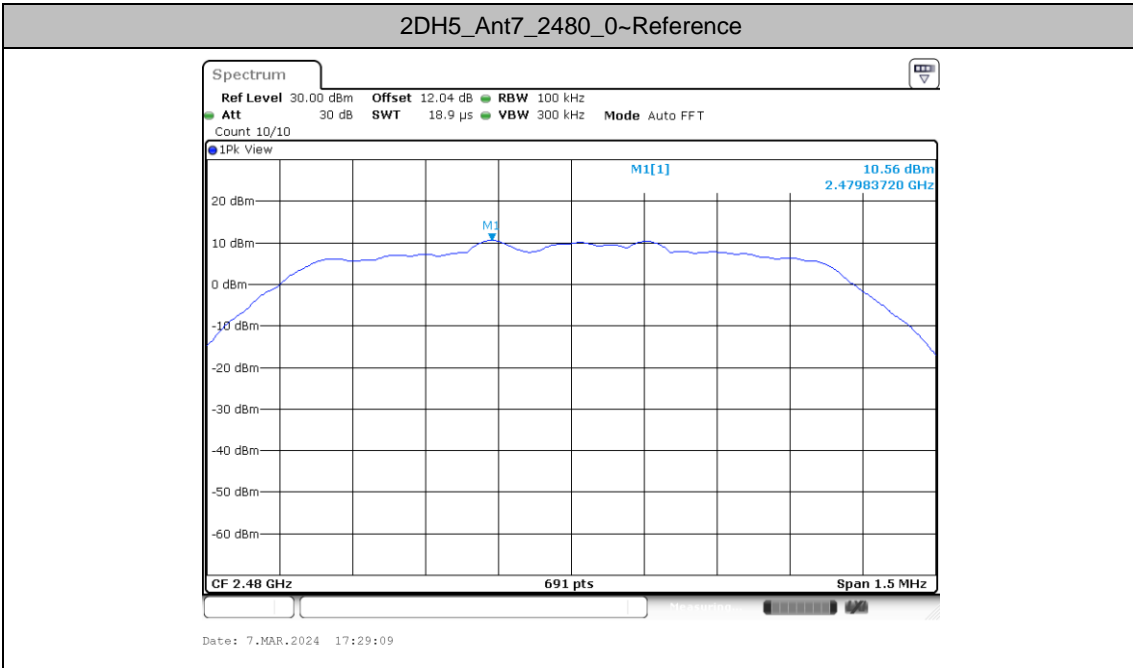


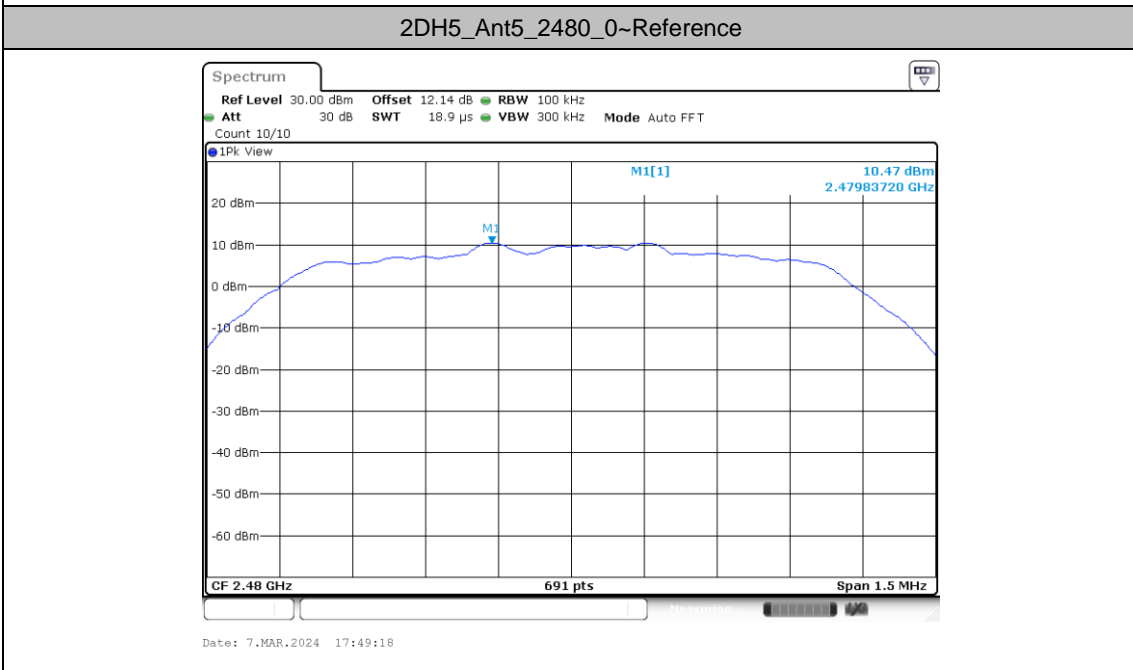
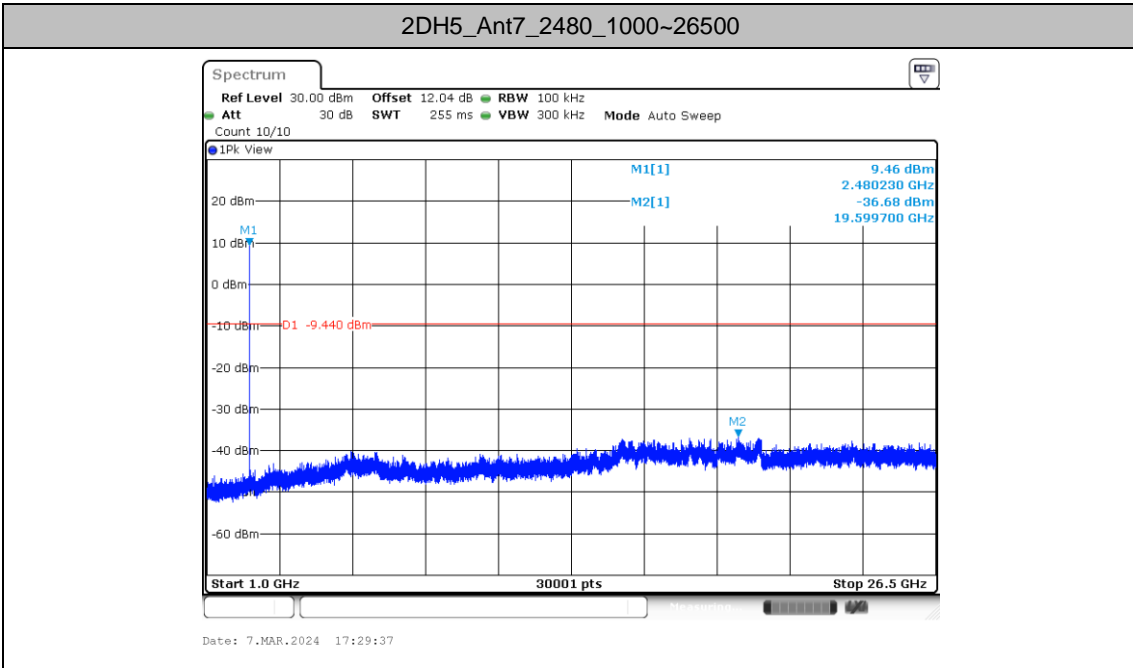


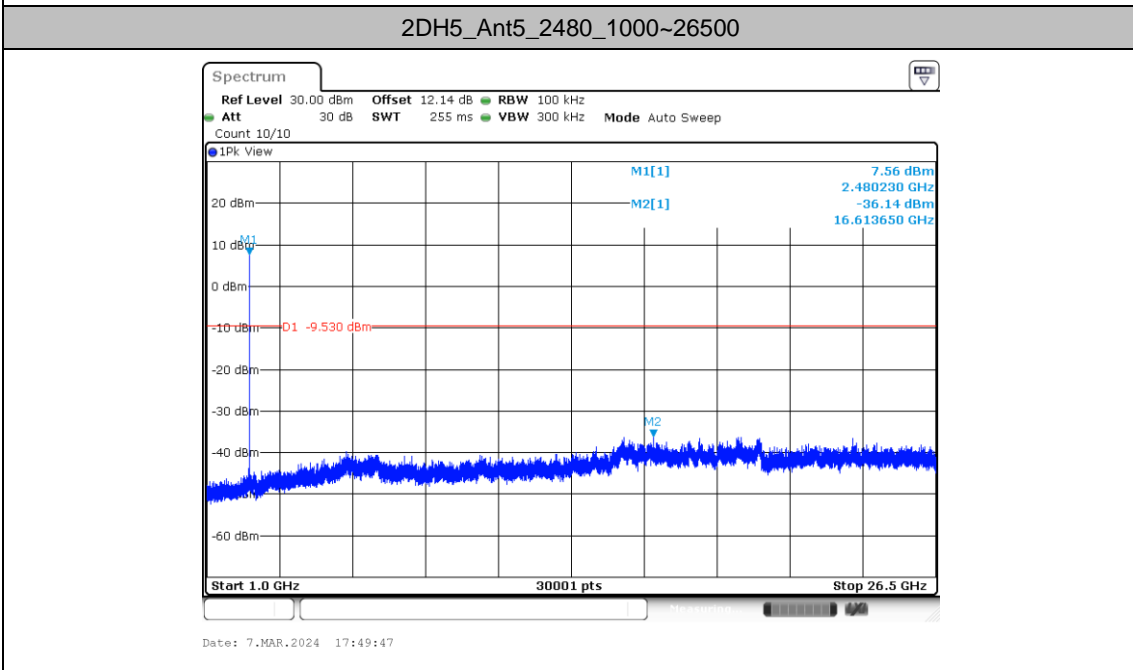
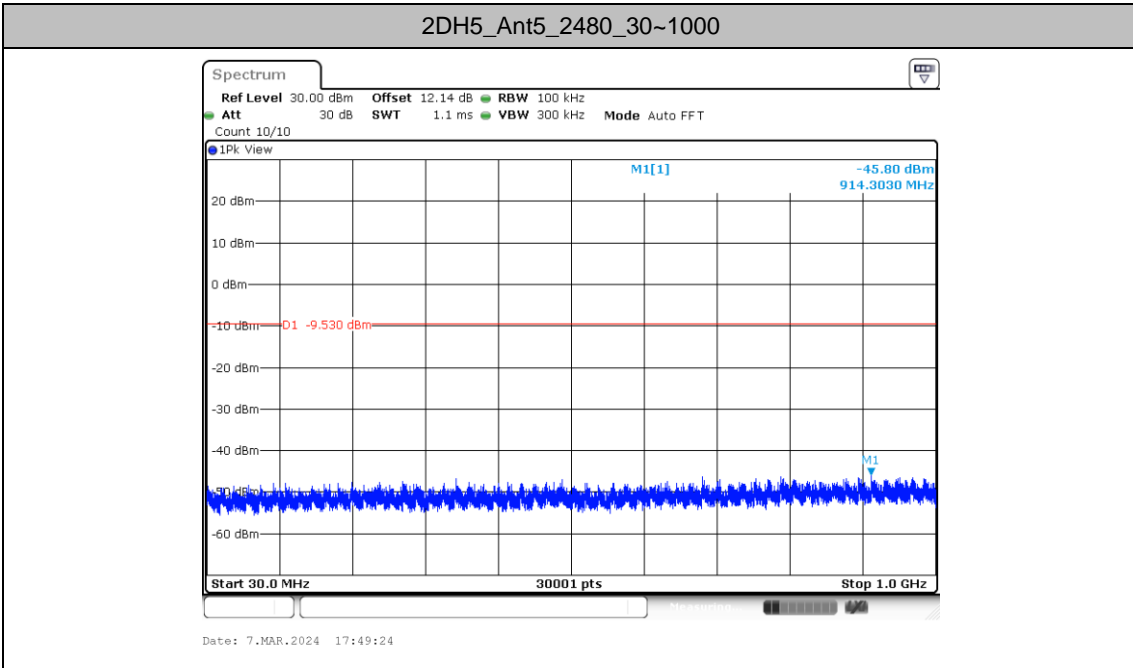


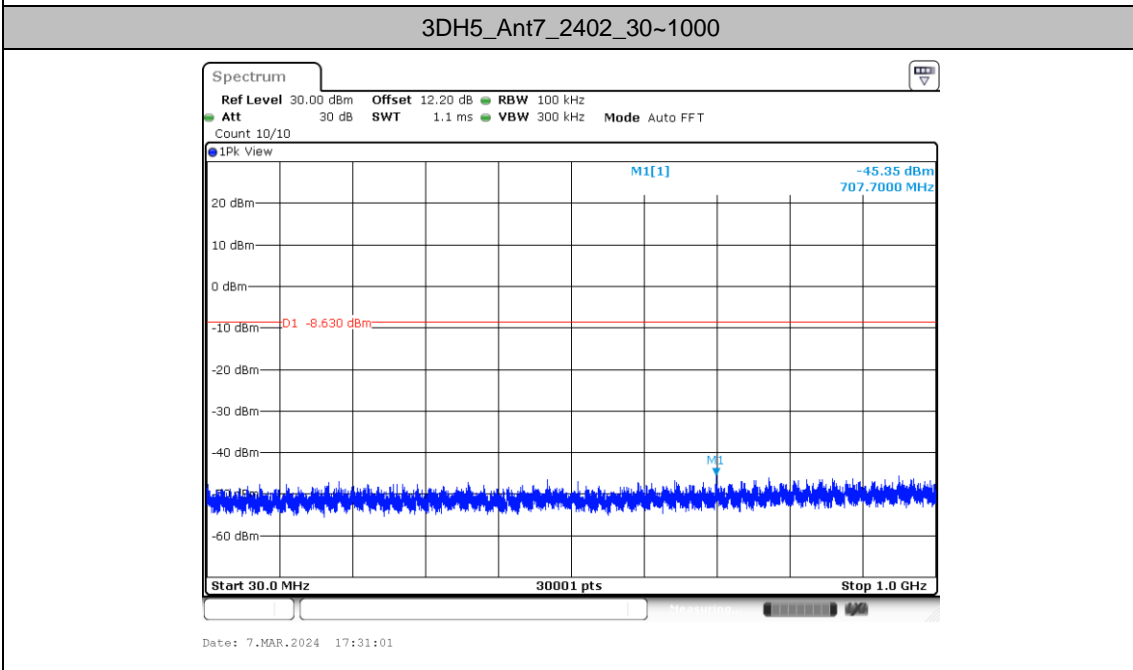
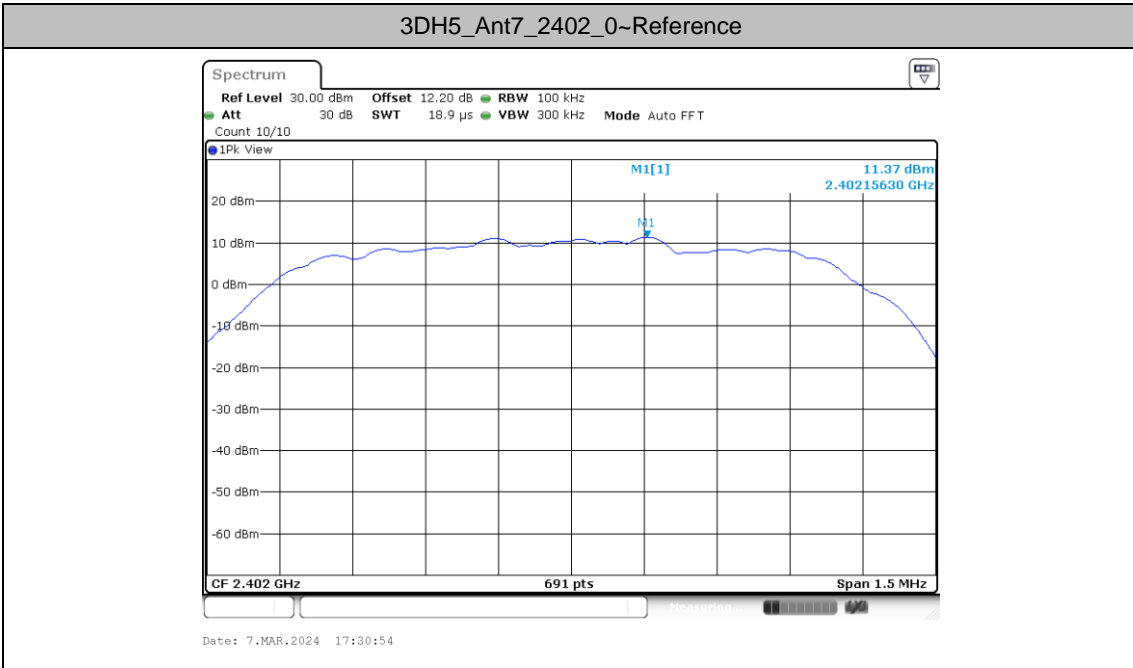


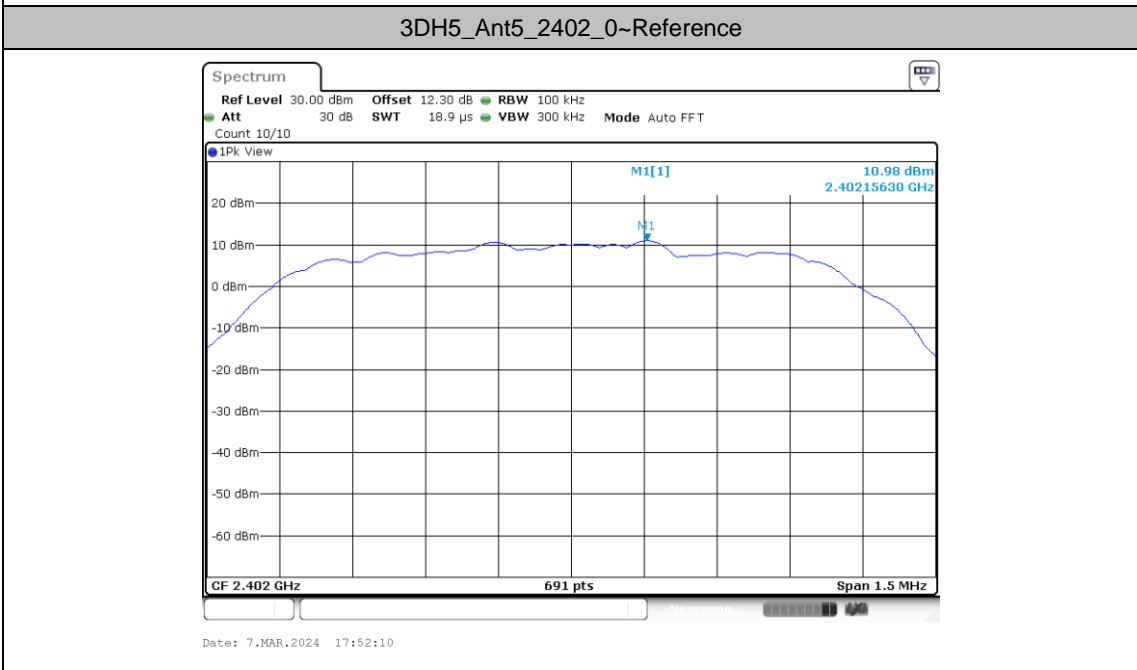
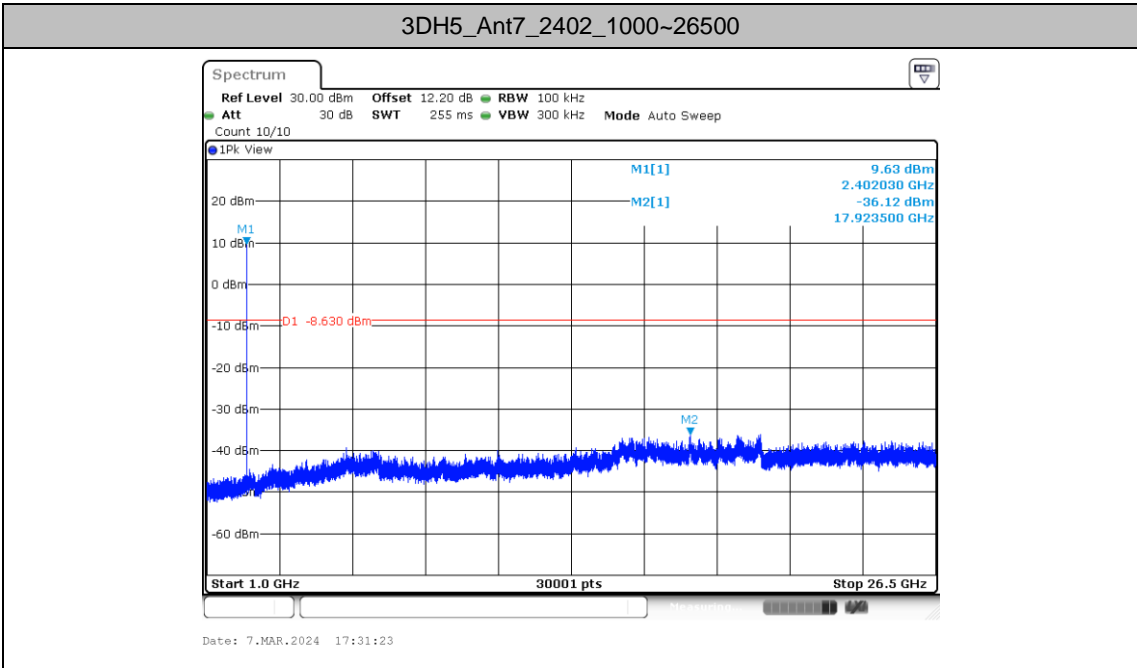


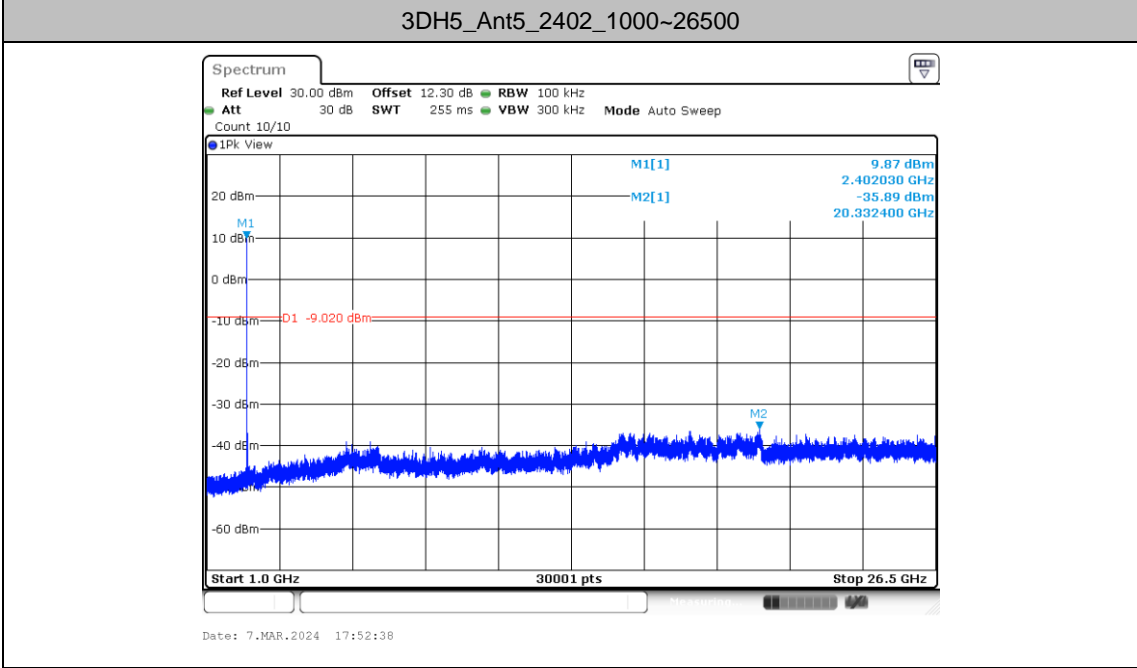
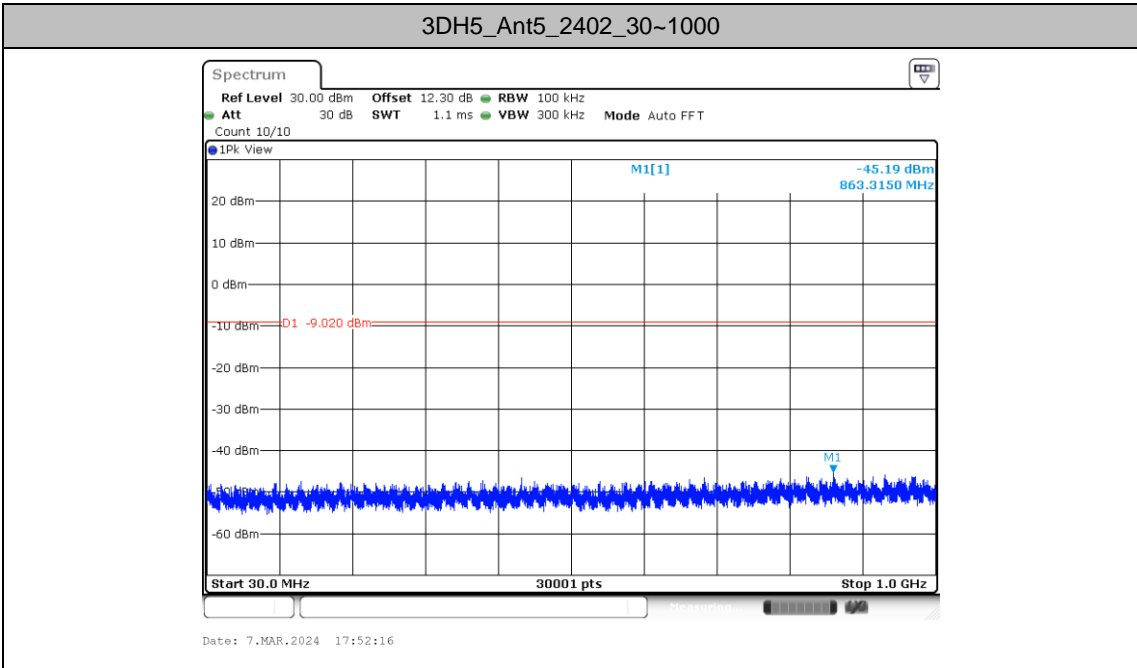


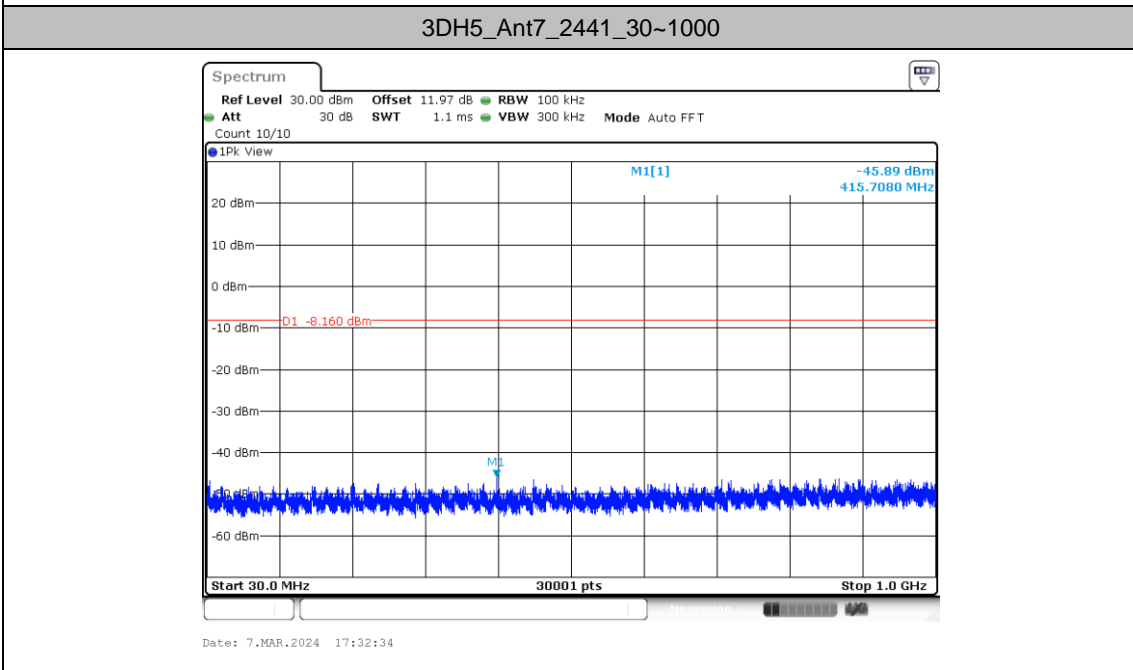
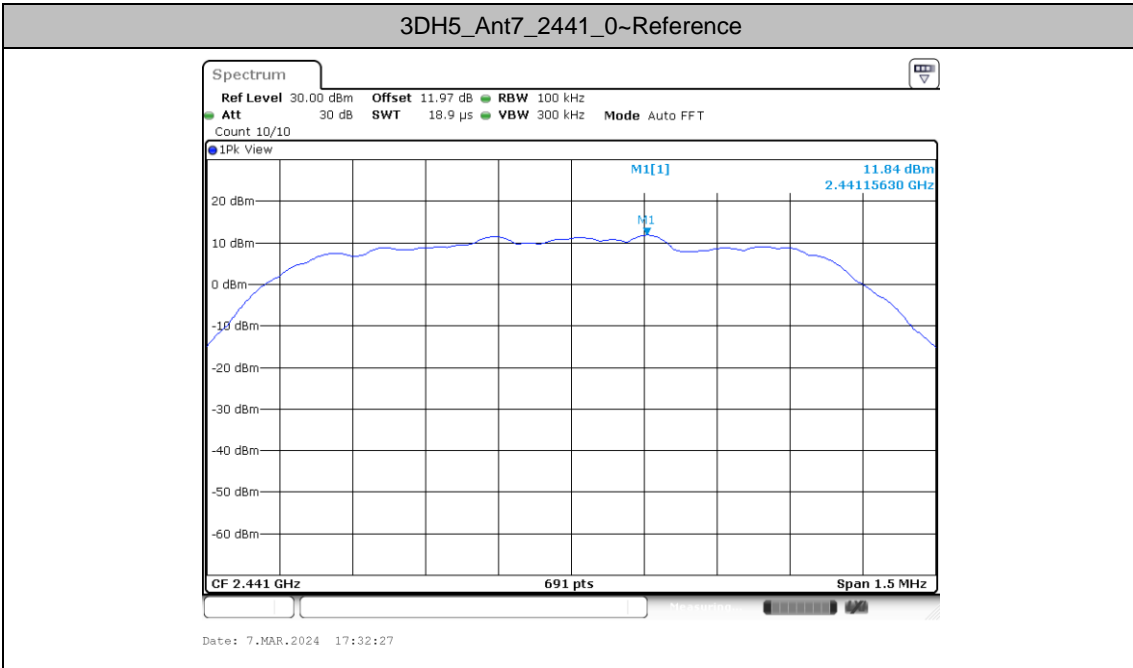


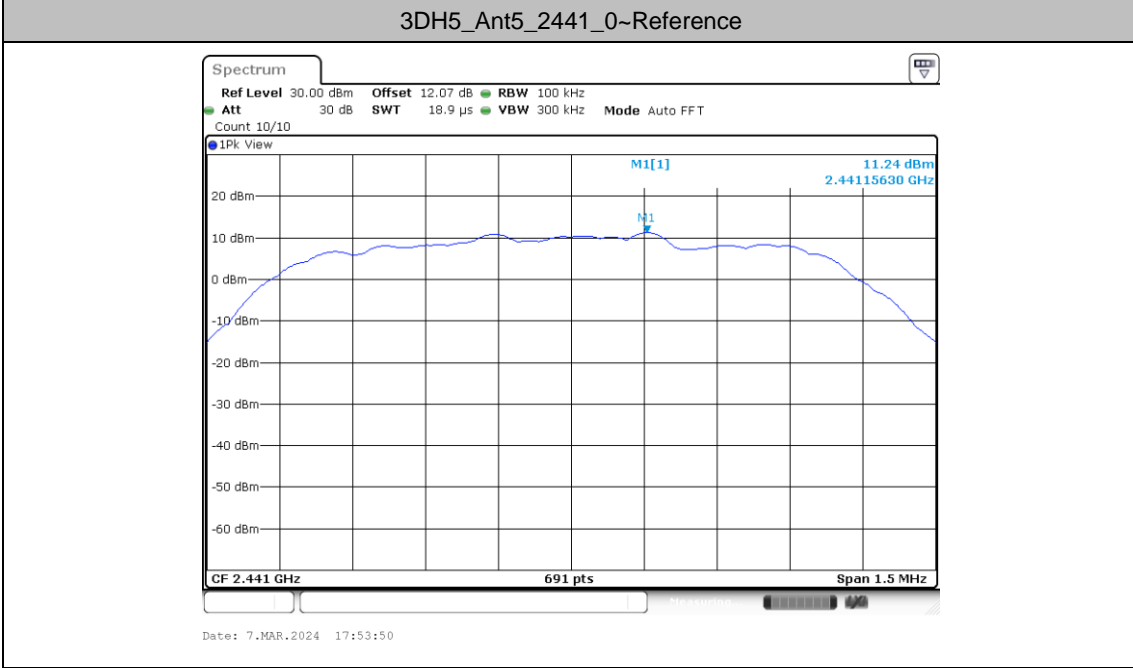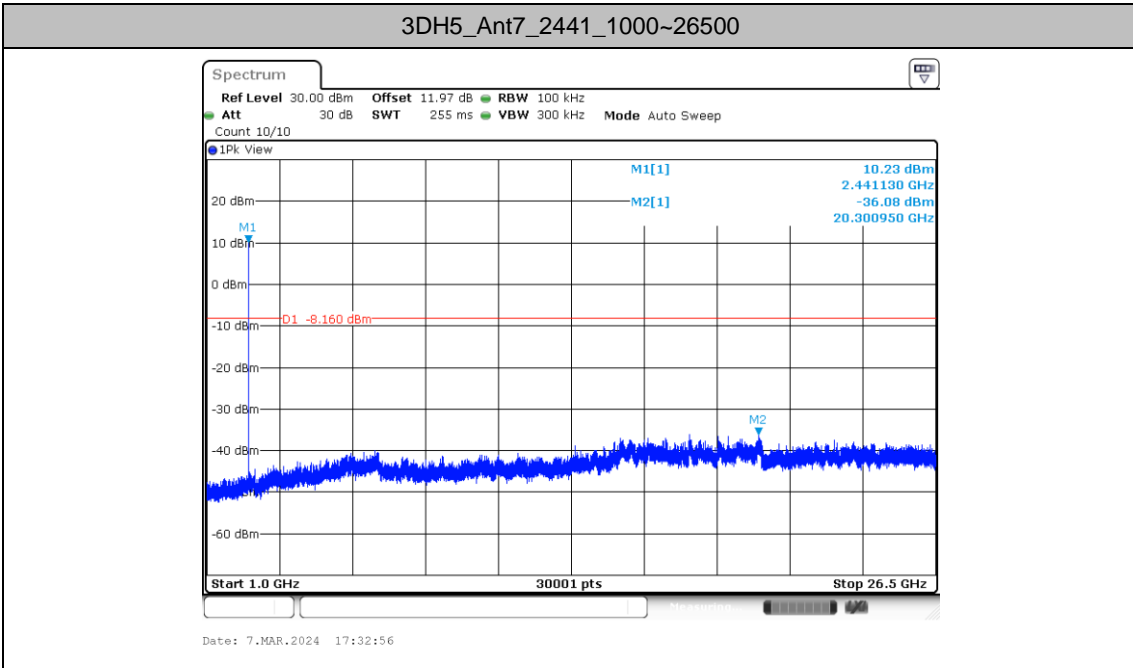

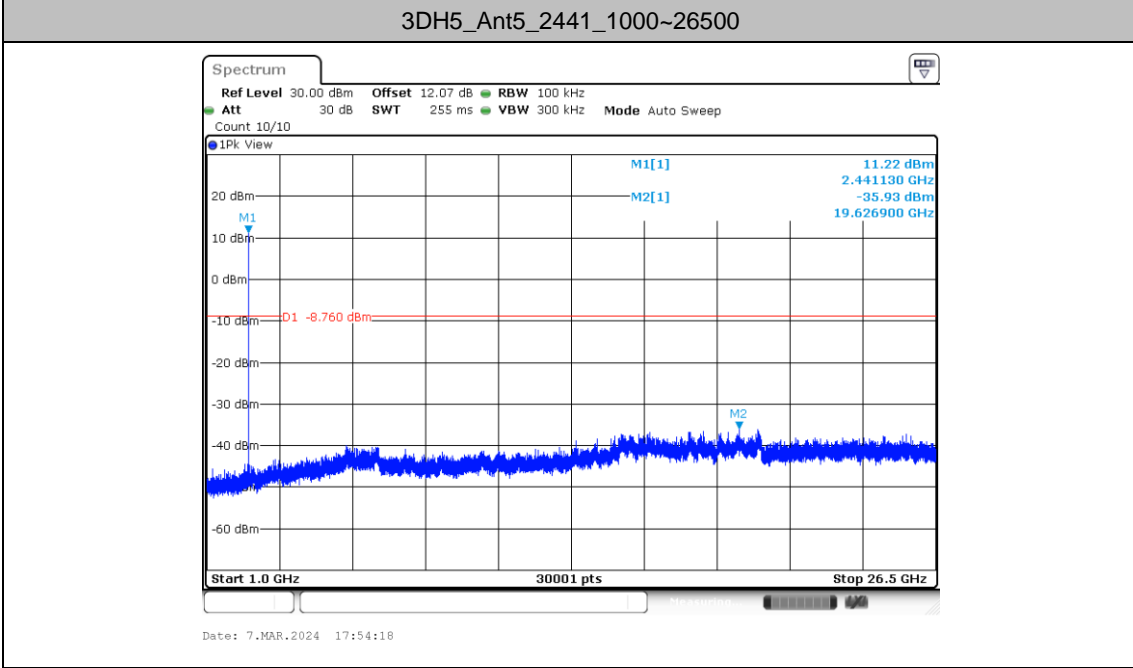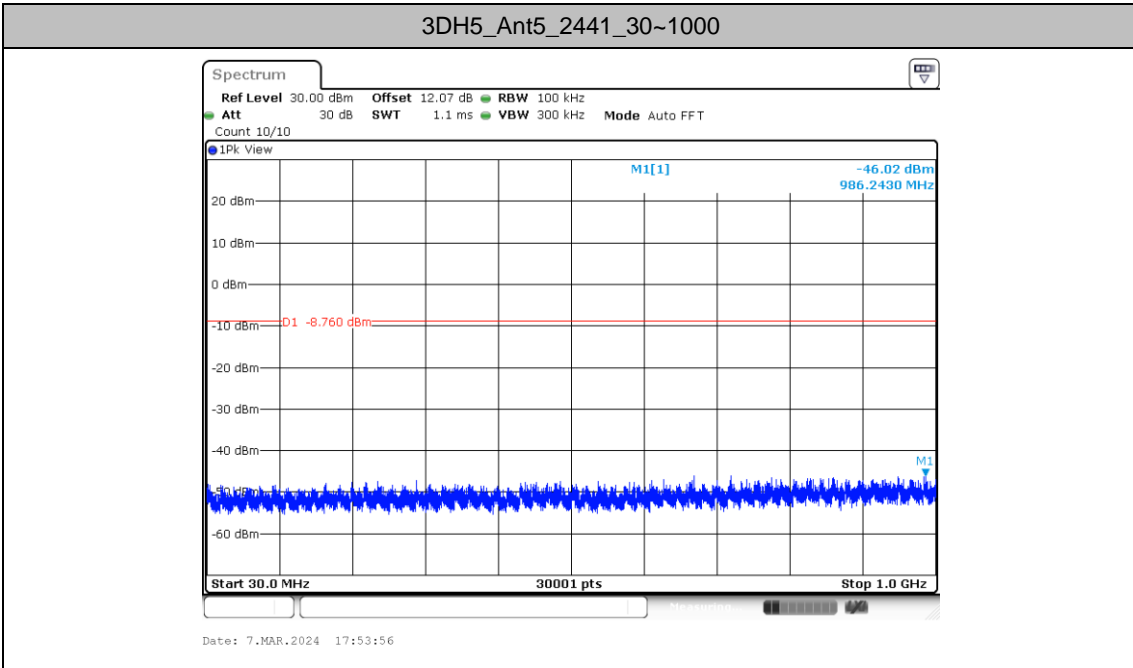

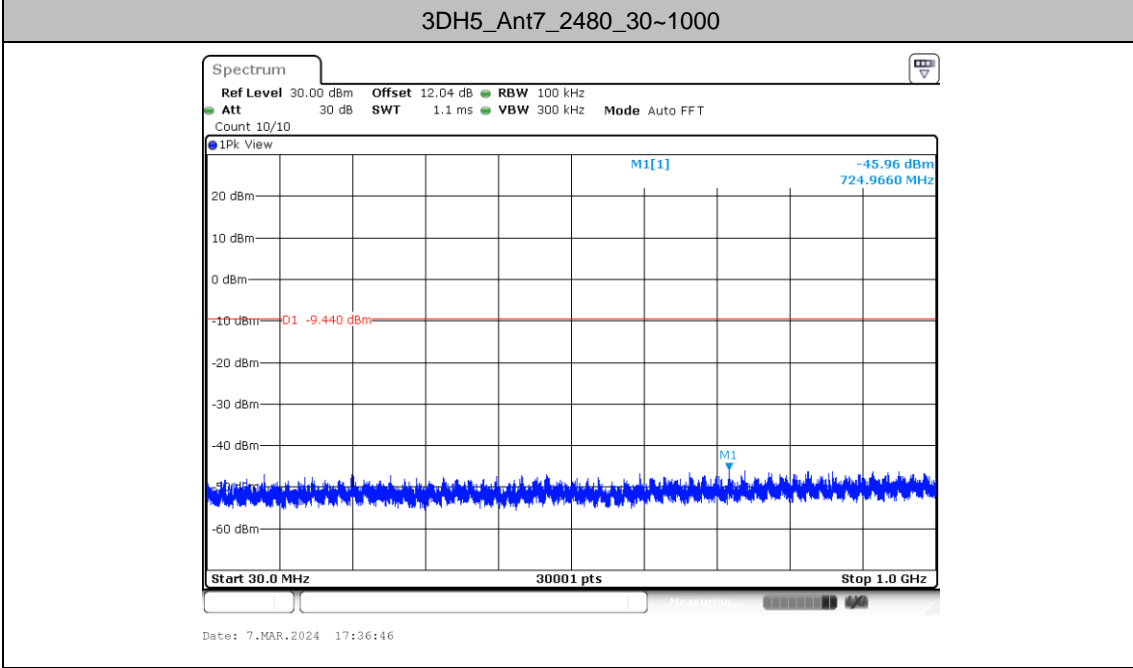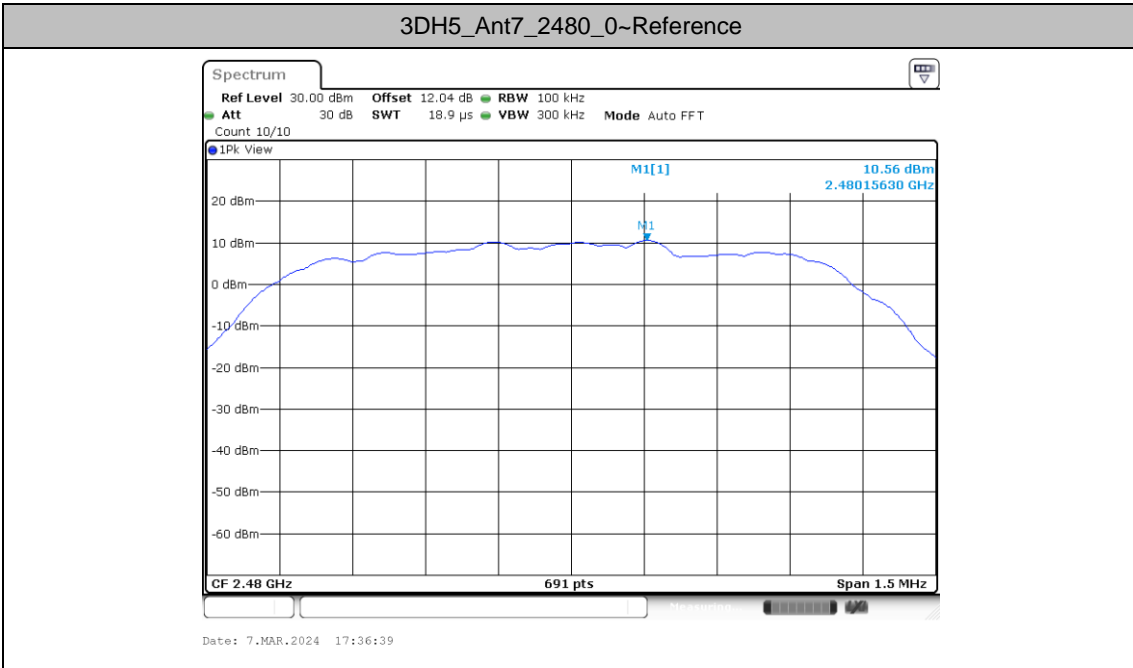

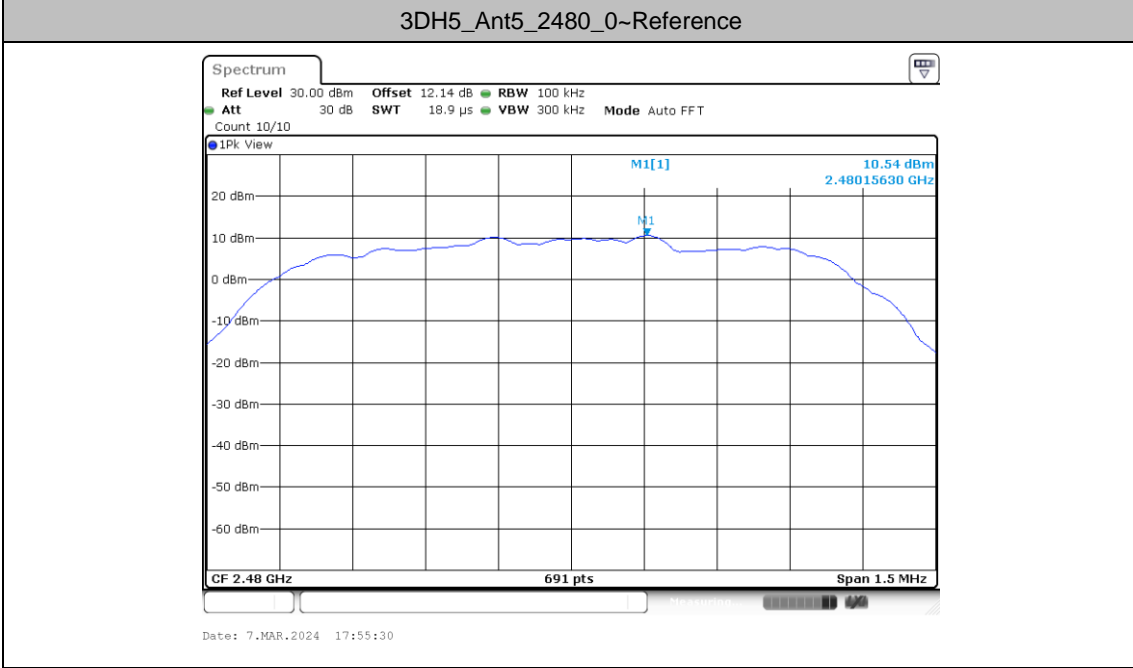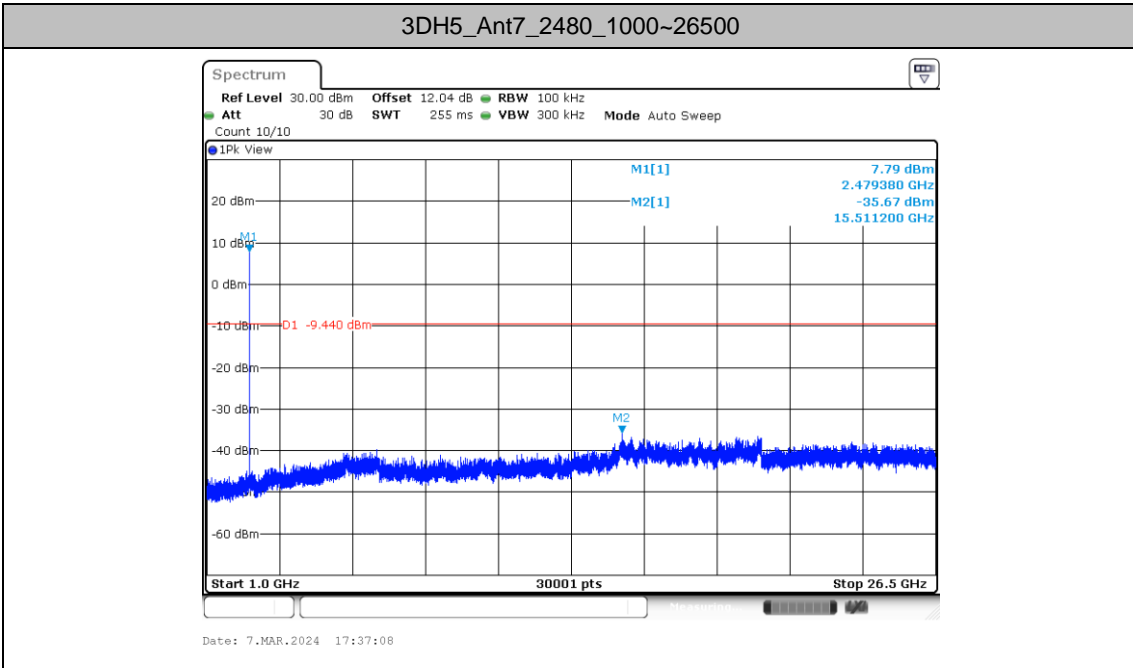


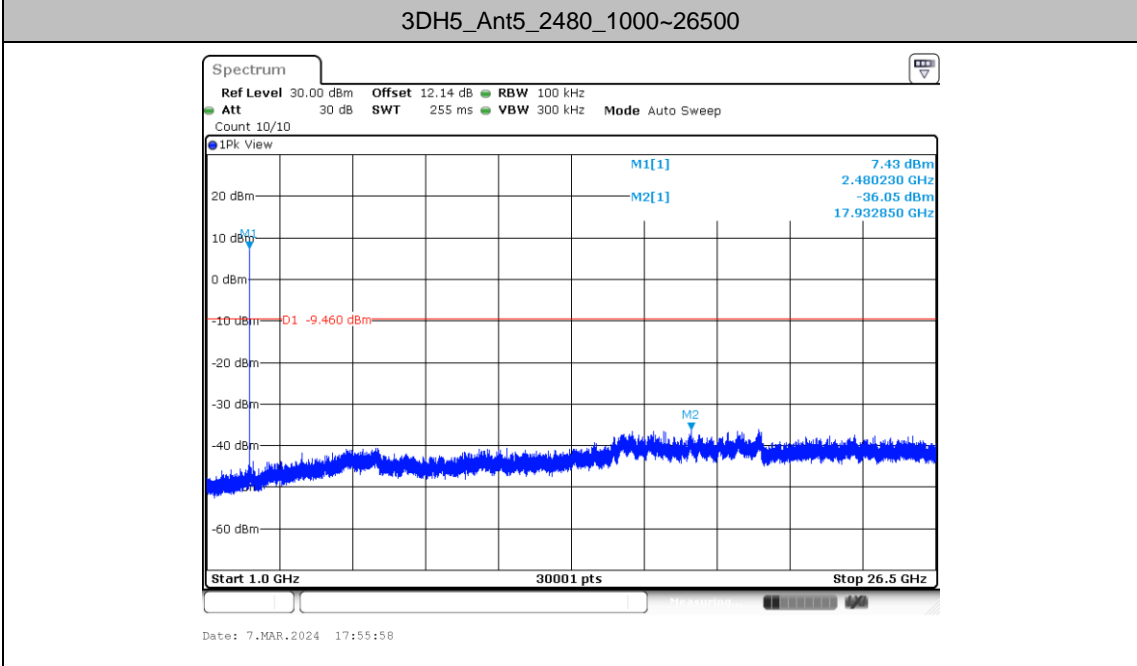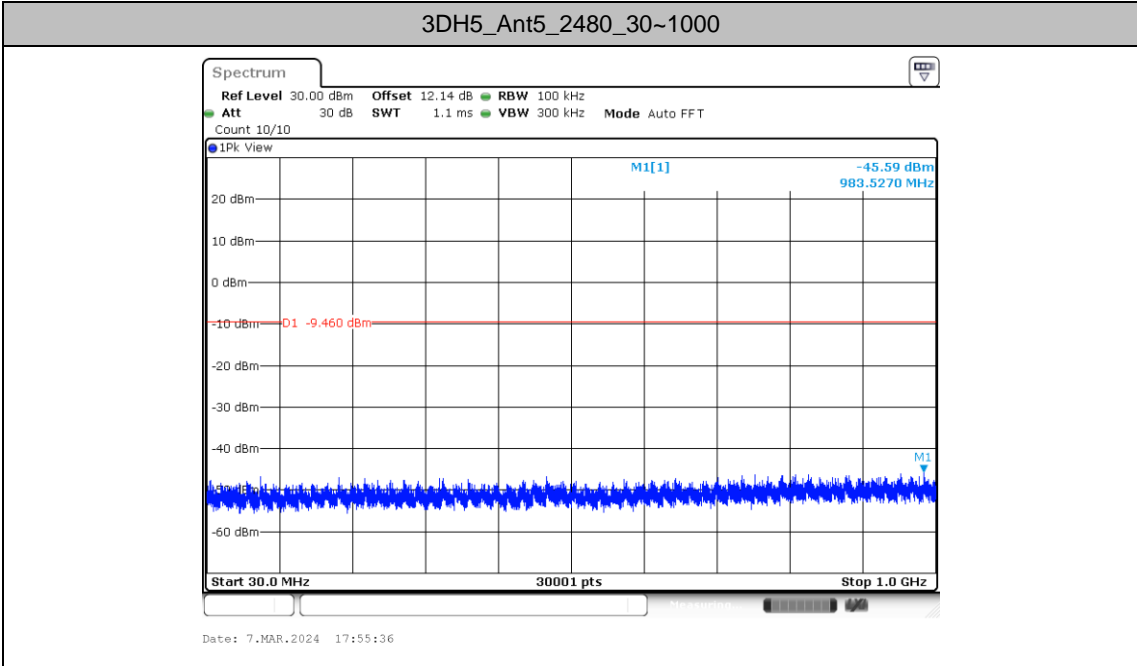



Appendix B. AC Conducted Emission Test Results

Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

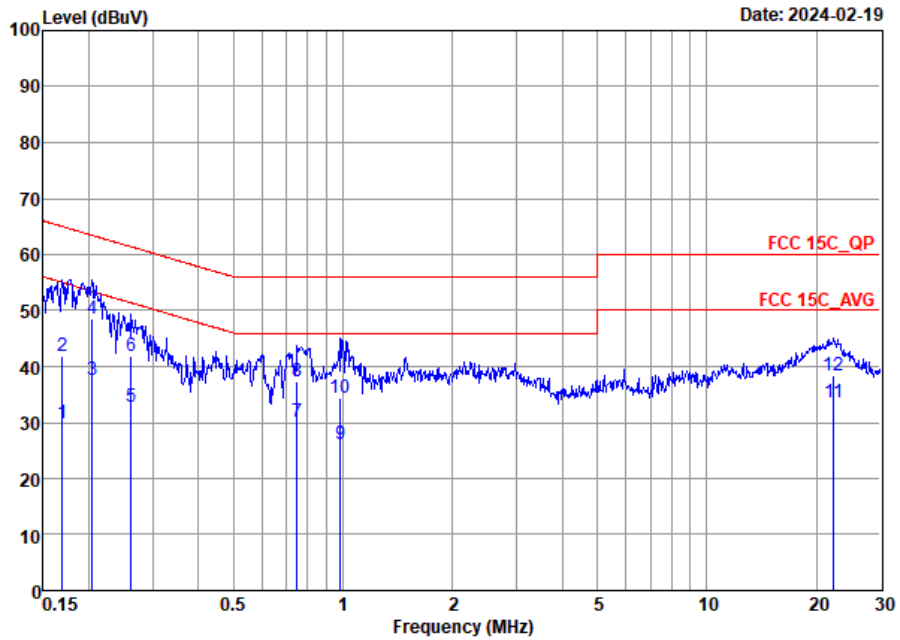


Site : CO01-SZ
 Condition: FCC 15C_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	29.98	-25.01	54.99	9.60	10.24	10.14	Average
2	0.17	41.78	-23.21	64.99	21.40	10.24	10.14	QP
3	0.20	37.61	-15.84	53.45	17.00	10.46	10.15	Average
4 *	0.20	48.51	-14.94	63.45	27.90	10.46	10.15	QP
5	0.26	32.76	-18.62	51.38	12.50	10.11	10.15	Average
6	0.26	41.86	-19.52	61.38	21.60	10.11	10.15	QP
7	0.75	30.19	-15.81	46.00	10.00	10.03	10.16	Average
8	0.75	37.29	-18.71	56.00	17.10	10.03	10.16	QP
9	0.98	26.13	-19.87	46.00	5.70	10.27	10.16	Average
10	0.98	34.53	-21.47	56.00	14.10	10.27	10.16	QP
11	22.30	33.52	-16.48	50.00	12.71	10.16	10.65	Average
12	22.30	38.52	-21.48	60.00	17.71	10.16	10.65	QP



Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

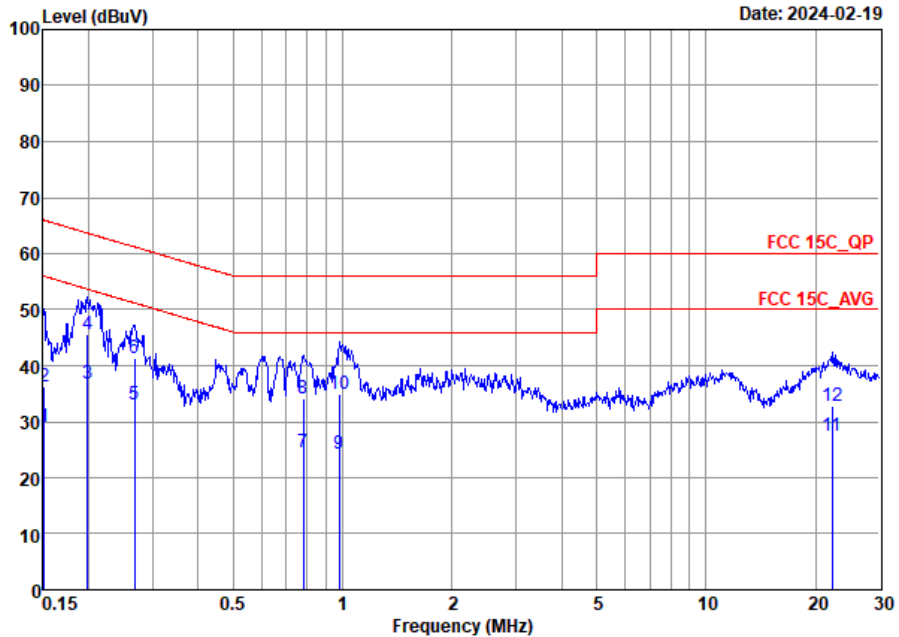

Site : CO01-SZ
 Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	28.98	-26.98	55.96	8.70	10.15	10.13	Average
2	0.15	36.18	-29.78	65.96	15.90	10.15	10.13	QP
3 *	0.20	36.83	-16.84	53.67	16.40	10.28	10.15	Average
4	0.20	45.73	-17.94	63.67	25.30	10.28	10.15	QP
5	0.27	33.03	-18.17	51.20	12.61	10.27	10.15	Average
6	0.27	41.43	-19.77	61.20	21.01	10.27	10.15	QP
7	0.78	24.52	-21.48	46.00	4.10	10.26	10.16	Average
8	0.78	34.22	-21.78	56.00	13.80	10.26	10.16	QP
9	0.98	24.21	-21.79	46.00	3.80	10.25	10.16	Average
10	0.98	34.91	-21.09	56.00	14.50	10.25	10.16	QP
11	22.18	27.58	-22.42	50.00	6.81	10.12	10.65	Average
12	22.18	32.78	-27.22	60.00	12.01	10.12	10.65	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	48~49%
		Temperature :	24°C~25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	5+7	Bluetooth BR_GFSK	00	2402	1DH5	-	Flip Open
Mode 2	2400-2483.5	5+7	Bluetooth BR_GFSK	39	2441	1DH5	-	Flip Open
Mode 3	2400-2483.5	5+7	Bluetooth BR_GFSK	78	2480	1DH5	-	Flip Open
Mode 4	2400-2483.5	5+7	Bluetooth BR_GFSK LF	78	2480	1DH5	-	LF
Mode 5	2400-2483.5	5+7	Bluetooth BR_GFSK	78	2480	1DH5	-	Fold Up
Mode 6	2400-2483.5	7	Bluetooth BR_GFSK	00	2402	1DH5	-	Flip Open
Mode 7	2400-2483.5	7	Bluetooth BR_GFSK	39	2441	1DH5	-	Flip Open
Mode 8	2400-2483.5	7	Bluetooth BR_GFSK	78	2480	1DH5	-	Flip Open
Mode 9	2400-2483.5	7	Bluetooth BR_GFSK LF	78	2480	1DH5	-	LF
Mode 10	2400-2483.5	5	Bluetooth BR_GFSK	00	2402	1DH5	-	Flip Open
Mode 11	2400-2483.5	5	Bluetooth BR_GFSK	39	2441	1DH5	-	Flip Open
Mode 12	2400-2483.5	5	Bluetooth BR_GFSK	78	2480	1DH5	-	Flip Open
Mode 13	2400-2483.5	5	Bluetooth BR_GFSK LF	78	2480	1DH5	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2388.65	45.17	74.00	-28.83	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	44.44	74.00	-29.56	V	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	45.77	74.00	-28.23	V	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2483.54	49.69	74.00	-24.31	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	45.47	74.00	-28.53	V	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK LF	78	53.28	32.57	40.00	-7.43	V	Peak	Pass	LF
5	Bluetooth BR_GFSK	78	2483.54	46.81	74.00	-27.19	V	PEAK	Pass	Band Edge
5	Bluetooth BR_GFSK	78	7440.00	44.93	74.00	-29.07	V	Peak	Pass	Harmonic
6	Bluetooth BR_GFSK	00	2326.59	44.86	74.00	-29.14	V	PEAK	Pass	Band Edge
6	Bluetooth BR_GFSK	00	4804.00	42.83	74.00	-31.17	H	Peak	Pass	Harmonic
7	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
7	Bluetooth BR_GFSK	39	7323.00	43.67	74.00	-30.33	V	Peak	Pass	Harmonic
8	Bluetooth BR_GFSK	78	2483.54	47.34	74.00	-26.66	V	PEAK	Pass	Band Edge
8	Bluetooth BR_GFSK	78	7440.00	44.00	74.00	-30.00	H	Peak	Pass	Harmonic
9	Bluetooth BR_GFSK LF	78	53.28	31.92	40.00	-8.08	V	Peak	Pass	LF
10	Bluetooth BR_GFSK	00	2385.92	44.71	74.00	-29.29	V	PEAK	Pass	Band Edge
10	Bluetooth BR_GFSK	00	4804.00	43.21	74.00	-30.79	V	Peak	Pass	Harmonic
11	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
11	Bluetooth BR_GFSK	39	7323.00	44.79	74.00	-29.21	V	Peak	Pass	Harmonic
12	Bluetooth BR_GFSK	78	2483.54	48.13	74.00	-25.87	V	PEAK	Pass	Band Edge
12	Bluetooth BR_GFSK	78	7440.00	43.47	74.00	-30.53	V	Peak	Pass	Harmonic
13	Bluetooth BR_GFSK LF	78	53.28	31.03	40.00	-8.97	V	Peak	Pass	LF



Mode	1																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																	
ANT	5+7																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<p style="text-align: right;">Date: 2024-03-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.87</td> <td>44.58</td> <td>74.00</td> <td>-29.42</td> <td>41.77</td> <td>30.72</td> <td>5.35</td> <td>33.26</td> <td>236</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2384.87</td> <td>19.79</td> <td>54.00</td> <td>-34.21</td> <td>16.98</td> <td>30.72</td> <td>5.35</td> <td>33.26</td> <td>236</td> <td>172</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2384.87	44.58	74.00	-29.42	41.77	30.72	5.35	33.26	236	172	PEAK	2	2384.87	19.79	54.00	-34.21	16.98	30.72	5.35	33.26	236	172	AVERAGE	<p style="text-align: right;">Date: 2024-03-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>82.47</td> <td>74.00</td> <td>8.47</td> <td>79.62</td> <td>30.72</td> <td>5.37</td> <td>33.24</td> <td>236</td> <td>172</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>57.68</td> <td>74.00</td> <td>-16.32</td> <td>54.83</td> <td>30.72</td> <td>5.37</td> <td>33.24</td> <td>236</td> <td>172</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	82.47	74.00	8.47	79.62	30.72	5.37	33.24	236	172	PEAK	2	2402.00	57.68	74.00	-16.32	54.83	30.72	5.37	33.24	236	172	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2384.87	44.58	74.00	-29.42	41.77	30.72	5.35	33.26	236	172	PEAK																																																																																							
2	2384.87	19.79	54.00	-34.21	16.98	30.72	5.35	33.26	236	172	AVERAGE																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2402.00	82.47	74.00	8.47	79.62	30.72	5.37	33.24	236	172	PEAK																																																																																							
2	2402.00	57.68	74.00	-16.32	54.83	30.72	5.37	33.24	236	172	AVERAGE																																																																																							



Mode	1																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	<p style="text-align: right;">Date: 2024-03-08</p>	<p style="text-align: right;">Date: 2024-03-08</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>45.17</td> <td>74.00</td> <td>-28.83</td> <td>42.35</td> <td>30.72</td> <td>5.36</td> <td>33.26</td> <td>400</td> <td>105</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2388.65</td> <td>20.38</td> <td>54.00</td> <td>-33.62</td> <td>17.56</td> <td>30.72</td> <td>5.36</td> <td>33.26</td> <td>400</td> <td>105</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.65	45.17	74.00	-28.83	42.35	30.72	5.36	33.26	400	105	PEAK	2	2388.65	20.38	54.00	-33.62	17.56	30.72	5.36	33.26	400	105	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.15</td> <td>-----</td> <td>-----</td> <td>93.30</td> <td>30.72</td> <td>5.37</td> <td>33.24</td> <td>400</td> <td>105</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>71.36</td> <td>-----</td> <td>-----</td> <td>68.51</td> <td>30.72</td> <td>5.37</td> <td>33.24</td> <td>400</td> <td>105</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	96.15	-----	-----	93.30	30.72	5.37	33.24	400	105	PEAK	2	2402.00	71.36	-----	-----	68.51	30.72	5.37	33.24	400	105
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	2388.65	45.17	74.00	-28.83	42.35	30.72	5.36	33.26	400	105	PEAK																																																																																						
2	2388.65	20.38	54.00	-33.62	17.56	30.72	5.36	33.26	400	105	AVERAGE																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	2402.00	96.15	-----	-----	93.30	30.72	5.37	33.24	400	105	PEAK																																																																																						
2	2402.00	71.36	-----	-----	68.51	30.72	5.37	33.24	400	105	AVERAGE																																																																																						



Mode	1																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																							
ANT	5+7																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<p style="text-align: right;">Date: 2024-03-18</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.84</td> <td>74.00</td> <td>-30.16</td> <td>64.01</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>19.05</td> <td>54.00</td> <td>-34.95</td> <td>39.22</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.84	74.00	-30.16	64.01	35.73	8.94	64.84	---	---	Peak	2	4804.00	19.05	54.00	-34.95	39.22	35.73	8.94	64.84	---	---	Average	<p style="text-align: right;">Date: 2024-03-18</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>44.44</td> <td>74.00</td> <td>-29.56</td> <td>64.61</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>19.65</td> <td>54.00</td> <td>-34.35</td> <td>39.82</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.44	74.00	-29.56	64.61	35.73	8.94	64.84	---	---	Peak	2	4804.00	19.65	54.00	-34.35	39.82	35.73	8.94	64.84	---	---	Average
	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	4804.00	43.84	74.00	-30.16	64.01	35.73	8.94	64.84	---	---	Peak																																																																																													
2	4804.00	19.05	54.00	-34.95	39.22	35.73	8.94	64.84	---	---	Average																																																																																													
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	4804.00	44.44	74.00	-29.56	64.61	35.73	8.94	64.84	---	---	Peak																																																																																													
2	4804.00	19.65	54.00	-34.35	39.82	35.73	8.94	64.84	---	---	Average																																																																																													



Mode	2																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																							
ANT	5+7																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg																																																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>43.14</td> <td>74.00</td> <td>-30.86</td> <td>63.39</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>18.35</td> <td>54.00</td> <td>-35.65</td> <td>38.60</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>--- Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>44.84</td> <td>74.00</td> <td>-29.16</td> <td>62.65</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>--- Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>20.05</td> <td>54.00</td> <td>-33.95</td> <td>37.86</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>--- Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4882.00	43.14	74.00	-30.86	63.39	35.92	8.70	64.87	--- Peak	2	4882.00	18.35	54.00	-35.65	38.60	35.92	8.70	64.87	--- Average	3	7323.00	44.84	74.00	-29.16	62.65	36.87	10.18	64.86	--- Peak	4	7323.00	20.05	54.00	-33.95	37.86	36.87	10.18	64.86	--- Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>43.48</td> <td>74.00</td> <td>-30.52</td> <td>63.73</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>18.69</td> <td>54.00</td> <td>-35.31</td> <td>38.94</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>--- Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>63.58</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>--- Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>20.98</td> <td>54.00</td> <td>-33.02</td> <td>38.79</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>--- Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4882.00	43.48	74.00	-30.52	63.73	35.92	8.70	64.87	--- Peak	2	4882.00	18.69	54.00	-35.31	38.94	35.92	8.70	64.87	--- Average	3	7323.00	45.77	74.00	-28.23	63.58	36.87	10.18	64.86	--- Peak	4	7323.00	20.98	54.00	-33.02	38.79	36.87	10.18	64.86	--- Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																
1	4882.00	43.14	74.00	-30.86	63.39	35.92	8.70	64.87	--- Peak																																																																																																																															
2	4882.00	18.35	54.00	-35.65	38.60	35.92	8.70	64.87	--- Average																																																																																																																															
3	7323.00	44.84	74.00	-29.16	62.65	36.87	10.18	64.86	--- Peak																																																																																																																															
4	7323.00	20.05	54.00	-33.95	37.86	36.87	10.18	64.86	--- Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																
1	4882.00	43.48	74.00	-30.52	63.73	35.92	8.70	64.87	--- Peak																																																																																																																															
2	4882.00	18.69	54.00	-35.31	38.94	35.92	8.70	64.87	--- Average																																																																																																																															
3	7323.00	45.77	74.00	-28.23	63.58	36.87	10.18	64.86	--- Peak																																																																																																																															
4	7323.00	20.98	54.00	-33.02	38.79	36.87	10.18	64.86	--- Average																																																																																																																															



Mode	3																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																						
ANT	5+7																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>49.69</td> <td>74.00</td> <td>-24.31</td> <td>46.65</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>295</td> <td>122</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.54</td> <td>24.90</td> <td>54.00</td> <td>-29.10</td> <td>21.86</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>295</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	49.69	74.00	-24.31	46.65	30.70	5.46	33.12	295	122	PEAK	2	2483.54	24.90	54.00	-29.10	21.86	30.70	5.46	33.12	295	122	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>101.02</td> <td>-----</td> <td>-----</td> <td>97.99</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>295</td> <td>122</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>76.23</td> <td>-----</td> <td>-----</td> <td>73.20</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>295</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.02	-----	-----	97.99	30.70	5.46	33.13	295	122	PEAK	2	2480.00	76.23	-----	-----	73.20	30.70	5.46	33.13	295	122
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2483.54	49.69	74.00	-24.31	46.65	30.70	5.46	33.12	295	122	PEAK																																																																																												
2	2483.54	24.90	54.00	-29.10	21.86	30.70	5.46	33.12	295	122	AVERAGE																																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2480.00	101.02	-----	-----	97.99	30.70	5.46	33.13	295	122	PEAK																																																																																												
2	2480.00	76.23	-----	-----	73.20	30.70	5.46	33.13	295	122	AVERAGE																																																																																												



Mode	3																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																						
ANT	5+7																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.60</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>42.73</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>302</td> <td>212</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.60</td> <td>20.98</td> <td>54.00</td> <td>-33.02</td> <td>17.94</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>302</td> <td>212</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	45.77	74.00	-28.23	42.73	30.70	5.46	33.12	302	212	PEAK	2	2483.60	20.98	54.00	-33.02	17.94	30.70	5.46	33.12	302	212	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.71</td> <td>-----</td> <td>-----</td> <td>93.68</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>302</td> <td>212</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>71.92</td> <td>-----</td> <td>-----</td> <td>68.89</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>302</td> <td>212</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.71	-----	-----	93.68	30.70	5.46	33.13	302	212	PEAK	2	2480.00	71.92	-----	-----	68.89	30.70	5.46	33.13	302	212
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2483.60	45.77	74.00	-28.23	42.73	30.70	5.46	33.12	302	212	PEAK																																																																																												
2	2483.60	20.98	54.00	-33.02	17.94	30.70	5.46	33.12	302	212	AVERAGE																																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2480.00	96.71	-----	-----	93.68	30.70	5.46	33.13	302	212	PEAK																																																																																												
2	2480.00	71.92	-----	-----	68.89	30.70	5.46	33.13	302	212	AVERAGE																																																																																												



Mode	3																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																
ANT	5+7																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg	<p>Date: 2024-03-25</p>	<p>Date: 2024-03-25</p>																																																																																																																																															
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.55</td> <td>74.00</td> <td>-30.45</td> <td>63.89</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>18.76</td> <td>54.00</td> <td>-35.24</td> <td>39.10</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>45.00</td> <td>74.00</td> <td>-29.00</td> <td>62.87</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>20.21</td> <td>54.00</td> <td>-33.79</td> <td>38.08</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	43.55	74.00	-30.45	63.89	36.10	8.46	64.90	---	---	Peak	2	4960.00	18.76	54.00	-35.24	39.10	36.10	8.46	64.90	---	---	Average	3	7440.00	45.00	74.00	-29.00	62.87	36.82	10.17	64.86	---	---	Peak	4	7440.00	20.21	54.00	-33.79	38.08	36.82	10.17	64.86	---	---	Average	<table border="1"> <thead> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>44.04</td> <td>74.00</td> <td>-29.96</td> <td>64.38</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>19.25</td> <td>54.00</td> <td>-34.75</td> <td>39.59</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>45.47</td> <td>74.00</td> <td>-28.53</td> <td>63.34</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>20.68</td> <td>54.00</td> <td>-33.32</td> <td>38.55</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Avg	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	44.04	74.00	-29.96	64.38	36.10	8.46	64.90	---	---	Peak	2	4960.00	19.25	54.00	-34.75	39.59	36.10	8.46	64.90	---	---	Average	3	7440.00	45.47	74.00	-28.53	63.34	36.82	10.17	64.86	---	---	Peak	4	7440.00	20.68	54.00	-33.32	38.55	36.82	10.17	64.86	---	---
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																							
1	4960.00	43.55	74.00	-30.45	63.89	36.10	8.46	64.90	---	---	Peak																																																																																																																																						
2	4960.00	18.76	54.00	-35.24	39.10	36.10	8.46	64.90	---	---	Average																																																																																																																																						
3	7440.00	45.00	74.00	-29.00	62.87	36.82	10.17	64.86	---	---	Peak																																																																																																																																						
4	7440.00	20.21	54.00	-33.79	38.08	36.82	10.17	64.86	---	---	Average																																																																																																																																						
Avg	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																							
1	4960.00	44.04	74.00	-29.96	64.38	36.10	8.46	64.90	---	---	Peak																																																																																																																																						
2	4960.00	19.25	54.00	-34.75	39.59	36.10	8.46	64.90	---	---	Average																																																																																																																																						
3	7440.00	45.47	74.00	-28.53	63.34	36.82	10.17	64.86	---	---	Peak																																																																																																																																						
4	7440.00	20.68	54.00	-33.32	38.55	36.82	10.17	64.86	---	---	Average																																																																																																																																						

Note: Only the worst case has assessed 18G ~26GHz to test.



Mode	4																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK LF_CH78_2480MHz																																																																																																																																																																									
ANT	5+7																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2024-03-18</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>24.25</td><td>40.00</td><td>-15.75</td><td>30.12</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>96.93</td><td>22.85</td><td>43.50</td><td>-20.65</td><td>37.99</td><td>15.70</td><td>1.00</td><td>31.84</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>151.25</td><td>24.99</td><td>43.50</td><td>-18.51</td><td>38.33</td><td>17.10</td><td>1.26</td><td>31.70</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>193.93</td><td>31.61</td><td>43.50</td><td>-11.89</td><td>47.01</td><td>14.80</td><td>1.41</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>334.58</td><td>23.09</td><td>46.00</td><td>-22.91</td><td>32.60</td><td>20.00</td><td>1.92</td><td>31.43</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>525.67</td><td>26.72</td><td>46.00</td><td>-19.28</td><td>31.52</td><td>24.10</td><td>2.40</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	24.25	40.00	-15.75	30.12	25.20	0.53	31.60	---	---	Peak	2	96.93	22.85	43.50	-20.65	37.99	15.70	1.00	31.84	---	---	Peak	3	151.25	24.99	43.50	-18.51	38.33	17.10	1.26	31.70	---	---	Peak	4	193.93	31.61	43.50	-11.89	47.01	14.80	1.41	31.61	---	---	Peak	5	334.58	23.09	46.00	-22.91	32.60	20.00	1.92	31.43	---	---	Peak	6	525.67	26.72	46.00	-19.28	31.52	24.10	2.40	31.30	---	---	Peak	<p>Date: 2024-03-18</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>53.28</td><td>32.57</td><td>40.00</td><td>-7.43</td><td>50.47</td><td>13.20</td><td>0.73</td><td>31.83</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>154.16</td><td>27.75</td><td>43.50</td><td>-15.75</td><td>41.17</td><td>17.00</td><td>1.27</td><td>31.69</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>194.90</td><td>30.79</td><td>43.50</td><td>-12.71</td><td>46.19</td><td>14.80</td><td>1.41</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>416.06</td><td>23.59</td><td>46.00</td><td>-22.41</td><td>30.32</td><td>22.64</td><td>2.13</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>548.95</td><td>27.14</td><td>46.00</td><td>-18.86</td><td>30.62</td><td>25.26</td><td>2.46</td><td>31.20</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>806.00</td><td>30.83</td><td>46.00</td><td>-15.17</td><td>30.78</td><td>28.20</td><td>2.95</td><td>31.10</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	53.28	32.57	40.00	-7.43	50.47	13.20	0.73	31.83	---	---	Peak	2	154.16	27.75	43.50	-15.75	41.17	17.00	1.27	31.69	---	---	Peak	3	194.90	30.79	43.50	-12.71	46.19	14.80	1.41	31.61	---	---	Peak	4	416.06	23.59	46.00	-22.41	30.32	22.64	2.13	31.50	---	---	Peak	5	548.95	27.14	46.00	-18.86	30.62	25.26	2.46	31.20	---	---	Peak	6	806.00	30.83	46.00	-15.17	30.78	28.20	2.95	31.10	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																														
1	30.00	24.25	40.00	-15.75	30.12	25.20	0.53	31.60	---	---	Peak																																																																																																																																																															
2	96.93	22.85	43.50	-20.65	37.99	15.70	1.00	31.84	---	---	Peak																																																																																																																																																															
3	151.25	24.99	43.50	-18.51	38.33	17.10	1.26	31.70	---	---	Peak																																																																																																																																																															
4	193.93	31.61	43.50	-11.89	47.01	14.80	1.41	31.61	---	---	Peak																																																																																																																																																															
5	334.58	23.09	46.00	-22.91	32.60	20.00	1.92	31.43	---	---	Peak																																																																																																																																																															
6	525.67	26.72	46.00	-19.28	31.52	24.10	2.40	31.30	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	53.28	32.57	40.00	-7.43	50.47	13.20	0.73	31.83	---	---	Peak																																																																																																																																																															
2	154.16	27.75	43.50	-15.75	41.17	17.00	1.27	31.69	---	---	Peak																																																																																																																																																															
3	194.90	30.79	43.50	-12.71	46.19	14.80	1.41	31.61	---	---	Peak																																																																																																																																																															
4	416.06	23.59	46.00	-22.41	30.32	22.64	2.13	31.50	---	---	Peak																																																																																																																																																															
5	548.95	27.14	46.00	-18.86	30.62	25.26	2.46	31.20	---	---	Peak																																																																																																																																																															
6	806.00	30.83	46.00	-15.17	30.78	28.20	2.95	31.10	---	---	Peak																																																																																																																																																															



Mode	5																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak	<p style="text-align: right;">Date: 2024-03-13</p>	<p style="text-align: right;">Date: 2024-03-13</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.95</td> <td>45.02</td> <td>74.00</td> <td>-28.98</td> <td>41.98</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>200</td> <td>213</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.95</td> <td>20.23</td> <td>54.00</td> <td>-33.77</td> <td>17.19</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>200</td> <td>213</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.95	45.02	74.00	-28.98	41.98	30.70	5.46	33.12	200	213	PEAK	2	2483.95	20.23	54.00	-33.77	17.19	30.70	5.46	33.12	200	213	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>83.00</td> <td>-----</td> <td>-----</td> <td>79.97</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>200</td> <td>213</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>58.21</td> <td>-----</td> <td>-----</td> <td>55.18</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>200</td> <td>213</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	83.00	-----	-----	79.97	30.70	5.46	33.13	200	213	PEAK	2	2480.00	58.21	-----	-----	55.18	30.70	5.46	33.13	200	213
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	2483.95	45.02	74.00	-28.98	41.98	30.70	5.46	33.12	200	213	PEAK																																																																																						
2	2483.95	20.23	54.00	-33.77	17.19	30.70	5.46	33.12	200	213	AVERAGE																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	2480.00	83.00	-----	-----	79.97	30.70	5.46	33.13	200	213	PEAK																																																																																						
2	2480.00	58.21	-----	-----	55.18	30.70	5.46	33.13	200	213	AVERAGE																																																																																						



Mode	5																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																	
ANT	5+7																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<p style="text-align: right;">Date: 2024-03-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>46.81</td> <td>74.00</td> <td>-27.19</td> <td>43.77</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>200</td> <td>273</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.54</td> <td>22.02</td> <td>54.00</td> <td>-31.98</td> <td>18.98</td> <td>30.70</td> <td>5.46</td> <td>33.12</td> <td>200</td> <td>273</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.54	46.81	74.00	-27.19	43.77	30.70	5.46	33.12	200	273	PEAK	2	2483.54	22.02	54.00	-31.98	18.98	30.70	5.46	33.12	200	273	AVERAGE	<p style="text-align: right;">Date: 2024-03-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>102.52</td> <td>-----</td> <td>-----</td> <td>99.49</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>200</td> <td>273</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>77.73</td> <td>-----</td> <td>-----</td> <td>74.70</td> <td>30.70</td> <td>5.46</td> <td>33.13</td> <td>200</td> <td>273</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2480.00	102.52	-----	-----	99.49	30.70	5.46	33.13	200	273	PEAK	2	2480.00	77.73	-----	-----	74.70	30.70	5.46	33.13	200	273	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2483.54	46.81	74.00	-27.19	43.77	30.70	5.46	33.12	200	273	PEAK																																																																																							
2	2483.54	22.02	54.00	-31.98	18.98	30.70	5.46	33.12	200	273	AVERAGE																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2480.00	102.52	-----	-----	99.49	30.70	5.46	33.13	200	273	PEAK																																																																																							
2	2480.00	77.73	-----	-----	74.70	30.70	5.46	33.13	200	273	AVERAGE																																																																																							



Mode	5																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																								
ANT	5+7																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg	<p style="text-align: right;">Date: 2024-03-28</p>	<p style="text-align: right;">Date: 2024-03-28</p>																																																																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.32</td> <td>74.00</td> <td>-30.68</td> <td>63.66</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>18.53</td> <td>54.00</td> <td>-35.47</td> <td>38.87</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>62.29</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>19.63</td> <td>54.00</td> <td>-34.37</td> <td>37.50</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.32	74.00	-30.68	63.66	36.10	8.46	64.90	---	---	Peak	2	4960.00	18.53	54.00	-35.47	38.87	36.10	8.46	64.90	---	---	Average	3	7440.00	44.42	74.00	-29.58	62.29	36.82	10.17	64.86	---	---	Peak	4	7440.00	19.63	54.00	-34.37	37.50	36.82	10.17	64.86	---	---	Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.66</td> <td>74.00</td> <td>-30.34</td> <td>64.00</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>18.87</td> <td>54.00</td> <td>-35.13</td> <td>39.21</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>44.93</td> <td>74.00</td> <td>-29.07</td> <td>62.80</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>20.14</td> <td>54.00</td> <td>-33.86</td> <td>38.01</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.66	74.00	-30.34	64.00	36.10	8.46	64.90	---	---	Peak	2	4960.00	18.87	54.00	-35.13	39.21	36.10	8.46	64.90	---	---	Average	3	7440.00	44.93	74.00	-29.07	62.80	36.82	10.17	64.86	---	---	Peak	4	7440.00	20.14	54.00	-33.86	38.01	36.82	10.17	64.86	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4960.00	43.32	74.00	-30.68	63.66	36.10	8.46	64.90	---	---	Peak																																																																																																																																														
2	4960.00	18.53	54.00	-35.47	38.87	36.10	8.46	64.90	---	---	Average																																																																																																																																														
3	7440.00	44.42	74.00	-29.58	62.29	36.82	10.17	64.86	---	---	Peak																																																																																																																																														
4	7440.00	19.63	54.00	-34.37	37.50	36.82	10.17	64.86	---	---	Average																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4960.00	43.66	74.00	-30.34	64.00	36.10	8.46	64.90	---	---	Peak																																																																																																																																														
2	4960.00	18.87	54.00	-35.13	39.21	36.10	8.46	64.90	---	---	Average																																																																																																																																														
3	7440.00	44.93	74.00	-29.07	62.80	36.82	10.17	64.86	---	---	Peak																																																																																																																																														
4	7440.00	20.14	54.00	-33.86	38.01	36.82	10.17	64.86	---	---	Average																																																																																																																																														



Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																	
ANT	7																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.45</td> <td>44.28</td> <td>74.00</td> <td>-29.72</td> <td>41.74</td> <td>30.72</td> <td>5.35</td> <td>33.53</td> <td>100</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2384.45</td> <td>19.49</td> <td>54.00</td> <td>-34.51</td> <td>16.95</td> <td>30.72</td> <td>5.35</td> <td>33.53</td> <td>100</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2384.45	44.28	74.00	-29.72	41.74	30.72	5.35	33.53	100	152	PEAK	2	2384.45	19.49	54.00	-34.51	16.95	30.72	5.35	33.53	100	152	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.45</td> <td>70.00</td> <td>20.45</td> <td>87.90</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>100</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>65.66</td> <td>70.00</td> <td>4.34</td> <td>63.11</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>100</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	90.45	70.00	20.45	87.90	30.72	5.37	33.54	100	152	PEAK	2	2402.00	65.66	70.00	4.34	63.11	30.72	5.37	33.54	100	152	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2384.45	44.28	74.00	-29.72	41.74	30.72	5.35	33.53	100	152	PEAK																																																																																							
2	2384.45	19.49	54.00	-34.51	16.95	30.72	5.35	33.53	100	152	AVERAGE																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2402.00	90.45	70.00	20.45	87.90	30.72	5.37	33.54	100	152	PEAK																																																																																							
2	2402.00	65.66	70.00	4.34	63.11	30.72	5.37	33.54	100	152	AVERAGE																																																																																							



Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																	
ANT	7																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2326.59</td> <td>44.86</td> <td>74.00</td> <td>-29.14</td> <td>42.32</td> <td>30.73</td> <td>5.31</td> <td>33.50</td> <td>253</td> <td>224</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2326.59</td> <td>20.07</td> <td>54.00</td> <td>-33.93</td> <td>17.53</td> <td>30.73</td> <td>5.31</td> <td>33.50</td> <td>253</td> <td>224</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2326.59	44.86	74.00	-29.14	42.32	30.73	5.31	33.50	253	224	PEAK	2	2326.59	20.07	54.00	-33.93	17.53	30.73	5.31	33.50	253	224	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>100.64</td> <td>-----</td> <td>-----</td> <td>98.09</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>253</td> <td>224</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>75.85</td> <td>-----</td> <td>-----</td> <td>73.30</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>253</td> <td>224</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	100.64	-----	-----	98.09	30.72	5.37	33.54	253	224	PEAK	2	2402.00	75.85	-----	-----	73.30	30.72	5.37	33.54	253	224	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2326.59	44.86	74.00	-29.14	42.32	30.73	5.31	33.50	253	224	PEAK																																																																																							
2	2326.59	20.07	54.00	-33.93	17.53	30.73	5.31	33.50	253	224	AVERAGE																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	2402.00	100.64	-----	-----	98.09	30.72	5.37	33.54	253	224	PEAK																																																																																							
2	2402.00	75.85	-----	-----	73.30	30.72	5.37	33.54	253	224	AVERAGE																																																																																							



Mode	6																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																							
ANT	7																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.83</td> <td>74.00</td> <td>-31.17</td> <td>63.00</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>18.04</td> <td>54.00</td> <td>-35.96</td> <td>38.21</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.83	74.00	-31.17	63.00	35.73	8.94	64.84	---	---	Peak	2	4804.00	18.04	54.00	-35.96	38.21	35.73	8.94	64.84	---	---	Average	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.78</td> <td>74.00</td> <td>-31.22</td> <td>62.95</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>17.99</td> <td>54.00</td> <td>-36.01</td> <td>38.16</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.78	74.00	-31.22	62.95	35.73	8.94	64.84	---	---	Peak	2	4804.00	17.99	54.00	-36.01	38.16	35.73	8.94	64.84	---	---	Average
	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	4804.00	42.83	74.00	-31.17	63.00	35.73	8.94	64.84	---	---	Peak																																																																																													
2	4804.00	18.04	54.00	-35.96	38.21	35.73	8.94	64.84	---	---	Average																																																																																													
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	4804.00	42.78	74.00	-31.22	62.95	35.73	8.94	64.84	---	---	Peak																																																																																													
2	4804.00	17.99	54.00	-36.01	38.16	35.73	8.94	64.84	---	---	Average																																																																																													



Mode	7																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																									
ANT	7																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.82</td> <td>74.00</td> <td>-31.18</td> <td>63.07</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>18.03</td> <td>54.00</td> <td>-35.97</td> <td>38.28</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>43.62</td> <td>74.00</td> <td>-30.38</td> <td>61.43</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>18.83</td> <td>54.00</td> <td>-35.17</td> <td>36.64</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.82	74.00	-31.18	63.07	35.92	8.70	64.87	---	---	Peak	2	4882.00	18.03	54.00	-35.97	38.28	35.92	8.70	64.87	---	---	Average	3	7323.00	43.62	74.00	-30.38	61.43	36.87	10.18	64.86	---	---	Peak	4	7323.00	18.83	54.00	-35.17	36.64	36.87	10.18	64.86	---	---	Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.83</td> <td>74.00</td> <td>-31.17</td> <td>63.08</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>18.04</td> <td>54.00</td> <td>-35.96</td> <td>38.29</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>43.67</td> <td>74.00</td> <td>-30.33</td> <td>61.48</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>18.88</td> <td>54.00</td> <td>-35.12</td> <td>36.69</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.83	74.00	-31.17	63.08	35.92	8.70	64.87	---	---	Peak	2	4882.00	18.04	54.00	-35.96	38.29	35.92	8.70	64.87	---	---	Average	3	7323.00	43.67	74.00	-30.33	61.48	36.87	10.18	64.86	---	---	Peak	4	7323.00	18.88	54.00	-35.12	36.69	36.87	10.18	64.86	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4882.00	42.82	74.00	-31.18	63.07	35.92	8.70	64.87	---	---	Peak																																																																																																																																															
2	4882.00	18.03	54.00	-35.97	38.28	35.92	8.70	64.87	---	---	Average																																																																																																																																															
3	7323.00	43.62	74.00	-30.38	61.43	36.87	10.18	64.86	---	---	Peak																																																																																																																																															
4	7323.00	18.83	54.00	-35.17	36.64	36.87	10.18	64.86	---	---	Average																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4882.00	42.83	74.00	-31.17	63.08	35.92	8.70	64.87	---	---	Peak																																																																																																																																															
2	4882.00	18.04	54.00	-35.96	38.29	35.92	8.70	64.87	---	---	Average																																																																																																																																															
3	7323.00	43.67	74.00	-30.33	61.48	36.87	10.18	64.86	---	---	Peak																																																																																																																																															
4	7323.00	18.88	54.00	-35.12	36.69	36.87	10.18	64.86	---	---	Average																																																																																																																																															



Mode	8																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																						
ANT	7																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.67</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>41.54</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>400</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2486.67</td> <td>19.32</td> <td>54.00</td> <td>-34.68</td> <td>16.75</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>400</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.67	44.11	74.00	-29.89	41.54	30.70	5.46	33.59	400	155	PEAK	2	2486.67	19.32	54.00	-34.68	16.75	30.70	5.46	33.59	400	155	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.55</td> <td>-----</td> <td>-----</td> <td>91.98</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>400</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>69.76</td> <td>-----</td> <td>-----</td> <td>67.19</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>400</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.55	-----	-----	91.98	30.70	5.46	33.59	400	155	PEAK	2	2480.00	69.76	-----	-----	67.19	30.70	5.46	33.59	400	155
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2486.67	44.11	74.00	-29.89	41.54	30.70	5.46	33.59	400	155	PEAK																																																																																												
2	2486.67	19.32	54.00	-34.68	16.75	30.70	5.46	33.59	400	155	AVERAGE																																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2480.00	94.55	-----	-----	91.98	30.70	5.46	33.59	400	155	PEAK																																																																																												
2	2480.00	69.76	-----	-----	67.19	30.70	5.46	33.59	400	155	AVERAGE																																																																																												



Mode	8																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																				
ANT	7																																																																																																				
Pol.	Vertical	Fundamental																																																																																																			
Peak	<p style="text-align: right;">Date: 2024-04-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>47.34</td> <td>74.00</td> <td>-26.66</td> <td>44.77</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>157</td> <td>6 PEAK</td> </tr> <tr> <td>2</td> <td>2483.54</td> <td>22.55</td> <td>54.00</td> <td>-31.45</td> <td>19.98</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>157</td> <td>6 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	47.34	74.00	-26.66	44.77	30.70	5.46	33.59	157	6 PEAK	2	2483.54	22.55	54.00	-31.45	19.98	30.70	5.46	33.59	157	6 AVERAGE	<p style="text-align: right;">Date: 2024-04-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>104.86</td> <td>-----</td> <td>-----</td> <td>102.29</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>157</td> <td>6 PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>80.07</td> <td>-----</td> <td>-----</td> <td>77.50</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>157</td> <td>6 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.86	-----	-----	102.29	30.70	5.46	33.59	157	6 PEAK	2	2480.00	80.07	-----	-----	77.50	30.70	5.46	33.59	157	6 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.54	47.34	74.00	-26.66	44.77	30.70	5.46	33.59	157	6 PEAK																																																																																											
2	2483.54	22.55	54.00	-31.45	19.98	30.70	5.46	33.59	157	6 AVERAGE																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2480.00	104.86	-----	-----	102.29	30.70	5.46	33.59	157	6 PEAK																																																																																											
2	2480.00	80.07	-----	-----	77.50	30.70	5.46	33.59	157	6 AVERAGE																																																																																											



Mode	8																																																																																																																																																	
	Harmonic																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																	
ANT	7																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	<p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.43</td> <td>74.00</td> <td>-30.57</td> <td>63.77</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>18.64</td> <td>54.00</td> <td>-35.36</td> <td>38.98</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>44.00</td> <td>74.00</td> <td>-30.00</td> <td>61.87</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>19.21</td> <td>54.00</td> <td>-34.79</td> <td>37.08</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	43.43	74.00	-30.57	63.77	36.10	8.46	64.90	---	---	Peak	2	4960.00	18.64	54.00	-35.36	38.98	36.10	8.46	64.90	---	---	Average	3	7440.00	44.00	74.00	-30.00	61.87	36.82	10.17	64.86	---	---	Peak	4	7440.00	19.21	54.00	-34.79	37.08	36.82	10.17	64.86	---	---	Average	<p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.16</td> <td>74.00</td> <td>-30.84</td> <td>63.50</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>18.37</td> <td>54.00</td> <td>-35.63</td> <td>38.71</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>43.71</td> <td>74.00</td> <td>-30.29</td> <td>61.58</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>18.92</td> <td>54.00</td> <td>-35.08</td> <td>36.79</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	43.16	74.00	-30.84	63.50	36.10	8.46	64.90	---	---	Peak	2	4960.00	18.37	54.00	-35.63	38.71	36.10	8.46	64.90	---	---	Average	3	7440.00	43.71	74.00	-30.29	61.58	36.82	10.17	64.86	---	---	Peak	4	7440.00	18.92	54.00	-35.08	36.79	36.82	10.17	64.86	---	---	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																											
1	4960.00	43.43	74.00	-30.57	63.77	36.10	8.46	64.90	---	---	Peak																																																																																																																																							
2	4960.00	18.64	54.00	-35.36	38.98	36.10	8.46	64.90	---	---	Average																																																																																																																																							
3	7440.00	44.00	74.00	-30.00	61.87	36.82	10.17	64.86	---	---	Peak																																																																																																																																							
4	7440.00	19.21	54.00	-34.79	37.08	36.82	10.17	64.86	---	---	Average																																																																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																											
1	4960.00	43.16	74.00	-30.84	63.50	36.10	8.46	64.90	---	---	Peak																																																																																																																																							
2	4960.00	18.37	54.00	-35.63	38.71	36.10	8.46	64.90	---	---	Average																																																																																																																																							
3	7440.00	43.71	74.00	-30.29	61.58	36.82	10.17	64.86	---	---	Peak																																																																																																																																							
4	7440.00	18.92	54.00	-35.08	36.79	36.82	10.17	64.86	---	---	Average																																																																																																																																							



Mode	9																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK LF_CH78_2480MHz																																																																																																																																																																									
ANT	7																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>24.84</td><td>40.00</td><td>-15.16</td><td>30.71</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>96.93</td><td>23.12</td><td>43.50</td><td>-20.38</td><td>38.26</td><td>15.70</td><td>1.00</td><td>31.84</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>193.93</td><td>32.88</td><td>43.50</td><td>-10.62</td><td>48.28</td><td>14.80</td><td>1.41</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>334.58</td><td>23.36</td><td>46.00</td><td>-22.64</td><td>32.87</td><td>20.00</td><td>1.92</td><td>31.43</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>525.67</td><td>26.99</td><td>46.00</td><td>-19.01</td><td>31.79</td><td>24.10</td><td>2.40</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>906.88</td><td>32.36</td><td>46.00</td><td>-13.64</td><td>30.84</td><td>29.24</td><td>3.17</td><td>30.89</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	24.84	40.00	-15.16	30.71	25.20	0.53	31.60	---	---	Peak	2	96.93	23.12	43.50	-20.38	38.26	15.70	1.00	31.84	---	---	Peak	3	193.93	32.88	43.50	-10.62	48.28	14.80	1.41	31.61	---	---	Peak	4	334.58	23.36	46.00	-22.64	32.87	20.00	1.92	31.43	---	---	Peak	5	525.67	26.99	46.00	-19.01	31.79	24.10	2.40	31.30	---	---	Peak	6	906.88	32.36	46.00	-13.64	30.84	29.24	3.17	30.89	---	---	Peak	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>39.70</td><td>27.30</td><td>40.00</td><td>-12.70</td><td>38.68</td><td>19.80</td><td>0.61</td><td>31.79</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>53.28</td><td>31.92</td><td>40.00</td><td>-8.08</td><td>49.82</td><td>13.20</td><td>0.73</td><td>31.83</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>94.99</td><td>25.82</td><td>43.50</td><td>-17.68</td><td>41.14</td><td>15.50</td><td>0.98</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>194.90</td><td>31.13</td><td>43.50</td><td>-12.37</td><td>46.53</td><td>14.80</td><td>1.41</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>502.39</td><td>25.97</td><td>46.00</td><td>-20.03</td><td>31.08</td><td>23.94</td><td>2.34</td><td>31.39</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>910.76</td><td>32.83</td><td>46.00</td><td>-13.17</td><td>31.21</td><td>29.32</td><td>3.18</td><td>30.88</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	39.70	27.30	40.00	-12.70	38.68	19.80	0.61	31.79	---	---	Peak	2	53.28	31.92	40.00	-8.08	49.82	13.20	0.73	31.83	---	---	Peak	3	94.99	25.82	43.50	-17.68	41.14	15.50	0.98	31.80	---	---	Peak	4	194.90	31.13	43.50	-12.37	46.53	14.80	1.41	31.61	---	---	Peak	5	502.39	25.97	46.00	-20.03	31.08	23.94	2.34	31.39	---	---	Peak	6	910.76	32.83	46.00	-13.17	31.21	29.32	3.18	30.88	---	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	24.84	40.00	-15.16	30.71	25.20	0.53	31.60	---	---	Peak																																																																																																																																																															
2	96.93	23.12	43.50	-20.38	38.26	15.70	1.00	31.84	---	---	Peak																																																																																																																																																															
3	193.93	32.88	43.50	-10.62	48.28	14.80	1.41	31.61	---	---	Peak																																																																																																																																																															
4	334.58	23.36	46.00	-22.64	32.87	20.00	1.92	31.43	---	---	Peak																																																																																																																																																															
5	525.67	26.99	46.00	-19.01	31.79	24.10	2.40	31.30	---	---	Peak																																																																																																																																																															
6	906.88	32.36	46.00	-13.64	30.84	29.24	3.17	30.89	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	39.70	27.30	40.00	-12.70	38.68	19.80	0.61	31.79	---	---	Peak																																																																																																																																																															
2	53.28	31.92	40.00	-8.08	49.82	13.20	0.73	31.83	---	---	Peak																																																																																																																																																															
3	94.99	25.82	43.50	-17.68	41.14	15.50	0.98	31.80	---	---	Peak																																																																																																																																																															
4	194.90	31.13	43.50	-12.37	46.53	14.80	1.41	31.61	---	---	Peak																																																																																																																																																															
5	502.39	25.97	46.00	-20.03	31.08	23.94	2.34	31.39	---	---	Peak																																																																																																																																																															
6	910.76	32.83	46.00	-13.17	31.21	29.32	3.18	30.88	---	---	Peak																																																																																																																																																															



Mode	10																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2380.67</td> <td>44.40</td> <td>74.00</td> <td>-29.60</td> <td>41.86</td> <td>30.72</td> <td>5.35</td> <td>33.53</td> <td>100</td> <td>106</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2380.67</td> <td>19.61</td> <td>54.00</td> <td>-34.39</td> <td>17.07</td> <td>30.72</td> <td>5.35</td> <td>33.53</td> <td>100</td> <td>106</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2380.67	44.40	74.00	-29.60	41.86	30.72	5.35	33.53	100	106	PEAK	2	2380.67	19.61	54.00	-34.39	17.07	30.72	5.35	33.53	100	106	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>90.13</td> <td>74.00</td> <td>16.13</td> <td>87.58</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>100</td> <td>106</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>65.34</td> <td>74.00</td> <td>-8.66</td> <td>62.79</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>100</td> <td>106</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.13	74.00	16.13	87.58	30.72	5.37	33.54	100	106	PEAK	2	2402.00	65.34	74.00	-8.66	62.79	30.72	5.37	33.54	100	106	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2380.67	44.40	74.00	-29.60	41.86	30.72	5.35	33.53	100	106	PEAK																																																																																													
2	2380.67	19.61	54.00	-34.39	17.07	30.72	5.35	33.53	100	106	AVERAGE																																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2402.00	90.13	74.00	16.13	87.58	30.72	5.37	33.54	100	106	PEAK																																																																																													
2	2402.00	65.34	74.00	-8.66	62.79	30.72	5.37	33.54	100	106	AVERAGE																																																																																													



Mode	10																																																																																																								
	Band Edge																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																								
ANT	5																																																																																																								
Pol.	Vertical	Fundamental																																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.92</td> <td>44.71</td> <td>74.00</td> <td>-29.29</td> <td>42.16</td> <td>30.72</td> <td>5.36</td> <td>33.53</td> <td>400</td> <td>311</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2385.92</td> <td>19.92</td> <td>54.00</td> <td>-34.08</td> <td>17.37</td> <td>30.72</td> <td>5.36</td> <td>33.53</td> <td>400</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2385.92	44.71	74.00	-29.29	42.16	30.72	5.36	33.53	400	311	PEAK	2	2385.92	19.92	54.00	-34.08	17.37	30.72	5.36	33.53	400	311	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>93.99</td> <td>-----</td> <td>-----</td> <td>91.44</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>400</td> <td>311</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>69.20</td> <td>-----</td> <td>-----</td> <td>66.65</td> <td>30.72</td> <td>5.37</td> <td>33.54</td> <td>400</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.99	-----	-----	91.44	30.72	5.37	33.54	400	311	PEAK	2	2402.00	69.20	-----	-----	66.65	30.72	5.37	33.54	400	311	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2385.92	44.71	74.00	-29.29	42.16	30.72	5.36	33.53	400	311	PEAK																																																																																														
2	2385.92	19.92	54.00	-34.08	17.37	30.72	5.36	33.53	400	311	AVERAGE																																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2402.00	93.99	-----	-----	91.44	30.72	5.37	33.54	400	311	PEAK																																																																																														
2	2402.00	69.20	-----	-----	66.65	30.72	5.37	33.54	400	311	AVERAGE																																																																																														



Mode	10																																																																																																																																																																																								
	Harmonic																																																																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																																								
ANT	5																																																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																																																							
Peak Avg																																																																																																																																																																																									
	<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.62</td> <td>74.00</td> <td>-31.38</td> <td>62.79</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>17.83</td> <td>54.00</td> <td>-36.17</td> <td>38.00</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg									1	4804.00	42.62	74.00	-31.38	62.79	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Peak	2	4804.00	17.83	54.00	-36.17	38.00	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Average	<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.21</td> <td>74.00</td> <td>-30.79</td> <td>63.38</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>18.42</td> <td>54.00</td> <td>-35.58</td> <td>38.59</td> <td>35.73</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg									1	4804.00	43.21	74.00	-30.79	63.38	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Peak	2	4804.00	18.42	54.00	-35.58	38.59	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																
1	4804.00	42.62	74.00	-31.38	62.79	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Peak																																																																																																																																																																							
2	4804.00	17.83	54.00	-36.17	38.00	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Average																																																																																																																																																																							
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor	Loss	Factor																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																
1	4804.00	43.21	74.00	-30.79	63.38	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Peak																																																																																																																																																																							
2	4804.00	18.42	54.00	-35.58	38.59	35.73	8.94	64.84	---	---	---	---	---	---	---	---	---	Average																																																																																																																																																																							





Mode	11																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																								
ANT	5																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.95</td> <td>74.00</td> <td>-31.05</td> <td>63.20</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>18.16</td> <td>54.00</td> <td>-35.84</td> <td>38.41</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>43.63</td> <td>74.00</td> <td>-30.37</td> <td>61.44</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>18.84</td> <td>54.00</td> <td>-35.16</td> <td>36.65</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.95	74.00	-31.05	63.20	35.92	8.70	64.87	---	---	Peak	2	4882.00	18.16	54.00	-35.84	38.41	35.92	8.70	64.87	---	---	Average	3	7323.00	43.63	74.00	-30.37	61.44	36.87	10.18	64.86	---	---	Peak	4	7323.00	18.84	54.00	-35.16	36.65	36.87	10.18	64.86	---	---	Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.52</td> <td>74.00</td> <td>-31.48</td> <td>62.77</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>17.73</td> <td>54.00</td> <td>-36.27</td> <td>37.98</td> <td>35.92</td> <td>8.70</td> <td>64.87</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>44.79</td> <td>74.00</td> <td>-29.21</td> <td>62.60</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>20.00</td> <td>54.00</td> <td>-34.00</td> <td>37.81</td> <td>36.87</td> <td>10.18</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.52	74.00	-31.48	62.77	35.92	8.70	64.87	---	---	Peak	2	4882.00	17.73	54.00	-36.27	37.98	35.92	8.70	64.87	---	---	Average	3	7323.00	44.79	74.00	-29.21	62.60	36.87	10.18	64.86	---	---	Peak	4	7323.00	20.00	54.00	-34.00	37.81	36.87	10.18	64.86	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4882.00	42.95	74.00	-31.05	63.20	35.92	8.70	64.87	---	---	Peak																																																																																																																																														
2	4882.00	18.16	54.00	-35.84	38.41	35.92	8.70	64.87	---	---	Average																																																																																																																																														
3	7323.00	43.63	74.00	-30.37	61.44	36.87	10.18	64.86	---	---	Peak																																																																																																																																														
4	7323.00	18.84	54.00	-35.16	36.65	36.87	10.18	64.86	---	---	Average																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4882.00	42.52	74.00	-31.48	62.77	35.92	8.70	64.87	---	---	Peak																																																																																																																																														
2	4882.00	17.73	54.00	-36.27	37.98	35.92	8.70	64.87	---	---	Average																																																																																																																																														
3	7323.00	44.79	74.00	-29.21	62.60	36.87	10.18	64.86	---	---	Peak																																																																																																																																														
4	7323.00	20.00	54.00	-34.00	37.81	36.87	10.18	64.86	---	---	Average																																																																																																																																														



Mode	12																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																						
ANT	5																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.31</td> <td>44.08</td> <td>74.00</td> <td>-29.92</td> <td>41.51</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>383</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2485.31</td> <td>19.29</td> <td>54.00</td> <td>-34.71</td> <td>16.72</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>383</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.31	44.08	74.00	-29.92	41.51	30.70	5.46	33.59	383	360	PEAK	2	2485.31	19.29	54.00	-34.71	16.72	30.70	5.46	33.59	383	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.01</td> <td>74.00</td> <td>22.01</td> <td>93.44</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>383</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>71.22</td> <td>74.00</td> <td>2.78</td> <td>68.65</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>383</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.01	74.00	22.01	93.44	30.70	5.46	33.59	383	360	PEAK	2	2480.00	71.22	74.00	2.78	68.65	30.70	5.46	33.59	383	360
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2485.31	44.08	74.00	-29.92	41.51	30.70	5.46	33.59	383	360	PEAK																																																																																												
2	2485.31	19.29	54.00	-34.71	16.72	30.70	5.46	33.59	383	360	AVERAGE																																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	2480.00	96.01	74.00	22.01	93.44	30.70	5.46	33.59	383	360	PEAK																																																																																												
2	2480.00	71.22	74.00	2.78	68.65	30.70	5.46	33.59	383	360	AVERAGE																																																																																												

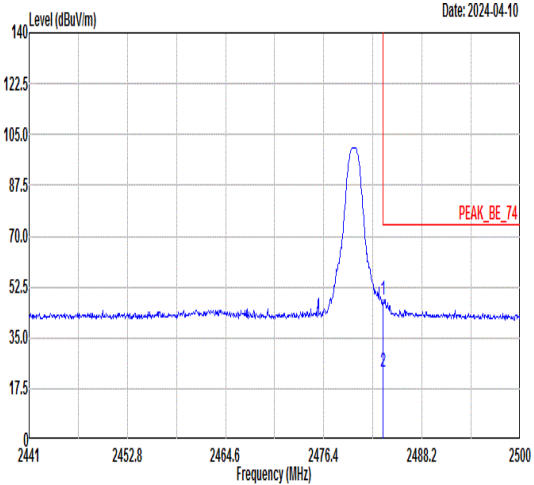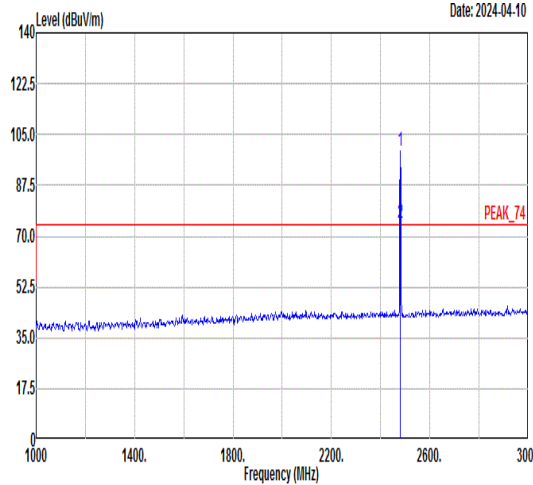

Mode	12																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																					
ANT	5																																																																																																					
Pol.	Vertical	Fundamental																																																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. Date: 2024-04-10. A peak is observed at approximately 2480 MHz, labeled PEAK_BE_74. A red horizontal line indicates a limit level at 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>48.13</td> <td>74.00</td> <td>-25.87</td> <td>45.56</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>138</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2483.54</td> <td>23.34</td> <td>54.00</td> <td>-30.66</td> <td>20.77</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>138</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	48.13	74.00	-25.87	45.56	30.70	5.46	33.59	138	0 PEAK	2	2483.54	23.34	54.00	-30.66	20.77	30.70	5.46	33.59	138	0 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. Date: 2024-04-10. A peak is observed at 2480.00 MHz, labeled PEAK_74. A red horizontal line indicates a limit level at 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.50</td> <td>-----</td> <td>-----</td> <td>96.93</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>138</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>74.71</td> <td>-----</td> <td>-----</td> <td>72.14</td> <td>30.70</td> <td>5.46</td> <td>33.59</td> <td>138</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.50	-----	-----	96.93	30.70	5.46	33.59	138	0 PEAK	2	2480.00	74.71	-----	-----	72.14	30.70	5.46	33.59	138	0 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.54	48.13	74.00	-25.87	45.56	30.70	5.46	33.59	138	0 PEAK																																																																																												
2	2483.54	23.34	54.00	-30.66	20.77	30.70	5.46	33.59	138	0 AVERAGE																																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	99.50	-----	-----	96.93	30.70	5.46	33.59	138	0 PEAK																																																																																												
2	2480.00	74.71	-----	-----	72.14	30.70	5.46	33.59	138	0 AVERAGE																																																																																												



Mode	12																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																								
ANT	5																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.60</td> <td>74.00</td> <td>-31.40</td> <td>62.94</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>17.81</td> <td>54.00</td> <td>-36.19</td> <td>38.15</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>42.70</td> <td>74.00</td> <td>-31.30</td> <td>60.57</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>17.91</td> <td>54.00</td> <td>-36.09</td> <td>35.78</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.60	74.00	-31.40	62.94	36.10	8.46	64.90	---	---	Peak	2	4960.00	17.81	54.00	-36.19	38.15	36.10	8.46	64.90	---	---	Average	3	7440.00	42.70	74.00	-31.30	60.57	36.82	10.17	64.86	---	---	Peak	4	7440.00	17.91	54.00	-36.09	35.78	36.82	10.17	64.86	---	---	Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.00</td> <td>74.00</td> <td>-31.00</td> <td>63.34</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>18.21</td> <td>54.00</td> <td>-35.79</td> <td>38.55</td> <td>36.10</td> <td>8.46</td> <td>64.90</td> <td>---</td> <td>---</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>43.47</td> <td>74.00</td> <td>-30.53</td> <td>61.34</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>18.68</td> <td>54.00</td> <td>-35.32</td> <td>36.55</td> <td>36.82</td> <td>10.17</td> <td>64.86</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.00	74.00	-31.00	63.34	36.10	8.46	64.90	---	---	Peak	2	4960.00	18.21	54.00	-35.79	38.55	36.10	8.46	64.90	---	---	Average	3	7440.00	43.47	74.00	-30.53	61.34	36.82	10.17	64.86	---	---	Peak	4	7440.00	18.68	54.00	-35.32	36.55	36.82	10.17	64.86	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4960.00	42.60	74.00	-31.40	62.94	36.10	8.46	64.90	---	---	Peak																																																																																																																																														
2	4960.00	17.81	54.00	-36.19	38.15	36.10	8.46	64.90	---	---	Average																																																																																																																																														
3	7440.00	42.70	74.00	-31.30	60.57	36.82	10.17	64.86	---	---	Peak																																																																																																																																														
4	7440.00	17.91	54.00	-36.09	35.78	36.82	10.17	64.86	---	---	Average																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	4960.00	43.00	74.00	-31.00	63.34	36.10	8.46	64.90	---	---	Peak																																																																																																																																														
2	4960.00	18.21	54.00	-35.79	38.55	36.10	8.46	64.90	---	---	Average																																																																																																																																														
3	7440.00	43.47	74.00	-30.53	61.34	36.82	10.17	64.86	---	---	Peak																																																																																																																																														
4	7440.00	18.68	54.00	-35.32	36.55	36.82	10.17	64.86	---	---	Average																																																																																																																																														




Mode	13																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK LF_CH78_2480MHz																																																																																																																																																																									
ANT	5																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>25.12</td><td>40.00</td><td>-14.88</td><td>30.99</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>92.08</td><td>21.27</td><td>43.50</td><td>-22.23</td><td>37.01</td><td>15.10</td><td>0.96</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>191.02</td><td>30.92</td><td>43.50</td><td>-12.58</td><td>46.44</td><td>14.70</td><td>1.40</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>283.17</td><td>22.91</td><td>46.00</td><td>-23.09</td><td>33.87</td><td>18.82</td><td>1.75</td><td>31.53</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>525.67</td><td>26.76</td><td>46.00</td><td>-19.24</td><td>31.56</td><td>24.10</td><td>2.40</td><td>31.30</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>850.62</td><td>30.95</td><td>46.00</td><td>-15.05</td><td>29.78</td><td>29.22</td><td>3.05</td><td>31.10</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	25.12	40.00	-14.88	30.99	25.20	0.53	31.60	---	---	Peak	2	92.08	21.27	43.50	-22.23	37.01	15.10	0.96	31.80	---	---	Peak	3	191.02	30.92	43.50	-12.58	46.44	14.70	1.40	31.62	---	---	Peak	4	283.17	22.91	46.00	-23.09	33.87	18.82	1.75	31.53	---	---	Peak	5	525.67	26.76	46.00	-19.24	31.56	24.10	2.40	31.30	---	---	Peak	6	850.62	30.95	46.00	-15.05	29.78	29.22	3.05	31.10	---	---	Peak	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>27.48</td><td>40.00</td><td>-12.52</td><td>33.35</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>53.28</td><td>31.03</td><td>40.00</td><td>-8.97</td><td>48.93</td><td>13.20</td><td>0.73</td><td>31.83</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>189.08</td><td>30.60</td><td>43.50</td><td>-12.90</td><td>46.12</td><td>14.70</td><td>1.40</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>465.53</td><td>25.04</td><td>46.00</td><td>-20.96</td><td>30.85</td><td>23.42</td><td>2.24</td><td>31.47</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>622.67</td><td>27.89</td><td>46.00</td><td>-18.11</td><td>30.62</td><td>25.82</td><td>2.60</td><td>31.15</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>834.13</td><td>30.68</td><td>46.00</td><td>-15.32</td><td>30.22</td><td>28.54</td><td>3.02</td><td>31.10</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	27.48	40.00	-12.52	33.35	25.20	0.53	31.60	---	---	Peak	2	53.28	31.03	40.00	-8.97	48.93	13.20	0.73	31.83	---	---	Peak	3	189.08	30.60	43.50	-12.90	46.12	14.70	1.40	31.62	---	---	Peak	4	465.53	25.04	46.00	-20.96	30.85	23.42	2.24	31.47	---	---	Peak	5	622.67	27.89	46.00	-18.11	30.62	25.82	2.60	31.15	---	---	Peak	6	834.13	30.68	46.00	-15.32	30.22	28.54	3.02	31.10	---	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	25.12	40.00	-14.88	30.99	25.20	0.53	31.60	---	---	Peak																																																																																																																																																															
2	92.08	21.27	43.50	-22.23	37.01	15.10	0.96	31.80	---	---	Peak																																																																																																																																																															
3	191.02	30.92	43.50	-12.58	46.44	14.70	1.40	31.62	---	---	Peak																																																																																																																																																															
4	283.17	22.91	46.00	-23.09	33.87	18.82	1.75	31.53	---	---	Peak																																																																																																																																																															
5	525.67	26.76	46.00	-19.24	31.56	24.10	2.40	31.30	---	---	Peak																																																																																																																																																															
6	850.62	30.95	46.00	-15.05	29.78	29.22	3.05	31.10	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	27.48	40.00	-12.52	33.35	25.20	0.53	31.60	---	---	Peak																																																																																																																																																															
2	53.28	31.03	40.00	-8.97	48.93	13.20	0.73	31.83	---	---	Peak																																																																																																																																																															
3	189.08	30.60	43.50	-12.90	46.12	14.70	1.40	31.62	---	---	Peak																																																																																																																																																															
4	465.53	25.04	46.00	-20.96	30.85	23.42	2.24	31.47	---	---	Peak																																																																																																																																																															
5	622.67	27.89	46.00	-18.11	30.62	25.82	2.60	31.15	---	---	Peak																																																																																																																																																															
6	834.13	30.68	46.00	-15.32	30.22	28.54	3.02	31.10	---	---	Peak																																																																																																																																																															




Appendix D. Duty Cycle Plots

Ant 5:

DH5 on time (One Pulse) Plot on Channel 39

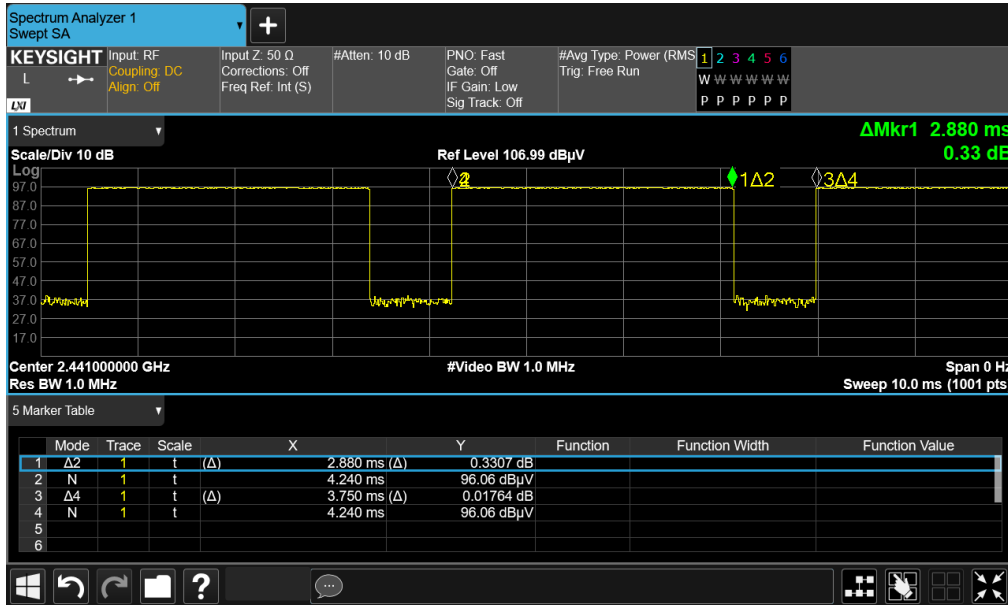

DH5 on time (Count Pulses) Plot on Channel 39

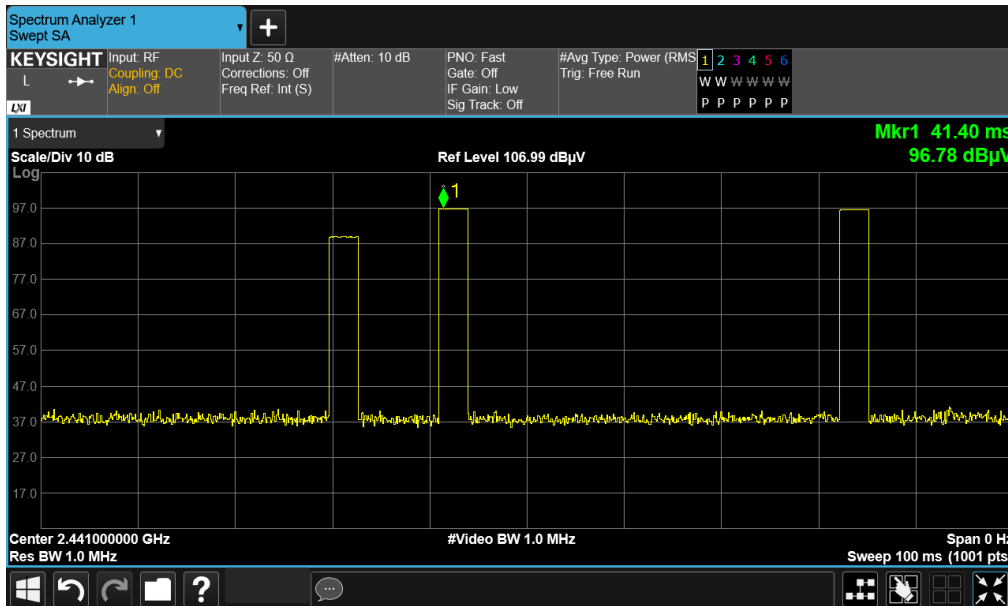


Note:


1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.

Ant 7:

DH5 on time (One Pulse) Plot on Channel 39

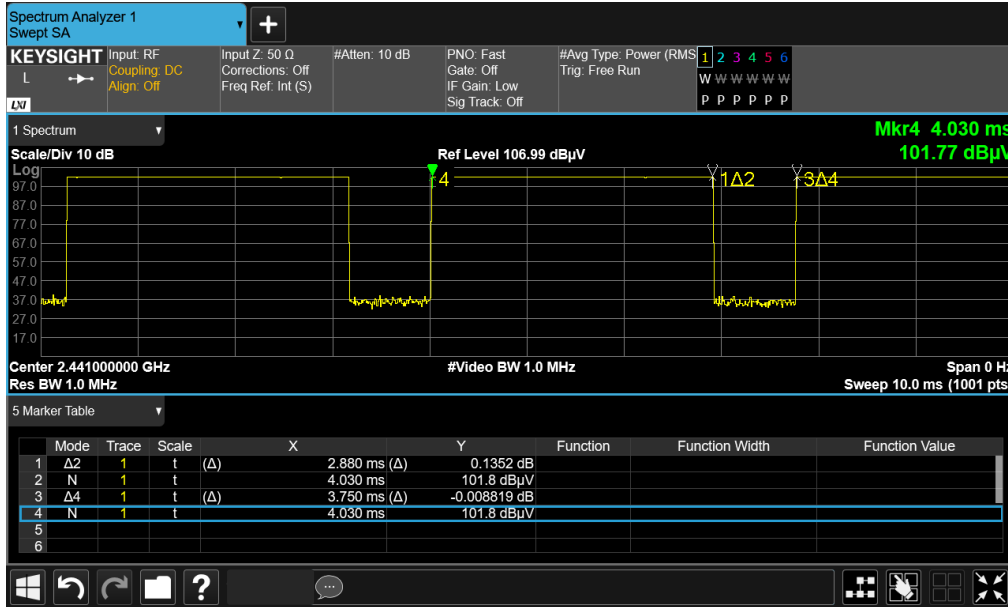

DH5 on time (Count Pulses) Plot on Channel 39

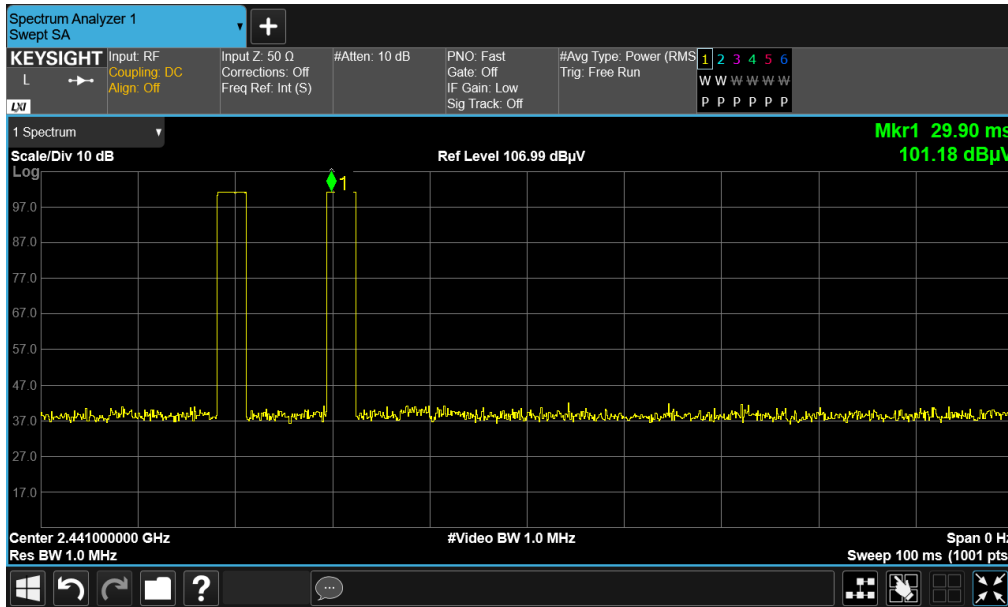


Note:


1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.

Ant 5 + 7:

DH5 on time (One Pulse) Plot on Channel 39

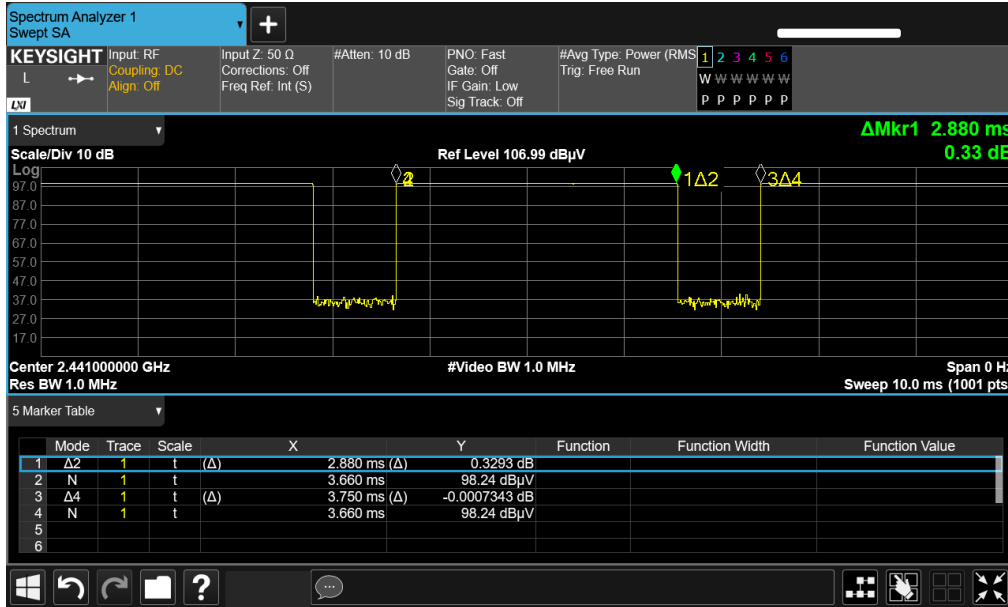

DH5 on time (Count Pulses) Plot on Channel 39

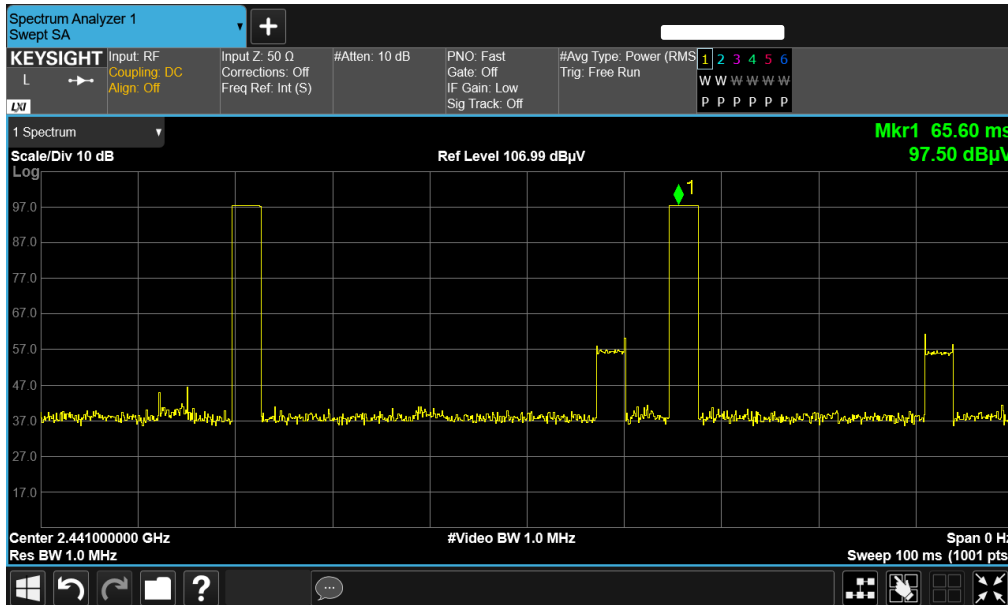

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.