



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-3
FCC ID : IHDT56AS9
STANDARD : 47 CFR Part 2, 22, 24, 27, 90S
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 05, 2024 ~ Aug. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

1 GENERAL DESCRIPTION..... 4

 1.1 Applicant 4

 1.2 Manufacturer..... 4

 1.3 Product Feature of Equipment Under Test..... 4

 1.4 Modification of EUT 4

 1.5 Specification of Accessory..... 5

 1.6 Testing Site..... 5

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 6

2 RE-USE OF MEASURED DATA..... 7

 2.1 Introduction Section 7

 2.2 Model Difference Information 7

 2.3 Reference detail Section: 8

 2.4 Spot Check Verification Data Section..... 9

3 LIST OF MEASURING EQUIPMENT..... 14

4 MEASUREMENT UNCERTAINTY 17

APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA

APPENDIX B. SETUP PHOTOGRAPHS

APPENDIX C. REFERENCE REPORT



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-3
FCC ID	IHDT56AS9
IMEI Code	Conducted/DFS/CBP: 359867620008119/359867620008127 Radiation: 359867620006634 Conduction: 359867620006899/359867620006907
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1((CHILE))	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(ATL)	Model Name	RW50
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	SH38D62338
Earphone 2	Brand Name	Motorola(Juwei)	Model Name	S928E43096
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

1.6 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS 03CH02-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616
3.	03CH02-KS	AUDIX	E3	6.2009-8-24al
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22, 24, 27, 90S, 90S
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2437-3, FCC ID: IHDT56AS9) is electrically identical to the reference device (Model: XT2437-1, XT2437-2, FCC ID: IHDT56AS8) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report.

For Conducted items of 5G NR bands please refer to report number: TR-24ADRTCC7017.

For SAR Reference detail, please refer to FCC SAR report FA471919-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AS9 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AS8 and FCC ID: IHDT56AS9 is as below:

- Remove WCDMA IV and LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32 and 5G NR n8/n20/n38/n41/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AS9 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AS8	Full test	FR471919A	IHDT56AS9	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AS8	Full test	FR471919B	IHDT56AS9	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AS8	Full test	FR471919C	IHDT56AS9	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AS8	Full test	FR471919D	IHDT56AS9	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5500~5720	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5745~5825	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
	5260~5320 5500~5720	IHDT56AS8	Full test	FZ471919	IHDT56AS9	Spot check	Y, All test items	
6XD	5925~7125	IHDT56AS8	Full test	FR471919F	IHDT56AS9	Spot check	Y, All test items	
22 24	PCE (GSM, WCDMA)	GSM 850/1900 WCDMA B2/B5	IHDT56AS8	Full test	FG471919A	IHDT56AS9	Spot check	Y, All test items
22 24 27 90	PCE (LTE)	LTE B2/B5/B7/B7C/ B26/B38/B38C/ B42/B42C	IHDT56AS8	Full test	FG471919B FG471919C FG471919D FG471919E FG471919F	IHDT56AS9	Spot check	Y, All test items
22 27	PCE (NR)	5G NR n5/n7/n26	IHDT56AS8	Full test	FG471919G	IHDT56AS9	Spot check	Y, RSE item.

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation	Deviation Limit
BT 1Mbps (CH78)	Number of Channels (N)	79	79	0.00	3
	Hopping Channel Separation (MHz)	1.009	1.003	0.01	3
	Dwell Time of Each Channel(s)	0.31	0.31	0.00	3
	20dB Bandwidth(MHz)	0.95	0.94	0.01	3
	99% Bandwidth(MHz)	0.836	0.836	0.00	3
	Conducted Band Edges(dBm)	-52.28	-51.03	1.25	3
	Conducted Spurious Emission(dBm)	-43.36	-45.96	2.60	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	56.36	57.48	-1.12	3
BT	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
BLE 1Mbps (CH39)	6dB Bandwidth (MHz)	0.67	0.67	0.00	3
	99% Bandwidth (MHz)	1.02	1.02	0.00	3
	Power Spectral Density (dBm/3KHz)	-9.35	-9.50	0.15	3
	Conducted Band Edges and Spurious Emission (dBm)	-55.57	-52.79	2.78	3
	Conducted Spurious Emission (dBm)	-50.79	-49.64	1.15	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission (dBuV/m)	45.97	46.01	-0.04	3
BLE	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.06	8.02	0.04	3
	99% Bandwidth (MHz)	12.895	13.287	0.39	3
	Power Spectral Density (dBm/3KHz)	-0.08	-0.15	0.07	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.75	-36.73	1.98	3
	Conducted Spurious Emission (dBm)	-50.78	-49.45	1.33	3
WIFI 2.4G (802.11ax HE40 CH03)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.69	48.16	2.53	3
WIFI 2.4G	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 5G (802.11a CH149)	26dB Emission Bandwidth (MHz)	20.91	20.45	0.46	3
	99% Occupied Bandwidth (MHz)	16.69	16.38	0.31	3
	Power Spectral Density (dBm/MHz)	8.39	7.80	0.59	3
	DFS (s)	0.763225	0.972832	0.209607	3
WIFI 5G (11ax HE40_Ch62)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.80	50.41	0.39	3



WIFI 5G	AC Conducted Emission (dBuV)	36.87	36.45	0.42	3
WIFI 6G UNII-8 (802.11ax HE80 CH199)	26dB Emission Bandwidth (MHz)	81.18	80.99	0.19	3
	99% Occupied Bandwidth (MHz)	76.952	76.876	0.08	3
	Fundamental Maximum EIRP (dBm)	11.34	11.06	0.28	3
	Fundamental Power Spectral Density (dBm/MHz)	-2.05	-2.56	0.51	3
	In-Band Emissions (Channel Mask) (dB)	-37.39	-37.15	0.24	3
WIFI 6G UNII-7 (802.11ax HE160 CH199)	Contention Based Protocol (dBm)	-69.05	-68.09	0.96	3
WIFI 6G (11ax HE160_Ch15)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.62	50.46	0.16	3
WLAN 6G	AC Conducted Emission (dBuV)	43.18	45.05	1.87	3
Part 15C NFC	20dB Emission Bandwidth (KHz)	2.49	2.49	0	3
	99% Occupied Bandwidth (KHz)	2.11	2.10	0.01	3
	Field Strength of Fundamental (dBuV/m @ 30m)	9.36	11.95	2.59	3
	Radiated Spurious Emissions (dBuV/m)	29.5	30.68	1.18	3
	AC Power Line Conducted Emissions(dBuV)	45.12	43.97	1.15	3
Part 22/24/27/90 (Worst LTE Band 7C)	Conducted Power(dBm)	23.01	22.85	0.16	3
	Equivalent Isotropic Radiated Power(dBm)	20.84	20.68	0.16	3
	Peak-to-Average Ratio (dB)	6.46	6.34	0.12	3
	Occupied Bandwidth(MHz)	37.80	38.12	0.32	3
	Conducted Band Edge (dBm)	-26.52	-28.49	1.97	3
	Conducted Spurious Emission(dBm)	-50.27	-51.26	0.99	3
	Frequency Stability (ppm)	0.0029	0.0026	0.00	3



Test Item	Mode	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	14.05	13.76	0.29	3
	BLE 1Mbps	5.69	5.39	0.3	3
	BLE 2Mbps	5.94	5.49	0.45	3
	11b, 2.4GHz	24.78	24.42	0.36	3
	11g, 2.4GHz	27.79	27.65	0.14	3
	11n HT20, 2.4GHz	27.88	27.25	0.63	3
	11n HT40, 2.4GHz	26.14	25.2	0.94	3
	11ax 20, 2.4GHz	28.03	27.41	0.62	3
	11ax 40, 2.4GHz	26.19	25.29	0.9	3
	11a, 5.2GHz	19.36	19.01	0.35	3
	11a, 5.3GHz	20.05	19.86	0.19	3
	11a, 5.5GHz	19.69	19.12	0.57	3
	11a, 5.8GHz	21.09	20.81	0.28	3
	11n HT20, 5.2GHz	19.54	19.12	0.42	3
	11n HT20, 5.3GHz	19.66	19.25	0.41	3
	11n HT20, 5.5GHz	19.92	19.34	0.58	3
	11n HT20, 5.8GHz	20.91	20.53	0.38	3
	11ac VHT20, 5.2GHz	19.59	19.24	0.35	3
	11ac VHT20, 5.3GHz	19.72	19.34	0.38	3
	11ac VHT20, 5.5GHz	19.74	19.62	0.12	3
	11ac VHT20, 5.8GHz	20.92	20.63	0.29	3
	11ax HE20, 5.2GHz	19.67	19.08	0.59	3
	11ax HE20, 5.3GHz	19.80	19.71	0.09	3
	11ax HE20, 5.5GHz	20.02	19.27	0.75	3
	11ax HE20, 5.8GHz	21.05	20.75	0.3	3
	11n HT40, 5.2GHz	19.82	19.33	0.49	3
	11n HT40, 5.3GHz	19.60	19.17	0.43	3
	11n HT40, 5.5GHz	19.99	19.27	0.72	3
	11n HT40, 5.8GHz	19.74	19.31	0.43	3
	11ac VHT40, 5.2GHz	19.96	19.56	0.4	3
	11ac VHT40, 5.3GHz	19.71	19.22	0.49	3
	11ac VHT40, 5.5GHz	19.99	19.54	0.45	3
	11ac VHT40, 5.8GHz	19.83	19.32	0.51	3
	11ax HE40, 5.2GHz	20.37	20.02	0.35	3
	11ax HE40, 5.3GHz	20.06	19.54	0.52	3
	11ax HE40, 5.5GHz	20.39	19.98	0.41	3
	11ax HE40, 5.8GHz	20.31	19.98	0.33	3
	11ac VHT80, 5.2GHz	17.13	16.88	0.25	3
	11ac VHT80, 5.3GHz	17.56	17.11	0.45	3
	11ac VHT80, 5.5GHz	18.95	18.45	0.5	3
	11ac VHT80, 5.8GHz	18.69	18.19	0.5	3
	11ax HE80, 5.2GHz	17.19	16.84	0.35	3
	11ax HE80, 5.3GHz	17.63	17.38	0.25	3
	11ax HE80, 5.5GHz	19.63	19.31	0.32	3
11ax HE80, 5.8GHz	19.21	18.96	0.25	3	
11ac VHT160, 5.2GHz	15.34	14.98	0.36	3	
11ac VHT160, 5.5GHz	14.75	14.32	0.43	3	
11ax HE160, 5.2GHz	15.36	15.13	0.23	3	
11ax HE160, 5.5GHz	14.76	14.35	0.41	3	
11ax HE20, U-NII-5	10.00	9.23	0.77	3	



11ax HE20, U-NII-6	9.31	8.7	0.61	3
11ax HE20, U-NII-7	9.42	9.03	0.39	3
11ax HE20, U-NII-8	10.04	9.82	0.22	3
11ax HE40, U-NII-5	13.09	12.62	0.47	3
11ax HE40, U-NII-6	12.27	12.04	0.23	3
11ax HE40, U-NII-7	12.49	11.89	0.60	3
11ax HE40, U-NII-8	13.39	13.13	0.26	3
11ax HE80, U-NII-5	15.01	14.24	0.77	3
11ax HE80, U-NII-6	14.70	14.22	0.48	3
11ax HE80, U-NII-7	14.44	13.66	0.78	3
11ax HE80, U-NII-8	15.64	15.36	0.28	3
11ax HE160, U-NII-5	16.44	15.68	0.76	3
11ax HE160, U-NII-6	16.22	15.78	0.44	3
11ax HE160, U-NII-7	16.31	15.75	0.56	3
11ax HE160, U-NII-8	15.37	15.17	0.2	3
GSM 850	32.84	32.82	0.02	3
GSM 1900	29.16	28.93	0.23	3
WCDMA 850	23.03	22.93	0.1	3
WCDMA1900	22.81	22.79	0.02	3
LTE B2	22.92	22.61	0.31	3
LTE B5	22.94	22.92	0.02	3
LTE B26 (Part 22H)	23.06	23.05	0.01	3
LTE B26 (Part 90S)	22.82	22.71	0.11	3
LTE B7	23.03	23.01	0.02	3
LTE B7C	23.01	22.85	0.16	3
LTE B38	23.16	23.12	0.04	3
LTE B38C	23.11	22.81	0.30	3
LTE B42	23.15	23.02	0.13	3
LTE B42C	23.04	22.96	0.08	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS/CBP. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 15, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 15, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 15, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000081 1	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2024	Aug. 05, 2024	Jan. 02, 2025	DFS (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Aug. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 05, 2024	NCR	DFS (DFS01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 21, 2024	Jan. 01, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Aug. 21, 2024	Apr. 16, 2025	CBP (DFS01-KS)

NCR: No Calibration Required.



For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Aug. 18, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 16, 2024~ Aug. 18, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.



4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz

Uncertainty of Conducted Measurement (WIFI 6G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	±0.4 Hz



Uncertainty of Conducted Measurement (DFS)

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------



03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------

03CH03-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83dB
---	--------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	22 ~ 23 °C
		Temperature :	41 ~ 42 %





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2400-2483.5	6	Bluetooth-LE_GSFK	39	2480	2Mbps	Full	-
	U-NII-2A	5.25-5.35	CDD 6+8	802.11ax HE40	62	5310	MCS0	Full	-
	Part 27M B41 BW=20M NFC on								

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	39	2496.34	46.04	54.00	-7.96	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	4960.00	41.94	74.00	-32.06	V	PEAK	Pass	Harmonic
	802.11ax HE40	62	5350.20	50.85	54.00	-3.15	H	Average	Pass	Band Edge
	802.11ax HE40	62	7752.40	62.37	70.20	-7.83	V	Peak	Pass	Harmonic

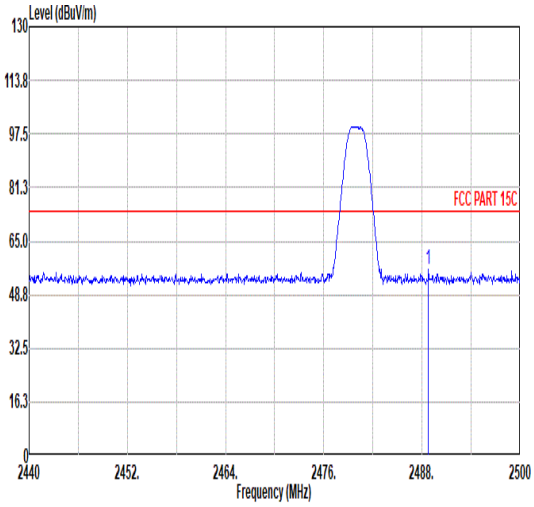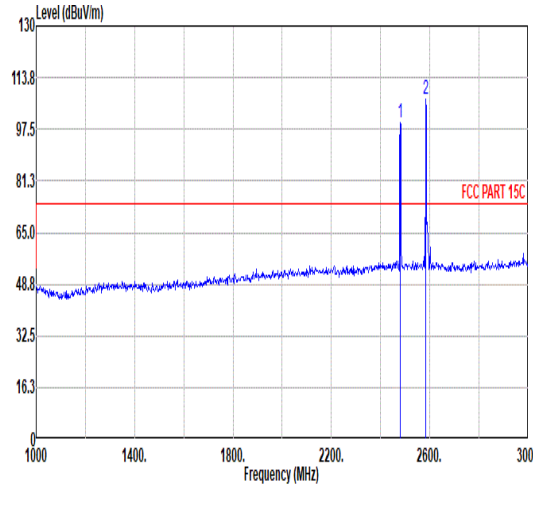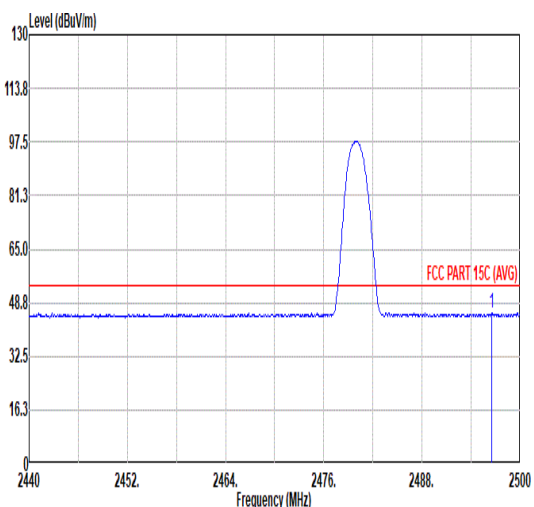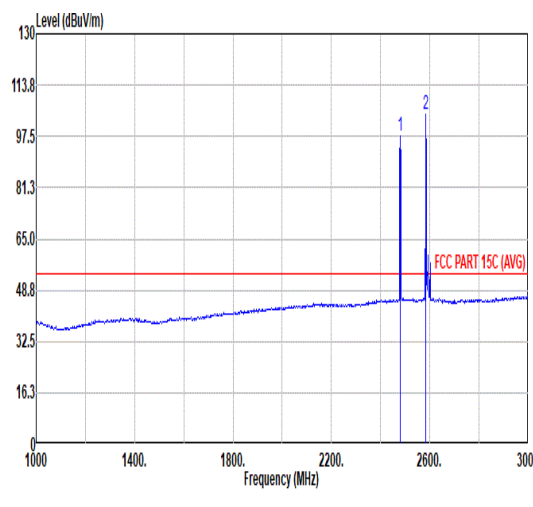

Mode	1																																																																																																				
	Co-location Band Edge																																																																																																				
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																				
ANT	6																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.78</td> <td>56.44</td> <td>74.00</td> <td>-17.56</td> <td>43.31</td> <td>32.63</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>307</td> <td>309</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	307	309	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.82</td> <td>-----</td> <td>86.74</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>307</td> <td>309</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>2584.00</td> <td>106.92</td> <td>-----</td> <td>93.93</td> <td>32.36</td> <td>6.87</td> <td>32.24</td> <td>6.00</td> <td>307</td> <td>309</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak	2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	307	309	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak																																																																																										
2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309	Peak																																																																																										
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2496.52</td> <td>45.66</td> <td>54.00</td> <td>-8.34</td> <td>32.47</td> <td>32.68</td> <td>6.75</td> <td>32.24</td> <td>6.00</td> <td>307</td> <td>309</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2496.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.66</td> <td>-----</td> <td>84.58</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>307</td> <td>309</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2584.00</td> <td>104.57</td> <td>-----</td> <td>91.58</td> <td>32.36</td> <td>6.87</td> <td>32.24</td> <td>6.00</td> <td>307</td> <td>309</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average	2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309	Average
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2496.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average																																																																																										
2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309	Average																																																																																										



		1																																																																																														
Mode	Co-location Band Edge																																																																																															
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																															
ANT	6																																																																																															
Pol.	Vertical	Fundamental																																																																																														
Peak																																																																																																
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.02</td> <td>55.14</td> <td>74.00</td> <td>-18.86</td> <td>41.94</td> <td>32.69</td> <td>6.75</td> <td>32.24</td> <td>6.00</td> <td>245</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.01</td> <td>-----</td> <td>80.93</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>245</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>2584.00</td> <td>106.81</td> <td>-----</td> <td>93.82</td> <td>32.36</td> <td>6.87</td> <td>32.24</td> <td>6.00</td> <td>245</td> <td>0 Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.01	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak	2	2584.00	106.81	-----	93.82	32.36	6.87	32.24	6.00	245
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	94.01	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak																																																																																						
2	2584.00	106.81	-----	93.82	32.36	6.87	32.24	6.00	245	0 Peak																																																																																						
Avg																																																																																																
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2496.34</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>32.85</td> <td>32.68</td> <td>6.75</td> <td>32.24</td> <td>6.00</td> <td>245</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>91.80</td> <td>-----</td> <td>78.72</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>245</td> <td>0 Average</td> </tr> <tr> <td>2</td> <td>2584.00</td> <td>104.50</td> <td>-----</td> <td>91.51</td> <td>32.36</td> <td>6.87</td> <td>32.24</td> <td>6.00</td> <td>245</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.80	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average	2	2584.00	104.50	-----	91.51	32.36	6.87	32.24	6.00	245
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	91.80	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average																																																																																						
2	2584.00	104.50	-----	91.51	32.36	6.87	32.24	6.00	245	0 Average																																																																																						



Mode	1																																																																																																											
	Co-location Harmonic																																																																																																											
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.34</td> <td>74.00</td> <td>-32.66</td> <td>58.89</td> <td>34.00</td> <td>9.61</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5310.40</td> <td>59.83</td> <td>74.00</td> <td>-14.17</td> <td>76.23</td> <td>34.52</td> <td>9.89</td> <td>60.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	---	---	PEAK	2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.94</td> <td>74.00</td> <td>-32.06</td> <td>59.49</td> <td>34.00</td> <td>9.61</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5313.20</td> <td>60.97</td> <td>74.00</td> <td>-13.03</td> <td>77.36</td> <td>34.53</td> <td>9.89</td> <td>60.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	---	---	PEAK	2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																				
1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	---	---	PEAK																																																																																																
2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	---	---	Peak																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																				
1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	---	---	PEAK																																																																																																
2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	---	---	Peak																																																																																																



Note: #2 is co-location of WLAN 5G_CH62 TX fundamental signal.



1																																												
Mode	Co-location Band Edge																																											
	802.11ax HE40_CH62_5310MHz_Full																																											
ANT	CDD 6+8																																											
Pol.	Horizontal																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5044.64</td> <td>55.88</td> <td>74.00</td> <td>-18.12</td> <td>44.14</td> <td>34.00</td> <td>9.69</td> <td>31.95</td> <td>0.00</td> <td>100</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100	334	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100	334	PEAK																																
<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>105.68</td> <td>-----</td> <td>-----</td> <td>93.06</td> <td>34.53</td> <td>9.89</td> <td>31.80</td> <td>0.00</td> <td>100</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	105.68	-----	-----	93.06	34.53	9.89	31.80	0.00	100	334	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1	5310.00	105.68	-----	-----	93.06	34.53	9.89	31.80	0.00	100	334	PEAK																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.53</td> <td>46.27</td> <td>54.00</td> <td>-7.73</td> <td>34.51</td> <td>34.00</td> <td>9.70</td> <td>31.94</td> <td>0.00</td> <td>100</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334	AVERAGE																																
<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>97.53</td> <td>-----</td> <td>-----</td> <td>84.93</td> <td>34.52</td> <td>9.89</td> <td>31.81</td> <td>0.00</td> <td>100</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	97.53	-----	-----	84.93	34.52	9.89	31.81	0.00	100	334	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1	5310.00	97.53	-----	-----	84.93	34.52	9.89	31.81	0.00	100	334	AVERAGE																																



1	
Mode	Co-location Band Edge
	802.11ax HE40_CH62_5310MHz_Full
ANT	CDD 6+8
Pol.	Horizontal
Peak	Fundamental
	Blank
Avg	Fundamental
	Blank

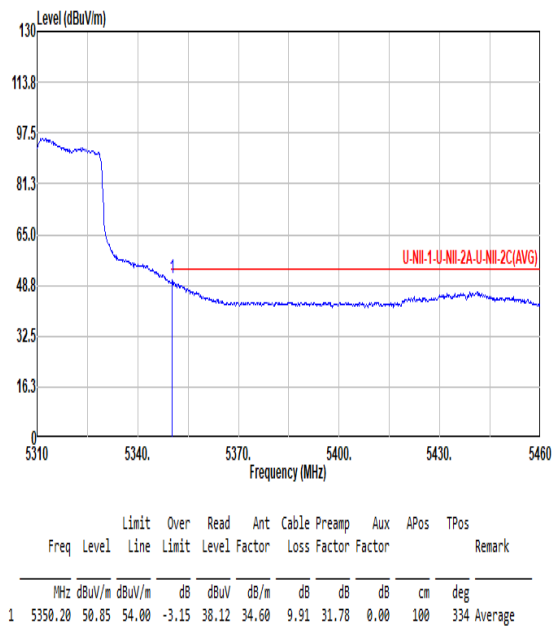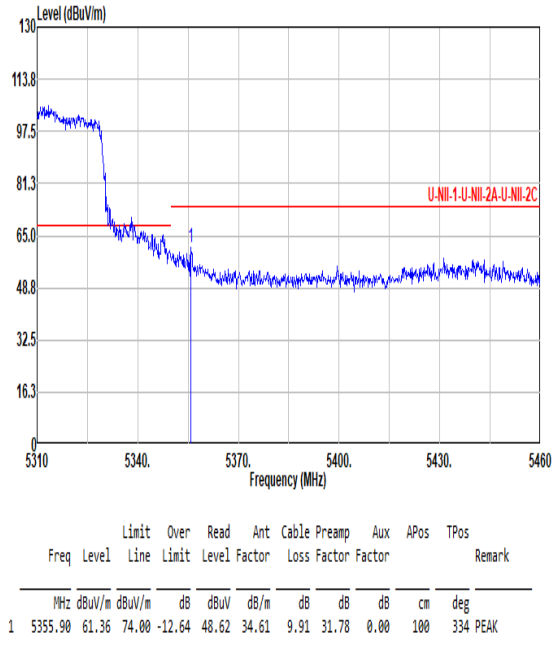



1																																													
Mode	Co-location Band Edge																																												
	802.11ax HE40_CH62_5310MHz_Full																																												
ANT	CDD 6+8																																												
Pol.	Vertical																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5064.48</td> <td>55.25</td> <td>74.00</td> <td>-18.75</td> <td>43.45</td> <td>34.03</td> <td>9.71</td> <td>31.94</td> <td>0.00</td> <td>300</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311	PEAK																																	
<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>101.35</td> <td>-----</td> <td>-----</td> <td>88.73</td> <td>34.53</td> <td>9.89</td> <td>31.80</td> <td>0.00</td> <td>300</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	101.35	-----	-----	88.73	34.53	9.89	31.80	0.00	300	311	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5310.00	101.35	-----	-----	88.73	34.53	9.89	31.80	0.00	300	311	PEAK																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5055.49</td> <td>45.23</td> <td>54.00</td> <td>-8.77</td> <td>33.46</td> <td>34.01</td> <td>9.70</td> <td>31.94</td> <td>0.00</td> <td>300</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311	AVERAGE																																	
<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>93.01</td> <td>-----</td> <td>-----</td> <td>80.39</td> <td>34.53</td> <td>9.89</td> <td>31.80</td> <td>0.00</td> <td>300</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	93.01	-----	-----	80.39	34.53	9.89	31.80	0.00	300	311	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5310.00	93.01	-----	-----	80.39	34.53	9.89	31.80	0.00	300	311	AVERAGE																																	





Mode	1																																													
	Co-location Band Edge																																													
	802.11ax HE40_CH62_5310MHz_Full																																													
ANT	CDD 6+8																																													
Pol.	Vertical	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.45</td> <td>55.61</td> <td>74.00</td> <td>-18.39</td> <td>42.88</td> <td>34.60</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>300</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5352.45	55.61	74.00	-18.39	42.88	34.60	9.91	31.78	0.00	300	311	PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5352.45	55.61	74.00	-18.39	42.88	34.60	9.91	31.78	0.00	300	311	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.55</td> <td>47.26</td> <td>54.00</td> <td>-6.74</td> <td>34.53</td> <td>34.60</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>300</td> <td>311</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5351.55	47.26	54.00	-6.74	34.53	34.60	9.91	31.78	0.00	300	311	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5351.55	47.26	54.00	-6.74	34.53	34.60	9.91	31.78	0.00	300	311	AVERAGE																																		



Mode	1																																																																																																																																
	Co-location Harmonic																																																																																																																																
	802.11ax HE40_CH62_5310MHz_Full																																																																																																																																
ANT	CDD 6+8																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7752.40</td> <td>59.18</td> <td>70.20</td> <td>-11.02</td> <td>71.84</td> <td>35.90</td> <td>12.10</td> <td>60.66</td> <td>0.00</td> <td>100</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10620.00</td> <td>46.88</td> <td>74.00</td> <td>-27.12</td> <td>55.95</td> <td>37.88</td> <td>14.31</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7752.40	59.18	70.20	-11.02	71.84	35.90	12.10	60.66	0.00	100	262	Peak	2	10620.00	46.88	74.00	-27.12	55.95	37.88	14.31	61.26	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7752.40</td> <td>62.37</td> <td>70.20</td> <td>-7.83</td> <td>75.03</td> <td>35.90</td> <td>12.10</td> <td>60.66</td> <td>0.00</td> <td>100</td> <td>265</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10336.30</td> <td>54.56</td> <td>68.20</td> <td>-13.64</td> <td>64.36</td> <td>37.37</td> <td>14.11</td> <td>61.28</td> <td>0.00</td> <td>100</td> <td>91</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>10620.00</td> <td>46.28</td> <td>74.00</td> <td>-27.72</td> <td>55.35</td> <td>37.88</td> <td>14.31</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7752.40	62.37	70.20	-7.83	75.03	35.90	12.10	60.66	0.00	100	265	Peak	2	10336.30	54.56	68.20	-13.64	64.36	37.37	14.11	61.28	0.00	100	91	Peak	3	10620.00	46.28	74.00	-27.72	55.35	37.88	14.31	61.26	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	7752.40	59.18	70.20	-11.02	71.84	35.90	12.10	60.66	0.00	100	262	Peak																																																																																																																					
2	10620.00	46.88	74.00	-27.12	55.95	37.88	14.31	61.26	0.00	---	---	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	7752.40	62.37	70.20	-7.83	75.03	35.90	12.10	60.66	0.00	100	265	Peak																																																																																																																					
2	10336.30	54.56	68.20	-13.64	64.36	37.37	14.11	61.28	0.00	100	91	Peak																																																																																																																					
3	10620.00	46.28	74.00	-27.72	55.35	37.88	14.31	61.26	0.00	---	---	PEAK																																																																																																																					

Note: #1 is the 3rd harmonic from LTE B41, the limit should be -25dBm and converted to field strength limit 70.2dBuV/m @3m distance, the test results is Pass.

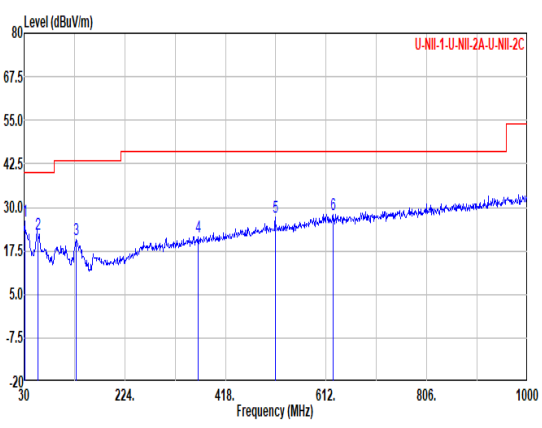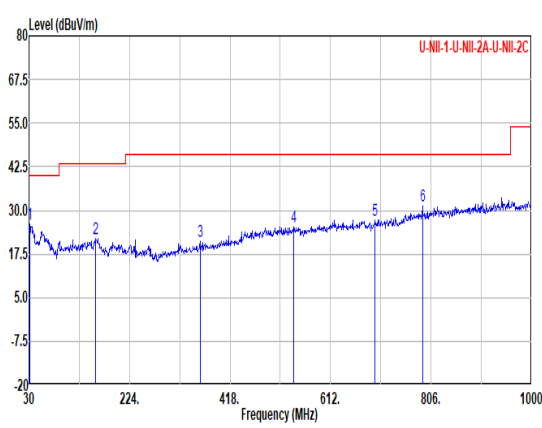

Mode	1																																																																																																																																																																																																
	30-1G																																																																																																																																																																																																
	802.11ax HE40_CH62_5310MHz_Full																																																																																																																																																																																																
ANT	CDD 6+8																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																															
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red limit line and a blue signal line with peaks marked 1-6. The signal level is generally below the limit, with some peaks near 30 MHz.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red limit line and a blue signal line with peaks marked 1-6. The signal level is generally below the limit, with some peaks near 30 MHz.</p>																																																																																																																																																																																															
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>25.90</td><td>40.00</td><td>-14.10</td><td>33.01</td><td>25.09</td><td>0.76</td><td>32.96</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>57.16</td><td>22.33</td><td>40.00</td><td>-17.67</td><td>41.19</td><td>12.85</td><td>1.04</td><td>32.75</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>130.88</td><td>20.91</td><td>43.50</td><td>-22.59</td><td>34.37</td><td>17.56</td><td>1.69</td><td>32.71</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>364.65</td><td>21.59</td><td>46.00</td><td>-24.41</td><td>30.88</td><td>20.90</td><td>2.83</td><td>33.10</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>514.03</td><td>27.10</td><td>46.00</td><td>-18.90</td><td>33.04</td><td>24.33</td><td>3.15</td><td>33.42</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>625.58</td><td>27.94</td><td>46.00</td><td>-18.06</td><td>31.46</td><td>26.32</td><td>3.69</td><td>33.53</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	---	Peak	2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	---	Peak	3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	---	Peak	4	364.65	21.59	46.00	-24.41	30.88	20.90	2.83	33.10	0.00	---	Peak	5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	---	Peak	6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>31.94</td><td>25.95</td><td>40.00</td><td>-14.05</td><td>33.76</td><td>24.39</td><td>0.76</td><td>32.96</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>159.01</td><td>21.96</td><td>43.50</td><td>-21.54</td><td>36.23</td><td>16.57</td><td>1.84</td><td>32.68</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>360.77</td><td>20.90</td><td>46.00</td><td>-25.02</td><td>30.36</td><td>20.88</td><td>2.81</td><td>33.07</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>540.22</td><td>25.32</td><td>46.00</td><td>-20.68</td><td>30.76</td><td>24.90</td><td>3.18</td><td>33.52</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>698.33</td><td>27.11</td><td>46.00</td><td>-18.89</td><td>30.02</td><td>26.71</td><td>3.95</td><td>33.57</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>789.51</td><td>31.24</td><td>46.00</td><td>-14.76</td><td>32.30</td><td>28.04</td><td>4.19</td><td>33.29</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	---	Peak	2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	---	Peak	3	360.77	20.90	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	---	Peak	4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	---	Peak	5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	---	Peak	6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	---
Peak	Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																							
1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	---	Peak																																																																																																																																																																																						
2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	---	Peak																																																																																																																																																																																						
3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	---	Peak																																																																																																																																																																																						
4	364.65	21.59	46.00	-24.41	30.88	20.90	2.83	33.10	0.00	---	Peak																																																																																																																																																																																						
5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	---	Peak																																																																																																																																																																																						
6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	---	Peak																																																																																																																																																																																						
Peak	Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																							
1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	---	Peak																																																																																																																																																																																						
2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	---	Peak																																																																																																																																																																																						
3	360.77	20.90	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	---	Peak																																																																																																																																																																																						
4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	---	Peak																																																																																																																																																																																						
5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	---	Peak																																																																																																																																																																																						
6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	---	Peak																																																																																																																																																																																						



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-1, XT2437-2
FCC ID : IHDT56AS8
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Jul. 23, 2024 ~ Aug. 14, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

1.1 Applicant5

1.2 Manufacturer.....5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification of Equipment Under Test.....6

1.5 Modification of EUT6

1.6 Testing Location6

1.7 Test Software.....7

1.8 Applicable Standards.....7

1.9 Specification of Accessory.....8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....9

2.1 Carrier Frequency Channel9

2.2 Test Mode.....10

2.3 Connection Diagram of Test System.....11

2.4 Support Unit used in test configuration and system12

2.5 EUT Operation Test Setup12

2.6 Measurement Results Explanation Example.....12

3 TEST RESULT13

3.1 Number of Channel Measurement13

3.2 Hopping Channel Separation Measurement14

3.3 Dwell Time Measurement.....15

3.4 20dB and 99% Bandwidth Measurement16

3.5 Output Power Measurement.....17

3.6 Conducted Band Edges Measurement18

3.7 Conducted Spurious Emission Measurement19

3.8 Radiated Band Edges and Spurious Emission Measurement20

3.9 AC Conducted Emission Measurement.....24

3.10 Antenna Requirements.....26

4 LIST OF MEASURING EQUIPMENT.....27

5 MEASUREMENT UNCERTAINTY.....28

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	-	Report only	-
3.4	-	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 17.64 dB at 2486.84 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.37 dB at 0.476 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-1, XT2437-2
FCC ID	IHDT56AS8
IMEI Code	Conducted: 357931300017436/357931300017400 Conduction: 355709740016651/355709740016669 Radiation: 355709740016511/355709740016529
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The two model names are only for market segment, no other difference.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	<ANT.6> Bluetooth BR(1Mbps) : 14.05 dBm (0.0254 W) Bluetooth EDR (2Mbps) : 12.25 dBm (0.0168 W) Bluetooth EDR (3Mbps) : 12.78 dBm (0.0190 W) <ANT.8> Bluetooth BR(1Mbps) : 13.61 dBm (0.0230 W) Bluetooth EDR (2Mbps) : 12.03 dBm (0.0160 W) Bluetooth EDR (3Mbps) : 12.39 dBm (0.0173 W)
99% Occupied Bandwidth	<ANT.6> Bluetooth BR(1Mbps) : 0.839 MHz Bluetooth EDR (2Mbps) : 1.166 MHz Bluetooth EDR (3Mbps) : 1.151 MHz <ANT.8> Bluetooth BR(1Mbps) : 0.839 MHz Bluetooth EDR (2Mbps) : 1.163 MHz Bluetooth EDR (3Mbps) : 1.148 MHz
Antenna Type / Gain	<ANT6> IFA Antenna type with gain -3.93 dBi <ANT8> IFA Antenna type with gain -4.4 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π/4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1((CHILE))	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(ATL)	Model Name	RW50
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π/4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable1 (Charging from Adapter1)		
Remark: <ol style="list-style-type: none"> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission. For Radiated Test Cases, The tests were performed with Adapter 1 and USB Cable1. 			

2.3 Connection Diagram of Test System

For AC conduction emission:

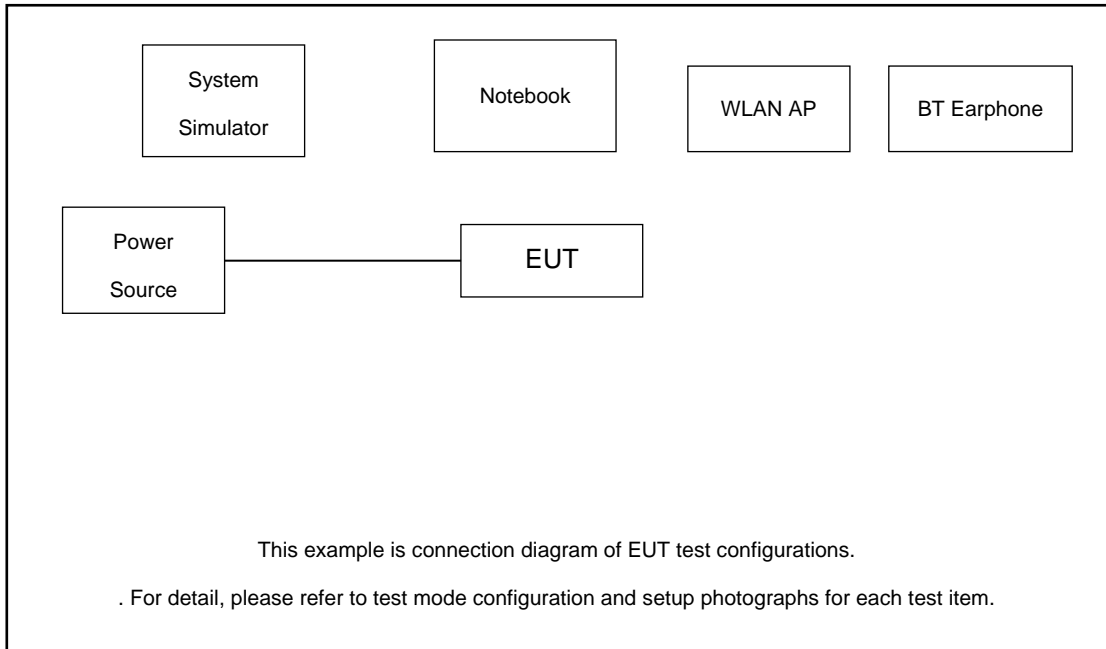

For radiated emission:

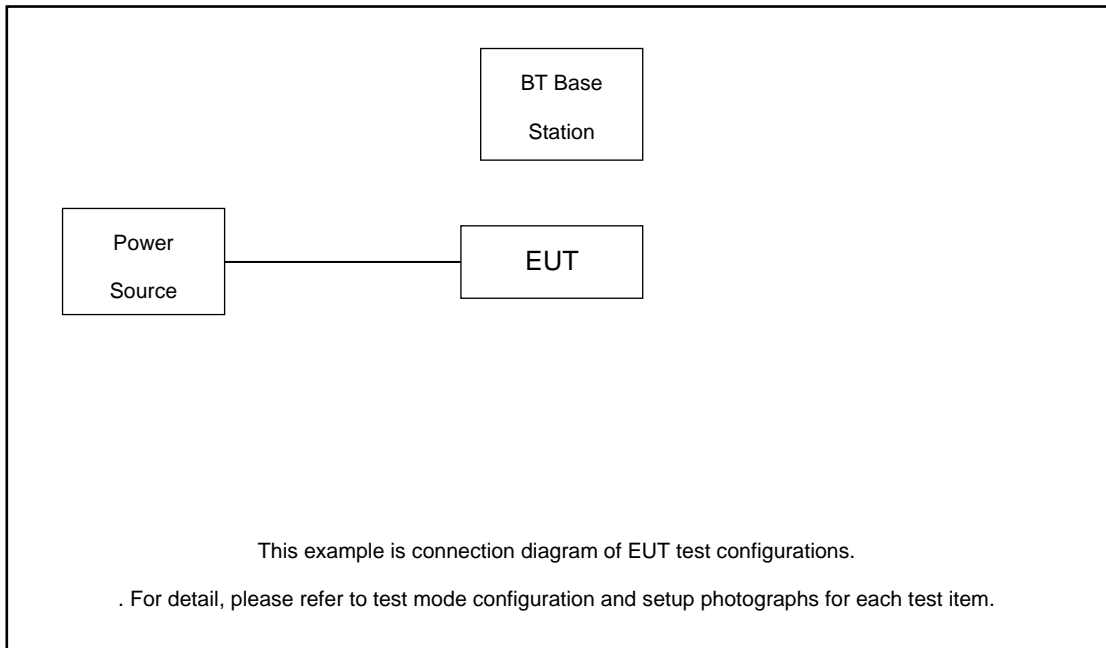



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
3.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
5.	Router	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
6.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 1.86dB and 20dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 1.86 + 20 = 21.86 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

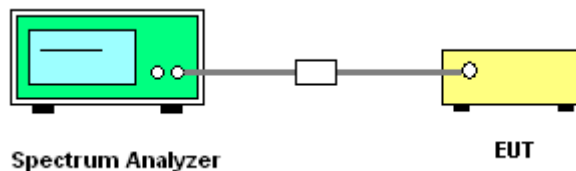

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

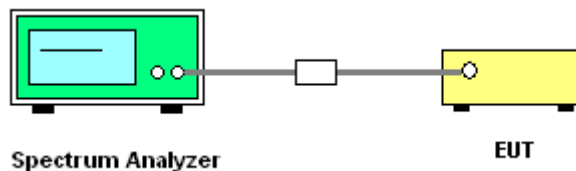

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

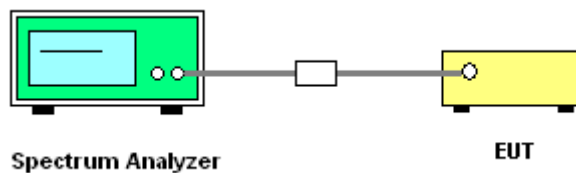

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

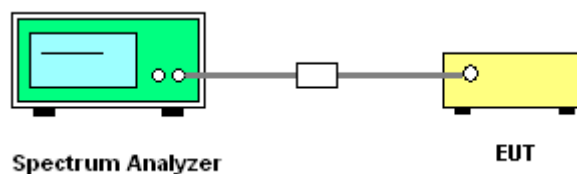

3.4.5 Test Result of 20dB Bandwidth & 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

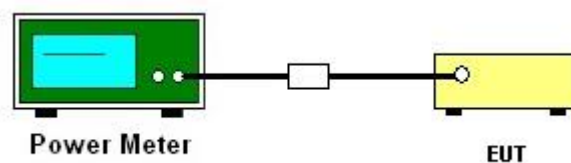

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

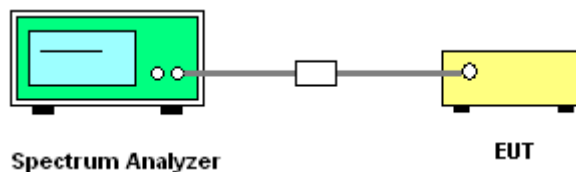

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

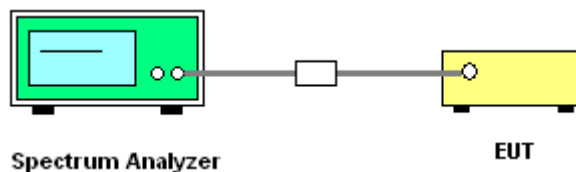

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

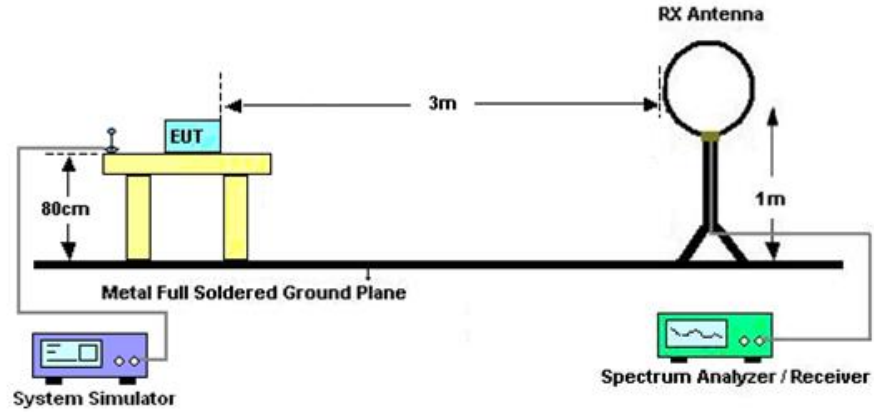

For radiated emissions from 30MHz to 1GHz

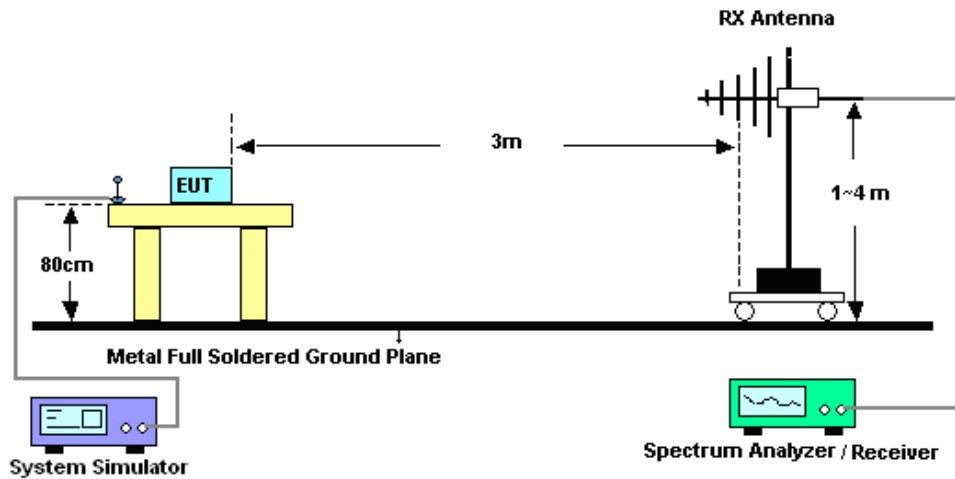

For radiated emissions above 1GHz

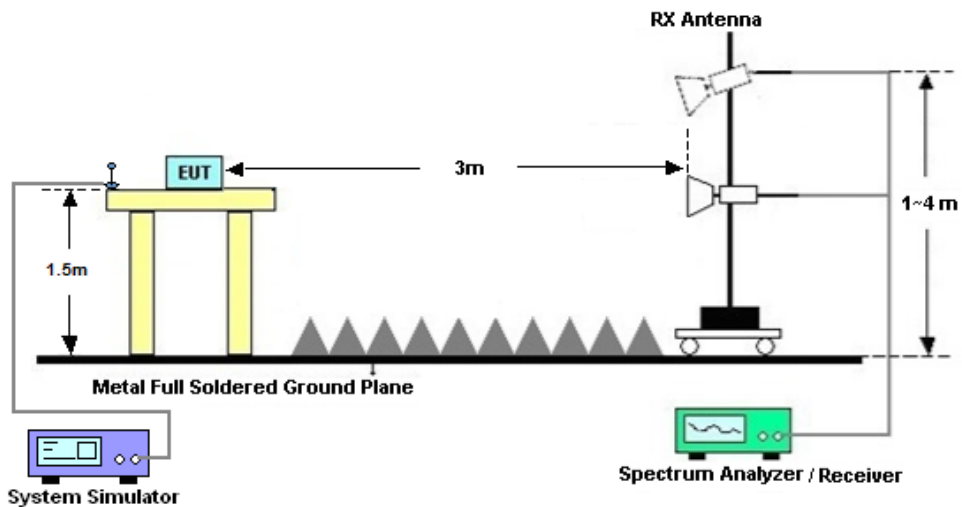



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

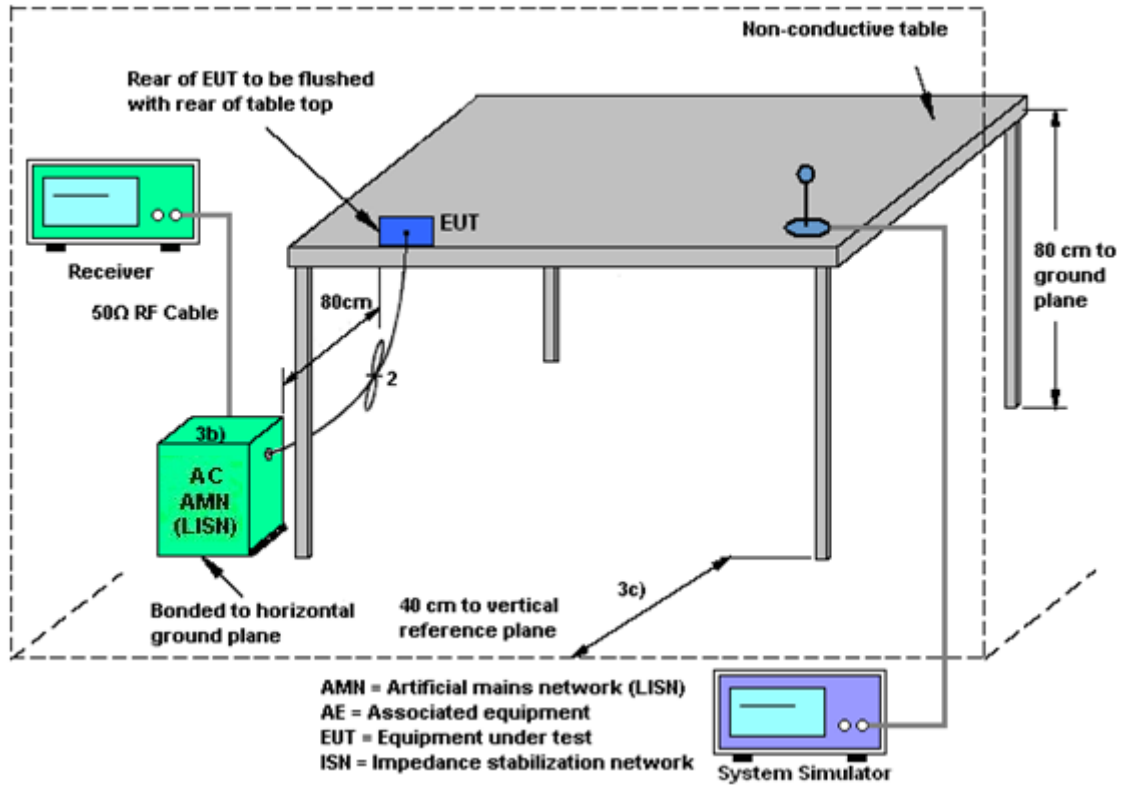

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 23, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Jul. 23, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Jul. 23, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Jan. 02, 2024	Aug. 14, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 14, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 14, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 14, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 14, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 14, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 14, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 14, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 14, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 14, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 14, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 14, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 14, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Jul. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jul. 26, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jul. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jul. 26, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH	
Test Date: <u>2024.7.23</u>	Test Engineer: <u>Jiang Jun</u>



20dB Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]
DH5	Ant6	2402	0.94	2401.54	2402.48
	Ant8	2402	0.94	2401.54	2402.48
	Ant6	2441	0.94	2440.54	2441.48
	Ant8	2441	0.94	2440.54	2441.48
	Ant6	2480	0.94	2479.54	2480.48
	Ant8	2480	0.95	2479.54	2480.48
2DH1	Ant6	2402	1.26	2401.37	2402.63
	Ant8	2402	1.26	2401.37	2402.63
	Ant6	2441	1.29	2440.34	2441.63
	Ant8	2441	1.26	2440.37	2441.63
	Ant6	2480	1.29	2479.35	2480.63
	Ant8	2480	1.26	2479.37	2480.63
3DH1	Ant6	2402	1.23	2401.40	2402.63
	Ant8	2402	1.23	2401.40	2402.63
	Ant6	2441	1.23	2440.40	2441.63
	Ant8	2441	1.23	2440.40	2441.63
	Ant6	2480	1.23	2479.40	2480.63
	Ant8	2480	1.23	2479.40	2480.63




Test Graphs

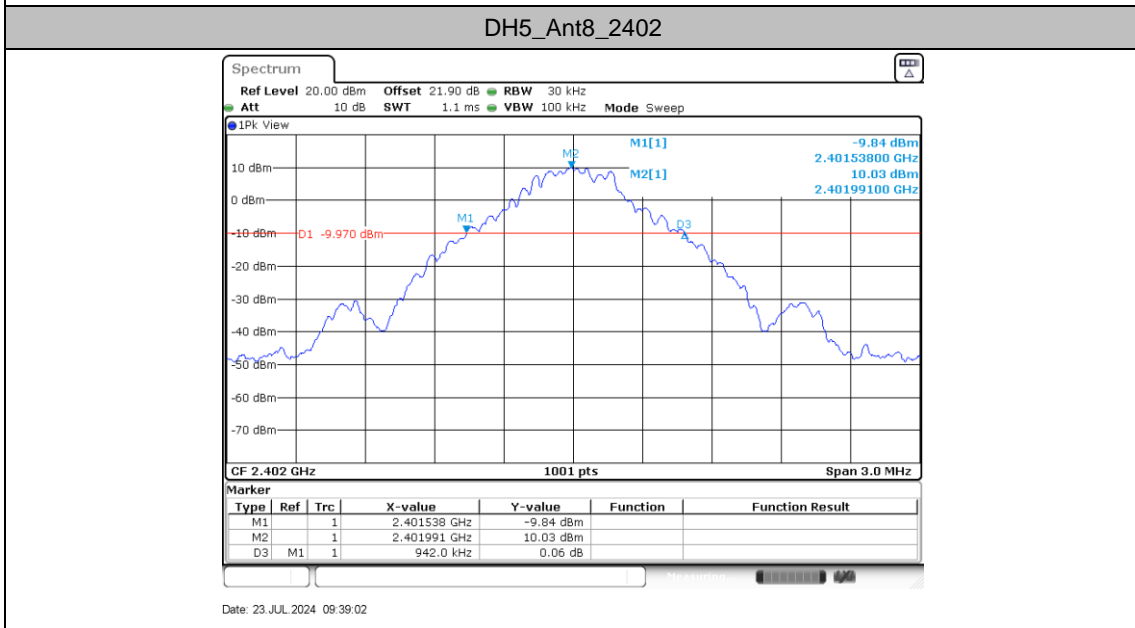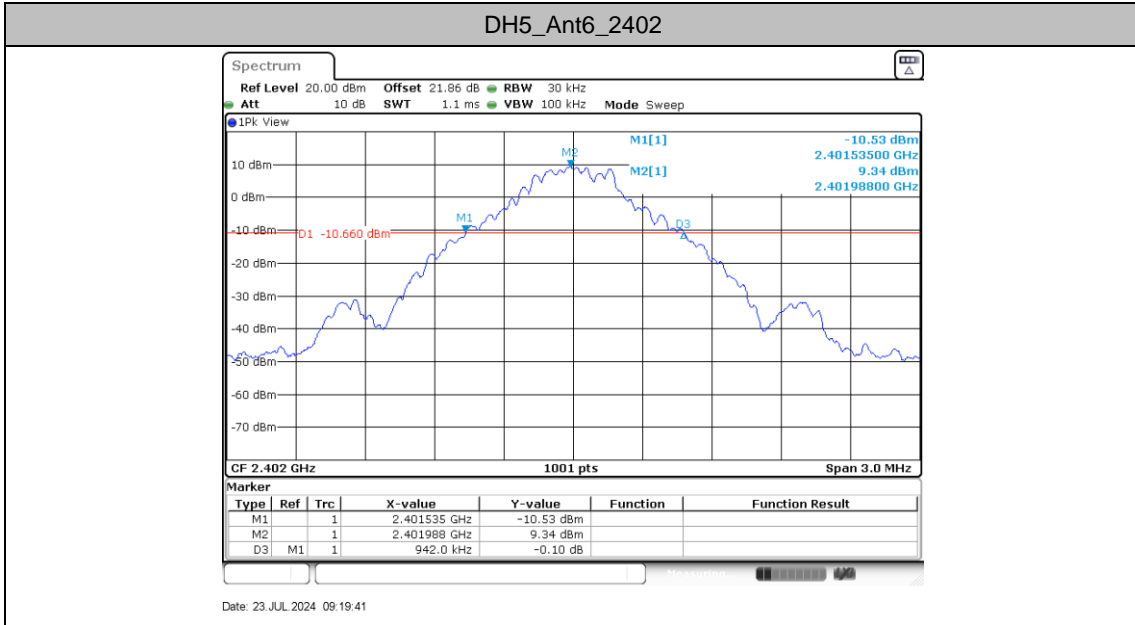




DH5_Ant6_2441

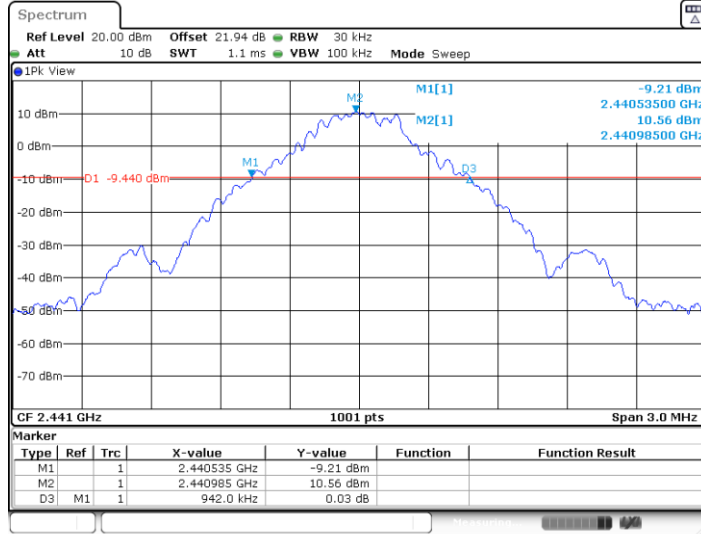

Date: 23 JUL 2024 09:20:47


DH5_Ant8_2441

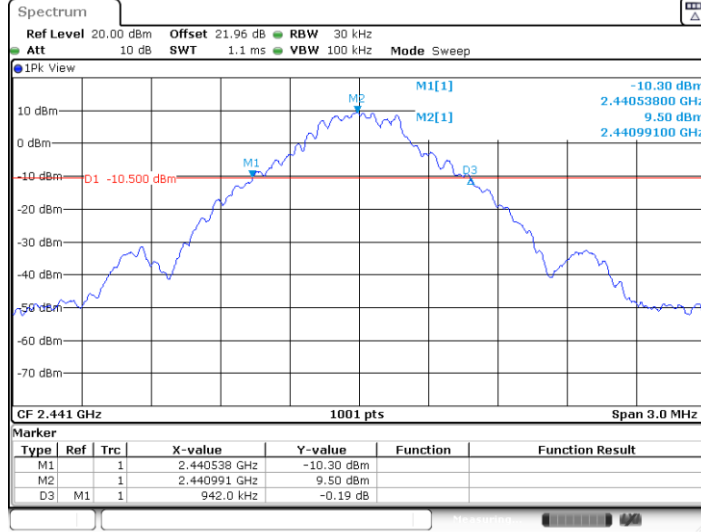

Date: 23 JUL 2024 09:40:09




DH5_Ant6_2480

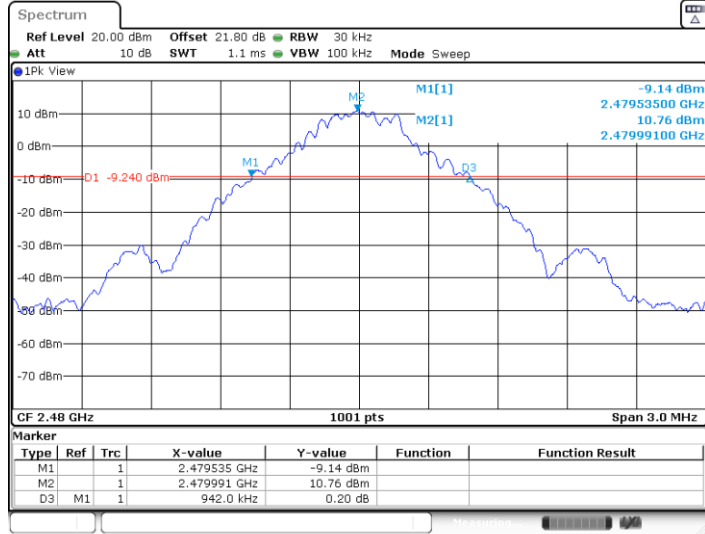

Date: 23 JUL 2024 09:21:39


DH5_Ant8_2480

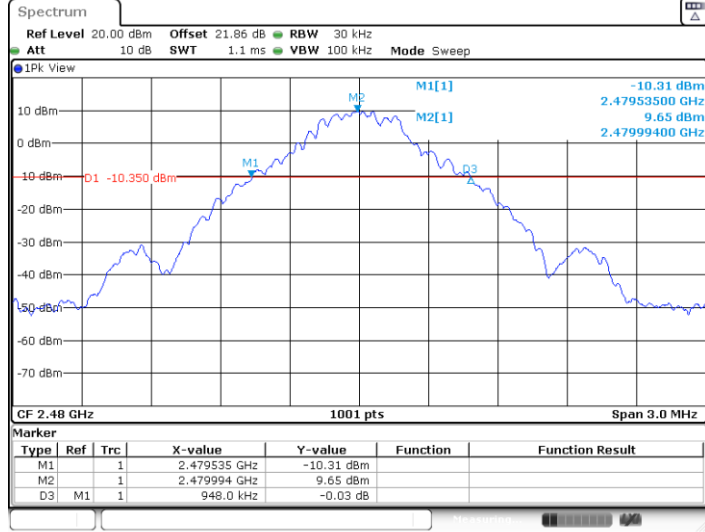

Date: 23 JUL 2024 09:41:04




2DH1_Ant6_2402

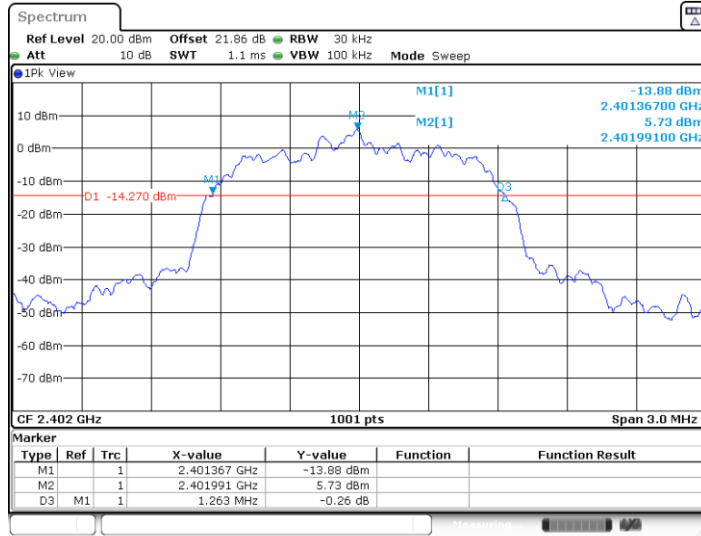

Date: 23 JUL 2024 09:22:43


2DH1_Ant8_2402

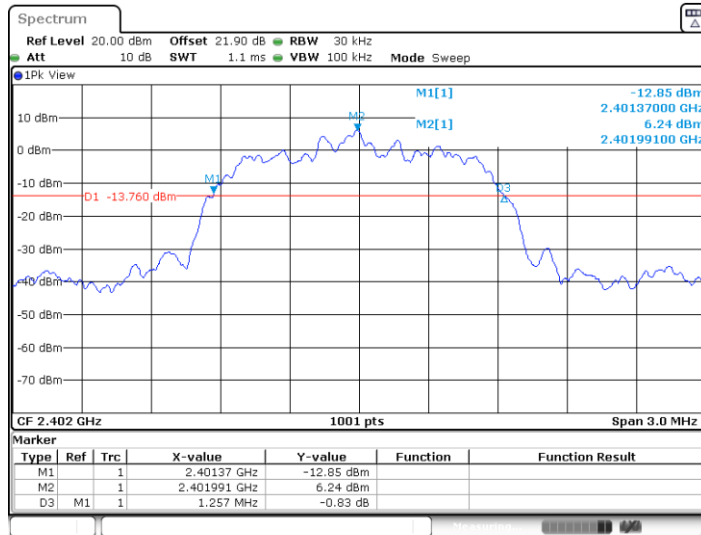

Date: 23 JUL 2024 09:42:09




2DH1_Ant6_2441


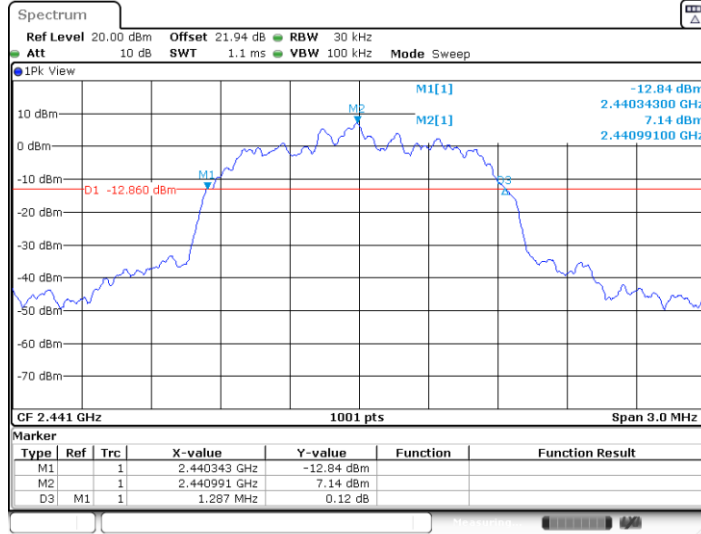


Date: 23 JUL 2024 09:23:50

2DH1_Ant8_2441

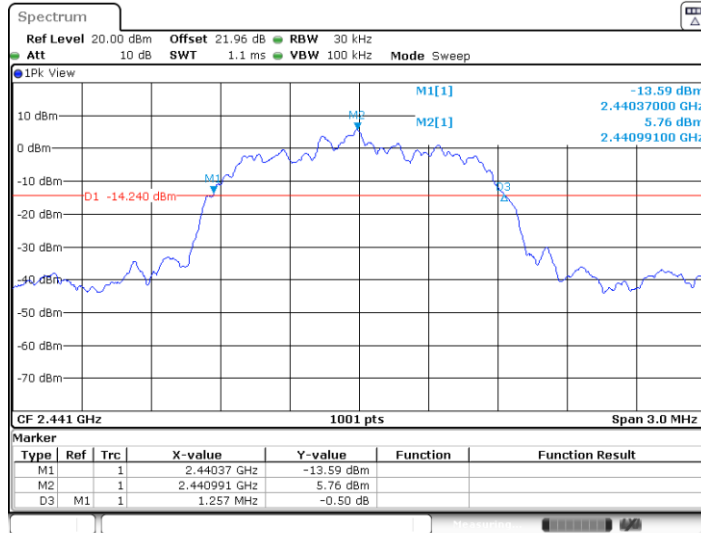


Date: 23 JUL 2024 09:45:09

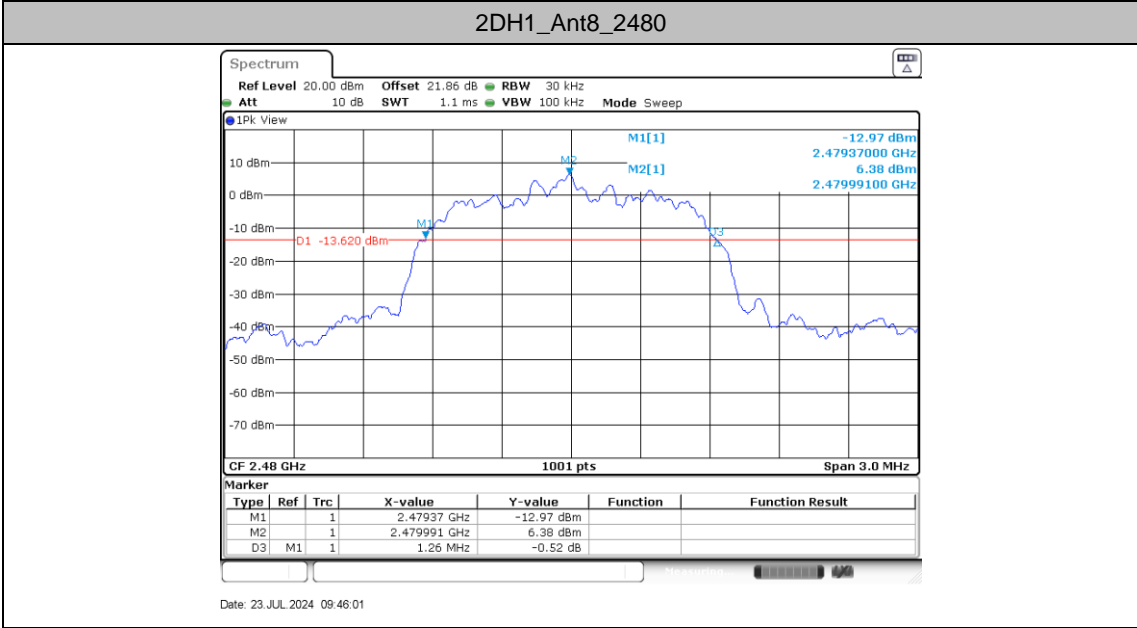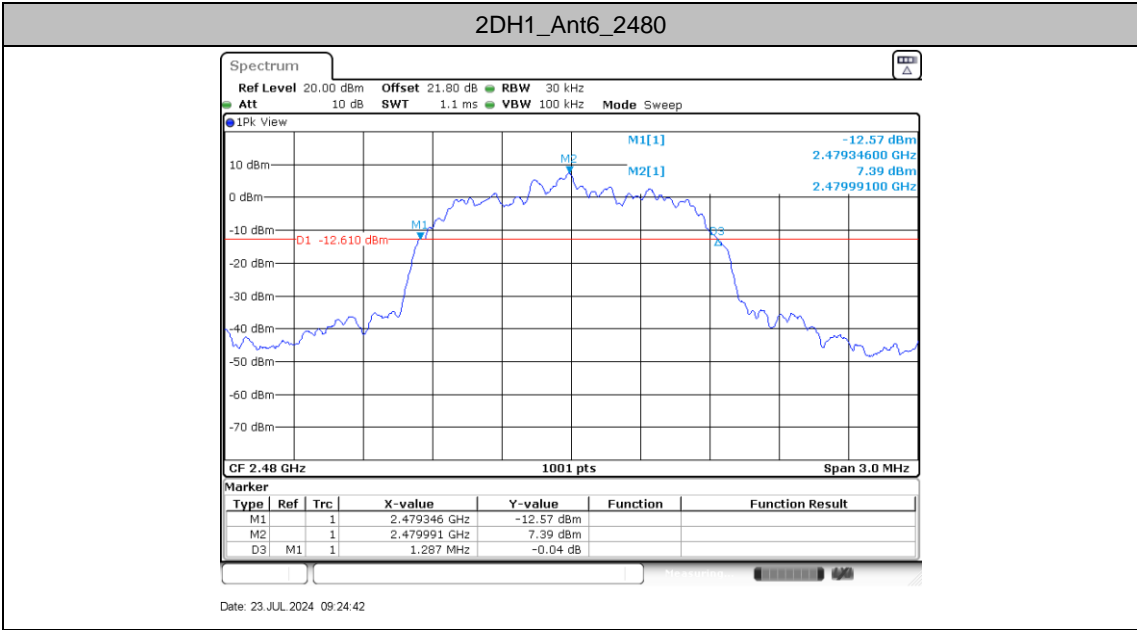




3DH1_Ant6_2402

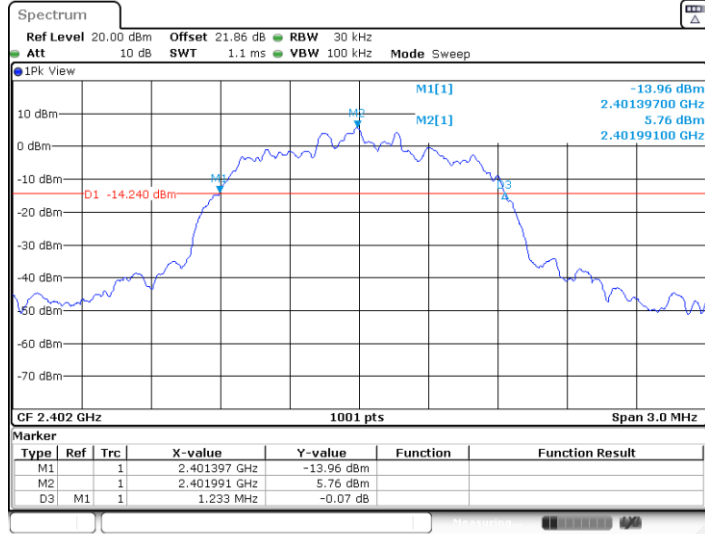

Date: 23 JUL 2024 09:25:49

3DH1_Ant8_2402

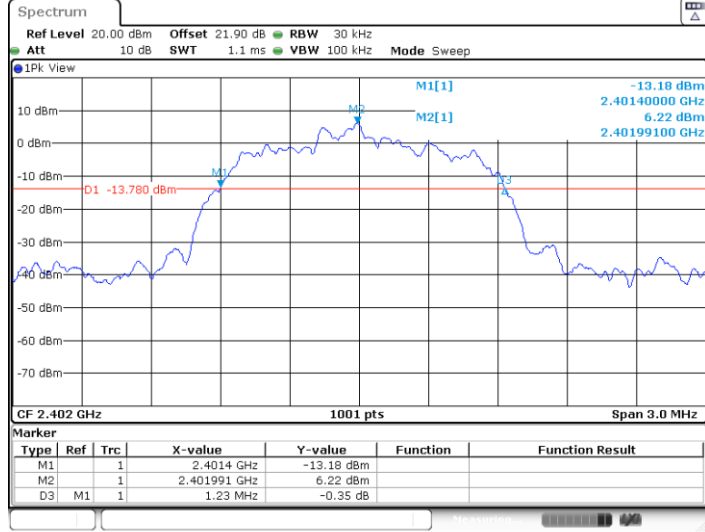


Date: 23 JUL 2024 09:47:07




3DH1_Ant6_2441



3DH1_Ant8_2441

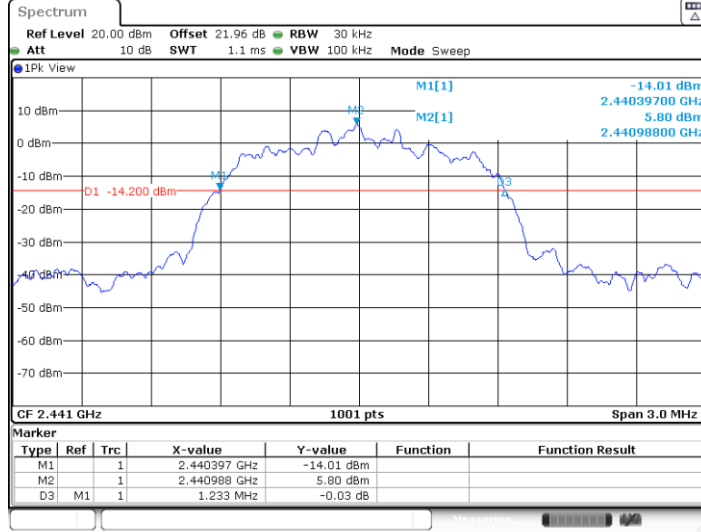

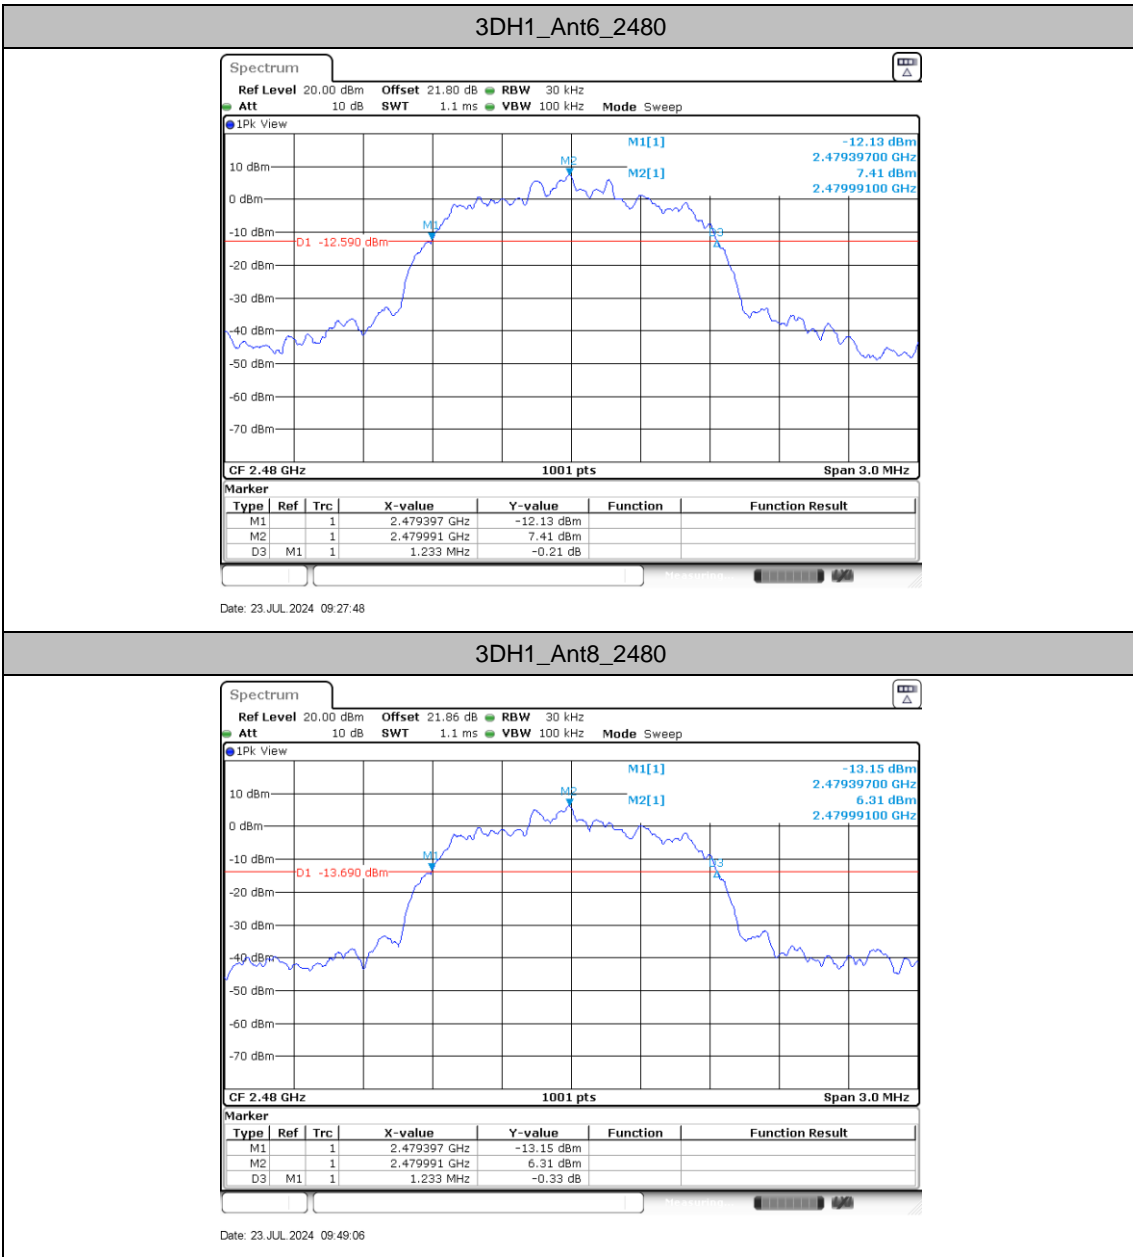





Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant6	2402	0.839	2401.5774	2402.4166
	Ant8	2402	0.839	2401.5804	2402.4196
	Ant6	2441	0.836	2440.5774	2441.4136
	Ant8	2441	0.833	2440.5804	2441.4136
	Ant6	2480	0.836	2479.5804	2480.4166
	Ant8	2480	0.836	2479.5804	2480.4166
2DH1	Ant6	2402	1.163	2401.4096	2402.5724
	Ant8	2402	1.163	2401.4126	2402.5754
	Ant6	2441	1.166	2440.4096	2441.5754
	Ant8	2441	1.163	2440.4126	2441.5754
	Ant6	2480	1.166	2479.4096	2480.5754
	Ant8	2480	1.163	2479.4126	2480.5754
3DH1	Ant6	2402	1.148	2401.4366	2402.5844
	Ant8	2402	1.148	2401.4366	2402.5844
	Ant6	2441	1.151	2440.4366	2441.5874
	Ant8	2441	1.145	2440.4396	2441.5844
	Ant6	2480	1.148	2479.4366	2480.5844
	Ant8	2480	1.148	2479.4366	2480.5844




Test Graphs

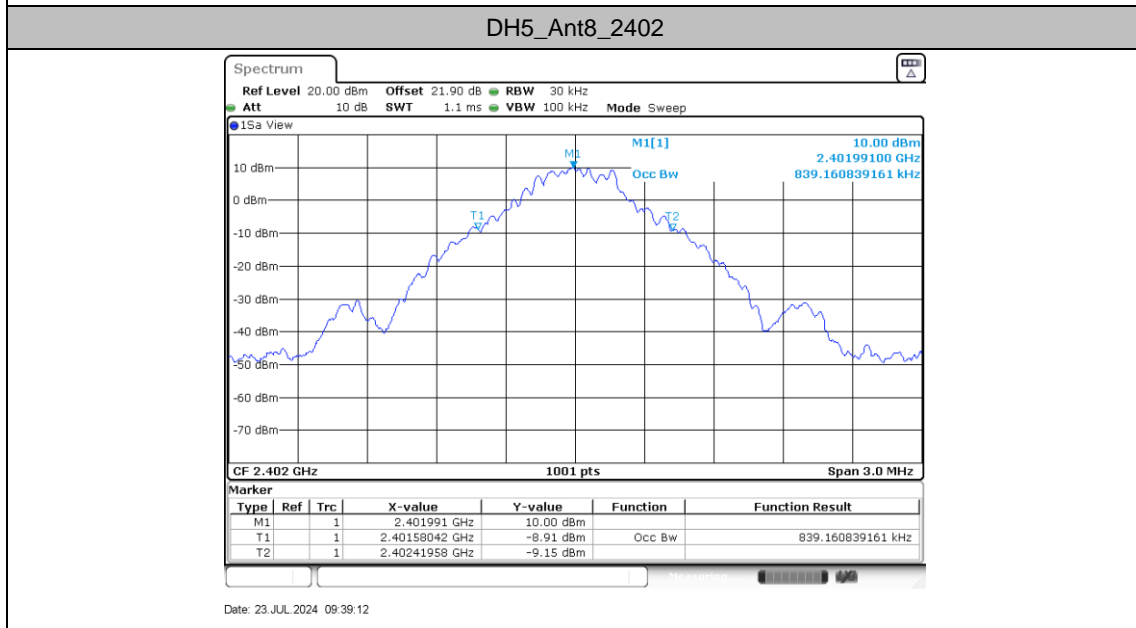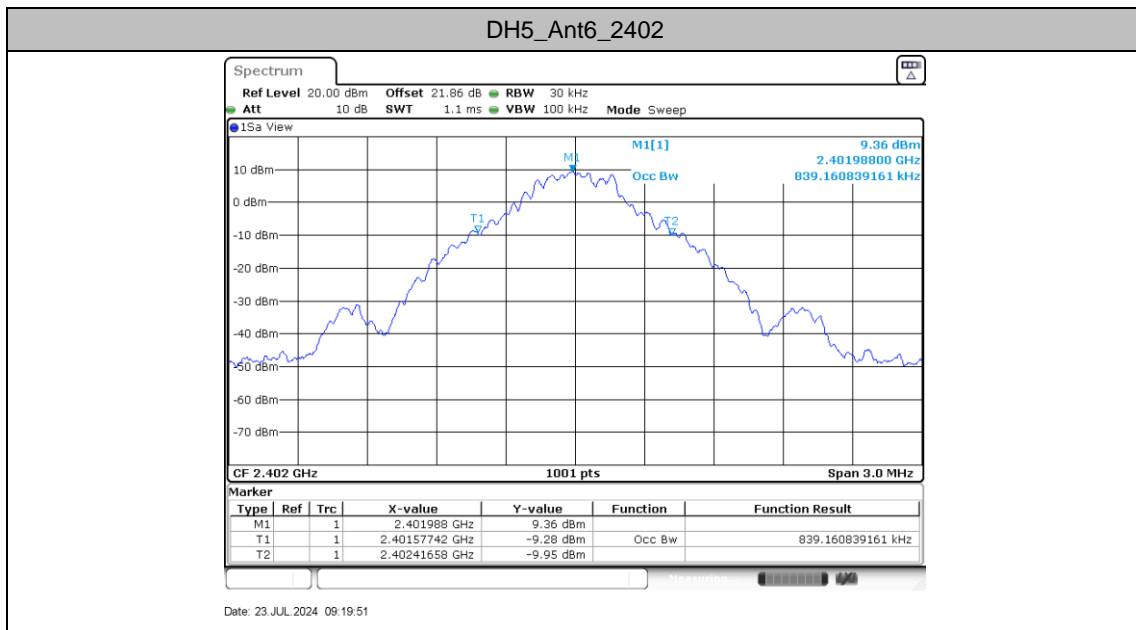




DH5_Ant6_2441

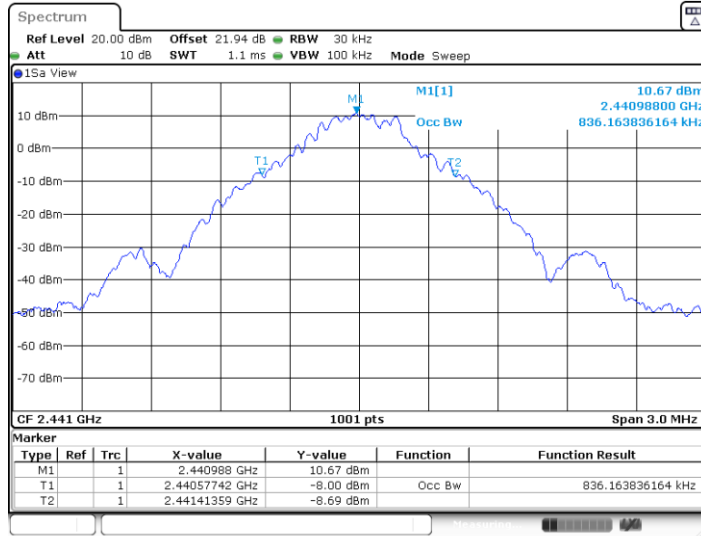

Date: 23 JUL 2024 09:20:56


DH5_Ant8_2441

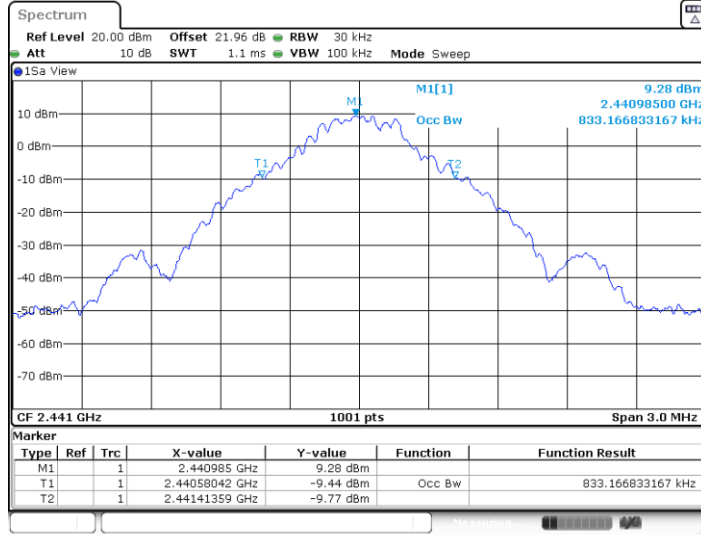

Date: 23 JUL 2024 09:40:18




DH5_Ant6_2480

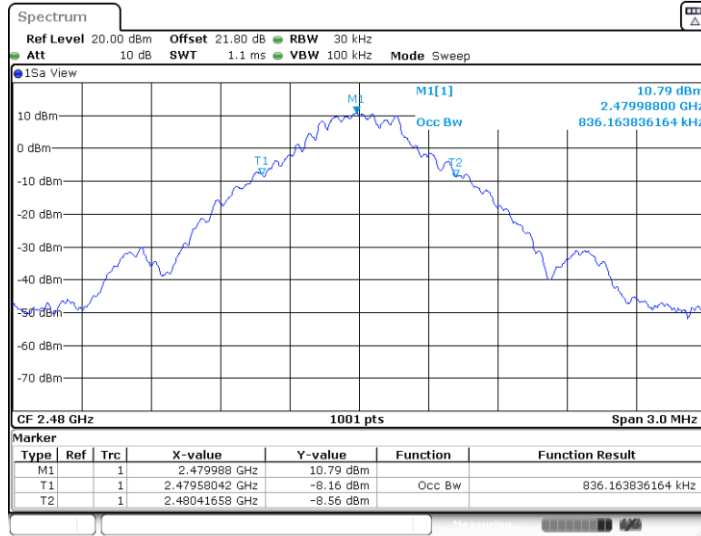

Date: 23 JUL 2024 09:21:48


DH5_Ant8_2480

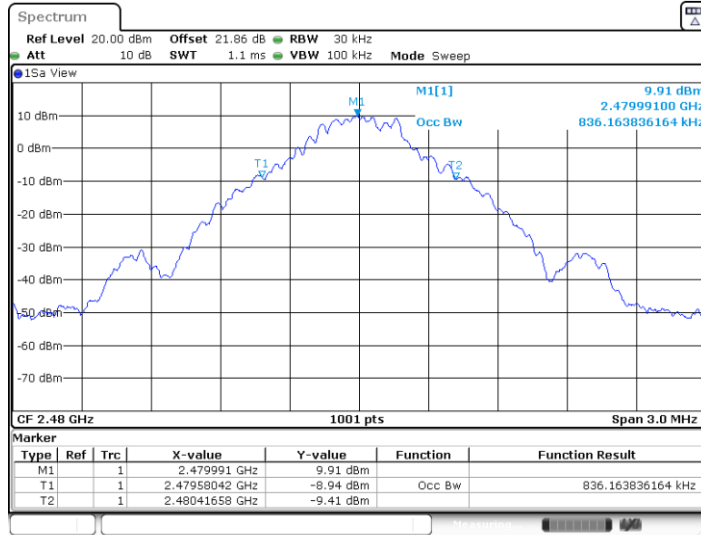

Date: 23 JUL 2024 09:41:13




2DH1_Ant6_2402

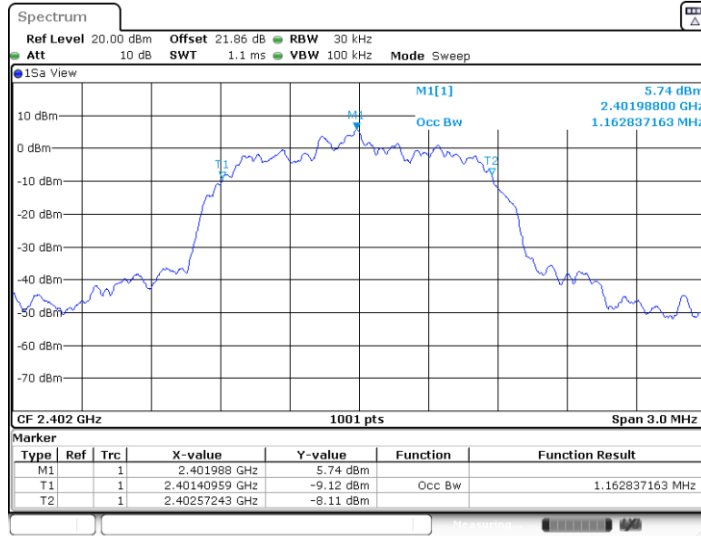

Date: 23 JUL 2024 09:22:53


2DH1_Ant8_2402

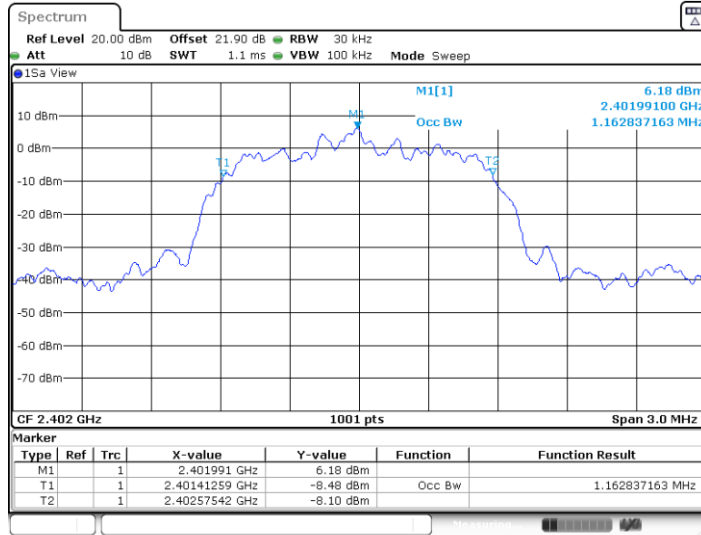

Date: 23 JUL 2024 09:42:18




2DH1_Ant6_2441

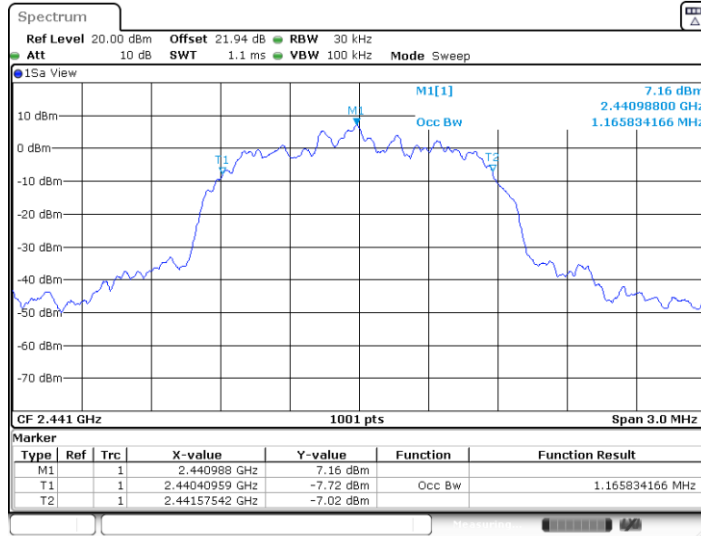

Date: 23 JUL 2024 09:24:00


2DH1_Ant8_2441

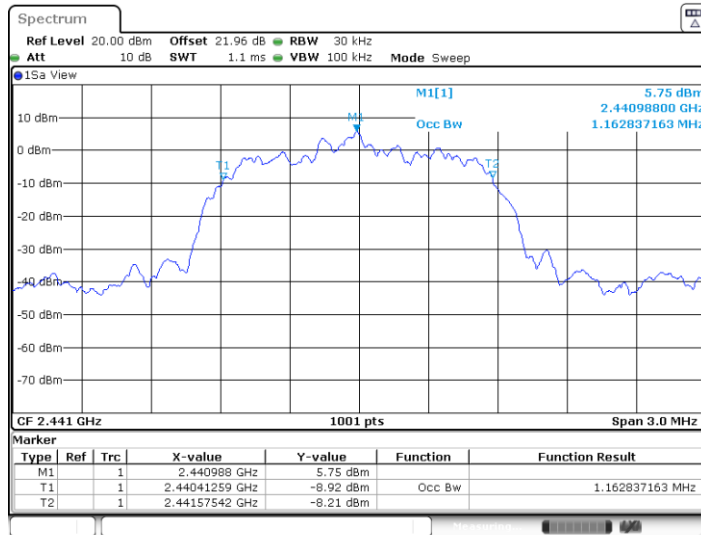

Date: 23 JUL 2024 09:45:18




2DH1_Ant6_2480

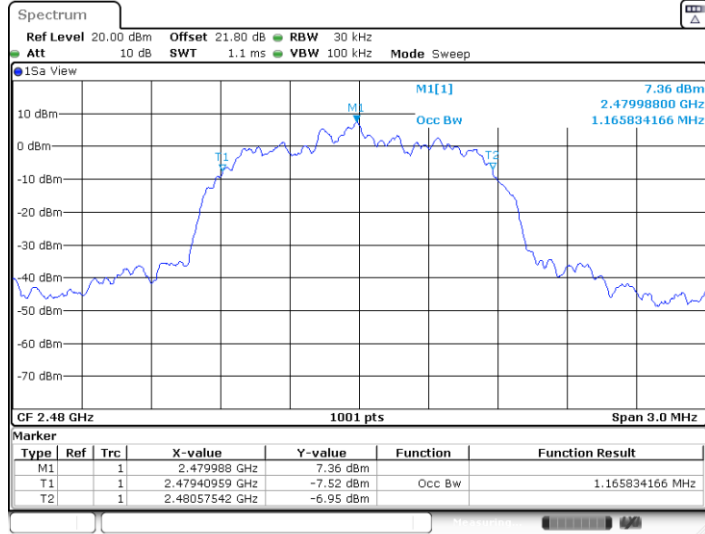

Date: 23 JUL 2024 09:24:53


2DH1_Ant8_2480

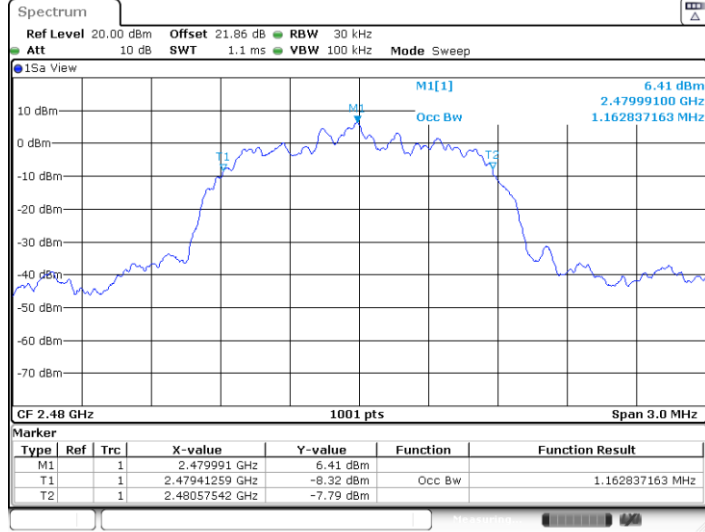

Date: 23 JUL 2024 09:46:11




3DH1_Ant6_2402

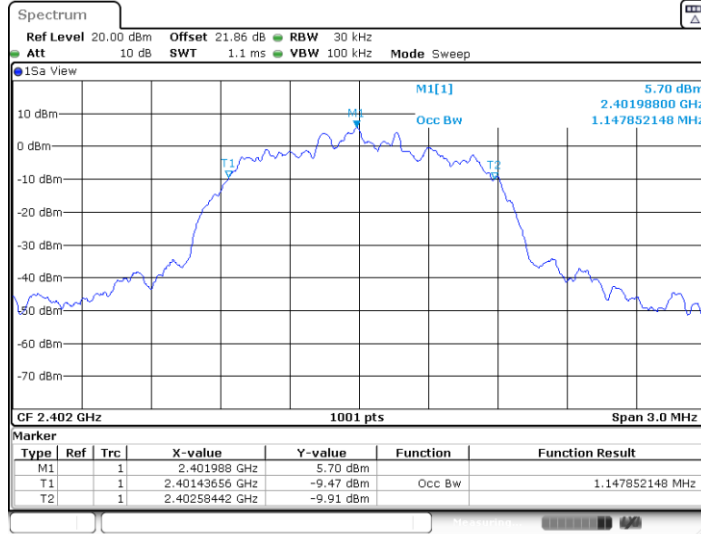



Date: 23 JUL 2024 09:25:58

3DH1_Ant8_2402

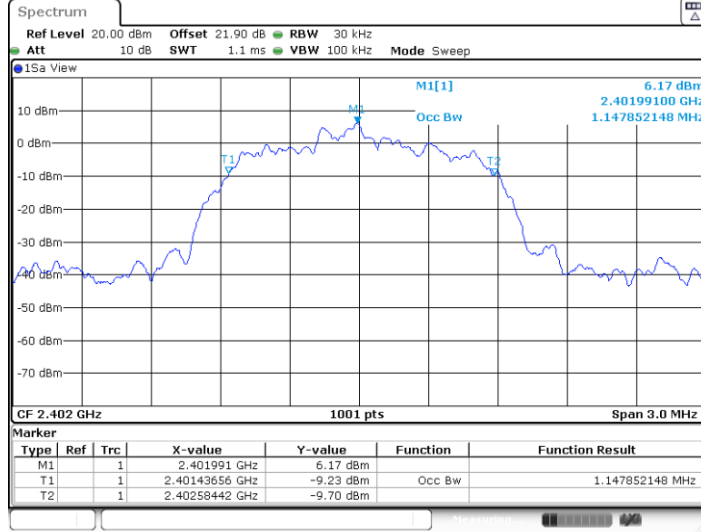

Date: 23 JUL 2024 09:47:17

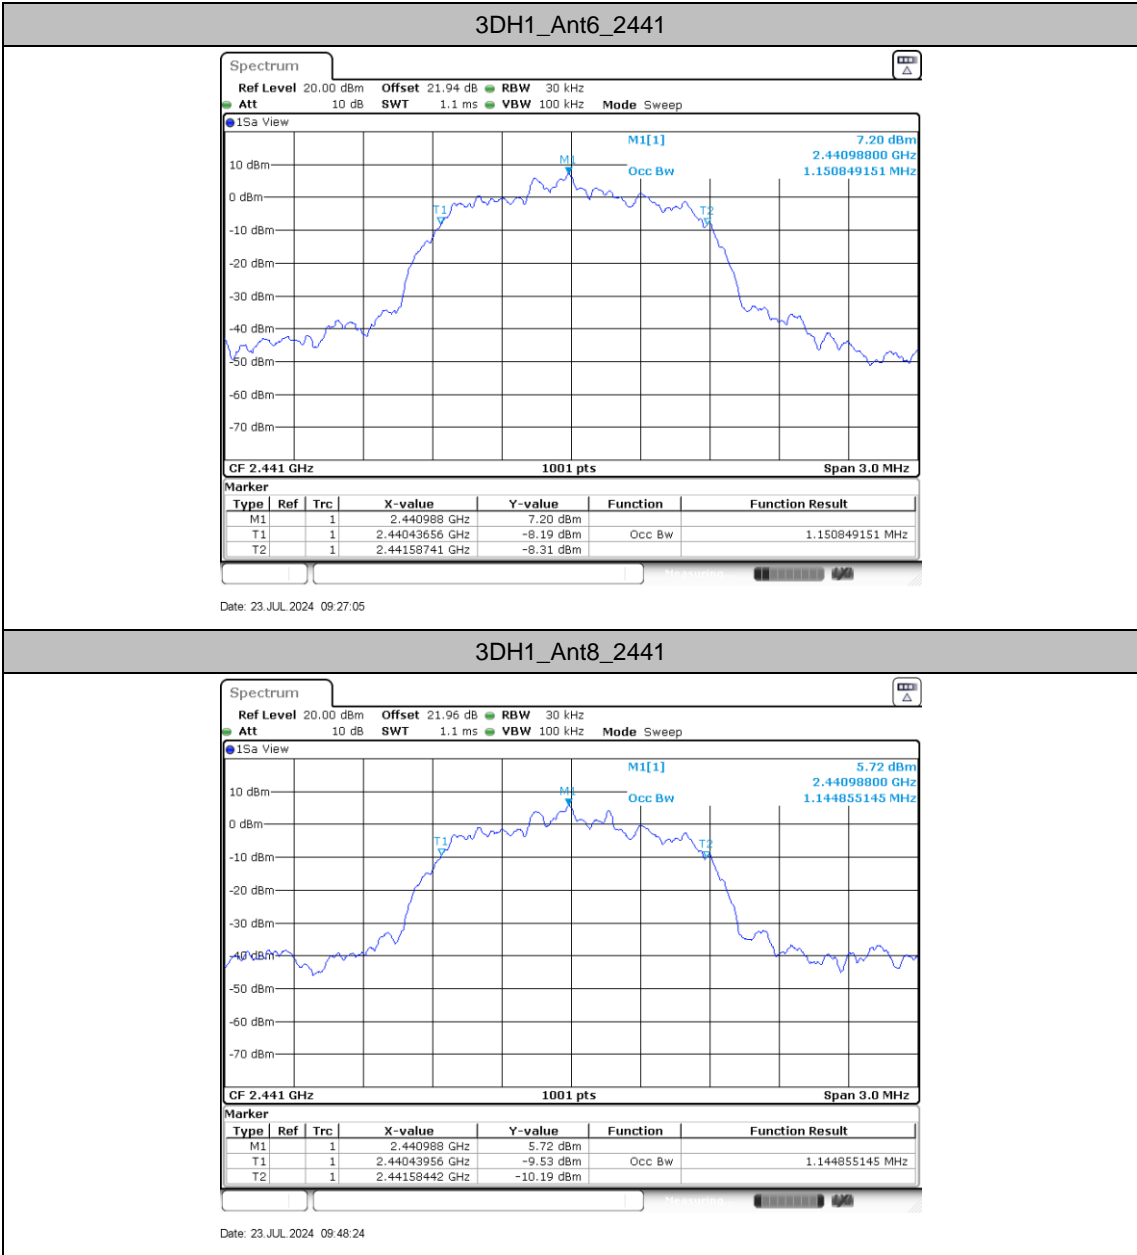

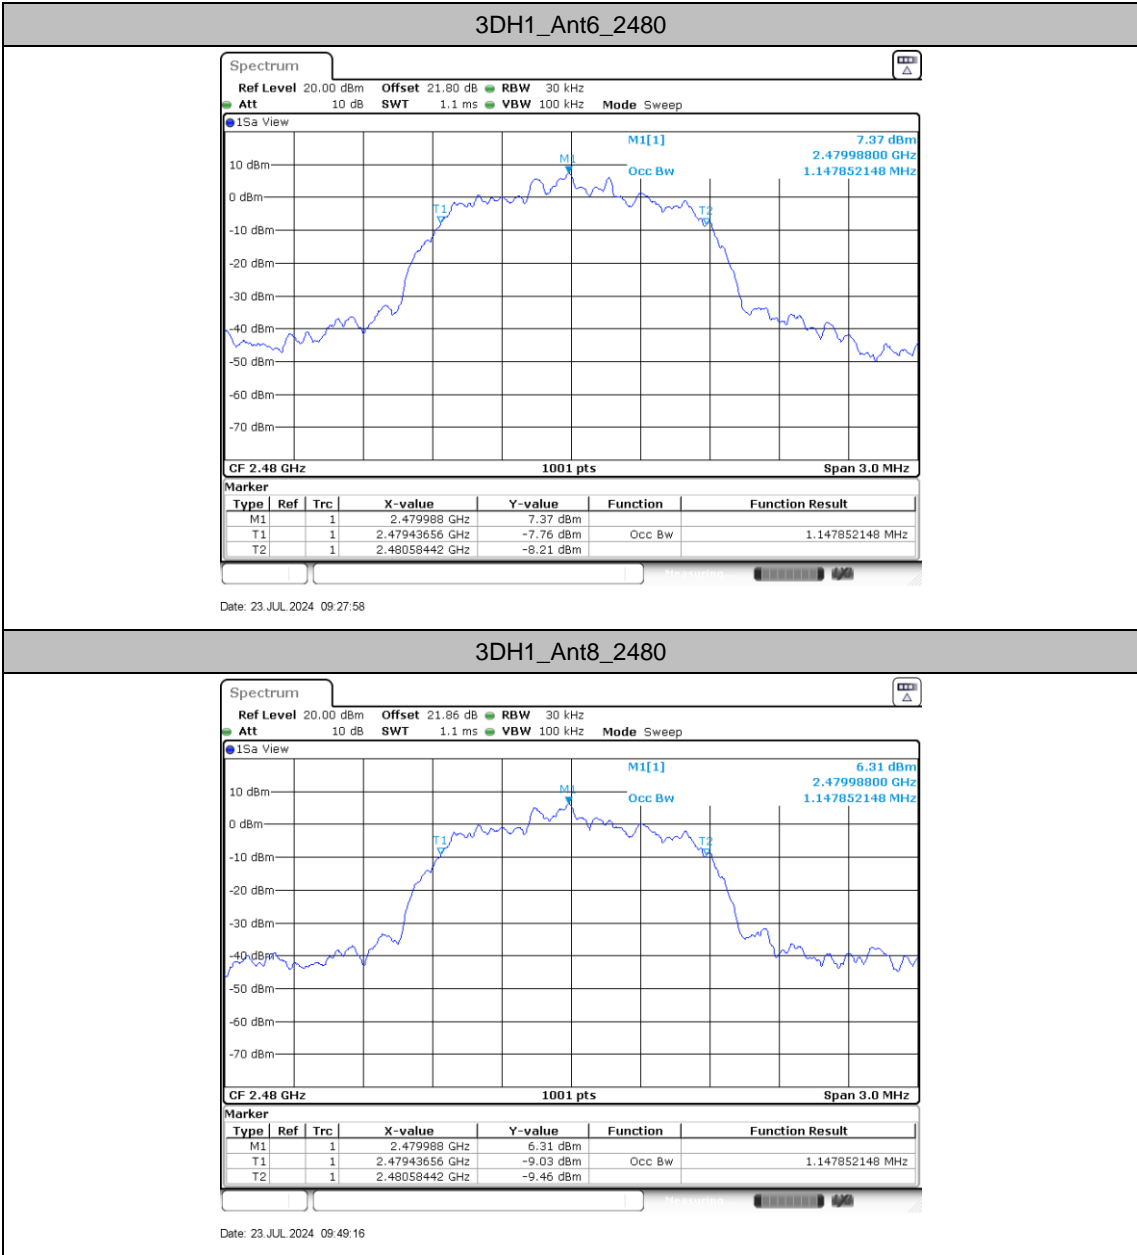



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Power (dBm)	Power Limit (dBm)	Pass/Fail
DH5	Ant6	0	13.54	20.97	Pass
		39	13.88	20.97	Pass
		78	14.05	20.97	Pass
2DH5	Ant6	0	11.45	20.97	Pass
		39	11.91	20.97	Pass
		78	12.25	20.97	Pass
3DH5	Ant6	0	11.93	20.97	Pass
		39	12.44	20.97	Pass
		78	12.78	20.97	Pass
DH5	Ant8	0	13.61	20.97	Pass
		39	13.02	20.97	Pass
		78	13.33	20.97	Pass
2DH5	Ant8	0	12.03	20.97	Pass
		39	11.19	20.97	Pass
		78	11.58	20.97	Pass
3DH5	Ant8	0	12.39	20.97	Pass
		39	11.59	20.97	Pass
		78	11.93	20.97	Pass




Carrier frequency separation

Test Result

TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant6	2402	1.161	≥0.627	PASS
	Ant8	2402	1.009	≥0.627	PASS
	Ant6	2441	1.004	≥0.627	PASS
	Ant8	2441	0.991	≥0.627	PASS
	Ant6	2480	1.009	≥0.627	PASS
	Ant8	2480	0.987	≥0.633	PASS
2DH1	Ant6	2402	0.996	≥0.840	PASS
	Ant8	2402	1.009	≥0.840	PASS
	Ant6	2441	0.991	≥0.860	PASS
	Ant8	2441	0.996	≥0.840	PASS
	Ant6	2480	1.148	≥0.860	PASS
	Ant8	2480	1.009	≥0.840	PASS
3DH1	Ant6	2402	1.004	≥0.820	PASS
	Ant8	2402	1.013	≥0.820	PASS
	Ant6	2441	1.022	≥0.820	PASS
	Ant8	2441	1.004	≥0.820	PASS
	Ant6	2480	1.004	≥0.820	PASS
	Ant8	2480	1.009	≥0.820	PASS




Test Graphs

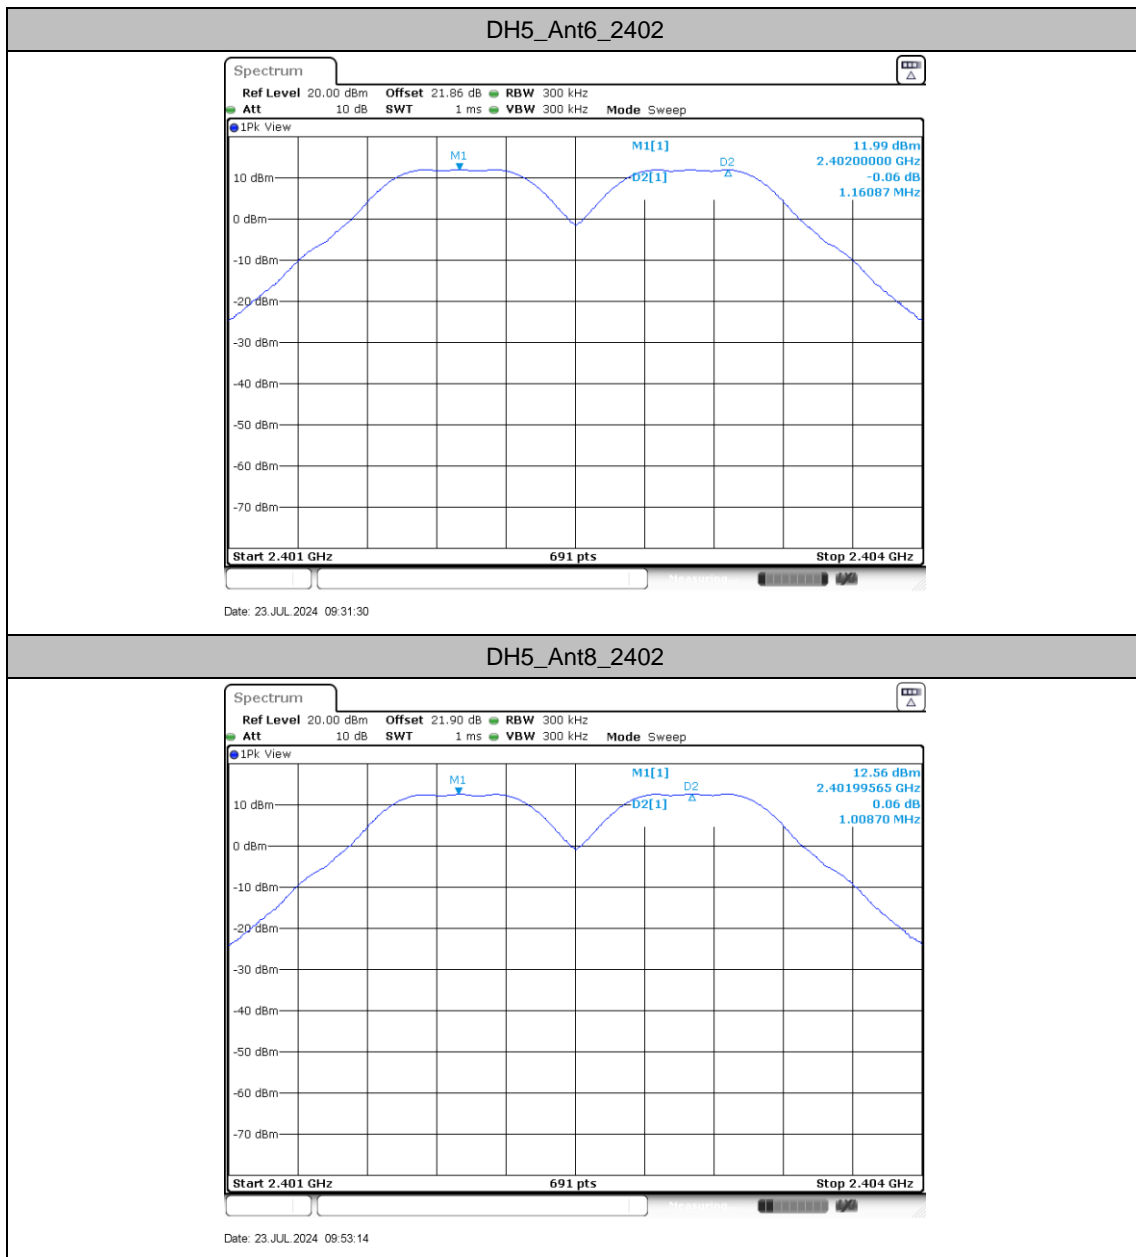




DH5_Ant6_2441

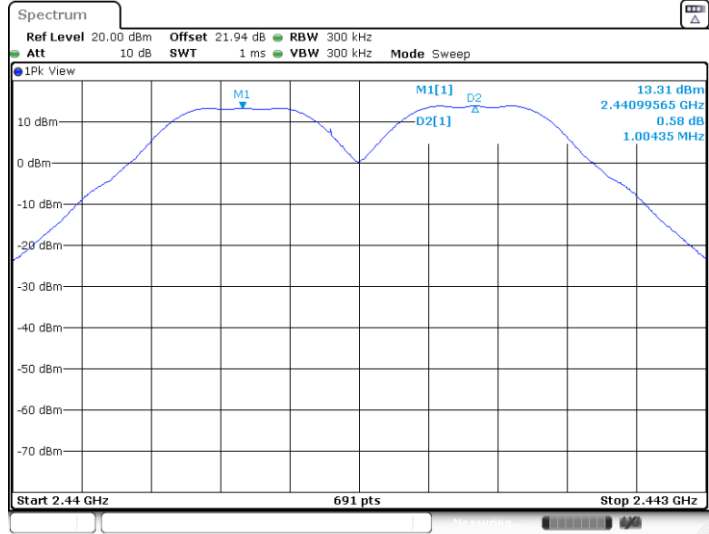

Date: 23 JUL 2024 09:32:01


DH5_Ant8_2441

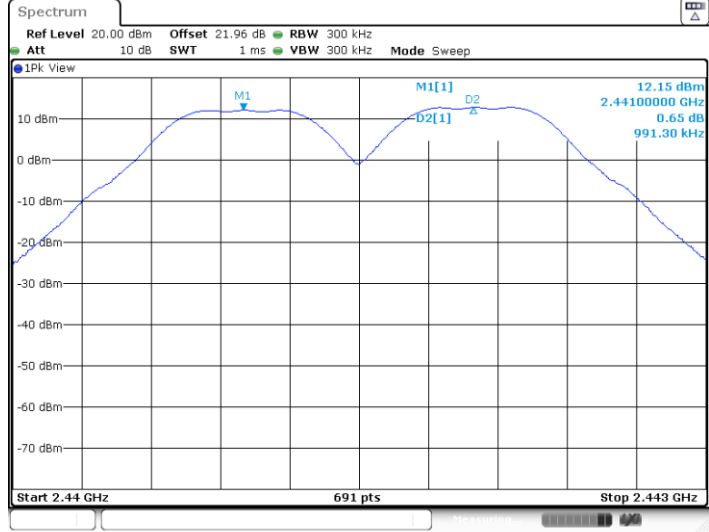

Date: 23 JUL 2024 09:53:39




DH5_Ant6_2480

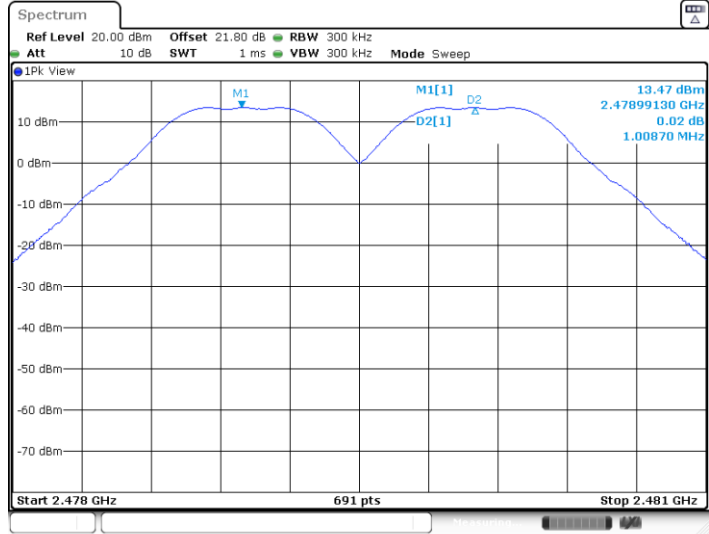

Date: 23 JUL 2024 09:32:26


DH5_Ant8_2480

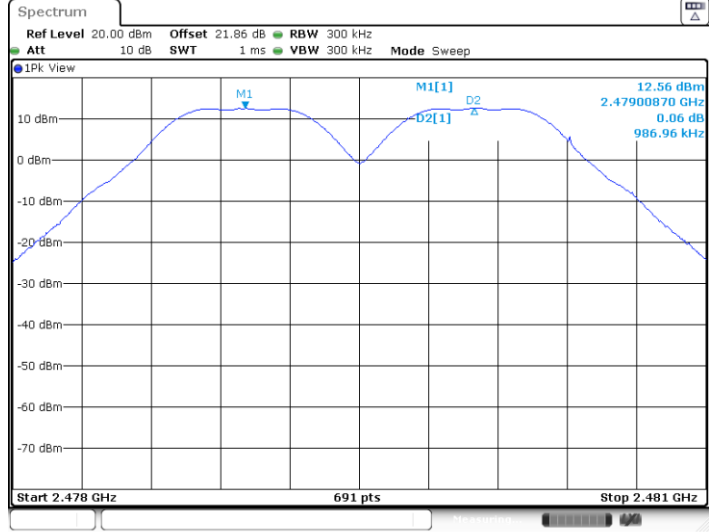

Date: 23 JUL 2024 09:54:55




2DH1_Ant6_2402

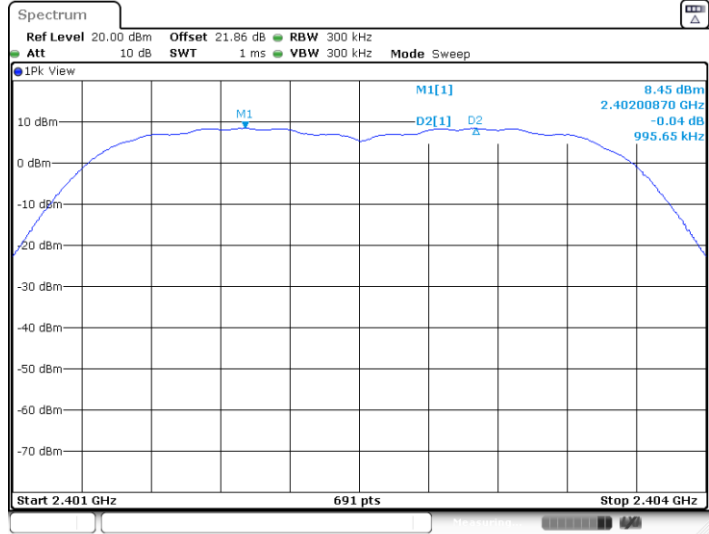

Date: 23 JUL 2024 09:32:57


2DH1_Ant8_2402

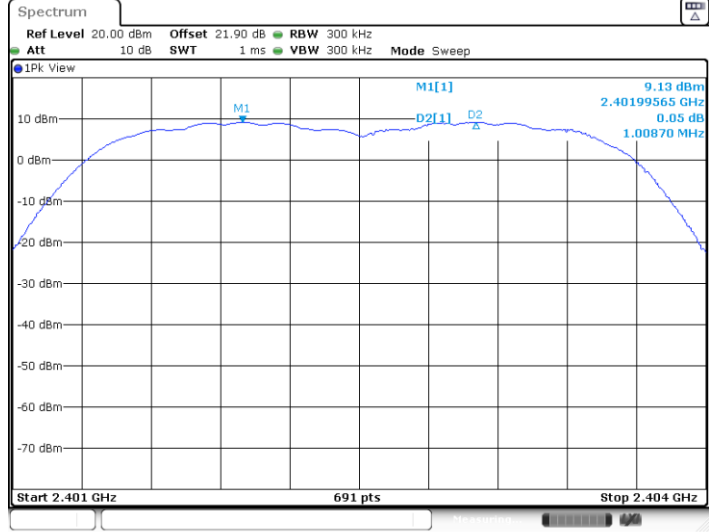

Date: 23 JUL 2024 09:55:57




2DH1_Ant6_2441

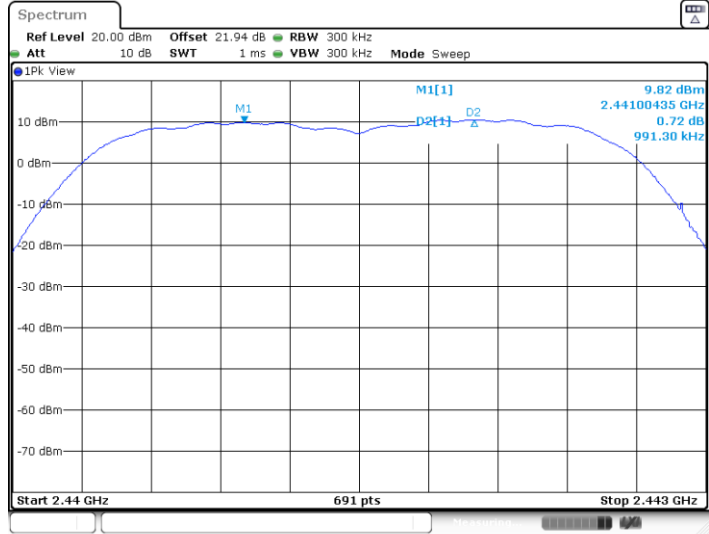

Date: 23 JUL 2024 09:34:14


2DH1_Ant8_2441

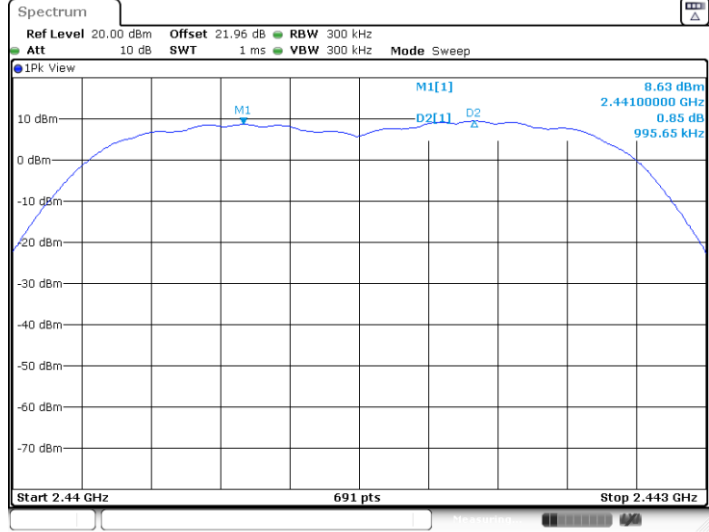

Date: 23 JUL 2024 09:56:58




2DH1_Ant6_2480

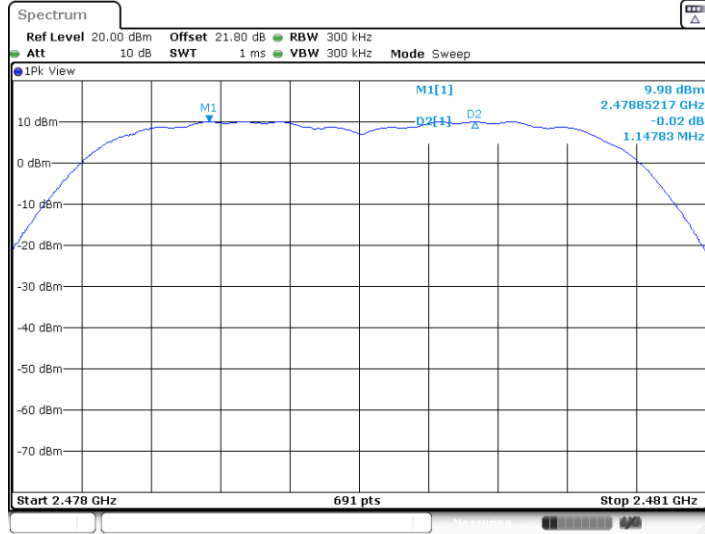

Date: 23 JUL 2024 09:35:25


2DH1_Ant8_2480

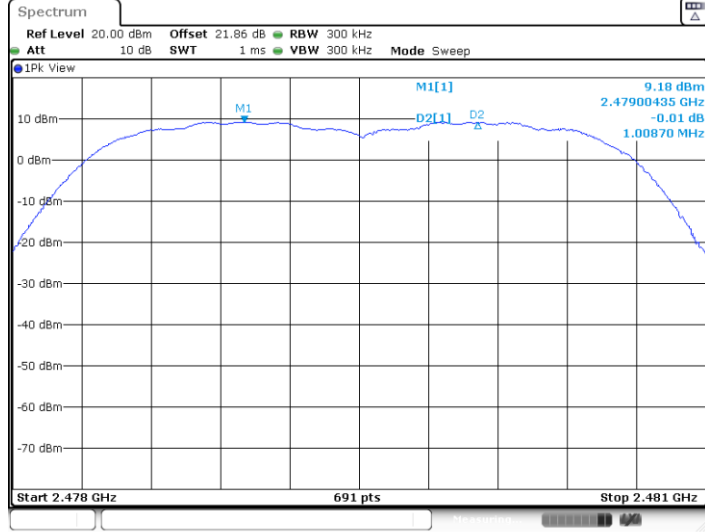

Date: 23 JUL 2024 09:57:34




3DH1_Ant6_2402

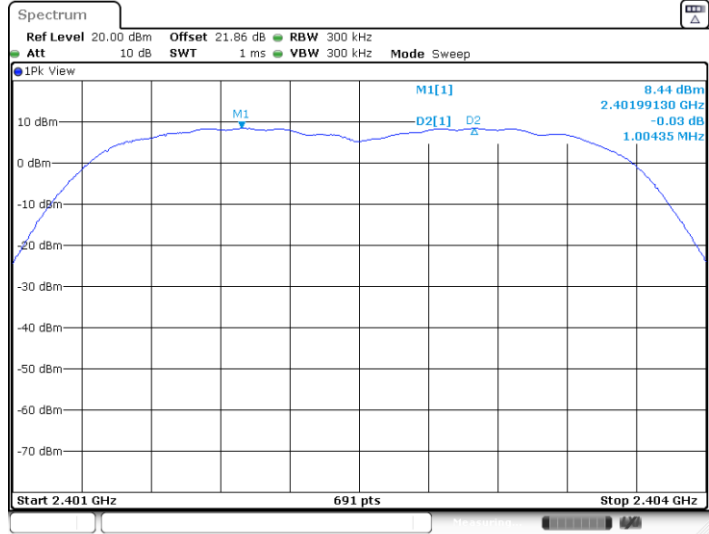

Date: 23 JUL 2024 09:36:20


3DH1_Ant8_2402

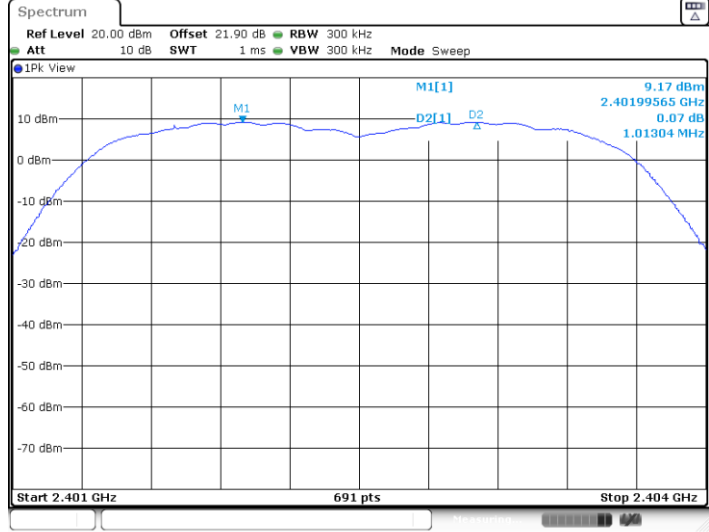

Date: 23 JUL 2024 09:58:04




3DH1_Ant6_2441

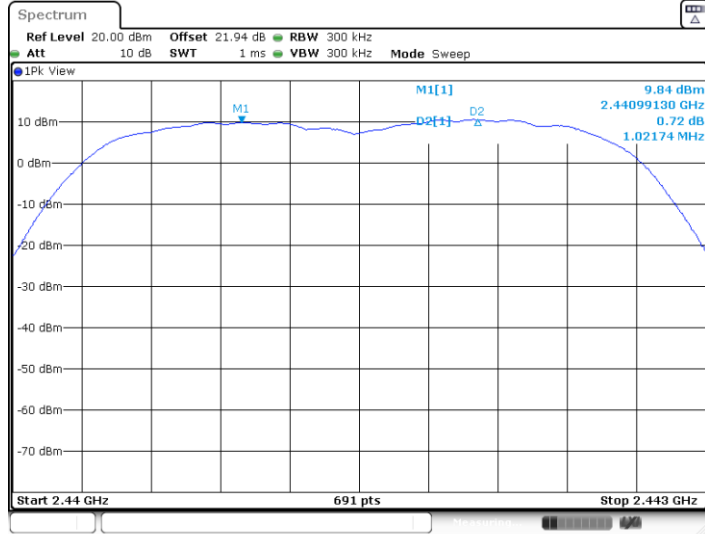

Date: 23 JUL 2024 09:37:08


3DH1_Ant8_2441

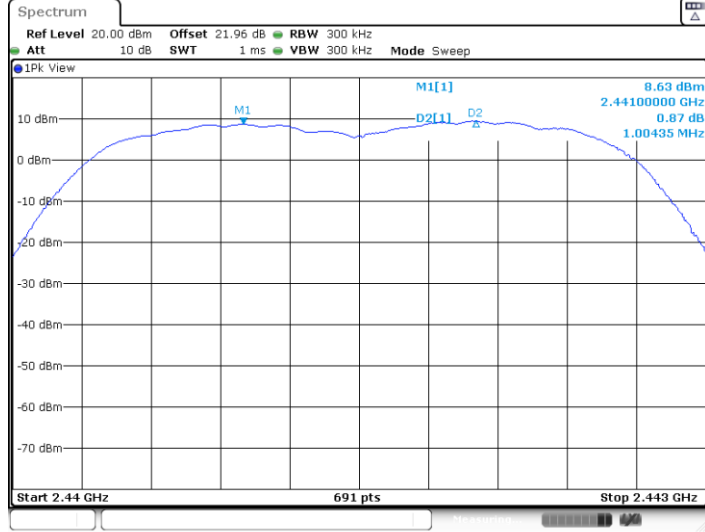

Date: 23 JUL 2024 10:00:49




3DH1_Ant6_2480

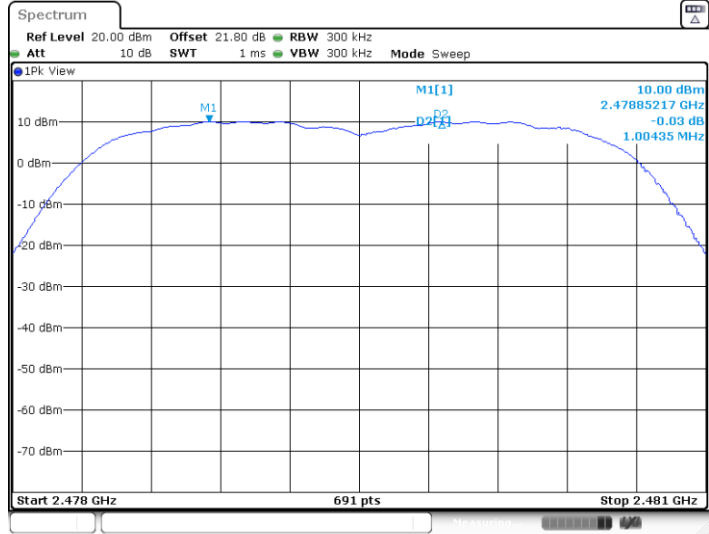

Date: 23 JUL 2024 09:38:05

3DH1_Ant8_2480

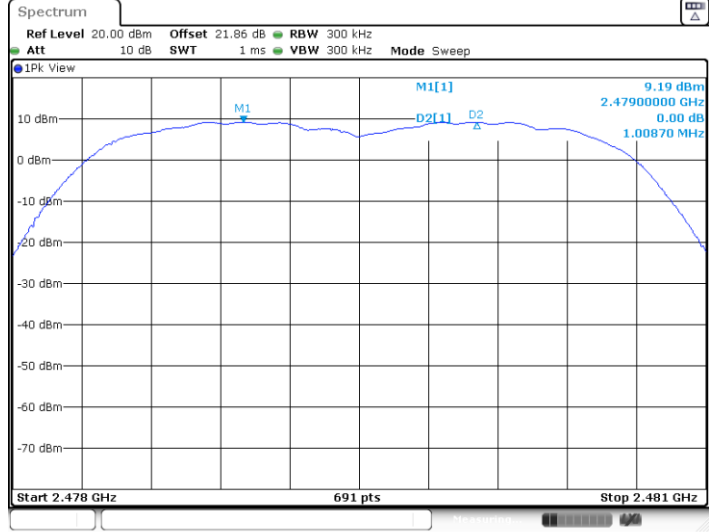

Date: 23 JUL 2024 10:01:42





Time of occupancy

Test Result

TestMode	Antenna	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	Ant6	79	106.67	2.9000	0.31	0.4	Pass
AFH	Ant6	20	53.33	2.9000	0.15	0.4	Pass
Normal	Ant8	79	106.67	2.8870	0.31	0.4	Pass
AFH	Ant8	20	53.33	2.8870	0.15	0.4	Pass



Test Graphs

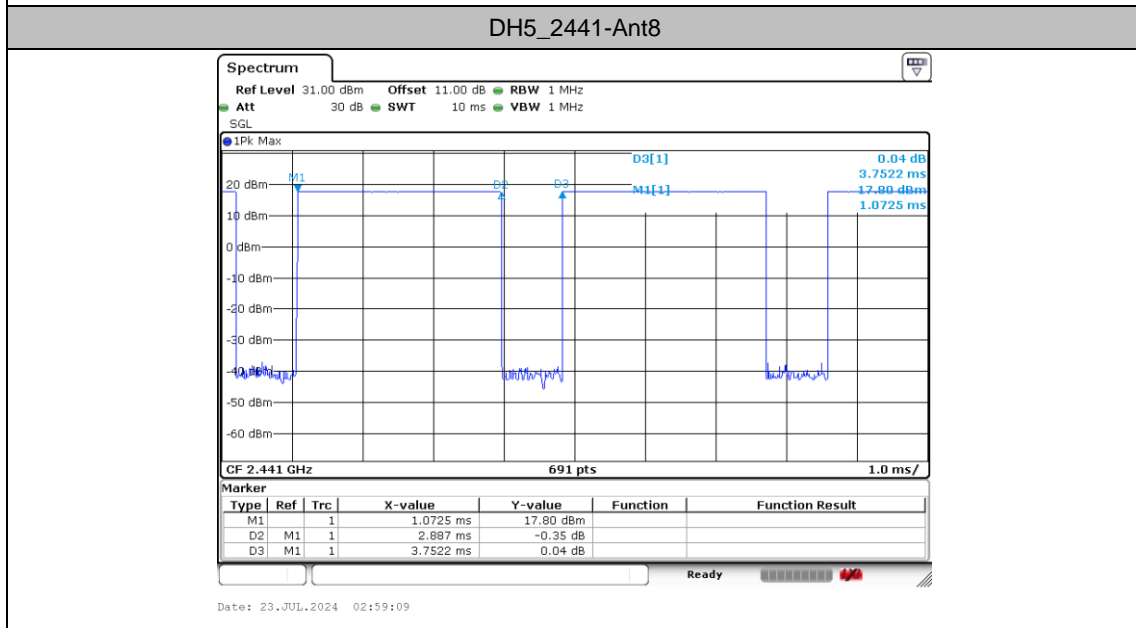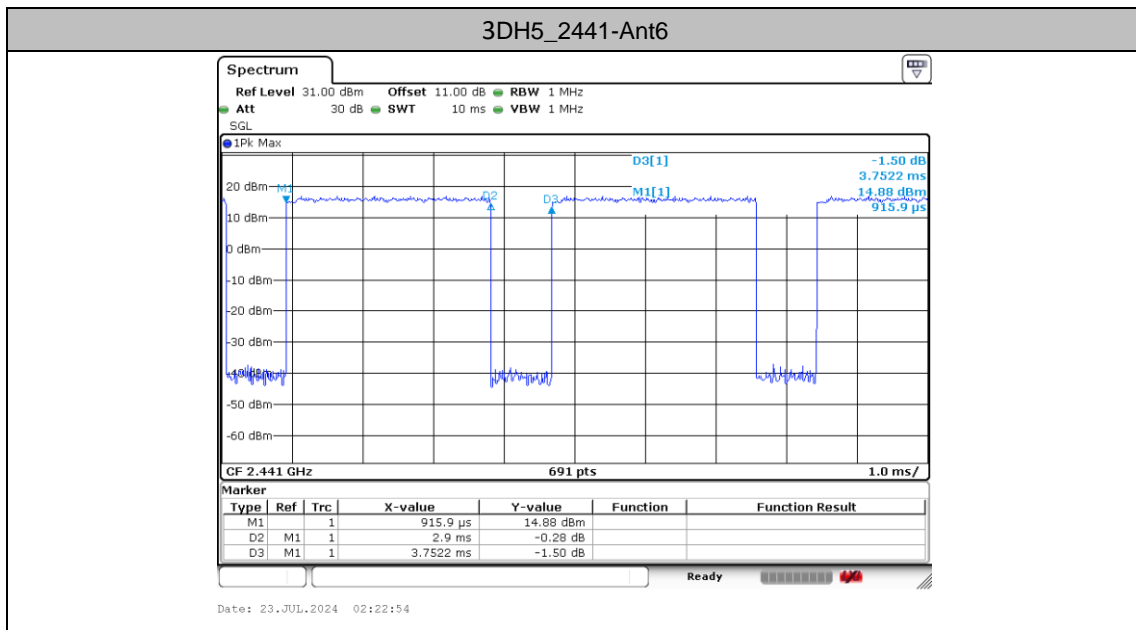





Number of hopping channels

Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant6	Hop	79	≥15	PASS
	Ant8	Hop	79	≥15	PASS



Test Graphs

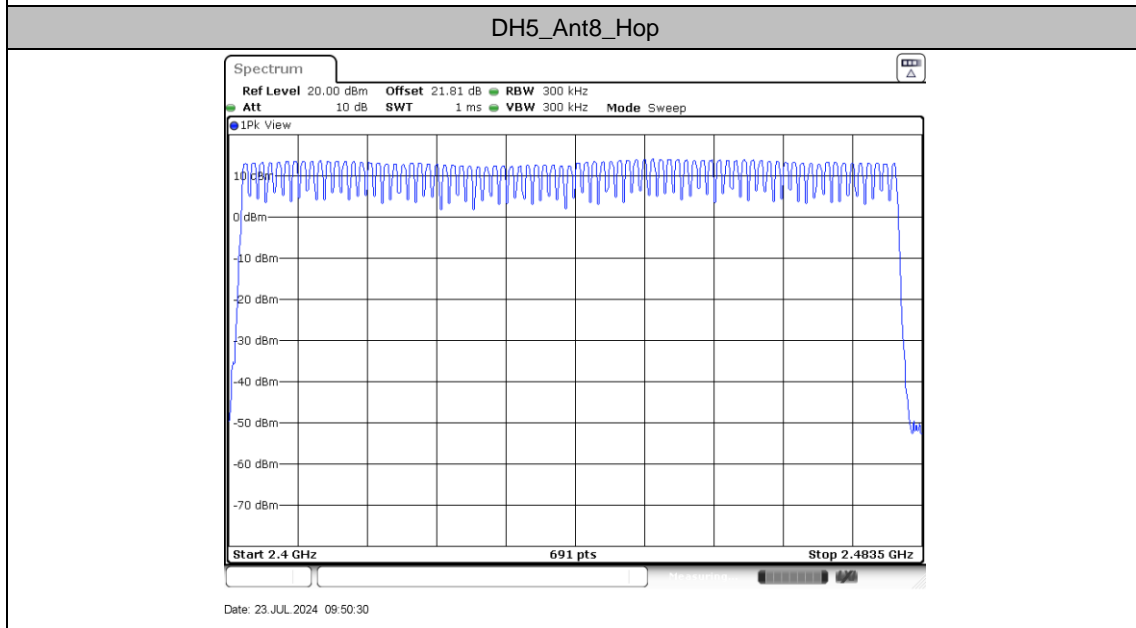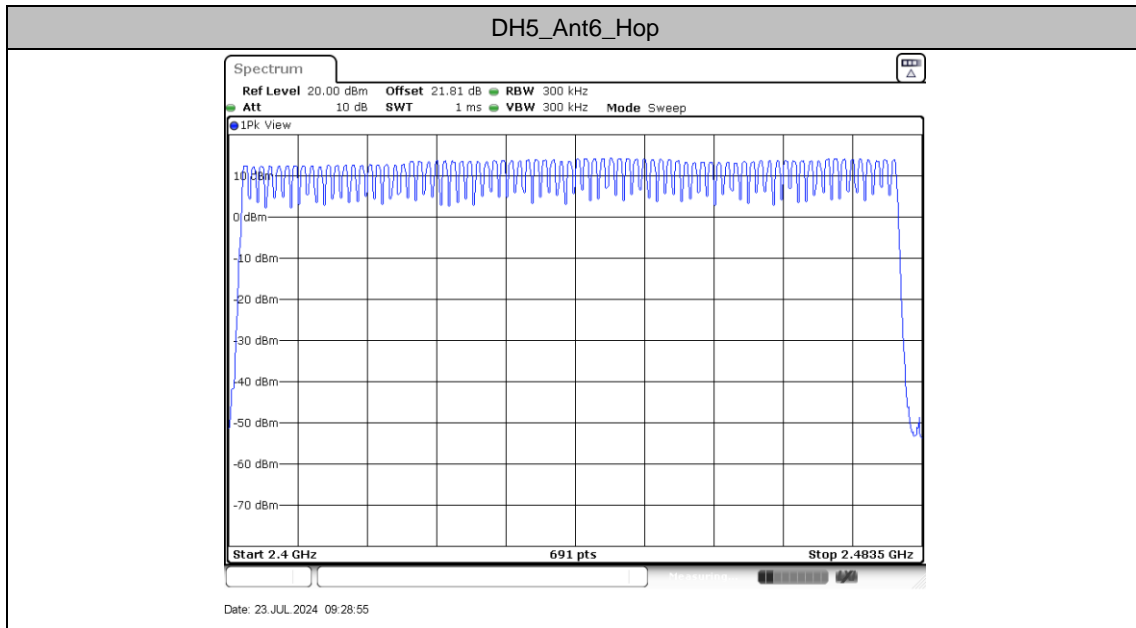



Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant6	Low	2402	11.83	-47.99	≤-8.17	PASS
	Ant8	Low	2402	12.43	-49.09	≤-7.57	PASS
	Ant6	High	2480	13.17	-55.11	≤-6.83	PASS
	Ant8	High	2480	12.33	-55.23	≤-7.67	PASS
	Ant6	Low	Hop_2402	11.44	-54.01	≤-8.56	PASS
	Ant8	Low	Hop_2402	12.13	-49.89	≤-7.87	PASS
	Ant6	High	Hop_2480	13.12	-52.28	≤-6.88	PASS
	Ant8	High	Hop_2480	12.47	-53.07	≤-7.53	PASS
2DH1	Ant6	Low	2402	8.14	-50.04	≤-11.86	PASS
	Ant8	Low	2402	8.83	-37.05	≤-11.17	PASS
	Ant6	High	2480	9.72	-56.16	≤-10.28	PASS
	Ant8	High	2480	8.97	-51.44	≤-11.03	PASS
	Ant6	Low	Hop_2402	7.99	-53.21	≤-12.01	PASS
	Ant8	Low	Hop_2402	8.02	-38.49	≤-11.98	PASS
	Ant6	High	Hop_2480	9.83	-55.29	≤-10.17	PASS
	Ant8	High	Hop_2480	8.62	-56.25	≤-11.38	PASS
3DH1	Ant6	Low	2402	8.17	-50.73	≤-11.83	PASS
	Ant8	Low	2402	8.87	-37.11	≤-11.13	PASS
	Ant6	High	2480	9.80	-55.58	≤-10.2	PASS
	Ant8	High	2480	8.95	-52.38	≤-11.05	PASS
	Ant6	Low	Hop_2402	8.14	-52.72	≤-11.86	PASS
	Ant8	Low	Hop_2402	8.73	-39.85	≤-11.27	PASS
	Ant6	High	Hop_2480	10.11	-56.14	≤-9.89	PASS
	Ant8	High	Hop_2480	8.95	-54.18	≤-11.05	PASS