



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-3
FCC ID : IHDT56AS9
STANDARD : 47 CFR Part 2, 22, 24, 27, 90S
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 05, 2024 ~ Aug. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Specification of Accessory.....	5
1.6 Testing Site.....	5
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	14
4 MEASUREMENT UNCERTAINTY	17
APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471919-01E	Rev. 01	Initial issue of report	Sep. 03, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-3
FCC ID	IHDT56AS9
IMEI Code	Conducted/DFS/CBP: 359867620008119/359867620008127 Radiation: 359867620006634 Conduction: 359867620006899/359867620006907
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1((CHILE))	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(ATL)	Model Name	RW50
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	SH38D62338
Earphone 2	Brand Name	Motorola(Juwei)	Model Name	S928E43096
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

1.6 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS 03CH02-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616
3.	03CH02-KS	AUDIX	E3	6.2009-8-24al
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22, 24, 27, 90S, 90S
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015

2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2437-3, FCC ID: IHDT56AS9) is electrically identical to the reference device (Model: XT2437-1, XT2437-2, FCC ID: IHDT56AS8) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report.

For Conducted items of 5G NR bands please refer to report number: TR-24ADRTCC7017.

For SAR Reference detail, please refer to FCC SAR report FA471919-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AS9 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AS8 and FCC ID: IHDT56AS9 is as below:

- Remove WCDMA IV and LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32 and 5G NR n8/n20/n38/n41/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AS9 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AS8	Full test	FR471919A	IHDT56AS9	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AS8	Full test	FR471919B	IHDT56AS9	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AS8	Full test	FR471919C	IHDT56AS9	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AS8	Full test	FR471919D	IHDT56AS9	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5500~5720	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5745~5825	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AS8	Full test	FZ471919	IHDT56AS9	Spot check	Y, All test items
	6XD	5925~7125	IHDT56AS8	Full test	FR471919F	IHDT56AS9	Spot check	Y, All test items
22 24	PCE (GSM, WCDMA)	GSM 850/1900 WCDMA B2/B5	IHDT56AS8	Full test	FG471919A	IHDT56AS9	Spot check	Y, All test items
22 24 27 90	PCE (LTE)	LTE B2/B5/B7/B7C/B26/B38/B38C/B42/B42C	IHDT56AS8	Full test	FG471919B FG471919C FG471919D FG471919E FG471919F	IHDT56AS9	Spot check	Y, All test items
22 27	PCE (NR)	5G NR n5/n7/n26	IHDT56AS8	Full test	FG471919G	IHDT56AS9	Spot check	Y, RSE item.

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB}/20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation	Deviation Limit
BT 1Mbps (CH78)	Number of Channels (N)	79	79	0.00	3
	Hopping Channel Separation (MHz)	1.009	1.003	0.01	3
	Dwell Time of Each Channel(s)	0.31	0.31	0.00	3
	20dB Bandwidth(MHz)	0.95	0.94	0.01	3
	99% Bandwidth(MHz)	0.836	0.836	0.00	3
	Conducted Band Edges(dBm)	-52.28	-51.03	1.25	3
	Conducted Spurious Emission(dBm)	-43.36	-45.96	2.60	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	56.36	57.48	-1.12	3
BT	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
BLE 1Mbps (CH39)	6dB Bandwidth (MHz)	0.67	0.67	0.00	3
	99% Bandwidth (MHz)	1.02	1.02	0.00	3
	Power Spectral Density (dBm/3KHz)	-9.35	-9.50	0.15	3
	Conducted Band Edges and Spurious Emission (dBm)	-55.57	-52.79	2.78	3
	Conducted Spurious Emission (dBm)	-50.79	-49.64	1.15	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission (dBuV/m)	45.97	46.01	-0.04	3
BLE	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.06	8.02	0.04	3
	99% Bandwidth (MHz)	12.895	13.287	0.39	3
	Power Spectral Density (dBm/3KHz)	-0.08	-0.15	0.07	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.75	-36.73	1.98	3
	Conducted Spurious Emission (dBm)	-50.78	-49.45	1.33	3
WIFI 2.4G (802.11ax HE40 CH03)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.69	48.16	2.53	3
WIFI 2.4G	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 5G (802.11a CH149)	26dB Emission Bandwidth (MHz)	20.91	20.45	0.46	3
	99% Occupied Bandwidth (MHz)	16.69	16.38	0.31	3
	Power Spectral Density (dBm/MHz)	8.39	7.80	0.59	3
	DFS (s)	0.763225	0.972832	0.209607	3
WIFI 5G (11ax HE40_Ch62)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.80	50.41	0.39	3



WIFI 5G	AC Conducted Emission (dBUV)	36.87	36.45	0.42	3
WIFI 6G UNII-8 (802.11ax HE80 CH199)	26dB Emission Bandwidth (MHz)	81.18	80.99	0.19	3
	99% Occupied Bandwidth (MHz)	76.952	76.876	0.08	3
	Fundamental Maximum EIRP (dBm)	11.34	11.06	0.28	3
	Fundamental Power Spectral Density (dBm/MHz)	-2.05	-2.56	0.51	3
	In-Band Emissions (Channel Mask) (dB)	-37.39	-37.15	0.24	3
WIFI 6G UNII-7 (802.11ax HE160 CH199)	Contention Based Protocol (dBm)	-69.05	-68.09	0.96	3
WIFI 6G (11ax HE160_Ch15)	Radiated Band Edges and Spurious Emission (dBUV/m)	50.62	50.46	0.16	3
WLAN 6G	AC Conducted Emission (dBUV)	43.18	45.05	1.87	3
Part 15C NFC	20dB Emission Bandwidth (KHz)	2.49	2.49	0	3
	99% Occupied Bandwidth (KHz)	2.11	2.10	0.01	3
	Field Strength of Fundamental (dBUV/m @ 30m)	9.36	11.95	2.59	3
	Radiated Spurious Emissions (dBUV/m)	29.5	30.68	1.18	3
	AC Power Line Conducted Emissions(dBUV)	45.12	43.97	1.15	3
	Conducted Power(dBm)	23.01	22.85	0.16	3
Part 22/24/27/90 (Worst LTE Band 7C)	Equivalent Isotropic Radiated Power(dBm)	20.84	20.68	0.16	3
	Peak-to-Average Ratio (dB)	6.46	6.34	0.12	3
	Occupied Bandwidth(MHz)	37.80	38.12	0.32	3
	Conducted Band Edge (dBm)	-26.52	-28.49	1.97	3
	Conducted Spurious Emission(dBm)	-50.27	-51.26	0.99	3
	Frequency Stability (ppm)	0.0029	0.0026	0.00	3



Test Item	Mode	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	14.05	13.76	0.29	3
	BLE 1Mbps	5.69	5.39	0.3	3
	BLE 2Mbps	5.94	5.49	0.45	3
	11b, 2.4GHz	24.78	24.42	0.36	3
	11g, 2.4GHz	27.79	27.65	0.14	3
	11n HT20, 2.4GHz	27.88	27.25	0.63	3
	11n HT40, 2.4GHz	26.14	25.2	0.94	3
	11ax 20, 2.4GHz	28.03	27.41	0.62	3
	11ax 40, 2.4GHz	26.19	25.29	0.9	3
	11a, 5.2GHz	19.36	19.01	0.35	3
	11a, 5.3GHz	20.05	19.86	0.19	3
	11a, 5.5GHz	19.69	19.12	0.57	3
	11a, 5.8GHz	21.09	20.81	0.28	3
	11n HT20, 5.2GHz	19.54	19.12	0.42	3
	11n HT20, 5.3GHz	19.66	19.25	0.41	3
	11n HT20, 5.5GHz	19.92	19.34	0.58	3
	11n HT20, 5.8GHz	20.91	20.53	0.38	3
	11ac VHT20, 5.2GHz	19.59	19.24	0.35	3
	11ac VHT20, 5.3GHz	19.72	19.34	0.38	3
	11ac VHT20, 5.5GHz	19.74	19.62	0.12	3
	11ac VHT20, 5.8GHz	20.92	20.63	0.29	3
	11ax HE20, 5.2GHz	19.67	19.08	0.59	3
	11ax HE20, 5.3GHz	19.80	19.71	0.09	3
	11ax HE20, 5.5GHz	20.02	19.27	0.75	3
	11ax HE20, 5.8GHz	21.05	20.75	0.3	3
	11n HT40, 5.2GHz	19.82	19.33	0.49	3
	11n HT40, 5.3GHz	19.60	19.17	0.43	3
	11n HT40, 5.5GHz	19.99	19.27	0.72	3
	11n HT40, 5.8GHz	19.74	19.31	0.43	3
	11ac VHT40, 5.2GHz	19.96	19.56	0.4	3
	11ac VHT40, 5.3GHz	19.71	19.22	0.49	3
	11ac VHT40, 5.5GHz	19.99	19.54	0.45	3
	11ac VHT40, 5.8GHz	19.83	19.32	0.51	3
	11ax HE40, 5.2GHz	20.37	20.02	0.35	3
	11ax HE40, 5.3GHz	20.06	19.54	0.52	3
	11ax HE40, 5.5GHz	20.39	19.98	0.41	3
	11ax HE40, 5.8GHz	20.31	19.98	0.33	3
	11ac VHT80, 5.2GHz	17.13	16.88	0.25	3
	11ac VHT80, 5.3GHz	17.56	17.11	0.45	3
	11ac VHT80, 5.5GHz	18.95	18.45	0.5	3
	11ac VHT80, 5.8GHz	18.69	18.19	0.5	3
	11ax HE80, 5.2GHz	17.19	16.84	0.35	3
	11ax HE80, 5.3GHz	17.63	17.38	0.25	3
	11ax HE80, 5.5GHz	19.63	19.31	0.32	3
	11ax HE80, 5.8GHz	19.21	18.96	0.25	3
	11ac VHT160, 5.2GHz	15.34	14.98	0.36	3
	11ac VHT160, 5.5GHz	14.75	14.32	0.43	3
	11ax HE160, 5.2GHz	15.36	15.13	0.23	3
	11ax HE160, 5.5GHz	14.76	14.35	0.41	3
	11ax HE20, U-NII-5	10.00	9.23	0.77	3



11ax HE20, U-NII-6	9.31	8.7	0.61	3
11ax HE20, U-NII-7	9.42	9.03	0.39	3
11ax HE20, U-NII-8	10.04	9.82	0.22	3
11ax HE40, U-NII-5	13.09	12.62	0.47	3
11ax HE40, U-NII-6	12.27	12.04	0.23	3
11ax HE40, U-NII-7	12.49	11.89	0.60	3
11ax HE40, U-NII-8	13.39	13.13	0.26	3
11ax HE80, U-NII-5	15.01	14.24	0.77	3
11ax HE80, U-NII-6	14.70	14.22	0.48	3
11ax HE80, U-NII-7	14.44	13.66	0.78	3
11ax HE80, U-NII-8	15.64	15.36	0.28	3
11ax HE160, U-NII-5	16.44	15.68	0.76	3
11ax HE160, U-NII-6	16.22	15.78	0.44	3
11ax HE160, U-NII-7	16.31	15.75	0.56	3
11ax HE160, U-NII-8	15.37	15.17	0.2	3
GSM 850	32.84	32.82	0.02	3
GSM 1900	29.16	28.93	0.23	3
WCDMA 850	23.03	22.93	0.1	3
WCDMA1900	22.81	22.79	0.02	3
LTE B2	22.92	22.61	0.31	3
LTE B5	22.94	22.92	0.02	3
LTE B26 (Part 22H)	23.06	23.05	0.01	3
LTE B26 (Part 90S)	22.82	22.71	0.11	3
LTE B7	23.03	23.01	0.02	3
LTE B7C	23.01	22.85	0.16	3
LTE B38	23.16	23.12	0.04	3
LTE B38C	23.11	22.81	0.30	3
LTE B42	23.15	23.02	0.13	3
LTE B42C	23.04	22.96	0.08	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS/CBP. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 15, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 15, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 15, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000081 1	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2024	Aug. 05, 2024	Jan. 02, 2025	DFS (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Aug. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 05, 2024	NCR	DFS (DFS01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 21, 2024	Jan. 01, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Aug. 21, 2024	Apr. 16, 2025	CBP (DFS01-KS)

NCR: No Calibration Required.

**For NFC:**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Aug. 18, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 16, 2024~ Aug. 18, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz~18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz

Uncertainty of Conducted Measurement (WIFI 6G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	±0.4 Hz

Uncertainty of Conducted Measurement (DFS)

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

**03CH02-KS(NFC):****Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04dB
---	--------

03CH03-KS(WWAN):**Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83dB
---	--------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	22 ~ 23 °C
		Temperature :	41 ~ 42 %





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2400-2483.5	6	Bluetooth-LE_GSKF	39	2480	2Mbps	Full	-
	U-NII-2A	5.25-5.35	CDD 6+8	802.11ax HE40	62	5310	MCS0	Full	-
	Part 27M B41 BW=20M								
	NFC on								

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	39	2496.34	46.04	54.00	-7.96	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	4960.00	41.94	74.00	-32.06	V	PEAK	Pass	Harmonic
	802.11ax HE40	62	5350.20	50.85	54.00	-3.15	H	Average	Pass	Band Edge
	802.11ax HE40	62	7752.40	62.37	70.20	-7.83	V	Peak	Pass	Harmonic

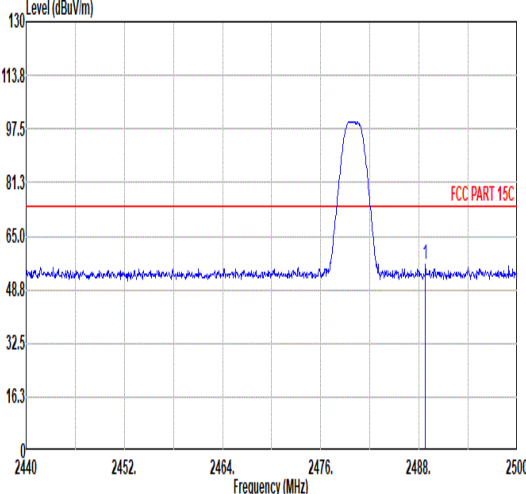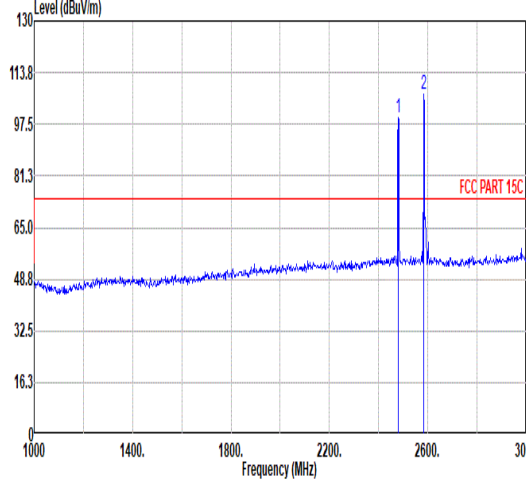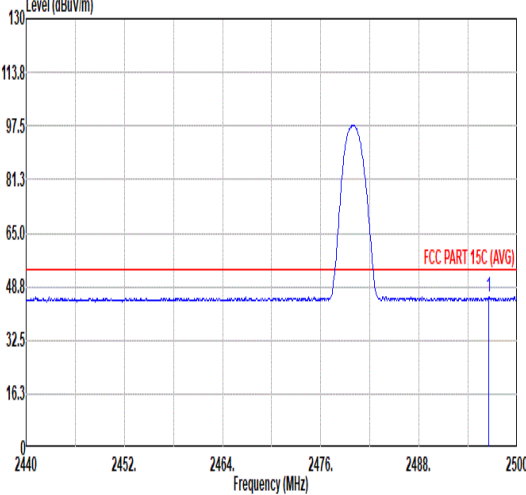
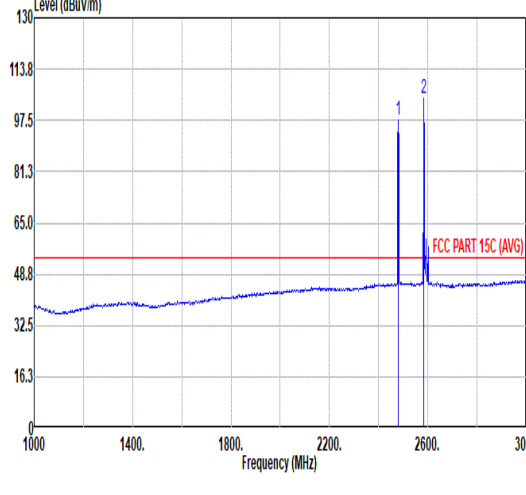


		1																																																																																																					
Mode		Co-location Band Edge																																																																																																					
		Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																					
ANT		6																																																																																																					
Pol.		Horizontal					Fundamental																																																																																																
Peak																																																																																																							
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	307	309	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.82</td><td>-----</td><td>86.74</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>307</td><td>309</td><td>Peak</td></tr><tr><td>2</td><td>2584.00</td><td>106.92</td><td>-----</td><td>93.93</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>Peak</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak	2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	307	309	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak																																																																																												
2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309	Peak																																																																																												
Avg																																																																																																							
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.66</td><td>-----</td><td>84.58</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>307</td><td>309</td><td>Average</td></tr><tr><td>2</td><td>2584.00</td><td>104.57</td><td>-----</td><td>91.58</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>Average</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average	2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2486.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average																																																																																												
2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309	Average																																																																																												



Mode	1																																																																																																															
	Co-location Band Edge																																																																																																															
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																															
ANT	6																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2498.02</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>41.94</td><td>32.69</td><td>6.75</td><td>32.24</td><td>6.00</td><td>245</td><td>0 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.01</td><td>-----</td><td>-----</td><td>80.93</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>245</td><td>0 Peak</td></tr><tr><td>2</td><td>2584.00</td><td>106.81</td><td>-----</td><td>-----</td><td>93.82</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>245</td><td>0 Peak</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.01	-----	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak	2	2584.00	106.81	-----	-----	93.82	32.36	6.87	32.24	6.00	245
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2480.00	94.01	-----	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak																																																																																																					
2	2584.00	106.81	-----	-----	93.82	32.36	6.87	32.24	6.00	245	0 Peak																																																																																																					
Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2496.34</td><td>46.04</td><td>54.00</td><td>-7.96</td><td>32.85</td><td>32.68</td><td>6.75</td><td>32.24</td><td>6.00</td><td>245</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>91.80</td><td>-----</td><td>-----</td><td>78.72</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>245</td><td>0 Average</td></tr><tr><td>2</td><td>2584.00</td><td>104.50</td><td>-----</td><td>-----</td><td>91.51</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>245</td><td>0 Average</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.80	-----	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average	2	2584.00	104.50	-----	-----	91.51	32.36	6.87	32.24	6.00	245
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2480.00	91.80	-----	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average																																																																																																					
2	2584.00	104.50	-----	-----	91.51	32.36	6.87	32.24	6.00	245	0 Average																																																																																																					

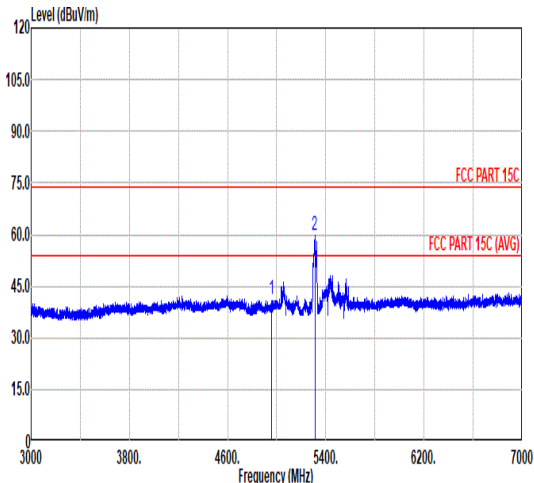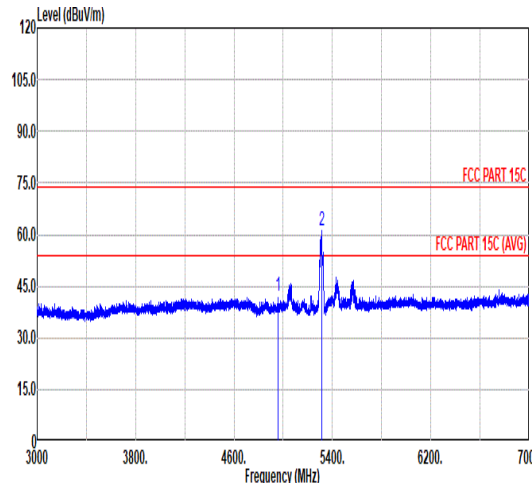



Mode	1																																																																				
	Co-location Harmonic																																																																				
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																				
ANT	6																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.34</td><td>74.00</td><td>-32.66</td><td>58.89</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>5310.40</td><td>59.83</td><td>74.00</td><td>-14.17</td><td>76.23</td><td>34.52</td><td>9.89</td><td>60.81</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	---	---	PEAK	2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	---	---	PEAK																																																									
2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	---	---	Peak																																																									
																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>59.49</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>5313.20</td><td>60.97</td><td>74.00</td><td>-13.03</td><td>77.36</td><td>34.53</td><td>9.89</td><td>60.81</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	---	---	PEAK	2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	---	---	PEAK																																																									
2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	---	---	Peak																																																									

Note: #2 is co-location of WLAN 5G_CH62 TX fundamental signal.



Mode	1																																																																																																				
	Co-location Band Edge																																																																																																				
	802.11ax HE40_CH62_5310MHz_Full																																																																																																				
ANT	CDD 6+8																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5044.64</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>44.14</td><td>34.00</td><td>9.69</td><td>31.95</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100	334 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>105.68</td><td>-----</td><td>-----</td><td>93.06</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	105.68	-----	-----	93.06	34.53	9.89	31.80	0.00	100	334 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100	334 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5310.00	105.68	-----	-----	93.06	34.53	9.89	31.80	0.00	100	334 PEAK																																																																																										
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5050.53</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>34.51</td><td>34.00</td><td>9.70</td><td>31.94</td><td>0.00</td><td>100</td><td>334 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>97.53</td><td>-----</td><td>-----</td><td>84.93</td><td>34.52</td><td>9.89</td><td>31.81</td><td>0.00</td><td>100</td><td>334 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	97.53	-----	-----	84.93	34.52	9.89	31.81	0.00	100	334 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5310.00	97.53	-----	-----	84.93	34.52	9.89	31.81	0.00	100	334 AVERAGE																																																																																										

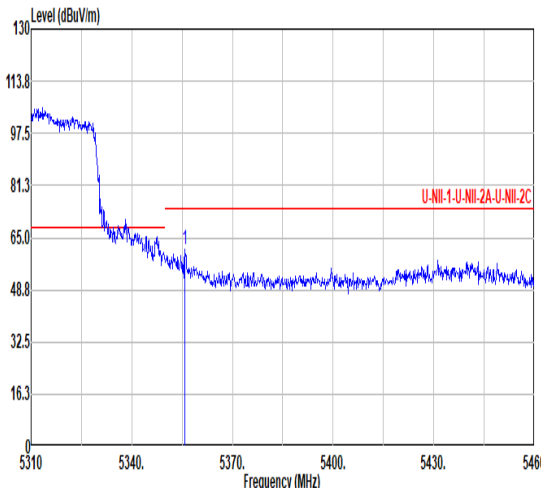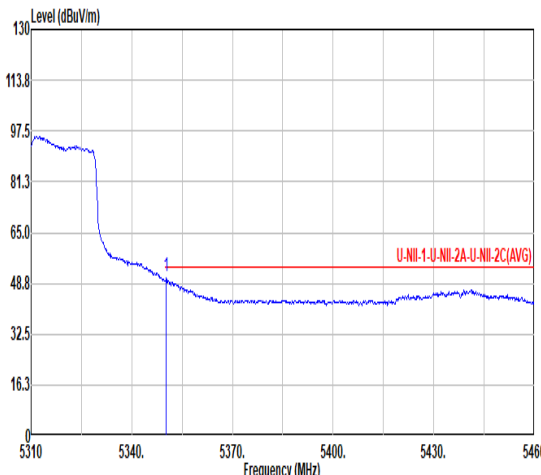

Mode	1																																														
	Co-location Band Edge																																														
	802.11ax HE40_CH62_5310MHz_Full																																														
ANT	CDD 6+8																																														
Pol.	Horizontal										Fundamental																																				
Peak	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5355.90</td><td>61.36</td><td>74.00</td><td>-12.64</td><td>48.62</td><td>34.61</td><td>9.91</td><td>31.78</td><td>0.00</td><td>100</td><td>334</td><td>PEAK</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5355.90	61.36	74.00	-12.64	48.62	34.61	9.91	31.78	0.00	100	334	PEAK	Blank
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5355.90	61.36	74.00	-12.64	48.62	34.61	9.91	31.78	0.00	100	334	PEAK																																				
Avg	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5350.20</td><td>50.85</td><td>54.00</td><td>-3.15</td><td>38.12</td><td>34.60</td><td>9.91</td><td>31.78</td><td>0.00</td><td>100</td><td>334</td><td>Average</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.20	50.85	54.00	-3.15	38.12	34.60	9.91	31.78	0.00	100	334	Average	Blank
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5350.20	50.85	54.00	-3.15	38.12	34.60	9.91	31.78	0.00	100	334	Average																																				





Mode	1																																																																																									
	Co-location Band Edge																																																																																									
	802.11ax HE40_CH62_5310MHz_Full																																																																																									
ANT	CDD 6+8																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 5062.48 MHz. The limit line is at 65.0 dBuV/m. The read level is 55.25 dBuV/m. The peak is labeled 1.	Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 5310.00 MHz. The limit line is at 65.0 dBuV/m. The read level is 101.35 dBuV/m. The peak is labeled 1.																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5064.48</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>43.45</td><td>34.03</td><td>9.71</td><td>31.94</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>101.35</td><td>-----</td><td>88.73</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	101.35	-----	88.73	34.53	9.89	31.80	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311 PEAK																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5310.00	101.35	-----	88.73	34.53	9.89	31.80	0.00	300	311 PEAK																																																																																
Avg	Vertical Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a peak at 5055.49 MHz. The limit line is at 48.8 dBuV/m. The read level is 45.23 dBuV/m. The peak is labeled 1.	Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a peak at 5310.00 MHz. The limit line is at 48.8 dBuV/m. The read level is 93.01 dBuV/m. The peak is labeled 1.																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5055.49</td><td>45.23</td><td>54.00</td><td>-8.77</td><td>33.46</td><td>34.01</td><td>9.70</td><td>31.94</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>93.01</td><td>-----</td><td>80.39</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	93.01	-----	80.39	34.53	9.89	31.80	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311 AVERAGE																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5310.00	93.01	-----	80.39	34.53	9.89	31.80	0.00	300	311 AVERAGE																																																																																





Mode	1										
	Co-location Band Edge										
	802.11ax HE40_CH62_5310MHz_Full										
ANT	CDD 6+8										
Pol.	Vertical										
Peak	Level (dBuV/m)										

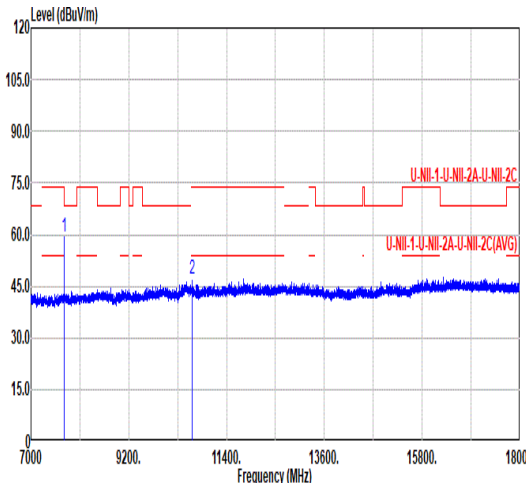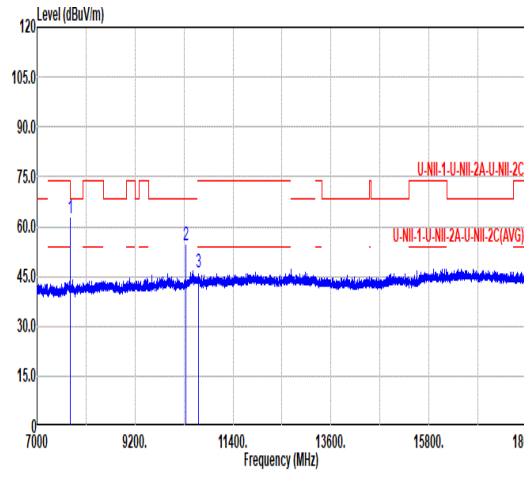

Mode	1																																																																																																																																					
	Co-location Harmonic																																																																																																																																					
	802.11ax HE40_CH62_5310MHz_Full																																																																																																																																					
ANT	CDD 6+8																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																															
Peak Avg																																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7752.40</td><td>59.18</td><td>70.20</td><td>-11.02</td><td>71.84</td><td>35.90</td><td>12.10</td><td>60.66</td><td>0.00</td><td>100</td><td>262 Peak</td></tr><tr><td>2</td><td>10620.00</td><td>46.88</td><td>74.00</td><td>-27.12</td><td>55.95</td><td>37.88</td><td>14.31</td><td>61.26</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7752.40	59.18	70.20	-11.02	71.84	35.90	12.10	60.66	0.00	100	262 Peak	2	10620.00	46.88	74.00	-27.12	55.95	37.88	14.31	61.26	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7752.40</td><td>62.37</td><td>70.20</td><td>-7.83</td><td>75.03</td><td>35.90</td><td>12.10</td><td>60.66</td><td>0.00</td><td>100</td><td>265 Peak</td></tr><tr><td>2</td><td>10336.30</td><td>54.56</td><td>68.20</td><td>-13.64</td><td>64.36</td><td>37.37</td><td>14.11</td><td>61.28</td><td>0.00</td><td>100</td><td>91 Peak</td></tr><tr><td>3</td><td>10620.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>55.35</td><td>37.88</td><td>14.31</td><td>61.26</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7752.40	62.37	70.20	-7.83	75.03	35.90	12.10	60.66	0.00	100	265 Peak	2	10336.30	54.56	68.20	-13.64	64.36	37.37	14.11	61.28	0.00	100	91 Peak	3	10620.00	46.28	74.00	-27.72	55.35	37.88	14.31	61.26	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	7752.40	59.18	70.20	-11.02	71.84	35.90	12.10	60.66	0.00	100	262 Peak																																																																																																																											
2	10620.00	46.88	74.00	-27.12	55.95	37.88	14.31	61.26	0.00	---	--- PEAK																																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	7752.40	62.37	70.20	-7.83	75.03	35.90	12.10	60.66	0.00	100	265 Peak																																																																																																																											
2	10336.30	54.56	68.20	-13.64	64.36	37.37	14.11	61.28	0.00	100	91 Peak																																																																																																																											
3	10620.00	46.28	74.00	-27.72	55.35	37.88	14.31	61.26	0.00	---	--- PEAK																																																																																																																											

Note: #1 is the 3rd harmonic from LTE B41, the limit should be -25dBm and converted to field strength limit 70.2dBuV/m @3m distance, the test results is Pass.

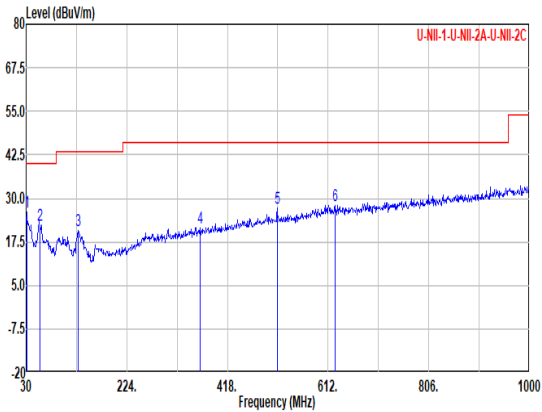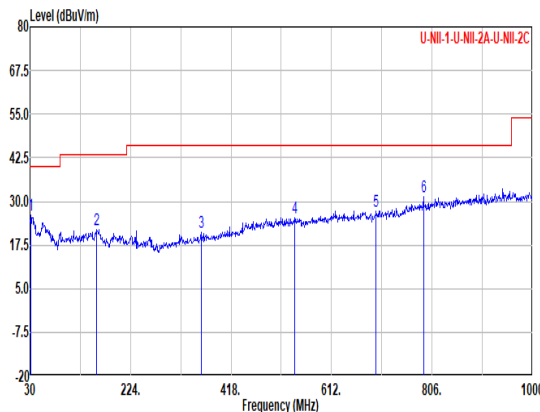

Mode	1																																																																																																													
	30-1G																																																																																																													
	802.11ax HE40_CH62_5310MHz_Full																																																																																																													
ANT	CDD 6+8																																																																																																													
Pol.	Horizontal																																																																																																													
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>25.90</td><td>40.00</td><td>-14.10</td><td>33.01</td><td>25.09</td><td>0.76</td><td>32.96</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>57.16</td><td>22.33</td><td>40.00</td><td>-17.67</td><td>41.19</td><td>12.85</td><td>1.04</td><td>32.75</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>130.88</td><td>20.91</td><td>43.50</td><td>-22.59</td><td>34.37</td><td>17.56</td><td>1.69</td><td>32.71</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>364.65</td><td>21.59</td><td>46.00</td><td>-24.41</td><td>30.88</td><td>20.98</td><td>2.83</td><td>33.10</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>514.03</td><td>27.10</td><td>46.00</td><td>-18.90</td><td>33.04</td><td>24.33</td><td>3.15</td><td>33.42</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>625.58</td><td>27.94</td><td>46.00</td><td>-18.06</td><td>31.46</td><td>26.32</td><td>3.69</td><td>33.53</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	--- Peak	2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	--- Peak	3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	--- Peak	4	364.65	21.59	46.00	-24.41	30.88	20.98	2.83	33.10	0.00	--- Peak	5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	--- Peak	6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	--- Peak																																																																																																				
2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	--- Peak																																																																																																				
3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	--- Peak																																																																																																				
4	364.65	21.59	46.00	-24.41	30.88	20.98	2.83	33.10	0.00	--- Peak																																																																																																				
5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	--- Peak																																																																																																				
6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	--- Peak																																																																																																				
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>25.95</td><td>40.00</td><td>-14.05</td><td>33.76</td><td>24.39</td><td>0.76</td><td>32.96</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>159.01</td><td>21.96</td><td>43.50</td><td>-21.54</td><td>36.23</td><td>16.57</td><td>1.84</td><td>32.68</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>360.77</td><td>20.90</td><td>46.00</td><td>-25.02</td><td>30.36</td><td>20.88</td><td>2.81</td><td>33.07</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>540.22</td><td>25.32</td><td>46.00</td><td>-20.68</td><td>30.76</td><td>24.90</td><td>3.18</td><td>33.52</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>698.33</td><td>27.11</td><td>46.00</td><td>-18.89</td><td>30.02</td><td>26.71</td><td>3.95</td><td>33.57</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>789.51</td><td>31.24</td><td>46.00</td><td>-14.76</td><td>32.30</td><td>28.04</td><td>4.19</td><td>33.29</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	--- Peak	2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	--- Peak	3	360.77	20.90	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	--- Peak	4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	--- Peak	5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	--- Peak	6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	--- Peak																																																																																																				
2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	--- Peak																																																																																																				
3	360.77	20.90	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	--- Peak																																																																																																				
4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	--- Peak																																																																																																				
5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	--- Peak																																																																																																				
6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	--- Peak																																																																																																				



Appendix C. Reference Report

FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-1, XT2437-2
FCC ID : IHDT56AS8
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 26, 2024 ~ Aug. 08, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Maximum EIRP Power and Emission Designator	6
1.7 Testing Site.....	6
1.8 Test Software.....	7
1.9 Applied Standards	7
1.10 Specification of Accessory.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels.....	10
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test.....	12
3.4 Conducted Output Power Measurement	13
3.5 Peak-to-Average Ratio	14
3.6 EIRP	15
3.7 Occupied Bandwidth.....	16
3.8 Conducted Band Edge Measurement	17
3.9 Conducted Spurious Emission Measurement	18
3.10 Frequency Stability Measurement.....	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test.....	21
4.4 Radiated Spurious Emission Measurement	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471919E	Rev. 01	Initial issue of report	Aug. 21, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 30.54 dB at 6984.000 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-1, XT2437-2
FCC ID	IHDT56AS8
IMEI Code	Conducted: 355709740017956/355709740017964 Radiation: 355709740016735
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark: The two model names are only for market segment, no other difference.

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	LTE Band 42: 3450 MHz ~ 3550 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 42 : 23.15 dBm LTE CA_42C : 23.04 dBm
Antenna Gain	LTE Band 42 : -1.15 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

LTE Band 42		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	3452.5 ~ 3547.5	0.1517	4M49G7D	0.1213	4M48W7D
10	3455 ~ 3545	0.1570	9M01G7D	0.1205	9M05W7D
15	3457.5 ~ 3542.5	0.1578	13M3G7D	0.1183	13M5W7D
20	3460 ~ 3540	0.1585	17M7G7D	0.1219	18M0W7D

LTE Band 42 CA		QPSK		16QAM/64QAM/256QAM	
BW (MHz)		Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20MHz+20MHz		0.1545	37M8G7D	0.1242	37M5W7D
20MHz+15MHz		0.1459	33M2G7D	0.1208	32M7W7D
15MHz+20MHz		0.1486	33M1G7D	0.1208	33M1W7D
20MHz+10MHz		0.1531	28M1G7D	0.1186	28M1W7D
10MHz+20MHz		0.1459	28M1G7D	0.1239	28M0W7D
20MHz+5MHz		0.1528	23M3G7D	0.1211	22M9W7D
5MHz+20MHz		0.1469	23M1G7D	0.1233	23M2W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH03-KS	AUDIX	E3	210616

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.10 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery	Brand Name	Motorola(ATL)	Model Name	RW50
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Z Plane)


Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. QPSK, 16QAM, 64QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	L, M, H
Peak-to-Average Ratio	LTE Band 42	20M	QPSK, 16QAM, 64QAM 256QAM	Full RB	M
E.I.R.P	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM	Full RB	M
Conducted Band Edge	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM, 256QAM	1RB, Full RB	L, H
Conducted Spurious Emission	LTE Band 42	5M, 10M, 15M, 20M	QPSK	1RB	L, M, H
Frequency Stability	LTE Band 42	5M	QPSK	1RB	M
Radiated Spurious Emission	LTE Band 42	Worst case from maximum power			M

Note:

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Test Items	Band	Bandwidth (MHz)										Modulation				RB #			Test Channel			
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H	
Max. Output Power	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v			v	v	v	
26dB and 99% Bandwidth	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v					v		v		
Conducted Band Edge	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v		v	v		v	
Conducted Spurious Emission	42C_CA	v	v	v	v	v	v	v	-	-	-	v				v			v	v	v	
E.I.R.P.	42C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v			v	v	v	
Frequency Stability	42C_CA	v							-	-	-	v				v				v		
Radiated Spurious Emission	42C_CA	Worst Case																			v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																					

2.2 Connection Diagram of Test System

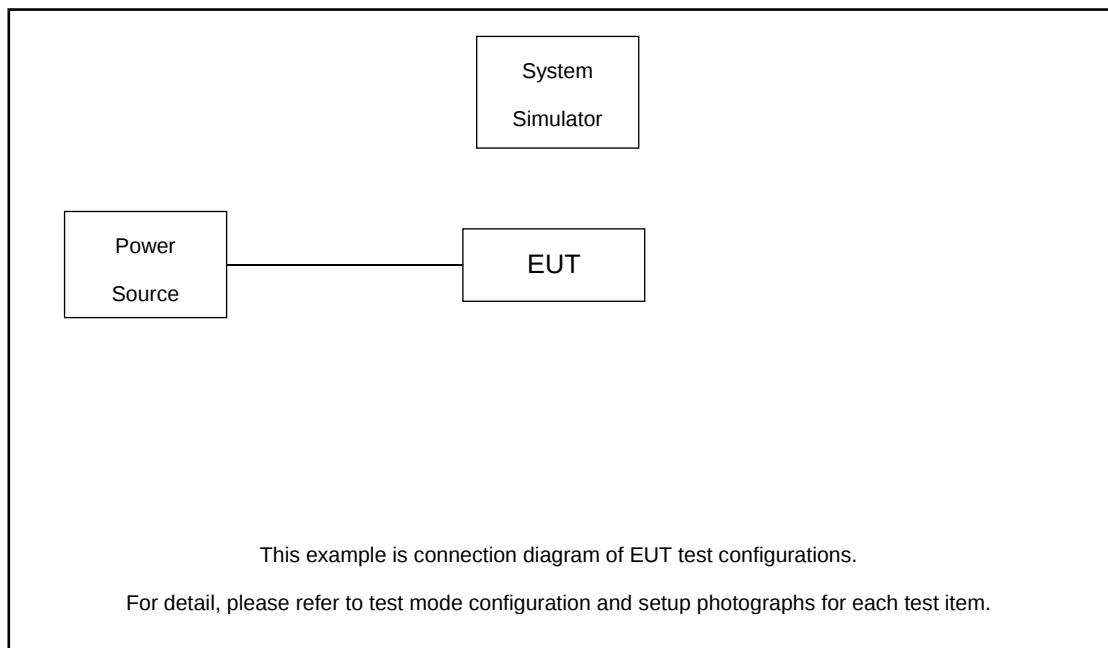

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 42 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	42190	42590	42990
	Frequency	3460	3500	3540
15	Channel	42165	42590	43015
	Frequency	3457.5	3500	3542.5
10	Channel	42140	42590	43040
	Frequency	3455	3500	3545
5	Channel	42115	42590	43065
	Frequency	3452.5	3500	3547.5

LTE Band 42C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	42190	42590	42792
		Frequency	3460	3500	3520.2
	SCC	Channel	42388	42788	42990
		Frequency	3479.8	3519.8	3540
20 + 15	PCC	Channel	42190	42590	42844
		Frequency	3460	3500	3525.4
	SCC	Channel	42361	42761	43015
		Frequency	3477.1	3517.1	3542.5
15 + 20	PCC	Channel	42165	42590	42819
		Frequency	3457.5	3500	3522.9
	SCC	Channel	42336	42761	42990
		Frequency	3474.6	3517.1	3540
20 + 10	PCC	Channel	42190	42590	42896
		Frequency	3460	3500	3530.6
	SCC	Channel	42334	42734	43040
		Frequency	3474.4	3514.4	3545
10 + 20	PCC	Channel	42140	42590	42846
		Frequency	3455	3500	3525.6
	SCC	Channel	42284	42734	42990
		Frequency	3469.4	3514.4	3540
20 + 5	PCC	Channel	42190	42590	42948
		Frequency	3460	3500	3535.8
	SCC	Channel	42307	42707	43065
		Frequency	3471.7	3511.7	3547.5
5 + 20	PCC	Channel	42115	42590	42873
		Frequency	3452.5	3500	3528.3
	SCC	Channel	42232	42707	42990
		Frequency	3464.2	3511.7	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

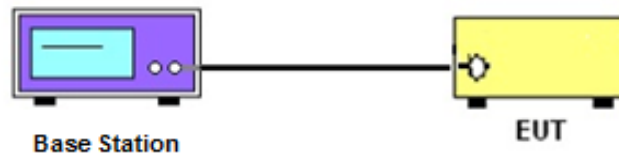

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

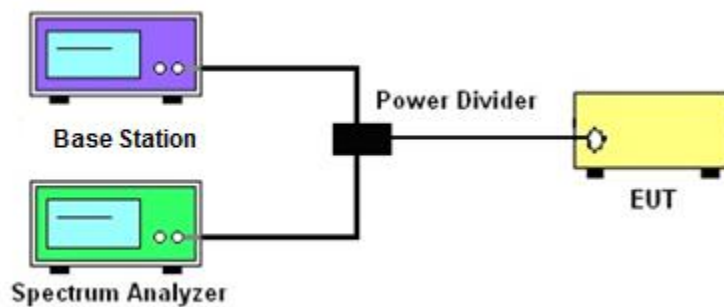

3.2.3 Frequency Stability

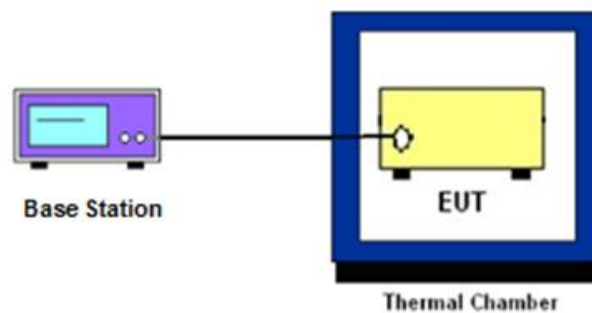

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

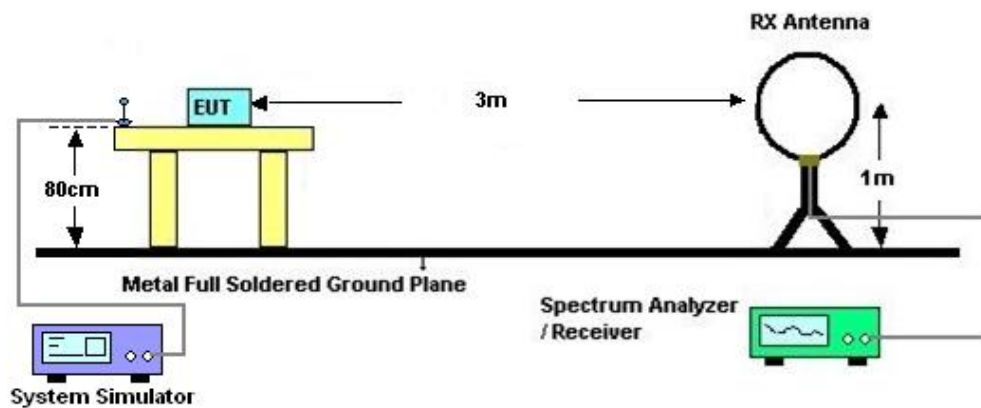

4.2.2 For radiated test from 30MHz to 1GHz

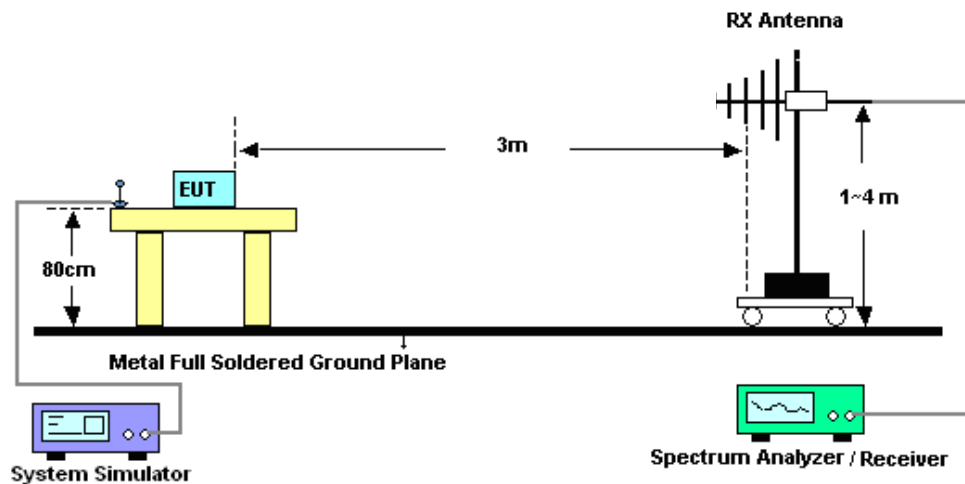

4.2.3 For radiated test above 1GHz

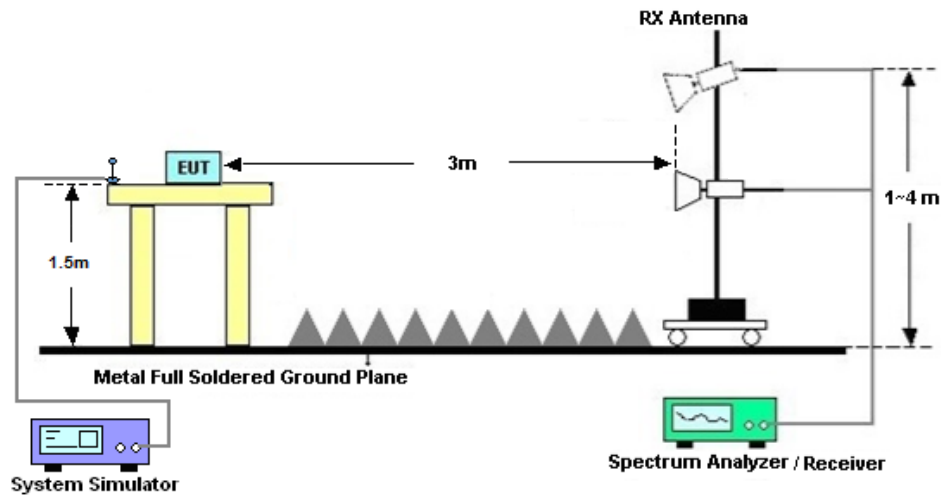

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 26, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 26, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 26, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.50 dB
Frequency Stability	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

----- THE END -----

Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

LTE Band 42:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				42190	42590	42990			
Frequency (MHz)				3460	3500	3540	L	M	H
20	QPSK	1	0	23.09	23.15	23.12	0.1563	0.1585	0.1574
20	QPSK	1	99	23.06	22.93	23.09	0.1552	0.1507	0.1563
20	QPSK	100	0	21.85	22.20	21.98	0.1175	0.1274	0.1211
20	16QAM	1	0	22.00	21.98	22.01	0.1216	0.1211	0.1219
20	64QAM	1	0	20.90	21.24	21.00	0.0944	0.1021	0.0966
20	256QAM	1	0	18.04	18.18	18.06	0.0489	0.0505	0.0491
Channel				42165	42590	43015	EIRP(W)		
Frequency (MHz)				3457.5	3500	3542.5	L	M	H
15	QPSK	1	0	22.93	22.95	23.13	0.1507	0.1514	0.1578
15	16QAM	1	0	21.82	21.88	21.85	0.1167	0.1183	0.1175
Channel				42140	42590	43040	EIRP(W)		
Frequency (MHz)				3455	3500	3545	L	M	H
10	QPSK	1	0	23.01	23.04	23.11	0.1535	0.1545	0.1570
10	16QAM	1	0	21.96	21.77	21.87	0.1205	0.1153	0.1180
Channel				42115	42590	43065	EIRP(W)		
Frequency (MHz)				3452.5	3500	3547.5	L	M	H
5	QPSK	1	0	22.95	22.96	22.92	0.1514	0.1517	0.1503
5	16QAM	1	0	21.90	21.79	21.99	0.1189	0.1159	0.1213


LTE Band 42C_CA:

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	23.01	0.1535
M	QPSK	1	Max	1	0	23.04	0.1545
H	QPSK	1	Max	1	0	23.00	0.1531
L	16QAM	1	Max	1	0	22.09	0.1242
M	16QAM	1	Max	1	0	21.96	0.1205
H	16QAM	1	Max	1	0	21.96	0.1205
L	64QAM	1	Max	1	0	21.00	0.0966
M	64QAM	1	Max	1	0	21.10	0.0989
H	64QAM	1	Max	1	0	21.10	0.0989
L	256QAM	1	Max	1	0	18.00	0.0484
M	256QAM	1	Max	1	0	17.97	0.0481
H	256QAM	1	Max	1	0	17.96	0.0480
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.79	0.1459
L	16QAM	1	Max	1	0	21.97	0.1208
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.87	0.1486
L	16QAM	1	Max	1	0	21.97	0.1208
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	23.00	0.1531
L	16QAM	1	Max	1	0	21.89	0.1186
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.79	0.1459
L	16QAM	1	Max	1	0	22.08	0.1239
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.99	0.1528
L	16QAM	1	Max	1	0	21.98	0.1211
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	22.82	0.1469
L	16QAM	1	Max	1	0	22.06	0.1233

LTE Band 42





Peak-to-Average Ratio

Mode	LTE Band 42 / 20MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB				Result
Middle CH	5.07	6.09	7.65	8.09	PASS

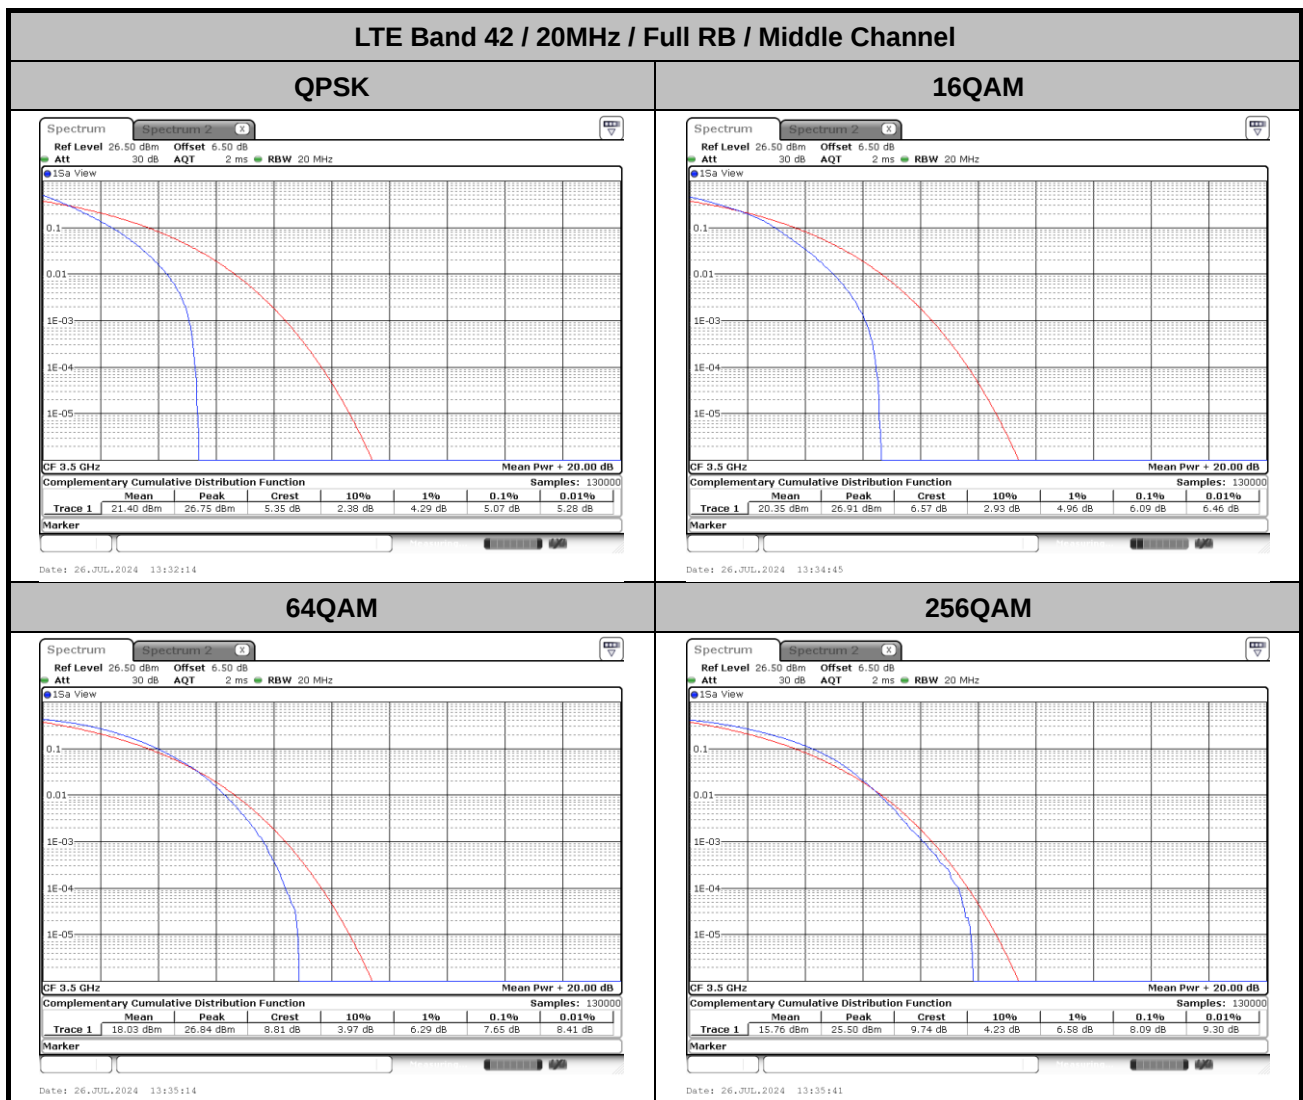


**26dB Bandwidth**

Mode	LTE Band 42 : 26dB BW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.98	4.93	9.91	9.99	14.24	14.15	19.50	18.82

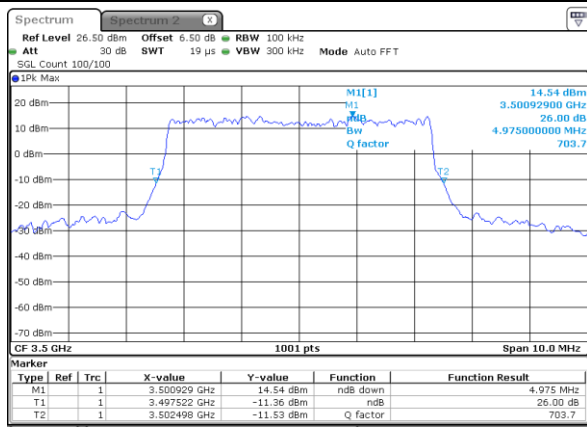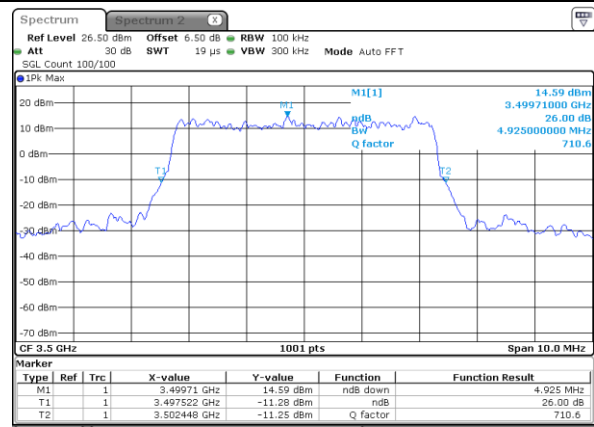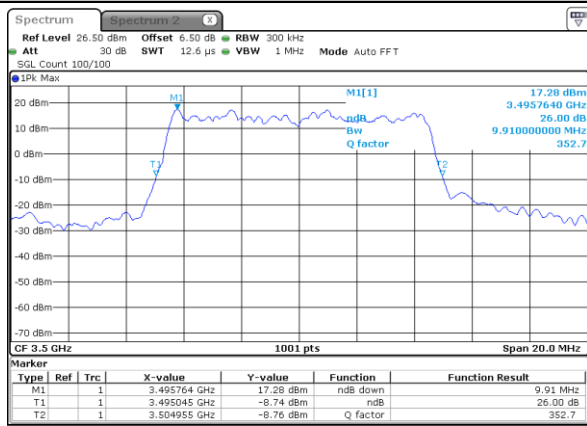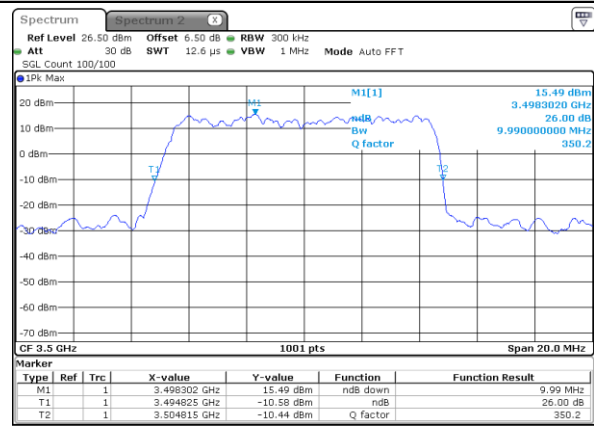
LTE Band 42 / Middle channel / Full RB/5M**QPSK****16QAM****LTE Band 42 / Middle channel / Full RB/10M****QPSK****16QAM**

LTE Band 42 / Middle channel / Full RB/15M

QPSK

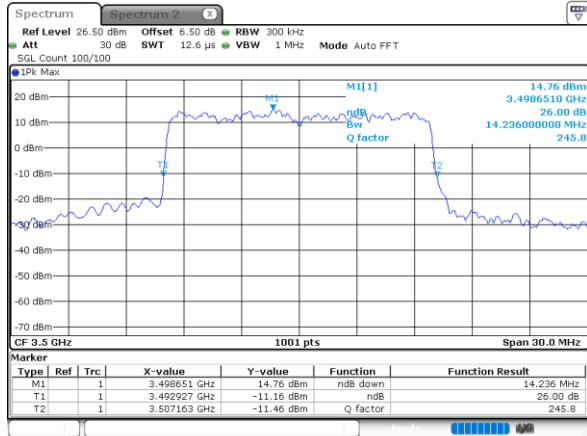


16QAM

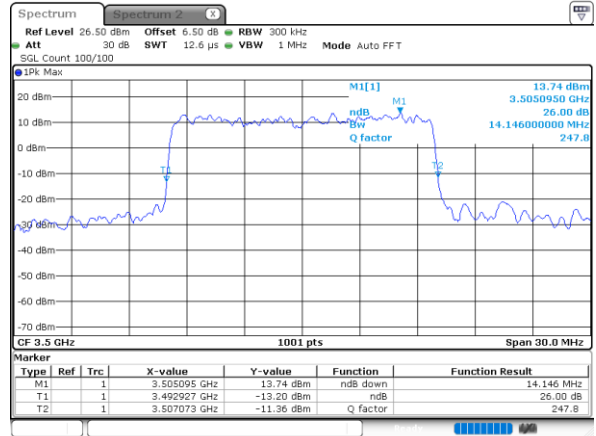


LTE Band 42 / Middle channel / Full RB/20M

QPSK

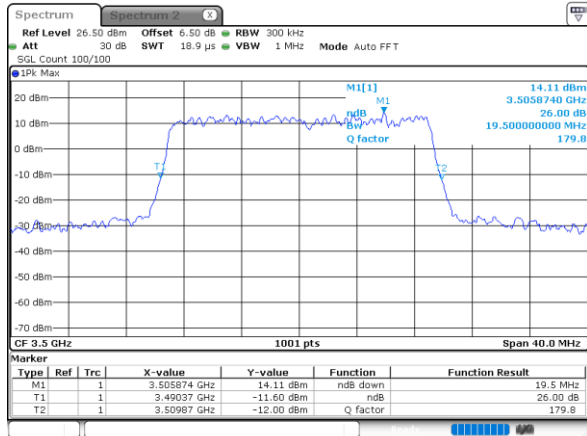

16QAM

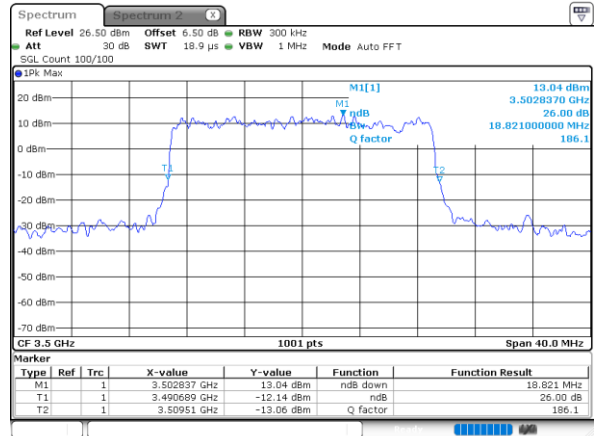




Occupied Bandwidth


Mode	LTE Band 42 : 99%OBW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.49	4.48	9.01	9.05	13.34	13.46	17.74	17.98

LTE Band 42 / Middle channel / Full RB/5M

QPSK

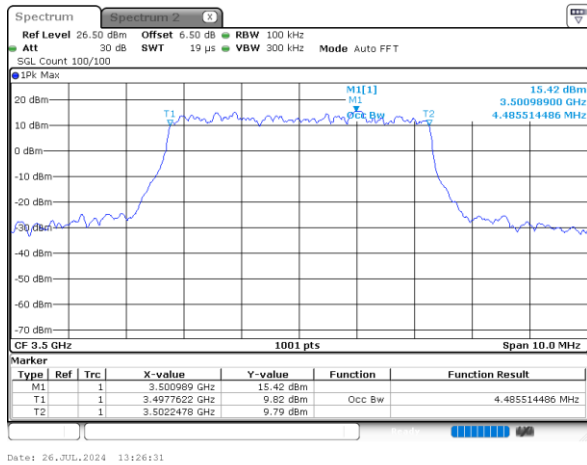


16QAM

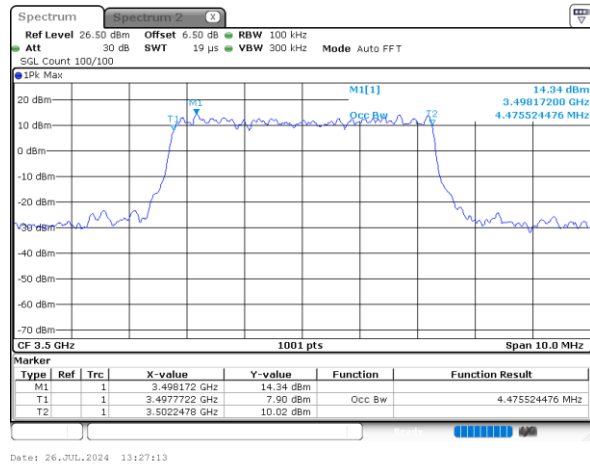


LTE Band 42 / Middle channel / Full RB/10M

QPSK

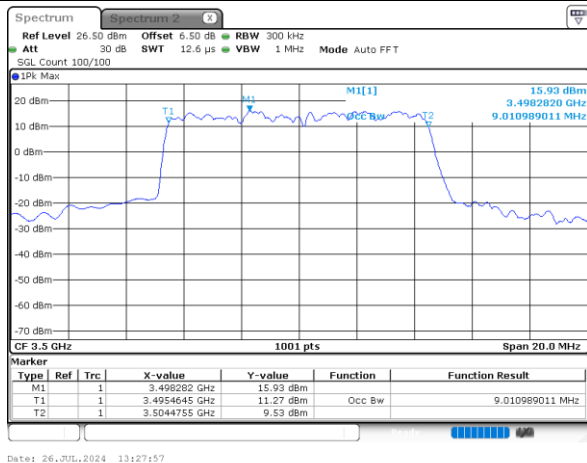


16QAM

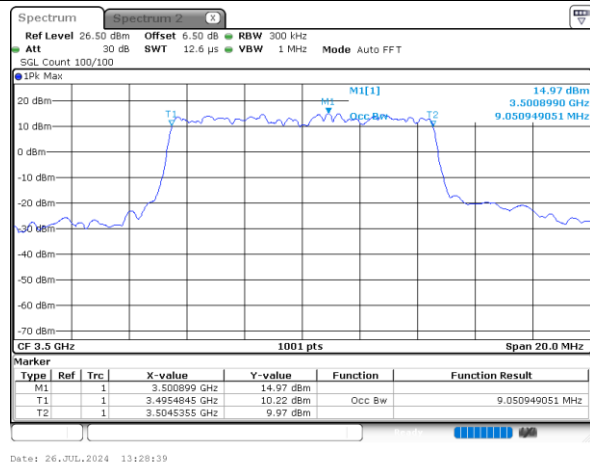




LTE Band 42 / Middle channel / Full RB/15M

QPSK

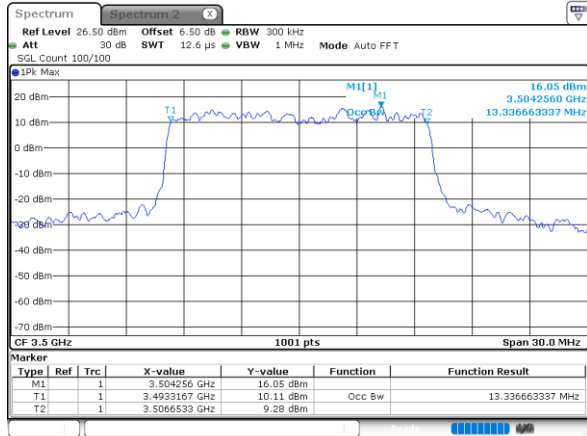


16QAM

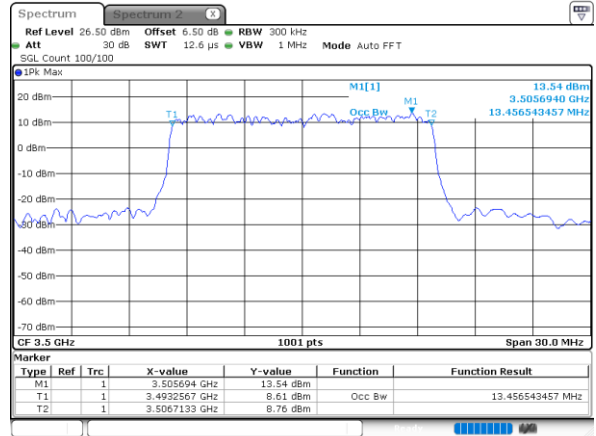


LTE Band 42 / Middle channel / Full RB/20M

QPSK

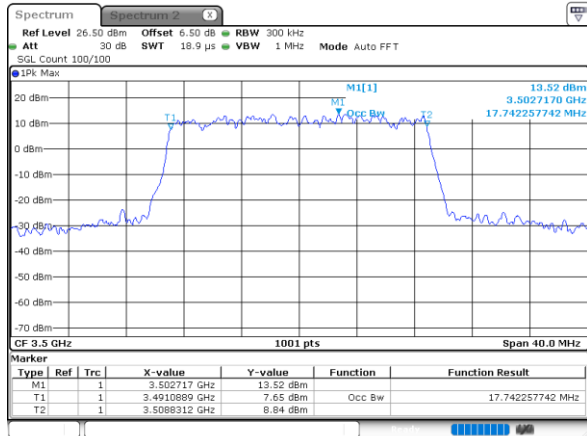

16QAM

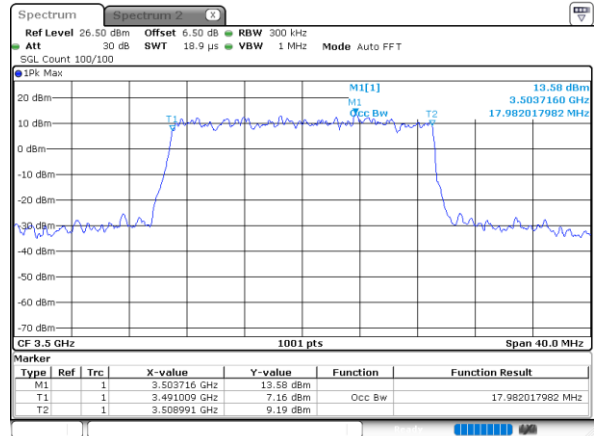




Conducted Band Edge


LTE Band 42 / 5MHz

QPSK


Lowest Channel / 1RB0

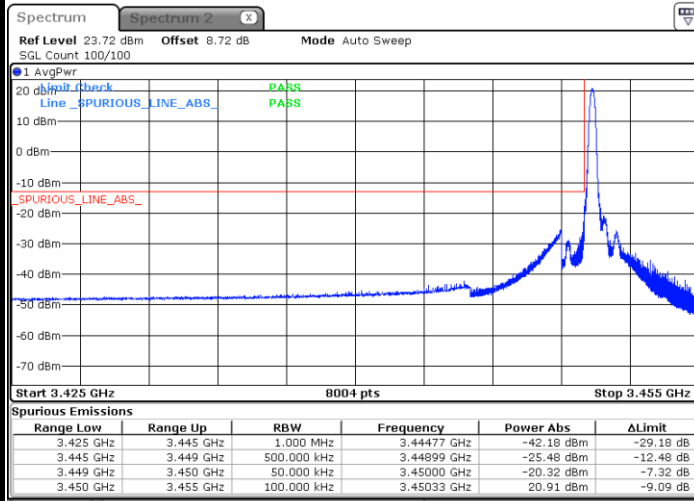


Highest Channel / 1RBmax

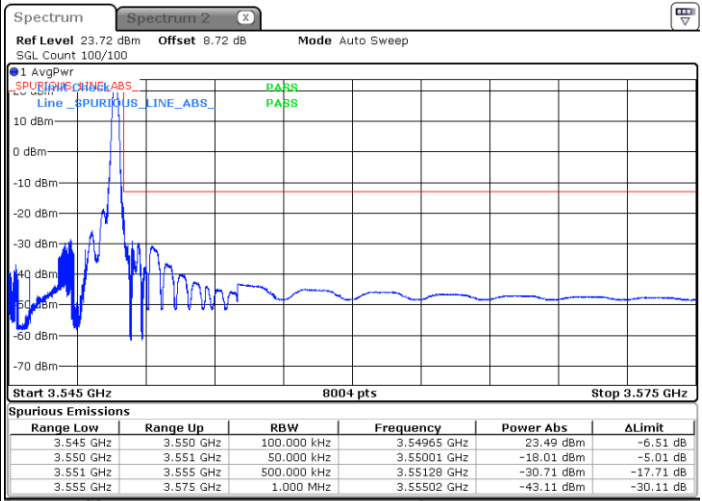

Lowest Channel / FullRB

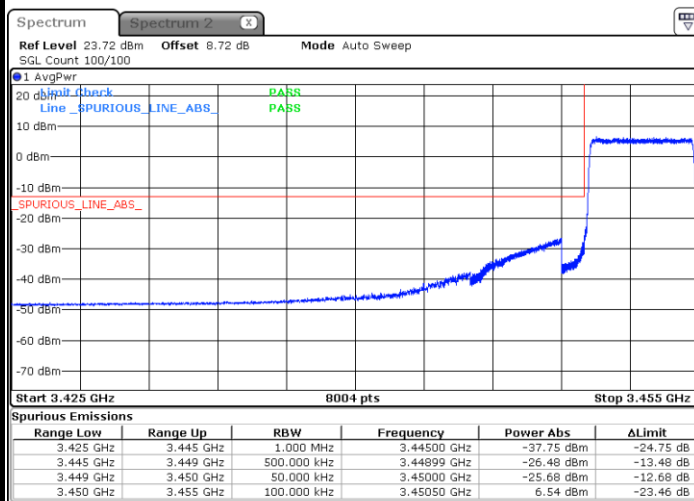

Highest Channel / FullRB

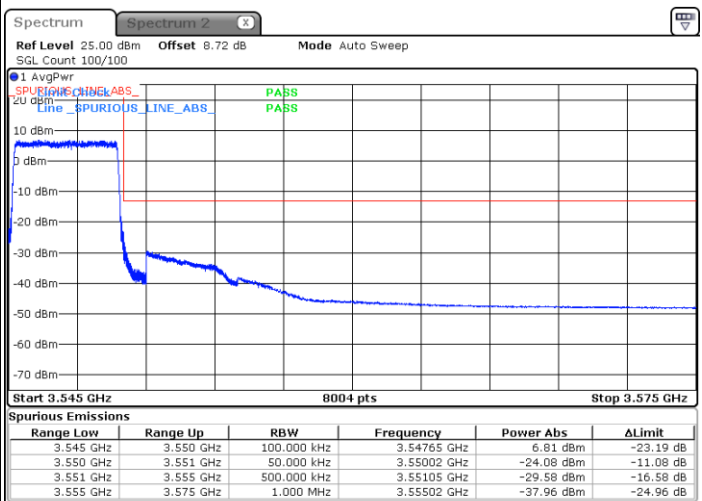




LTE Band 42 / 5MHz

16QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

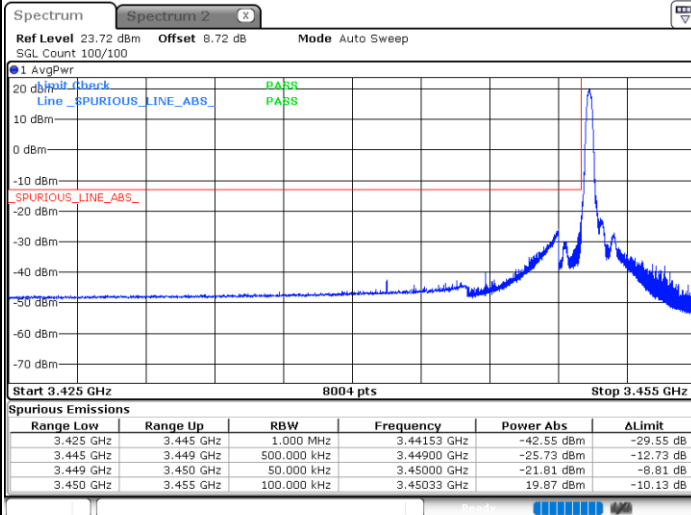

Lowest Channel / FullRB

Highest Channel / FullRB

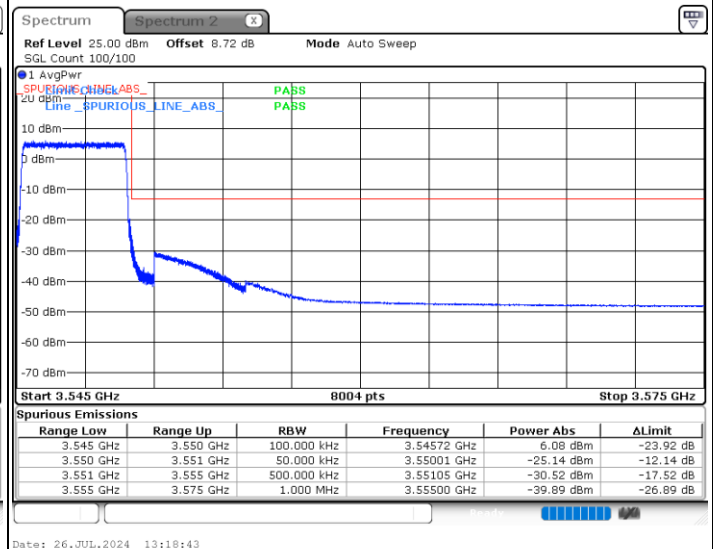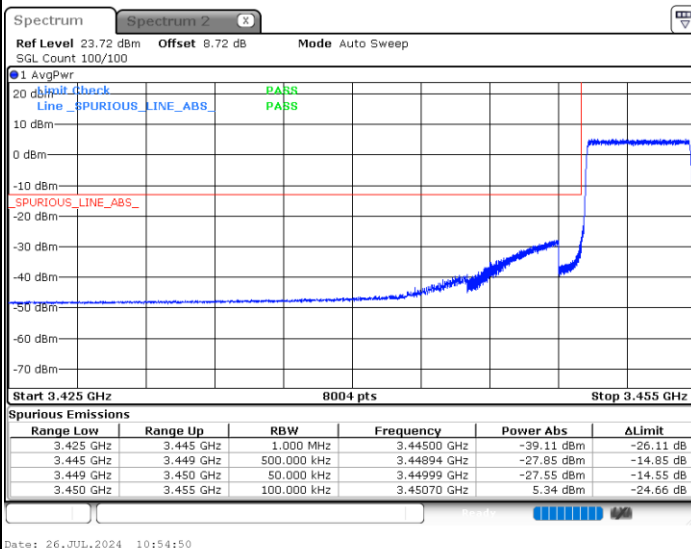




LTE Band 42 / 5MHz

64QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

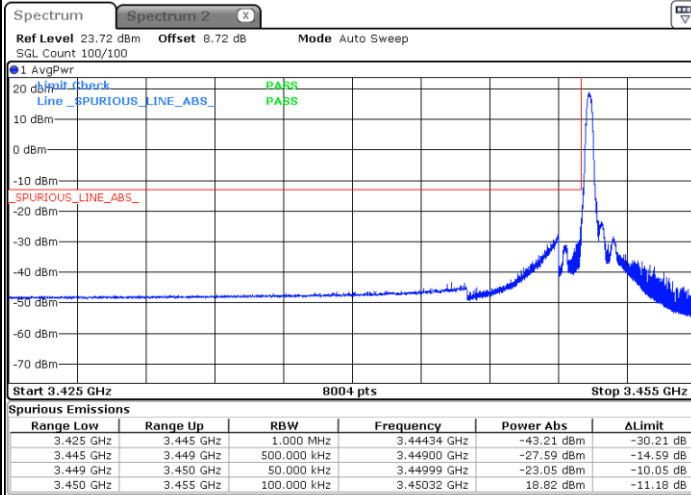

Lowest Channel / FullRB

Highest Channel / FullRB

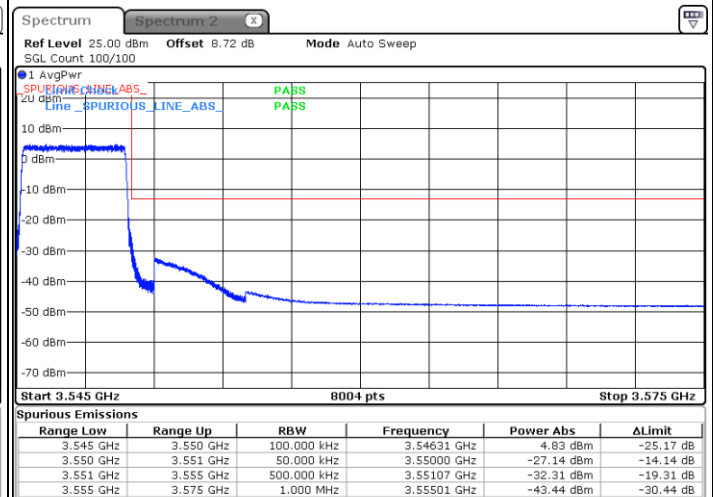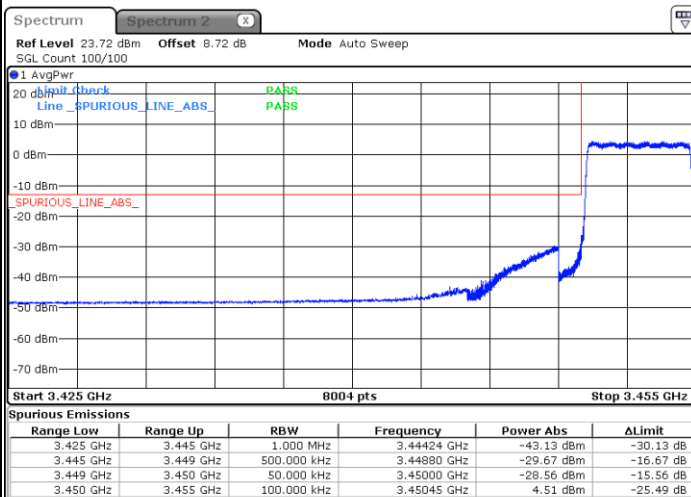




LTE Band 42 / 5MHz

256QAM

Lowest Channel / 1RB0

Highest Channel / 1RBmax

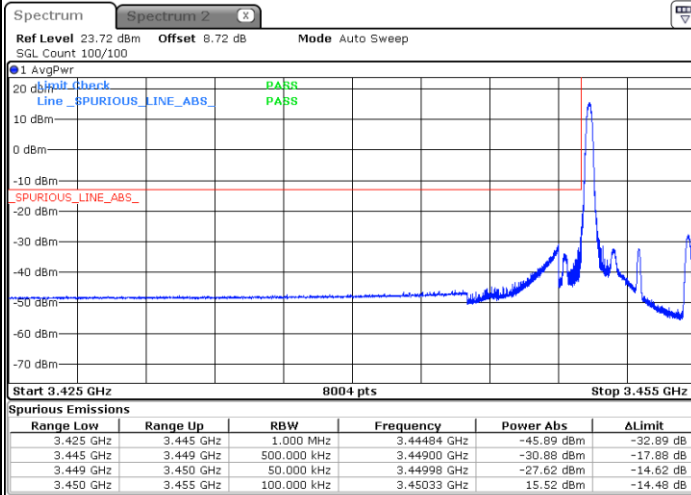


Date: 26.JUL.2024 10:59:54




Date: 26.JUL.2024 11:09:18

Lowest Channel / FullRB

Highest Channel / FullRB

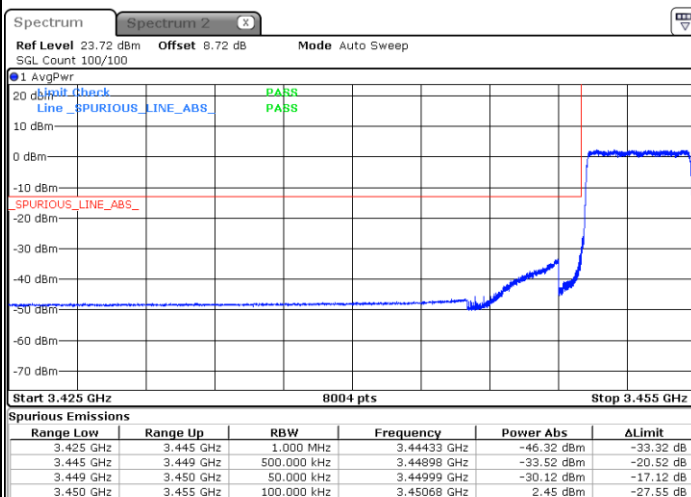

Date: 26.JUL.2024 10:56:31

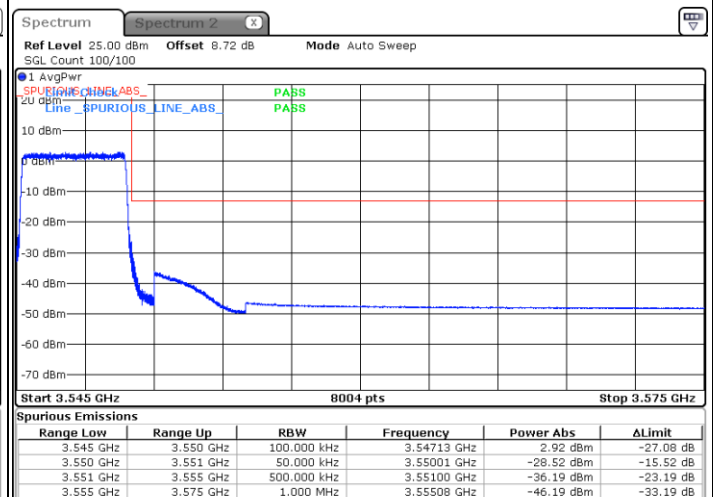


Date: 26.JUL.2024 13:20:14




LTE Band 42 / 10MHz

QPSK


Lowest Channel / 1RB0

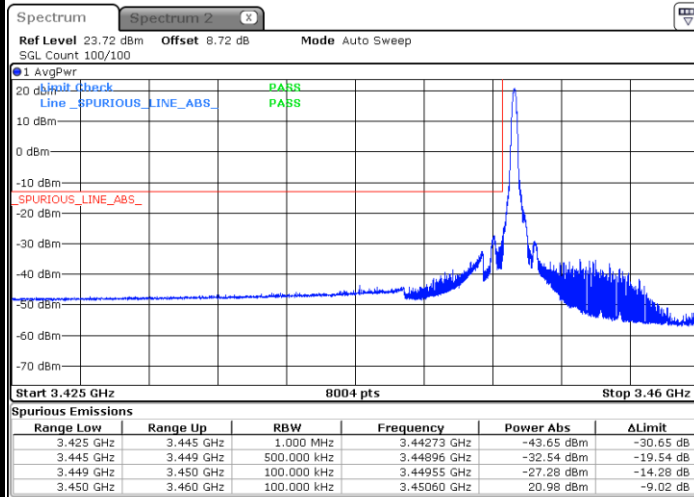


Highest Channel / 1RBmax

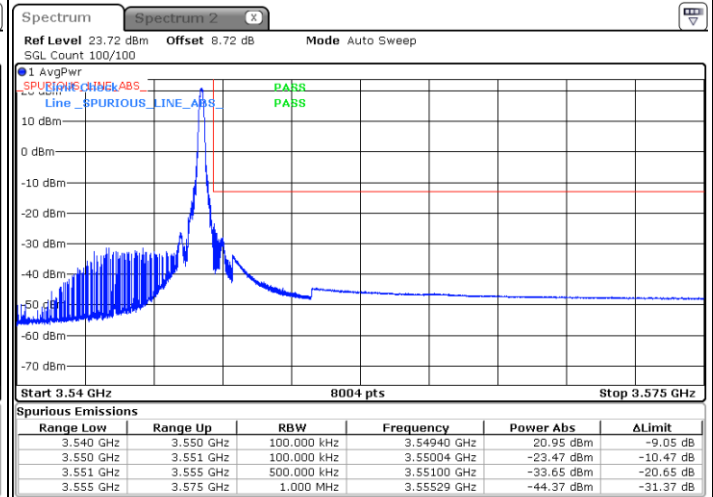

Lowest Channel / FullRB

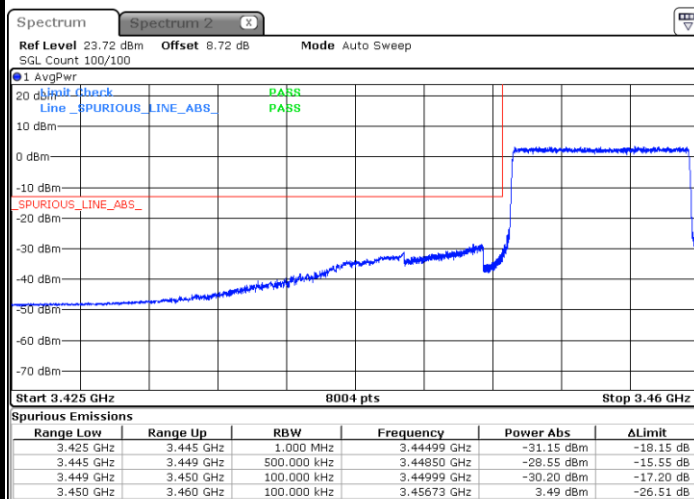

Highest Channel / FullRB

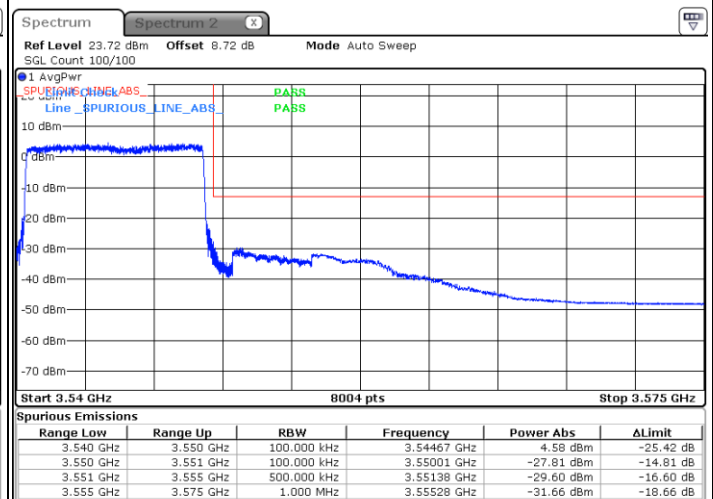





LTE Band 42 / 10MHz

16QAM



Lowest Channel / 1RB0

Highest Channel / 1RBmax

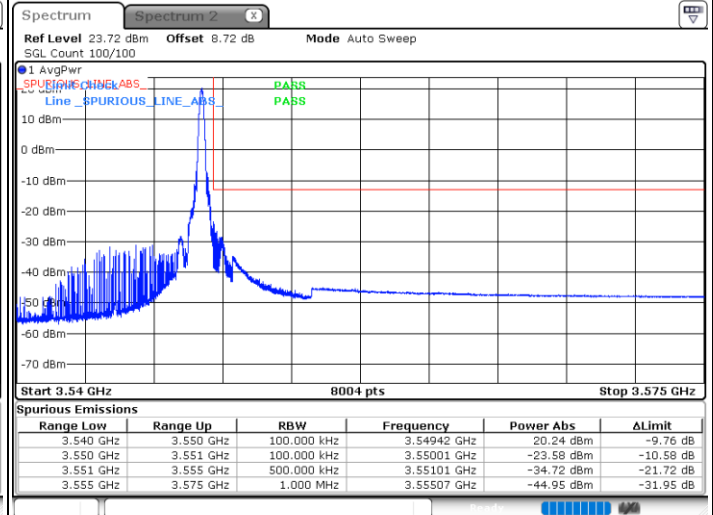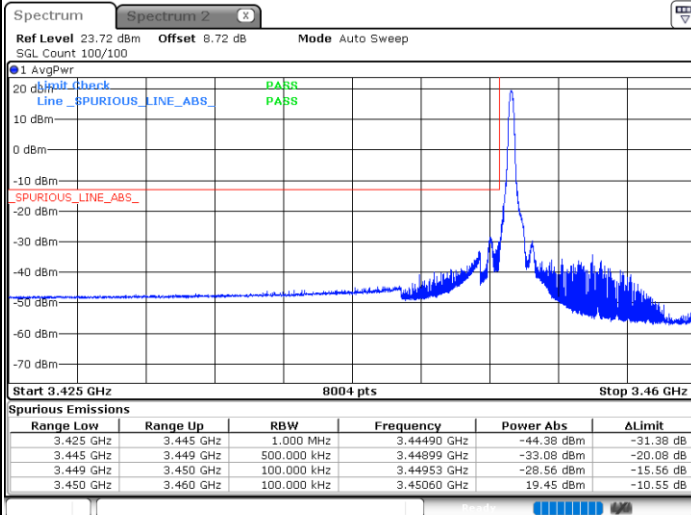

Lowest Channel / FullRB

Highest Channel / FullRB

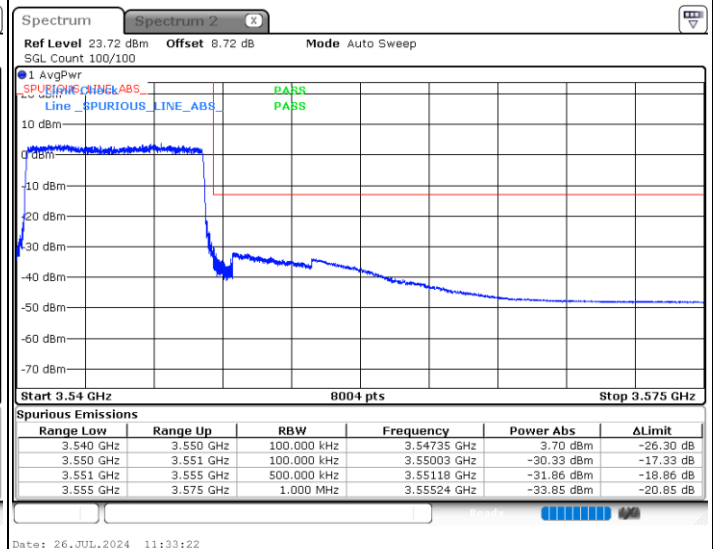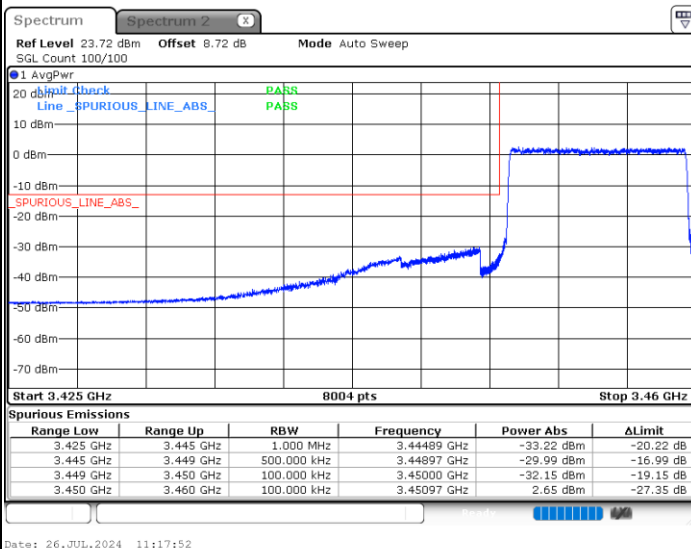




LTE Band 42 / 10MHz


64QAM

Lowest Channel / 1RB0

Highest Channel / 1RBmax

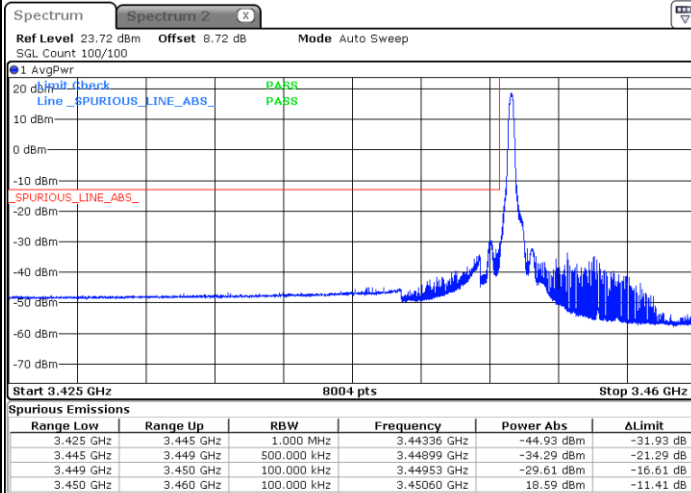


Date: 26.JUL.2024 11:22:03

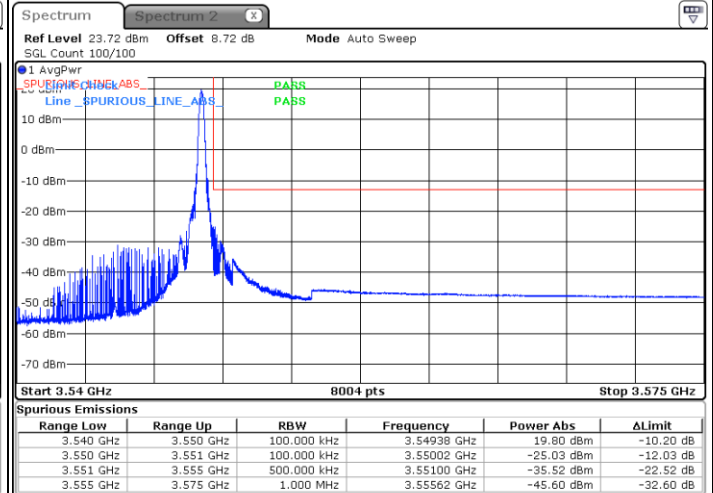


Date: 26.JUL.2024 11:31:06

Lowest Channel / FullRB

Highest Channel / FullRB

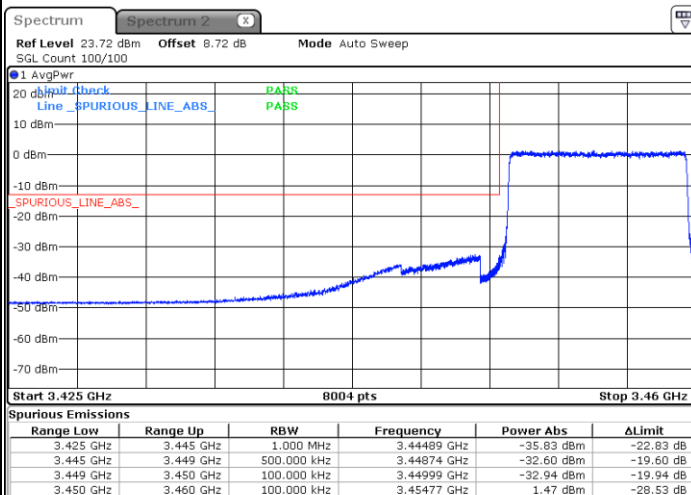

Date: 26.JUL.2024 11:18:42

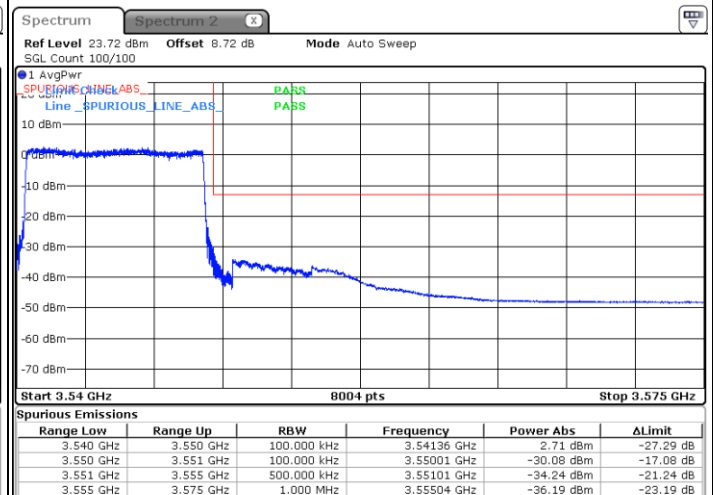

Date: 26.JUL.2024 11:34:07




LTE Band 42 / 10MHz


256QAM

Lowest Channel / 1RB0

Highest Channel / 1RBmax

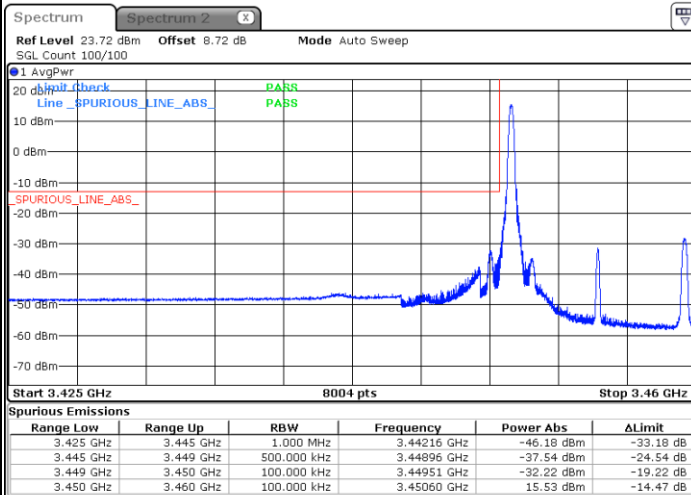


Date: 26.JUL.2024 11:22:48

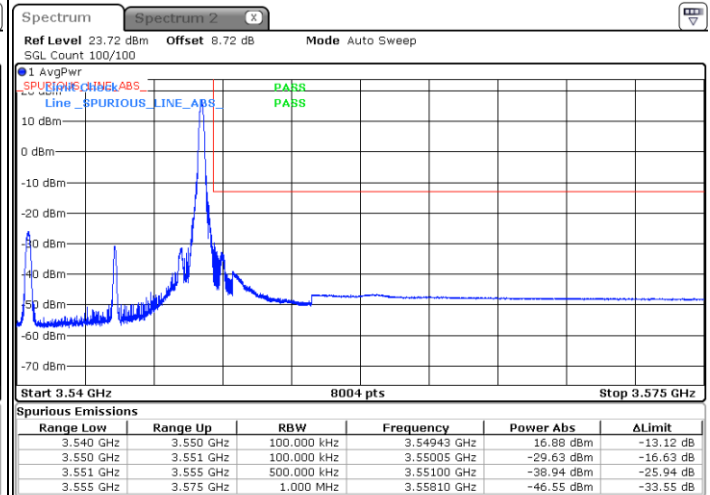


Date: 26.JUL.2024 11:31:51

Lowest Channel / FullRB

Highest Channel / FullRB

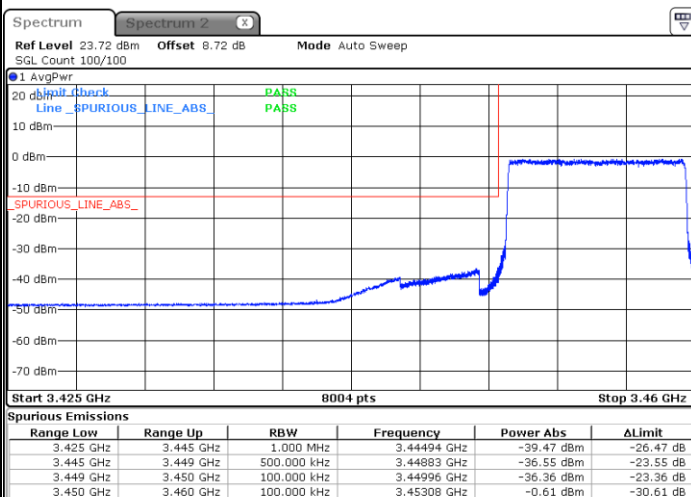

Date: 26.JUL.2024 11:19:32

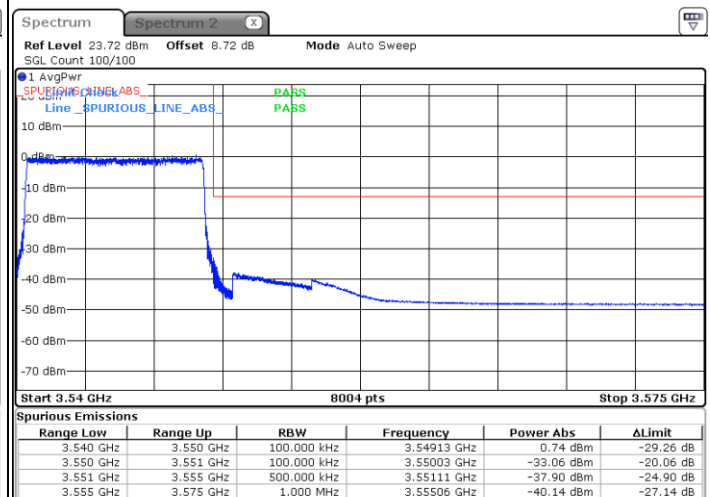

Date: 26.JUL.2024 11:34:52