



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-3
FCC ID : IHDT56AS9
STANDARD : 47 CFR Part 2, 22, 24, 27, 90S
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 05, 2024 ~ Aug. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Specification of Accessory.....	5
1.6 Testing Site.....	5
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	14
4 MEASUREMENT UNCERTAINTY	17
APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471919-01F	Rev. 01	Initial issue of report	Sep. 03, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-3
FCC ID	IHDT56AS9
IMEI Code	Conducted/DFS/CBP: 359867620008119/359867620008127 Radiation: 359867620006634 Conduction: 359867620006899/359867620006907
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1((CHILE))	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(ATL)	Model Name	RW50
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	SH38D62338
Earphone 2	Brand Name	Motorola(Juwei)	Model Name	S928E43096
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

1.6 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS 03CH02-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616
3.	03CH02-KS	AUDIX	E3	6.2009-8-24al
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22, 24, 27, 90S, 90S
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015

2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2437-3, FCC ID: IHDT56AS9) is electrically identical to the reference device (Model: XT2437-1, XT2437-2, FCC ID: IHDT56AS8) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report.

For Conducted items of 5G NR bands please refer to report number: TR-24ADRTCC7017.

For SAR Reference detail, please refer to FCC SAR report FA471919-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AS9 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AS8 and FCC ID: IHDT56AS9 is as below:

- Remove WCDMA IV and LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32 and 5G NR n8/n20/n38/n41/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AS9 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AS8	Full test	FR471919A	IHDT56AS9	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AS8	Full test	FR471919B	IHDT56AS9	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AS8	Full test	FR471919C	IHDT56AS9	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AS8	Full test	FR471919D	IHDT56AS9	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5500~5720	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5745~5825	IHDT56AS8	Full test	FR471919E	IHDT56AS9	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AS8	Full test	FZ471919	IHDT56AS9	Spot check	Y, All test items
	6XD	5925~7125	IHDT56AS8	Full test	FR471919F	IHDT56AS9	Spot check	Y, All test items
22 24	PCE (GSM, WCDMA)	GSM 850/1900 WCDMA B2/B5	IHDT56AS8	Full test	FG471919A	IHDT56AS9	Spot check	Y, All test items
22 24 27 90	PCE (LTE)	LTE B2/B5/B7/B7C/B26/B38/B38C/B42/B42C	IHDT56AS8	Full test	FG471919B FG471919C FG471919D FG471919E FG471919F	IHDT56AS9	Spot check	Y, All test items
22 27	PCE (NR)	5G NR n5/n7/n26	IHDT56AS8	Full test	FG471919G	IHDT56AS9	Spot check	Y, RSE item.

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB}/20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation	Deviation Limit
BT 1Mbps (CH78)	Number of Channels (N)	79	79	0.00	3
	Hopping Channel Separation (MHz)	1.009	1.003	0.01	3
	Dwell Time of Each Channel(s)	0.31	0.31	0.00	3
	20dB Bandwidth(MHz)	0.95	0.94	0.01	3
	99% Bandwidth(MHz)	0.836	0.836	0.00	3
	Conducted Band Edges(dBm)	-52.28	-51.03	1.25	3
	Conducted Spurious Emission(dBm)	-43.36	-45.96	2.60	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	56.36	57.48	-1.12	3
BT	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
BLE 1Mbps (CH39)	6dB Bandwidth (MHz)	0.67	0.67	0.00	3
	99% Bandwidth (MHz)	1.02	1.02	0.00	3
	Power Spectral Density (dBm/3KHz)	-9.35	-9.50	0.15	3
	Conducted Band Edges and Spurious Emission (dBm)	-55.57	-52.79	2.78	3
	Conducted Spurious Emission (dBm)	-50.79	-49.64	1.15	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission (dBuV/m)	45.97	46.01	-0.04	3
BLE	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.06	8.02	0.04	3
	99% Bandwidth (MHz)	12.895	13.287	0.39	3
	Power Spectral Density (dBm/3KHz)	-0.08	-0.15	0.07	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.75	-36.73	1.98	3
	Conducted Spurious Emission (dBm)	-50.78	-49.45	1.33	3
WIFI 2.4G (802.11ax HE40 CH03)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.69	48.16	2.53	3
WIFI 2.4G	AC Conducted Emission (dBuV)	46.04	44.68	1.36	3
WIFI 5G (802.11a CH149)	26dB Emission Bandwidth (MHz)	20.91	20.45	0.46	3
	99% Occupied Bandwidth (MHz)	16.69	16.38	0.31	3
	Power Spectral Density (dBm/MHz)	8.39	7.80	0.59	3
	DFS (s)	0.763225	0.972832	0.209607	3
WIFI 5G (11ax HE40_Ch62)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.80	50.41	0.39	3



WIFI 5G	AC Conducted Emission (dBUV)	36.87	36.45	0.42	3
WIFI 6G UNII-8 (802.11ax HE80 CH199)	26dB Emission Bandwidth (MHz)	81.18	80.99	0.19	3
	99% Occupied Bandwidth (MHz)	76.952	76.876	0.08	3
	Fundamental Maximum EIRP (dBm)	11.34	11.06	0.28	3
	Fundamental Power Spectral Density (dBm/MHz)	-2.05	-2.56	0.51	3
	In-Band Emissions (Channel Mask) (dB)	-37.39	-37.15	0.24	3
WIFI 6G UNII-7 (802.11ax HE160 CH199)	Contention Based Protocol (dBm)	-69.05	-68.09	0.96	3
WIFI 6G (11ax HE160_Ch15)	Radiated Band Edges and Spurious Emission (dBUV/m)	50.62	50.46	0.16	3
WLAN 6G	AC Conducted Emission (dBUV)	43.18	45.05	1.87	3
Part 15C NFC	20dB Emission Bandwidth (KHz)	2.49	2.49	0	3
	99% Occupied Bandwidth (KHz)	2.11	2.10	0.01	3
	Field Strength of Fundamental (dBUV/m @ 30m)	9.36	11.95	2.59	3
	Radiated Spurious Emissions (dBUV/m)	29.5	30.68	1.18	3
	AC Power Line Conducted Emissions(dBUV)	45.12	43.97	1.15	3
Part 22/24/27/90 (Worst LTE Band 7C)	Conducted Power(dBm)	23.01	22.85	0.16	3
	Equivalent Isotropic Radiated Power(dBm)	20.84	20.68	0.16	3
	Peak-to-Average Ratio (dB)	6.46	6.34	0.12	3
	Occupied Bandwidth(MHz)	37.80	38.12	0.32	3
	Conducted Band Edge (dBm)	-26.52	-28.49	1.97	3
	Conducted Spurious Emission(dBm)	-50.27	-51.26	0.99	3
	Frequency Stability (ppm)	0.0029	0.0026	0.00	3



Test Item	Mode	IHDT56AS8 Parent Worst mode Test Result	IHDT56AS9 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	14.05	13.76	0.29	3
	BLE 1Mbps	5.69	5.39	0.3	3
	BLE 2Mbps	5.94	5.49	0.45	3
	11b, 2.4GHz	24.78	24.42	0.36	3
	11g, 2.4GHz	27.79	27.65	0.14	3
	11n HT20, 2.4GHz	27.88	27.25	0.63	3
	11n HT40, 2.4GHz	26.14	25.2	0.94	3
	11ax 20, 2.4GHz	28.03	27.41	0.62	3
	11ax 40, 2.4GHz	26.19	25.29	0.9	3
	11a, 5.2GHz	19.36	19.01	0.35	3
	11a, 5.3GHz	20.05	19.86	0.19	3
	11a, 5.5GHz	19.69	19.12	0.57	3
	11a, 5.8GHz	21.09	20.81	0.28	3
	11n HT20, 5.2GHz	19.54	19.12	0.42	3
	11n HT20, 5.3GHz	19.66	19.25	0.41	3
	11n HT20, 5.5GHz	19.92	19.34	0.58	3
	11n HT20, 5.8GHz	20.91	20.53	0.38	3
	11ac VHT20, 5.2GHz	19.59	19.24	0.35	3
	11ac VHT20, 5.3GHz	19.72	19.34	0.38	3
	11ac VHT20, 5.5GHz	19.74	19.62	0.12	3
	11ac VHT20, 5.8GHz	20.92	20.63	0.29	3
	11ax HE20, 5.2GHz	19.67	19.08	0.59	3
	11ax HE20, 5.3GHz	19.80	19.71	0.09	3
	11ax HE20, 5.5GHz	20.02	19.27	0.75	3
	11ax HE20, 5.8GHz	21.05	20.75	0.3	3
	11n HT40, 5.2GHz	19.82	19.33	0.49	3
	11n HT40, 5.3GHz	19.60	19.17	0.43	3
	11n HT40, 5.5GHz	19.99	19.27	0.72	3
	11n HT40, 5.8GHz	19.74	19.31	0.43	3
	11ac VHT40, 5.2GHz	19.96	19.56	0.4	3
	11ac VHT40, 5.3GHz	19.71	19.22	0.49	3
	11ac VHT40, 5.5GHz	19.99	19.54	0.45	3
	11ac VHT40, 5.8GHz	19.83	19.32	0.51	3
	11ax HE40, 5.2GHz	20.37	20.02	0.35	3
	11ax HE40, 5.3GHz	20.06	19.54	0.52	3
	11ax HE40, 5.5GHz	20.39	19.98	0.41	3
	11ax HE40, 5.8GHz	20.31	19.98	0.33	3
	11ac VHT80, 5.2GHz	17.13	16.88	0.25	3
	11ac VHT80, 5.3GHz	17.56	17.11	0.45	3
	11ac VHT80, 5.5GHz	18.95	18.45	0.5	3
	11ac VHT80, 5.8GHz	18.69	18.19	0.5	3
	11ax HE80, 5.2GHz	17.19	16.84	0.35	3
	11ax HE80, 5.3GHz	17.63	17.38	0.25	3
	11ax HE80, 5.5GHz	19.63	19.31	0.32	3
	11ax HE80, 5.8GHz	19.21	18.96	0.25	3
	11ac VHT160, 5.2GHz	15.34	14.98	0.36	3
	11ac VHT160, 5.5GHz	14.75	14.32	0.43	3
	11ax HE160, 5.2GHz	15.36	15.13	0.23	3
	11ax HE160, 5.5GHz	14.76	14.35	0.41	3
	11ax HE20, U-NII-5	10.00	9.23	0.77	3



11ax HE20, U-NII-6	9.31	8.7	0.61	3
11ax HE20, U-NII-7	9.42	9.03	0.39	3
11ax HE20, U-NII-8	10.04	9.82	0.22	3
11ax HE40, U-NII-5	13.09	12.62	0.47	3
11ax HE40, U-NII-6	12.27	12.04	0.23	3
11ax HE40, U-NII-7	12.49	11.89	0.60	3
11ax HE40, U-NII-8	13.39	13.13	0.26	3
11ax HE80, U-NII-5	15.01	14.24	0.77	3
11ax HE80, U-NII-6	14.70	14.22	0.48	3
11ax HE80, U-NII-7	14.44	13.66	0.78	3
11ax HE80, U-NII-8	15.64	15.36	0.28	3
11ax HE160, U-NII-5	16.44	15.68	0.76	3
11ax HE160, U-NII-6	16.22	15.78	0.44	3
11ax HE160, U-NII-7	16.31	15.75	0.56	3
11ax HE160, U-NII-8	15.37	15.17	0.2	3
GSM 850	32.84	32.82	0.02	3
GSM 1900	29.16	28.93	0.23	3
WCDMA 850	23.03	22.93	0.1	3
WCDMA1900	22.81	22.79	0.02	3
LTE B2	22.92	22.61	0.31	3
LTE B5	22.94	22.92	0.02	3
LTE B26 (Part 22H)	23.06	23.05	0.01	3
LTE B26 (Part 90S)	22.82	22.71	0.11	3
LTE B7	23.03	23.01	0.02	3
LTE B7C	23.01	22.85	0.16	3
LTE B38	23.16	23.12	0.04	3
LTE B38C	23.11	22.81	0.30	3
LTE B42	23.15	23.02	0.13	3
LTE B42C	23.04	22.96	0.08	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS/CBP. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Aug. 15, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 15, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 15, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 15, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000081 1	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2024	Aug. 05, 2024	Jan. 02, 2025	DFS (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Aug. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 05, 2024	NCR	DFS (DFS01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 21, 2024	Jan. 01, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Aug. 21, 2024	Apr. 16, 2025	CBP (DFS01-KS)

NCR: No Calibration Required.



For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Aug. 18, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 08, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 16, 2024~ Aug. 18, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 16, 2024~ Aug. 18, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 16, 2024~ Aug. 18, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz~18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz

Uncertainty of Conducted Measurement (WIFI 6G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	±0.4 Hz

**Uncertainty of Conducted Measurement (DFS)**

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04dB
---	--------

03CH03-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83dB
---	--------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	22 ~ 23 °C
		Temperature :	41 ~ 42 %





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2400-2483.5	6	Bluetooth-LE_GSKF	39	2480	2Mbps	Full	-
	U-NII-2A	5.25-5.35	CDD 6+8	802.11ax HE40	62	5310	MCS0	Full	-
	Part 27M B41 BW=20M								
	NFC on								





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	39	2496.34	46.04	54.00	-7.96	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	4960.00	41.94	74.00	-32.06	V	PEAK	Pass	Harmonic
	802.11ax HE40	62	5350.20	50.85	54.00	-3.15	H	Average	Pass	Band Edge
	802.11ax HE40	62	7752.40	62.37	70.20	-7.83	V	Peak	Pass	Harmonic

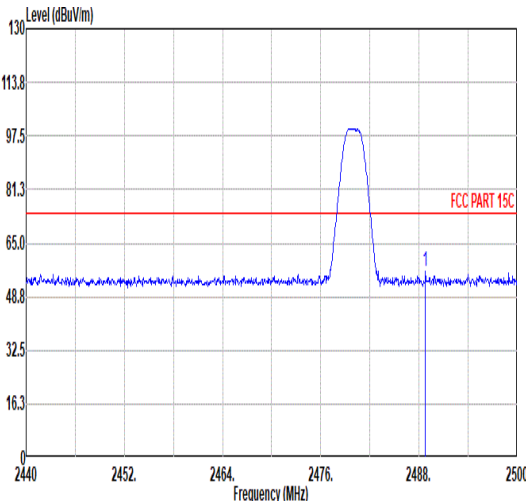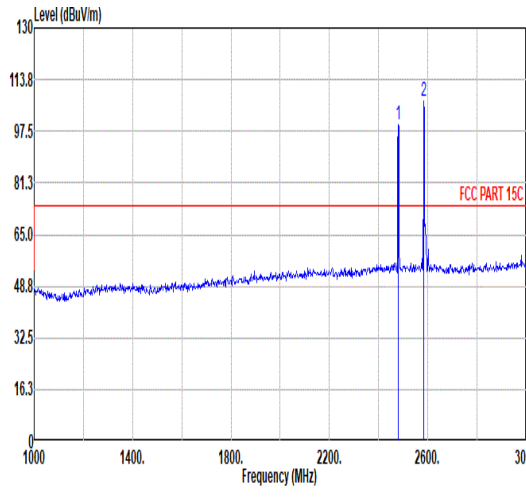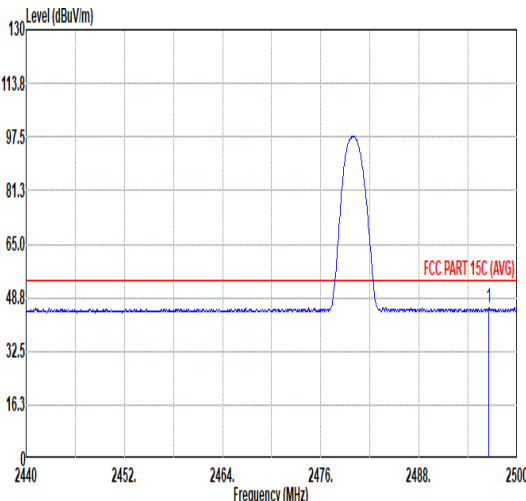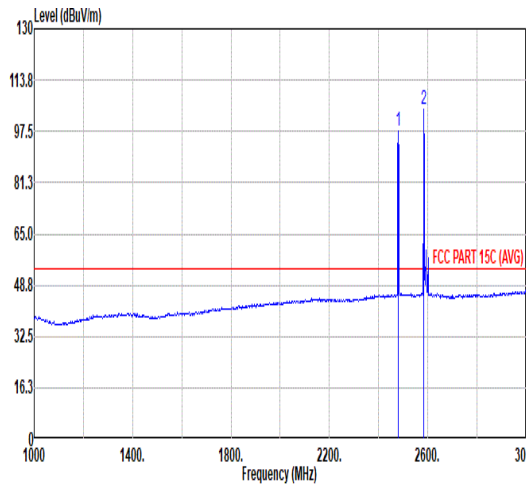

		1																																																																																																					
Mode		Co-location Band Edge																																																																																																					
		Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																					
ANT		6																																																																																																					
Pol.		Horizontal					Fundamental																																																																																																
Peak																																																																																																							
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	307	309	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>99.82</td><td>-----</td><td>86.74</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>307</td><td>309</td><td>Peak</td></tr><tr><td>2</td><td>2584.00</td><td>106.92</td><td>-----</td><td>93.93</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>Peak</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak	2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2488.78	56.44	74.00	-17.56	43.31	32.63	6.74	32.24	6.00	307	309	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	99.82	-----	86.74	32.58	6.73	32.23	6.00	307	309	Peak																																																																																												
2	2584.00	106.92	-----	93.93	32.36	6.87	32.24	6.00	307	309	Peak																																																																																												
Avg																																																																																																							
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.66</td><td>-----</td><td>84.58</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>307</td><td>309</td><td>Average</td></tr><tr><td>2</td><td>2584.00</td><td>104.57</td><td>-----</td><td>91.58</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>307</td><td>309</td><td>Average</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average	2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2496.52	45.66	54.00	-8.34	32.47	32.68	6.75	32.24	6.00	307	309	AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	97.66	-----	84.58	32.58	6.73	32.23	6.00	307	309	Average																																																																																												
2	2584.00	104.57	-----	91.58	32.36	6.87	32.24	6.00	307	309	Average																																																																																												

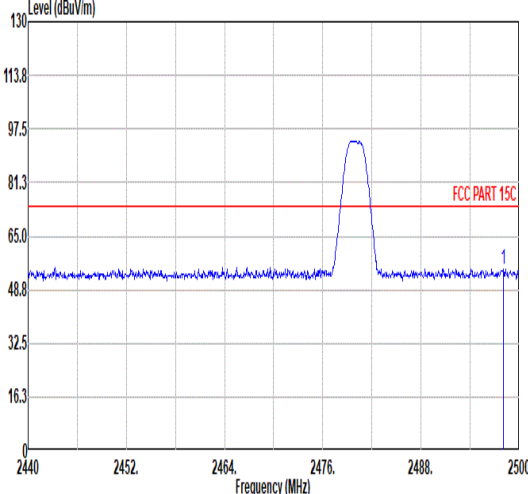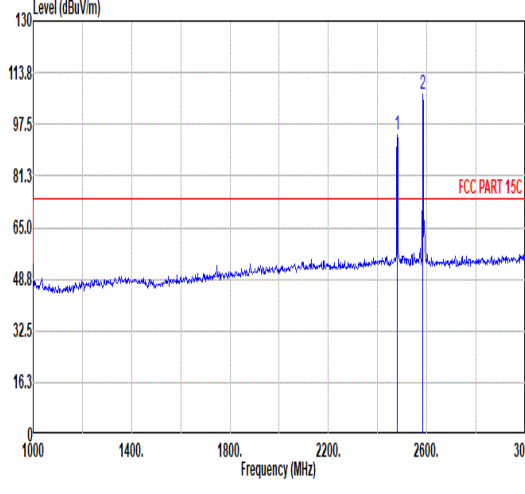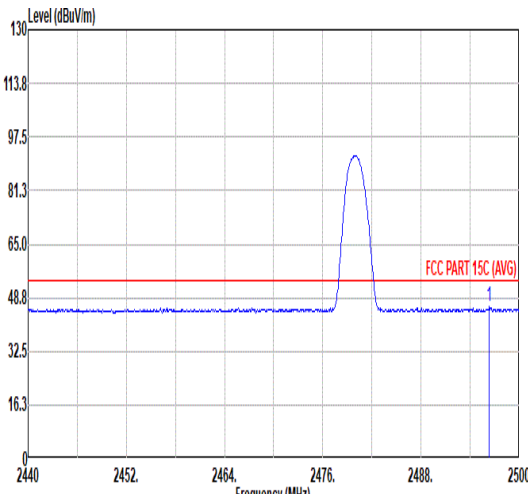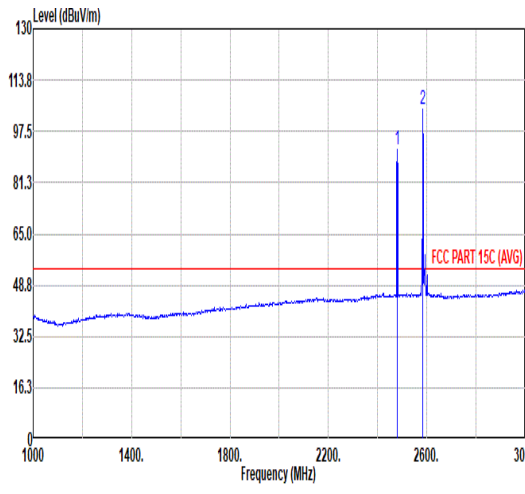





Mode	1																																																																																																					
	Co-location Band Edge																																																																																																					
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																																																					
ANT	6																																																																																																					
Pol.	Vertical	Fundamental																																																																																																				
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2498.02</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>41.94</td><td>32.69</td><td>6.75</td><td>32.24</td><td>6.00</td><td>245</td><td>0 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.01</td><td>-----</td><td>80.93</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>245</td><td>0 Peak</td></tr><tr><td>2</td><td>2584.00</td><td>106.81</td><td>-----</td><td>93.82</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>245</td><td>0 Peak</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.01	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak	2	2584.00	106.81	-----	93.82	32.36	6.87	32.24	6.00	245	0 Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2498.02	55.14	74.00	-18.86	41.94	32.69	6.75	32.24	6.00	245	0 PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2480.00	94.01	-----	80.93	32.58	6.73	32.23	6.00	245	0 Peak																																																																																												
2	2584.00	106.81	-----	93.82	32.36	6.87	32.24	6.00	245	0 Peak																																																																																												
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2496.34</td><td>46.04</td><td>54.00</td><td>-7.96</td><td>32.85</td><td>32.68</td><td>6.75</td><td>32.24</td><td>6.00</td><td>245</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>91.80</td><td>-----</td><td>78.72</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>245</td><td>0 Average</td></tr><tr><td>2</td><td>2584.00</td><td>104.50</td><td>-----</td><td>91.51</td><td>32.36</td><td>6.87</td><td>32.24</td><td>6.00</td><td>245</td><td>0 Average</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.80	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average	2	2584.00	104.50	-----	91.51	32.36	6.87	32.24	6.00	245	0 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2496.34	46.04	54.00	-7.96	32.85	32.68	6.75	32.24	6.00	245	0 AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2480.00	91.80	-----	78.72	32.58	6.73	32.23	6.00	245	0 Average																																																																																												
2	2584.00	104.50	-----	91.51	32.36	6.87	32.24	6.00	245	0 Average																																																																																												





Mode	1																																																																	
	Co-location Harmonic																																																																	
	Bluetooth-LE_GSKF_CH39_2480MHz_Full																																																																	
ANT	6																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.34</td><td>74.00</td><td>-32.66</td><td>58.89</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>5310.40</td><td>59.83</td><td>74.00</td><td>-14.17</td><td>76.23</td><td>34.52</td><td>9.89</td><td>60.81</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	--- PEAK	2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	4960.00	41.34	74.00	-32.66	58.89	34.00	9.61	61.16	0.00	--- PEAK																																																								
2	5310.40	59.83	74.00	-14.17	76.23	34.52	9.89	60.81	0.00	--- Peak																																																								
Vertical																																																																		
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>59.49</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>5313.20</td><td>60.97</td><td>74.00</td><td>-13.03</td><td>77.36</td><td>34.53</td><td>9.89</td><td>60.81</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	--- PEAK	2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	4960.00	41.94	74.00	-32.06	59.49	34.00	9.61	61.16	0.00	--- PEAK																																																								
2	5313.20	60.97	74.00	-13.03	77.36	34.53	9.89	60.81	0.00	--- Peak																																																								

Note: #2 is co-location of WLAN 5G_CH62 TX fundamental signal.

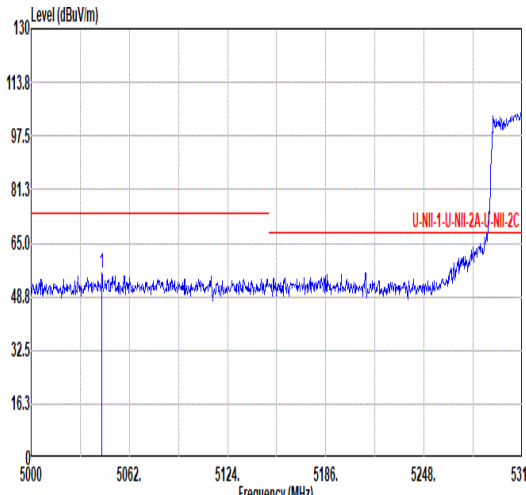
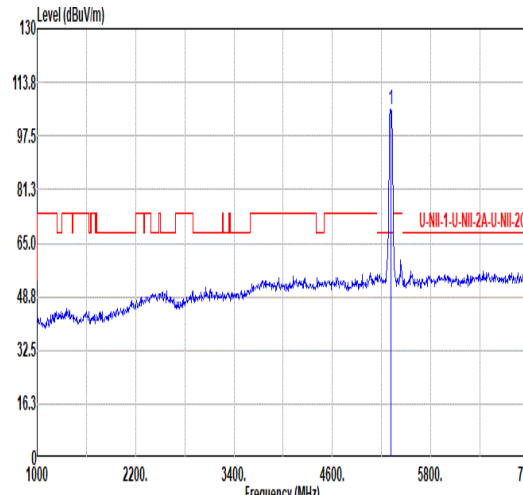
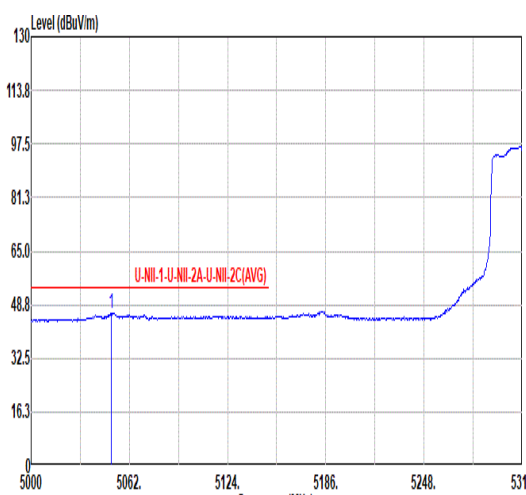
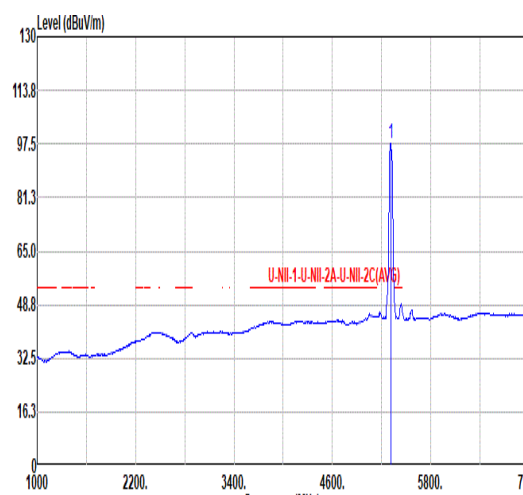


		1																																																						
Mode	Co-location Band Edge																																																							
	802.11ax HE40_CH62_5310MHz_Full																																																							
ANT	CDD 6+8																																																							
Pol.	Horizontal						Fundamental																																																	
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5044.64</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>44.14</td><td>34.00</td><td>9.69</td><td>31.95</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5044.64	55.88	74.00	-18.12	44.14	34.00	9.69	31.95	0.00	100	334 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>105.68</td><td>-----</td><td>-----</td><td>93.06</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	105.68	-----	-----	93.06	34.53	9.89	31.80	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5310.00	105.68	-----	-----	93.06	34.53	9.89	31.80	0.00	100	334 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5050.53</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>34.51</td><td>34.00</td><td>9.70</td><td>31.94</td><td>0.00</td><td>100</td><td>334 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334 AVERAGE					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5050.53	46.27	54.00	-7.73	34.51	34.00	9.70	31.94	0.00	100	334 AVERAGE																																													
																																																								
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>97.53</td><td>-----</td><td>-----</td><td>84.93</td><td>34.52</td><td>9.89</td><td>31.81</td><td>0.00</td><td>100</td><td>334 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	97.53	-----	-----	84.93	34.52	9.89	31.81	0.00	100	334 AVERAGE						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5310.00	97.53	-----	-----	84.93	34.52	9.89	31.81	0.00	100	334 AVERAGE																																													

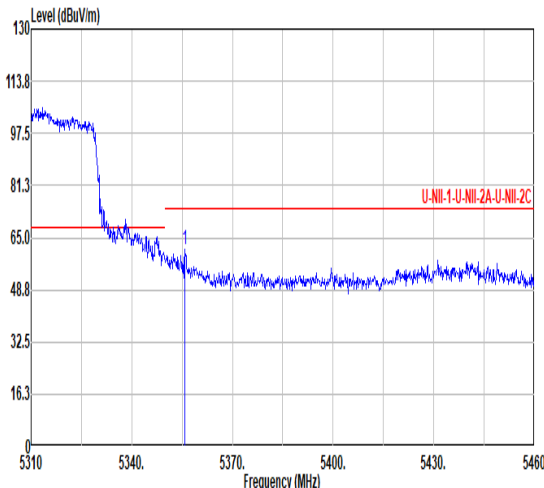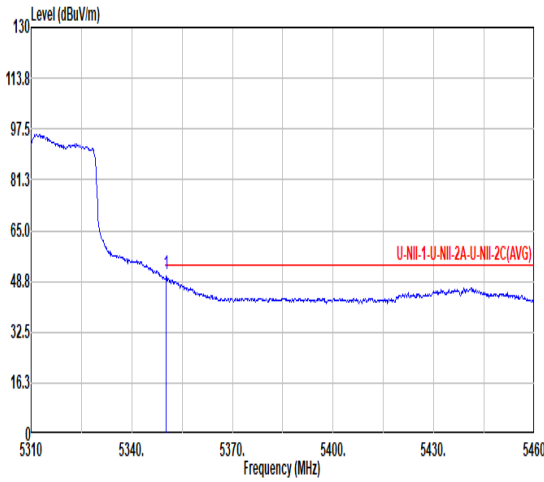


Mode	1																																																
	Co-location Band Edge																																																
	802.11ax HE40_CH62_5310MHz_Full																																																
ANT	CDD 6+8																																																
Pol.	Horizontal						Fundamental																																										
Peak							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5355.90</td><td>61.36</td><td>74.00</td><td>-12.64</td><td>48.62</td><td>34.61</td><td>9.91</td><td>31.78</td><td>0.00</td><td>100</td><td>334 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5355.90	61.36	74.00	-12.64	48.62
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 5355.90	61.36	74.00	-12.64	48.62	34.61	9.91	31.78	0.00	100	334 PEAK																																							
Avg							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.20</td><td>50.85</td><td>54.00</td><td>-3.15</td><td>38.12</td><td>34.60</td><td>9.91</td><td>31.78</td><td>0.00</td><td>100</td><td>334 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5350.20	50.85	54.00	-3.15	38.12
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 5350.20	50.85	54.00	-3.15	38.12	34.60	9.91	31.78	0.00	100	334 Average																																							

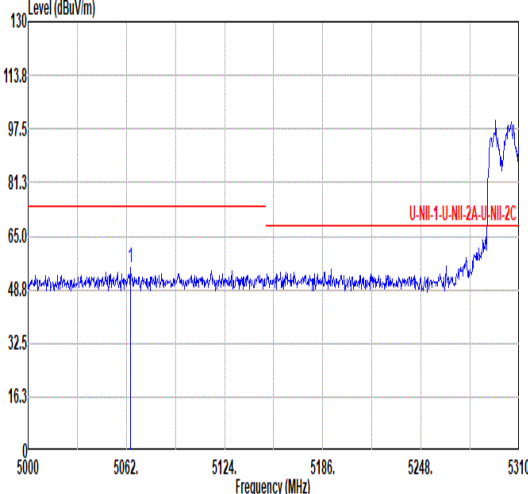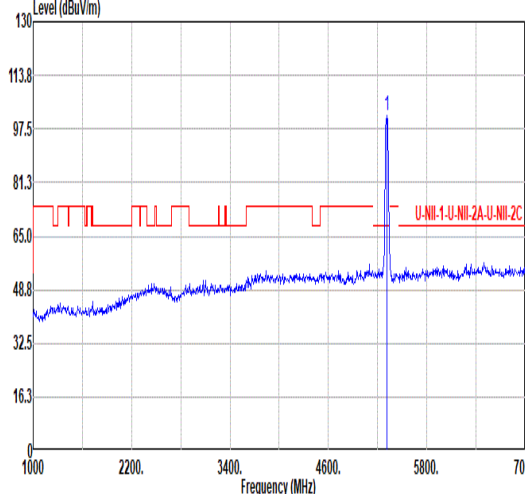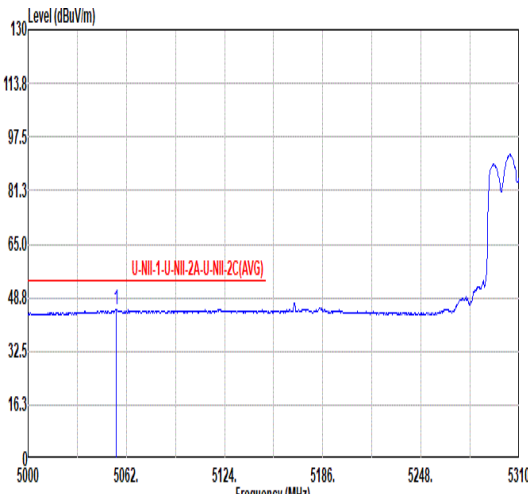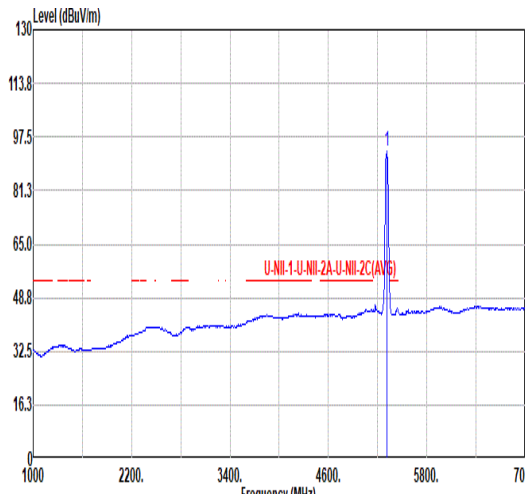

		1																																																																																																														
Mode		Co-location Band Edge																																																																																																														
		802.11ax HE40_CH62_5310MHz_Full																																																																																																														
ANT		CDD 6+8																																																																																																														
Pol.		Vertical					Fundamental																																																																																																									
Peak																																																																																																																
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5064.48</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>43.45</td><td>34.03</td><td>9.71</td><td>31.94</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>101.35</td><td>-----</td><td>-----</td><td>88.73</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>300</td><td>311 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	101.35	-----	-----	88.73	34.53	9.89	31.80	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	5064.48	55.25	74.00	-18.75	43.45	34.03	9.71	31.94	0.00	300	311 PEAK																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	5310.00	101.35	-----	-----	88.73	34.53	9.89	31.80	0.00	300	311 PEAK																																																																																																					
Avg																																																																																																																
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5055.49</td><td>45.23</td><td>54.00</td><td>-8.77</td><td>33.46</td><td>34.01</td><td>9.70</td><td>31.94</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>93.01</td><td>-----</td><td>-----</td><td>80.39</td><td>34.53</td><td>9.89</td><td>31.80</td><td>0.00</td><td>300</td><td>311 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	93.01	-----	-----	80.39	34.53	9.89	31.80	0.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	5055.49	45.23	54.00	-8.77	33.46	34.01	9.70	31.94	0.00	300	311 AVERAGE																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	5310.00	93.01	-----	-----	80.39	34.53	9.89	31.80	0.00	300	311 AVERAGE																																																																																																					





Mode	1										
	Co-location Band Edge										
	802.11ax HE40_CH62_5310MHz_Full										
ANT	CDD 6+8										
Pol.	Vertical										
Peak	Level (dBuV/m) </										

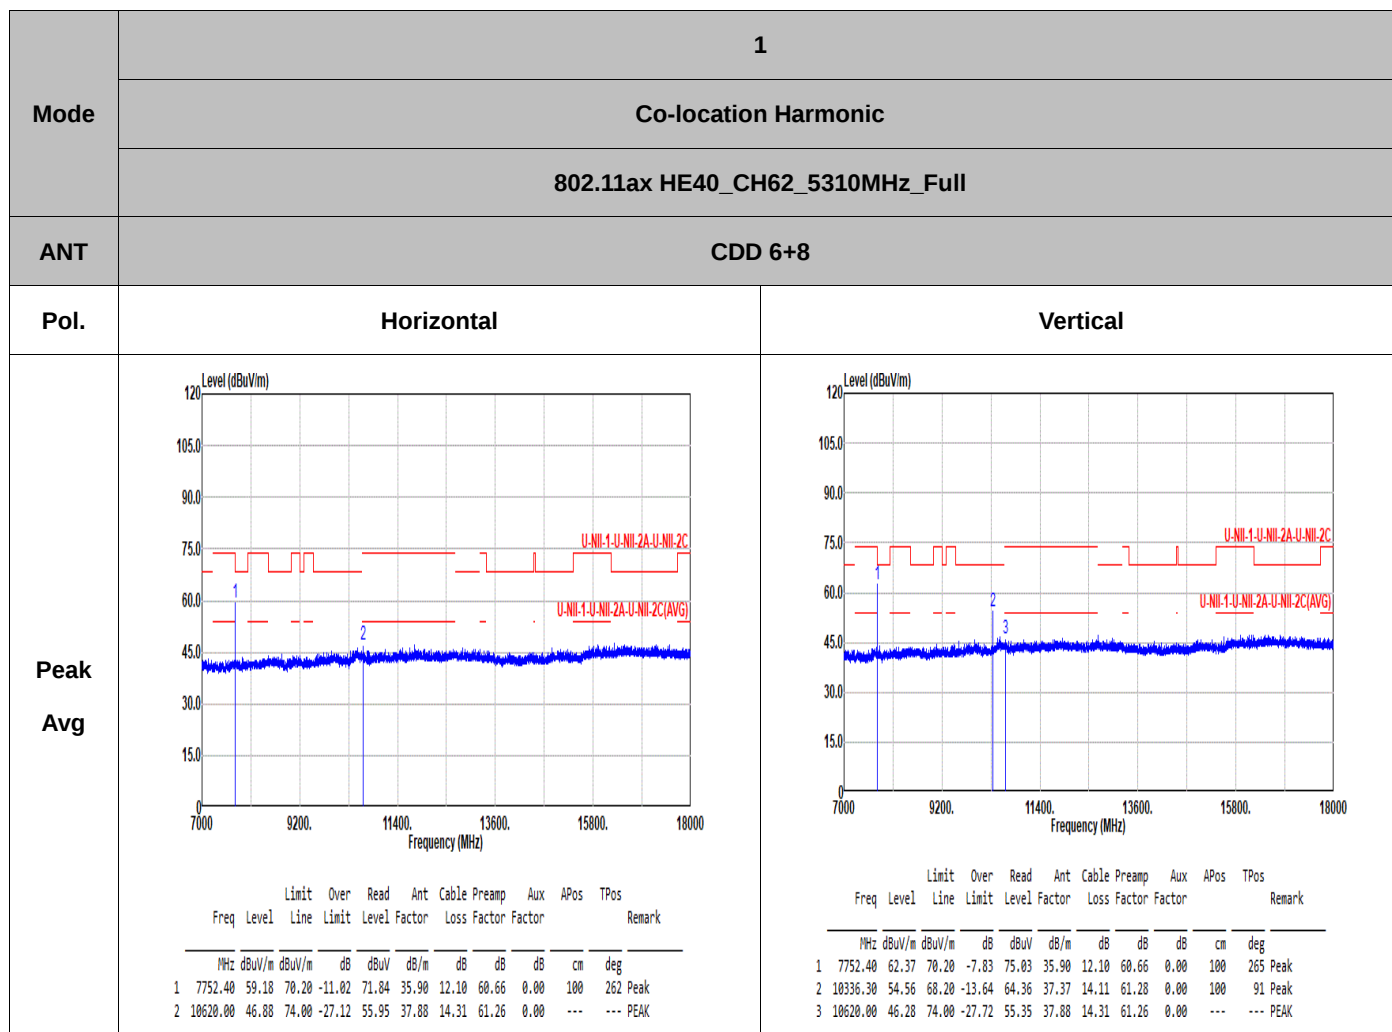

Note: #1 is the 3rd harmonic from LTE B41, the limit should be -25dBm and converted to field strength limit 70.2dBuV/m @3m distance, the test results is Pass.

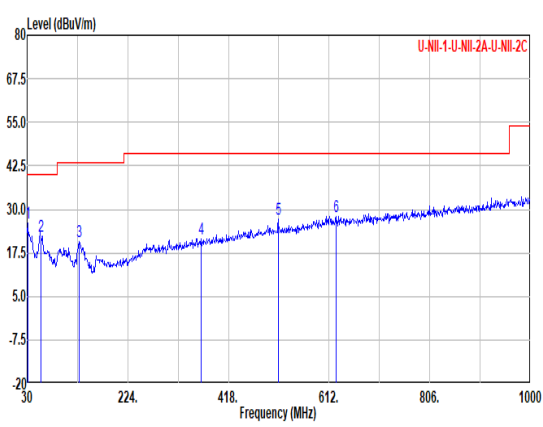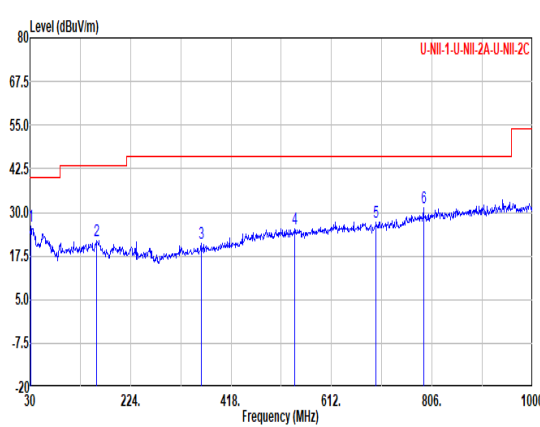

Mode	1																																																																																																													
	30-1G																																																																																																													
	802.11ax HE40_CH62_5310MHz_Full																																																																																																													
ANT	CDD 6+8																																																																																																													
Pol.	Horizontal																																																																																																													
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>25.90</td><td>40.00</td><td>-14.10</td><td>33.01</td><td>25.09</td><td>0.76</td><td>32.96</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>57.16</td><td>22.33</td><td>40.00</td><td>-17.67</td><td>41.19</td><td>12.85</td><td>1.04</td><td>32.75</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>130.88</td><td>20.91</td><td>43.50</td><td>-22.59</td><td>34.37</td><td>17.56</td><td>1.69</td><td>32.71</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>364.65</td><td>21.59</td><td>46.00</td><td>-24.41</td><td>30.88</td><td>20.98</td><td>2.83</td><td>33.10</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>514.03</td><td>27.10</td><td>46.00</td><td>-18.90</td><td>33.04</td><td>24.33</td><td>3.15</td><td>33.42</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>625.58</td><td>27.94</td><td>46.00</td><td>-18.06</td><td>31.46</td><td>26.32</td><td>3.69</td><td>33.53</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	--- Peak	2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	--- Peak	3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	--- Peak	4	364.65	21.59	46.00	-24.41	30.88	20.98	2.83	33.10	0.00	--- Peak	5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	--- Peak	6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	30.97	25.90	40.00	-14.10	33.01	25.09	0.76	32.96	0.00	--- Peak																																																																																																				
2	57.16	22.33	40.00	-17.67	41.19	12.85	1.04	32.75	0.00	--- Peak																																																																																																				
3	130.88	20.91	43.50	-22.59	34.37	17.56	1.69	32.71	0.00	--- Peak																																																																																																				
4	364.65	21.59	46.00	-24.41	30.88	20.98	2.83	33.10	0.00	--- Peak																																																																																																				
5	514.03	27.10	46.00	-18.90	33.04	24.33	3.15	33.42	0.00	--- Peak																																																																																																				
6	625.58	27.94	46.00	-18.06	31.46	26.32	3.69	33.53	0.00	--- Peak																																																																																																				
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>25.95</td><td>40.00</td><td>-14.05</td><td>33.76</td><td>24.39</td><td>0.76</td><td>32.96</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>159.01</td><td>21.96</td><td>43.50</td><td>-21.54</td><td>36.23</td><td>16.57</td><td>1.84</td><td>32.68</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>360.77</td><td>20.98</td><td>46.00</td><td>-25.02</td><td>30.36</td><td>20.88</td><td>2.81</td><td>33.07</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>540.22</td><td>25.32</td><td>46.00</td><td>-20.68</td><td>30.76</td><td>24.90</td><td>3.18</td><td>33.52</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>698.33</td><td>27.11</td><td>46.00</td><td>-18.89</td><td>30.02</td><td>26.71</td><td>3.95</td><td>33.57</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>789.51</td><td>31.24</td><td>46.00</td><td>-14.76</td><td>32.30</td><td>28.04</td><td>4.19</td><td>33.29</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	--- Peak	2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	--- Peak	3	360.77	20.98	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	--- Peak	4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	--- Peak	5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	--- Peak	6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	31.94	25.95	40.00	-14.05	33.76	24.39	0.76	32.96	0.00	--- Peak																																																																																																				
2	159.01	21.96	43.50	-21.54	36.23	16.57	1.84	32.68	0.00	--- Peak																																																																																																				
3	360.77	20.98	46.00	-25.02	30.36	20.88	2.81	33.07	0.00	--- Peak																																																																																																				
4	540.22	25.32	46.00	-20.68	30.76	24.90	3.18	33.52	0.00	--- Peak																																																																																																				
5	698.33	27.11	46.00	-18.89	30.02	26.71	3.95	33.57	0.00	--- Peak																																																																																																				
6	789.51	31.24	46.00	-14.76	32.30	28.04	4.19	33.29	0.00	--- Peak																																																																																																				



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2437-1, XT2437-2
FCC ID : IHDT56AS8
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Aug. 08, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software	6
1.8 Applicable Standards	6
1.9 Specification of Accessory	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration and system	9
2.4 Frequency List of Low/Middle/High Channels	9
3 RADIATED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Radiated Test	12
3.4 Radiated Spurious Emission	13
4 LIST OF MEASURING EQUIPMENT	14
5 MEASUREMENT UNCERTAINTY	15
APPENDIX A. TEST RESULTS OF RADIATED TEST	
APPENDIX B. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471919F	Rev. 01	Initial issue of report	Aug. 21, 2024
FG471919F	Rev. 02	Revise section Appendix A, about RSE test data of ULCA_2A-5A. This report is an update version, replacing the report issued on Aug. 21, 2024.	Aug. 23, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 66)	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 18.27 dB at 7575.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	$< 55 + 10\log_{10}(P[\text{Watts}])$		

Remark : The conducted test items of inter band CA were cover by LTE single carrier due to the CA power is reduced according to 3GPP MPR.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2437-1, XT2437-2
FCC ID	IHDT56AS8
IMEI Code	Radiation: 355709740016735
HW Version	DVT2
SW Version	U4UQ34.39
EUT Stage	Identical Prototype

Remark: the two model names are only for market segment, no other difference.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz			
	LTE Band 4 : 1710 MHz ~ 1755 MHz			
	LTE Band 5 : 824 MHz ~ 849 MHz			
	LTE Band 7 : 2500 MHz ~ 2570 MHz			
	LTE Band 66 : 1710 MHz ~ 1780 MHz			
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz			
	LTE Band 4 : 2110 MHz ~ 2155 MHz			
	LTE Band 5 : 869 MHz ~ 894 MHz			
	LTE Band 7 : 2620 MHz ~ 2690 MHz			
	LTE Band 66 : 2110 MHz~ 2200 MHz			
Uplink CA Bands	2A-4A	2A-7A	4A-5A	5A-7A
	2A-5A	2A-66A	4A-7A	5A-66A
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM			

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery	Brand Name	Motorola(ATL)	Model Name	RW50
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola(Saibao)	Model Name	S928D95755
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y-Plane)

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	2A-4A	Worst Case														v	
	2A-5A	Worst Case														v	
	2A-7A	Worst Case														v	
	2A-66A	Worst Case														v	
	4A-5A	Worst Case														v	
	4A-7A	Worst Case														v	
	5A-7A	Worst Case														v	
	5A-66A	Worst Case														v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

2.2 Connection Diagram of Test System

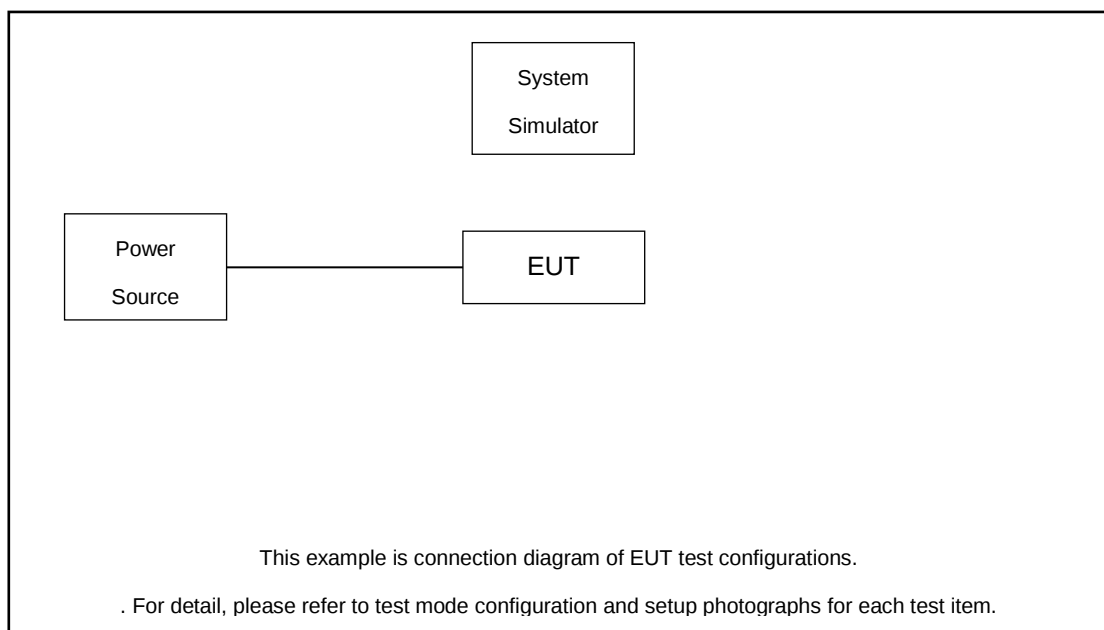



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

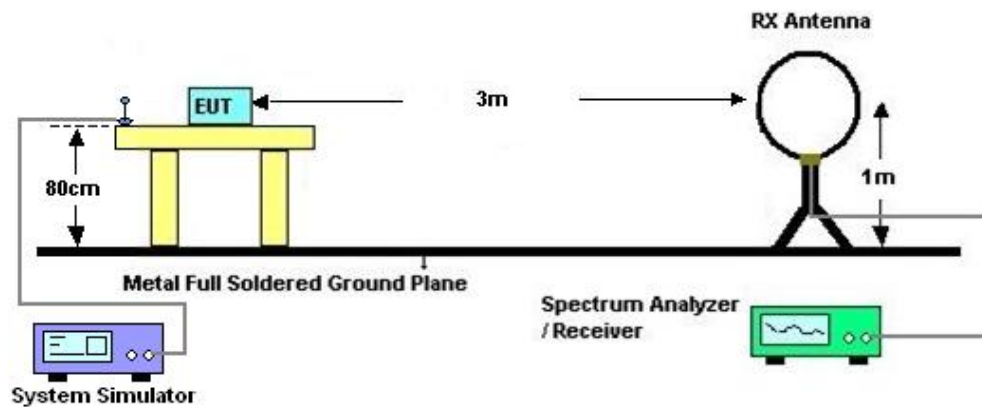

3.2.2 For radiated test from 30MHz to 1GHz

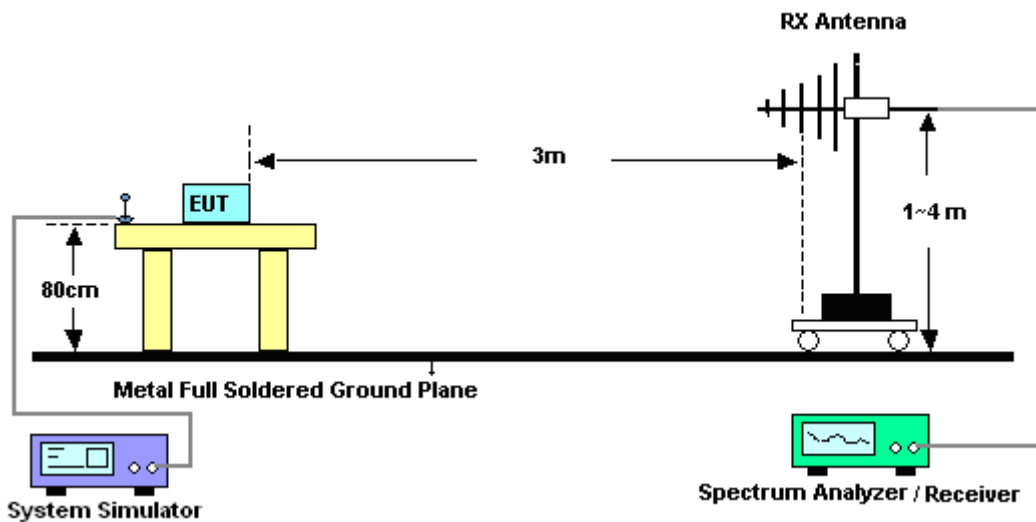

3.2.3 For radiated test above 1GHz

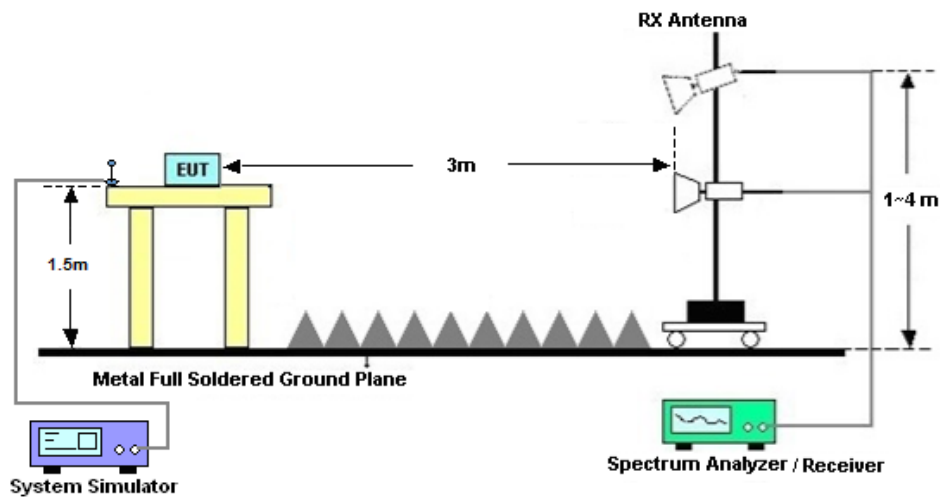

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.

3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For LTE Band 2, 4, 5, 66

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 08, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-1GHz	Dec. 06, 2023	Aug. 08, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 08, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 08, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 08, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 08, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 08, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Bruce	Temperature :	23~25°C
		Relative Humidity :	41~42%

Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test and record in the report.

ULCA_2A-4A (ANT1+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-59.59	-13	-46.59	-71.85	2.64	14.90	H
	5610	-37.46	-13	-24.46	-49.32	2.94	14.80	H
	7485	-52.99	-13	-39.99	-62.76	3.39	13.16	H
	3735	-55.59	-13	-42.59	-67.85	2.64	14.90	V
	5610	-40.19	-13	-27.19	-52.05	2.94	14.80	V
	7485	-55.40	-13	-42.40	-65.17	3.39	13.16	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-57.03	-13	-44.03	-67.77	2.604	13.34	H
	5175	-61.88	-13	-48.88	-72.39	3.011	13.52	H
	6900	-58.07	-13	-45.07	-68.27	3.271	13.47	H
	9360	-49.53	-13	-36.53	-56.50	5.527	12.5	H
	3450	-62.95	-13	-49.95	-73.69	2.604	13.34	V
	5175	-61.63	-13	-48.63	-72.14	3.011	13.52	V
	6900	-55.63	-13	-42.63	-65.83	3.271	13.47	V
	9360	-50.39	-13	-37.39	-58.33	5.527	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_2A-5A (ANT1+4)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-63.48	-13	-50.48	-75.74	2.64	14.90	H
	5610	-40.63	-13	-27.63	-52.49	2.94	14.80	H
	7485	-50.22	-13	-37.22	-59.99	3.39	13.16	H
	3735	-63.49	-13	-50.49	-75.75	2.64	14.90	V
	5610	-45.34	-13	-32.34	-57.20	2.94	14.80	V
	7485	-54.46	-13	-41.46	-64.23	3.39	13.16	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-75.42	-13	-62.42	-84.54	1.58	10.70	H
	2496	-70.35	-13	-57.35	-80.75	2.102	12.50	H
	3330	-67.88	-13	-54.88	-78.92	2.856	13.90	H
	1664	-72.61	-13	-59.61	-81.73	1.58	10.70	V
	2496	-67.44	-13	-54.44	-77.84	2.10	12.50	V
	3330	-67.38	-13	-54.38	-78.42	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA 2A-7A (ANT1+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-58.67	-13	-45.67	-70.93	2.64	14.90	H
	5610	-37.20	-13	-24.20	-49.06	2.94	14.80	H
	7575	-44.93	-13	-31.93	-54.70	3.39	13.16	H
	9360	-50.94	-13	-37.94	-61.42	4.00	14.48	H
	3735	-56.81	-13	-43.81	-69.07	2.64	14.90	V
	5610	-40.24	-13	-27.24	-52.10	2.94	14.80	V
	7575	-46.79	-13	-33.79	-56.56	3.39	13.16	V
	9360	-50.83	-13	-37.83	-61.31	4.00	14.48	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-62.23	-25	-37.23	-72.44	3.03	13.24	H
	7485	-53.42	-25	-28.42	-62.87	3.56	13.01	H
	10110	-50.61	-25	-25.61	-60.13	3.92	13.44	H
	5055	-61.77	-25	-36.77	-71.98	3.03	13.24	V
	7485	-55.57	-25	-30.57	-65.02	3.56	13.01	V
	10110	-52.46	-25	-27.46	-61.98	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA 2A-66A (ANT1+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-59.34	-13	-46.34	-71.60	2.64	14.90	H
	5610	-36.39	-13	-23.39	-48.25	2.94	14.80	H
	7485	-52.80	-13	-39.80	-62.57	3.39	13.16	H
	9360	-51.64	-13	-38.64	-62.12	4.00	14.48	H
	3735	-57.09	-13	-44.09	-69.35	2.64	14.90	V
	5610	-39.68	-13	-26.68	-51.54	2.94	14.80	V
	7485	-55.71	-13	-42.71	-65.48	3.39	13.16	V
	9360	-51.23	-13	-38.23	-61.71	4.00	14.48	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.85	-13	-44.85	-68.59	2.604	13.34	H
	5205	-61.92	-13	-48.92	-72.43	3.011	13.52	H
	6945	-55.52	-13	-42.52	-65.72	3.271	13.47	H
	3465	-65.70	-13	-52.70	-76.44	2.604	13.34	V
	5205	-61.96	-13	-48.96	-72.47	3.011	13.52	V
	6945	-57.61	-13	-44.61	-67.81	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_4A-5A (ANT1+4)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-59.49	-13	-46.49	-70.23	2.604	13.34	H
	5175	-40.06	-13	-27.06	-50.57	3.011	13.52	H
	6900	-57.29	-13	-44.29	-67.49	3.271	13.47	H
	3450	-59.32	-13	-46.32	-70.06	2.604	13.34	V
	5175	-42.71	-13	-29.71	-53.22	3.011	13.52	V
	6900	-56.47	-13	-43.47	-66.67	3.271	13.47	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-73.17	-13	-60.17	-80.14	1.58	10.70	H
	2496	-69.08	-13	-56.08	-77.33	2.102	12.50	H
	3330	-67.94	-13	-54.94	-76.83	2.856	13.90	H
	1664	-72.88	-13	-59.88	-79.85	1.58	10.70	V
	2496	-67.82	-13	-54.82	-76.07	2.10	12.50	V
	3330	-67.23	-13	-54.23	-76.12	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_4A-7A (ANT1+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-60.61	-13	-47.61	-67.58	1.58	10.70	H
	5175	-38.59	-13	-25.59	-46.84	2.102	12.50	H
	6900	-58.60	-13	-45.60	-67.49	2.856	13.90	H
	3450	-61.16	-13	-48.16	-68.13	1.58	10.70	V
	5175	-39.57	-13	-26.57	-47.82	2.10	12.50	V
	6900	-57.70	-13	-44.70	-66.59	2.86	13.90	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-61.91	-25	-36.91	-72.12	3.03	13.24	H
	7575	-48.16	-25	-23.16	-57.61	3.56	13.01	H
	10110	-48.17	-25	-23.17	-57.69	3.92	13.44	H
	5055	-62.34	-25	-37.34	-72.55	3.03	13.24	V
	7575	-52.26	-25	-27.26	-61.71	3.56	13.01	V
	10110	-52.98	-25	-27.98	-62.50	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_5A-7A (ANT4+1)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-74.50	-13	-61.50	-81.47	1.58	10.70	H
	2496	-69.33	-13	-56.33	-77.58	2.102	12.50	H
	3330	-67.31	-13	-54.31	-76.20	2.856	13.90	H
	1664	-72.67	-13	-59.67	-79.64	1.58	10.70	V
	2496	-67.96	-13	-54.96	-76.21	2.10	12.50	V
	3330	-67.30	-13	-54.30	-76.19	2.86	13.90	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-55.34	-25	-30.34	-65.55	3.03	13.24	H
	7575	-43.27	-25	-18.27	-52.72	3.56	13.01	H
	10110	-46.98	-25	-21.98	-56.50	3.92	13.44	H
	5055	-56.35	-25	-31.35	-66.56	3.03	13.24	V
	7575	-50.31	-25	-25.31	-59.76	3.56	13.01	V
	10110	-52.81	-25	-27.81	-62.33	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_5A-66A (ANT1+4)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-73.71	-13	-60.71	-80.68	1.58	10.70	H
	2496	-66.08	-13	-53.08	-74.33	2.102	12.50	H
	3330	-67.54	-13	-54.54	-76.43	2.856	13.90	H
	1664	-72.32	-13	-59.32	-79.29	1.58	10.70	V
	2496	-65.96	-13	-52.96	-74.21	2.10	12.50	V
	3330	-67.43	-13	-54.43	-76.32	2.86	13.90	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-62.36	-13	-49.36	-73.10	2.604	13.34	H
	5205	-48.32	-13	-35.32	-58.83	3.011	13.52	H
	6945	-58.15	-13	-45.15	-68.35	3.271	13.47	H
	3465	-66.78	-13	-53.78	-77.52	2.604	13.34	V
	5205	-47.29	-13	-34.29	-57.80	3.011	13.52	V
	6945	-58.38	-13	-45.38	-68.58	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.