



		64																																																																																						
Mode	Band Edge - L																																																																																							
	U-NII-1_5.15-5.25_802.11n HT40_CH46_Full_5230MHz																																																																																							
ANT	CDD 8+5																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5127.84</td> <td>56.55</td> <td>74.00</td> <td>-17.45</td> <td>44.52</td> <td>34.16</td> <td>9.77</td> <td>31.90</td> <td>0.00</td> <td>233</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5127.84	56.55	74.00	-17.45	44.52	34.16	9.77	31.90	0.00	233	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>107.09</td> <td>-----</td> <td>-----</td> <td>94.81</td> <td>34.27</td> <td>9.85</td> <td>31.84</td> <td>0.00</td> <td>233</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5230.00	107.09	-----	-----	94.81	34.27	9.85	31.84	0.00	233	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5127.84	56.55	74.00	-17.45	44.52	34.16	9.77	31.90	0.00	233	0 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5230.00	107.09	-----	-----	94.81	34.27	9.85	31.84	0.00	233	0 PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.20</td> <td>44.77</td> <td>54.00</td> <td>-9.23</td> <td>32.69</td> <td>34.19</td> <td>9.78</td> <td>31.89</td> <td>0.00</td> <td>233</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5143.20	44.77	54.00	-9.23	32.69	34.19	9.78	31.89	0.00	233	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>99.31</td> <td>-----</td> <td>-----</td> <td>87.03</td> <td>34.27</td> <td>9.85</td> <td>31.84</td> <td>0.00</td> <td>233</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5230.00	99.31	-----	-----	87.03	34.27	9.85	31.84	0.00	233	0 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5143.20	44.77	54.00	-9.23	32.69	34.19	9.78	31.89	0.00	233	0 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5230.00	99.31	-----	-----	87.03	34.27	9.85	31.84	0.00	233	0 AVERAGE																																																																													



Mode	64																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11n HT40_CH46_Full_5230MHz																																												
ANT	CDD 8+5																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5363.28</td> <td>55.74</td> <td>74.00</td> <td>-18.26</td> <td>42.97</td> <td>34.63</td> <td>9.92</td> <td>31.78</td> <td>0.00</td> <td>233</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5363.28	55.74	74.00	-18.26	42.97	34.63	9.92	31.78	0.00	233	0 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5363.28	55.74	74.00	-18.26	42.97	34.63	9.92	31.78	0.00	233	0 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.56</td> <td>44.24</td> <td>54.00</td> <td>-9.76</td> <td>31.50</td> <td>34.61</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>233</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5353.56	44.24	54.00	-9.76	31.50	34.61	9.91	31.78	0.00	233	0 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5353.56	44.24	54.00	-9.76	31.50	34.61	9.91	31.78	0.00	233	0 AVERAGE																																		



Mode	64																																																																																																																																																														
	Harmonic																																																																																																																																																														
	U-NII-1_5.15-5.25_802.11n_HT40_CH46_Full_5230MHz																																																																																																																																																														
ANT	CDD 8+5																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																													
Peak Avg																																																																																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7845.00</td> <td>60.39</td> <td>68.20</td> <td>-7.81</td> <td>72.75</td> <td>35.90</td> <td>12.21</td> <td>60.47</td> <td>0.00</td> <td>100</td> <td>72 PEAK</td> </tr> <tr> <td>2</td> <td>10460.00</td> <td>56.93</td> <td>68.20</td> <td>-11.27</td> <td>66.38</td> <td>37.62</td> <td>14.20</td> <td>61.27</td> <td>0.00</td> <td>100</td> <td>93 PEAK</td> </tr> <tr> <td>3</td> <td>15690.00</td> <td>59.00</td> <td>74.00</td> <td>-15.00</td> <td>60.80</td> <td>40.38</td> <td>17.59</td> <td>59.77</td> <td>0.00</td> <td>100</td> <td>25 PEAK</td> </tr> <tr> <td>4</td> <td>15690.00</td> <td>47.77</td> <td>54.00</td> <td>-6.23</td> <td>49.58</td> <td>40.37</td> <td>17.59</td> <td>59.77</td> <td>0.00</td> <td>100</td> <td>25 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7845.00	60.39	68.20	-7.81	72.75	35.90	12.21	60.47	0.00	100	72 PEAK	2	10460.00	56.93	68.20	-11.27	66.38	37.62	14.20	61.27	0.00	100	93 PEAK	3	15690.00	59.00	74.00	-15.00	60.80	40.38	17.59	59.77	0.00	100	25 PEAK	4	15690.00	47.77	54.00	-6.23	49.58	40.37	17.59	59.77	0.00	100	25 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7845.00</td> <td>62.94</td> <td>68.20</td> <td>-5.26</td> <td>75.30</td> <td>35.90</td> <td>12.21</td> <td>60.47</td> <td>0.00</td> <td>100</td> <td>92 PEAK</td> </tr> <tr> <td>2</td> <td>10460.00</td> <td>57.03</td> <td>68.20</td> <td>-11.17</td> <td>66.48</td> <td>37.62</td> <td>14.20</td> <td>61.27</td> <td>0.00</td> <td>100</td> <td>30 PEAK</td> </tr> <tr> <td>3</td> <td>15690.00</td> <td>58.74</td> <td>74.00</td> <td>-15.26</td> <td>60.54</td> <td>40.38</td> <td>17.59</td> <td>59.77</td> <td>0.00</td> <td>100</td> <td>7 PEAK</td> </tr> <tr> <td>4</td> <td>15690.00</td> <td>48.14</td> <td>54.00</td> <td>-5.86</td> <td>49.96</td> <td>40.37</td> <td>17.59</td> <td>59.78</td> <td>0.00</td> <td>100</td> <td>7 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7845.00	62.94	68.20	-5.26	75.30	35.90	12.21	60.47	0.00	100	92 PEAK	2	10460.00	57.03	68.20	-11.17	66.48	37.62	14.20	61.27	0.00	100	30 PEAK	3	15690.00	58.74	74.00	-15.26	60.54	40.38	17.59	59.77	0.00	100	7 PEAK	4	15690.00	48.14	54.00	-5.86	49.96	40.37	17.59	59.78	0.00	100
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																					
1	7845.00	60.39	68.20	-7.81	72.75	35.90	12.21	60.47	0.00	100	72 PEAK																																																																																																																																																				
2	10460.00	56.93	68.20	-11.27	66.38	37.62	14.20	61.27	0.00	100	93 PEAK																																																																																																																																																				
3	15690.00	59.00	74.00	-15.00	60.80	40.38	17.59	59.77	0.00	100	25 PEAK																																																																																																																																																				
4	15690.00	47.77	54.00	-6.23	49.58	40.37	17.59	59.77	0.00	100	25 AVERAGE																																																																																																																																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																					
1	7845.00	62.94	68.20	-5.26	75.30	35.90	12.21	60.47	0.00	100	92 PEAK																																																																																																																																																				
2	10460.00	57.03	68.20	-11.17	66.48	37.62	14.20	61.27	0.00	100	30 PEAK																																																																																																																																																				
3	15690.00	58.74	74.00	-15.26	60.54	40.38	17.59	59.77	0.00	100	7 PEAK																																																																																																																																																				
4	15690.00	48.14	54.00	-5.86	49.96	40.37	17.59	59.78	0.00	100	7 AVERAGE																																																																																																																																																				



Mode	65																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n_HT40_CH54_Full_5270MHz																																																																																									
ANT	CDD 8+5																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.13</td> <td>57.16</td> <td>74.00</td> <td>-16.84</td> <td>45.10</td> <td>34.18</td> <td>9.78</td> <td>31.90</td> <td>0.00</td> <td>198</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5140.13	57.16	74.00	-16.84	45.10	34.18	9.78	31.90	0.00	198	319	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>110.06</td> <td>-----</td> <td>-----</td> <td>97.69</td> <td>34.34</td> <td>9.86</td> <td>31.83</td> <td>0.00</td> <td>198</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5270.00	110.06	-----	-----	97.69	34.34	9.86	31.83	0.00	198	319	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5140.13	57.16	74.00	-16.84	45.10	34.18	9.78	31.90	0.00	198	319	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5270.00	110.06	-----	-----	97.69	34.34	9.86	31.83	0.00	198	319	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5138.51</td> <td>45.84</td> <td>54.00</td> <td>-8.16</td> <td>33.78</td> <td>34.18</td> <td>9.78</td> <td>31.90</td> <td>0.00</td> <td>198</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5138.51	45.84	54.00	-8.16	33.78	34.18	9.78	31.90	0.00	198	319	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>101.09</td> <td>-----</td> <td>-----</td> <td>88.72</td> <td>34.34</td> <td>9.86</td> <td>31.83</td> <td>0.00</td> <td>198</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5270.00	101.09	-----	-----	88.72	34.34	9.86	31.83	0.00	198	319	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5138.51	45.84	54.00	-8.16	33.78	34.18	9.78	31.90	0.00	198	319	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5270.00	101.09	-----	-----	88.72	34.34	9.86	31.83	0.00	198	319	AVERAGE																																																																														



Mode	65																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11n_HT40_CH54_Full_5270MHz																																													
ANT	CDD 8+5																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.69</td> <td>55.93</td> <td>74.00</td> <td>-18.07</td> <td>43.19</td> <td>34.61</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>198</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5355.69	55.93	74.00	-18.07	43.19	34.61	9.91	31.78	0.00	198	319	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5355.69	55.93	74.00	-18.07	43.19	34.61	9.91	31.78	0.00	198	319	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.18</td> <td>44.03</td> <td>54.00</td> <td>-9.97</td> <td>31.30</td> <td>34.60</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>198</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.18	44.03	54.00	-9.97	31.30	34.60	9.91	31.78	0.00	198	319	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5350.18	44.03	54.00	-9.97	31.30	34.60	9.91	31.78	0.00	198	319	AVERAGE																																		



Mode	65																																																																																							
	Band Edge - L																																																																																							
	U-NII-2A_5.25-5.35_802.11n_HT40_CH54_Full_5270MHz																																																																																							
ANT	CDD 8+5																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.73</td> <td>55.25</td> <td>74.00</td> <td>-18.75</td> <td>43.21</td> <td>34.17</td> <td>9.77</td> <td>31.90</td> <td>0.00</td> <td>231</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5132.73	55.25	74.00	-18.75	43.21	34.17	9.77	31.90	0.00	231	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>108.51</td> <td>-----</td> <td>-----</td> <td>96.11</td> <td>34.36</td> <td>9.87</td> <td>31.83</td> <td>0.00</td> <td>231</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5270.00	108.51	-----	-----	96.11	34.36	9.87	31.83	0.00	231	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5132.73	55.25	74.00	-18.75	43.21	34.17	9.77	31.90	0.00	231	0 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5270.00	108.51	-----	-----	96.11	34.36	9.87	31.83	0.00	231	0 PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.84</td> <td>44.56</td> <td>54.00</td> <td>-9.44</td> <td>32.52</td> <td>34.17</td> <td>9.77</td> <td>31.90</td> <td>0.00</td> <td>231</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5132.84	44.56	54.00	-9.44	32.52	34.17	9.77	31.90	0.00	231	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>100.14</td> <td>-----</td> <td>-----</td> <td>87.74</td> <td>34.36</td> <td>9.87</td> <td>31.83</td> <td>0.00</td> <td>231</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5270.00	100.14	-----	-----	87.74	34.36	9.87	31.83	0.00	231	0 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5132.84	44.56	54.00	-9.44	32.52	34.17	9.77	31.90	0.00	231	0 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5270.00	100.14	-----	-----	87.74	34.36	9.87	31.83	0.00	231	0 AVERAGE																																																																													



Mode	65																																												
	Band Edge - R																																												
	U-NII-2A_5.25-5.35_802.11n_HT40_CH54_Full_5270MHz																																												
ANT	CDD 8+5																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5364.43</td> <td>55.19</td> <td>74.00</td> <td>-18.81</td> <td>42.42</td> <td>34.63</td> <td>9.92</td> <td>31.78</td> <td>0.00</td> <td>231</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5364.43	55.19	74.00	-18.81	42.42	34.63	9.92	31.78	0.00	231	0 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5364.43	55.19	74.00	-18.81	42.42	34.63	9.92	31.78	0.00	231	0 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5394.45</td> <td>44.50</td> <td>54.00</td> <td>-9.50</td> <td>31.63</td> <td>34.69</td> <td>9.94</td> <td>31.76</td> <td>0.00</td> <td>231</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5394.45	44.50	54.00	-9.50	31.63	34.69	9.94	31.76	0.00	231	0 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5394.45	44.50	54.00	-9.50	31.63	34.69	9.94	31.76	0.00	231	0 AVERAGE																																		



Mode	65																																																																																																																																																																																																																										
	Harmonic																																																																																																																																																																																																																										
	U-NII-2A_5.25-5.35_802.11n_HT40_CH54_Full_5270MHz																																																																																																																																																																																																																										
ANT	CDD 8+5																																																																																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																																																																																									
Peak Avg																																																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7378.00</td> <td>48.40</td> <td>74.00</td> <td>-25.60</td> <td>61.87</td> <td>35.70</td> <td>11.71</td> <td>60.88</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7378.00</td> <td>38.20</td> <td>54.00</td> <td>-15.80</td> <td>51.67</td> <td>35.70</td> <td>11.71</td> <td>60.88</td> <td>0.00</td> <td>300</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>8432.00</td> <td>44.20</td> <td>74.00</td> <td>-29.80</td> <td>56.42</td> <td>35.90</td> <td>12.72</td> <td>60.84</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>10540.00</td> <td>54.39</td> <td>68.20</td> <td>-13.81</td> <td>63.62</td> <td>37.78</td> <td>14.25</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>15810.00</td> <td>58.95</td> <td>74.00</td> <td>-15.05</td> <td>60.27</td> <td>40.63</td> <td>17.65</td> <td>59.60</td> <td>0.00</td> <td>100</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>15810.00</td> <td>48.72</td> <td>54.00</td> <td>-5.28</td> <td>50.07</td> <td>40.61</td> <td>17.65</td> <td>59.61</td> <td>0.00</td> <td>100</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7378.00	48.40	74.00	-25.60	61.87	35.70	11.71	60.88	0.00	300	0	PEAK	2	7378.00	38.20	54.00	-15.80	51.67	35.70	11.71	60.88	0.00	300	0	AVERAGE	3	8432.00	44.20	74.00	-29.80	56.42	35.90	12.72	60.84	0.00	---	---	PEAK	4	10540.00	54.39	68.20	-13.81	63.62	37.78	14.25	61.26	0.00	100	301	PEAK	5	15810.00	58.95	74.00	-15.05	60.27	40.63	17.65	59.60	0.00	100	133	PEAK	6	15810.00	48.72	54.00	-5.28	50.07	40.61	17.65	59.61	0.00	100	133	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7378.00</td> <td>53.17</td> <td>74.00</td> <td>-20.83</td> <td>66.64</td> <td>35.70</td> <td>11.71</td> <td>60.88</td> <td>0.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7378.00</td> <td>43.51</td> <td>54.00</td> <td>-10.49</td> <td>56.98</td> <td>35.70</td> <td>11.71</td> <td>60.88</td> <td>0.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>8432.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>59.18</td> <td>35.90</td> <td>12.72</td> <td>60.84</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>10540.00</td> <td>55.60</td> <td>68.20</td> <td>-12.60</td> <td>64.83</td> <td>37.78</td> <td>14.25</td> <td>61.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>5</td> <td>15810.00</td> <td>60.75</td> <td>74.00</td> <td>-13.25</td> <td>62.07</td> <td>40.63</td> <td>17.65</td> <td>59.60</td> <td>0.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>15810.00</td> <td>50.83</td> <td>54.00</td> <td>-3.17</td> <td>52.16</td> <td>40.62</td> <td>17.65</td> <td>59.60</td> <td>0.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7378.00	53.17	74.00	-20.83	66.64	35.70	11.71	60.88	0.00	100	100	PEAK	2	7378.00	43.51	54.00	-10.49	56.98	35.70	11.71	60.88	0.00	100	100	AVERAGE	3	8432.00	46.96	74.00	-27.04	59.18	35.90	12.72	60.84	0.00	---	---	PEAK	4	10540.00	55.60	68.20	-12.60	64.83	37.78	14.25	61.26	0.00	---	---	PEAK	5	15810.00	60.75	74.00	-13.25	62.07	40.63	17.65	59.60	0.00	100	100	PEAK	6	15810.00	50.83	54.00	-3.17	52.16	40.62	17.65	59.60	0.00	100	100
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	7378.00	48.40	74.00	-25.60	61.87	35.70	11.71	60.88	0.00	300	0	PEAK																																																																																																																																																																																																															
2	7378.00	38.20	54.00	-15.80	51.67	35.70	11.71	60.88	0.00	300	0	AVERAGE																																																																																																																																																																																																															
3	8432.00	44.20	74.00	-29.80	56.42	35.90	12.72	60.84	0.00	---	---	PEAK																																																																																																																																																																																																															
4	10540.00	54.39	68.20	-13.81	63.62	37.78	14.25	61.26	0.00	100	301	PEAK																																																																																																																																																																																																															
5	15810.00	58.95	74.00	-15.05	60.27	40.63	17.65	59.60	0.00	100	133	PEAK																																																																																																																																																																																																															
6	15810.00	48.72	54.00	-5.28	50.07	40.61	17.65	59.61	0.00	100	133	AVERAGE																																																																																																																																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	7378.00	53.17	74.00	-20.83	66.64	35.70	11.71	60.88	0.00	100	100	PEAK																																																																																																																																																																																																															
2	7378.00	43.51	54.00	-10.49	56.98	35.70	11.71	60.88	0.00	100	100	AVERAGE																																																																																																																																																																																																															
3	8432.00	46.96	74.00	-27.04	59.18	35.90	12.72	60.84	0.00	---	---	PEAK																																																																																																																																																																																																															
4	10540.00	55.60	68.20	-12.60	64.83	37.78	14.25	61.26	0.00	---	---	PEAK																																																																																																																																																																																																															
5	15810.00	60.75	74.00	-13.25	62.07	40.63	17.65	59.60	0.00	100	100	PEAK																																																																																																																																																																																																															
6	15810.00	50.83	54.00	-3.17	52.16	40.62	17.65	59.60	0.00	100	100	AVERAGE																																																																																																																																																																																																															



Mode	66																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n_HT40_CH62_Full_5310MHz																																																																																									
ANT	CDD 8+5																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5131.52</td> <td>55.07</td> <td>74.00</td> <td>-18.93</td> <td>43.04</td> <td>34.16</td> <td>9.77</td> <td>31.90</td> <td>0.00</td> <td>221</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5131.52	55.07	74.00	-18.93	43.04	34.16	9.77	31.90	0.00	221	333	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>108.29</td> <td>-----</td> <td>-----</td> <td>95.69</td> <td>34.52</td> <td>9.89</td> <td>31.81</td> <td>0.00</td> <td>221</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	108.29	-----	-----	95.69	34.52	9.89	31.81	0.00	221	333	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5131.52	55.07	74.00	-18.93	43.04	34.16	9.77	31.90	0.00	221	333	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5310.00	108.29	-----	-----	95.69	34.52	9.89	31.81	0.00	221	333	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.68</td> <td>44.58</td> <td>54.00</td> <td>-9.42</td> <td>32.49</td> <td>34.20</td> <td>9.78</td> <td>31.89</td> <td>0.00</td> <td>221</td> <td>333</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5147.68	44.58	54.00	-9.42	32.49	34.20	9.78	31.89	0.00	221	333	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>100.56</td> <td>-----</td> <td>-----</td> <td>87.96</td> <td>34.52</td> <td>9.89</td> <td>31.81</td> <td>0.00</td> <td>221</td> <td>333</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	100.56	-----	-----	87.96	34.52	9.89	31.81	0.00	221	333	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5147.68	44.58	54.00	-9.42	32.49	34.20	9.78	31.89	0.00	221	333	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5310.00	100.56	-----	-----	87.96	34.52	9.89	31.81	0.00	221	333	AVERAGE																																																																														



Mode	66																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full_5310MHz																																													
ANT	CDD 8+5																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.40</td> <td>57.85</td> <td>74.00</td> <td>-16.15</td> <td>45.12</td> <td>34.60</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>221</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5352.40	57.85	74.00	-16.15	45.12	34.60	9.91	31.78	0.00	221	333	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5352.40	57.85	74.00	-16.15	45.12	34.60	9.91	31.78	0.00	221	333	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>46.91</td> <td>54.00</td> <td>-7.09</td> <td>34.18</td> <td>34.60</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>221</td> <td>333</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.00	46.91	54.00	-7.09	34.18	34.60	9.91	31.78	0.00	221	333	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5350.00	46.91	54.00	-7.09	34.18	34.60	9.91	31.78	0.00	221	333	AVERAGE																																		



Mode	66																																																																																							
	Band Edge - L																																																																																							
	U-NII-2A_5.25-5.35_802.11n_HT40_CH62_Full_5310MHz																																																																																							
ANT	CDD 8+5																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.00</td> <td>54.10</td> <td>74.00</td> <td>-19.90</td> <td>42.01</td> <td>34.20</td> <td>9.78</td> <td>31.89</td> <td>0.00</td> <td>224</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.00	54.10	74.00	-19.90	42.01	34.20	9.78	31.89	0.00	224	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>109.33</td> <td>-----</td> <td>-----</td> <td>96.73</td> <td>34.52</td> <td>9.89</td> <td>31.81</td> <td>0.00</td> <td>224</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	109.33	-----	-----	96.73	34.52	9.89	31.81	0.00	224	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5148.00	54.10	74.00	-19.90	42.01	34.20	9.78	31.89	0.00	224	0 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5310.00	109.33	-----	-----	96.73	34.52	9.89	31.81	0.00	224	0 PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.48</td> <td>43.64</td> <td>54.00</td> <td>-10.36</td> <td>31.56</td> <td>34.19</td> <td>9.78</td> <td>31.89</td> <td>0.00</td> <td>224</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5144.48	43.64	54.00	-10.36	31.56	34.19	9.78	31.89	0.00	224	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>100.77</td> <td>-----</td> <td>-----</td> <td>88.15</td> <td>34.53</td> <td>9.89</td> <td>31.80</td> <td>0.00</td> <td>224</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	100.77	-----	-----	88.15	34.53	9.89	31.80	0.00	224	0 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5144.48	43.64	54.00	-10.36	31.56	34.19	9.78	31.89	0.00	224	0 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5310.00	100.77	-----	-----	88.15	34.53	9.89	31.80	0.00	224	0 AVERAGE																																																																													



Mode	66																																												
	Band Edge - R																																												
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full_5310MHz																																												
ANT	CDD 8+5																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.40</td> <td>60.02</td> <td>74.00</td> <td>-13.98</td> <td>47.28</td> <td>34.61</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>224</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5356.40	60.02	74.00	-13.98	47.28	34.61	9.91	31.78	0.00	224	0 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5356.40	60.02	74.00	-13.98	47.28	34.61	9.91	31.78	0.00	224	0 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.80</td> <td>48.48</td> <td>54.00</td> <td>-5.52</td> <td>35.74</td> <td>34.61</td> <td>9.91</td> <td>31.78</td> <td>0.00</td> <td>224</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5353.80	48.48	54.00	-5.52	35.74	34.61	9.91	31.78	0.00	224	0 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5353.80	48.48	54.00	-5.52	35.74	34.61	9.91	31.78	0.00	224	0 AVERAGE																																		



Mode	66																																																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																																																									
	U-NII-2A_5.25-5.35_802.11n_HT40_CH62_Full_5310MHz																																																																																																																																																																																																																									
ANT	CDD 8+5																																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																																								
Peak Avg																																																																																																																																																																																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7434.00</td> <td>46.80</td> <td>74.00</td> <td>-27.20</td> <td>60.33</td> <td>35.70</td> <td>11.77</td> <td>61.00</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.94</td> <td>54.00</td> <td>-11.06</td> <td>56.47</td> <td>35.70</td> <td>11.77</td> <td>61.00</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>10620.00</td> <td>60.07</td> <td>74.00</td> <td>-13.93</td> <td>69.14</td> <td>37.88</td> <td>14.31</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>10620.00</td> <td>37.94</td> <td>54.00</td> <td>-16.06</td> <td>47.01</td> <td>37.88</td> <td>14.31</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>87</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>15930.00</td> <td>52.18</td> <td>74.00</td> <td>-21.82</td> <td>52.93</td> <td>40.96</td> <td>17.72</td> <td>59.43</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>15930.00</td> <td>41.90</td> <td>54.00</td> <td>-12.10</td> <td>42.71</td> <td>40.93</td> <td>17.71</td> <td>59.45</td> <td>0.00</td> <td>100</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	7434.00	46.80	74.00	-27.20	60.33	35.70	11.77	61.00	0.00	---	---	PEAK	2	7434.00	42.94	54.00	-11.06	56.47	35.70	11.77	61.00	0.00	100	87	PEAK	3	10620.00	60.07	74.00	-13.93	69.14	37.88	14.31	61.26	0.00	100	87	PEAK	4	10620.00	37.94	54.00	-16.06	47.01	37.88	14.31	61.26	0.00	100	87	AVERAGE	5	15930.00	52.18	74.00	-21.82	52.93	40.96	17.72	59.43	0.00	100	87	PEAK	6	15930.00	41.90	54.00	-12.10	42.71	40.93	17.71	59.45	0.00	100	87	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7434.00</td> <td>51.77</td> <td>74.00</td> <td>-22.23</td> <td>65.30</td> <td>35.70</td> <td>11.77</td> <td>61.00</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.94</td> <td>54.00</td> <td>-11.06</td> <td>56.47</td> <td>35.70</td> <td>11.77</td> <td>61.00</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>10620.00</td> <td>60.07</td> <td>74.00</td> <td>-13.93</td> <td>69.14</td> <td>37.88</td> <td>14.31</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>10620.00</td> <td>49.72</td> <td>54.00</td> <td>-4.28</td> <td>58.79</td> <td>37.88</td> <td>14.31</td> <td>61.26</td> <td>0.00</td> <td>100</td> <td>87</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>15930.00</td> <td>53.59</td> <td>74.00</td> <td>-20.41</td> <td>54.34</td> <td>40.96</td> <td>17.72</td> <td>59.43</td> <td>0.00</td> <td>100</td> <td>87</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>15930.00</td> <td>43.38</td> <td>54.00</td> <td>-10.62</td> <td>44.14</td> <td>40.95</td> <td>17.72</td> <td>59.43</td> <td>0.00</td> <td>100</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	7434.00	51.77	74.00	-22.23	65.30	35.70	11.77	61.00	0.00	100	87	PEAK	2	7434.00	42.94	54.00	-11.06	56.47	35.70	11.77	61.00	0.00	100	87	PEAK	3	10620.00	60.07	74.00	-13.93	69.14	37.88	14.31	61.26	0.00	100	87	PEAK	4	10620.00	49.72	54.00	-4.28	58.79	37.88	14.31	61.26	0.00	100	87	AVERAGE	5	15930.00	53.59	74.00	-20.41	54.34	40.96	17.72	59.43	0.00	100	87	PEAK	6	15930.00	43.38	54.00	-10.62	44.14	40.95	17.72	59.43	0.00	100	87	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																																																																																	
1	7434.00	46.80	74.00	-27.20	60.33	35.70	11.77	61.00	0.00	---	---	PEAK																																																																																																																																																																																																														
2	7434.00	42.94	54.00	-11.06	56.47	35.70	11.77	61.00	0.00	100	87	PEAK																																																																																																																																																																																																														
3	10620.00	60.07	74.00	-13.93	69.14	37.88	14.31	61.26	0.00	100	87	PEAK																																																																																																																																																																																																														
4	10620.00	37.94	54.00	-16.06	47.01	37.88	14.31	61.26	0.00	100	87	AVERAGE																																																																																																																																																																																																														
5	15930.00	52.18	74.00	-21.82	52.93	40.96	17.72	59.43	0.00	100	87	PEAK																																																																																																																																																																																																														
6	15930.00	41.90	54.00	-12.10	42.71	40.93	17.71	59.45	0.00	100	87	AVERAGE																																																																																																																																																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																																																																																	
1	7434.00	51.77	74.00	-22.23	65.30	35.70	11.77	61.00	0.00	100	87	PEAK																																																																																																																																																																																																														
2	7434.00	42.94	54.00	-11.06	56.47	35.70	11.77	61.00	0.00	100	87	PEAK																																																																																																																																																																																																														
3	10620.00	60.07	74.00	-13.93	69.14	37.88	14.31	61.26	0.00	100	87	PEAK																																																																																																																																																																																																														
4	10620.00	49.72	54.00	-4.28	58.79	37.88	14.31	61.26	0.00	100	87	AVERAGE																																																																																																																																																																																																														
5	15930.00	53.59	74.00	-20.41	54.34	40.96	17.72	59.43	0.00	100	87	PEAK																																																																																																																																																																																																														
6	15930.00	43.38	54.00	-10.62	44.14	40.95	17.72	59.43	0.00	100	87	AVERAGE																																																																																																																																																																																																														



	67																																																																																														
Mode	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full_5510MHz																																																																																														
ANT	CDD 8+5																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.64</td> <td>58.74</td> <td>74.00</td> <td>-15.26</td> <td>45.66</td> <td>34.79</td> <td>10.02</td> <td>31.73</td> <td>0.00</td> <td>300</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>60.97</td> <td>68.20</td> <td>-7.23</td> <td>47.89</td> <td>34.76</td> <td>10.04</td> <td>31.72</td> <td>0.00</td> <td>300</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5454.64	58.74	74.00	-15.26	45.66	34.79	10.02	31.73	0.00	300	47	PEAK	2	5468.72	60.97	68.20	-7.23	47.89	34.76	10.04	31.72	0.00	300	47	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>108.64</td> <td>-----</td> <td>-----</td> <td>95.55</td> <td>34.69</td> <td>10.10</td> <td>31.70</td> <td>0.00</td> <td>300</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5510.00	108.64	-----	-----	95.55	34.69	10.10	31.70	0.00	300	47	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5454.64	58.74	74.00	-15.26	45.66	34.79	10.02	31.73	0.00	300	47	PEAK																																																																																			
2	5468.72	60.97	68.20	-7.23	47.89	34.76	10.04	31.72	0.00	300	47	PEAK																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5510.00	108.64	-----	-----	95.55	34.69	10.10	31.70	0.00	300	47	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>48.23</td> <td>54.00</td> <td>-5.77</td> <td>35.15</td> <td>34.78</td> <td>10.03</td> <td>31.73</td> <td>0.00</td> <td>300</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.92	48.23	54.00	-5.77	35.15	34.78	10.03	31.73	0.00	300	47	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>99.44</td> <td>-----</td> <td>-----</td> <td>86.35</td> <td>34.69</td> <td>10.10</td> <td>31.70</td> <td>0.00</td> <td>300</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5510.00	99.44	-----	-----	86.35	34.69	10.10	31.70	0.00	300	47	AVERAGE													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5459.92	48.23	54.00	-5.77	35.15	34.78	10.03	31.73	0.00	300	47	AVERAGE																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5510.00	99.44	-----	-----	86.35	34.69	10.10	31.70	0.00	300	47	AVERAGE																																																																																			



Mode	67																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full_5510MHz																																													
ANT	CDD 8+5																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5734.92</td> <td>55.64</td> <td>68.20</td> <td>-12.56</td> <td>42.55</td> <td>34.60</td> <td>10.35</td> <td>31.86</td> <td>0.00</td> <td>300</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5734.92	55.64	68.20	-12.56	42.55	34.60	10.35	31.86	0.00	300	47	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5734.92	55.64	68.20	-12.56	42.55	34.60	10.35	31.86	0.00	300	47	PEAK																																		



		67																																																																																													
Mode	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11n_HT40_CH102_Full_5510MHz																																																																																														
ANT	CDD 8+5																																																																																														
Pol.	Vertical	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.28</td> <td>59.41</td> <td>74.00</td> <td>-14.59</td> <td>46.33</td> <td>34.78</td> <td>10.03</td> <td>31.73</td> <td>0.00</td> <td>319</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.68</td> <td>63.52</td> <td>68.20</td> <td>-4.68</td> <td>50.44</td> <td>34.76</td> <td>10.04</td> <td>31.72</td> <td>0.00</td> <td>319</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.28	59.41	74.00	-14.59	46.33	34.78	10.03	31.73	0.00	319	360	PEAK	2	5469.68	63.52	68.20	-4.68	50.44	34.76	10.04	31.72	0.00	319	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>110.55</td> <td>-----</td> <td>-----</td> <td>97.46</td> <td>34.68</td> <td>10.11</td> <td>31.70</td> <td>0.00</td> <td>319</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5510.00	110.55	-----	-----	97.46	34.68	10.11	31.70	0.00	319	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5459.28	59.41	74.00	-14.59	46.33	34.78	10.03	31.73	0.00	319	360	PEAK																																																																																			
2	5469.68	63.52	68.20	-4.68	50.44	34.76	10.04	31.72	0.00	319	360	PEAK																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5510.00	110.55	-----	-----	97.46	34.68	10.11	31.70	0.00	319	360	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.28</td> <td>49.83</td> <td>54.00</td> <td>-4.17</td> <td>36.75</td> <td>34.78</td> <td>10.03</td> <td>31.73</td> <td>0.00</td> <td>319</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.28	49.83	54.00	-4.17	36.75	34.78	10.03	31.73	0.00	319	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>101.82</td> <td>-----</td> <td>-----</td> <td>88.73</td> <td>34.68</td> <td>10.11</td> <td>31.70</td> <td>0.00</td> <td>319</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5510.00	101.82	-----	-----	88.73	34.68	10.11	31.70	0.00	319	360	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5459.28	49.83	54.00	-4.17	36.75	34.78	10.03	31.73	0.00	319	360	AVERAGE																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5510.00	101.82	-----	-----	88.73	34.68	10.11	31.70	0.00	319	360	AVERAGE																																																																																			



Mode	67																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full_5510MHz																																													
ANT	CDD 8+5																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p>	Blank																																												
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5761.80</td> <td>55.60</td> <td>68.20</td> <td>-12.60</td> <td>42.56</td> <td>34.60</td> <td>10.37</td> <td>31.93</td> <td>0.00</td> <td>319</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5761.80	55.60	68.20	-12.60	42.56	34.60	10.37	31.93	0.00	319	360	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5761.80	55.60	68.20	-12.60	42.56	34.60	10.37	31.93	0.00	319	360	PEAK																																		



Mode	67																																																																																																																																																																							
	Harmonic																																																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11n_HT40_CH102_Full_5510MHz																																																																																																																																																																							
ANT	CDD 8+5																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7714.00</td> <td>46.16</td> <td>74.00</td> <td>-27.84</td> <td>58.92</td> <td>35.90</td> <td>12.07</td> <td>60.73</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>8816.00</td> <td>44.57</td> <td>68.20</td> <td>-23.63</td> <td>56.58</td> <td>36.10</td> <td>12.97</td> <td>61.08</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11020.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>55.10</td> <td>38.00</td> <td>14.58</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>16530.00</td> <td>59.44</td> <td>68.20</td> <td>-8.76</td> <td>59.39</td> <td>41.33</td> <td>18.00</td> <td>59.28</td> <td>0.00</td> <td>100</td> <td>320</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7714.00	46.16	74.00	-27.84	58.92	35.90	12.07	60.73	0.00	---	---	PEAK	2	8816.00	44.57	68.20	-23.63	56.58	36.10	12.97	61.08	0.00	---	---	PEAK	3	11020.00	46.46	74.00	-27.54	55.10	38.00	14.58	61.22	0.00	---	---	PEAK	4	16530.00	59.44	68.20	-8.76	59.39	41.33	18.00	59.28	0.00	100	320	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7714.00</td> <td>44.98</td> <td>74.00</td> <td>-29.02</td> <td>57.74</td> <td>35.90</td> <td>12.07</td> <td>60.73</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>8816.00</td> <td>44.41</td> <td>68.20</td> <td>-23.79</td> <td>56.42</td> <td>36.10</td> <td>12.97</td> <td>61.08</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11020.00</td> <td>46.77</td> <td>74.00</td> <td>-27.23</td> <td>55.41</td> <td>38.00</td> <td>14.58</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>16530.00</td> <td>64.38</td> <td>68.20</td> <td>-3.82</td> <td>64.33</td> <td>41.33</td> <td>18.00</td> <td>59.28</td> <td>0.00</td> <td>100</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7714.00	44.98	74.00	-29.02	57.74	35.90	12.07	60.73	0.00	---	---	PEAK	2	8816.00	44.41	68.20	-23.79	56.42	36.10	12.97	61.08	0.00	---	---	PEAK	3	11020.00	46.77	74.00	-27.23	55.41	38.00	14.58	61.22	0.00	---	---	PEAK	4	16530.00	64.38	68.20	-3.82	64.33	41.33	18.00	59.28	0.00	100	116	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																														
1	7714.00	46.16	74.00	-27.84	58.92	35.90	12.07	60.73	0.00	---	---	PEAK																																																																																																																																																												
2	8816.00	44.57	68.20	-23.63	56.58	36.10	12.97	61.08	0.00	---	---	PEAK																																																																																																																																																												
3	11020.00	46.46	74.00	-27.54	55.10	38.00	14.58	61.22	0.00	---	---	PEAK																																																																																																																																																												
4	16530.00	59.44	68.20	-8.76	59.39	41.33	18.00	59.28	0.00	100	320	PEAK																																																																																																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																														
1	7714.00	44.98	74.00	-29.02	57.74	35.90	12.07	60.73	0.00	---	---	PEAK																																																																																																																																																												
2	8816.00	44.41	68.20	-23.79	56.42	36.10	12.97	61.08	0.00	---	---	PEAK																																																																																																																																																												
3	11020.00	46.77	74.00	-27.23	55.41	38.00	14.58	61.22	0.00	---	---	PEAK																																																																																																																																																												
4	16530.00	64.38	68.20	-3.82	64.33	41.33	18.00	59.28	0.00	100	116	PEAK																																																																																																																																																												



		68																																																																																			
Mode		Band Edge - L																																																																																			
		U-NII-2C_5.47-5.725_802.11n_HT40_CH110_Full_5550MHz																																																																																			
ANT		CDD 8+5																																																																																			
Pol.		Horizontal					Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.00</td> <td>54.68</td> <td>74.00</td> <td>-19.32</td> <td>41.61</td> <td>34.79</td> <td>10.01</td> <td>31.73</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.80</td> <td>53.86</td> <td>68.20</td> <td>-14.34</td> <td>40.78</td> <td>34.77</td> <td>10.03</td> <td>31.72</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5447.00	54.68	74.00	-19.32	41.61	34.79	10.01	31.73	0.00	100	280	PEAK	2	5462.80	53.86	68.20	-14.34	40.78	34.77	10.03	31.72	0.00	100	280	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>107.09</td> <td>-----</td> <td>-----</td> <td>94.00</td> <td>34.62</td> <td>10.15</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5550.00	107.09	-----	-----	94.00	34.62	10.15	31.68	0.00	100	280	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5447.00	54.68	74.00	-19.32	41.61	34.79	10.01	31.73	0.00	100	280	PEAK																																																																									
2	5462.80	53.86	68.20	-14.34	40.78	34.77	10.03	31.72	0.00	100	280	PEAK																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5550.00	107.09	-----	-----	94.00	34.62	10.15	31.68	0.00	100	280	PEAK																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.80</td> <td>43.79</td> <td>54.00</td> <td>-10.21</td> <td>30.71</td> <td>34.79</td> <td>10.02</td> <td>31.73</td> <td>0.00</td> <td>100</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5452.80	43.79	54.00	-10.21	30.71	34.79	10.02	31.73	0.00	100	280	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>98.52</td> <td>-----</td> <td>-----</td> <td>85.44</td> <td>34.60</td> <td>10.16</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5550.00	98.52	-----	-----	85.44	34.60	10.16	31.68	0.00	100	280	AVERAGE													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5452.80	43.79	54.00	-10.21	30.71	34.79	10.02	31.73	0.00	100	280	AVERAGE																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5550.00	98.52	-----	-----	85.44	34.60	10.16	31.68	0.00	100	280	AVERAGE																																																																									



Mode	68																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_Full_5550MHz																																												
ANT	CDD 8+5																																												
Pol.	Horizontal	Fundamental																																											
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1 U-NII-2A U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5764.79</td> <td>54.76</td> <td>68.20</td> <td>-13.44</td> <td>41.72</td> <td>34.60</td> <td>10.38</td> <td>31.94</td> <td>0.00</td> <td>100</td> <td>200</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5764.79	54.76	68.20	-13.44	41.72	34.60	10.38	31.94	0.00	100	200	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5764.79	54.76	68.20	-13.44	41.72	34.60	10.38	31.94	0.00	100	200	PEAK																																	



		68																																																																																																
Mode		Band Edge - L																																																																																																
		U-NII-2C_5.47-5.725_802.11n_HT40_CH110_Full_5550MHz																																																																																																
ANT		CDD 8+5																																																																																																
Pol.	Vertical	Fundamental																																																																																																
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.00</td> <td>57.43</td> <td>74.00</td> <td>-16.57</td> <td>44.39</td> <td>34.78</td> <td>10.00</td> <td>31.74</td> <td>0.00</td> <td>315</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5463.60</td> <td>54.44</td> <td>68.20</td> <td>-13.76</td> <td>41.36</td> <td>34.77</td> <td>10.03</td> <td>31.72</td> <td>0.00</td> <td>315</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5440.00	57.43	74.00	-16.57	44.39	34.78	10.00	31.74	0.00	315	0 PEAK	2	5463.60	54.44	68.20	-13.76	41.36	34.77	10.03	31.72	0.00	315	0 PEAK	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>110.46</td> <td>-----</td> <td>-----</td> <td>97.37</td> <td>34.62</td> <td>10.15</td> <td>31.68</td> <td>0.00</td> <td>315</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	110.46	-----	-----	97.37	34.62	10.15	31.68	0.00	315	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5440.00	57.43	74.00	-16.57	44.39	34.78	10.00	31.74	0.00	315	0 PEAK																																																																																							
2	5463.60	54.44	68.20	-13.76	41.36	34.77	10.03	31.72	0.00	315	0 PEAK																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5550.00	110.46	-----	-----	97.37	34.62	10.15	31.68	0.00	315	0 PEAK																																																																																							
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.20</td> <td>44.84</td> <td>54.00</td> <td>-9.16</td> <td>31.80</td> <td>34.78</td> <td>10.00</td> <td>31.74</td> <td>0.00</td> <td>315</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.20	44.84	54.00	-9.16	31.80	34.78	10.00	31.74	0.00	315	0 AVERAGE	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>101.25</td> <td>-----</td> <td>-----</td> <td>88.16</td> <td>34.62</td> <td>10.15</td> <td>31.68</td> <td>0.00</td> <td>315</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	101.25	-----	-----	88.16	34.62	10.15	31.68	0.00	315	0 AVERAGE												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5441.20	44.84	54.00	-9.16	31.80	34.78	10.00	31.74	0.00	315	0 AVERAGE																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5550.00	101.25	-----	-----	88.16	34.62	10.15	31.68	0.00	315	0 AVERAGE																																																																																							







Mode	68																																										
	Band Edge - R																																										
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_Full_5550MHz																																										
ANT	CDD 8+5																																										
Pol.	Vertical	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5760.27</td> <td>54.41</td> <td>68.20</td> <td>-13.79</td> <td>41.37</td> <td>34.60</td> <td>10.37</td> <td>31.93</td> <td>0.00</td> <td>315</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5760.27	54.41	68.20	-13.79	41.37	34.60	10.37	31.93	0.00	315	0 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1 5760.27	54.41	68.20	-13.79	41.37	34.60	10.37	31.93	0.00	315	0 PEAK																																	



Mode	68																																																																																																																																																																							
	Harmonic																																																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_Full_5550MHz																																																																																																																																																																							
ANT	CDD 8+5																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7770.00</td> <td>45.22</td> <td>68.20</td> <td>-22.98</td> <td>57.82</td> <td>35.90</td> <td>12.12</td> <td>60.62</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>8880.00</td> <td>44.93</td> <td>68.20</td> <td>-23.27</td> <td>56.89</td> <td>36.16</td> <td>12.99</td> <td>61.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11100.00</td> <td>46.52</td> <td>74.00</td> <td>-27.48</td> <td>55.10</td> <td>38.00</td> <td>14.63</td> <td>61.21</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>16650.00</td> <td>60.23</td> <td>68.20</td> <td>-7.97</td> <td>60.10</td> <td>41.35</td> <td>18.05</td> <td>59.27</td> <td>0.00</td> <td>100</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7770.00	45.22	68.20	-22.98	57.82	35.90	12.12	60.62	0.00	---	---	PEAK	2	8880.00	44.93	68.20	-23.27	56.89	36.16	12.99	61.11	0.00	---	---	PEAK	3	11100.00	46.52	74.00	-27.48	55.10	38.00	14.63	61.21	0.00	---	---	PEAK	4	16650.00	60.23	68.20	-7.97	60.10	41.35	18.05	59.27	0.00	100	319	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7770.00</td> <td>45.96</td> <td>68.20</td> <td>-22.24</td> <td>58.56</td> <td>35.90</td> <td>12.12</td> <td>60.62</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>8880.00</td> <td>44.42</td> <td>68.20</td> <td>-23.78</td> <td>56.38</td> <td>36.16</td> <td>12.99</td> <td>61.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11100.00</td> <td>46.50</td> <td>74.00</td> <td>-27.50</td> <td>55.08</td> <td>38.00</td> <td>14.63</td> <td>61.21</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>16650.00</td> <td>64.90</td> <td>68.20</td> <td>-3.30</td> <td>64.76</td> <td>41.35</td> <td>18.05</td> <td>59.26</td> <td>0.00</td> <td>100</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7770.00	45.96	68.20	-22.24	58.56	35.90	12.12	60.62	0.00	---	---	PEAK	2	8880.00	44.42	68.20	-23.78	56.38	36.16	12.99	61.11	0.00	---	---	PEAK	3	11100.00	46.50	74.00	-27.50	55.08	38.00	14.63	61.21	0.00	---	---	PEAK	4	16650.00	64.90	68.20	-3.30	64.76	41.35	18.05	59.26	0.00	100	116	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																														
1	7770.00	45.22	68.20	-22.98	57.82	35.90	12.12	60.62	0.00	---	---	PEAK																																																																																																																																																												
2	8880.00	44.93	68.20	-23.27	56.89	36.16	12.99	61.11	0.00	---	---	PEAK																																																																																																																																																												
3	11100.00	46.52	74.00	-27.48	55.10	38.00	14.63	61.21	0.00	---	---	PEAK																																																																																																																																																												
4	16650.00	60.23	68.20	-7.97	60.10	41.35	18.05	59.27	0.00	100	319	PEAK																																																																																																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																														
1	7770.00	45.96	68.20	-22.24	58.56	35.90	12.12	60.62	0.00	---	---	PEAK																																																																																																																																																												
2	8880.00	44.42	68.20	-23.78	56.38	36.16	12.99	61.11	0.00	---	---	PEAK																																																																																																																																																												
3	11100.00	46.50	74.00	-27.50	55.08	38.00	14.63	61.21	0.00	---	---	PEAK																																																																																																																																																												
4	16650.00	64.90	68.20	-3.30	64.76	41.35	18.05	59.26	0.00	100	116	PEAK																																																																																																																																																												

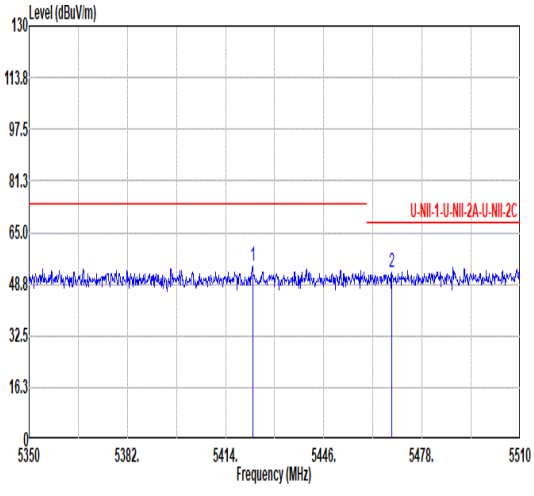
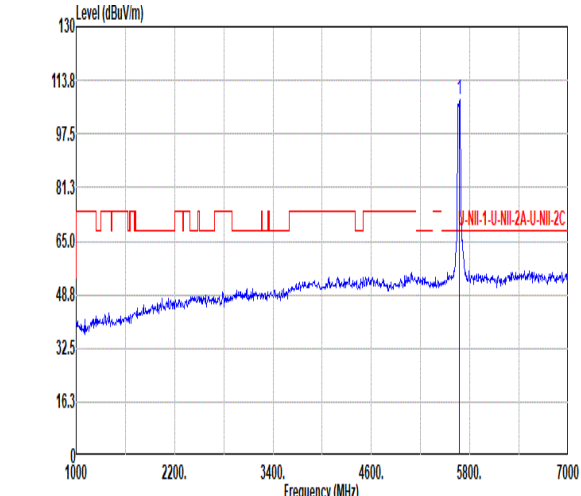
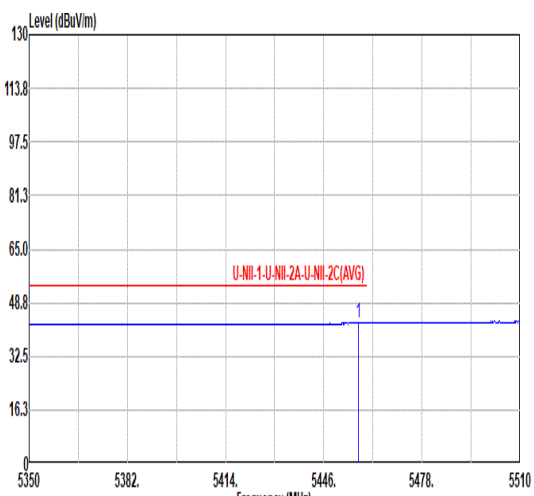
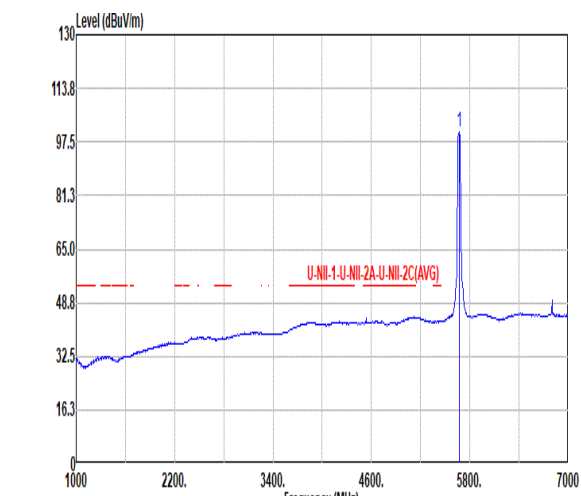


		69																																																																																			
Mode		Band Edge - L																																																																																			
		U-NII-2C_5.47-5.725_802.11n_HT40_CH134_Full_5670MHz																																																																																			
ANT		CDD 8+5																																																																																			
Pol.		Horizontal					Fundamental																																																																														
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5422.80</td> <td>54.33</td> <td>74.00</td> <td>-19.67</td> <td>41.36</td> <td>34.75</td> <td>9.97</td> <td>31.75</td> <td>0.00</td> <td>229</td> <td>318</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.24</td> <td>52.40</td> <td>68.20</td> <td>-15.80</td> <td>39.32</td> <td>34.76</td> <td>10.04</td> <td>31.72</td> <td>0.00</td> <td>229</td> <td>318</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5422.80	54.33	74.00	-19.67	41.36	34.75	9.97	31.75	0.00	229	318	PEAK	2	5468.24	52.40	68.20	-15.80	39.32	34.76	10.04	31.72	0.00	229	318	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>107.93</td> <td>-----</td> <td>-----</td> <td>94.75</td> <td>34.60</td> <td>10.31</td> <td>31.73</td> <td>0.00</td> <td>229</td> <td>318</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5670.00	107.93	-----	-----	94.75	34.60	10.31	31.73	0.00	229	318	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5422.80	54.33	74.00	-19.67	41.36	34.75	9.97	31.75	0.00	229	318	PEAK																																																																									
2	5468.24	52.40	68.20	-15.80	39.32	34.76	10.04	31.72	0.00	229	318	PEAK																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5670.00	107.93	-----	-----	94.75	34.60	10.31	31.73	0.00	229	318	PEAK																																																																									
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.36</td> <td>42.57</td> <td>54.00</td> <td>-11.43</td> <td>29.49</td> <td>34.79</td> <td>10.02</td> <td>31.73</td> <td>0.00</td> <td>229</td> <td>318</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5457.36	42.57	54.00	-11.43	29.49	34.79	10.02	31.73	0.00	229	318	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>100.63</td> <td>-----</td> <td>-----</td> <td>87.44</td> <td>34.60</td> <td>10.30</td> <td>31.71</td> <td>0.00</td> <td>229</td> <td>318</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5670.00	100.63	-----	-----	87.44	34.60	10.30	31.71	0.00	229	318	AVERAGE													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5457.36	42.57	54.00	-11.43	29.49	34.79	10.02	31.73	0.00	229	318	AVERAGE																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
1	5670.00	100.63	-----	-----	87.44	34.60	10.30	31.71	0.00	229	318	AVERAGE																																																																									



Mode	69																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full_5670MHz																																												
ANT	CDD 8+5																																												
Pol.	Horizontal	Fundamental																																											
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.24</td> <td>61.41</td> <td>68.20</td> <td>-6.79</td> <td>48.32</td> <td>34.60</td> <td>10.35</td> <td>31.86</td> <td>0.00</td> <td>229</td> <td>318</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5731.24	61.41	68.20	-6.79	48.32	34.60	10.35	31.86	0.00	229	318	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5731.24	61.41	68.20	-6.79	48.32	34.60	10.35	31.86	0.00	229	318	PEAK																																		

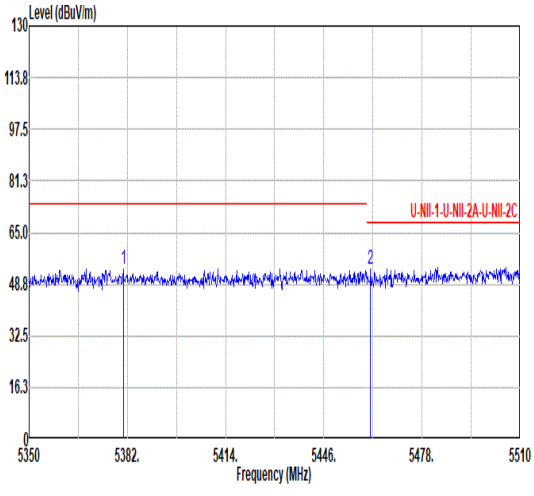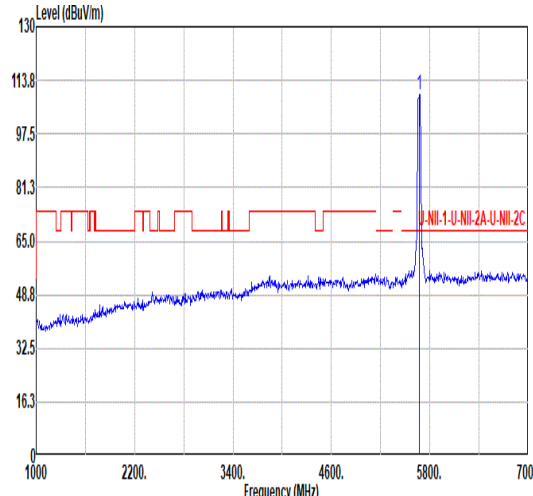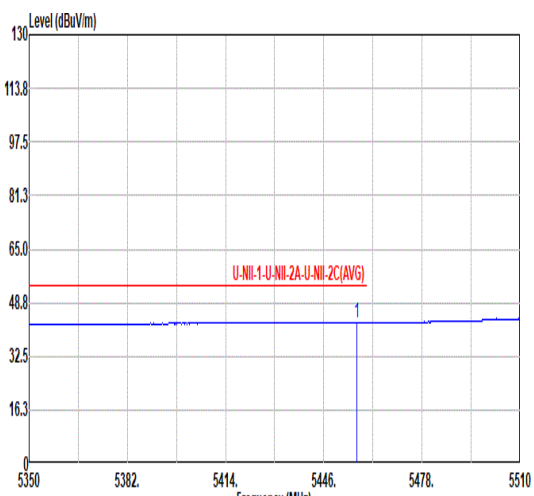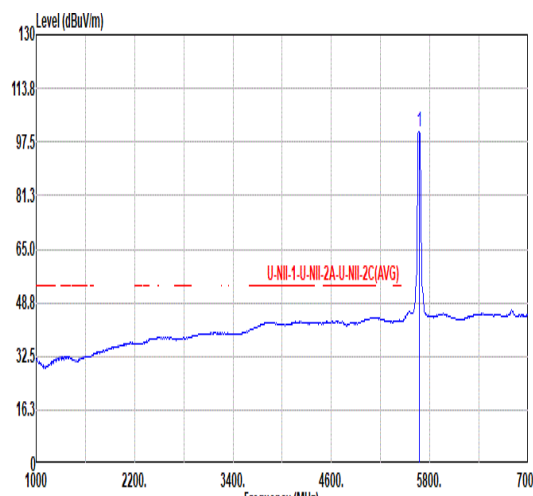

		69																																																																																					
Mode		Band Edge - L																																																																																					
		U-NII-2C_5.47-5.725_802.11n_HT40_CH134_Full_5670MHz																																																																																					
ANT		CDD 8+5																																																																																					
Pol.		Vertical					Fundamental																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Two peaks are marked at 5380.72 MHz and 5461.20 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5380.72</td> <td>53.64</td> <td>74.00</td> <td>-20.36</td> <td>40.82</td> <td>34.66</td> <td>9.93</td> <td>31.77</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.20</td> <td>53.51</td> <td>68.20</td> <td>-14.69</td> <td>40.42</td> <td>34.78</td> <td>10.03</td> <td>31.72</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5380.72	53.64	74.00	-20.36	40.82	34.66	9.93	31.77	0.00	316	360	PEAK	2	5461.20	53.51	68.20	-14.69	40.42	34.78	10.03	31.72	0.00	316	360	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. A peak is marked at 5670.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>109.47</td> <td>-----</td> <td>-----</td> <td>96.30</td> <td>34.60</td> <td>10.31</td> <td>31.74</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5670.00	109.47	-----	-----	96.30	34.60	10.31	31.74	0.00	316	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																												
1	5380.72	53.64	74.00	-20.36	40.82	34.66	9.93	31.77	0.00	316	360	PEAK																																																																											
2	5461.20	53.51	68.20	-14.69	40.42	34.78	10.03	31.72	0.00	316	360	PEAK																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																												
1	5670.00	109.47	-----	-----	96.30	34.60	10.31	31.74	0.00	316	360	PEAK																																																																											
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. A peak is marked at 5456.88 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.88</td> <td>42.80</td> <td>54.00</td> <td>-11.20</td> <td>29.72</td> <td>34.79</td> <td>10.02</td> <td>31.73</td> <td>0.00</td> <td>316</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5456.88	42.80	54.00	-11.20	29.72	34.79	10.02	31.73	0.00	316	360	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. A peak is marked at 5670.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>100.54</td> <td>-----</td> <td>-----</td> <td>87.35</td> <td>34.60</td> <td>10.30</td> <td>31.71</td> <td>0.00</td> <td>316</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5670.00	100.54	-----	-----	87.35	34.60	10.30	31.71	0.00	316	360	AVERAGE													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																												
1	5456.88	42.80	54.00	-11.20	29.72	34.79	10.02	31.73	0.00	316	360	AVERAGE																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																												
1	5670.00	100.54	-----	-----	87.35	34.60	10.30	31.71	0.00	316	360	AVERAGE																																																																											



Mode	69																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full_5670MHz																																													
ANT	CDD 8+5																																													
Pol.	Vertical	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.04</td> <td>60.13</td> <td>68.20</td> <td>-8.07</td> <td>47.02</td> <td>34.60</td> <td>10.35</td> <td>31.84</td> <td>0.00</td> <td>316</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5726.04	60.13	68.20	-8.07	47.02	34.60	10.35	31.84	0.00	316	360	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5726.04	60.13	68.20	-8.07	47.02	34.60	10.35	31.84	0.00	316	360	PEAK																																		





Mode	69																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2C_5.47-5.725_802.11n_HT40_CH134_Full_5670MHz																																																																																																																											
ANT	CDD 8+5																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11339.50</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>54.09</td> <td>38.04</td> <td>14.80</td> <td>61.19</td> <td>0.00</td> <td>100</td> <td>70 Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>64.61</td> <td>68.20</td> <td>-3.59</td> <td>64.46</td> <td>41.17</td> <td>18.22</td> <td>59.24</td> <td>0.00</td> <td>102</td> <td>327 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11339.50	45.74	74.00	-28.26	54.09	38.04	14.80	61.19	0.00	100	70 Peak	2	17010.00	64.61	68.20	-3.59	64.46	41.17	18.22	59.24	0.00	102	327 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7930.60</td> <td>46.83</td> <td>68.20</td> <td>-21.37</td> <td>58.91</td> <td>35.90</td> <td>12.33</td> <td>60.31</td> <td>0.00</td> <td>100</td> <td>65 Peak</td> </tr> <tr> <td>2</td> <td>11340.00</td> <td>46.98</td> <td>74.00</td> <td>-27.02</td> <td>55.33</td> <td>38.04</td> <td>14.80</td> <td>61.19</td> <td>0.00</td> <td>100</td> <td>24 Peak</td> </tr> <tr> <td>3</td> <td>17010.00</td> <td>63.69</td> <td>68.20</td> <td>-4.51</td> <td>63.51</td> <td>41.19</td> <td>18.22</td> <td>59.23</td> <td>0.00</td> <td>100</td> <td>114 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7930.60	46.83	68.20	-21.37	58.91	35.90	12.33	60.31	0.00	100	65 Peak	2	11340.00	46.98	74.00	-27.02	55.33	38.04	14.80	61.19	0.00	100	24 Peak	3	17010.00	63.69	68.20	-4.51	63.51	41.19	18.22	59.23	0.00	100	114 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	11339.50	45.74	74.00	-28.26	54.09	38.04	14.80	61.19	0.00	100	70 Peak																																																																																																																	
2	17010.00	64.61	68.20	-3.59	64.46	41.17	18.22	59.24	0.00	102	327 PEAK																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	7930.60	46.83	68.20	-21.37	58.91	35.90	12.33	60.31	0.00	100	65 Peak																																																																																																																	
2	11340.00	46.98	74.00	-27.02	55.33	38.04	14.80	61.19	0.00	100	24 Peak																																																																																																																	
3	17010.00	63.69	68.20	-4.51	63.51	41.19	18.22	59.23	0.00	100	114 PEAK																																																																																																																	



Mode	26	
	18-40G	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	CDD 8+5	
Pol.	Horizontal	Vertical
Peak Avg		

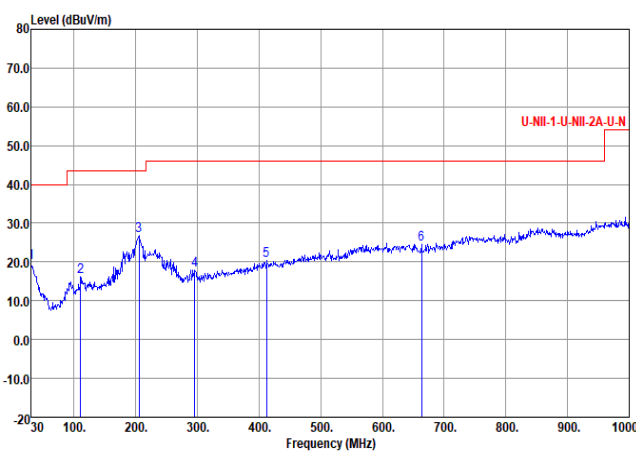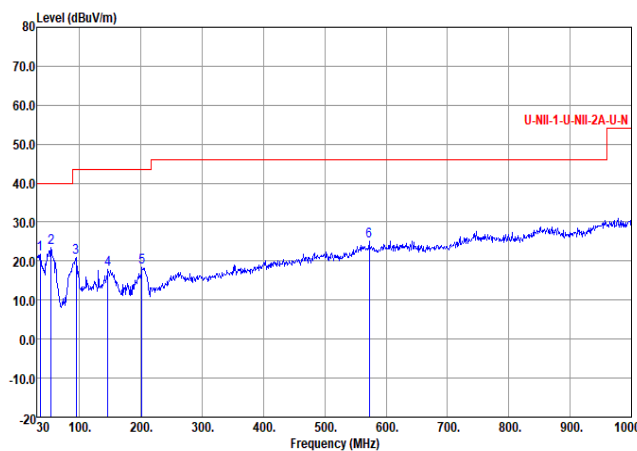

Mode	26																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHZ																																																																																																																																																																									
ANT	CDD 8+5																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red limit line and a blue signal line with six peaks labeled 1 through 6. The signal levels are generally below the limit line.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>19.79</td><td>40.00</td><td>-20.21</td><td>27.50</td><td>24.86</td><td>0.45</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>110.51</td><td>16.08</td><td>43.50</td><td>-27.42</td><td>30.52</td><td>17.01</td><td>1.41</td><td>32.86</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>205.57</td><td>26.73</td><td>43.50</td><td>-16.77</td><td>42.48</td><td>15.13</td><td>1.95</td><td>32.83</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>295.78</td><td>17.93</td><td>46.00</td><td>-28.07</td><td>29.11</td><td>19.30</td><td>2.32</td><td>32.80</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>412.18</td><td>20.46</td><td>46.00</td><td>-25.54</td><td>28.28</td><td>22.33</td><td>2.74</td><td>32.89</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>663.41</td><td>24.63</td><td>46.00</td><td>-21.37</td><td>27.56</td><td>26.56</td><td>3.49</td><td>32.98</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	30.00	19.79	40.00	-20.21	27.50	24.86	0.45	33.02	0.00	---	Peak	2	110.51	16.08	43.50	-27.42	30.52	17.01	1.41	32.86	0.00	---	Peak	3	205.57	26.73	43.50	-16.77	42.48	15.13	1.95	32.83	0.00	---	Peak	4	295.78	17.93	46.00	-28.07	29.11	19.30	2.32	32.80	0.00	---	Peak	5	412.18	20.46	46.00	-25.54	28.28	22.33	2.74	32.89	0.00	---	Peak	6	663.41	24.63	46.00	-21.37	27.56	26.56	3.49	32.98	0.00	---	Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red limit line and a blue signal line with six peaks labeled 1 through 6. The signal levels are generally below the limit line.</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>35.82</td><td>21.72</td><td>40.00</td><td>-18.28</td><td>31.87</td><td>22.22</td><td>0.53</td><td>32.90</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>53.28</td><td>23.54</td><td>40.00</td><td>-16.46</td><td>42.27</td><td>13.43</td><td>0.76</td><td>32.92</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>94.02</td><td>20.84</td><td>43.50</td><td>-22.66</td><td>37.07</td><td>15.37</td><td>1.27</td><td>32.87</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>146.40</td><td>17.79</td><td>43.50</td><td>-25.71</td><td>31.62</td><td>17.39</td><td>1.61</td><td>32.83</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>201.69</td><td>18.43</td><td>43.50</td><td>-25.07</td><td>34.22</td><td>15.12</td><td>1.93</td><td>32.84</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>572.23</td><td>25.03</td><td>46.00</td><td>-20.97</td><td>28.59</td><td>26.31</td><td>3.23</td><td>33.10</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	35.82	21.72	40.00	-18.28	31.87	22.22	0.53	32.90	0.00	---	Peak	2	53.28	23.54	40.00	-16.46	42.27	13.43	0.76	32.92	0.00	---	Peak	3	94.02	20.84	43.50	-22.66	37.07	15.37	1.27	32.87	0.00	---	Peak	4	146.40	17.79	43.50	-25.71	31.62	17.39	1.61	32.83	0.00	---	Peak	5	201.69	18.43	43.50	-25.07	34.22	15.12	1.93	32.84	0.00	---	Peak	6	572.23	25.03	46.00	-20.97	28.59	26.31	3.23	33.10	0.00	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																														
1	30.00	19.79	40.00	-20.21	27.50	24.86	0.45	33.02	0.00	---	Peak																																																																																																																																																															
2	110.51	16.08	43.50	-27.42	30.52	17.01	1.41	32.86	0.00	---	Peak																																																																																																																																																															
3	205.57	26.73	43.50	-16.77	42.48	15.13	1.95	32.83	0.00	---	Peak																																																																																																																																																															
4	295.78	17.93	46.00	-28.07	29.11	19.30	2.32	32.80	0.00	---	Peak																																																																																																																																																															
5	412.18	20.46	46.00	-25.54	28.28	22.33	2.74	32.89	0.00	---	Peak																																																																																																																																																															
6	663.41	24.63	46.00	-21.37	27.56	26.56	3.49	32.98	0.00	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Factor (dB)	Aux Factor (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	35.82	21.72	40.00	-18.28	31.87	22.22	0.53	32.90	0.00	---	Peak																																																																																																																																																															
2	53.28	23.54	40.00	-16.46	42.27	13.43	0.76	32.92	0.00	---	Peak																																																																																																																																																															
3	94.02	20.84	43.50	-22.66	37.07	15.37	1.27	32.87	0.00	---	Peak																																																																																																																																																															
4	146.40	17.79	43.50	-25.71	31.62	17.39	1.61	32.83	0.00	---	Peak																																																																																																																																																															
5	201.69	18.43	43.50	-25.07	34.22	15.12	1.93	32.84	0.00	---	Peak																																																																																																																																																															
6	572.23	25.03	46.00	-20.97	28.59	26.31	3.23	33.10	0.00	---	Peak																																																																																																																																																															



Mode	44																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																						
ANT	CDD 8+5																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.20</td> <td>53.78</td> <td>68.20</td> <td>-14.42</td> <td>40.55</td> <td>34.60</td> <td>10.27</td> <td>31.64</td> <td>0.00</td> <td>260</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>50.97</td> <td>68.50</td> <td>-17.53</td> <td>37.75</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>260</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5713.20</td> <td>60.04</td> <td>109.00</td> <td>-48.96</td> <td>46.91</td> <td>34.60</td> <td>10.34</td> <td>31.81</td> <td>0.00</td> <td>260</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.20</td> <td>60.05</td> <td>113.64</td> <td>-53.59</td> <td>46.94</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>260</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5629.20	53.78	68.20	-14.42	40.55	34.60	10.27	31.64	0.00	260	44	PEAK	2	5650.40	50.97	68.50	-17.53	37.75	34.60	10.28	31.66	0.00	260	44	PEAK	3	5713.20	60.04	109.00	-48.96	46.91	34.60	10.34	31.81	0.00	260	44	PEAK	4	5721.20	60.05	113.64	-53.59	46.94	34.60	10.34	31.83	0.00	260	44	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.57</td> <td>-----</td> <td>-----</td> <td>96.50</td> <td>34.60</td> <td>10.36</td> <td>31.89</td> <td>0.00</td> <td>260</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5745.00	109.57	-----	-----	96.50	34.60	10.36	31.89	0.00	260	44	PEAK
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5629.20	53.78	68.20	-14.42	40.55	34.60	10.27	31.64	0.00	260	44	PEAK																																																																																																											
2	5650.40	50.97	68.50	-17.53	37.75	34.60	10.28	31.66	0.00	260	44	PEAK																																																																																																											
3	5713.20	60.04	109.00	-48.96	46.91	34.60	10.34	31.81	0.00	260	44	PEAK																																																																																																											
4	5721.20	60.05	113.64	-53.59	46.94	34.60	10.34	31.83	0.00	260	44	PEAK																																																																																																											
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	109.57	-----	-----	96.50	34.60	10.36	31.89	0.00	260	44	PEAK																																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4594.00</td> <td>46.15</td> <td>54.00</td> <td>-7.85</td> <td>34.79</td> <td>34.10</td> <td>9.15</td> <td>31.89</td> <td>0.00</td> <td>260</td> <td>44</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5745.00</td> <td>101.58</td> <td>-----</td> <td>-----</td> <td>88.50</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>260</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4594.00	46.15	54.00	-7.85	34.79	34.10	9.15	31.89	0.00	260	44	Average	2	5745.00	101.58	-----	-----	88.50	34.60	10.36	31.88	0.00	260	44	AVERAGE																																																																	
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4594.00	46.15	54.00	-7.85	34.79	34.10	9.15	31.89	0.00	260	44	Average																																																																																																											
2	5745.00	101.58	-----	-----	88.50	34.60	10.36	31.88	0.00	260	44	AVERAGE																																																																																																											



44																																																																																
Band Edge																																																																																
U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																
ANT CDD 8+5																																																																																
Pol.	Vertical																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.00</td> <td>53.43</td> <td>68.20</td> <td>-14.77</td> <td>40.19</td> <td>34.60</td> <td>10.28</td> <td>31.64</td> <td>0.00</td> <td>299</td> <td>3 PEAK</td> </tr> <tr> <td>2</td> <td>5652.00</td> <td>54.14</td> <td>70.29</td> <td>-16.15</td> <td>40.91</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>299</td> <td>3 PEAK</td> </tr> <tr> <td>3</td> <td>5701.20</td> <td>53.99</td> <td>105.64</td> <td>-51.65</td> <td>40.84</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>299</td> <td>3 PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>55.88</td> <td>111.81</td> <td>-55.93</td> <td>42.77</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>299</td> <td>3 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5644.00	53.43	68.20	-14.77	40.19	34.60	10.28	31.64	0.00	299	3 PEAK	2	5652.00	54.14	70.29	-16.15	40.91	34.60	10.29	31.66	0.00	299	3 PEAK	3	5701.20	53.99	105.64	-51.65	40.84	34.60	10.33	31.78	0.00	299	3 PEAK	4	5720.40	55.88	111.81	-55.93	42.77	34.60	10.34	31.83	0.00	299	3 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5644.00	53.43	68.20	-14.77	40.19	34.60	10.28	31.64	0.00	299	3 PEAK																																																																					
2	5652.00	54.14	70.29	-16.15	40.91	34.60	10.29	31.66	0.00	299	3 PEAK																																																																					
3	5701.20	53.99	105.64	-51.65	40.84	34.60	10.33	31.78	0.00	299	3 PEAK																																																																					
4	5720.40	55.88	111.81	-55.93	42.77	34.60	10.34	31.83	0.00	299	3 PEAK																																																																					
	Fundamental																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.88</td> <td>-----</td> <td>-----</td> <td>94.80</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>299</td> <td>3 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.88	-----	-----	94.80	34.60	10.36	31.88	0.00	299	3 PEAK																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5745.00	107.88	-----	-----	94.80	34.60	10.36	31.88	0.00	299	3 PEAK																																																																					
Avg	Blank																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.50</td> <td>-----</td> <td>-----</td> <td>87.42</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>299</td> <td>3 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.50	-----	-----	87.42	34.60	10.36	31.88	0.00	299	3 AVERAGE																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5745.00	100.50	-----	-----	87.42	34.60	10.36	31.88	0.00	299	3 AVERAGE																																																																					



Mode	44																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																													
ANT	CDD 8+5																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>45.83</td> <td>74.00</td> <td>-28.17</td> <td>57.83</td> <td>35.00</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>46.78</td> <td>74.00</td> <td>-27.22</td> <td>54.86</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>62.61</td> <td>68.20</td> <td>-5.59</td> <td>62.60</td> <td>40.90</td> <td>18.36</td> <td>59.33</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8043.00	45.83	74.00	-28.17	57.83	35.00	12.44	60.24	0.00	---	---	PEAK	2	11490.00	46.78	74.00	-27.22	54.86	38.19	14.91	61.18	0.00	---	---	PEAK	3	17235.00	62.61	68.20	-5.59	62.60	40.90	18.36	59.33	0.00	100	330	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>45.54</td> <td>74.00</td> <td>-28.46</td> <td>57.54</td> <td>35.00</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>48.06</td> <td>74.00</td> <td>-25.94</td> <td>56.14</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>64.78</td> <td>68.20</td> <td>-3.42</td> <td>64.85</td> <td>40.90</td> <td>18.36</td> <td>59.33</td> <td>0.00</td> <td>100</td> <td>248</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8043.00	45.54	74.00	-28.46	57.54	35.00	12.44	60.24	0.00	---	---	PEAK	2	11490.00	48.06	74.00	-25.94	56.14	38.19	14.91	61.18	0.00	300	0	PEAK	3	17235.00	64.78	68.20	-3.42	64.85	40.90	18.36	59.33	0.00	100	248	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8043.00	45.83	74.00	-28.17	57.83	35.00	12.44	60.24	0.00	---	---	PEAK																																																																																																																																		
2	11490.00	46.78	74.00	-27.22	54.86	38.19	14.91	61.18	0.00	---	---	PEAK																																																																																																																																		
3	17235.00	62.61	68.20	-5.59	62.60	40.90	18.36	59.33	0.00	100	330	PEAK																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8043.00	45.54	74.00	-28.46	57.54	35.00	12.44	60.24	0.00	---	---	PEAK																																																																																																																																		
2	11490.00	48.06	74.00	-25.94	56.14	38.19	14.91	61.18	0.00	300	0	PEAK																																																																																																																																		
3	17235.00	64.78	68.20	-3.42	64.85	40.90	18.36	59.33	0.00	100	248	PEAK																																																																																																																																		






Mode	45																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																													
ANT	CDD 8+5																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8099.00</td> <td>45.38</td> <td>74.00</td> <td>-28.62</td> <td>57.46</td> <td>35.00</td> <td>12.44</td> <td>60.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>46.27</td> <td>74.00</td> <td>-27.73</td> <td>54.19</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>56.97</td> <td>68.20</td> <td>-11.23</td> <td>57.02</td> <td>40.90</td> <td>18.44</td> <td>59.39</td> <td>0.00</td> <td>100</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8099.00	45.38	74.00	-28.62	57.46	35.00	12.44	60.32	0.00	---	---	PEAK	2	11570.00	46.27	74.00	-27.73	54.19	38.27	14.97	61.16	0.00	---	---	PEAK	3	17355.00	56.97	68.20	-11.23	57.02	40.90	18.44	59.39	0.00	100	334	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8099.00</td> <td>46.79</td> <td>74.00</td> <td>-27.21</td> <td>58.87</td> <td>35.00</td> <td>12.44</td> <td>60.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>47.08</td> <td>74.00</td> <td>-26.92</td> <td>55.00</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>64.43</td> <td>68.20</td> <td>-3.77</td> <td>64.48</td> <td>40.90</td> <td>18.44</td> <td>59.39</td> <td>0.00</td> <td>109</td> <td>256</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8099.00	46.79	74.00	-27.21	58.87	35.00	12.44	60.32	0.00	---	---	PEAK	2	11570.00	47.08	74.00	-26.92	55.00	38.27	14.97	61.16	0.00	---	---	PEAK	3	17355.00	64.43	68.20	-3.77	64.48	40.90	18.44	59.39	0.00	109	256	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8099.00	45.38	74.00	-28.62	57.46	35.00	12.44	60.32	0.00	---	---	PEAK																																																																																																																																		
2	11570.00	46.27	74.00	-27.73	54.19	38.27	14.97	61.16	0.00	---	---	PEAK																																																																																																																																		
3	17355.00	56.97	68.20	-11.23	57.02	40.90	18.44	59.39	0.00	100	334	PEAK																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8099.00	46.79	74.00	-27.21	58.87	35.00	12.44	60.32	0.00	---	---	PEAK																																																																																																																																		
2	11570.00	47.08	74.00	-26.92	55.00	38.27	14.97	61.16	0.00	---	---	PEAK																																																																																																																																		
3	17355.00	64.43	68.20	-3.77	64.48	40.90	18.44	59.39	0.00	109	256	PEAK																																																																																																																																		



Mode	46																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																													
ANT	CDD 8+5																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>55.59</td> <td>111.36</td> <td>-55.77</td> <td>42.58</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>294</td> <td>56 PEAK</td> </tr> <tr> <td>2</td> <td>5874.00</td> <td>53.97</td> <td>105.58</td> <td>-51.61</td> <td>40.86</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>294</td> <td>56 PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>51.97</td> <td>68.35</td> <td>-16.38</td> <td>38.56</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>294</td> <td>56 PEAK</td> </tr> <tr> <td>4</td> <td>5958.00</td> <td>55.11</td> <td>68.20</td> <td>-13.09</td> <td>41.49</td> <td>35.24</td> <td>10.55</td> <td>32.17</td> <td>0.00</td> <td>294</td> <td>56 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	55.59	111.36	-55.77	42.58	34.72	10.45	32.16	0.00	294	56 PEAK	2	5874.00	53.97	105.58	-51.61	40.86	34.00	10.47	32.16	0.00	294	56 PEAK	3	5924.00	51.97	68.35	-16.38	38.56	35.05	10.52	32.16	0.00	294	56 PEAK	4	5958.00	55.11	68.20	-13.09	41.49	35.24	10.55	32.17	0.00	294	56 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.03</td> <td>-----</td> <td>-----</td> <td>96.04</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>294</td> <td>56 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	109.03	-----	-----	96.04	34.66	10.43	32.10	0.00	294	56 PEAK
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5854.00	55.59	111.36	-55.77	42.58	34.72	10.45	32.16	0.00	294	56 PEAK																																																																																																			
2	5874.00	53.97	105.58	-51.61	40.86	34.00	10.47	32.16	0.00	294	56 PEAK																																																																																																			
3	5924.00	51.97	68.35	-16.38	38.56	35.05	10.52	32.16	0.00	294	56 PEAK																																																																																																			
4	5958.00	55.11	68.20	-13.09	41.49	35.24	10.55	32.17	0.00	294	56 PEAK																																																																																																			
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5825.00	109.03	-----	-----	96.04	34.66	10.43	32.10	0.00	294	56 PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4660.00</td> <td>46.42</td> <td>54.00</td> <td>-7.58</td> <td>34.98</td> <td>34.10</td> <td>9.24</td> <td>31.90</td> <td>0.00</td> <td>294</td> <td>56 Average</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>100.76</td> <td>-----</td> <td>-----</td> <td>87.77</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>294</td> <td>56 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4660.00	46.42	54.00	-7.58	34.98	34.10	9.24	31.90	0.00	294	56 Average	2	5825.00	100.76	-----	-----	87.77	34.66	10.43	32.10	0.00	294	56 AVERAGE																																																												
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	4660.00	46.42	54.00	-7.58	34.98	34.10	9.24	31.90	0.00	294	56 Average																																																																																																			
2	5825.00	100.76	-----	-----	87.77	34.66	10.43	32.10	0.00	294	56 AVERAGE																																																																																																			

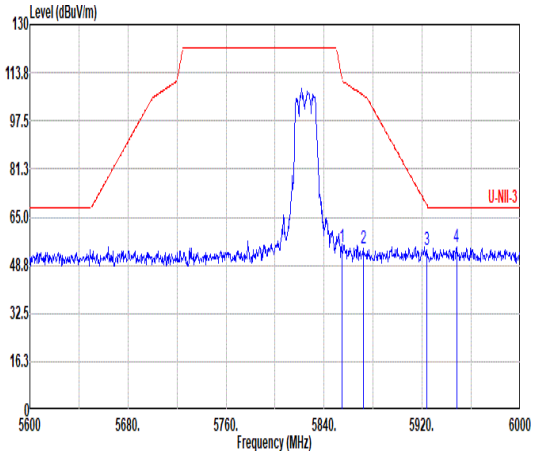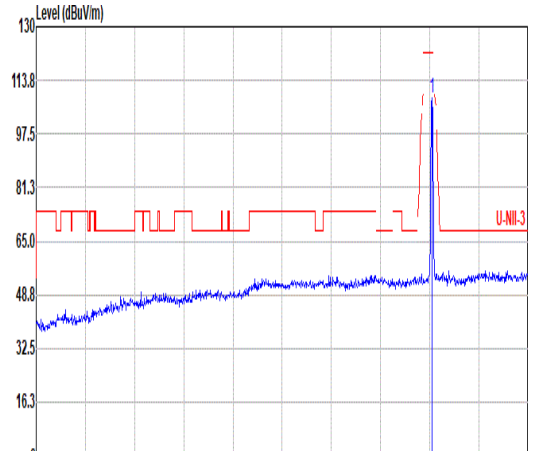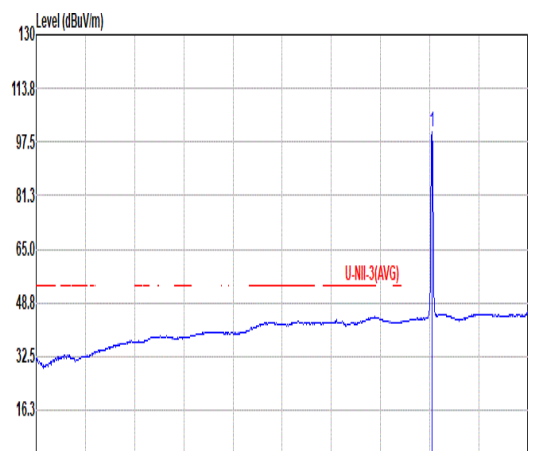

	46																																																																																																									
Mode	Band Edge - L																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																									
ANT	CDD 8+5																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak	 <table border="1" data-bbox="263 1064 774 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>55.03</td> <td>111.36</td> <td>-56.33</td> <td>42.02</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>333</td> <td>6 PEAK</td> </tr> <tr> <td>2</td> <td>5872.00</td> <td>54.64</td> <td>106.14</td> <td>-51.50</td> <td>41.54</td> <td>34.79</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>333</td> <td>6 PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>54.05</td> <td>69.23</td> <td>-15.18</td> <td>40.66</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>333</td> <td>6 PEAK</td> </tr> <tr> <td>4</td> <td>5948.00</td> <td>54.99</td> <td>68.20</td> <td>-13.21</td> <td>41.43</td> <td>35.19</td> <td>10.54</td> <td>32.17</td> <td>0.00</td> <td>333</td> <td>6 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.00	55.03	111.36	-56.33	42.02	34.72	10.45	32.16	0.00	333	6 PEAK	2	5872.00	54.64	106.14	-51.50	41.54	34.79	10.47	32.16	0.00	333	6 PEAK	3	5923.60	54.05	69.23	-15.18	40.66	35.04	10.51	32.16	0.00	333	6 PEAK	4	5948.00	54.99	68.20	-13.21	41.43	35.19	10.54	32.17	0.00	333	6 PEAK	 <table border="1" data-bbox="901 1064 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.63</td> <td>-----</td> <td>-----</td> <td>95.63</td> <td>34.65</td> <td>10.43</td> <td>32.08</td> <td>0.00</td> <td>333</td> <td>6 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	108.63	-----	-----	95.63	34.65	10.43	32.08	0.00	333	6 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5854.00	55.03	111.36	-56.33	42.02	34.72	10.45	32.16	0.00	333	6 PEAK																																																																																															
2	5872.00	54.64	106.14	-51.50	41.54	34.79	10.47	32.16	0.00	333	6 PEAK																																																																																															
3	5923.60	54.05	69.23	-15.18	40.66	35.04	10.51	32.16	0.00	333	6 PEAK																																																																																															
4	5948.00	54.99	68.20	-13.21	41.43	35.19	10.54	32.17	0.00	333	6 PEAK																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5825.00	108.63	-----	-----	95.63	34.65	10.43	32.08	0.00	333	6 PEAK																																																																																															
Avg	Blank	 <table border="1" data-bbox="901 1736 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.39</td> <td>-----</td> <td>-----</td> <td>87.39</td> <td>34.65</td> <td>10.43</td> <td>32.08</td> <td>0.00</td> <td>333</td> <td>6 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	100.39	-----	-----	87.39	34.65	10.43	32.08	0.00	333	6 AVERAGE																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5825.00	100.39	-----	-----	87.39	34.65	10.43	32.08	0.00	333	6 AVERAGE																																																																																															



Mode	46																																																																																																									
	Harmonic																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																									
ANT	CDD 8+5																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>8155.00</th> <th>45.13</th> <th>74.00</th> <th>-28.87</th> <th>57.29</th> <th>35.00</th> <th>12.45</th> <th>60.41</th> <th>0.00</th> <th>---</th> <th>---</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>11650.00</th> <th>46.76</th> <th>74.00</th> <th>-27.24</th> <th>54.52</th> <th>38.35</th> <th>15.02</th> <th>61.13</th> <th>0.00</th> <th>---</th> <th>---</th> <th>PEAK</th> </tr> <tr> <th>3</th> <th>17475.00</th> <th>51.61</th> <th>68.20</th> <th>-16.59</th> <th>51.63</th> <th>40.90</th> <th>18.52</th> <th>59.44</th> <th>0.00</th> <th>---</th> <th>---</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	8155.00	45.13	74.00	-28.87	57.29	35.00	12.45	60.41	0.00	---	---	PEAK	2	11650.00	46.76	74.00	-27.24	54.52	38.35	15.02	61.13	0.00	---	---	PEAK	3	17475.00	51.61	68.20	-16.59	51.63	40.90	18.52	59.44	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>8155.00</th> <th>45.70</th> <th>74.00</th> <th>-28.30</th> <th>57.06</th> <th>35.00</th> <th>12.45</th> <th>60.41</th> <th>0.00</th> <th>---</th> <th>---</th> <th>PEAK</th> </tr> <tr> <th>2</th> <th>11650.00</th> <th>47.89</th> <th>74.00</th> <th>-26.11</th> <th>55.65</th> <th>38.35</th> <th>15.02</th> <th>61.13</th> <th>0.00</th> <th>---</th> <th>---</th> <th>PEAK</th> </tr> <tr> <th>3</th> <th>17475.00</th> <th>64.49</th> <th>68.20</th> <th>-3.71</th> <th>64.51</th> <th>40.90</th> <th>18.52</th> <th>59.44</th> <th>0.00</th> <th>101</th> <th>255</th> <th>PEAK</th> </tr> </thead> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	8155.00	45.70	74.00	-28.30	57.06	35.00	12.45	60.41	0.00	---	---	PEAK	2	11650.00	47.89	74.00	-26.11	55.65	38.35	15.02	61.13	0.00	---	---	PEAK	3	17475.00	64.49	68.20	-3.71	64.51	40.90	18.52	59.44	0.00	101	255	PEAK
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
1	8155.00	45.13	74.00	-28.87	57.29	35.00	12.45	60.41	0.00	---	---	PEAK																																																																																														
2	11650.00	46.76	74.00	-27.24	54.52	38.35	15.02	61.13	0.00	---	---	PEAK																																																																																														
3	17475.00	51.61	68.20	-16.59	51.63	40.90	18.52	59.44	0.00	---	---	PEAK																																																																																														
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
1	8155.00	45.70	74.00	-28.30	57.06	35.00	12.45	60.41	0.00	---	---	PEAK																																																																																														
2	11650.00	47.89	74.00	-26.11	55.65	38.35	15.02	61.13	0.00	---	---	PEAK																																																																																														
3	17475.00	64.49	68.20	-3.71	64.51	40.90	18.52	59.44	0.00	101	255	PEAK																																																																																														



	47																																																																																																																						
Mode	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full_5745MHz																																																																																																																						
ANT	CDD 8+5																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5622.00</td> <td>53.49</td> <td>68.20</td> <td>-14.71</td> <td>40.27</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>289</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>53.66</td> <td>68.50</td> <td>-14.84</td> <td>40.44</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>289</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.60</td> <td>62.73</td> <td>110.79</td> <td>-48.06</td> <td>49.62</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>289</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>62.60</td> <td>110.90</td> <td>-48.30</td> <td>49.49</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>289</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5622.00	53.49	68.20	-14.71	40.27	34.60	10.26	31.64	0.00	289	47	PEAK	2	5650.40	53.66	68.50	-14.84	40.44	34.60	10.28	31.66	0.00	289	47	PEAK	3	5719.60	62.73	110.79	-48.06	49.62	34.60	10.34	31.83	0.00	289	47	PEAK	4	5720.00	62.60	110.90	-48.30	49.49	34.60	10.34	31.83	0.00	289	47	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.12</td> <td>-----</td> <td>-----</td> <td>94.04</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>289</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	107.12	-----	-----	94.04	34.60	10.36	31.88	0.00	289	47	PEAK
	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5622.00	53.49	68.20	-14.71	40.27	34.60	10.26	31.64	0.00	289	47	PEAK																																																																																																											
2	5650.40	53.66	68.50	-14.84	40.44	34.60	10.28	31.66	0.00	289	47	PEAK																																																																																																											
3	5719.60	62.73	110.79	-48.06	49.62	34.60	10.34	31.83	0.00	289	47	PEAK																																																																																																											
4	5720.00	62.60	110.90	-48.30	49.49	34.60	10.34	31.83	0.00	289	47	PEAK																																																																																																											
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	107.12	-----	-----	94.04	34.60	10.36	31.88	0.00	289	47	PEAK																																																																																																											
Avg	Blank																																																																																																																						
		<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>99.34</td> <td>-----</td> <td>-----</td> <td>86.26</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>289</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	99.34	-----	-----	86.26	34.60	10.36	31.88	0.00	289	47	AVERAGE																																																																														
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	99.34	-----	-----	86.26	34.60	10.36	31.88	0.00	289	47	AVERAGE																																																																																																											



47																																																																																				
Mode	Band Edge																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full_5745MHz																																																																																			
ANT	CDD 8+5																																																																																			
Pol.	Vertical																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.80</td> <td>53.93</td> <td>68.20</td> <td>-14.27</td> <td>40.70</td> <td>34.60</td> <td>10.27</td> <td>31.64</td> <td>0.00</td> <td>146</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>51.71</td> <td>68.20</td> <td>-16.49</td> <td>38.48</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>146</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5713.60</td> <td>57.87</td> <td>109.11</td> <td>-51.24</td> <td>44.74</td> <td>34.60</td> <td>10.34</td> <td>31.81</td> <td>0.00</td> <td>146</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>58.70</td> <td>111.81</td> <td>-53.11</td> <td>45.59</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>146</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5628.80	53.93	68.20	-14.27	40.70	34.60	10.27	31.64	0.00	146	26	PEAK	2	5650.00	51.71	68.20	-16.49	38.48	34.60	10.28	31.65	0.00	146	26	PEAK	3	5713.60	57.87	109.11	-51.24	44.74	34.60	10.34	31.81	0.00	146	26	PEAK	4	5720.40	58.70	111.81	-53.11	45.59	34.60	10.34	31.83	0.00	146	26	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5628.80	53.93	68.20	-14.27	40.70	34.60	10.27	31.64	0.00	146	26	PEAK																																																																								
2	5650.00	51.71	68.20	-16.49	38.48	34.60	10.28	31.65	0.00	146	26	PEAK																																																																								
3	5713.60	57.87	109.11	-51.24	44.74	34.60	10.34	31.81	0.00	146	26	PEAK																																																																								
4	5720.40	58.70	111.81	-53.11	45.59	34.60	10.34	31.83	0.00	146	26	PEAK																																																																								
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.32</td> <td>-----</td> <td>-----</td> <td>94.24</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>146</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.32	-----	-----	94.24	34.60	10.36	31.88	0.00	146	26	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	107.32	-----	-----	94.24	34.60	10.36	31.88	0.00	146	26	PEAK																																																																								
Avg	Blank																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>99.54</td> <td>-----</td> <td>-----</td> <td>86.47</td> <td>34.60</td> <td>10.36</td> <td>31.89</td> <td>0.00</td> <td>146</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	99.54	-----	-----	86.47	34.60	10.36	31.89	0.00	146	26	AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	99.54	-----	-----	86.47	34.60	10.36	31.89	0.00	146	26	AVERAGE																																																																								



Mode	47																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full_5745MHz																																																																																																																																													
ANT	CDD 8+5																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>46.59</td> <td>74.00</td> <td>-27.41</td> <td>58.59</td> <td>35.00</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>46.95</td> <td>74.00</td> <td>-27.05</td> <td>55.03</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>62.47</td> <td>68.20</td> <td>-5.73</td> <td>62.54</td> <td>40.90</td> <td>18.36</td> <td>59.33</td> <td>0.00</td> <td>100</td> <td>329</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8043.00	46.59	74.00	-27.41	58.59	35.00	12.44	60.24	0.00	---	---	PEAK	2	11490.00	46.95	74.00	-27.05	55.03	38.19	14.91	61.18	0.00	---	---	PEAK	3	17235.00	62.47	68.20	-5.73	62.54	40.90	18.36	59.33	0.00	100	329	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>47.29</td> <td>74.00</td> <td>-26.71</td> <td>59.29</td> <td>35.00</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>55.61</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>63.55</td> <td>68.20</td> <td>-4.65</td> <td>63.62</td> <td>40.90</td> <td>18.36</td> <td>59.33</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8043.00	47.29	74.00	-26.71	59.29	35.00	12.44	60.24	0.00	---	---	PEAK	2	11490.00	47.53	74.00	-26.47	55.61	38.19	14.91	61.18	0.00	---	---	PEAK	3	17235.00	63.55	68.20	-4.65	63.62	40.90	18.36	59.33	0.00	100	252	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8043.00	46.59	74.00	-27.41	58.59	35.00	12.44	60.24	0.00	---	---	PEAK																																																																																																																																		
2	11490.00	46.95	74.00	-27.05	55.03	38.19	14.91	61.18	0.00	---	---	PEAK																																																																																																																																		
3	17235.00	62.47	68.20	-5.73	62.54	40.90	18.36	59.33	0.00	100	329	PEAK																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8043.00	47.29	74.00	-26.71	59.29	35.00	12.44	60.24	0.00	---	---	PEAK																																																																																																																																		
2	11490.00	47.53	74.00	-26.47	55.61	38.19	14.91	61.18	0.00	---	---	PEAK																																																																																																																																		
3	17235.00	63.55	68.20	-4.65	63.62	40.90	18.36	59.33	0.00	100	252	PEAK																																																																																																																																		



Mode	48																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full_5785MHz																																																																																																																																
ANT	CDD 8+5																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8099.00</td> <td>46.01</td> <td>74.00</td> <td>-27.99</td> <td>58.09</td> <td>35.00</td> <td>12.44</td> <td>60.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>46.42</td> <td>74.00</td> <td>-27.58</td> <td>54.34</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>59.70</td> <td>68.20</td> <td>-8.50</td> <td>59.75</td> <td>40.90</td> <td>18.44</td> <td>59.39</td> <td>0.00</td> <td>100</td> <td>324</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8099.00	46.01	74.00	-27.99	58.09	35.00	12.44	60.32	0.00	---	---	PEAK	2	11570.00	46.42	74.00	-27.58	54.34	38.27	14.97	61.16	0.00	---	---	PEAK	3	17355.00	59.70	68.20	-8.50	59.75	40.90	18.44	59.39	0.00	100	324	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.50</td> <td>42.44</td> <td>74.00</td> <td>-31.56</td> <td>50.36</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>64.99</td> <td>68.20</td> <td>-3.21</td> <td>65.03</td> <td>40.90</td> <td>18.44</td> <td>59.30</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11570.50	42.44	74.00	-31.56	50.36	38.27	14.97	61.16	0.00	---	---	Peak	2	17355.00	64.99	68.20	-3.21	65.03	40.90	18.44	59.30	0.00	100	119	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	8099.00	46.01	74.00	-27.99	58.09	35.00	12.44	60.32	0.00	---	---	PEAK																																																																																																																					
2	11570.00	46.42	74.00	-27.58	54.34	38.27	14.97	61.16	0.00	---	---	PEAK																																																																																																																					
3	17355.00	59.70	68.20	-8.50	59.75	40.90	18.44	59.39	0.00	100	324	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11570.50	42.44	74.00	-31.56	50.36	38.27	14.97	61.16	0.00	---	---	Peak																																																																																																																					
2	17355.00	64.99	68.20	-3.21	65.03	40.90	18.44	59.30	0.00	100	119	PEAK																																																																																																																					



49																																																																							
Mode	Band Edge - L																																																																						
U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz																																																																							
ANT	CDD 8+5																																																																						
Pol.	Horizontal																																																																						
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>56.27</td> <td>114.09</td> <td>-57.82</td> <td>43.27</td> <td>34.71</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>393</td> <td>51 PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>52.76</td> <td>105.47</td> <td>-52.71</td> <td>39.65</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>393</td> <td>51 PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>52.83</td> <td>68.35</td> <td>-15.52</td> <td>39.42</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>393</td> <td>51 PEAK</td> </tr> <tr> <td>4</td> <td>5988.40</td> <td>55.61</td> <td>68.20</td> <td>-12.59</td> <td>41.86</td> <td>35.35</td> <td>10.57</td> <td>32.17</td> <td>0.00</td> <td>393</td> <td>51 PEAK</td> </tr> </tbody> </table>	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5853.60	56.27	114.09	-57.82	43.27	34.71	10.45	32.16	0.00	393	51 PEAK	2	5874.40	52.76	105.47	-52.71	39.65	34.00	10.47	32.16	0.00	393	51 PEAK	3	5924.80	52.83	68.35	-15.52	39.42	35.05	10.52	32.16	0.00	393	51 PEAK	4	5988.40	55.61	68.20	-12.59	41.86	35.35	10.57	32.17	0.00	393	51 PEAK
Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																													
1	5853.60	56.27	114.09	-57.82	43.27	34.71	10.45	32.16	0.00	393	51 PEAK																																																												
2	5874.40	52.76	105.47	-52.71	39.65	34.00	10.47	32.16	0.00	393	51 PEAK																																																												
3	5924.80	52.83	68.35	-15.52	39.42	35.05	10.52	32.16	0.00	393	51 PEAK																																																												
4	5988.40	55.61	68.20	-12.59	41.86	35.35	10.57	32.17	0.00	393	51 PEAK																																																												
Avg	<table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.28</td> <td>-----</td> <td>-----</td> <td>94.29</td> <td>34.64</td> <td>10.42</td> <td>32.07</td> <td>0.00</td> <td>393</td> <td>51 PEAK</td> </tr> </tbody> </table>	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	107.28	-----	-----	94.29	34.64	10.42	32.07	0.00	393	51 PEAK																																				
Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																													
1	5825.00	107.28	-----	-----	94.29	34.64	10.42	32.07	0.00	393	51 PEAK																																																												
Blank																																																																							
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4660.00</td> <td>46.97</td> <td>54.00</td> <td>-7.03</td> <td>35.53</td> <td>34.10</td> <td>9.24</td> <td>31.90</td> <td>0.00</td> <td>393</td> <td>51 AVERAGE</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>99.26</td> <td>-----</td> <td>-----</td> <td>86.26</td> <td>34.65</td> <td>10.43</td> <td>32.08</td> <td>0.00</td> <td>393</td> <td>51 AVERAGE</td> </tr> </tbody> </table>	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4660.00	46.97	54.00	-7.03	35.53	34.10	9.24	31.90	0.00	393	51 AVERAGE	2	5825.00	99.26	-----	-----	86.26	34.65	10.43	32.08	0.00	393	51 AVERAGE																								
Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																													
1	4660.00	46.97	54.00	-7.03	35.53	34.10	9.24	31.90	0.00	393	51 AVERAGE																																																												
2	5825.00	99.26	-----	-----	86.26	34.65	10.43	32.08	0.00	393	51 AVERAGE																																																												






	49																																																																																																										
Mode	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz																																																																																																										
ANT	CDD 8+5																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>53.78</td> <td>111.36</td> <td>-57.58</td> <td>40.77</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>304</td> <td>12</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.00</td> <td>59.43</td> <td>110.40</td> <td>-50.97</td> <td>46.40</td> <td>34.73</td> <td>10.46</td> <td>32.16</td> <td>0.00</td> <td>304</td> <td>12</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>54.51</td> <td>68.94</td> <td>-14.43</td> <td>41.12</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>304</td> <td>12</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5964.40</td> <td>55.60</td> <td>68.20</td> <td>-12.60</td> <td>41.96</td> <td>35.26</td> <td>10.55</td> <td>32.17</td> <td>0.00</td> <td>304</td> <td>12</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.00	53.78	111.36	-57.58	40.77	34.72	10.45	32.16	0.00	304	12	PEAK	2	5856.00	59.43	110.40	-50.97	46.40	34.73	10.46	32.16	0.00	304	12	PEAK	3	5924.00	54.51	68.94	-14.43	41.12	35.04	10.51	32.16	0.00	304	12	PEAK	4	5964.40	55.60	68.20	-12.60	41.96	35.26	10.55	32.17	0.00	304	12	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.48</td> <td>-----</td> <td>-----</td> <td>93.49</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>304</td> <td>12</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	106.48	-----	-----	93.49	34.66	10.43	32.10	0.00	304	12	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5854.00	53.78	111.36	-57.58	40.77	34.72	10.45	32.16	0.00	304	12	PEAK																																																																																															
2	5856.00	59.43	110.40	-50.97	46.40	34.73	10.46	32.16	0.00	304	12	PEAK																																																																																															
3	5924.00	54.51	68.94	-14.43	41.12	35.04	10.51	32.16	0.00	304	12	PEAK																																																																																															
4	5964.40	55.60	68.20	-12.60	41.96	35.26	10.55	32.17	0.00	304	12	PEAK																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	106.48	-----	-----	93.49	34.66	10.43	32.10	0.00	304	12	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.57</td> <td>-----</td> <td>-----</td> <td>85.58</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>304</td> <td>12</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	98.57	-----	-----	85.58	34.66	10.43	32.10	0.00	304	12	AVERAGE																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	98.57	-----	-----	85.58	34.66	10.43	32.10	0.00	304	12	AVERAGE																																																																																															



Mode	49																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz																																																																																																																																													
ANT	CDD 8+5																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8158.30</td> <td>45.88</td> <td>74.00</td> <td>-28.12</td> <td>58.85</td> <td>35.80</td> <td>12.45</td> <td>60.42</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>46.67</td> <td>74.00</td> <td>-27.33</td> <td>54.43</td> <td>38.35</td> <td>15.02</td> <td>61.13</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>64.78</td> <td>68.20</td> <td>-3.42</td> <td>64.80</td> <td>40.90</td> <td>18.52</td> <td>59.44</td> <td>0.00</td> <td>102</td> <td>244</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8158.30	45.88	74.00	-28.12	58.85	35.80	12.45	60.42	0.00	---	---	Peak	2	11650.00	46.67	74.00	-27.33	54.43	38.35	15.02	61.13	0.00	---	---	PEAK	3	17475.00	64.78	68.20	-3.42	64.80	40.90	18.52	59.44	0.00	102	244	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8155.00</td> <td>43.37</td> <td>74.00</td> <td>-30.63</td> <td>55.53</td> <td>35.80</td> <td>12.45</td> <td>60.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11649.70</td> <td>40.56</td> <td>74.00</td> <td>-33.44</td> <td>48.32</td> <td>38.35</td> <td>15.02</td> <td>61.13</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>64.34</td> <td>68.20</td> <td>-3.86</td> <td>64.36</td> <td>40.90</td> <td>18.52</td> <td>59.44</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8155.00	43.37	74.00	-30.63	55.53	35.80	12.45	60.41	0.00	---	---	Peak	2	11649.70	40.56	74.00	-33.44	48.32	38.35	15.02	61.13	0.00	---	---	Peak	3	17475.00	64.34	68.20	-3.86	64.36	40.90	18.52	59.44	0.00	100	252	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8158.30	45.88	74.00	-28.12	58.85	35.80	12.45	60.42	0.00	---	---	Peak																																																																																																																																		
2	11650.00	46.67	74.00	-27.33	54.43	38.35	15.02	61.13	0.00	---	---	PEAK																																																																																																																																		
3	17475.00	64.78	68.20	-3.42	64.80	40.90	18.52	59.44	0.00	102	244	PEAK																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8155.00	43.37	74.00	-30.63	55.53	35.80	12.45	60.41	0.00	---	---	Peak																																																																																																																																		
2	11649.70	40.56	74.00	-33.44	48.32	38.35	15.02	61.13	0.00	---	---	Peak																																																																																																																																		
3	17475.00	64.34	68.20	-3.86	64.36	40.90	18.52	59.44	0.00	100	252	PEAK																																																																																																																																		

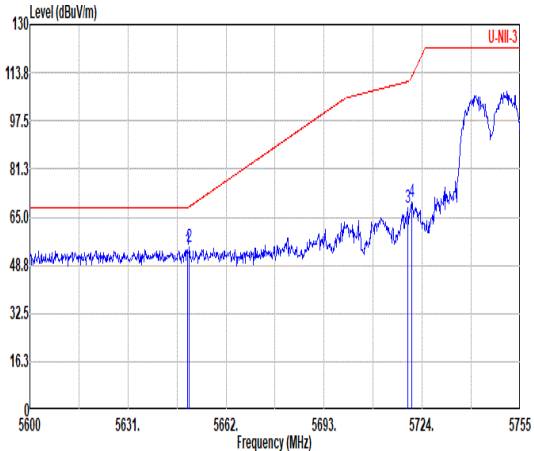
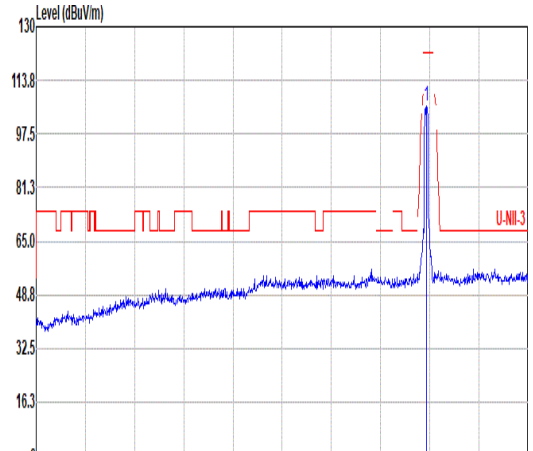
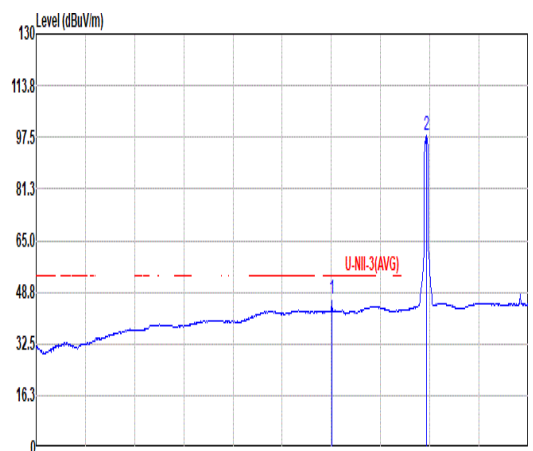


Mode	50																																																																																																									
	Band Edge - L																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz																																																																																																									
ANT	CDD 8+5																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																								
Peak	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.91</td> <td>54.19</td> <td>68.20</td> <td>-14.01</td> <td>40.96</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> <tr> <td>2</td> <td>5650.38</td> <td>54.82</td> <td>68.48</td> <td>-13.66</td> <td>41.60</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> <tr> <td>3</td> <td>5719.51</td> <td>68.41</td> <td>110.76</td> <td>-42.35</td> <td>55.30</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> <tr> <td>4</td> <td>5720.59</td> <td>70.30</td> <td>112.25</td> <td>-41.95</td> <td>57.19</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5649.91	54.19	68.20	-14.01	40.96	34.60	10.28	31.65	0.00	300	52 PEAK	2	5650.38	54.82	68.48	-13.66	41.60	34.60	10.28	31.66	0.00	300	52 PEAK	3	5719.51	68.41	110.76	-42.35	55.30	34.60	10.34	31.83	0.00	300	52 PEAK	4	5720.59	70.30	112.25	-41.95	57.19	34.60	10.34	31.83	0.00	300	52 PEAK	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>106.15</td> <td>-----</td> <td>-----</td> <td>93.10</td> <td>34.60</td> <td>10.37</td> <td>31.92</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5755.00	106.15	-----	-----	93.10	34.60	10.37	31.92	0.00	300	52 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5649.91	54.19	68.20	-14.01	40.96	34.60	10.28	31.65	0.00	300	52 PEAK																																																																																															
2	5650.38	54.82	68.48	-13.66	41.60	34.60	10.28	31.66	0.00	300	52 PEAK																																																																																															
3	5719.51	68.41	110.76	-42.35	55.30	34.60	10.34	31.83	0.00	300	52 PEAK																																																																																															
4	5720.59	70.30	112.25	-41.95	57.19	34.60	10.34	31.83	0.00	300	52 PEAK																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5755.00	106.15	-----	-----	93.10	34.60	10.37	31.92	0.00	300	52 PEAK																																																																																															
Avg	Blank	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4606.00</td> <td>46.43</td> <td>54.00</td> <td>-7.57</td> <td>35.07</td> <td>34.10</td> <td>9.16</td> <td>31.90</td> <td>0.00</td> <td>300</td> <td>52 Average</td> </tr> <tr> <td>2</td> <td>5755.00</td> <td>98.15</td> <td>-----</td> <td>-----</td> <td>85.10</td> <td>34.60</td> <td>10.37</td> <td>31.92</td> <td>0.00</td> <td>300</td> <td>52 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4606.00	46.43	54.00	-7.57	35.07	34.10	9.16	31.90	0.00	300	52 Average	2	5755.00	98.15	-----	-----	85.10	34.60	10.37	31.92	0.00	300	52 AVERAGE																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	4606.00	46.43	54.00	-7.57	35.07	34.10	9.16	31.90	0.00	300	52 Average																																																																																															
2	5755.00	98.15	-----	-----	85.10	34.60	10.37	31.92	0.00	300	52 AVERAGE																																																																																															



Mode	50																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz																																																																															
ANT	CDD 8+5																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>52.46</td> <td>111.26</td> <td>-58.00</td> <td>39.45</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> <tr> <td>2</td> <td>5874.34</td> <td>54.08</td> <td>105.48</td> <td>-51.40</td> <td>40.97</td> <td>34.80</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> <tr> <td>3</td> <td>5923.48</td> <td>53.57</td> <td>69.32</td> <td>-15.75</td> <td>40.18</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> <tr> <td>4</td> <td>5937.72</td> <td>54.77</td> <td>68.20</td> <td>-13.43</td> <td>41.27</td> <td>35.13</td> <td>10.53</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>52 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	52.46	111.26	-58.00	39.45	34.72	10.45	32.16	0.00	300	52 PEAK	2	5874.34	54.08	105.48	-51.40	40.97	34.80	10.47	32.16	0.00	300	52 PEAK	3	5923.48	53.57	69.32	-15.75	40.18	35.04	10.51	32.16	0.00	300	52 PEAK	4	5937.72	54.77	68.20	-13.43	41.27	35.13	10.53	32.16	0.00	300	52 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.84	52.46	111.26	-58.00	39.45	34.72	10.45	32.16	0.00	300	52 PEAK																																																																					
2	5874.34	54.08	105.48	-51.40	40.97	34.80	10.47	32.16	0.00	300	52 PEAK																																																																					
3	5923.48	53.57	69.32	-15.75	40.18	35.04	10.51	32.16	0.00	300	52 PEAK																																																																					
4	5937.72	54.77	68.20	-13.43	41.27	35.13	10.53	32.16	0.00	300	52 PEAK																																																																					

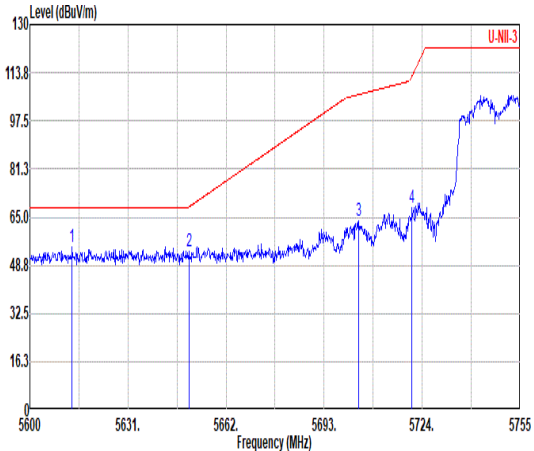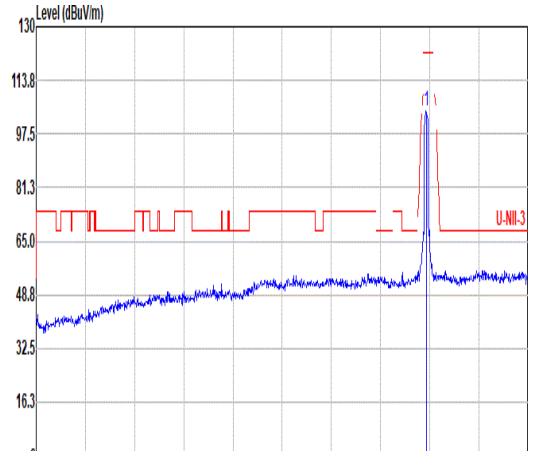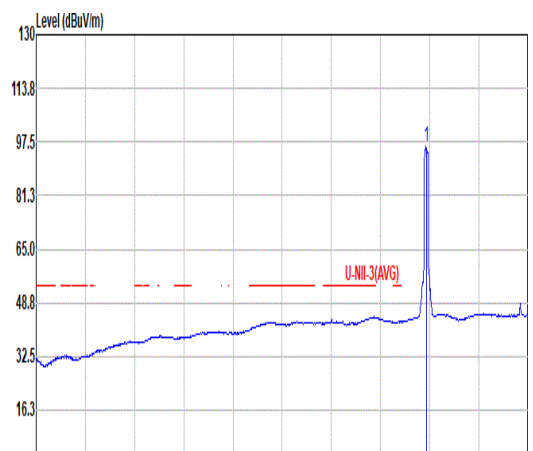

Mode	50																																																																																								
	Band Edge - L																																																																																								
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz																																																																																								
ANT	CDD 8+5																																																																																								
Pol.	Vertical	Fundamental																																																																																							
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>5613.33</th> <th>54.80</th> <th>68.20</th> <th>-13.40</th> <th>41.58</th> <th>34.60</th> <th>10.26</th> <th>31.64</th> <th>0.00</th> <th>151</th> <th>36</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>5650.22</td> <td>53.65</td> <td>68.36</td> <td>-14.71</td> <td>40.43</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.01</td> <td>63.64</td> <td>106.42</td> <td>-42.78</td> <td>50.50</td> <td>34.60</td> <td>10.33</td> <td>31.79</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.75</td> <td>68.38</td> <td>112.60</td> <td>-44.22</td> <td>55.27</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	5613.33	54.80	68.20	-13.40	41.58	34.60	10.26	31.64	0.00	151	36	PEAK	2	5650.22	53.65	68.36	-14.71	40.43	34.60	10.28	31.66	0.00	151	36	PEAK	3	5704.01	63.64	106.42	-42.78	50.50	34.60	10.33	31.79	0.00	151	36	PEAK	4	5720.75	68.38	112.60	-44.22	55.27	34.60	10.34	31.83	0.00	151	36	PEAK	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>104.52</td> <td>-----</td> <td>-----</td> <td>91.46</td> <td>34.60</td> <td>10.37</td> <td>31.91</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	5755.00	104.52	-----	-----	91.46	34.60	10.37	31.91	0.00	151	36	PEAK
	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
1	5613.33	54.80	68.20	-13.40	41.58	34.60	10.26	31.64	0.00	151	36	PEAK																																																																													
2	5650.22	53.65	68.36	-14.71	40.43	34.60	10.28	31.66	0.00	151	36	PEAK																																																																													
3	5704.01	63.64	106.42	-42.78	50.50	34.60	10.33	31.79	0.00	151	36	PEAK																																																																													
4	5720.75	68.38	112.60	-44.22	55.27	34.60	10.34	31.83	0.00	151	36	PEAK																																																																													
Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
1	5755.00	104.52	-----	-----	91.46	34.60	10.37	31.91	0.00	151	36	PEAK																																																																													
Avg	Blank	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.37</td> <td>-----</td> <td>-----</td> <td>83.31</td> <td>34.60</td> <td>10.37</td> <td>31.91</td> <td>0.00</td> <td>151</td> <td>36</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	1	5755.00	96.37	-----	-----	83.31	34.60	10.37	31.91	0.00	151	36	AVERAGE																																																															
Peak	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
1	5755.00	96.37	-----	-----	83.31	34.60	10.37	31.91	0.00	151	36	AVERAGE																																																																													



Mode	50																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz																																																																																				
ANT	CDD 8+5																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>52.71</td> <td>111.26</td> <td>-58.55</td> <td>39.70</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.81</td> <td>54.24</td> <td>106.19</td> <td>-51.95</td> <td>41.14</td> <td>34.79</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.46</td> <td>52.76</td> <td>68.60</td> <td>-15.84</td> <td>39.35</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.33</td> <td>54.81</td> <td>68.20</td> <td>-13.39</td> <td>41.37</td> <td>35.08</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>151</td> <td>36</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.84	52.71	111.26	-58.55	39.70	34.72	10.45	32.16	0.00	151	36	PEAK	2	5871.81	54.24	106.19	-51.95	41.14	34.79	10.47	32.16	0.00	151	36	PEAK	3	5924.46	52.76	68.60	-15.84	39.35	35.05	10.52	32.16	0.00	151	36	PEAK	4	5929.33	54.81	68.20	-13.39	41.37	35.08	10.52	32.16	0.00	151	36	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.84	52.71	111.26	-58.55	39.70	34.72	10.45	32.16	0.00	151	36	PEAK																																																																									
2	5871.81	54.24	106.19	-51.95	41.14	34.79	10.47	32.16	0.00	151	36	PEAK																																																																									
3	5924.46	52.76	68.60	-15.84	39.35	35.05	10.52	32.16	0.00	151	36	PEAK																																																																									
4	5929.33	54.81	68.20	-13.39	41.37	35.08	10.52	32.16	0.00	151	36	PEAK																																																																									



Mode	50																																																																																																																																																								
	Harmonic																																																																																																																																																								
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz																																																																																																																																																								
ANT	CDD 8+5																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8057.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>57.59</td> <td>35.00</td> <td>12.44</td> <td>60.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>46.87</td> <td>74.00</td> <td>-27.13</td> <td>54.92</td> <td>38.21</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>55.88</td> <td>68.20</td> <td>-12.32</td> <td>55.95</td> <td>40.90</td> <td>18.30</td> <td>59.35</td> <td>0.00</td> <td>100</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	8057.00	45.57	74.00	-28.43	57.59	35.00	12.44	60.26	0.00	---	---	PEAK	2	11510.00	46.87	74.00	-27.13	54.92	38.21	14.92	61.18	0.00	---	---	PEAK	3	17265.00	55.88	68.20	-12.32	55.95	40.90	18.30	59.35	0.00	100	246	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8057.00</td> <td>44.84</td> <td>74.00</td> <td>-29.16</td> <td>56.86</td> <td>35.80</td> <td>12.44</td> <td>60.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>47.22</td> <td>74.00</td> <td>-26.78</td> <td>55.27</td> <td>38.21</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11510.00</td> <td>36.12</td> <td>54.00</td> <td>-17.88</td> <td>44.18</td> <td>38.20</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17265.00</td> <td>62.16</td> <td>68.20</td> <td>-6.04</td> <td>62.22</td> <td>40.90</td> <td>18.39</td> <td>59.35</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	8057.00	44.84	74.00	-29.16	56.86	35.80	12.44	60.26	0.00	---	---	PEAK	2	11510.00	47.22	74.00	-26.78	55.27	38.21	14.92	61.18	0.00	300	360	PEAK	3	11510.00	36.12	54.00	-17.88	44.18	38.20	14.92	61.18	0.00	300	360	AVERAGE	4	17265.00	62.16	68.20	-6.04	62.22	40.90	18.39	59.35	0.00	100	252	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																	
1	8057.00	45.57	74.00	-28.43	57.59	35.00	12.44	60.26	0.00	---	---	PEAK																																																																																																																																													
2	11510.00	46.87	74.00	-27.13	54.92	38.21	14.92	61.18	0.00	---	---	PEAK																																																																																																																																													
3	17265.00	55.88	68.20	-12.32	55.95	40.90	18.30	59.35	0.00	100	246	PEAK																																																																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																	
1	8057.00	44.84	74.00	-29.16	56.86	35.80	12.44	60.26	0.00	---	---	PEAK																																																																																																																																													
2	11510.00	47.22	74.00	-26.78	55.27	38.21	14.92	61.18	0.00	300	360	PEAK																																																																																																																																													
3	11510.00	36.12	54.00	-17.88	44.18	38.20	14.92	61.18	0.00	300	360	AVERAGE																																																																																																																																													
4	17265.00	62.16	68.20	-6.04	62.22	40.90	18.39	59.35	0.00	100	252	PEAK																																																																																																																																													



	51																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz																																																																																																													
ANT	CDD 8+5																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5616.40</td> <td>53.94</td> <td>68.20</td> <td>-14.26</td> <td>40.72</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>298</td> <td>52 PEAK</td> </tr> <tr> <td>2</td> <td>5651.20</td> <td>52.71</td> <td>69.09</td> <td>-16.38</td> <td>39.48</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>298</td> <td>52 PEAK</td> </tr> <tr> <td>3</td> <td>5702.40</td> <td>53.53</td> <td>105.97</td> <td>-52.44</td> <td>40.38</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>298</td> <td>52 PEAK</td> </tr> <tr> <td>4</td> <td>5721.20</td> <td>56.87</td> <td>113.64</td> <td>-56.77</td> <td>43.76</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>298</td> <td>52 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5616.40	53.94	68.20	-14.26	40.72	34.60	10.26	31.64	0.00	298	52 PEAK	2	5651.20	52.71	69.09	-16.38	39.48	34.60	10.29	31.66	0.00	298	52 PEAK	3	5702.40	53.53	105.97	-52.44	40.38	34.60	10.33	31.78	0.00	298	52 PEAK	4	5721.20	56.87	113.64	-56.77	43.76	34.60	10.34	31.83	0.00	298	52 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>105.40</td> <td>-----</td> <td>-----</td> <td>92.40</td> <td>34.60</td> <td>10.40</td> <td>32.00</td> <td>0.00</td> <td>298</td> <td>52 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	105.40	-----	-----	92.40	34.60	10.40	32.00	0.00	298	52 PEAK
	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5616.40	53.94	68.20	-14.26	40.72	34.60	10.26	31.64	0.00	298	52 PEAK																																																																																																			
2	5651.20	52.71	69.09	-16.38	39.48	34.60	10.29	31.66	0.00	298	52 PEAK																																																																																																			
3	5702.40	53.53	105.97	-52.44	40.38	34.60	10.33	31.78	0.00	298	52 PEAK																																																																																																			
4	5721.20	56.87	113.64	-56.77	43.76	34.60	10.34	31.83	0.00	298	52 PEAK																																																																																																			
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5795.00	105.40	-----	-----	92.40	34.60	10.40	32.00	0.00	298	52 PEAK																																																																																																			
	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4636.00</td> <td>46.64</td> <td>54.00</td> <td>-7.36</td> <td>35.23</td> <td>34.10</td> <td>9.21</td> <td>31.90</td> <td>0.00</td> <td>298</td> <td>52 Peak</td> </tr> <tr> <td>2</td> <td>5795.00</td> <td>97.40</td> <td>-----</td> <td>-----</td> <td>84.41</td> <td>34.60</td> <td>10.41</td> <td>32.02</td> <td>0.00</td> <td>298</td> <td>52 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4636.00	46.64	54.00	-7.36	35.23	34.10	9.21	31.90	0.00	298	52 Peak	2	5795.00	97.40	-----	-----	84.41	34.60	10.41	32.02	0.00	298	52 AVERAGE																																																												
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	4636.00	46.64	54.00	-7.36	35.23	34.10	9.21	31.90	0.00	298	52 Peak																																																																																																			
2	5795.00	97.40	-----	-----	84.41	34.60	10.41	32.02	0.00	298	52 AVERAGE																																																																																																			



51																																																																																				
Mode	Band Edge - L																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz																																																																																			
ANT	CDD 8+5																																																																																			
Pol.	Vertical																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5624.00</td> <td>54.25</td> <td>68.20</td> <td>-13.95</td> <td>41.03</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>52.90</td> <td>68.00</td> <td>-15.90</td> <td>39.67</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.40</td> <td>54.72</td> <td>105.97</td> <td>-51.25</td> <td>41.57</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>53.70</td> <td>110.90</td> <td>-57.20</td> <td>40.59</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5624.00	54.25	68.20	-13.95	41.03	34.60	10.26	31.64	0.00	100	355	PEAK	2	5650.00	52.90	68.00	-15.90	39.67	34.60	10.29	31.66	0.00	100	355	PEAK	3	5702.40	54.72	105.97	-51.25	41.57	34.60	10.33	31.78	0.00	100	355	PEAK	4	5720.00	53.70	110.90	-57.20	40.59	34.60	10.34	31.83	0.00	100	355	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5624.00	54.25	68.20	-13.95	41.03	34.60	10.26	31.64	0.00	100	355	PEAK																																																																								
2	5650.00	52.90	68.00	-15.90	39.67	34.60	10.29	31.66	0.00	100	355	PEAK																																																																								
3	5702.40	54.72	105.97	-51.25	41.57	34.60	10.33	31.78	0.00	100	355	PEAK																																																																								
4	5720.00	53.70	110.90	-57.20	40.59	34.60	10.34	31.83	0.00	100	355	PEAK																																																																								
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>105.36</td> <td>-----</td> <td>-----</td> <td>92.37</td> <td>34.60</td> <td>10.40</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	105.36	-----	-----	92.37	34.60	10.40	32.01	0.00	100	355	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5795.00	105.36	-----	-----	92.37	34.60	10.40	32.01	0.00	100	355	PEAK																																																																								
Avg	Blank																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>96.36</td> <td>-----</td> <td>-----</td> <td>83.37</td> <td>34.60</td> <td>10.40</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>355</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	96.36	-----	-----	83.37	34.60	10.40	32.01	0.00	100	355	AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5795.00	96.36	-----	-----	83.37	34.60	10.40	32.01	0.00	100	355	AVERAGE																																																																								



Mode	51																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz																																																																																				
ANT	CDD 8+5																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>57.69</td> <td>113.18</td> <td>-55.49</td> <td>44.68</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5863.20</td> <td>57.81</td> <td>108.60</td> <td>-50.79</td> <td>44.76</td> <td>34.75</td> <td>10.46</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>52.17</td> <td>68.35</td> <td>-16.18</td> <td>38.76</td> <td>35.05</td> <td>18.52</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5953.60</td> <td>55.39</td> <td>68.20</td> <td>-12.81</td> <td>41.81</td> <td>35.21</td> <td>10.54</td> <td>32.17</td> <td>0.00</td> <td>100</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	57.69	113.18	-55.49	44.68	34.72	10.45	32.16	0.00	100	355	PEAK	2	5863.20	57.81	108.60	-50.79	44.76	34.75	10.46	32.16	0.00	100	355	PEAK	3	5924.80	52.17	68.35	-16.18	38.76	35.05	18.52	32.16	0.00	100	355	PEAK	4	5953.60	55.39	68.20	-12.81	41.81	35.21	10.54	32.17	0.00	100	355	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																											
1	5854.00	57.69	113.18	-55.49	44.68	34.72	10.45	32.16	0.00	100	355	PEAK																																																																									
2	5863.20	57.81	108.60	-50.79	44.76	34.75	10.46	32.16	0.00	100	355	PEAK																																																																									
3	5924.80	52.17	68.35	-16.18	38.76	35.05	18.52	32.16	0.00	100	355	PEAK																																																																									
4	5953.60	55.39	68.20	-12.81	41.81	35.21	10.54	32.17	0.00	100	355	PEAK																																																																									



Mode	51																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz																																																																																																																																													
ANT	CDD 8+5																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8113.00</td> <td>44.71</td> <td>74.00</td> <td>-29.29</td> <td>56.81</td> <td>35.00</td> <td>12.45</td> <td>60.35</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>46.77</td> <td>74.00</td> <td>-27.23</td> <td>54.65</td> <td>38.29</td> <td>14.98</td> <td>61.15</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>51.54</td> <td>68.20</td> <td>-16.66</td> <td>51.58</td> <td>40.90</td> <td>18.47</td> <td>59.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8113.00	44.71	74.00	-29.29	56.81	35.00	12.45	60.35	0.00	---	---	PEAK	2	11590.00	46.77	74.00	-27.23	54.65	38.29	14.98	61.15	0.00	---	---	PEAK	3	17385.00	51.54	68.20	-16.66	51.58	40.90	18.47	59.41	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8113.00</td> <td>44.77</td> <td>74.00</td> <td>-29.23</td> <td>56.87</td> <td>35.00</td> <td>12.45</td> <td>60.35</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>46.30</td> <td>74.00</td> <td>-27.70</td> <td>54.18</td> <td>38.29</td> <td>14.98</td> <td>61.15</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>61.57</td> <td>68.20</td> <td>-6.63</td> <td>61.62</td> <td>40.90</td> <td>18.45</td> <td>59.40</td> <td>0.00</td> <td>100</td> <td>256</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8113.00	44.77	74.00	-29.23	56.87	35.00	12.45	60.35	0.00	---	---	PEAK	2	11590.00	46.30	74.00	-27.70	54.18	38.29	14.98	61.15	0.00	---	---	PEAK	3	17385.00	61.57	68.20	-6.63	61.62	40.90	18.45	59.40	0.00	100	256	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8113.00	44.71	74.00	-29.29	56.81	35.00	12.45	60.35	0.00	---	---	PEAK																																																																																																																																		
2	11590.00	46.77	74.00	-27.23	54.65	38.29	14.98	61.15	0.00	---	---	PEAK																																																																																																																																		
3	17385.00	51.54	68.20	-16.66	51.58	40.90	18.47	59.41	0.00	---	---	PEAK																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	8113.00	44.77	74.00	-29.23	56.87	35.00	12.45	60.35	0.00	---	---	PEAK																																																																																																																																		
2	11590.00	46.30	74.00	-27.70	54.18	38.29	14.98	61.15	0.00	---	---	PEAK																																																																																																																																		
3	17385.00	61.57	68.20	-6.63	61.62	40.90	18.45	59.40	0.00	100	256	PEAK																																																																																																																																		



52																																																																																
Mode	Band Edge - L																																																																															
U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																																
ANT	CDD 8+5																																																																															
Pol.	Horizontal																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5650.00</td> <td>58.20</td> <td>68.20</td> <td>-10.00</td> <td>44.97</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>58.76</td> <td>68.50</td> <td>-9.74</td> <td>45.54</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> <tr> <td>3</td> <td>5700.80</td> <td>69.23</td> <td>105.52</td> <td>-36.29</td> <td>56.08</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>70.46</td> <td>110.90</td> <td>-40.44</td> <td>57.35</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5650.00	58.20	68.20	-10.00	44.97	34.60	10.28	31.65	0.00	300	51 PEAK	2	5650.40	58.76	68.50	-9.74	45.54	34.60	10.28	31.66	0.00	300	51 PEAK	3	5700.80	69.23	105.52	-36.29	56.08	34.60	10.33	31.78	0.00	300	51 PEAK	4	5720.00	70.46	110.90	-40.44	57.35	34.60	10.34	31.83	0.00	300	51 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5650.00	58.20	68.20	-10.00	44.97	34.60	10.28	31.65	0.00	300	51 PEAK																																																																					
2	5650.40	58.76	68.50	-9.74	45.54	34.60	10.28	31.66	0.00	300	51 PEAK																																																																					
3	5700.80	69.23	105.52	-36.29	56.08	34.60	10.33	31.78	0.00	300	51 PEAK																																																																					
4	5720.00	70.46	110.90	-40.44	57.35	34.60	10.34	31.83	0.00	300	51 PEAK																																																																					
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>105.56</td> <td>-----</td> <td>-----</td> <td>92.53</td> <td>34.60</td> <td>10.38</td> <td>31.95</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5775.00	105.56	-----	-----	92.53	34.60	10.38	31.95	0.00	300	51 PEAK																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5775.00	105.56	-----	-----	92.53	34.60	10.38	31.95	0.00	300	51 PEAK																																																																					
Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4618.00</td> <td>47.79</td> <td>54.00</td> <td>-6.21</td> <td>36.41</td> <td>34.10</td> <td>9.18</td> <td>31.90</td> <td>0.00</td> <td>300</td> <td>51 Peak</td> </tr> <tr> <td>2</td> <td>5775.00</td> <td>95.84</td> <td>-----</td> <td>-----</td> <td>82.81</td> <td>34.60</td> <td>10.38</td> <td>31.95</td> <td>0.00</td> <td>300</td> <td>51 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4618.00	47.79	54.00	-6.21	36.41	34.10	9.18	31.90	0.00	300	51 Peak	2	5775.00	95.84	-----	-----	82.81	34.60	10.38	31.95	0.00	300	51 AVERAGE																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	4618.00	47.79	54.00	-6.21	36.41	34.10	9.18	31.90	0.00	300	51 Peak																																																																					
2	5775.00	95.84	-----	-----	82.81	34.60	10.38	31.95	0.00	300	51 AVERAGE																																																																					



Mode	52																																																																															
	Band Edge - L																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																															
ANT	CDD 8+5																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.20</td> <td>65.25</td> <td>115.00</td> <td>-49.75</td> <td>52.25</td> <td>34.71</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> <tr> <td>2</td> <td>5859.20</td> <td>68.27</td> <td>109.72</td> <td>-41.45</td> <td>55.23</td> <td>34.74</td> <td>10.46</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> <tr> <td>3</td> <td>5924.40</td> <td>55.17</td> <td>68.64</td> <td>-13.47</td> <td>41.76</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> <tr> <td>4</td> <td>5932.40</td> <td>56.17</td> <td>68.20</td> <td>-12.03</td> <td>42.72</td> <td>35.09</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>51 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5853.20	65.25	115.00	-49.75	52.25	34.71	10.45	32.16	0.00	300	51 PEAK	2	5859.20	68.27	109.72	-41.45	55.23	34.74	10.46	32.16	0.00	300	51 PEAK	3	5924.40	55.17	68.64	-13.47	41.76	35.05	10.52	32.16	0.00	300	51 PEAK	4	5932.40	56.17	68.20	-12.03	42.72	35.09	10.52	32.16	0.00	300	51 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																									
1	5853.20	65.25	115.00	-49.75	52.25	34.71	10.45	32.16	0.00	300	51 PEAK																																																																					
2	5859.20	68.27	109.72	-41.45	55.23	34.74	10.46	32.16	0.00	300	51 PEAK																																																																					
3	5924.40	55.17	68.64	-13.47	41.76	35.05	10.52	32.16	0.00	300	51 PEAK																																																																					
4	5932.40	56.17	68.20	-12.03	42.72	35.09	10.52	32.16	0.00	300	51 PEAK																																																																					



52																																																																									
Band Edge - L																																																																									
U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																									
ANT CDD 8+5																																																																									
Pol.	Vertical																																																																								
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 5775.00 MHz. The plot includes a red limit line and a blue signal trace. The peak level is 103.56 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5650.00</td> <td>58.32</td> <td>68.20</td> <td>-9.88</td> <td>45.09</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>58.32</td> <td>68.20</td> <td>-9.88</td> <td>45.09</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5789.20</td> <td>70.21</td> <td>107.88</td> <td>-37.67</td> <td>57.08</td> <td>34.60</td> <td>10.33</td> <td>31.00</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>70.25</td> <td>111.81</td> <td>-41.56</td> <td>57.14</td> <td>34.60</td> <td>10.34</td> <td>31.03</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5650.00	58.32	68.20	-9.88	45.09	34.60	10.28	31.65	0.00	251	360	PEAK	2	5650.00	58.32	68.20	-9.88	45.09	34.60	10.28	31.65	0.00	251	360	PEAK	3	5789.20	70.21	107.88	-37.67	57.08	34.60	10.33	31.00	0.00	251	360	PEAK	4	5720.40	70.25	111.81	-41.56	57.14	34.60	10.34	31.03	0.00	251	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5650.00	58.32	68.20	-9.88	45.09	34.60	10.28	31.65	0.00	251	360	PEAK																																																													
2	5650.00	58.32	68.20	-9.88	45.09	34.60	10.28	31.65	0.00	251	360	PEAK																																																													
3	5789.20	70.21	107.88	-37.67	57.08	34.60	10.33	31.00	0.00	251	360	PEAK																																																													
4	5720.40	70.25	111.81	-41.56	57.14	34.60	10.34	31.03	0.00	251	360	PEAK																																																													
	Fundamental																																																																								
	<p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 5775.00 MHz. The plot includes a red limit line and a blue signal trace. The peak level is 103.56 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>103.56</td> <td>-----</td> <td>-----</td> <td>90.51</td> <td>34.60</td> <td>10.37</td> <td>31.92</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5775.00	103.56	-----	-----	90.51	34.60	10.37	31.92	0.00	251	360	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5775.00	103.56	-----	-----	90.51	34.60	10.37	31.92	0.00	251	360	PEAK																																																													
Avg	Blank																																																																								
	<p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 4618.00 MHz. The plot includes a red limit line and a blue signal trace. The peak level is 94.13 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4618.00</td> <td>45.25</td> <td>54.00</td> <td>-8.75</td> <td>33.87</td> <td>34.10</td> <td>9.18</td> <td>31.90</td> <td>0.00</td> <td>251</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5775.00</td> <td>94.13</td> <td>-----</td> <td>-----</td> <td>81.10</td> <td>34.60</td> <td>10.38</td> <td>31.95</td> <td>0.00</td> <td>251</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	4618.00	45.25	54.00	-8.75	33.87	34.10	9.18	31.90	0.00	251	360	Average	2	5775.00	94.13	-----	-----	81.10	34.60	10.38	31.95	0.00	251	360	AVERAGE																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	4618.00	45.25	54.00	-8.75	33.87	34.10	9.18	31.90	0.00	251	360	Average																																																													
2	5775.00	94.13	-----	-----	81.10	34.60	10.38	31.95	0.00	251	360	AVERAGE																																																													



Mode	52																																																																		
	Band Edge - R																																																																		
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																		
ANT	CDD 8+5																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>66.97</td> <td>114.09</td> <td>-47.12</td> <td>53.97</td> <td>34.71</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.80</td> <td>67.62</td> <td>109.27</td> <td>-41.65</td> <td>54.58</td> <td>34.74</td> <td>10.46</td> <td>32.16</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5921.20</td> <td>56.38</td> <td>71.01</td> <td>-14.63</td> <td>43.00</td> <td>35.03</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5943.20</td> <td>55.50</td> <td>68.20</td> <td>-12.70</td> <td>41.90</td> <td>35.16</td> <td>10.53</td> <td>32.17</td> <td>0.00</td> <td>251</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5853.60	66.97	114.09	-47.12	53.97	34.71	10.45	32.16	0.00	251	360	PEAK	2	5868.80	67.62	109.27	-41.65	54.58	34.74	10.46	32.16	0.00	251	360	PEAK	3	5921.20	56.38	71.01	-14.63	43.00	35.03	10.51	32.16	0.00	251	360	PEAK	4	5943.20	55.50	68.20	-12.70	41.90	35.16	10.53	32.17	0.00	251	360	PEAK	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5853.60	66.97	114.09	-47.12	53.97	34.71	10.45	32.16	0.00	251	360	PEAK																																																							
2	5868.80	67.62	109.27	-41.65	54.58	34.74	10.46	32.16	0.00	251	360	PEAK																																																							
3	5921.20	56.38	71.01	-14.63	43.00	35.03	10.51	32.16	0.00	251	360	PEAK																																																							
4	5943.20	55.50	68.20	-12.70	41.90	35.16	10.53	32.17	0.00	251	360	PEAK																																																							



Mode	52																																																																																																																																																										
	Harmonic																																																																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz																																																																																																																																																										
ANT	CDD 8+5																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8085.00</td> <td>44.23</td> <td>74.00</td> <td>-29.77</td> <td>56.29</td> <td>35.00</td> <td>12.44</td> <td>60.30</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>46.35</td> <td>74.00</td> <td>-27.65</td> <td>54.31</td> <td>38.25</td> <td>14.95</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>57.06</td> <td>68.20</td> <td>-11.14</td> <td>57.12</td> <td>40.90</td> <td>18.41</td> <td>59.37</td> <td>0.00</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8085.00	44.23	74.00	-29.77	56.29	35.00	12.44	60.30	0.00	---	---	PEAK	2	11550.00	46.35	74.00	-27.65	54.31	38.25	14.95	61.16	0.00	---	---	PEAK	3	17325.00	57.06	68.20	-11.14	57.12	40.90	18.41	59.37	0.00	100	243	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8085.00</td> <td>45.42</td> <td>74.00</td> <td>-28.58</td> <td>57.48</td> <td>35.00</td> <td>12.44</td> <td>60.30</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>47.13</td> <td>74.00</td> <td>-26.87</td> <td>55.09</td> <td>38.25</td> <td>14.95</td> <td>61.16</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11550.00</td> <td>36.13</td> <td>54.00</td> <td>-17.87</td> <td>44.18</td> <td>38.21</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17325.00</td> <td>61.93</td> <td>68.20</td> <td>-6.27</td> <td>62.00</td> <td>40.90</td> <td>18.39</td> <td>59.36</td> <td>0.00</td> <td>100</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8085.00	45.42	74.00	-28.58	57.48	35.00	12.44	60.30	0.00	---	---	PEAK	2	11550.00	47.13	74.00	-26.87	55.09	38.25	14.95	61.16	0.00	100	360	PEAK	3	11550.00	36.13	54.00	-17.87	44.18	38.21	14.92	61.18	0.00	100	360	AVERAGE	4	17325.00	61.93	68.20	-6.27	62.00	40.90	18.39	59.36	0.00	100	253	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																	
1	8085.00	44.23	74.00	-29.77	56.29	35.00	12.44	60.30	0.00	---	---	PEAK																																																																																																																																															
2	11550.00	46.35	74.00	-27.65	54.31	38.25	14.95	61.16	0.00	---	---	PEAK																																																																																																																																															
3	17325.00	57.06	68.20	-11.14	57.12	40.90	18.41	59.37	0.00	100	243	PEAK																																																																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																	
1	8085.00	45.42	74.00	-28.58	57.48	35.00	12.44	60.30	0.00	---	---	PEAK																																																																																																																																															
2	11550.00	47.13	74.00	-26.87	55.09	38.25	14.95	61.16	0.00	100	360	PEAK																																																																																																																																															
3	11550.00	36.13	54.00	-17.87	44.18	38.21	14.92	61.18	0.00	100	360	AVERAGE																																																																																																																																															
4	17325.00	61.93	68.20	-6.27	62.00	40.90	18.39	59.36	0.00	100	253	PEAK																																																																																																																																															






53																																																																																				
Mode	Band Edge																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU26/0_5745MHz																																																																																			
ANT	CDD 8+5																																																																																			
Pol.	Horizontal																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5624.40</td> <td>55.11</td> <td>68.20</td> <td>-13.09</td> <td>41.89</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>52.04</td> <td>68.20</td> <td>-16.16</td> <td>38.81</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.00</td> <td>53.95</td> <td>105.86</td> <td>-51.91</td> <td>40.80</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>51.55</td> <td>110.90</td> <td>-59.35</td> <td>38.44</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5624.40	55.11	68.20	-13.09	41.89	34.60	10.26	31.64	0.00	300	325	PEAK	2	5650.00	52.04	68.20	-16.16	38.81	34.60	10.28	31.65	0.00	300	325	PEAK	3	5702.00	53.95	105.86	-51.91	40.80	34.60	10.33	31.78	0.00	300	325	PEAK	4	5720.00	51.55	110.90	-59.35	38.44	34.60	10.34	31.83	0.00	300	325	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5624.40	55.11	68.20	-13.09	41.89	34.60	10.26	31.64	0.00	300	325	PEAK																																																																								
2	5650.00	52.04	68.20	-16.16	38.81	34.60	10.28	31.65	0.00	300	325	PEAK																																																																								
3	5702.00	53.95	105.86	-51.91	40.80	34.60	10.33	31.78	0.00	300	325	PEAK																																																																								
4	5720.00	51.55	110.90	-59.35	38.44	34.60	10.34	31.83	0.00	300	325	PEAK																																																																								
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.13</td> <td>-----</td> <td>-----</td> <td>95.05</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	108.13	-----	-----	95.05	34.60	10.36	31.88	0.00	300	325	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	108.13	-----	-----	95.05	34.60	10.36	31.88	0.00	300	325	PEAK																																																																								
Avg	Blank																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.37</td> <td>-----</td> <td>-----</td> <td>87.28</td> <td>34.60</td> <td>10.35</td> <td>31.86</td> <td>0.00</td> <td>300</td> <td>325</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.37	-----	-----	87.28	34.60	10.35	31.86	0.00	300	325	AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	100.37	-----	-----	87.28	34.60	10.35	31.86	0.00	300	325	AVERAGE																																																																								



	53																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU26/0_5745MHz																																																																																																																																
ANT	CDD 8+5																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.40</td> <td>53.90</td> <td>68.20</td> <td>-14.30</td> <td>40.66</td> <td>34.60</td> <td>10.27</td> <td>31.63</td> <td>0.00</td> <td>117</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.80</td> <td>51.90</td> <td>68.80</td> <td>-16.90</td> <td>38.67</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>117</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.20</td> <td>53.63</td> <td>106.20</td> <td>-52.57</td> <td>40.49</td> <td>34.60</td> <td>10.33</td> <td>31.79</td> <td>0.00</td> <td>117</td> <td>22</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>51.96</td> <td>110.90</td> <td>-58.94</td> <td>38.85</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>117</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5634.40	53.90	68.20	-14.30	40.66	34.60	10.27	31.63	0.00	117	22	PEAK	2	5650.80	51.90	68.80	-16.90	38.67	34.60	10.29	31.66	0.00	117	22	PEAK	3	5703.20	53.63	106.20	-52.57	40.49	34.60	10.33	31.79	0.00	117	22	PEAK	4	5720.00	51.96	110.90	-58.94	38.85	34.60	10.34	31.83	0.00	117	22	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.61</td> <td>-----</td> <td>-----</td> <td>94.53</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>117</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.61	-----	-----	94.53	34.60	10.36	31.88	0.00	117	22	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5634.40	53.90	68.20	-14.30	40.66	34.60	10.27	31.63	0.00	117	22	PEAK																																																																																																																					
2	5650.80	51.90	68.80	-16.90	38.67	34.60	10.29	31.66	0.00	117	22	PEAK																																																																																																																					
3	5703.20	53.63	106.20	-52.57	40.49	34.60	10.33	31.79	0.00	117	22	PEAK																																																																																																																					
4	5720.00	51.96	110.90	-58.94	38.85	34.60	10.34	31.83	0.00	117	22	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	107.61	-----	-----	94.53	34.60	10.36	31.88	0.00	117	22	PEAK																																																																																																																					
Avg	Blank																																																																																																																																
		<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.24</td> <td>-----</td> <td>-----</td> <td>87.15</td> <td>34.60</td> <td>10.35</td> <td>31.86</td> <td>0.00</td> <td>117</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.24	-----	-----	87.15	34.60	10.35	31.86	0.00	117	22	AVERAGE																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	100.24	-----	-----	87.15	34.60	10.35	31.86	0.00	117	22	AVERAGE																																																																																																																					

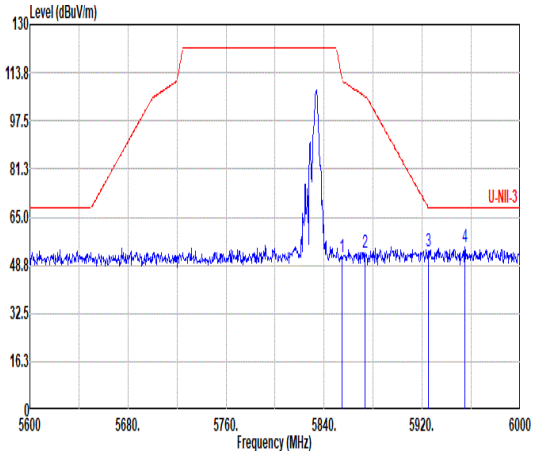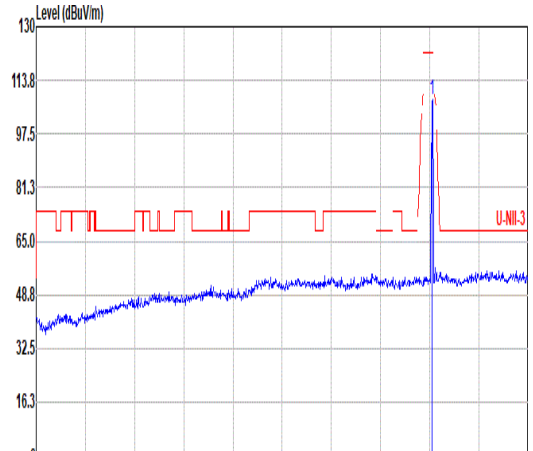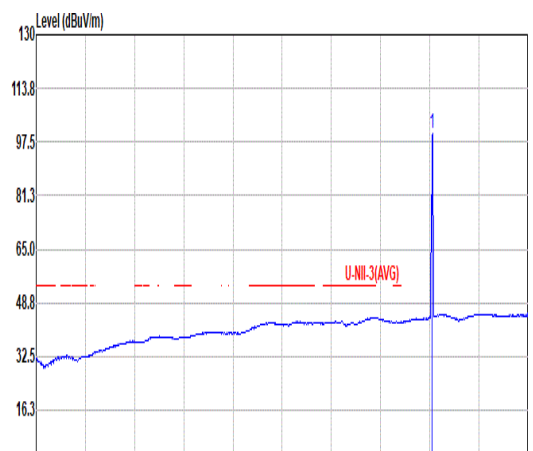

	54																																																																																																										
Mode	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU26/8_5825MHz																																																																																																										
ANT	CDD 8+5																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a red limit line and a blue signal line. A prominent peak is visible at approximately 5825 MHz. Four vertical lines are marked with numbers 1, 2, 3, and 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>51.73</td> <td>111.36</td> <td>-59.63</td> <td>38.72</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>228</td> <td>341</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.60</td> <td>53.08</td> <td>105.69</td> <td>-52.61</td> <td>39.98</td> <td>34.79</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>228</td> <td>341</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>53.45</td> <td>68.35</td> <td>-14.90</td> <td>40.04</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>228</td> <td>341</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5954.80</td> <td>54.73</td> <td>68.20</td> <td>-13.47</td> <td>41.14</td> <td>35.22</td> <td>10.54</td> <td>32.17</td> <td>0.00</td> <td>228</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.80	51.73	111.36	-59.63	38.72	34.72	10.45	32.16	0.00	228	341	PEAK	2	5873.60	53.08	105.69	-52.61	39.98	34.79	10.47	32.16	0.00	228	341	PEAK	3	5924.80	53.45	68.35	-14.90	40.04	35.05	10.52	32.16	0.00	228	341	PEAK	4	5954.80	54.73	68.20	-13.47	41.14	35.22	10.54	32.17	0.00	228	341	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a red limit line and a blue signal line. A prominent peak is visible at approximately 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.15</td> <td>-----</td> <td>-----</td> <td>95.15</td> <td>34.67</td> <td>10.44</td> <td>32.11</td> <td>0.00</td> <td>228</td> <td>341</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	108.15	-----	-----	95.15	34.67	10.44	32.11	0.00	228	341	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5854.80	51.73	111.36	-59.63	38.72	34.72	10.45	32.16	0.00	228	341	PEAK																																																																																															
2	5873.60	53.08	105.69	-52.61	39.98	34.79	10.47	32.16	0.00	228	341	PEAK																																																																																															
3	5924.80	53.45	68.35	-14.90	40.04	35.05	10.52	32.16	0.00	228	341	PEAK																																																																																															
4	5954.80	54.73	68.20	-13.47	41.14	35.22	10.54	32.17	0.00	228	341	PEAK																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	108.15	-----	-----	95.15	34.67	10.44	32.11	0.00	228	341	PEAK																																																																																															
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average. The plot shows a red limit line and a blue signal line. A prominent peak is visible at approximately 5825 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.89</td> <td>-----</td> <td>-----</td> <td>86.89</td> <td>34.67</td> <td>10.44</td> <td>32.11</td> <td>0.00</td> <td>228</td> <td>341</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	99.89	-----	-----	86.89	34.67	10.44	32.11	0.00	228	341	AVERAGE																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	99.89	-----	-----	86.89	34.67	10.44	32.11	0.00	228	341	AVERAGE																																																																																															



Mode	54																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU26/8_5825MHz																																																																																																													
ANT	CDD 8+5																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>51.62</td> <td>111.36</td> <td>-59.74</td> <td>38.61</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> <tr> <td>2</td> <td>5874.00</td> <td>53.69</td> <td>105.36</td> <td>-51.67</td> <td>40.58</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>52.56</td> <td>69.23</td> <td>-16.67</td> <td>39.17</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> <tr> <td>4</td> <td>5928.00</td> <td>54.91</td> <td>68.20</td> <td>-13.29</td> <td>41.48</td> <td>35.07</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.00	51.62	111.36	-59.74	38.61	34.72	10.45	32.16	0.00	100	339 PEAK	2	5874.00	53.69	105.36	-51.67	40.58	34.00	10.47	32.16	0.00	100	339 PEAK	3	5923.60	52.56	69.23	-16.67	39.17	35.04	10.51	32.16	0.00	100	339 PEAK	4	5928.00	54.91	68.20	-13.29	41.48	35.07	10.52	32.16	0.00	100	339 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.41</td> <td>-----</td> <td>-----</td> <td>94.41</td> <td>34.67</td> <td>10.44</td> <td>32.11</td> <td>0.00</td> <td>100</td> <td>339 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	107.41	-----	-----	94.41	34.67	10.44	32.11	0.00	100	339 PEAK
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5854.00	51.62	111.36	-59.74	38.61	34.72	10.45	32.16	0.00	100	339 PEAK																																																																																																			
2	5874.00	53.69	105.36	-51.67	40.58	34.00	10.47	32.16	0.00	100	339 PEAK																																																																																																			
3	5923.60	52.56	69.23	-16.67	39.17	35.04	10.51	32.16	0.00	100	339 PEAK																																																																																																			
4	5928.00	54.91	68.20	-13.29	41.48	35.07	10.52	32.16	0.00	100	339 PEAK																																																																																																			
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5825.00	107.41	-----	-----	94.41	34.67	10.44	32.11	0.00	100	339 PEAK																																																																																																			
Avg	Blank																																																																																																													
		<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.53</td> <td>-----</td> <td>-----</td> <td>86.53</td> <td>34.67</td> <td>10.44</td> <td>32.11</td> <td>0.00</td> <td>100</td> <td>339 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	99.53	-----	-----	86.53	34.67	10.44	32.11	0.00	100	339 AVERAGE																																																																								
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5825.00	99.53	-----	-----	86.53	34.67	10.44	32.11	0.00	100	339 AVERAGE																																																																																																			



	55																																																																																																																																
Mode	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU52/37_5745MHz																																																																																																																																
ANT	CDD 8+5																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5625.20</td> <td>53.74</td> <td>68.20</td> <td>-14.46</td> <td>40.52</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>218</td> <td>315</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.80</td> <td>53.06</td> <td>68.80</td> <td>-15.74</td> <td>39.83</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>218</td> <td>315</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5705.60</td> <td>54.75</td> <td>106.87</td> <td>-52.12</td> <td>41.61</td> <td>34.60</td> <td>10.33</td> <td>31.79</td> <td>0.00</td> <td>218</td> <td>315</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>51.48</td> <td>111.81</td> <td>-60.33</td> <td>38.37</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>218</td> <td>315</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5625.20	53.74	68.20	-14.46	40.52	34.60	10.26	31.64	0.00	218	315	PEAK	2	5650.80	53.06	68.80	-15.74	39.83	34.60	10.29	31.66	0.00	218	315	PEAK	3	5705.60	54.75	106.87	-52.12	41.61	34.60	10.33	31.79	0.00	218	315	PEAK	4	5720.40	51.48	111.81	-60.33	38.37	34.60	10.34	31.83	0.00	218	315	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.73</td> <td>-----</td> <td>-----</td> <td>96.65</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>218</td> <td>315</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	109.73	-----	-----	96.65	34.60	10.36	31.88	0.00	218	315	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5625.20	53.74	68.20	-14.46	40.52	34.60	10.26	31.64	0.00	218	315	PEAK																																																																																																																					
2	5650.80	53.06	68.80	-15.74	39.83	34.60	10.29	31.66	0.00	218	315	PEAK																																																																																																																					
3	5705.60	54.75	106.87	-52.12	41.61	34.60	10.33	31.79	0.00	218	315	PEAK																																																																																																																					
4	5720.40	51.48	111.81	-60.33	38.37	34.60	10.34	31.83	0.00	218	315	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	109.73	-----	-----	96.65	34.60	10.36	31.88	0.00	218	315	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.52</td> <td>-----</td> <td>-----</td> <td>88.44</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>218</td> <td>315</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	101.52	-----	-----	88.44	34.60	10.36	31.88	0.00	218	315	AVERAGE																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5745.00	101.52	-----	-----	88.44	34.60	10.36	31.88	0.00	218	315	AVERAGE																																																																																																																					



	55																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU52/37_5745MHz																																																																																																													
ANT	CDD 8+5																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.40</td> <td>54.00</td> <td>68.20</td> <td>-14.20</td> <td>40.76</td> <td>34.60</td> <td>10.27</td> <td>31.63</td> <td>0.00</td> <td>300</td> <td>3 PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>51.09</td> <td>68.20</td> <td>-17.11</td> <td>37.86</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>300</td> <td>3 PEAK</td> </tr> <tr> <td>3</td> <td>5701.60</td> <td>53.43</td> <td>105.75</td> <td>-52.32</td> <td>40.28</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>300</td> <td>3 PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>51.32</td> <td>110.90</td> <td>-59.58</td> <td>38.21</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>3 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5634.40	54.00	68.20	-14.20	40.76	34.60	10.27	31.63	0.00	300	3 PEAK	2	5650.00	51.09	68.20	-17.11	37.86	34.60	10.28	31.65	0.00	300	3 PEAK	3	5701.60	53.43	105.75	-52.32	40.28	34.60	10.33	31.78	0.00	300	3 PEAK	4	5720.00	51.32	110.90	-59.58	38.21	34.60	10.34	31.83	0.00	300	3 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.66</td> <td>-----</td> <td>-----</td> <td>94.58</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>300</td> <td>3 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.66	-----	-----	94.58	34.60	10.36	31.88	0.00	300	3 PEAK
	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5634.40	54.00	68.20	-14.20	40.76	34.60	10.27	31.63	0.00	300	3 PEAK																																																																																																			
2	5650.00	51.09	68.20	-17.11	37.86	34.60	10.28	31.65	0.00	300	3 PEAK																																																																																																			
3	5701.60	53.43	105.75	-52.32	40.28	34.60	10.33	31.78	0.00	300	3 PEAK																																																																																																			
4	5720.00	51.32	110.90	-59.58	38.21	34.60	10.34	31.83	0.00	300	3 PEAK																																																																																																			
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5745.00	107.66	-----	-----	94.58	34.60	10.36	31.88	0.00	300	3 PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.18</td> <td>-----</td> <td>-----</td> <td>87.10</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>300</td> <td>3 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.18	-----	-----	87.10	34.60	10.36	31.88	0.00	300	3 AVERAGE																																																																								
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5745.00	100.18	-----	-----	87.10	34.60	10.36	31.88	0.00	300	3 AVERAGE																																																																																																			



56																																																																									
Mode	Band Edge																																																																								
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU52/40_5825MHz																																																																								
ANT	CDD 8+5																																																																								
Pol.	Horizontal																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.00</td> <td>52.32</td> <td>111.36</td> <td>-59.04</td> <td>39.31</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>266</td> <td>39</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>51.87</td> <td>105.47</td> <td>-53.60</td> <td>38.76</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>266</td> <td>39</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.00</td> <td>54.95</td> <td>68.94</td> <td>-13.99</td> <td>41.56</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>266</td> <td>39</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5973.20</td> <td>55.21</td> <td>68.20</td> <td>-12.99</td> <td>41.53</td> <td>35.29</td> <td>10.56</td> <td>32.17</td> <td>0.00</td> <td>266</td> <td>39</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.00	52.32	111.36	-59.04	39.31	34.72	10.45	32.16	0.00	266	39	PEAK	2	5874.40	51.87	105.47	-53.60	38.76	34.00	10.47	32.16	0.00	266	39	PEAK	3	5924.00	54.95	68.94	-13.99	41.56	35.04	10.51	32.16	0.00	266	39	PEAK	4	5973.20	55.21	68.20	-12.99	41.53	35.29	10.56	32.17	0.00	266	39	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5854.00	52.32	111.36	-59.04	39.31	34.72	10.45	32.16	0.00	266	39	PEAK																																																													
2	5874.40	51.87	105.47	-53.60	38.76	34.00	10.47	32.16	0.00	266	39	PEAK																																																													
3	5924.00	54.95	68.94	-13.99	41.56	35.04	10.51	32.16	0.00	266	39	PEAK																																																													
4	5973.20	55.21	68.20	-12.99	41.53	35.29	10.56	32.17	0.00	266	39	PEAK																																																													
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.72</td> <td>-----</td> <td>-----</td> <td>95.73</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>266</td> <td>39</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	108.72	-----	-----	95.73	34.66	10.43	32.10	0.00	266	39	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5825.00	108.72	-----	-----	95.73	34.66	10.43	32.10	0.00	266	39	PEAK																																																													
Avg	Blank																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.56</td> <td>-----</td> <td>-----</td> <td>87.57</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>266</td> <td>39</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	100.56	-----	-----	87.57	34.66	10.43	32.10	0.00	266	39	AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5825.00	100.56	-----	-----	87.57	34.66	10.43	32.10	0.00	266	39	AVERAGE																																																													



Mode	56																																																																																																										
	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU52/40_5825MHz																																																																																																										
ANT	CDD 8+5																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>54.33</td> <td>114.09</td> <td>-59.76</td> <td>41.33</td> <td>34.71</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>52.83</td> <td>105.47</td> <td>-52.64</td> <td>39.72</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.80</td> <td>53.24</td> <td>69.83</td> <td>-16.59</td> <td>39.85</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.40</td> <td>55.14</td> <td>68.20</td> <td>-13.06</td> <td>41.70</td> <td>35.08</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5853.60	54.33	114.09	-59.76	41.33	34.71	10.45	32.16	0.00	100	342	PEAK	2	5874.40	52.83	105.47	-52.64	39.72	34.00	10.47	32.16	0.00	100	342	PEAK	3	5922.80	53.24	69.83	-16.59	39.85	35.04	10.51	32.16	0.00	100	342	PEAK	4	5930.40	55.14	68.20	-13.06	41.70	35.08	10.52	32.16	0.00	100	342	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.79</td> <td>-----</td> <td>-----</td> <td>93.79</td> <td>34.67</td> <td>10.44</td> <td>32.11</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	106.79	-----	-----	93.79	34.67	10.44	32.11	0.00	100	342	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5853.60	54.33	114.09	-59.76	41.33	34.71	10.45	32.16	0.00	100	342	PEAK																																																																																															
2	5874.40	52.83	105.47	-52.64	39.72	34.00	10.47	32.16	0.00	100	342	PEAK																																																																																															
3	5922.80	53.24	69.83	-16.59	39.85	35.04	10.51	32.16	0.00	100	342	PEAK																																																																																															
4	5930.40	55.14	68.20	-13.06	41.70	35.08	10.52	32.16	0.00	100	342	PEAK																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	106.79	-----	-----	93.79	34.67	10.44	32.11	0.00	100	342	PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.93</td> <td>-----</td> <td>-----</td> <td>85.94</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>100</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	98.93	-----	-----	85.94	34.66	10.43	32.10	0.00	100	342	AVERAGE																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	98.93	-----	-----	85.94	34.66	10.43	32.10	0.00	100	342	AVERAGE																																																																																															



57																																																																																				
Mode	Band Edge																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU106/53_5745MHz																																																																																			
ANT	CDD 8+5																																																																																			
Pol.	Horizontal																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5623.20</td> <td>54.24</td> <td>68.20</td> <td>-13.96</td> <td>41.02</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>287</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>51.41</td> <td>68.50</td> <td>-17.09</td> <td>38.19</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>287</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.60</td> <td>61.40</td> <td>109.67</td> <td>-48.27</td> <td>48.28</td> <td>34.60</td> <td>10.34</td> <td>31.82</td> <td>0.00</td> <td>287</td> <td>47</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>56.52</td> <td>111.81</td> <td>-55.29</td> <td>43.41</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>287</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5623.20	54.24	68.20	-13.96	41.02	34.60	10.26	31.64	0.00	287	47	PEAK	2	5650.40	51.41	68.50	-17.09	38.19	34.60	10.28	31.66	0.00	287	47	PEAK	3	5715.60	61.40	109.67	-48.27	48.28	34.60	10.34	31.82	0.00	287	47	PEAK	4	5720.40	56.52	111.81	-55.29	43.41	34.60	10.34	31.83	0.00	287	47	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5623.20	54.24	68.20	-13.96	41.02	34.60	10.26	31.64	0.00	287	47	PEAK																																																																								
2	5650.40	51.41	68.50	-17.09	38.19	34.60	10.28	31.66	0.00	287	47	PEAK																																																																								
3	5715.60	61.40	109.67	-48.27	48.28	34.60	10.34	31.82	0.00	287	47	PEAK																																																																								
4	5720.40	56.52	111.81	-55.29	43.41	34.60	10.34	31.83	0.00	287	47	PEAK																																																																								
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.39</td> <td>-----</td> <td>-----</td> <td>97.31</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>287</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	110.39	-----	-----	97.31	34.60	10.36	31.88	0.00	287	47	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	110.39	-----	-----	97.31	34.60	10.36	31.88	0.00	287	47	PEAK																																																																								
Avg	Blank																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.75</td> <td>-----</td> <td>-----</td> <td>87.67</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>287</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.75	-----	-----	87.67	34.60	10.36	31.88	0.00	287	47	AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5745.00	100.75	-----	-----	87.67	34.60	10.36	31.88	0.00	287	47	AVERAGE																																																																								



57																																																																																
Mode	Band Edge																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU106/53_5745MHz																																																																															
ANT	CDD 8+5																																																																															
Pol.	Vertical																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.20</td> <td>54.12</td> <td>68.20</td> <td>-14.08</td> <td>40.89</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>327</td> <td>5 PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>52.62</td> <td>68.50</td> <td>-15.88</td> <td>39.40</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>327</td> <td>5 PEAK</td> </tr> <tr> <td>3</td> <td>5704.00</td> <td>55.08</td> <td>106.42</td> <td>-51.34</td> <td>41.94</td> <td>34.60</td> <td>10.33</td> <td>31.79</td> <td>0.00</td> <td>327</td> <td>5 PEAK</td> </tr> <tr> <td>4</td> <td>5720.00</td> <td>56.18</td> <td>110.90</td> <td>-54.72</td> <td>43.07</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>327</td> <td>5 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5649.20	54.12	68.20	-14.08	40.89	34.60	10.28	31.65	0.00	327	5 PEAK	2	5650.40	52.62	68.50	-15.88	39.40	34.60	10.28	31.66	0.00	327	5 PEAK	3	5704.00	55.08	106.42	-51.34	41.94	34.60	10.33	31.79	0.00	327	5 PEAK	4	5720.00	56.18	110.90	-54.72	43.07	34.60	10.34	31.83	0.00	327	5 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5649.20	54.12	68.20	-14.08	40.89	34.60	10.28	31.65	0.00	327	5 PEAK																																																																					
2	5650.40	52.62	68.50	-15.88	39.40	34.60	10.28	31.66	0.00	327	5 PEAK																																																																					
3	5704.00	55.08	106.42	-51.34	41.94	34.60	10.33	31.79	0.00	327	5 PEAK																																																																					
4	5720.00	56.18	110.90	-54.72	43.07	34.60	10.34	31.83	0.00	327	5 PEAK																																																																					
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.46</td> <td>-----</td> <td>-----</td> <td>95.38</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>327</td> <td>5 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	108.46	-----	-----	95.38	34.60	10.36	31.88	0.00	327	5 PEAK																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5745.00	108.46	-----	-----	95.38	34.60	10.36	31.88	0.00	327	5 PEAK																																																																					
Avg	Blank																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.30</td> <td>-----</td> <td>-----</td> <td>87.22</td> <td>34.60</td> <td>10.36</td> <td>31.88</td> <td>0.00</td> <td>327</td> <td>5 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	100.30	-----	-----	87.22	34.60	10.36	31.88	0.00	327	5 AVERAGE																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	5745.00	100.30	-----	-----	87.22	34.60	10.36	31.88	0.00	327	5 AVERAGE																																																																					



58																																																																									
Mode	Band Edge																																																																								
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU106/54_5825MHz																																																																								
ANT	CDD 8+5																																																																								
Pol.	Horizontal																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.60</td> <td>64.51</td> <td>118.65</td> <td>-54.14</td> <td>51.50</td> <td>34.71</td> <td>10.45</td> <td>32.15</td> <td>0.00</td> <td>207</td> <td>305</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>54.16</td> <td>105.47</td> <td>-51.31</td> <td>41.05</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>207</td> <td>305</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.40</td> <td>52.48</td> <td>68.64</td> <td>-16.16</td> <td>39.07</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>207</td> <td>305</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.60</td> <td>56.07</td> <td>68.20</td> <td>-12.13</td> <td>42.66</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>207</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5851.60	64.51	118.65	-54.14	51.50	34.71	10.45	32.15	0.00	207	305	PEAK	2	5874.40	54.16	105.47	-51.31	41.05	34.00	10.47	32.16	0.00	207	305	PEAK	3	5924.40	52.48	68.64	-16.16	39.07	35.05	10.52	32.16	0.00	207	305	PEAK	4	5925.60	56.07	68.20	-12.13	42.66	35.05	10.52	32.16	0.00	207	305	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5851.60	64.51	118.65	-54.14	51.50	34.71	10.45	32.15	0.00	207	305	PEAK																																																													
2	5874.40	54.16	105.47	-51.31	41.05	34.00	10.47	32.16	0.00	207	305	PEAK																																																													
3	5924.40	52.48	68.64	-16.16	39.07	35.05	10.52	32.16	0.00	207	305	PEAK																																																													
4	5925.60	56.07	68.20	-12.13	42.66	35.05	10.52	32.16	0.00	207	305	PEAK																																																													
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.14</td> <td>-----</td> <td>-----</td> <td>95.15</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>207</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	108.14	-----	-----	95.15	34.66	10.43	32.10	0.00	207	305	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5825.00	108.14	-----	-----	95.15	34.66	10.43	32.10	0.00	207	305	PEAK																																																													
Avg	Blank																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.67</td> <td>-----</td> <td>-----</td> <td>87.68</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>207</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	100.67	-----	-----	87.68	34.66	10.43	32.10	0.00	207	305	AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																
1	5825.00	100.67	-----	-----	87.68	34.66	10.43	32.10	0.00	207	305	AVERAGE																																																													



Mode	58																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU106/54_5825MHz																																																																																																																						
ANT	CDD 8+5																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>52.06</td> <td>111.36</td> <td>-59.30</td> <td>39.05</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td></td> <td>4 PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>54.42</td> <td>105.47</td> <td>-51.05</td> <td>41.31</td> <td>34.80</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td></td> <td>4 PEAK</td> </tr> <tr> <td>3</td> <td>5922.80</td> <td>55.50</td> <td>69.83</td> <td>-14.33</td> <td>42.11</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td></td> <td>4 PEAK</td> </tr> <tr> <td>4</td> <td>5940.00</td> <td>55.48</td> <td>68.20</td> <td>-12.72</td> <td>41.90</td> <td>35.14</td> <td>10.53</td> <td>32.17</td> <td>0.00</td> <td>300</td> <td></td> <td>4 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.80	52.06	111.36	-59.30	39.05	34.72	10.45	32.16	0.00	300		4 PEAK	2	5874.40	54.42	105.47	-51.05	41.31	34.80	10.47	32.16	0.00	300		4 PEAK	3	5922.80	55.50	69.83	-14.33	42.11	35.04	10.51	32.16	0.00	300		4 PEAK	4	5940.00	55.48	68.20	-12.72	41.90	35.14	10.53	32.17	0.00	300		4 PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>109.49</td> <td>-----</td> <td>-----</td> <td>96.50</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>300</td> <td></td> <td>4 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	109.49	-----	-----	96.50	34.66	10.43	32.10	0.00	300		4 PEAK
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5854.80	52.06	111.36	-59.30	39.05	34.72	10.45	32.16	0.00	300		4 PEAK																																																																																																											
2	5874.40	54.42	105.47	-51.05	41.31	34.80	10.47	32.16	0.00	300		4 PEAK																																																																																																											
3	5922.80	55.50	69.83	-14.33	42.11	35.04	10.51	32.16	0.00	300		4 PEAK																																																																																																											
4	5940.00	55.48	68.20	-12.72	41.90	35.14	10.53	32.17	0.00	300		4 PEAK																																																																																																											
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5825.00	109.49	-----	-----	96.50	34.66	10.43	32.10	0.00	300		4 PEAK																																																																																																											
Avg	Blank																																																																																																																						
		<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.93</td> <td>-----</td> <td>-----</td> <td>86.94</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>300</td> <td></td> <td>4 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	99.93	-----	-----	86.94	34.66	10.43	32.10	0.00	300		4 AVERAGE																																																																														
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5825.00	99.93	-----	-----	86.94	34.66	10.43	32.10	0.00	300		4 AVERAGE																																																																																																											



		70																																																																																																													
Mode	Band Edge																																																																																																														
	U-NII-3_5.725-5.85_802.11n HT20_CH149_Full_5745MHz																																																																																																														
ANT	CDD 8+5																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																													
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.60</td> <td>54.04</td> <td>68.20</td> <td>-14.16</td> <td>40.81</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>292</td> <td>323</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.40</td> <td>54.57</td> <td>69.99</td> <td>-15.42</td> <td>41.34</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>292</td> <td>323</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.60</td> <td>65.14</td> <td>109.67</td> <td>-44.53</td> <td>52.02</td> <td>34.60</td> <td>10.34</td> <td>31.82</td> <td>0.00</td> <td>292</td> <td>323</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.80</td> <td>64.20</td> <td>112.72</td> <td>-48.52</td> <td>51.09</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>292</td> <td>323</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5649.60	54.04	68.20	-14.16	40.81	34.60	10.28	31.65	0.00	292	323	PEAK	2	5652.40	54.57	69.99	-15.42	41.34	34.60	10.29	31.66	0.00	292	323	PEAK	3	5715.60	65.14	109.67	-44.53	52.02	34.60	10.34	31.82	0.00	292	323	PEAK	4	5720.80	64.20	112.72	-48.52	51.09	34.60	10.34	31.83	0.00	292	323	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>112.13</td> <td>-----</td> <td>-----</td> <td>99.06</td> <td>34.60</td> <td>10.36</td> <td>31.89</td> <td>0.00</td> <td>292</td> <td>323</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5745.00	112.13	-----	-----	99.06	34.60	10.36	31.89	0.00	292	323	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																					
1	5649.60	54.04	68.20	-14.16	40.81	34.60	10.28	31.65	0.00	292	323	PEAK																																																																																																			
2	5652.40	54.57	69.99	-15.42	41.34	34.60	10.29	31.66	0.00	292	323	PEAK																																																																																																			
3	5715.60	65.14	109.67	-44.53	52.02	34.60	10.34	31.82	0.00	292	323	PEAK																																																																																																			
4	5720.80	64.20	112.72	-48.52	51.09	34.60	10.34	31.83	0.00	292	323	PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																					
1	5745.00	112.13	-----	-----	99.06	34.60	10.36	31.89	0.00	292	323	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4594.00</td> <td>47.64</td> <td>54.00</td> <td>-6.36</td> <td>36.28</td> <td>34.10</td> <td>9.15</td> <td>31.89</td> <td>0.00</td> <td>292</td> <td>323</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5745.00</td> <td>104.04</td> <td>-----</td> <td>-----</td> <td>90.97</td> <td>34.60</td> <td>10.36</td> <td>31.89</td> <td>0.00</td> <td>292</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4594.00	47.64	54.00	-6.36	36.28	34.10	9.15	31.89	0.00	292	323	Average	2	5745.00	104.04	-----	-----	90.97	34.60	10.36	31.89	0.00	292	323	AVERAGE																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																					
1	4594.00	47.64	54.00	-6.36	36.28	34.10	9.15	31.89	0.00	292	323	Average																																																																																																			
2	5745.00	104.04	-----	-----	90.97	34.60	10.36	31.89	0.00	292	323	AVERAGE																																																																																																			



Mode	70																																																																																																																											
	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11n HT20_CH149_Full_5745MHz																																																																																																																											
ANT	CDD 8+5																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5622.00</td> <td>53.67</td> <td>68.20</td> <td>-14.53</td> <td>40.45</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>308</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5650.00</td> <td>52.03</td> <td>68.20</td> <td>-16.17</td> <td>38.80</td> <td>34.60</td> <td>10.28</td> <td>31.65</td> <td>0.00</td> <td>308</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5718.00</td> <td>61.92</td> <td>110.34</td> <td>-48.42</td> <td>48.80</td> <td>34.60</td> <td>10.34</td> <td>31.82</td> <td>0.00</td> <td>308</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>60.49</td> <td>111.81</td> <td>-51.32</td> <td>47.38</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>308</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5622.00	53.67	68.20	-14.53	40.45	34.60	10.26	31.64	0.00	308	0 PEAK	2	5650.00	52.03	68.20	-16.17	38.80	34.60	10.28	31.65	0.00	308	0 PEAK	3	5718.00	61.92	110.34	-48.42	48.80	34.60	10.34	31.82	0.00	308	0 PEAK	4	5720.40	60.49	111.81	-51.32	47.38	34.60	10.34	31.83	0.00	308	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>111.80</td> <td>-----</td> <td>-----</td> <td>98.74</td> <td>34.60</td> <td>10.37</td> <td>31.91</td> <td>0.00</td> <td>308</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	111.80	-----	-----	98.74	34.60	10.37	31.91	0.00	308	0 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5622.00	53.67	68.20	-14.53	40.45	34.60	10.26	31.64	0.00	308	0 PEAK																																																																																																																	
2	5650.00	52.03	68.20	-16.17	38.80	34.60	10.28	31.65	0.00	308	0 PEAK																																																																																																																	
3	5718.00	61.92	110.34	-48.42	48.80	34.60	10.34	31.82	0.00	308	0 PEAK																																																																																																																	
4	5720.40	60.49	111.81	-51.32	47.38	34.60	10.34	31.83	0.00	308	0 PEAK																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5745.00	111.80	-----	-----	98.74	34.60	10.37	31.91	0.00	308	0 PEAK																																																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.22</td> <td>-----</td> <td>-----</td> <td>90.16</td> <td>34.60</td> <td>10.37</td> <td>31.91</td> <td>0.00</td> <td>308</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	103.22	-----	-----	90.16	34.60	10.37	31.91	0.00	308	0 AVERAGE																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5745.00	103.22	-----	-----	90.16	34.60	10.37	31.91	0.00	308	0 AVERAGE																																																																																																																	



Mode	70																																																																																																																																																																																				
	Harmonic																																																																																																																																																																																				
	U-NII-3_5.725-5.85_802.11n HT20_CH149_Full_5745MHz																																																																																																																																																																																				
ANT	CDD 8+5																																																																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																																																																			
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>47.10</td> <td>74.00</td> <td>-26.90</td> <td>59.10</td> <td>35.00</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>8043.00</td> <td>35.52</td> <td>54.00</td> <td>-18.48</td> <td>47.52</td> <td>35.00</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>300</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>11490.00</td> <td>46.42</td> <td>74.00</td> <td>-27.58</td> <td>54.50</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>17235.00</td> <td>57.28</td> <td>68.20</td> <td>-10.92</td> <td>57.35</td> <td>40.90</td> <td>18.37</td> <td>59.34</td> <td>0.00</td> <td>100</td> <td>11</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8043.00	47.10	74.00	-26.90	59.10	35.00	12.44	60.24	0.00	300	0	PEAK	2	8043.00	35.52	54.00	-18.48	47.52	35.00	12.44	60.24	0.00	300	0	AVERAGE	3	11490.00	46.42	74.00	-27.58	54.50	38.19	14.91	61.18	0.00	---	---	PEAK	4	17235.00	57.28	68.20	-10.92	57.35	40.90	18.37	59.34	0.00	100	11	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8043.00</td> <td>52.48</td> <td>74.00</td> <td>-21.52</td> <td>64.48</td> <td>35.80</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>8043.00</td> <td>42.01</td> <td>54.00</td> <td>-11.99</td> <td>54.01</td> <td>35.80</td> <td>12.44</td> <td>60.24</td> <td>0.00</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>11490.00</td> <td>49.44</td> <td>74.00</td> <td>-24.56</td> <td>57.52</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>11490.00</td> <td>39.06</td> <td>54.00</td> <td>-14.94</td> <td>47.14</td> <td>38.19</td> <td>14.91</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>17235.00</td> <td>64.12</td> <td>68.20</td> <td>-4.08</td> <td>64.19</td> <td>40.90</td> <td>18.36</td> <td>59.33</td> <td>0.00</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8043.00	52.48	74.00	-21.52	64.48	35.80	12.44	60.24	0.00	100	68	PEAK	2	8043.00	42.01	54.00	-11.99	54.01	35.80	12.44	60.24	0.00	100	68	AVERAGE	3	11490.00	49.44	74.00	-24.56	57.52	38.19	14.91	61.18	0.00	100	68	PEAK	4	11490.00	39.06	54.00	-14.94	47.14	38.19	14.91	61.18	0.00	100	68	AVERAGE	5	17235.00	64.12	68.20	-4.08	64.19	40.90	18.36	59.33	0.00	100	120	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																											
1	8043.00	47.10	74.00	-26.90	59.10	35.00	12.44	60.24	0.00	300	0	PEAK																																																																																																																																																																									
2	8043.00	35.52	54.00	-18.48	47.52	35.00	12.44	60.24	0.00	300	0	AVERAGE																																																																																																																																																																									
3	11490.00	46.42	74.00	-27.58	54.50	38.19	14.91	61.18	0.00	---	---	PEAK																																																																																																																																																																									
4	17235.00	57.28	68.20	-10.92	57.35	40.90	18.37	59.34	0.00	100	11	PEAK																																																																																																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																											
1	8043.00	52.48	74.00	-21.52	64.48	35.80	12.44	60.24	0.00	100	68	PEAK																																																																																																																																																																									
2	8043.00	42.01	54.00	-11.99	54.01	35.80	12.44	60.24	0.00	100	68	AVERAGE																																																																																																																																																																									
3	11490.00	49.44	74.00	-24.56	57.52	38.19	14.91	61.18	0.00	100	68	PEAK																																																																																																																																																																									
4	11490.00	39.06	54.00	-14.94	47.14	38.19	14.91	61.18	0.00	100	68	AVERAGE																																																																																																																																																																									
5	17235.00	64.12	68.20	-4.08	64.19	40.90	18.36	59.33	0.00	100	120	PEAK																																																																																																																																																																									






Mode	71																																																																																																																																																	
	Harmonic																																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_Full_5785MHz																																																																																																																																																	
ANT	CDD 8+5																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 8099.00</td> <td>46.20</td> <td>74.00</td> <td>-27.80</td> <td>58.28</td> <td>35.80</td> <td>12.44</td> <td>60.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 11570.00</td> <td>46.70</td> <td>74.00</td> <td>-27.30</td> <td>54.62</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3 17355.00</td> <td>55.61</td> <td>68.20</td> <td>-12.59</td> <td>55.66</td> <td>40.90</td> <td>18.43</td> <td>59.38</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 8099.00	46.20	74.00	-27.80	58.28	35.80	12.44	60.32	0.00	---	---	PEAK	2 11570.00	46.70	74.00	-27.30	54.62	38.27	14.97	61.16	0.00	---	---	PEAK	3 17355.00	55.61	68.20	-12.59	55.66	40.90	18.43	59.38	0.00	100	236	PEAK	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 8099.00</td> <td>48.91</td> <td>74.00</td> <td>-25.09</td> <td>60.99</td> <td>35.80</td> <td>12.44</td> <td>60.32</td> <td>0.00</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> <tr> <td>2 8099.00</td> <td>39.00</td> <td>54.00</td> <td>-15.00</td> <td>51.08</td> <td>35.80</td> <td>12.44</td> <td>60.32</td> <td>0.00</td> <td>100</td> <td>120</td> <td>AVERAGE</td> </tr> <tr> <td>3 11570.00</td> <td>47.48</td> <td>74.00</td> <td>-26.52</td> <td>55.40</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> <tr> <td>4 11570.00</td> <td>37.26</td> <td>54.00</td> <td>-16.74</td> <td>45.18</td> <td>38.27</td> <td>14.97</td> <td>61.16</td> <td>0.00</td> <td>100</td> <td>120</td> <td>AVERAGE</td> </tr> <tr> <td>5 17355.00</td> <td>64.29</td> <td>68.20</td> <td>-3.91</td> <td>64.33</td> <td>40.90</td> <td>18.44</td> <td>59.38</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 8099.00	48.91	74.00	-25.09	60.99	35.80	12.44	60.32	0.00	100	120	PEAK	2 8099.00	39.00	54.00	-15.00	51.08	35.80	12.44	60.32	0.00	100	120	AVERAGE	3 11570.00	47.48	74.00	-26.52	55.40	38.27	14.97	61.16	0.00	100	120	PEAK	4 11570.00	37.26	54.00	-16.74	45.18	38.27	14.97	61.16	0.00	100	120	AVERAGE	5 17355.00	64.29	68.20	-3.91	64.33	40.90	18.44	59.38	0.00	---	---	PEAK
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1 8099.00	46.20	74.00	-27.80	58.28	35.80	12.44	60.32	0.00	---	---	PEAK																																																																																																																																							
2 11570.00	46.70	74.00	-27.30	54.62	38.27	14.97	61.16	0.00	---	---	PEAK																																																																																																																																							
3 17355.00	55.61	68.20	-12.59	55.66	40.90	18.43	59.38	0.00	100	236	PEAK																																																																																																																																							
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1 8099.00	48.91	74.00	-25.09	60.99	35.80	12.44	60.32	0.00	100	120	PEAK																																																																																																																																							
2 8099.00	39.00	54.00	-15.00	51.08	35.80	12.44	60.32	0.00	100	120	AVERAGE																																																																																																																																							
3 11570.00	47.48	74.00	-26.52	55.40	38.27	14.97	61.16	0.00	100	120	PEAK																																																																																																																																							
4 11570.00	37.26	54.00	-16.74	45.18	38.27	14.97	61.16	0.00	100	120	AVERAGE																																																																																																																																							
5 17355.00	64.29	68.20	-3.91	64.33	40.90	18.44	59.38	0.00	---	---	PEAK																																																																																																																																							



	72																																																																																																									
Mode	Band Edge - L																																																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH165_Full_5825MHz																																																																																																									
ANT	CDD 8+5																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																								
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.20</td> <td>61.16</td> <td>115.00</td> <td>-53.84</td> <td>48.16</td> <td>34.71</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>276 PEAK</td> </tr> <tr> <td>2</td> <td>5874.40</td> <td>54.29</td> <td>105.47</td> <td>-51.18</td> <td>41.18</td> <td>34.00</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>276 PEAK</td> </tr> <tr> <td>3</td> <td>5923.20</td> <td>52.79</td> <td>69.53</td> <td>-16.74</td> <td>39.40</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>276 PEAK</td> </tr> <tr> <td>4</td> <td>5938.80</td> <td>55.96</td> <td>68.20</td> <td>-12.24</td> <td>42.47</td> <td>35.13</td> <td>10.53</td> <td>32.17</td> <td>0.00</td> <td>300</td> <td>276 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5853.20	61.16	115.00	-53.84	48.16	34.71	10.45	32.16	0.00	300	276 PEAK	2	5874.40	54.29	105.47	-51.18	41.18	34.00	10.47	32.16	0.00	300	276 PEAK	3	5923.20	52.79	69.53	-16.74	39.40	35.04	10.51	32.16	0.00	300	276 PEAK	4	5938.80	55.96	68.20	-12.24	42.47	35.13	10.53	32.17	0.00	300	276 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.64</td> <td>-----</td> <td>-----</td> <td>97.65</td> <td>34.64</td> <td>10.42</td> <td>32.07</td> <td>0.00</td> <td>300</td> <td>276 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	110.64	-----	-----	97.65	34.64	10.42	32.07	0.00	300	276 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5853.20	61.16	115.00	-53.84	48.16	34.71	10.45	32.16	0.00	300	276 PEAK																																																																																															
2	5874.40	54.29	105.47	-51.18	41.18	34.00	10.47	32.16	0.00	300	276 PEAK																																																																																															
3	5923.20	52.79	69.53	-16.74	39.40	35.04	10.51	32.16	0.00	300	276 PEAK																																																																																															
4	5938.80	55.96	68.20	-12.24	42.47	35.13	10.53	32.17	0.00	300	276 PEAK																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5825.00	110.64	-----	-----	97.65	34.64	10.42	32.07	0.00	300	276 PEAK																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4660.00</td> <td>46.00</td> <td>54.00</td> <td>-7.20</td> <td>35.36</td> <td>34.10</td> <td>9.24</td> <td>31.90</td> <td>0.00</td> <td>300</td> <td>276 Average</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>102.20</td> <td>-----</td> <td>-----</td> <td>89.21</td> <td>34.64</td> <td>10.42</td> <td>32.07</td> <td>0.00</td> <td>300</td> <td>276 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4660.00	46.00	54.00	-7.20	35.36	34.10	9.24	31.90	0.00	300	276 Average	2	5825.00	102.20	-----	-----	89.21	34.64	10.42	32.07	0.00	300	276 AVERAGE																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	4660.00	46.00	54.00	-7.20	35.36	34.10	9.24	31.90	0.00	300	276 Average																																																																																															
2	5825.00	102.20	-----	-----	89.21	34.64	10.42	32.07	0.00	300	276 AVERAGE																																																																																															

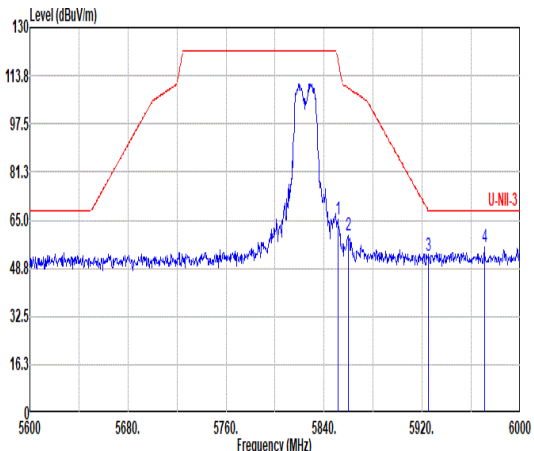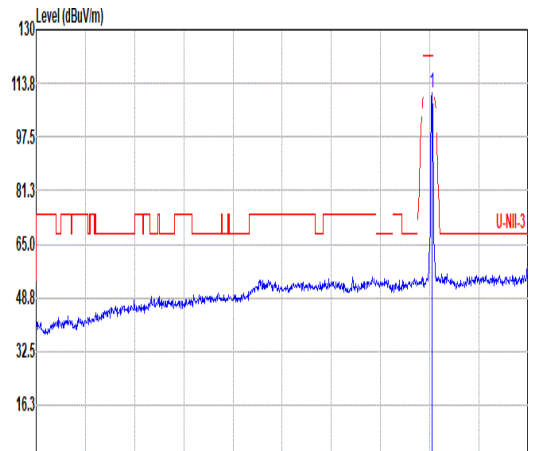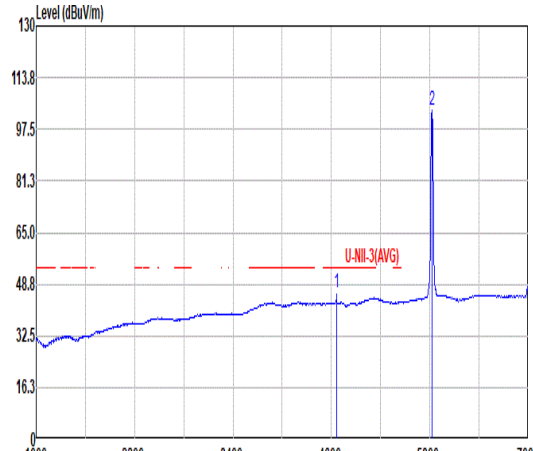

Mode	72																																																																																																									
	Band Edge - L																																																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH165_Full_5825MHz																																																																																																									
ANT	CDD 8+5																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak	 <table border="1" data-bbox="263 1108 774 1288"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.20</td> <td>65.26</td> <td>119.56</td> <td>-54.30</td> <td>52.26</td> <td>34.70</td> <td>10.45</td> <td>32.15</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5859.60</td> <td>59.73</td> <td>109.61</td> <td>-49.88</td> <td>46.69</td> <td>34.74</td> <td>10.46</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>53.20</td> <td>68.35</td> <td>-15.15</td> <td>39.79</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5970.80</td> <td>56.10</td> <td>68.20</td> <td>-12.10</td> <td>42.43</td> <td>35.28</td> <td>10.56</td> <td>32.17</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5851.20	65.26	119.56	-54.30	52.26	34.70	10.45	32.15	0.00	300	0 PEAK	2	5859.60	59.73	109.61	-49.88	46.69	34.74	10.46	32.16	0.00	300	0 PEAK	3	5924.80	53.20	68.35	-15.15	39.79	35.05	10.52	32.16	0.00	300	0 PEAK	4	5970.80	56.10	68.20	-12.10	42.43	35.28	10.56	32.17	0.00	300	0 PEAK	 <table border="1" data-bbox="901 1108 1412 1288"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.79</td> <td>-----</td> <td>-----</td> <td>97.80</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	110.79	-----	-----	97.80	34.66	10.43	32.10	0.00	300	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5851.20	65.26	119.56	-54.30	52.26	34.70	10.45	32.15	0.00	300	0 PEAK																																																																																															
2	5859.60	59.73	109.61	-49.88	46.69	34.74	10.46	32.16	0.00	300	0 PEAK																																																																																															
3	5924.80	53.20	68.35	-15.15	39.79	35.05	10.52	32.16	0.00	300	0 PEAK																																																																																															
4	5970.80	56.10	68.20	-12.10	42.43	35.28	10.56	32.17	0.00	300	0 PEAK																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	5825.00	110.79	-----	-----	97.80	34.66	10.43	32.10	0.00	300	0 PEAK																																																																																															
Avg	Blank	 <table border="1" data-bbox="901 1792 1412 1971"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4660.00</td> <td>46.19</td> <td>54.00</td> <td>-7.81</td> <td>34.75</td> <td>34.10</td> <td>9.24</td> <td>31.90</td> <td>0.00</td> <td>300</td> <td>0 Average</td> </tr> <tr> <td>2</td> <td>5825.00</td> <td>103.27</td> <td>-----</td> <td>-----</td> <td>90.28</td> <td>34.66</td> <td>10.43</td> <td>32.10</td> <td>0.00</td> <td>300</td> <td>0 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4660.00	46.19	54.00	-7.81	34.75	34.10	9.24	31.90	0.00	300	0 Average	2	5825.00	103.27	-----	-----	90.28	34.66	10.43	32.10	0.00	300	0 AVERAGE																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																
1	4660.00	46.19	54.00	-7.81	34.75	34.10	9.24	31.90	0.00	300	0 Average																																																																																															
2	5825.00	103.27	-----	-----	90.28	34.66	10.43	32.10	0.00	300	0 AVERAGE																																																																																															



Mode	72																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH165_Full_5825MHz																																																																																																																																																																			
ANT	CDD 8+5																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 8155.00</td> <td>45.22</td> <td>74.00</td> <td>-28.78</td> <td>57.38</td> <td>35.00</td> <td>12.45</td> <td>60.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 11650.00</td> <td>49.90</td> <td>74.00</td> <td>-24.10</td> <td>57.66</td> <td>38.35</td> <td>15.02</td> <td>61.13</td> <td>0.00</td> <td>293</td> <td>311</td> <td>PEAK</td> </tr> <tr> <td>3 11650.00</td> <td>39.36</td> <td>54.00</td> <td>-14.64</td> <td>47.12</td> <td>38.35</td> <td>15.02</td> <td>61.13</td> <td>0.00</td> <td>293</td> <td>311</td> <td>AVERAGE</td> </tr> <tr> <td>4 17475.00</td> <td>65.00</td> <td>68.20</td> <td>-3.20</td> <td>65.02</td> <td>40.90</td> <td>18.52</td> <td>59.44</td> <td>0.00</td> <td>293</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 8155.00	45.22	74.00	-28.78	57.38	35.00	12.45	60.41	0.00	---	---	PEAK	2 11650.00	49.90	74.00	-24.10	57.66	38.35	15.02	61.13	0.00	293	311	PEAK	3 11650.00	39.36	54.00	-14.64	47.12	38.35	15.02	61.13	0.00	293	311	AVERAGE	4 17475.00	65.00	68.20	-3.20	65.02	40.90	18.52	59.44	0.00	293	311	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 8155.00</td> <td>45.14</td> <td>74.00</td> <td>-28.86</td> <td>57.30</td> <td>35.00</td> <td>12.45</td> <td>60.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 11650.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>55.11</td> <td>38.35</td> <td>15.02</td> <td>61.13</td> <td>0.00</td> <td>293</td> <td>311</td> <td>PEAK</td> </tr> <tr> <td>3 11650.00</td> <td>36.98</td> <td>54.00</td> <td>-17.02</td> <td>44.72</td> <td>38.36</td> <td>15.03</td> <td>61.13</td> <td>0.00</td> <td>293</td> <td>311</td> <td>AVERAGE</td> </tr> <tr> <td>4 17475.00</td> <td>62.43</td> <td>68.20</td> <td>-5.77</td> <td>62.45</td> <td>40.90</td> <td>18.52</td> <td>59.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 8155.00	45.14	74.00	-28.86	57.30	35.00	12.45	60.41	0.00	---	---	PEAK	2 11650.00	47.35	74.00	-26.65	55.11	38.35	15.02	61.13	0.00	293	311	PEAK	3 11650.00	36.98	54.00	-17.02	44.72	38.36	15.03	61.13	0.00	293	311	AVERAGE	4 17475.00	62.43	68.20	-5.77	62.45	40.90	18.52	59.44	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																										
1 8155.00	45.22	74.00	-28.78	57.38	35.00	12.45	60.41	0.00	---	---	PEAK																																																																																																																																																									
2 11650.00	49.90	74.00	-24.10	57.66	38.35	15.02	61.13	0.00	293	311	PEAK																																																																																																																																																									
3 11650.00	39.36	54.00	-14.64	47.12	38.35	15.02	61.13	0.00	293	311	AVERAGE																																																																																																																																																									
4 17475.00	65.00	68.20	-3.20	65.02	40.90	18.52	59.44	0.00	293	311	PEAK																																																																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																										
1 8155.00	45.14	74.00	-28.86	57.30	35.00	12.45	60.41	0.00	---	---	PEAK																																																																																																																																																									
2 11650.00	47.35	74.00	-26.65	55.11	38.35	15.02	61.13	0.00	293	311	PEAK																																																																																																																																																									
3 11650.00	36.98	54.00	-17.02	44.72	38.36	15.03	61.13	0.00	293	311	AVERAGE																																																																																																																																																									
4 17475.00	62.43	68.20	-5.77	62.45	40.90	18.52	59.44	0.00	---	---	PEAK																																																																																																																																																									



73																																																																																				
Mode																																																																																				
Band Edge - L																																																																																				
U-NII-3_5.725-5.85_802.11n HT40_CH151_Full_5755MHz																																																																																				
ANT																																																																																				
CDD 8+5																																																																																				
Pol.	Horizontal																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.80</td> <td>56.84</td> <td>68.20</td> <td>-11.36</td> <td>43.60</td> <td>34.60</td> <td>10.28</td> <td>31.64</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.53</td> <td>54.99</td> <td>68.59</td> <td>-13.60</td> <td>41.77</td> <td>34.60</td> <td>10.28</td> <td>31.66</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5705.56</td> <td>67.11</td> <td>106.86</td> <td>-39.75</td> <td>53.97</td> <td>34.60</td> <td>10.33</td> <td>31.79</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.28</td> <td>66.38</td> <td>111.54</td> <td>-45.16</td> <td>53.27</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5644.80	56.84	68.20	-11.36	43.60	34.60	10.28	31.64	0.00	300	326	PEAK	2	5650.53	54.99	68.59	-13.60	41.77	34.60	10.28	31.66	0.00	300	326	PEAK	3	5705.56	67.11	106.86	-39.75	53.97	34.60	10.33	31.79	0.00	300	326	PEAK	4	5720.28	66.38	111.54	-45.16	53.27	34.60	10.34	31.83	0.00	300	326	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5644.80	56.84	68.20	-11.36	43.60	34.60	10.28	31.64	0.00	300	326	PEAK																																																																								
2	5650.53	54.99	68.59	-13.60	41.77	34.60	10.28	31.66	0.00	300	326	PEAK																																																																								
3	5705.56	67.11	106.86	-39.75	53.97	34.60	10.33	31.79	0.00	300	326	PEAK																																																																								
4	5720.28	66.38	111.54	-45.16	53.27	34.60	10.34	31.83	0.00	300	326	PEAK																																																																								
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>109.44</td> <td>-----</td> <td>-----</td> <td>96.37</td> <td>34.60</td> <td>10.36</td> <td>31.89</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5755.00	109.44	-----	-----	96.37	34.60	10.36	31.89	0.00	300	326	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5755.00	109.44	-----	-----	96.37	34.60	10.36	31.89	0.00	300	326	PEAK																																																																								
Avg	Blank																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4606.00</td> <td>49.12</td> <td>54.00</td> <td>-4.88</td> <td>37.76</td> <td>34.10</td> <td>9.16</td> <td>31.90</td> <td>0.00</td> <td>300</td> <td>326</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5755.00</td> <td>100.62</td> <td>-----</td> <td>-----</td> <td>87.57</td> <td>34.60</td> <td>10.37</td> <td>31.92</td> <td>0.00</td> <td>300</td> <td>326</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4606.00	49.12	54.00	-4.88	37.76	34.10	9.16	31.90	0.00	300	326	Average	2	5755.00	100.62	-----	-----	87.57	34.60	10.37	31.92	0.00	300	326	AVERAGE																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	4606.00	49.12	54.00	-4.88	37.76	34.10	9.16	31.90	0.00	300	326	Average																																																																								
2	5755.00	100.62	-----	-----	87.57	34.60	10.37	31.92	0.00	300	326	AVERAGE																																																																								



Mode	73																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_Full_5755MHz																																																																																			
ANT	CDD 8+5																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>54.03</td> <td>111.26</td> <td>-57.23</td> <td>41.02</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.95</td> <td>55.43</td> <td>105.59</td> <td>-50.16</td> <td>42.32</td> <td>34.80</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>54.25</td> <td>68.46</td> <td>-14.21</td> <td>40.84</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5939.47</td> <td>55.03</td> <td>68.20</td> <td>-13.17</td> <td>41.53</td> <td>35.14</td> <td>10.53</td> <td>32.17</td> <td>0.00</td> <td>300</td> <td>326</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	54.03	111.26	-57.23	41.02	34.72	10.45	32.16	0.00	300	326	PEAK	2	5873.95	55.43	105.59	-50.16	42.32	34.80	10.47	32.16	0.00	300	326	PEAK	3	5924.65	54.25	68.46	-14.21	40.84	35.05	10.52	32.16	0.00	300	326	PEAK	4	5939.47	55.03	68.20	-13.17	41.53	35.14	10.53	32.17	0.00	300	326	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.84	54.03	111.26	-57.23	41.02	34.72	10.45	32.16	0.00	300	326	PEAK																																																																								
2	5873.95	55.43	105.59	-50.16	42.32	34.80	10.47	32.16	0.00	300	326	PEAK																																																																								
3	5924.65	54.25	68.46	-14.21	40.84	35.05	10.52	32.16	0.00	300	326	PEAK																																																																								
4	5939.47	55.03	68.20	-13.17	41.53	35.14	10.53	32.17	0.00	300	326	PEAK																																																																								



	73																																																																																																																											
Mode	Band Edge - L																																																																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH151_Full_5755MHz																																																																																																																											
ANT	CDD 8+5																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5614.88</td> <td>56.73</td> <td>68.20</td> <td>-11.47</td> <td>43.51</td> <td>34.60</td> <td>10.26</td> <td>31.64</td> <td>0.00</td> <td>307</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5650.69</td> <td>56.13</td> <td>68.71</td> <td>-12.58</td> <td>42.90</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>307</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>5709.28</td> <td>67.85</td> <td>107.90</td> <td>-40.05</td> <td>54.72</td> <td>34.60</td> <td>10.33</td> <td>31.00</td> <td>0.00</td> <td>307</td> <td>0 PEAK</td> </tr> <tr> <td>4</td> <td>5720.28</td> <td>65.92</td> <td>111.54</td> <td>-45.62</td> <td>52.81</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>307</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5614.88	56.73	68.20	-11.47	43.51	34.60	10.26	31.64	0.00	307	0 PEAK	2	5650.69	56.13	68.71	-12.58	42.90	34.60	10.29	31.66	0.00	307	0 PEAK	3	5709.28	67.85	107.90	-40.05	54.72	34.60	10.33	31.00	0.00	307	0 PEAK	4	5720.28	65.92	111.54	-45.62	52.81	34.60	10.34	31.83	0.00	307	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>100.74</td> <td>-----</td> <td>-----</td> <td>95.69</td> <td>34.60</td> <td>10.37</td> <td>31.92</td> <td>0.00</td> <td>307</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5755.00	100.74	-----	-----	95.69	34.60	10.37	31.92	0.00	307	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5614.88	56.73	68.20	-11.47	43.51	34.60	10.26	31.64	0.00	307	0 PEAK																																																																																																																	
2	5650.69	56.13	68.71	-12.58	42.90	34.60	10.29	31.66	0.00	307	0 PEAK																																																																																																																	
3	5709.28	67.85	107.90	-40.05	54.72	34.60	10.33	31.00	0.00	307	0 PEAK																																																																																																																	
4	5720.28	65.92	111.54	-45.62	52.81	34.60	10.34	31.83	0.00	307	0 PEAK																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5755.00	100.74	-----	-----	95.69	34.60	10.37	31.92	0.00	307	0 PEAK																																																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>100.70</td> <td>-----</td> <td>-----</td> <td>87.64</td> <td>34.60</td> <td>10.37</td> <td>31.91</td> <td>0.00</td> <td>307</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5755.00	100.70	-----	-----	87.64	34.60	10.37	31.91	0.00	307	0 AVERAGE																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	5755.00	100.70	-----	-----	87.64	34.60	10.37	31.91	0.00	307	0 AVERAGE																																																																																																																	



Mode	73																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_Full_5755MHz																																																																																			
ANT	CDD 8+5																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>53.57</td> <td>111.71</td> <td>-58.14</td> <td>40.56</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>307</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.22</td> <td>54.87</td> <td>106.36</td> <td>-51.49</td> <td>41.78</td> <td>34.78</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>307</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>53.17</td> <td>68.46</td> <td>-15.29</td> <td>39.76</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>307</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.92</td> <td>54.84</td> <td>68.20</td> <td>-13.36</td> <td>41.40</td> <td>35.08</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>307</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.65	53.57	111.71	-58.14	40.56	34.72	10.45	32.16	0.00	307	0	PEAK	2	5871.22	54.87	106.36	-51.49	41.78	34.78	10.47	32.16	0.00	307	0	PEAK	3	5924.65	53.17	68.46	-15.29	39.76	35.05	10.52	32.16	0.00	307	0	PEAK	4	5929.92	54.84	68.20	-13.36	41.40	35.08	10.52	32.16	0.00	307	0	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.65	53.57	111.71	-58.14	40.56	34.72	10.45	32.16	0.00	307	0	PEAK																																																																								
2	5871.22	54.87	106.36	-51.49	41.78	34.78	10.47	32.16	0.00	307	0	PEAK																																																																								
3	5924.65	53.17	68.46	-15.29	39.76	35.05	10.52	32.16	0.00	307	0	PEAK																																																																								
4	5929.92	54.84	68.20	-13.36	41.40	35.08	10.52	32.16	0.00	307	0	PEAK																																																																								



Mode	73																																																																																																																																																																						
	Harmonic																																																																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_Full_5755MHz																																																																																																																																																																						
ANT	CDD 8+5																																																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																																																					
Peak Avg																																																																																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8057.00</td> <td>45.66</td> <td>74.00</td> <td>-28.34</td> <td>57.68</td> <td>35.00</td> <td>12.44</td> <td>60.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>49.88</td> <td>74.00</td> <td>-24.12</td> <td>57.93</td> <td>38.21</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11510.00</td> <td>38.96</td> <td>54.00</td> <td>-15.04</td> <td>47.02</td> <td>38.20</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17265.00</td> <td>58.61</td> <td>68.20</td> <td>-9.59</td> <td>58.68</td> <td>40.90</td> <td>18.38</td> <td>59.35</td> <td>0.00</td> <td>300</td> <td>312</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8057.00	45.66	74.00	-28.34	57.68	35.00	12.44	60.26	0.00	---	---	PEAK	2	11510.00	49.88	74.00	-24.12	57.93	38.21	14.92	61.18	0.00	100	360	PEAK	3	11510.00	38.96	54.00	-15.04	47.02	38.20	14.92	61.18	0.00	100	360	AVERAGE	4	17265.00	58.61	68.20	-9.59	58.68	40.90	18.38	59.35	0.00	300	312	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8057.00</td> <td>44.70</td> <td>74.00</td> <td>-29.30</td> <td>56.72</td> <td>35.80</td> <td>12.44</td> <td>60.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>47.32</td> <td>74.00</td> <td>-26.68</td> <td>55.37</td> <td>38.21</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11510.00</td> <td>37.18</td> <td>54.00</td> <td>-16.82</td> <td>45.23</td> <td>38.21</td> <td>14.92</td> <td>61.18</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17265.00</td> <td>56.57</td> <td>68.20</td> <td>-11.63</td> <td>56.64</td> <td>40.90</td> <td>18.38</td> <td>59.35</td> <td>0.00</td> <td>300</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8057.00	44.70	74.00	-29.30	56.72	35.80	12.44	60.26	0.00	---	---	PEAK	2	11510.00	47.32	74.00	-26.68	55.37	38.21	14.92	61.18	0.00	100	360	PEAK	3	11510.00	37.18	54.00	-16.82	45.23	38.21	14.92	61.18	0.00	100	360	AVERAGE	4	17265.00	56.57	68.20	-11.63	56.64	40.90	18.38	59.35	0.00	300	24
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																													
1	8057.00	45.66	74.00	-28.34	57.68	35.00	12.44	60.26	0.00	---	---	PEAK																																																																																																																																																											
2	11510.00	49.88	74.00	-24.12	57.93	38.21	14.92	61.18	0.00	100	360	PEAK																																																																																																																																																											
3	11510.00	38.96	54.00	-15.04	47.02	38.20	14.92	61.18	0.00	100	360	AVERAGE																																																																																																																																																											
4	17265.00	58.61	68.20	-9.59	58.68	40.90	18.38	59.35	0.00	300	312	PEAK																																																																																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																													
1	8057.00	44.70	74.00	-29.30	56.72	35.80	12.44	60.26	0.00	---	---	PEAK																																																																																																																																																											
2	11510.00	47.32	74.00	-26.68	55.37	38.21	14.92	61.18	0.00	100	360	PEAK																																																																																																																																																											
3	11510.00	37.18	54.00	-16.82	45.23	38.21	14.92	61.18	0.00	100	360	AVERAGE																																																																																																																																																											
4	17265.00	56.57	68.20	-11.63	56.64	40.90	18.38	59.35	0.00	300	24	PEAK																																																																																																																																																											



74																																																																							
Mode	Band Edge - L																																																																						
U-NII-3_5.725-5.85_802.11n HT40_CH159_Full_5795MHz																																																																							
ANT	CDD 8+5																																																																						
Pol.	Horizontal																																																																						
Peak	Fundamental																																																																						
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.60</td> <td>56.33</td> <td>68.20</td> <td>-11.87</td> <td>43.10</td> <td>34.60</td> <td>10.27</td> <td>31.64</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> <tr> <td>2</td> <td>5652.40</td> <td>55.50</td> <td>69.99</td> <td>-14.49</td> <td>42.27</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> <tr> <td>3</td> <td>5701.20</td> <td>56.36</td> <td>105.64</td> <td>-49.28</td> <td>43.21</td> <td>34.60</td> <td>10.33</td> <td>31.78</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>60.25</td> <td>111.81</td> <td>-51.56</td> <td>47.14</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> </tbody> </table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5629.60	56.33	68.20	-11.87	43.10	34.60	10.27	31.64	0.00	300	54 PEAK	2	5652.40	55.50	69.99	-14.49	42.27	34.60	10.29	31.66	0.00	300	54 PEAK	3	5701.20	56.36	105.64	-49.28	43.21	34.60	10.33	31.78	0.00	300	54 PEAK	4	5720.40	60.25	111.81	-51.56	47.14	34.60	10.34	31.83	0.00	300	54 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																													
1	5629.60	56.33	68.20	-11.87	43.10	34.60	10.27	31.64	0.00	300	54 PEAK																																																												
2	5652.40	55.50	69.99	-14.49	42.27	34.60	10.29	31.66	0.00	300	54 PEAK																																																												
3	5701.20	56.36	105.64	-49.28	43.21	34.60	10.33	31.78	0.00	300	54 PEAK																																																												
4	5720.40	60.25	111.81	-51.56	47.14	34.60	10.34	31.83	0.00	300	54 PEAK																																																												
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>107.89</td> <td>-----</td> <td>-----</td> <td>94.89</td> <td>34.60</td> <td>10.40</td> <td>32.00</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> </tbody> </table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5795.00	107.89	-----	-----	94.89	34.60	10.40	32.00	0.00	300	54 PEAK																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																													
1	5795.00	107.89	-----	-----	94.89	34.60	10.40	32.00	0.00	300	54 PEAK																																																												
Avg	Blank																																																																						
<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4636.00</td> <td>49.63</td> <td>54.00</td> <td>-4.37</td> <td>38.22</td> <td>34.10</td> <td>9.21</td> <td>31.90</td> <td>0.00</td> <td>300</td> <td>54 AVERAGE</td> </tr> <tr> <td>2</td> <td>5795.00</td> <td>99.39</td> <td>-----</td> <td>-----</td> <td>86.40</td> <td>34.60</td> <td>10.41</td> <td>32.02</td> <td>0.00</td> <td>300</td> <td>54 AVERAGE</td> </tr> </tbody> </table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	4636.00	49.63	54.00	-4.37	38.22	34.10	9.21	31.90	0.00	300	54 AVERAGE	2	5795.00	99.39	-----	-----	86.40	34.60	10.41	32.02	0.00	300	54 AVERAGE																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																													
1	4636.00	49.63	54.00	-4.37	38.22	34.10	9.21	31.90	0.00	300	54 AVERAGE																																																												
2	5795.00	99.39	-----	-----	86.40	34.60	10.41	32.02	0.00	300	54 AVERAGE																																																												



Mode	74																																																																											
	Band Edge - R																																																																											
	U-NII-3_5.725-5.85_802.11n HT40_CH159_Full_5795MHz																																																																											
ANT	CDD 8+5																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.80</td> <td>58.68</td> <td>111.36</td> <td>-52.68</td> <td>45.67</td> <td>34.72</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> <tr> <td>2 5869.20</td> <td>60.55</td> <td>106.92</td> <td>-46.37</td> <td>47.46</td> <td>34.78</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> <tr> <td>3 5924.80</td> <td>53.73</td> <td>68.35</td> <td>-14.62</td> <td>40.32</td> <td>35.05</td> <td>10.52</td> <td>32.16</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> <tr> <td>4 5981.60</td> <td>55.51</td> <td>68.20</td> <td>-12.69</td> <td>41.78</td> <td>35.33</td> <td>10.57</td> <td>32.17</td> <td>0.00</td> <td>300</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.80	58.68	111.36	-52.68	45.67	34.72	10.45	32.16	0.00	300	54 PEAK	2 5869.20	60.55	106.92	-46.37	47.46	34.78	10.47	32.16	0.00	300	54 PEAK	3 5924.80	53.73	68.35	-14.62	40.32	35.05	10.52	32.16	0.00	300	54 PEAK	4 5981.60	55.51	68.20	-12.69	41.78	35.33	10.57	32.17	0.00	300	54 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5854.80	58.68	111.36	-52.68	45.67	34.72	10.45	32.16	0.00	300	54 PEAK																																																																		
2 5869.20	60.55	106.92	-46.37	47.46	34.78	10.47	32.16	0.00	300	54 PEAK																																																																		
3 5924.80	53.73	68.35	-14.62	40.32	35.05	10.52	32.16	0.00	300	54 PEAK																																																																		
4 5981.60	55.51	68.20	-12.69	41.78	35.33	10.57	32.17	0.00	300	54 PEAK																																																																		



74																																																																																				
Mode	Band Edge - L																																																																																			
U-NII-3_5.725-5.85_802.11n HT40_CH159_Full_5795MHz																																																																																				
ANT	CDD 8+5																																																																																			
Pol.	Vertical																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.20</td> <td>56.03</td> <td>68.20</td> <td>-12.17</td> <td>42.83</td> <td>34.60</td> <td>10.25</td> <td>31.65</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.80</td> <td>54.57</td> <td>68.80</td> <td>-14.23</td> <td>41.34</td> <td>34.60</td> <td>10.29</td> <td>31.66</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5706.80</td> <td>57.55</td> <td>107.21</td> <td>-49.66</td> <td>44.41</td> <td>34.60</td> <td>10.33</td> <td>31.79</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>56.71</td> <td>111.81</td> <td>-55.10</td> <td>43.60</td> <td>34.60</td> <td>10.34</td> <td>31.83</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5611.20	56.03	68.20	-12.17	42.83	34.60	10.25	31.65	0.00	214	360	PEAK	2	5650.80	54.57	68.80	-14.23	41.34	34.60	10.29	31.66	0.00	214	360	PEAK	3	5706.80	57.55	107.21	-49.66	44.41	34.60	10.33	31.79	0.00	214	360	PEAK	4	5720.40	56.71	111.81	-55.10	43.60	34.60	10.34	31.83	0.00	214	360	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5611.20	56.03	68.20	-12.17	42.83	34.60	10.25	31.65	0.00	214	360	PEAK																																																																								
2	5650.80	54.57	68.80	-14.23	41.34	34.60	10.29	31.66	0.00	214	360	PEAK																																																																								
3	5706.80	57.55	107.21	-49.66	44.41	34.60	10.33	31.79	0.00	214	360	PEAK																																																																								
4	5720.40	56.71	111.81	-55.10	43.60	34.60	10.34	31.83	0.00	214	360	PEAK																																																																								
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>108.59</td> <td>-----</td> <td>-----</td> <td>95.60</td> <td>34.60</td> <td>10.41</td> <td>32.02</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	108.59	-----	-----	95.60	34.60	10.41	32.02	0.00	214	360	PEAK																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	5795.00	108.59	-----	-----	95.60	34.60	10.41	32.02	0.00	214	360	PEAK																																																																								
Avg	Blank																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4636.00</td> <td>49.36</td> <td>54.00</td> <td>-4.64</td> <td>37.95</td> <td>34.10</td> <td>9.21</td> <td>31.90</td> <td>0.00</td> <td>214</td> <td>360</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5795.00</td> <td>99.94</td> <td>-----</td> <td>-----</td> <td>86.95</td> <td>34.60</td> <td>10.41</td> <td>32.02</td> <td>0.00</td> <td>214</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4636.00	49.36	54.00	-4.64	37.95	34.10	9.21	31.90	0.00	214	360	Average	2	5795.00	99.94	-----	-----	86.95	34.60	10.41	32.02	0.00	214	360	AVERAGE																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	4636.00	49.36	54.00	-4.64	37.95	34.10	9.21	31.90	0.00	214	360	Average																																																																								
2	5795.00	99.94	-----	-----	86.95	34.60	10.41	32.02	0.00	214	360	AVERAGE																																																																								





Mode	74																																																																		
	Band Edge - R																																																																		
	U-NII-3_5.725-5.85_802.11n HT40_CH159_Full_5795MHz																																																																		
ANT	CDD 8+5																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>Read (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>59.22</td> <td>114.09</td> <td>-54.87</td> <td>46.22</td> <td>34.71</td> <td>10.45</td> <td>32.16</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.40</td> <td>59.52</td> <td>106.59</td> <td>-47.07</td> <td>46.43</td> <td>34.78</td> <td>10.47</td> <td>32.16</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.60</td> <td>54.68</td> <td>69.23</td> <td>-14.55</td> <td>41.29</td> <td>35.04</td> <td>10.51</td> <td>32.16</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5953.60</td> <td>55.70</td> <td>68.20</td> <td>-12.50</td> <td>42.12</td> <td>35.21</td> <td>10.54</td> <td>32.17</td> <td>0.00</td> <td>214</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5853.60	59.22	114.09	-54.87	46.22	34.71	10.45	32.16	0.00	214	360	PEAK	2	5870.40	59.52	106.59	-47.07	46.43	34.78	10.47	32.16	0.00	214	360	PEAK	3	5923.60	54.68	69.23	-14.55	41.29	35.04	10.51	32.16	0.00	214	360	PEAK	4	5953.60	55.70	68.20	-12.50	42.12	35.21	10.54	32.17	0.00	214	360	PEAK	Blank
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5853.60	59.22	114.09	-54.87	46.22	34.71	10.45	32.16	0.00	214	360	PEAK																																																							
2	5870.40	59.52	106.59	-47.07	46.43	34.78	10.47	32.16	0.00	214	360	PEAK																																																							
3	5923.60	54.68	69.23	-14.55	41.29	35.04	10.51	32.16	0.00	214	360	PEAK																																																							
4	5953.60	55.70	68.20	-12.50	42.12	35.21	10.54	32.17	0.00	214	360	PEAK																																																							





Mode	74																																																																																																																																																																						
	Harmonic																																																																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH159_Full_5795MHz																																																																																																																																																																						
ANT	CDD 8+5																																																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																																																					
Peak Avg																																																																																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8113.00</td> <td>46.00</td> <td>74.00</td> <td>-27.92</td> <td>58.18</td> <td>35.00</td> <td>12.45</td> <td>60.35</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>47.70</td> <td>74.00</td> <td>-26.30</td> <td>55.58</td> <td>38.29</td> <td>14.98</td> <td>61.15</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11590.00</td> <td>38.06</td> <td>54.00</td> <td>-15.94</td> <td>45.96</td> <td>38.28</td> <td>14.97</td> <td>61.15</td> <td>0.00</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17385.00</td> <td>56.73</td> <td>68.20</td> <td>-11.47</td> <td>56.77</td> <td>40.90</td> <td>18.46</td> <td>59.40</td> <td>0.00</td> <td>300</td> <td>311</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8113.00	46.00	74.00	-27.92	58.18	35.00	12.45	60.35	0.00	---	---	PEAK	2	11590.00	47.70	74.00	-26.30	55.58	38.29	14.98	61.15	0.00	100	0	PEAK	3	11590.00	38.06	54.00	-15.94	45.96	38.28	14.97	61.15	0.00	100	0	AVERAGE	4	17385.00	56.73	68.20	-11.47	56.77	40.90	18.46	59.40	0.00	300	311	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8113.00</td> <td>44.27</td> <td>74.00</td> <td>-29.73</td> <td>56.37</td> <td>35.00</td> <td>12.45</td> <td>60.35</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>47.23</td> <td>74.00</td> <td>-26.77</td> <td>55.11</td> <td>38.29</td> <td>14.98</td> <td>61.15</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11590.00</td> <td>36.67</td> <td>54.00</td> <td>-17.33</td> <td>44.55</td> <td>38.29</td> <td>14.98</td> <td>61.15</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17385.00</td> <td>50.61</td> <td>68.20</td> <td>-17.59</td> <td>50.65</td> <td>40.90</td> <td>18.46</td> <td>59.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8113.00	44.27	74.00	-29.73	56.37	35.00	12.45	60.35	0.00	---	---	PEAK	2	11590.00	47.23	74.00	-26.77	55.11	38.29	14.98	61.15	0.00	100	360	PEAK	3	11590.00	36.67	54.00	-17.33	44.55	38.29	14.98	61.15	0.00	100	360	AVERAGE	4	17385.00	50.61	68.20	-17.59	50.65	40.90	18.46	59.40	0.00	---	---
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																													
1	8113.00	46.00	74.00	-27.92	58.18	35.00	12.45	60.35	0.00	---	---	PEAK																																																																																																																																																											
2	11590.00	47.70	74.00	-26.30	55.58	38.29	14.98	61.15	0.00	100	0	PEAK																																																																																																																																																											
3	11590.00	38.06	54.00	-15.94	45.96	38.28	14.97	61.15	0.00	100	0	AVERAGE																																																																																																																																																											
4	17385.00	56.73	68.20	-11.47	56.77	40.90	18.46	59.40	0.00	300	311	PEAK																																																																																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																													
1	8113.00	44.27	74.00	-29.73	56.37	35.00	12.45	60.35	0.00	---	---	PEAK																																																																																																																																																											
2	11590.00	47.23	74.00	-26.77	55.11	38.29	14.98	61.15	0.00	100	360	PEAK																																																																																																																																																											
3	11590.00	36.67	54.00	-17.33	44.55	38.29	14.98	61.15	0.00	100	360	AVERAGE																																																																																																																																																											
4	17385.00	50.61	68.20	-17.59	50.65	40.90	18.46	59.40	0.00	---	---	PEAK																																																																																																																																																											

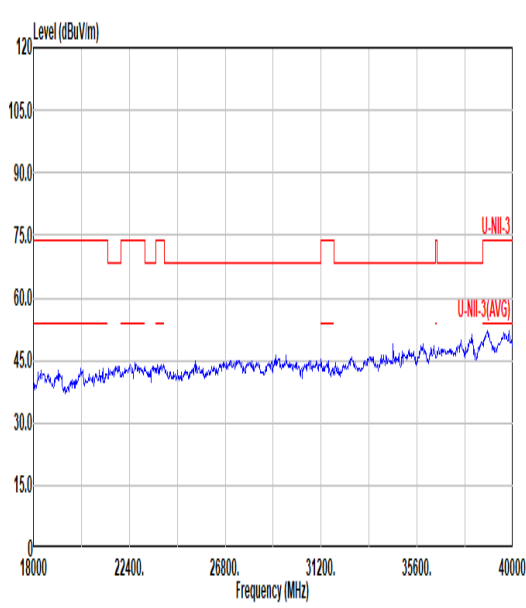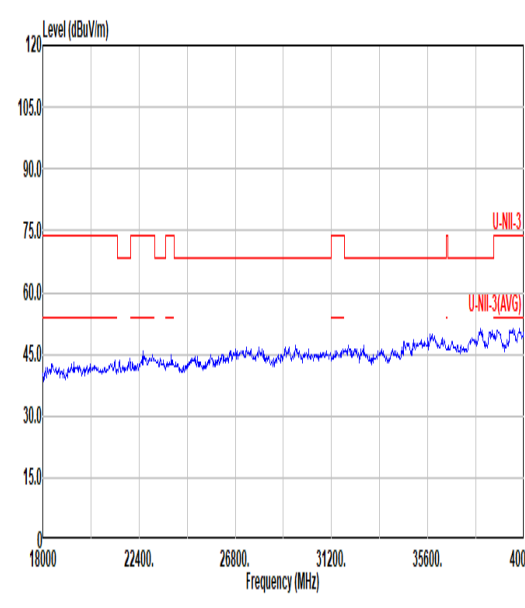

Mode	48	
	18-40G	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full_5785MHz	
ANT	CDD 8+5	
Pol.	Horizontal	Vertical
Peak Avg		

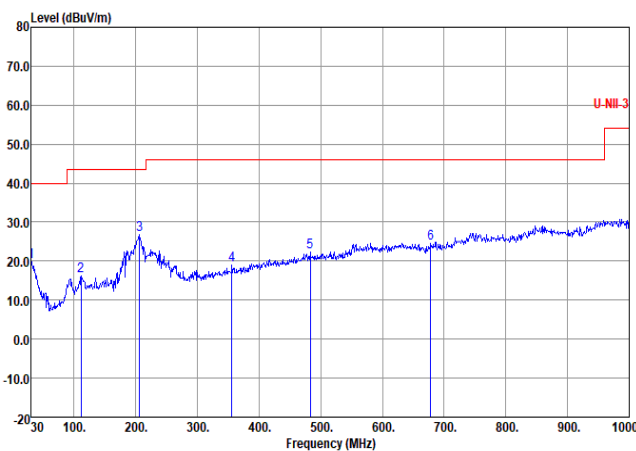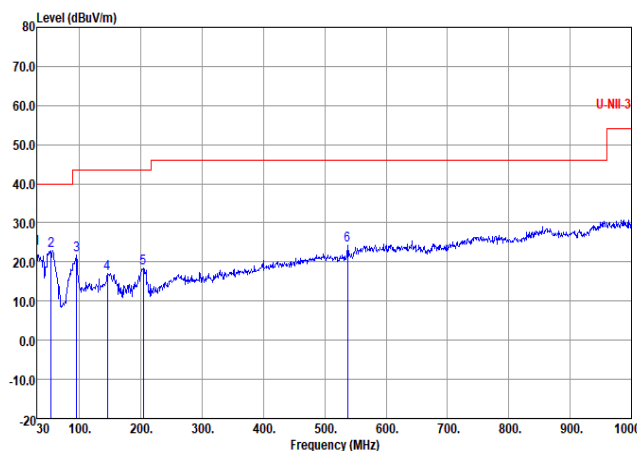

Mode	48																																																																																																																																																											
	LF																																																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full_5785MHz																																																																																																																																																											
ANT	CDD 8+5																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																										
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Level (dBuV/m)</th> <th>Limit Line</th> <th>Over Limit</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>1</th> <td>30.00</td> <td>40.00</td> <td>-20.11</td> <td>27.60</td> <td>24.86</td> <td>0.45</td> <td>33.02</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>2</th> <td>111.48</td> <td>43.50</td> <td>-27.36</td> <td>30.50</td> <td>17.00</td> <td>1.42</td> <td>32.86</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>3</th> <td>206.54</td> <td>43.50</td> <td>-16.67</td> <td>42.57</td> <td>15.14</td> <td>1.95</td> <td>32.83</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>4</th> <td>355.92</td> <td>46.00</td> <td>-27.05</td> <td>28.72</td> <td>20.61</td> <td>2.54</td> <td>32.92</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>5</th> <td>482.99</td> <td>46.00</td> <td>-23.61</td> <td>28.66</td> <td>23.73</td> <td>2.97</td> <td>32.97</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>6</th> <td>677.96</td> <td>46.00</td> <td>-21.54</td> <td>27.29</td> <td>26.67</td> <td>3.52</td> <td>33.02</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </thead> </table>	Peak	Level (dBuV/m)	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Loss	Aux Factor	A/Pos	T/Pos	Remark	1	30.00	40.00	-20.11	27.60	24.86	0.45	33.02	0.00	---	Peak	2	111.48	43.50	-27.36	30.50	17.00	1.42	32.86	0.00	---	Peak	3	206.54	43.50	-16.67	42.57	15.14	1.95	32.83	0.00	---	Peak	4	355.92	46.00	-27.05	28.72	20.61	2.54	32.92	0.00	---	Peak	5	482.99	46.00	-23.61	28.66	23.73	2.97	32.97	0.00	---	Peak	6	677.96	46.00	-21.54	27.29	26.67	3.52	33.02	0.00	---	Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Level (dBuV/m)</th> <th>Limit Line</th> <th>Over Limit</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>1</th> <td>30.00</td> <td>40.00</td> <td>-16.69</td> <td>31.02</td> <td>24.86</td> <td>0.45</td> <td>33.02</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>2</th> <td>53.28</td> <td>40.00</td> <td>-17.02</td> <td>41.71</td> <td>13.43</td> <td>0.76</td> <td>32.92</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>3</th> <td>94.99</td> <td>43.50</td> <td>-21.66</td> <td>37.94</td> <td>15.49</td> <td>1.28</td> <td>32.87</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>4</th> <td>145.43</td> <td>43.50</td> <td>-26.55</td> <td>30.76</td> <td>17.41</td> <td>1.61</td> <td>32.83</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>5</th> <td>203.63</td> <td>43.50</td> <td>-25.16</td> <td>34.11</td> <td>15.12</td> <td>1.94</td> <td>32.83</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <th>6</th> <td>537.31</td> <td>46.00</td> <td>-21.59</td> <td>29.95</td> <td>24.39</td> <td>3.13</td> <td>33.06</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </thead> </table>	Peak	Level (dBuV/m)	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Loss	Aux Factor	A/Pos	T/Pos	Remark	1	30.00	40.00	-16.69	31.02	24.86	0.45	33.02	0.00	---	Peak	2	53.28	40.00	-17.02	41.71	13.43	0.76	32.92	0.00	---	Peak	3	94.99	43.50	-21.66	37.94	15.49	1.28	32.87	0.00	---	Peak	4	145.43	43.50	-26.55	30.76	17.41	1.61	32.83	0.00	---	Peak	5	203.63	43.50	-25.16	34.11	15.12	1.94	32.83	0.00	---	Peak	6	537.31	46.00	-21.59	29.95	24.39	3.13	33.06	0.00	---	Peak
	Peak	Level (dBuV/m)	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Loss	Aux Factor	A/Pos	T/Pos	Remark																																																																																																																																																	
1	30.00	40.00	-20.11	27.60	24.86	0.45	33.02	0.00	---	Peak																																																																																																																																																		
2	111.48	43.50	-27.36	30.50	17.00	1.42	32.86	0.00	---	Peak																																																																																																																																																		
3	206.54	43.50	-16.67	42.57	15.14	1.95	32.83	0.00	---	Peak																																																																																																																																																		
4	355.92	46.00	-27.05	28.72	20.61	2.54	32.92	0.00	---	Peak																																																																																																																																																		
5	482.99	46.00	-23.61	28.66	23.73	2.97	32.97	0.00	---	Peak																																																																																																																																																		
6	677.96	46.00	-21.54	27.29	26.67	3.52	33.02	0.00	---	Peak																																																																																																																																																		
Peak	Level (dBuV/m)	Limit Line	Over Limit	ReadAntenna Level	Cable Loss	Preamp Loss	Aux Factor	A/Pos	T/Pos	Remark																																																																																																																																																		
1	30.00	40.00	-16.69	31.02	24.86	0.45	33.02	0.00	---	Peak																																																																																																																																																		
2	53.28	40.00	-17.02	41.71	13.43	0.76	32.92	0.00	---	Peak																																																																																																																																																		
3	94.99	43.50	-21.66	37.94	15.49	1.28	32.87	0.00	---	Peak																																																																																																																																																		
4	145.43	43.50	-26.55	30.76	17.41	1.61	32.83	0.00	---	Peak																																																																																																																																																		
5	203.63	43.50	-25.16	34.11	15.12	1.94	32.83	0.00	---	Peak																																																																																																																																																		
6	537.31	46.00	-21.59	29.95	24.39	3.13	33.06	0.00	---	Peak																																																																																																																																																		



<Straddle channel>

Mode	59																																																																																																																																																										
	Harmonic																																																																																																																																																										
	U-NII-2C_5.47-5.85_802.11a_CH144_5720MHz																																																																																																																																																										
ANT	CDD 8+5																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8004.30</td> <td>44.22</td> <td>68.20</td> <td>-23.98</td> <td>56.17</td> <td>35.80</td> <td>12.43</td> <td>60.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>46.81</td> <td>74.00</td> <td>-27.19</td> <td>54.99</td> <td>38.14</td> <td>14.87</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>60.75</td> <td>68.20</td> <td>-7.45</td> <td>60.80</td> <td>40.94</td> <td>18.31</td> <td>59.30</td> <td>0.00</td> <td>100</td> <td>332</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8004.30	44.22	68.20	-23.98	56.17	35.80	12.43	60.18	0.00	---	---	Peak	2	11440.00	46.81	74.00	-27.19	54.99	38.14	14.87	61.19	0.00	---	---	PEAK	3	17160.00	60.75	68.20	-7.45	60.80	40.94	18.31	59.30	0.00	100	332	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8002.10</td> <td>45.11</td> <td>68.20</td> <td>-23.09</td> <td>57.05</td> <td>35.80</td> <td>12.43</td> <td>60.17</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>52.61</td> <td>74.00</td> <td>-21.39</td> <td>60.79</td> <td>38.14</td> <td>14.87</td> <td>61.19</td> <td>0.00</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>11440.00</td> <td>41.71</td> <td>54.00</td> <td>-12.29</td> <td>49.69</td> <td>38.14</td> <td>14.87</td> <td>61.19</td> <td>0.00</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> <tr> <td>4</td> <td>17160.00</td> <td>64.51</td> <td>68.20</td> <td>-3.69</td> <td>64.56</td> <td>40.94</td> <td>18.31</td> <td>59.30</td> <td>0.00</td> <td>105</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	8002.10	45.11	68.20	-23.09	57.05	35.80	12.43	60.17	0.00	---	---	Peak	2	11440.00	52.61	74.00	-21.39	60.79	38.14	14.87	61.19	0.00	100	100	PEAK	3	11440.00	41.71	54.00	-12.29	49.69	38.14	14.87	61.19	0.00	100	100	AVERAGE	4	17160.00	64.51	68.20	-3.69	64.56	40.94	18.31	59.30	0.00	105	253	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																	
1	8004.30	44.22	68.20	-23.98	56.17	35.80	12.43	60.18	0.00	---	---	Peak																																																																																																																																															
2	11440.00	46.81	74.00	-27.19	54.99	38.14	14.87	61.19	0.00	---	---	PEAK																																																																																																																																															
3	17160.00	60.75	68.20	-7.45	60.80	40.94	18.31	59.30	0.00	100	332	PEAK																																																																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																	
1	8002.10	45.11	68.20	-23.09	57.05	35.80	12.43	60.17	0.00	---	---	Peak																																																																																																																																															
2	11440.00	52.61	74.00	-21.39	60.79	38.14	14.87	61.19	0.00	100	100	PEAK																																																																																																																																															
3	11440.00	41.71	54.00	-12.29	49.69	38.14	14.87	61.19	0.00	100	100	AVERAGE																																																																																																																																															
4	17160.00	64.51	68.20	-3.69	64.56	40.94	18.31	59.30	0.00	105	253	PEAK																																																																																																																																															



Mode	60																																																																																																										
	Harmonic																																																																																																										
	U-NII-2C_5.47-5.85_802.11ax HE20_CH144_5720MHz																																																																																																										
ANT	CDD 8+5																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>46.34</td> <td>74.00</td> <td>-27.66</td> <td>54.52</td> <td>38.14</td> <td>14.87</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>53.05</td> <td>68.20</td> <td>-15.15</td> <td>53.09</td> <td>40.95</td> <td>18.31</td> <td>59.30</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11440.00	46.34	74.00	-27.66	54.52	38.14	14.87	61.19	0.00	---	---	PEAK	2	17160.00	53.05	68.20	-15.15	53.09	40.95	18.31	59.30	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>46.35</td> <td>74.00</td> <td>-27.65</td> <td>54.53</td> <td>38.14</td> <td>14.87</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>64.42</td> <td>68.20</td> <td>-3.78</td> <td>64.47</td> <td>40.94</td> <td>18.31</td> <td>59.30</td> <td>0.00</td> <td>101</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11440.00	46.35	74.00	-27.65	54.53	38.14	14.87	61.19	0.00	---	---	PEAK	2	17160.00	64.42	68.20	-3.78	64.47	40.94	18.31	59.30	0.00	101	253
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																			
1	11440.00	46.34	74.00	-27.66	54.52	38.14	14.87	61.19	0.00	---	---	PEAK																																																																																															
2	17160.00	53.05	68.20	-15.15	53.09	40.95	18.31	59.30	0.00	---	---	PEAK																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																			
1	11440.00	46.35	74.00	-27.65	54.53	38.14	14.87	61.19	0.00	---	---	PEAK																																																																																															
2	17160.00	64.42	68.20	-3.78	64.47	40.94	18.31	59.30	0.00	101	253	PEAK																																																																																															







Mode	61																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-2C_5.47-5.85_802.11ax HE40_CH142_5710MHz																																																																																																																								
ANT	CDD 8+5																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																							
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>46.68</td> <td>74.00</td> <td>-27.32</td> <td>54.89</td> <td>38.12</td> <td>14.86</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17130.00</td> <td>51.04</td> <td>68.20</td> <td>-17.16</td> <td>51.07</td> <td>40.96</td> <td>18.30</td> <td>59.29</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11420.00	46.68	74.00	-27.32	54.89	38.12	14.86	61.19	0.00	---	---	PEAK	2	17130.00	51.04	68.20	-17.16	51.07	40.96	18.30	59.29	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>47.20</td> <td>74.00</td> <td>-26.80</td> <td>55.41</td> <td>38.12</td> <td>14.86</td> <td>61.19</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>37.01</td> <td>54.00</td> <td>-16.99</td> <td>45.22</td> <td>38.12</td> <td>14.86</td> <td>61.19</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>61.34</td> <td>68.20</td> <td>-6.86</td> <td>61.37</td> <td>40.97</td> <td>18.29</td> <td>59.29</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11420.00	47.20	74.00	-26.80	55.41	38.12	14.86	61.19	0.00	100	360	PEAK	2	11420.00	37.01	54.00	-16.99	45.22	38.12	14.86	61.19	0.00	100	360	AVERAGE	3	17130.00	61.34	68.20	-6.86	61.37	40.97	18.29	59.29	0.00	100	252	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	11420.00	46.68	74.00	-27.32	54.89	38.12	14.86	61.19	0.00	---	---	PEAK																																																																																																													
2	17130.00	51.04	68.20	-17.16	51.07	40.96	18.30	59.29	0.00	---	---	PEAK																																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	11420.00	47.20	74.00	-26.80	55.41	38.12	14.86	61.19	0.00	100	360	PEAK																																																																																																													
2	11420.00	37.01	54.00	-16.99	45.22	38.12	14.86	61.19	0.00	100	360	AVERAGE																																																																																																													
3	17130.00	61.34	68.20	-6.86	61.37	40.97	18.29	59.29	0.00	100	252	PEAK																																																																																																													



Mode	62																																																																																																																		
	Harmonic																																																																																																																		
	U-NII-2C_5.47-5.85_802.11ax HE80_CH138_5690MHz																																																																																																																		
ANT	CDD 8+5																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																	
Peak Avg																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>45.37</td> <td>74.00</td> <td>-28.63</td> <td>53.65</td> <td>38.08</td> <td>14.83</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17070.00</td> <td>51.29</td> <td>68.20</td> <td>-16.91</td> <td>51.21</td> <td>41.09</td> <td>18.25</td> <td>59.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11380.00	45.37	74.00	-28.63	53.65	38.08	14.83	61.19	0.00	---	---	PEAK	2	17070.00	51.29	68.20	-16.91	51.21	41.09	18.25	59.26	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>45.58</td> <td>74.00</td> <td>-28.42</td> <td>53.86</td> <td>38.08</td> <td>14.83</td> <td>61.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17070.00</td> <td>52.30</td> <td>68.20</td> <td>-15.90</td> <td>52.26</td> <td>41.04</td> <td>18.26</td> <td>59.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11380.00	45.58	74.00	-28.42	53.86	38.08	14.83	61.19	0.00	---	---	PEAK	2	17070.00	52.30	68.20	-15.90	52.26	41.04	18.26	59.26	0.00	---	---
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	11380.00	45.37	74.00	-28.63	53.65	38.08	14.83	61.19	0.00	---	---	PEAK																																																																																																							
2	17070.00	51.29	68.20	-16.91	51.21	41.09	18.25	59.26	0.00	---	---	PEAK																																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	11380.00	45.58	74.00	-28.42	53.86	38.08	14.83	61.19	0.00	---	---	PEAK																																																																																																							
2	17070.00	52.30	68.20	-15.90	52.26	41.04	18.26	59.26	0.00	---	---	PEAK																																																																																																							



<Co-location>

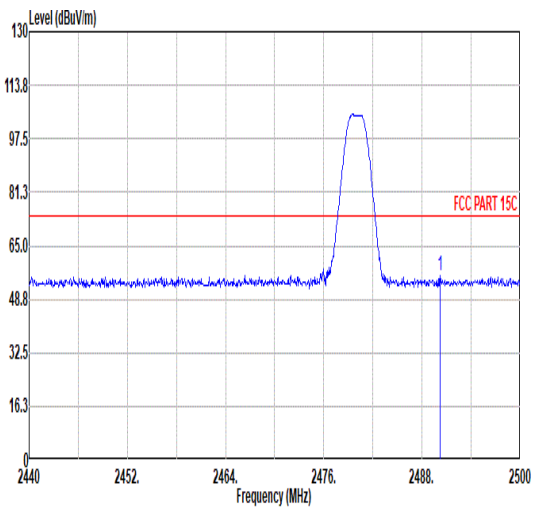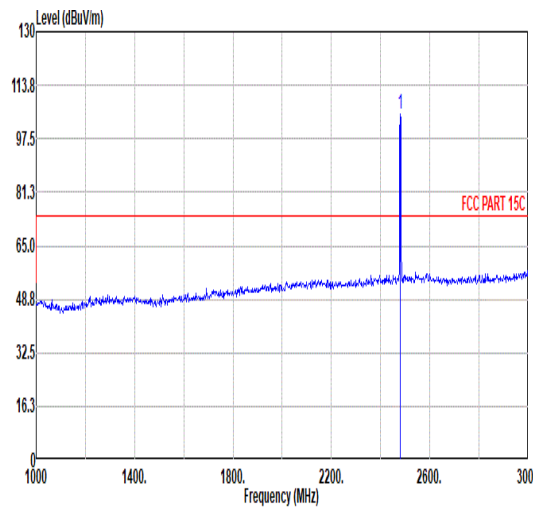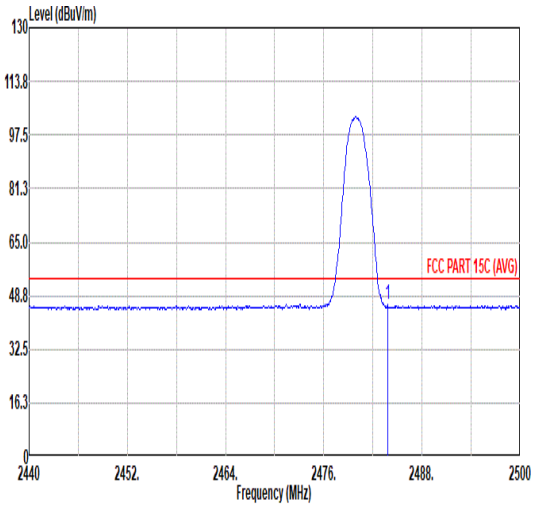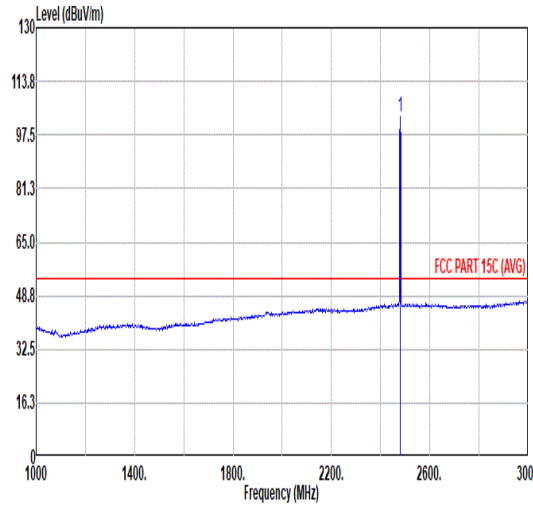Mode	75																																																																																									
	Co-location Band Edge																																																																																									
	Bluetooth-LE_GSKF_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.22</td> <td>55.88</td> <td>74.00</td> <td>-18.12</td> <td>42.74</td> <td>32.64</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>101</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2490.22	55.88	74.00	-18.12	42.74	32.64	6.74	32.24	6.00	101	285	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>105.00</td> <td>-----</td> <td>-----</td> <td>92.00</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>101</td> <td>285</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	105.00	-----	-----	92.00	32.58	6.73	32.23	6.00	101	285	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2490.22	55.88	74.00	-18.12	42.74	32.64	6.74	32.24	6.00	101	285	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2480.00	105.00	-----	-----	92.00	32.58	6.73	32.23	6.00	101	285	PEAK																																																																														
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.80</td> <td>45.94</td> <td>54.00</td> <td>-8.06</td> <td>32.84</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>101</td> <td>285</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.80	45.94	54.00	-8.06	32.84	32.60	6.73	32.23	6.00	101	285	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>102.86</td> <td>-----</td> <td>-----</td> <td>89.78</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>101</td> <td>285</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	102.86	-----	-----	89.78	32.58	6.73	32.23	6.00	101	285	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2483.80	45.94	54.00	-8.06	32.84	32.60	6.73	32.23	6.00	101	285	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2480.00	102.86	-----	-----	89.78	32.58	6.73	32.23	6.00	101	285	AVERAGE																																																																														



		75																																																																																								
Mode	Co-location Band Edge																																																																																									
	Bluetooth-LE_GSKF_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2499.22</td> <td>56.00</td> <td>74.00</td> <td>-18.00</td> <td>42.79</td> <td>32.70</td> <td>6.75</td> <td>32.24</td> <td>6.00</td> <td>366</td> <td>41</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2499.22	56.00	74.00	-18.00	42.79	32.70	6.75	32.24	6.00	366	41	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.15</td> <td>-----</td> <td>-----</td> <td>90.07</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>366</td> <td>41</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	103.15	-----	-----	90.07	32.58	6.73	32.23	6.00	366	41	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2499.22	56.00	74.00	-18.00	42.79	32.70	6.75	32.24	6.00	366	41	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2480.00	103.15	-----	-----	90.07	32.58	6.73	32.23	6.00	366	41	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.20</td> <td>46.03</td> <td>54.00</td> <td>-7.97</td> <td>32.85</td> <td>32.67</td> <td>6.75</td> <td>32.24</td> <td>6.00</td> <td>366</td> <td>41</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2495.20	46.03	54.00	-7.97	32.85	32.67	6.75	32.24	6.00	366	41	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>100.85</td> <td>-----</td> <td>-----</td> <td>87.77</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>366</td> <td>41</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	100.85	-----	-----	87.77	32.58	6.73	32.23	6.00	366	41	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2495.20	46.03	54.00	-7.97	32.85	32.67	6.75	32.24	6.00	366	41	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2480.00	100.85	-----	-----	87.77	32.58	6.73	32.23	6.00	366	41	AVERAGE																																																																														







Mode	75																																																																																																																							
	Co-location Harmonic																																																																																																																							
	Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																							
ANT	2																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3560.00</td> <td>59.45</td> <td>74.00</td> <td>-14.55</td> <td>79.67</td> <td>32.84</td> <td>8.19</td> <td>61.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>41.71</td> <td>74.00</td> <td>-32.29</td> <td>59.26</td> <td>34.00</td> <td>9.61</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5500.00</td> <td>64.62</td> <td>74.00</td> <td>-9.38</td> <td>80.44</td> <td>34.70</td> <td>10.09</td> <td>60.61</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	3560.00	59.45	74.00	-14.55	79.67	32.84	8.19	61.25	0.00	---	---	Peak	2	4960.00	41.71	74.00	-32.29	59.26	34.00	9.61	61.16	0.00	---	---	PEAK	3	5500.00	64.62	74.00	-9.38	80.44	34.70	10.09	60.61	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3560.00</td> <td>57.86</td> <td>74.00</td> <td>-16.14</td> <td>78.00</td> <td>32.84</td> <td>8.19</td> <td>61.25</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>40.40</td> <td>74.00</td> <td>-33.60</td> <td>57.95</td> <td>34.00</td> <td>9.61</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5500.00</td> <td>63.76</td> <td>74.00</td> <td>-10.24</td> <td>79.58</td> <td>34.70</td> <td>10.09</td> <td>60.61</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	3560.00	57.86	74.00	-16.14	78.00	32.84	8.19	61.25	0.00	---	---	Peak	2	4960.00	40.40	74.00	-33.60	57.95	34.00	9.61	61.16	0.00	---	---	Peak	3	5500.00	63.76	74.00	-10.24	79.58	34.70	10.09	60.61	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																															
1	3560.00	59.45	74.00	-14.55	79.67	32.84	8.19	61.25	0.00	---	---	Peak																																																																																																												
2	4960.00	41.71	74.00	-32.29	59.26	34.00	9.61	61.16	0.00	---	---	PEAK																																																																																																												
3	5500.00	64.62	74.00	-9.38	80.44	34.70	10.09	60.61	0.00	---	---	Peak																																																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																															
1	3560.00	57.86	74.00	-16.14	78.00	32.84	8.19	61.25	0.00	---	---	Peak																																																																																																												
2	4960.00	40.40	74.00	-33.60	57.95	34.00	9.61	61.16	0.00	---	---	Peak																																																																																																												
3	5500.00	63.76	74.00	-10.24	79.58	34.70	10.09	60.61	0.00	---	---	Peak																																																																																																												


Note: The Remark #1 and #3 are Fundamental signals which can be ignored.



		75																																																																																																																															
Mode		Co-location Band Edge																																																																																																																															
		802.11a_CH100_5500MHz																																																																																																																															
ANT		CDD 8+5																																																																																																																															
Pol.		Horizontal					Fundamental																																																																																																																										
Peak																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>58.42</td> <td>74.00</td> <td>-15.58</td> <td>45.35</td> <td>34.78</td> <td>10.02</td> <td>31.73</td> <td>0.00</td> <td>100</td> <td>117</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.84</td> <td>63.38</td> <td>68.20</td> <td>-4.82</td> <td>50.30</td> <td>34.76</td> <td>10.04</td> <td>31.72</td> <td>0.00</td> <td>100</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5458.48	58.42	74.00	-15.58	45.35	34.78	10.02	31.73	0.00	100	117	PEAK	2	5469.84	63.38	68.20	-4.82	50.30	34.76	10.04	31.72	0.00	100	117	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.00</td> <td>96.65</td> <td>-----</td> <td>89.56</td> <td>32.59</td> <td>6.73</td> <td>32.23</td> <td>0.00</td> <td>100</td> <td>117</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3550.00</td> <td>115.37</td> <td>-----</td> <td>106.08</td> <td>32.80</td> <td>8.17</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>117</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5500.00</td> <td>115.37</td> <td>-----</td> <td>106.08</td> <td>32.80</td> <td>8.17</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>117</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2482.00	96.65	-----	89.56	32.59	6.73	32.23	0.00	100	117	Peak	2	3550.00	115.37	-----	106.08	32.80	8.17	31.68	0.00	100	117	Peak	3	5500.00	115.37	-----	106.08	32.80	8.17	31.68	0.00	100	117
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5458.48	58.42	74.00	-15.58	45.35	34.78	10.02	31.73	0.00	100	117	PEAK																																																																																																																					
2	5469.84	63.38	68.20	-4.82	50.30	34.76	10.04	31.72	0.00	100	117	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	2482.00	96.65	-----	89.56	32.59	6.73	32.23	0.00	100	117	Peak																																																																																																																						
2	3550.00	115.37	-----	106.08	32.80	8.17	31.68	0.00	100	117	Peak																																																																																																																						
3	5500.00	115.37	-----	106.08	32.80	8.17	31.68	0.00	100	117	Peak																																																																																																																						
Avg																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>48.24</td> <td>54.00</td> <td>-5.76</td> <td>35.16</td> <td>34.78</td> <td>10.03</td> <td>31.73</td> <td>0.00</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.92	48.24	54.00	-5.76	35.16	34.78	10.03	31.73	0.00	100	117	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.00</td> <td>92.56</td> <td>-----</td> <td>85.47</td> <td>32.59</td> <td>6.73</td> <td>32.23</td> <td>0.00</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>3550.00</td> <td>114.10</td> <td>-----</td> <td>104.81</td> <td>32.80</td> <td>8.17</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>5500.00</td> <td>114.10</td> <td>-----</td> <td>104.81</td> <td>32.80</td> <td>8.17</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2482.00	92.56	-----	85.47	32.59	6.73	32.23	0.00	100	117	AVERAGE	2	3550.00	114.10	-----	104.81	32.80	8.17	31.68	0.00	100	117	AVERAGE	3	5500.00	114.10	-----	104.81	32.80	8.17	31.68	0.00	100	117	AVERAGE												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5459.92	48.24	54.00	-5.76	35.16	34.78	10.03	31.73	0.00	100	117	AVERAGE																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	2482.00	92.56	-----	85.47	32.59	6.73	32.23	0.00	100	117	AVERAGE																																																																																																																						
2	3550.00	114.10	-----	104.81	32.80	8.17	31.68	0.00	100	117	AVERAGE																																																																																																																						
3	5500.00	114.10	-----	104.81	32.80	8.17	31.68	0.00	100	117	AVERAGE																																																																																																																						

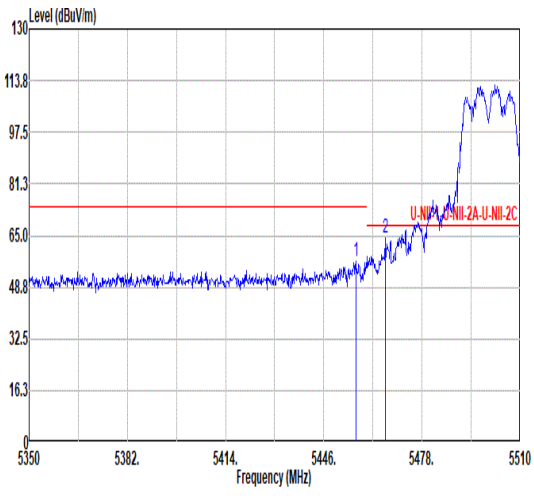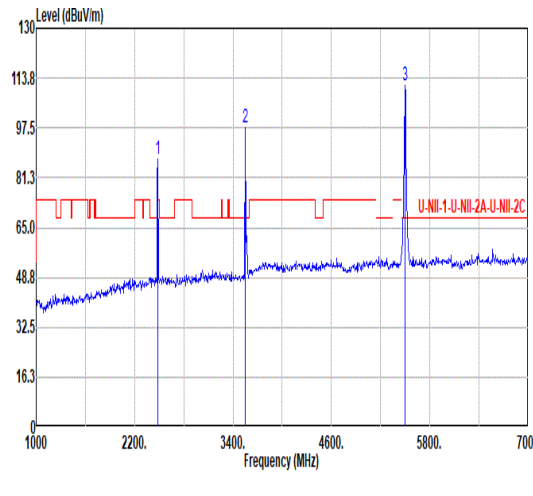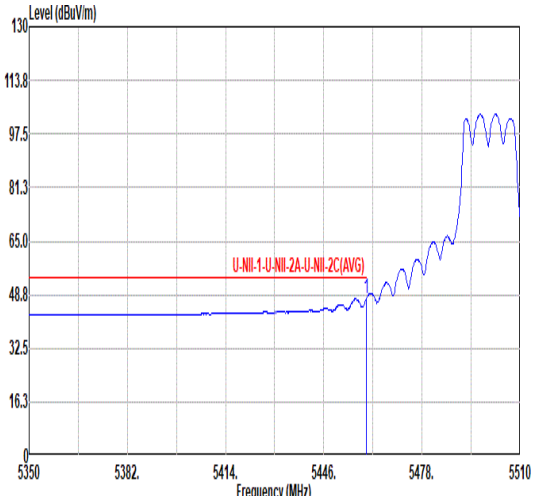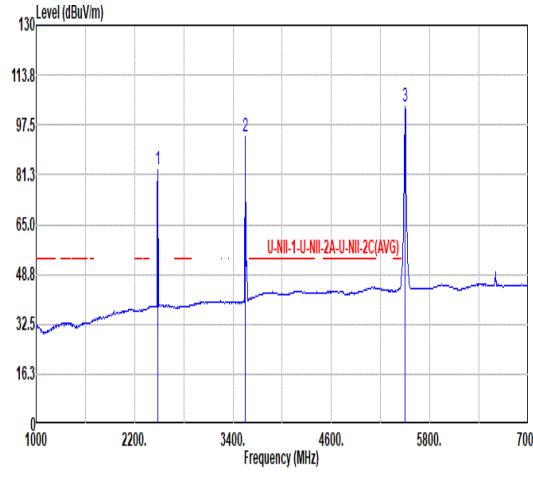

		75																																																																																																																												
Mode	Co-location Band Edge																																																																																																																													
	802.11a_CH100_5500MHz																																																																																																																													
ANT	CDD 8+5																																																																																																																													
Pol.	Vertical	Fundamental																																																																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a rising signal level from 5350 MHz to 5510 MHz, with a red limit line at approximately 65.0 dBuV/m. Three peaks are marked with blue vertical lines and numbered 1, 2, and 3.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.40</td> <td>56.99</td> <td>74.00</td> <td>-17.01</td> <td>43.91</td> <td>34.79</td> <td>10.02</td> <td>31.73</td> <td>0.00</td> <td>100</td> <td>79</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.16</td> <td>64.50</td> <td>68.20</td> <td>-3.70</td> <td>51.41</td> <td>34.77</td> <td>10.04</td> <td>31.72</td> <td>0.00</td> <td>100</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5456.40	56.99	74.00	-17.01	43.91	34.79	10.02	31.73	0.00	100	79	PEAK	2	5466.16	64.50	68.20	-3.70	51.41	34.77	10.04	31.72	0.00	100	79	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a stepped signal level from 1000 MHz to 7000 MHz, with a red limit line at approximately 65.0 dBuV/m. Three peaks are marked with blue vertical lines and numbered 1, 2, and 3.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.00</td> <td>87.10</td> <td>-----</td> <td>80.01</td> <td>32.59</td> <td>6.73</td> <td>32.23</td> <td>0.00</td> <td>100</td> <td>79</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3550.00</td> <td>97.48</td> <td>-----</td> <td>88.19</td> <td>32.80</td> <td>8.17</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>79</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5500.00</td> <td>111.12</td> <td>-----</td> <td>98.04</td> <td>34.71</td> <td>10.08</td> <td>31.71</td> <td>0.00</td> <td>100</td> <td>79</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2482.00	87.10	-----	80.01	32.59	6.73	32.23	0.00	100	79	Peak	2	3550.00	97.48	-----	88.19	32.80	8.17	31.68	0.00	100	79	Peak	3	5500.00	111.12	-----	98.04	34.71	10.08	31.71	0.00	100	79	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5456.40	56.99	74.00	-17.01	43.91	34.79	10.02	31.73	0.00	100	79	PEAK																																																																																																																		
2	5466.16	64.50	68.20	-3.70	51.41	34.77	10.04	31.72	0.00	100	79	PEAK																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	2482.00	87.10	-----	80.01	32.59	6.73	32.23	0.00	100	79	Peak																																																																																																																			
2	3550.00	97.48	-----	88.19	32.80	8.17	31.68	0.00	100	79	Peak																																																																																																																			
3	5500.00	111.12	-----	98.04	34.71	10.08	31.71	0.00	100	79	Peak																																																																																																																			
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a rising signal level from 5350 MHz to 5510 MHz, with a red limit line at approximately 48.8 dBuV/m. Three peaks are marked with blue vertical lines and numbered 1, 2, and 3.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>47.57</td> <td>54.00</td> <td>-6.43</td> <td>34.49</td> <td>34.78</td> <td>10.03</td> <td>31.73</td> <td>0.00</td> <td>100</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.92	47.57	54.00	-6.43	34.49	34.78	10.03	31.73	0.00	100	79	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a stepped signal level from 1000 MHz to 7000 MHz, with a red limit line at approximately 48.8 dBuV/m. Three peaks are marked with blue vertical lines and numbered 1, 2, and 3.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.00</td> <td>83.04</td> <td>-----</td> <td>75.95</td> <td>32.59</td> <td>6.73</td> <td>32.23</td> <td>0.00</td> <td>100</td> <td>79</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>3550.00</td> <td>93.88</td> <td>-----</td> <td>84.59</td> <td>32.80</td> <td>8.17</td> <td>31.68</td> <td>0.00</td> <td>100</td> <td>79</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>5500.00</td> <td>103.66</td> <td>-----</td> <td>90.57</td> <td>34.70</td> <td>10.09</td> <td>31.70</td> <td>0.00</td> <td>100</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2482.00	83.04	-----	75.95	32.59	6.73	32.23	0.00	100	79	AVERAGE	2	3550.00	93.88	-----	84.59	32.80	8.17	31.68	0.00	100	79	AVERAGE	3	5500.00	103.66	-----	90.57	34.70	10.09	31.70	0.00	100	79	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5459.92	47.57	54.00	-6.43	34.49	34.78	10.03	31.73	0.00	100	79	AVERAGE																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	2482.00	83.04	-----	75.95	32.59	6.73	32.23	0.00	100	79	AVERAGE																																																																																																																			
2	3550.00	93.88	-----	84.59	32.80	8.17	31.68	0.00	100	79	AVERAGE																																																																																																																			
3	5500.00	103.66	-----	90.57	34.70	10.09	31.70	0.00	100	79	AVERAGE																																																																																																																			

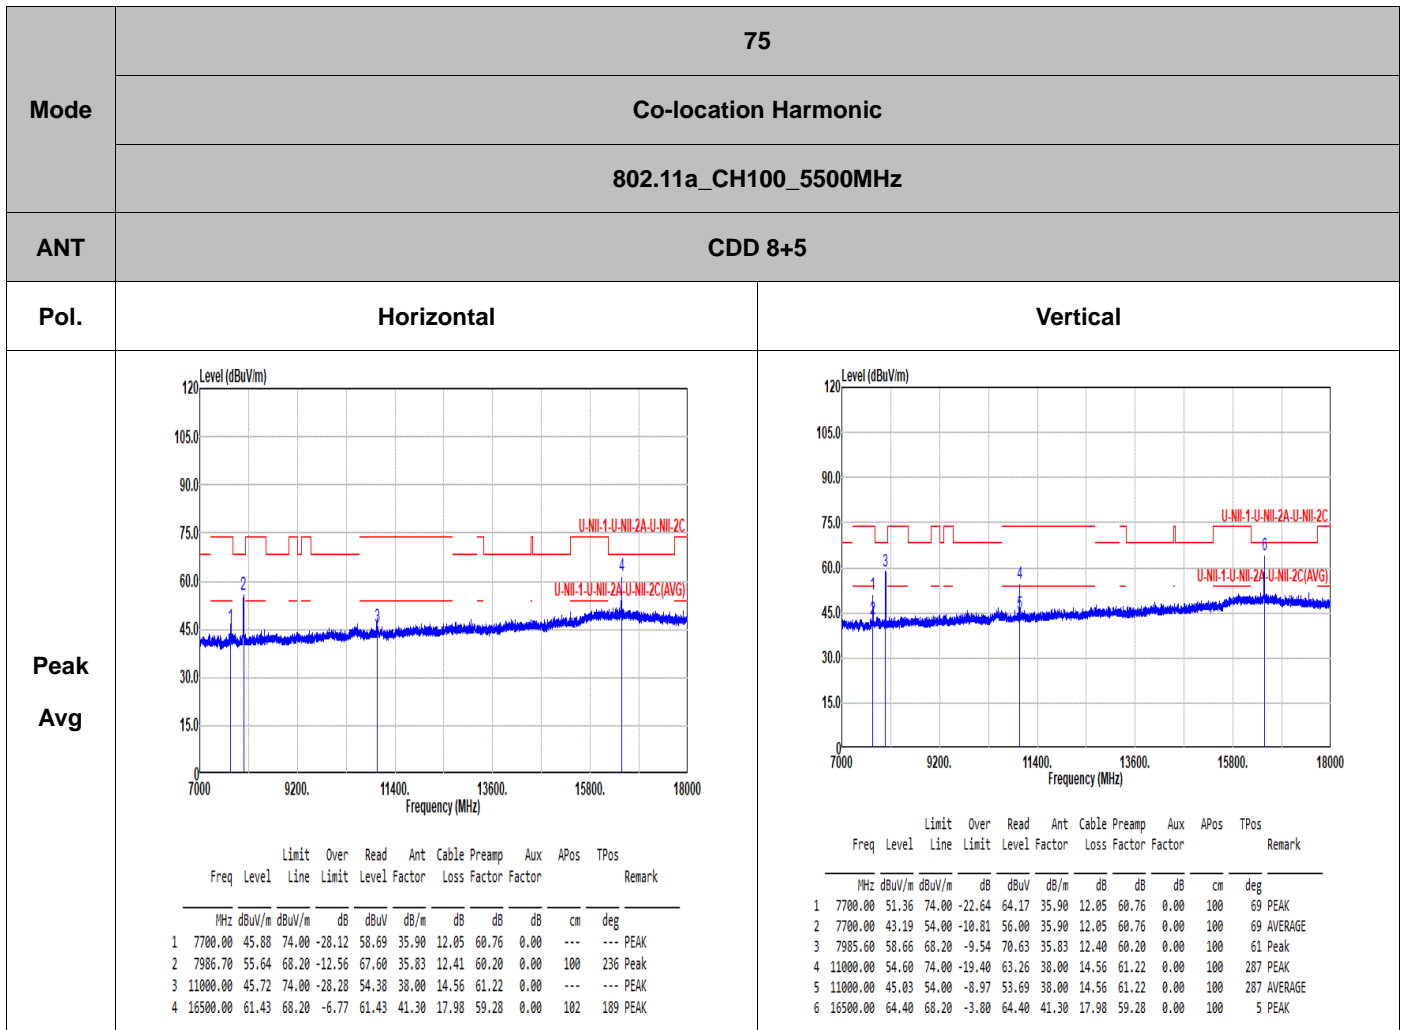




Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	99.32	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz
802.11ax HE20	100	-	-	10Hz
802.11ax HE40	100	-	-	10Hz
802.11ax HE80	100	-	-	10Hz
802.11ax HE160	100	-	-	10Hz
802.11ax HE20 RU26	100	-	-	10Hz
802.11ax HE20 RU52	100	-	-	10Hz
802.11ax HE20 RU106	100	-	-	10Hz

802.11a

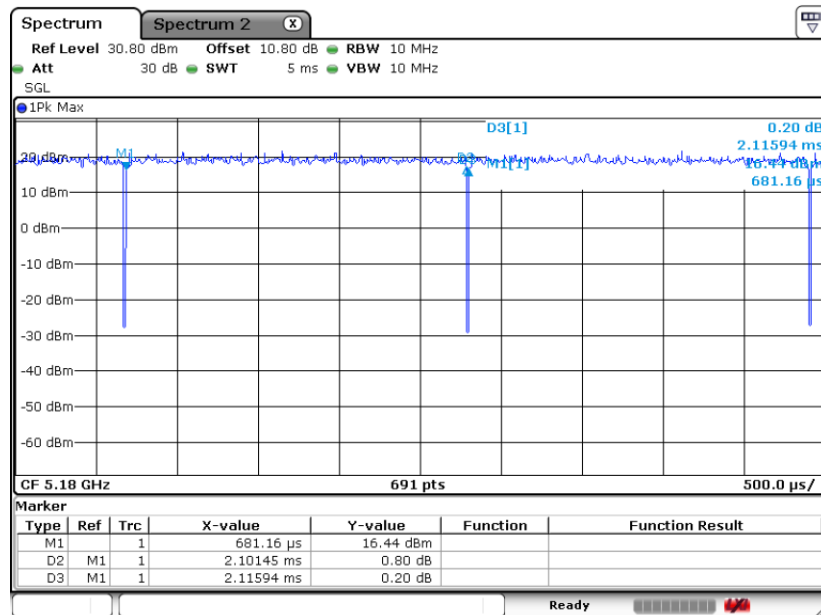




802.11n HT20

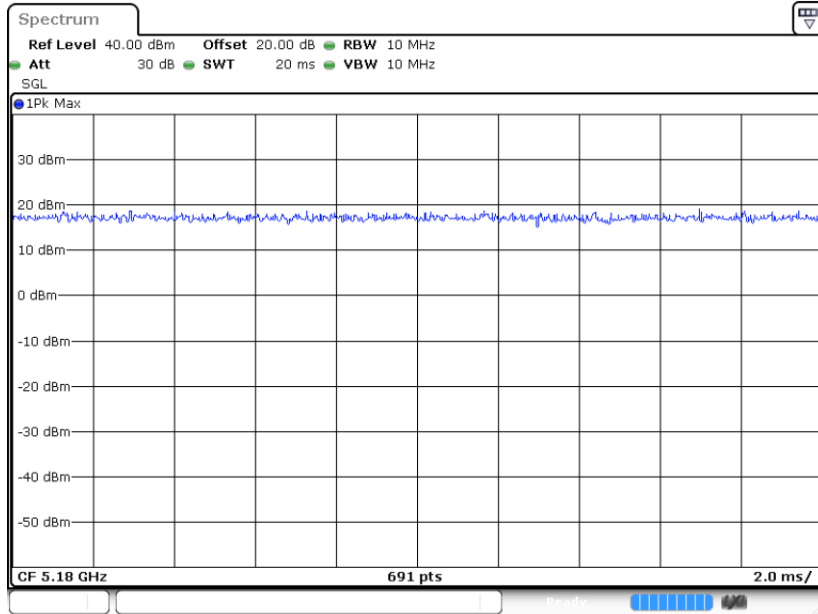


802.11n HT40

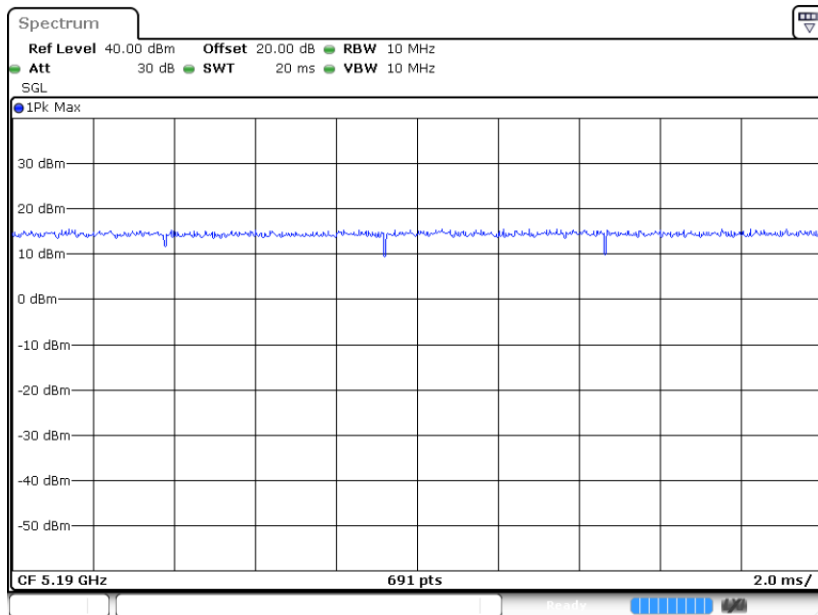




802.11ax HE20

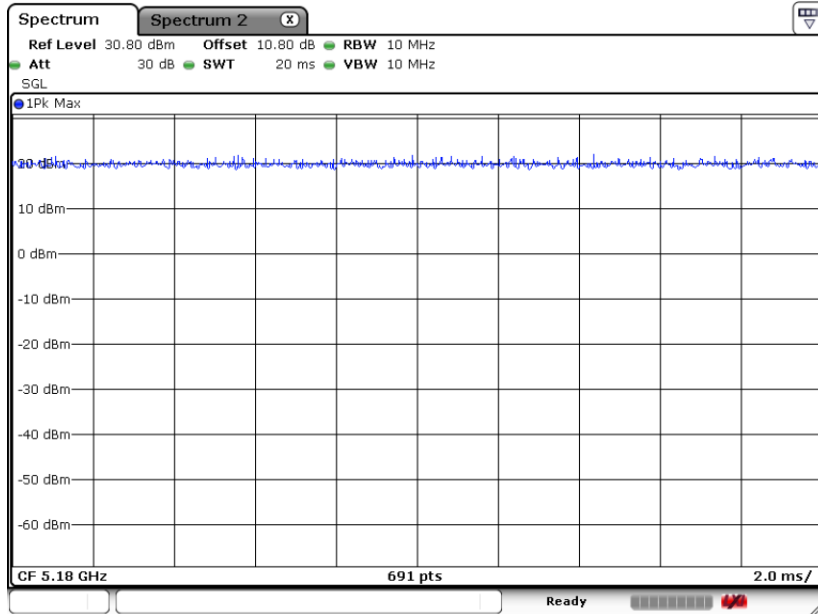


802.11ax HE40

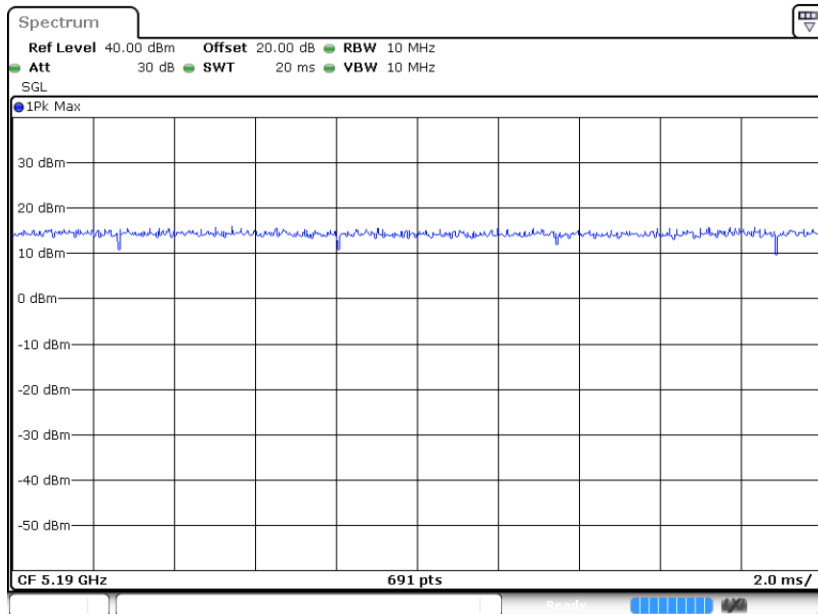




802.11ax HE80

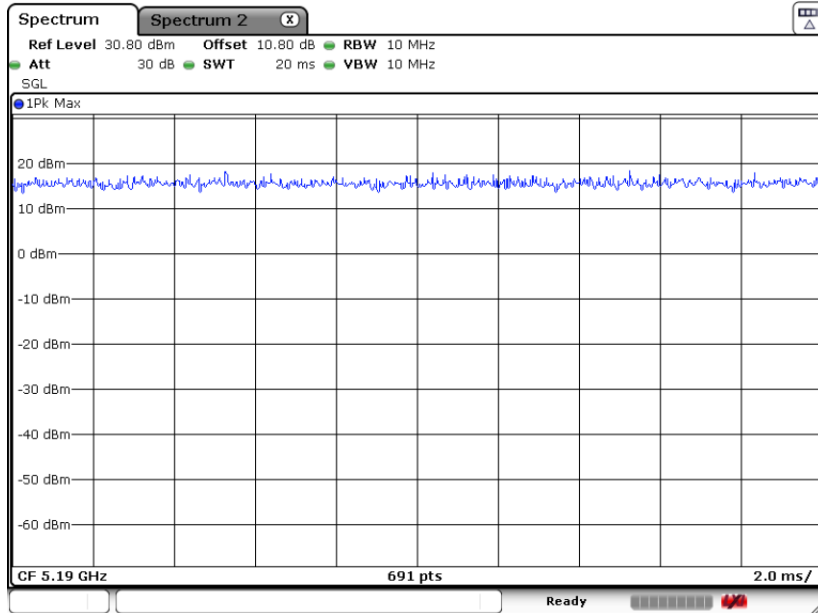


802.11ax HE160

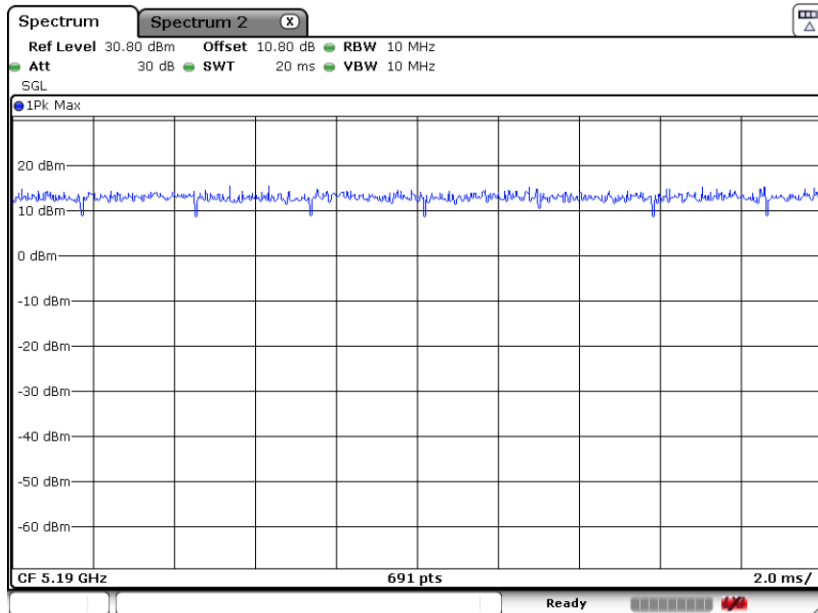




802.11ax HE20 RU26

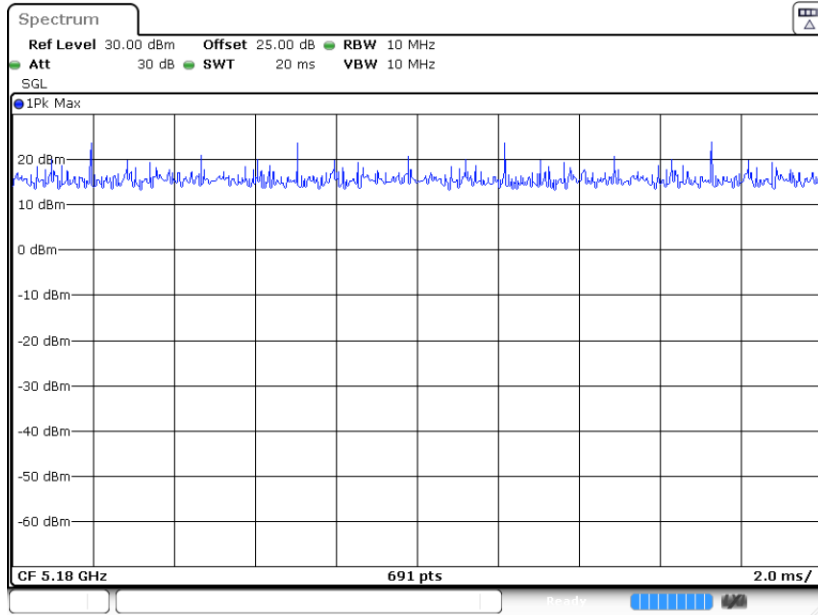

802.11ax HE20 RU52

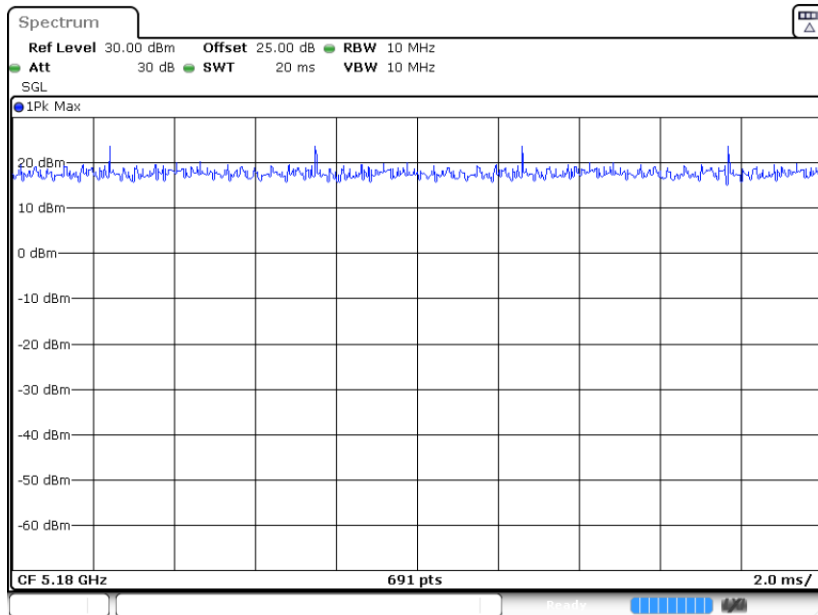



802.11ax HE20 RU106

