

Date: 2024-12-08

01_LTE Band 71_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch133322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.208 W/kg; SAR (10g) = 0.145 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.221 W/kg; SAR (10g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 24.4 mm

Ratio of SAR at M2 to SAR at M1 = 96.7 %

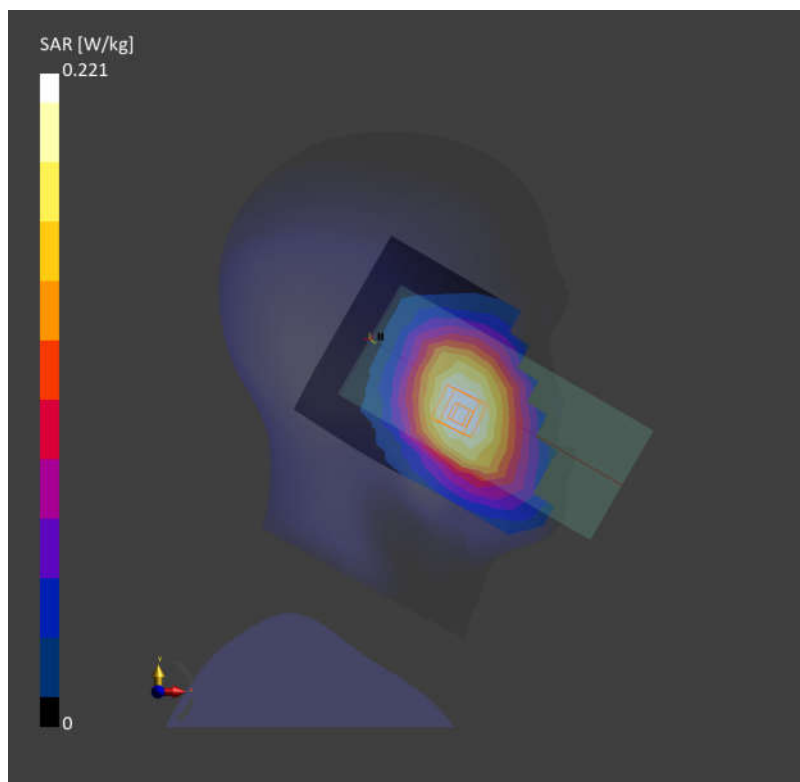

Date: 2024-12-08

02_LTE Band 12_10M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.214 W/kg; SAR (10g) = 0.149 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 96.3 %

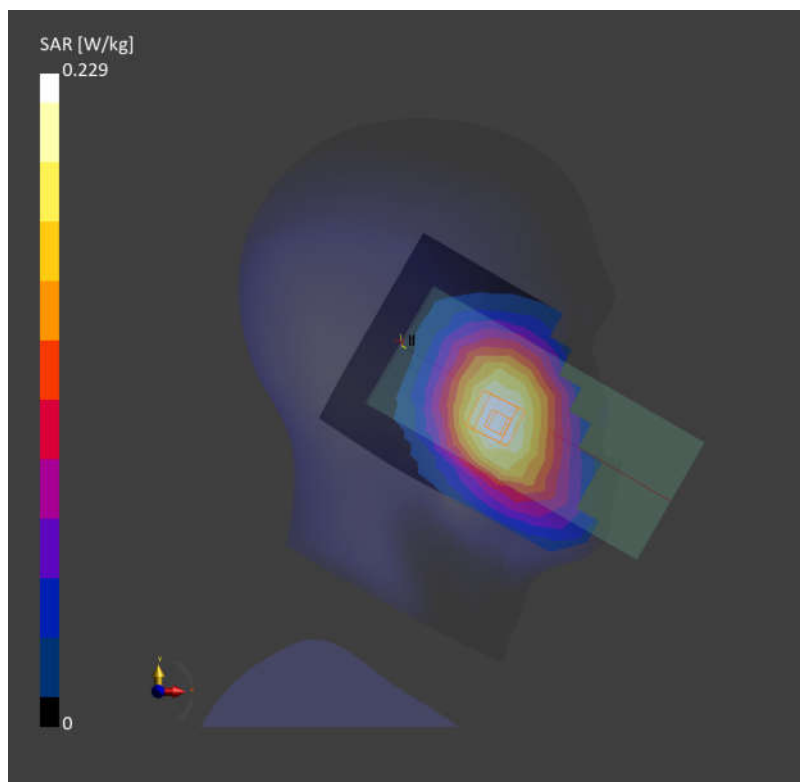

Date: 2024-12-08

03_LTE Band 13_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.152 W/kg; SAR (10g) = 0.105 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.162 W/kg; SAR (10g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 25.8 mm

Ratio of SAR at M2 to SAR at M1 = 98.7 %

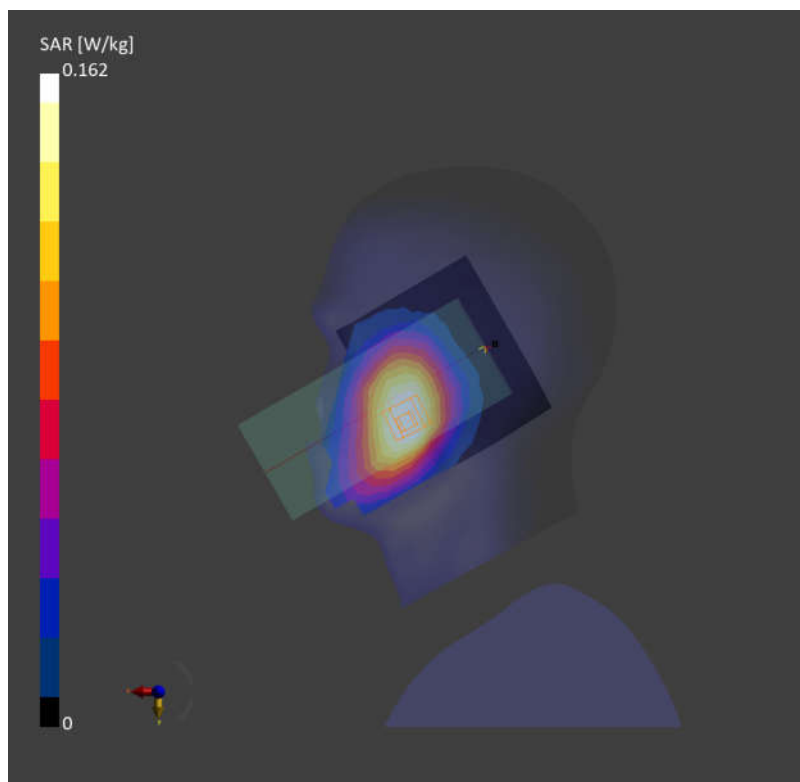

Date: 2024-12-08

04_LTE Band 14_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch23330

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.210 W/kg; SAR (10g) = 0.145 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.186 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 19.1 mm

Ratio of SAR at M2 to SAR at M1 = 96.4 %

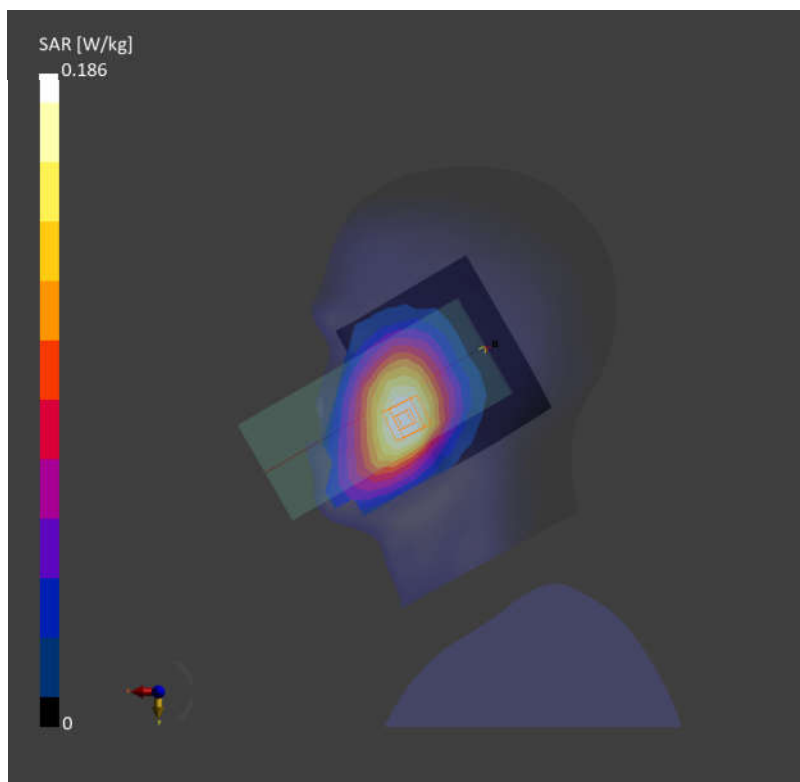

Date: 2024-12-08

05_FR1 n71_35M_QPSK_90RB_45Offset_Left Cheek_0mm_Ch136100


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 35 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.8$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.146 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.146 W/kg; SAR (10g) = 0.120 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 63.3 %

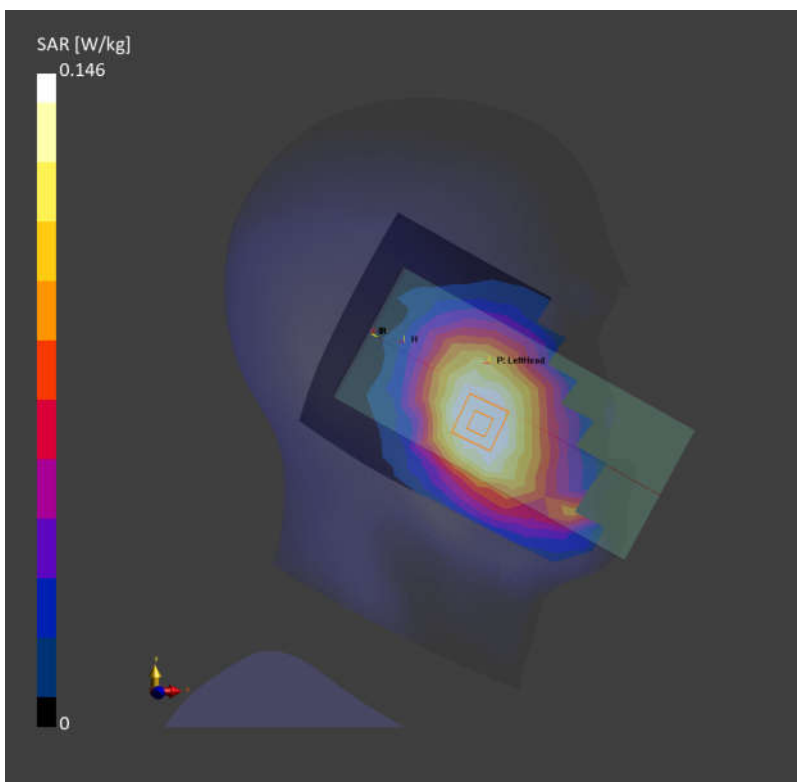

Date: 2024-12-08

06_FR1 n12_15M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch141500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.143 W/kg; SAR (10g) = 0.100 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.08 dB
SAR (1g) = 0.143 W/kg; SAR (10g) = 0.118 W/kg
Smallest distance from peaks to all points 3 dB below = 24.0 mm
Ratio of SAR at M2 to SAR at M1 = 97.6 %

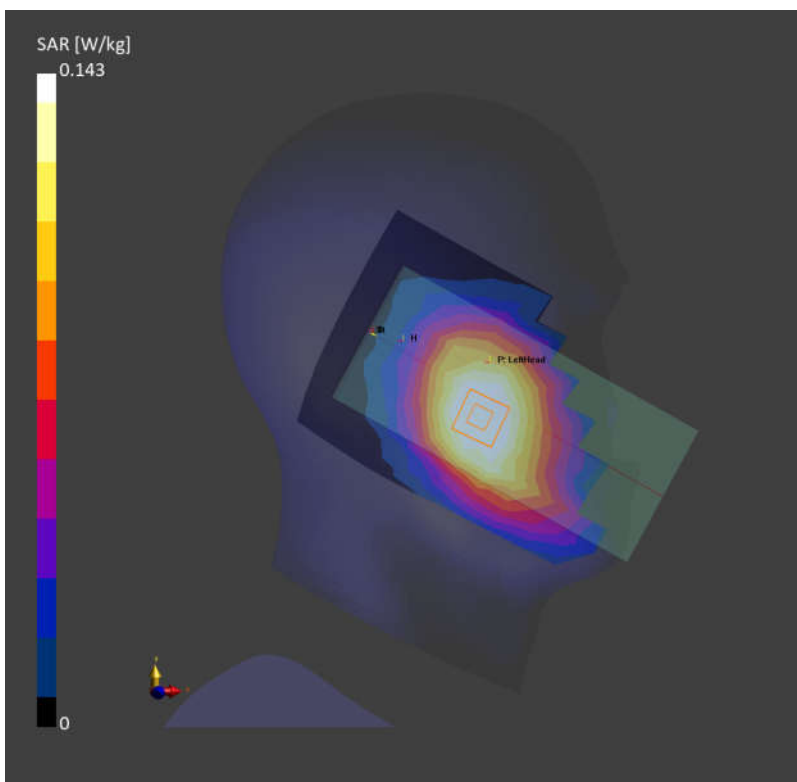

Date: 2024-12-08

07_FR1 n14_10M_QPSK_25RB_14Offset_Right Cheek_0mm_Ch158600


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 42.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.34, 10.73, 9.7); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.154 W/kg; SAR (10g) = 0.105 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.161 W/kg; SAR (10g) = 0.129 W/kg
Smallest distance from peaks to all points 3 dB below = 20.3 mm
Ratio of SAR at M2 to SAR at M1 = 96.4 %

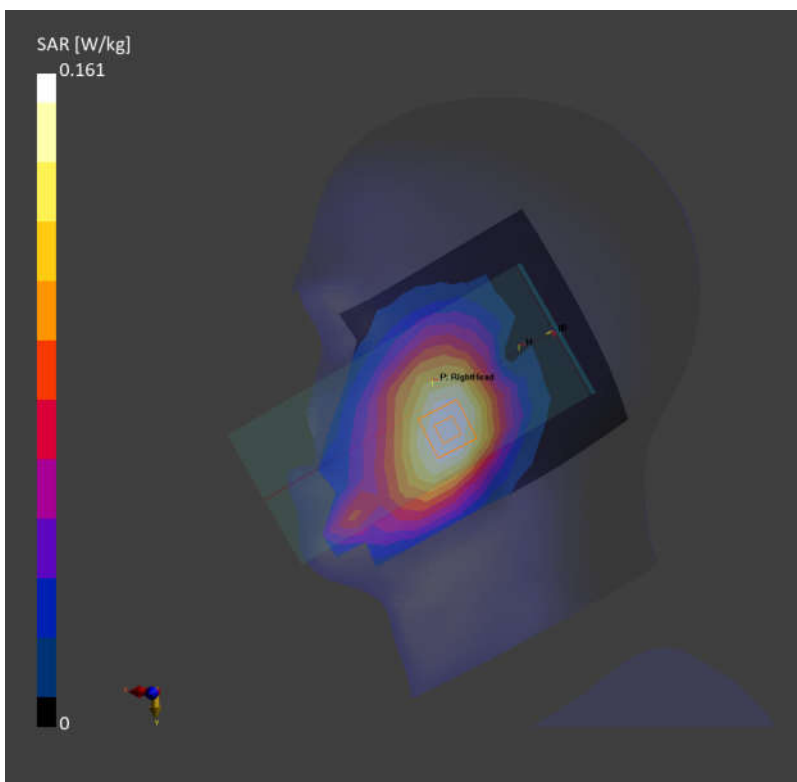

Date: 2024-12-09

08_GSM850_GPRS (3 Tx slots)_Left Cheek_0mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2)

Frequency: 836.400 MHz; DutyCycle: 1:2.77

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.222 W/kg; SAR (10g) = 0.154 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.240 W/kg; SAR (10g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 19.4 mm

Ratio of SAR at M2 to SAR at M1 = 95.1 %

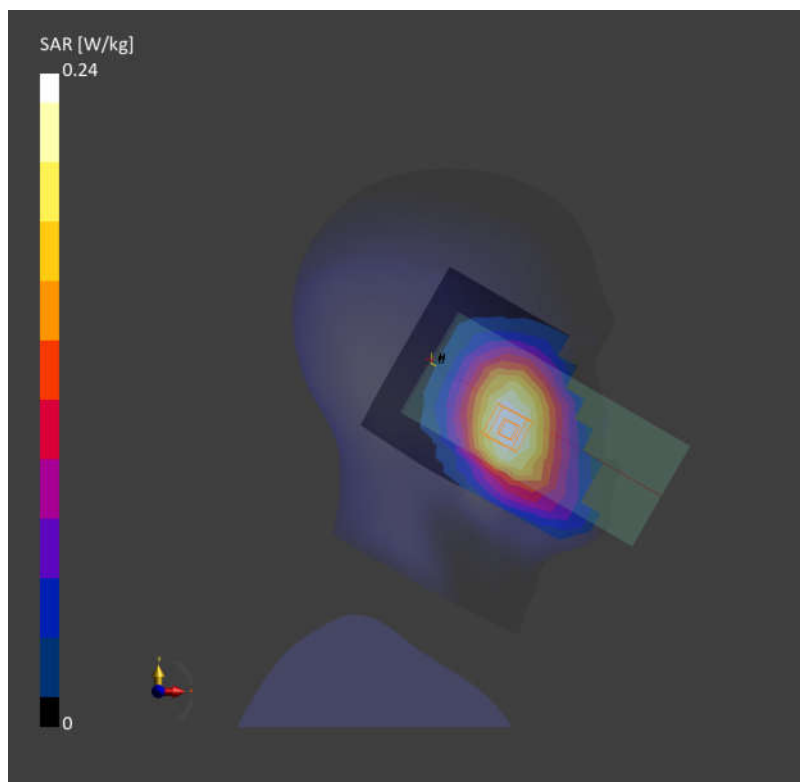

Date: 2024-12-09

09_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 42.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.267 W/kg; SAR (10g) = 0.184 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.278 W/kg; SAR (10g) = 0.224 W/kg
Smallest distance from peaks to all points 3 dB below = 23.6 mm
Ratio of SAR at M2 to SAR at M1 = 95.9 %

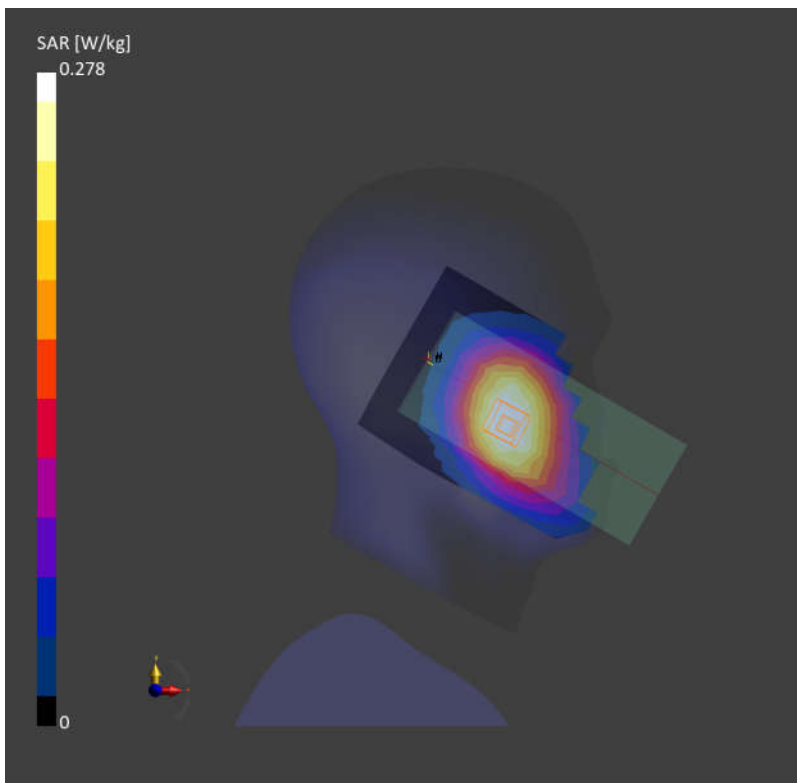

Date: 2024-12-09

10_LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.219 W/kg; SAR (10g) = 0.151 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.231 W/kg; SAR (10g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 24.7 mm

Ratio of SAR at M2 to SAR at M1 = 96.9 %

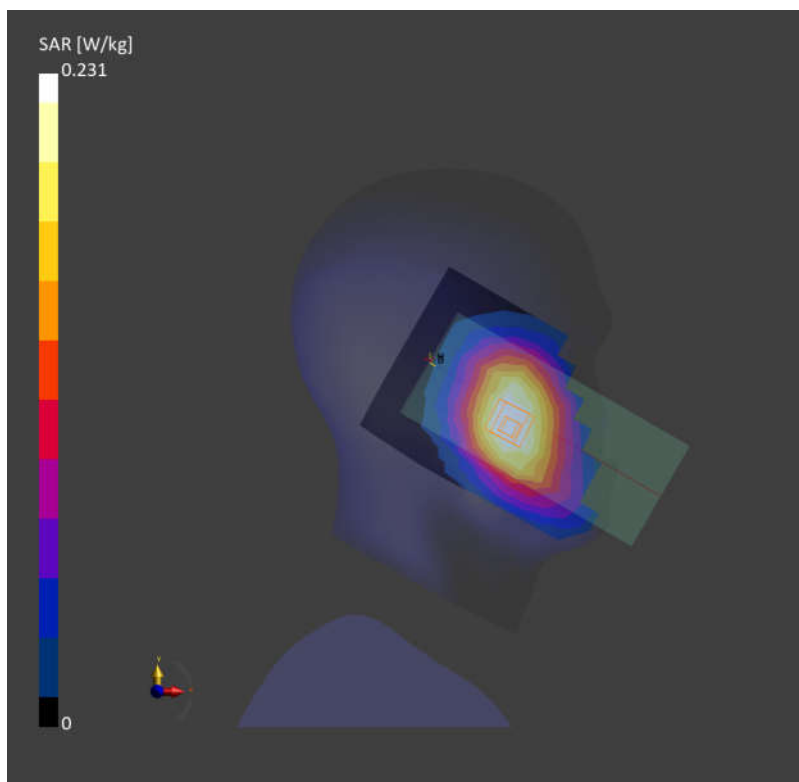

Date: 2024-12-09

11_FR1 n26_20M_QPSK_50RB_28Offset_Left Cheek_0mm_Ch166300


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 42.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.150 W/kg; SAR (10g) = 0.103 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.156 W/kg; SAR (10g) = 0.126 W/kg
Smallest distance from peaks to all points 3 dB below = 21.5 mm
Ratio of SAR at M2 to SAR at M1 = 96.5 %

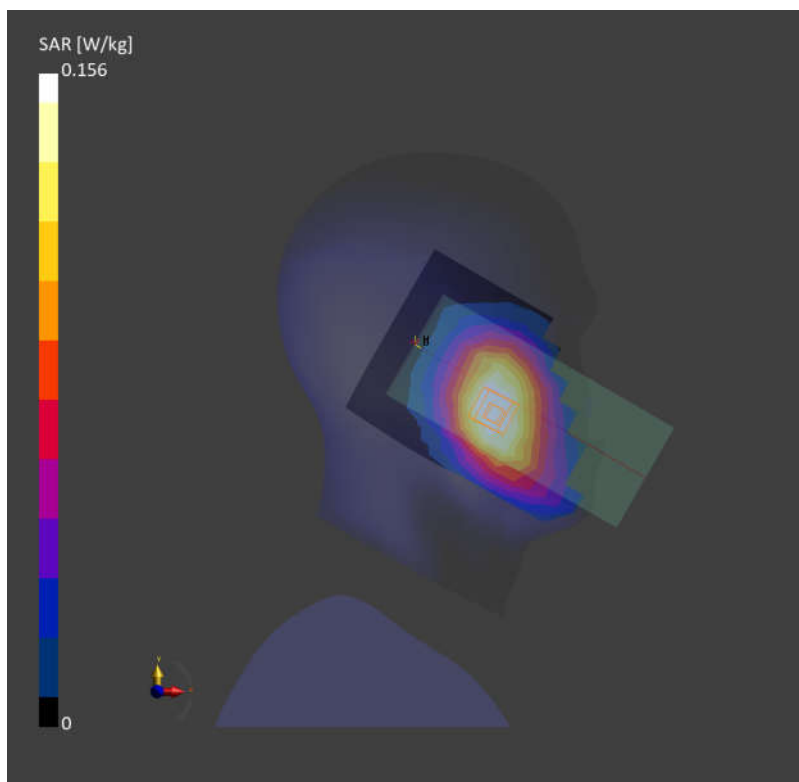

Date: 2024-12-10

12_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513


Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.802 W/kg; SAR (10g) = 0.412 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.967 W/kg; SAR (10g) = 0.432 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 76.3 %

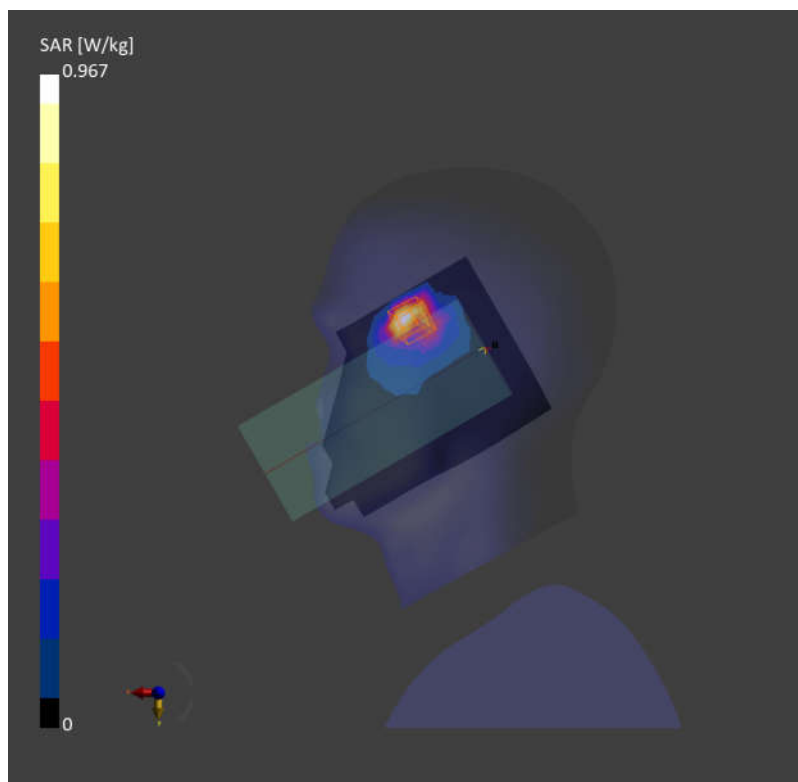

Date: 2024-12-10

13_LTE Band 66_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch132322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.757 W/kg; SAR (10g) = 0.418 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

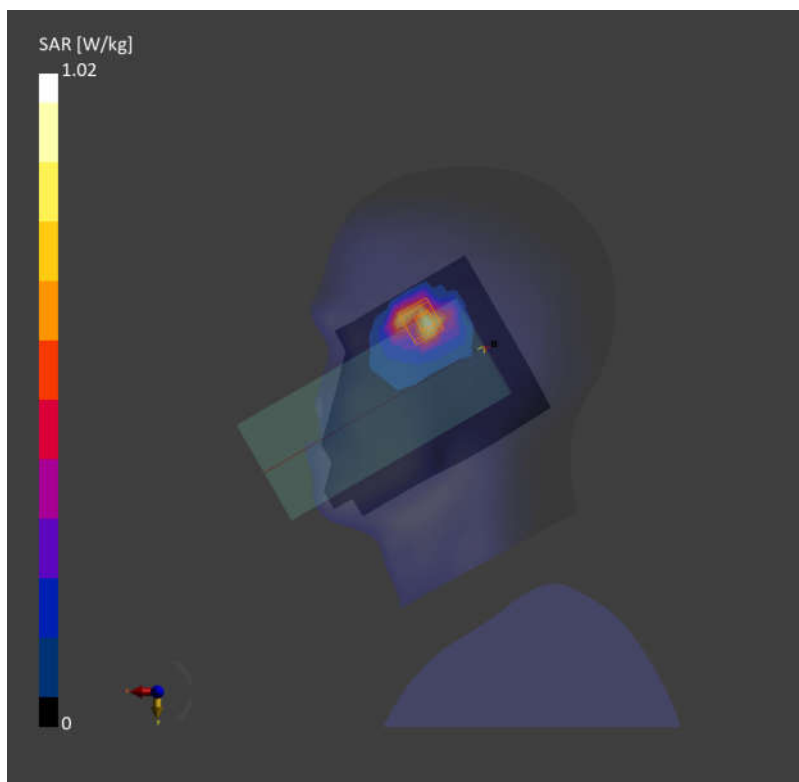

Date: 2024-12-10

14_FR1 n66_45M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 45 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.776 W/kg; SAR (10g) = 0.425 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 1.01 W/kg; SAR (10g) = 0.469 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 76.6 %

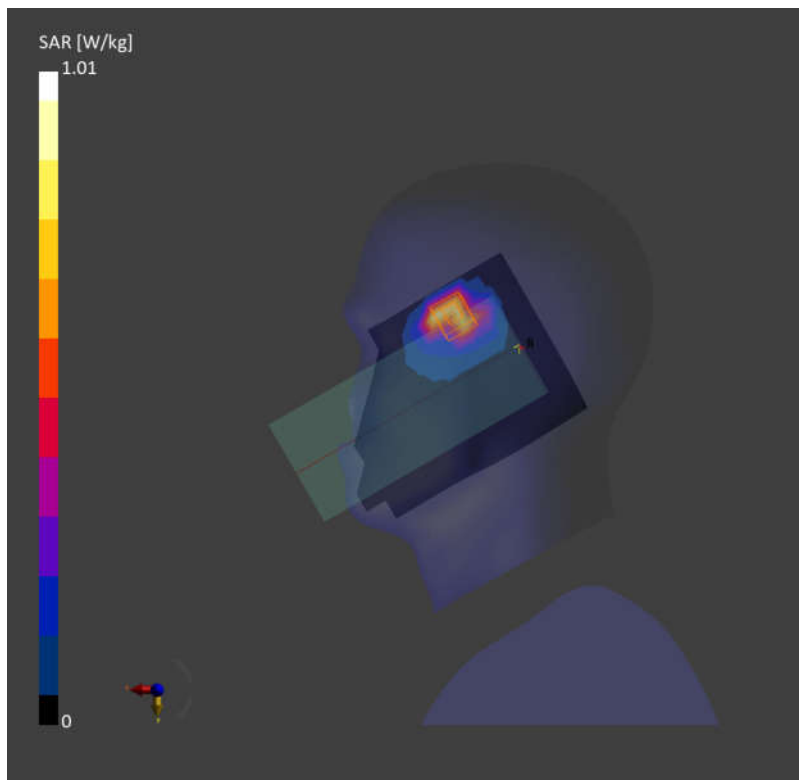

Date: 2024-12-10

15_FR1 n70_15M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch340500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1702.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.854 W/kg; SAR (10g) = 0.475 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.04 dB
SAR (1g) = 0.978 W/kg; SAR (10g) = 0.535 W/kg
Smallest distance from peaks to all points 3 dB below = 11.9 mm
Ratio of SAR at M2 to SAR at M1 = 85.6 %

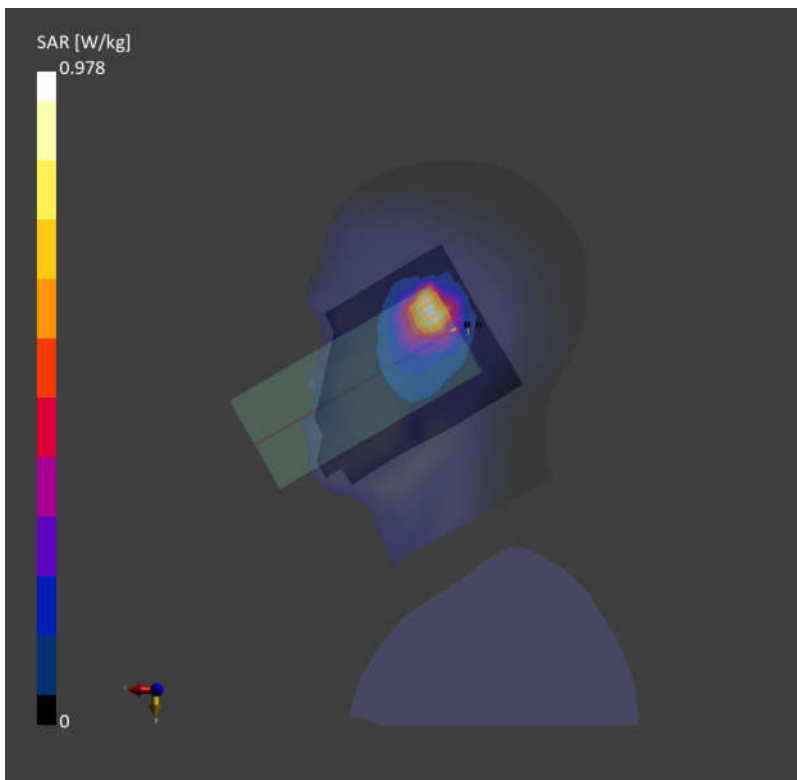

Date: 2024-12-11

16_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch512

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)

Frequency: 1850.200 MHz; Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.803 W/kg; SAR (10g) = 0.429 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.519 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

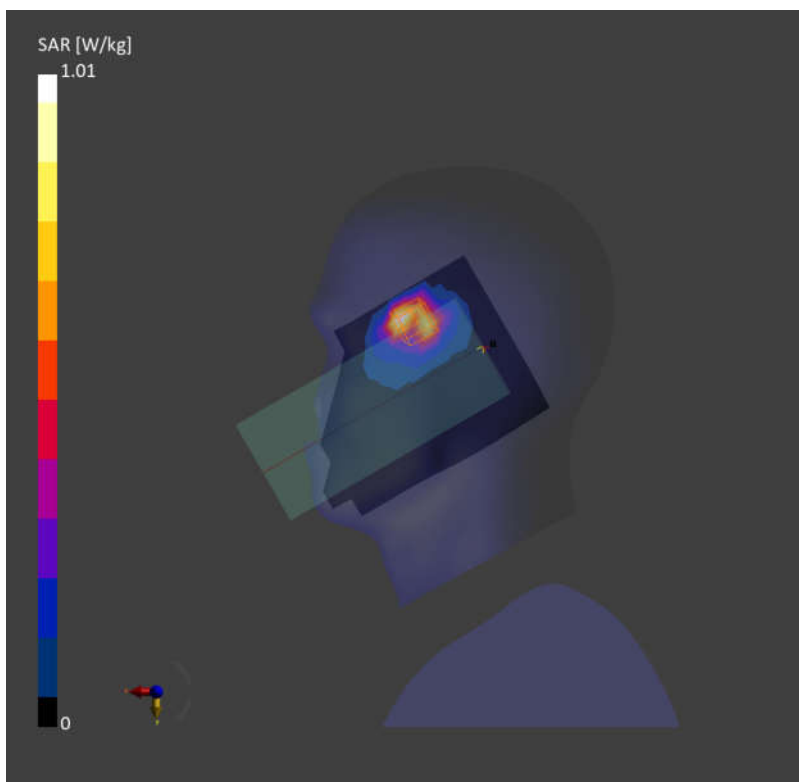

Date: 2024-12-11

17_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9400


Communication System: UMTS-FDD (WCDMA); Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.858 W/kg; SAR (10g) = 0.431 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.482 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 76.2 %

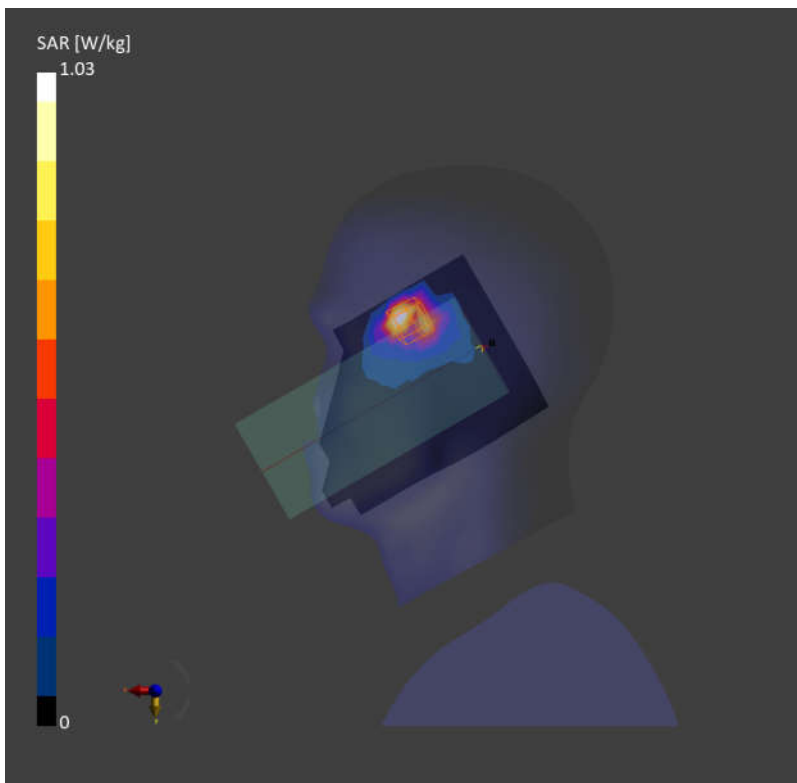

Date: 2024-12-11

18_LTE Band 25_20M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26590

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1905.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.858 W/kg; SAR (10g) = 0.448 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.531 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

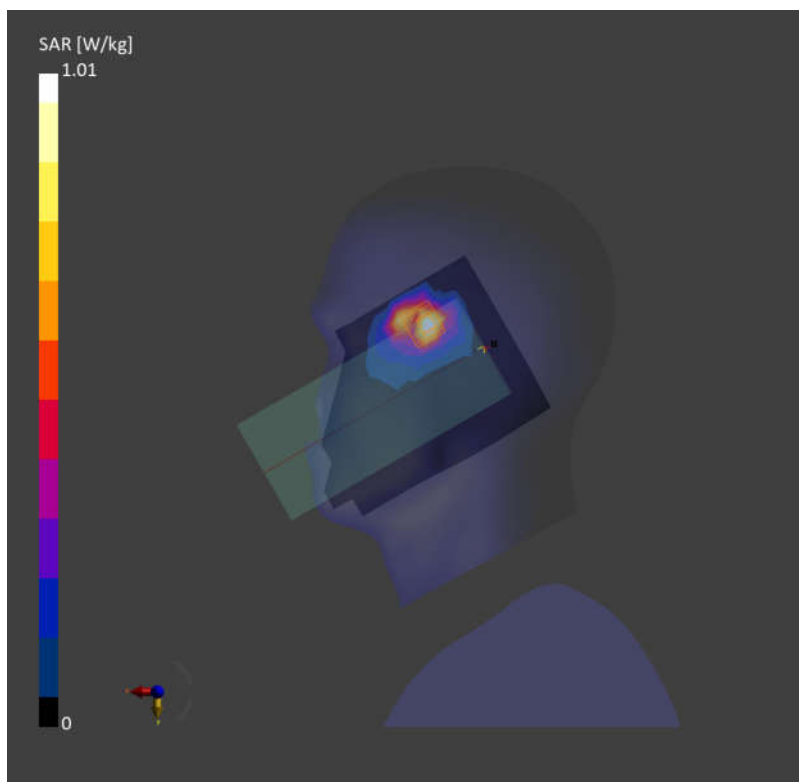

Date: 2024-12-11

19_FR1 n25_40M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch376500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.08 W/kg; SAR (10g) = 0.587 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.562 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 82.2 %

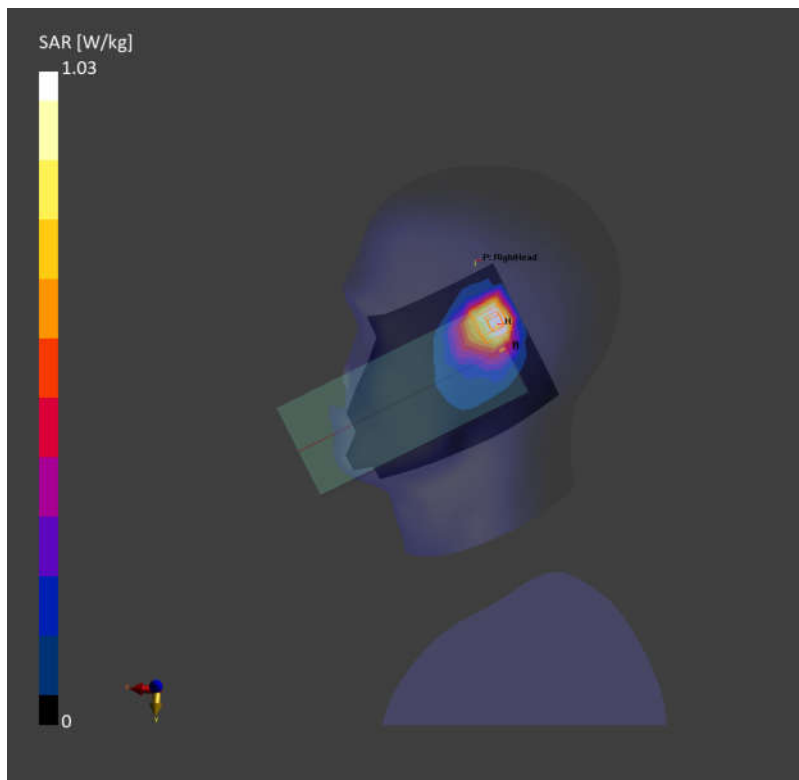

Date: 2024-12-11

20_LTE Band 30_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch27710

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.57, 8.73, 7.66); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.16 W/kg; SAR (10g) = 0.551 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.554 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

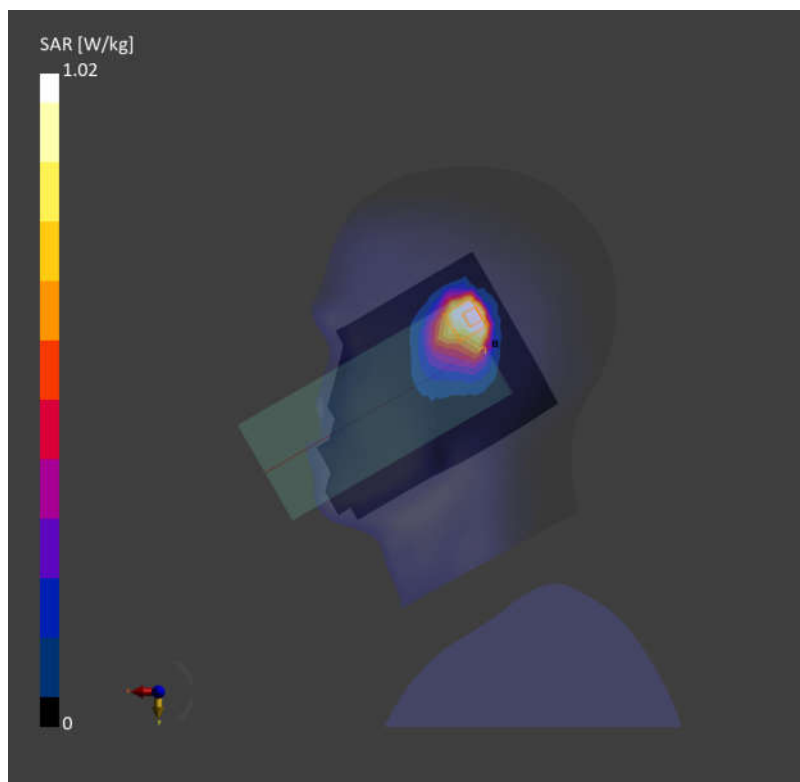

Date: 2024-12-11

21_FR1 n30_10M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch462000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 39.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.57, 8.73, 7.66); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.01 W/kg; SAR (10g) = 0.427 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.442 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 77.0 %

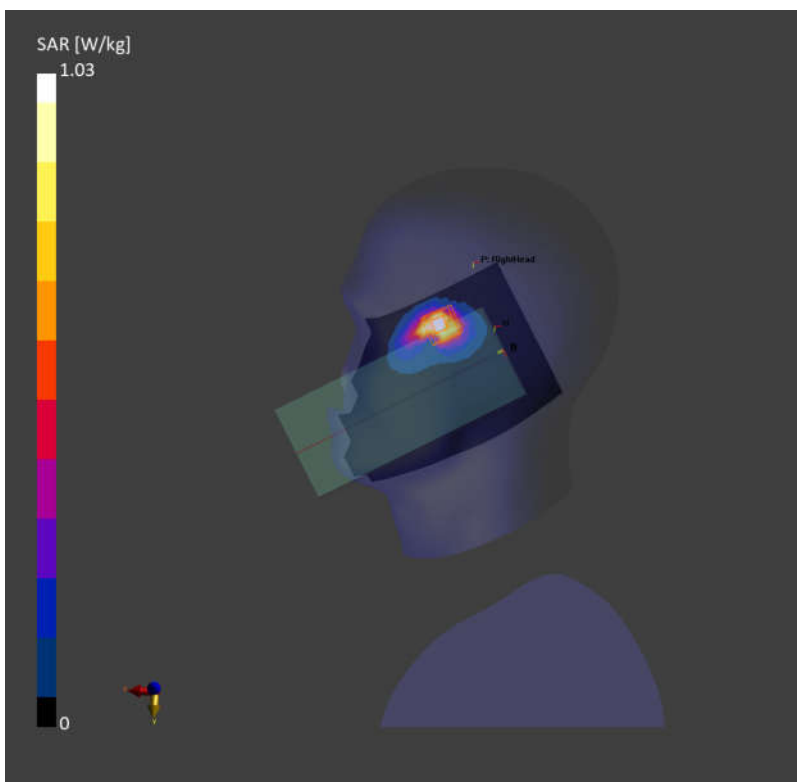

Date: 2024-12-12

22_LTE Band 7_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch21100

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.998 W/kg; SAR (10g) = 0.430 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.445 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

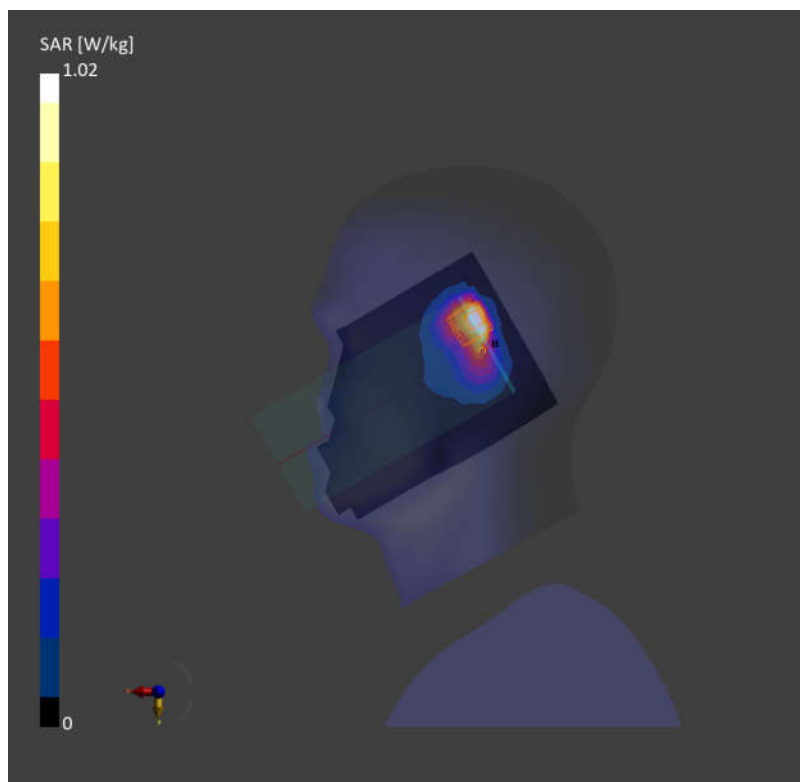

Date: 2024-12-12

23_LTE Band 41_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch41490


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.842 W/kg; SAR (10g) = 0.310 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.924 W/kg; SAR (10g) = 0.337 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 75.3 %

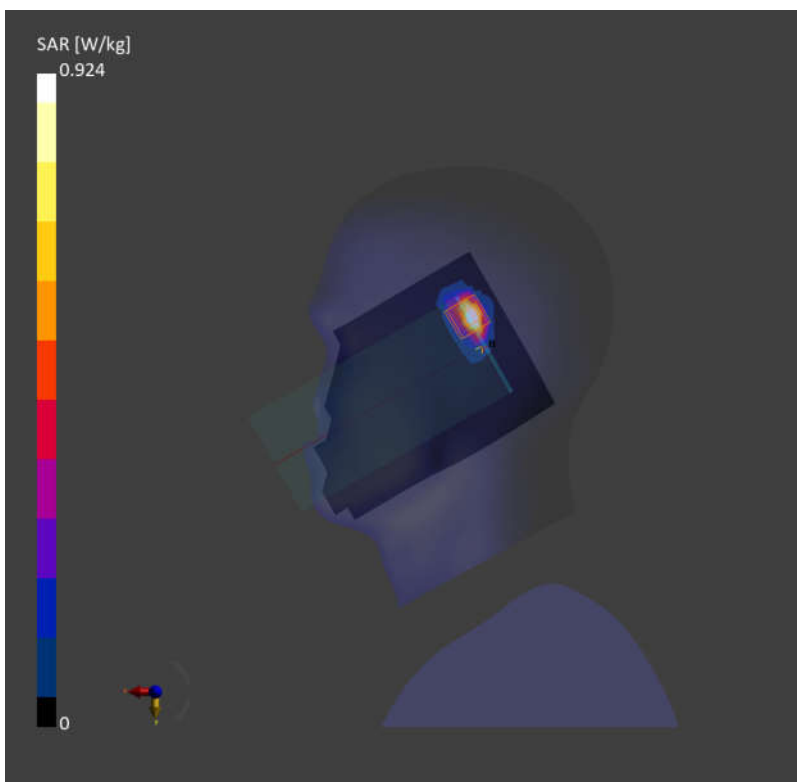

Date: 2024-12-12

24_FR1 n7_50M_QPSK_135RB_68Offset_Left Cheek_0mm_Ch507000


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.02 W/kg; SAR (10g) = 0.417 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 1.06 W/kg; SAR (10g) = 0.430 W/kg
Smallest distance from peaks to all points 3 dB below = 5.2 mm
Ratio of SAR at M2 to SAR at M1 = 79.3 %

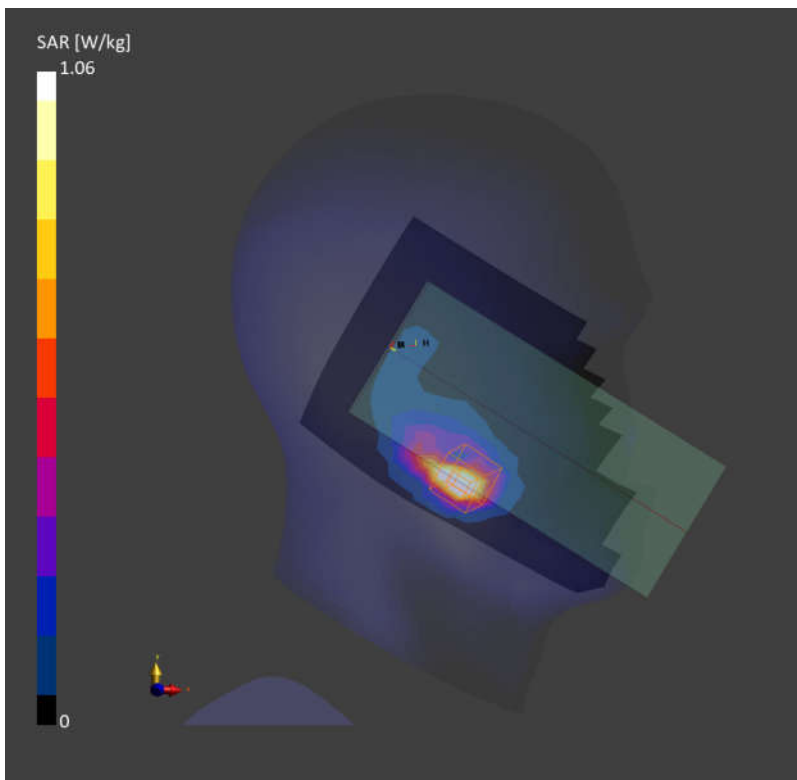

Date: 2024-12-12

25_FR1 n41 HPUE_100M_QPSK_1RB_1Offset_Right Tilted_0mm_Ch518598


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
 AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:2
 Medium: HSL Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.887 W/kg; SAR (10g) = 0.358 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.01 dB
 SAR (1g) = 0.988 W/kg; SAR (10g) = 0.374 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.1 mm
 Ratio of SAR at M2 to SAR at M1 = 76.2 %

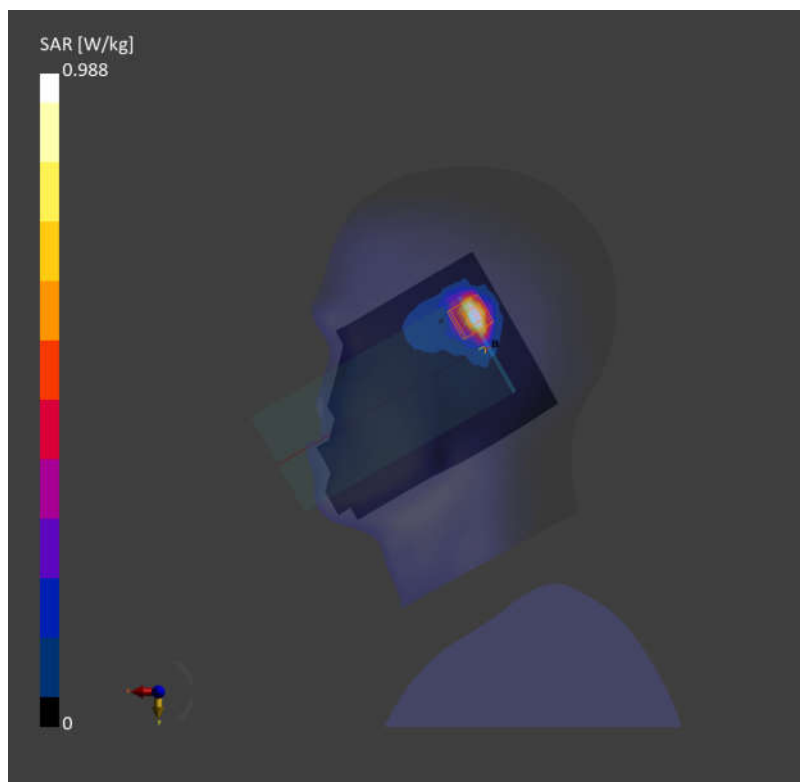

Date: 2024-12-13

26_LTE Band 42_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch42990


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 3540.000 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 38.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.10 W/kg; SAR (10g) = 0.408 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 0.999 W/kg; SAR (10g) = 0.423 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 73.4 %

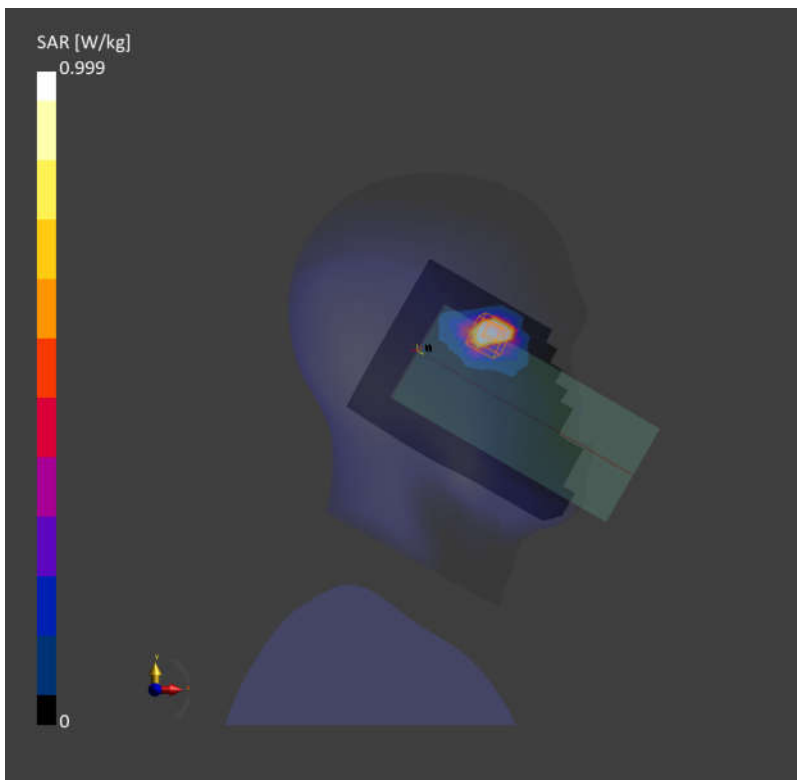

Date: 2024-12-13

27_LTE Band 48_20M_QPSK_1RB_0Offset_Left Tilted_0mm_Ch55340


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)
AntennaCfg:SISO; Frequency: 3560.000 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 38.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.965 W/kg; SAR (10g) = 0.333 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.971 W/kg; SAR (10g) = 0.335 W/kg
Smallest distance from peaks to all points 3 dB below = 5.5 mm
Ratio of SAR at M2 to SAR at M1 = 76.3 %

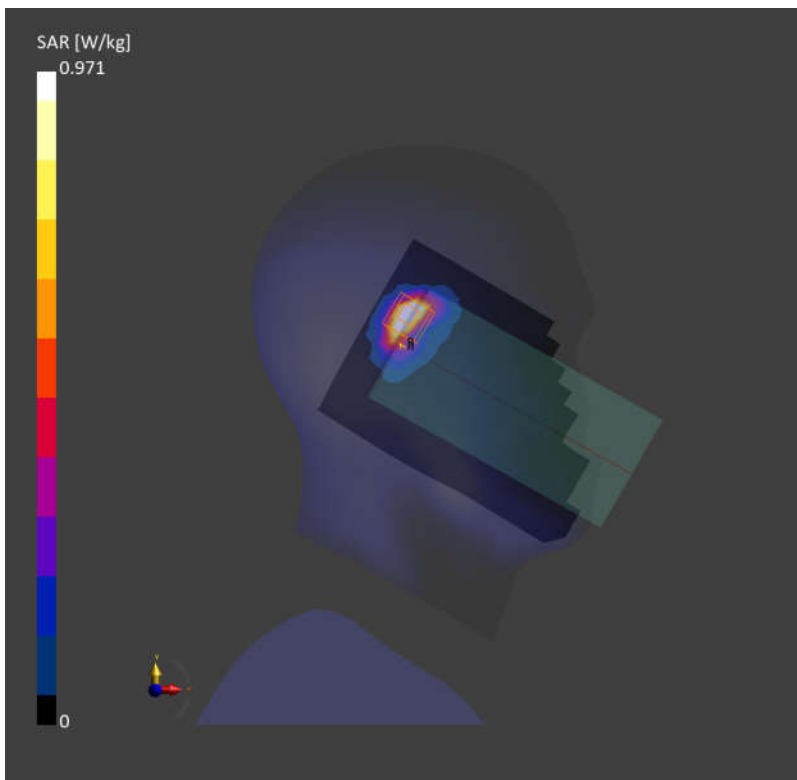

Date: 2024-12-14

28_FR1 n48_40M_QPSK_1RB_1Offset_Left Cheek_0mm_Ch641666


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 3624.985 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.93$ S/m; $\epsilon_r = 38.8$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.872 W/kg; SAR (10g) = 0.320 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 1.01 W/kg; SAR (10g) = 0.354 W/kg
Smallest distance from peaks to all points 3 dB below = 5.5 mm
Ratio of SAR at M2 to SAR at M1 = 75.3 %

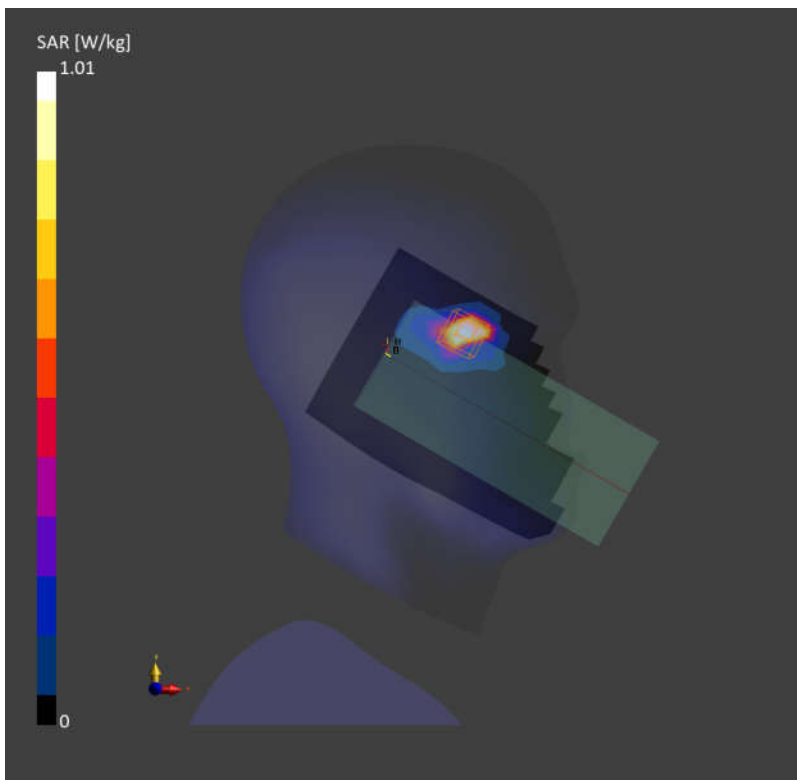

Date: 2024-12-15

29_FR1 n77 HPUE_100M_QPSK_1RB_1Offset_Left Tilted_0mm_Ch656000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:2
Medium: HSL Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.18$ S/m; $\epsilon_r = 37.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.83, 7.98, 6.94); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.03 W/kg; SAR (10g) = 0.337 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.983 W/kg; SAR (10g) = 0.350 W/kg
Smallest distance from peaks to all points 3 dB below = 4.9 mm
Ratio of SAR at M2 to SAR at M1 = 70.3 %

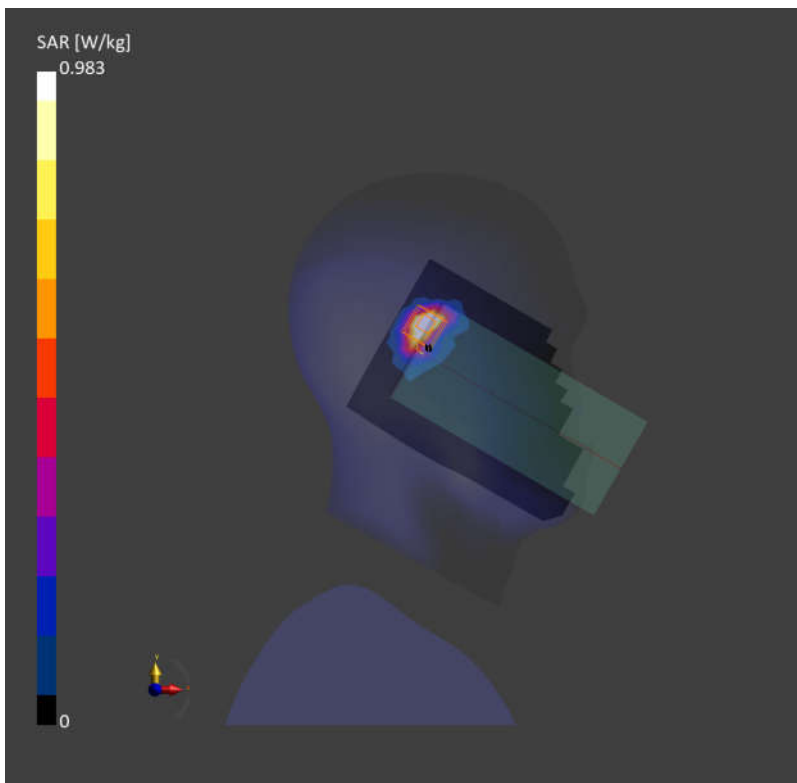

Date: 2024-12-24

30_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)

Frequency: 2462.000 MHz; Duty Cycle: 1:1.03

Medium: HSL Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.766 W/kg; SAR (10g) = 0.364 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.956 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

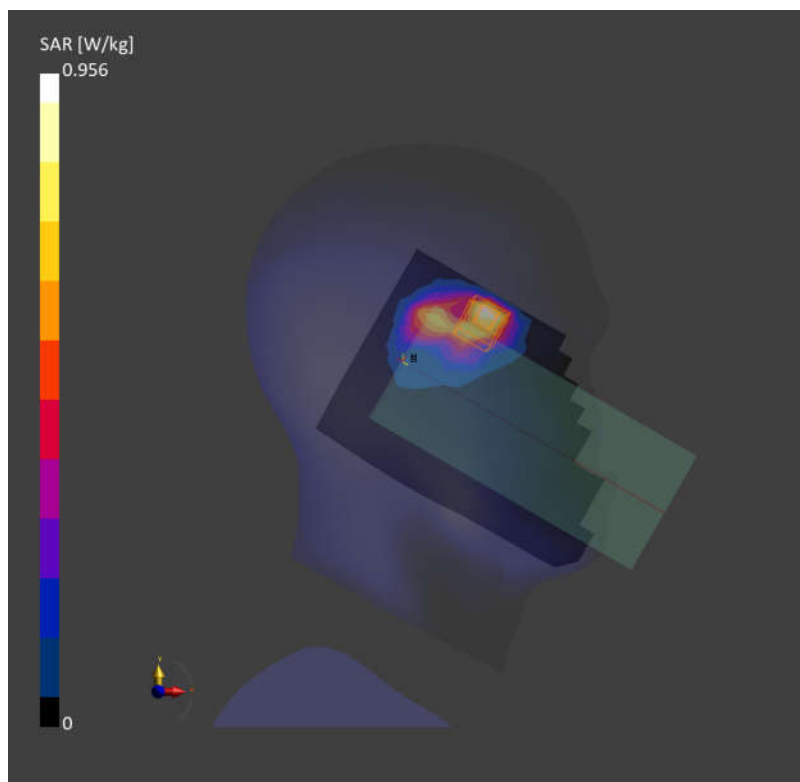

Date: 2024-12-24

31_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5)

Frequency: 2441.000 MHz; DutyCycle: 1:1.298

Medium: HSL Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.839 W/kg; SAR (10g) = 0.360 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.935 W/kg; SAR (10g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 92.2 %

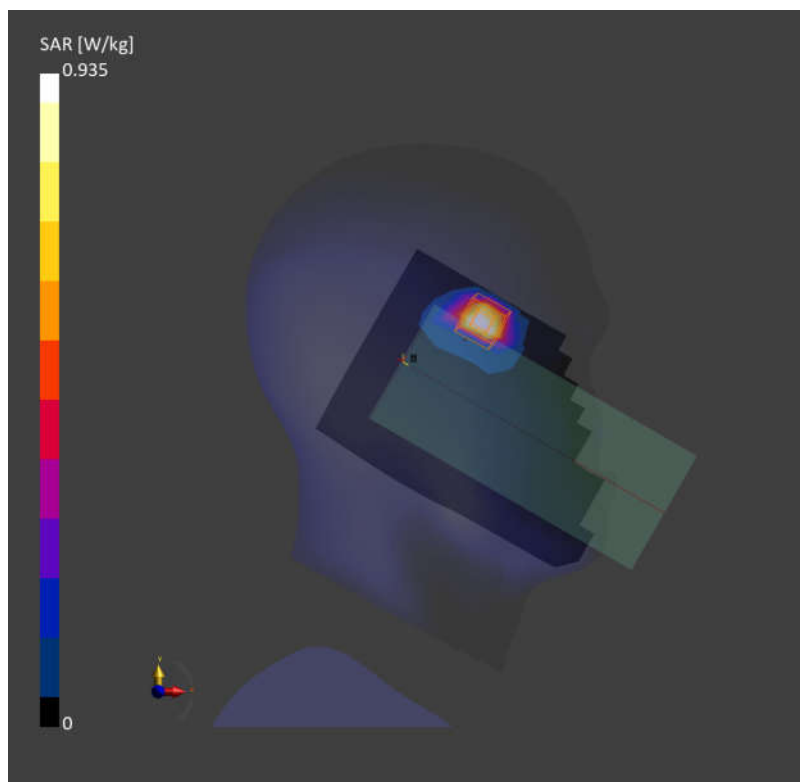

Date: 2024-12-25

32_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5290.000 MHz; Duty Cycle: 1:1.004

Medium: HSL Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.73$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.356 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.856 W/kg; SAR (10g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.8 %

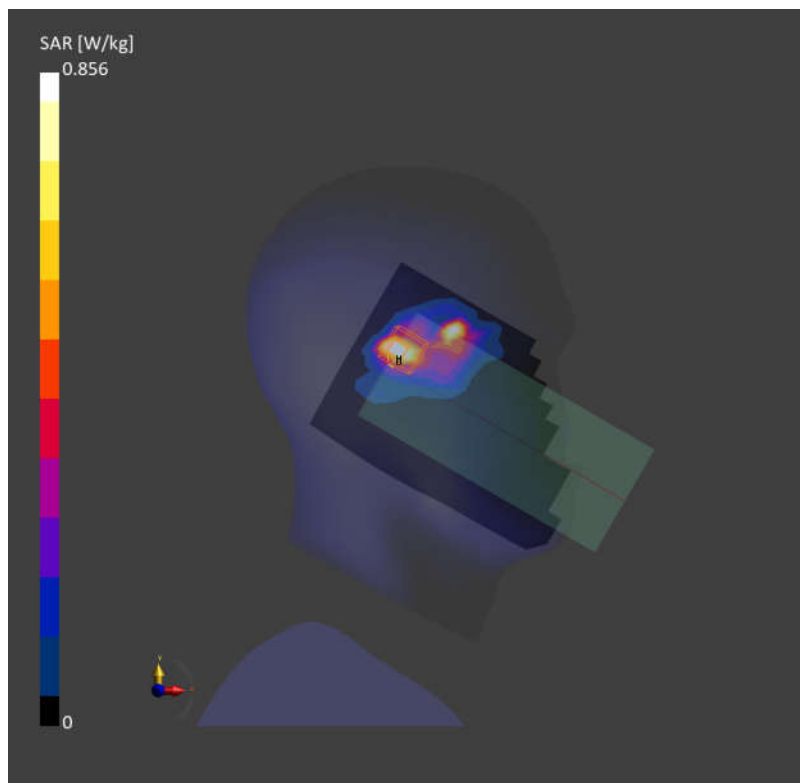

Date: 2024-12-26

33_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_0mm_Ch114

Communication System: IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)

Frequency: 5570.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5570.000$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.9); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.875 W/kg; SAR (10g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 83 %

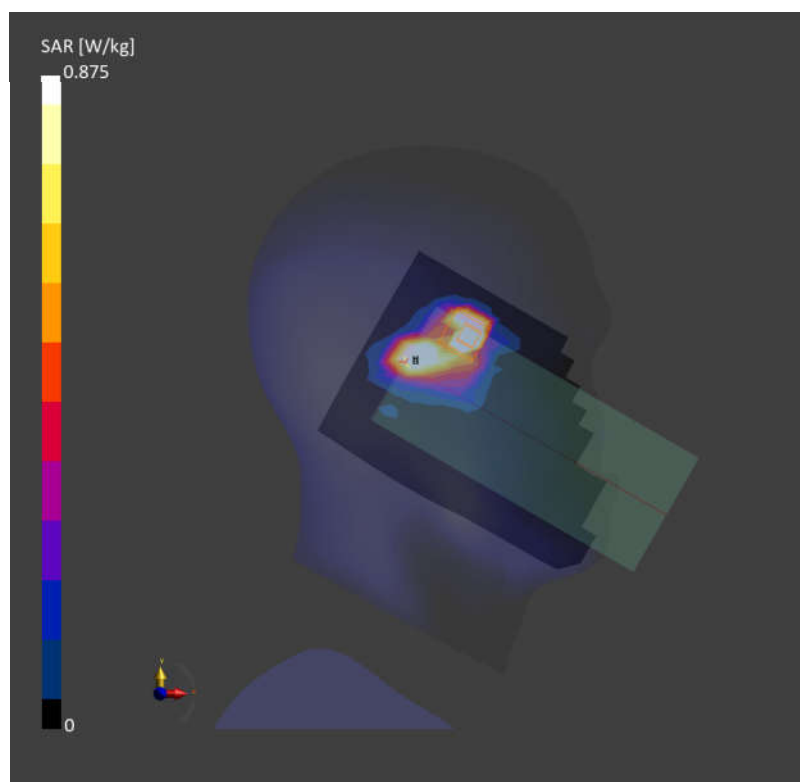

Date: 2024-12-27

34_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5775.000 MHz; Duty Cycle: 1:1.004

Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.932 W/kg; SAR (10g) = 0.309 W/kg;


Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.892 W/kg; SAR (10g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.8 %

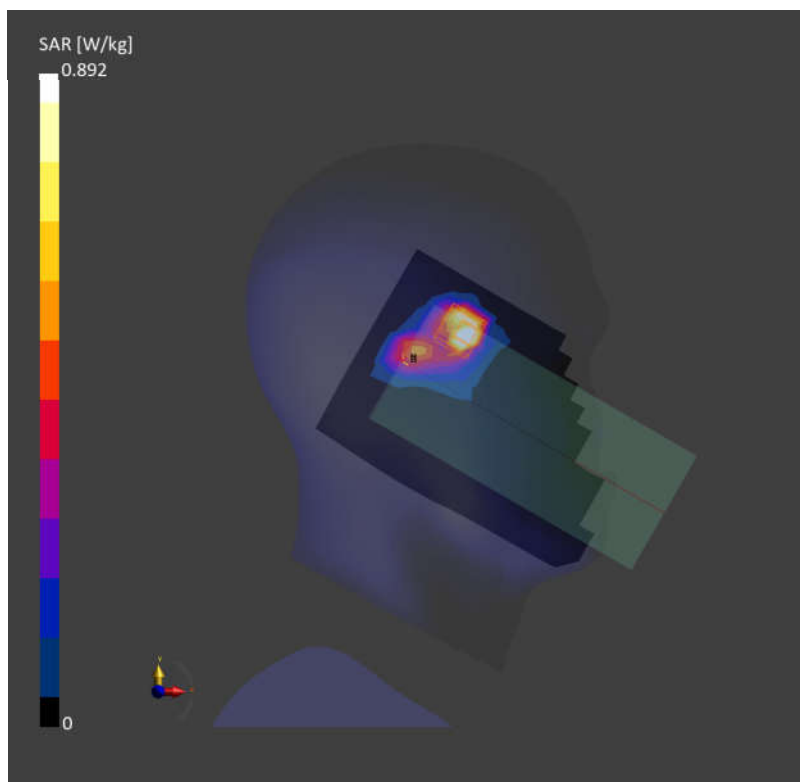

Date: 2024-12-08

35_LTE Band 71_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch133322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.862 W/kg; SAR (10g) = 0.518 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.836 W/kg; SAR (10g) = 0.481 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.1 %

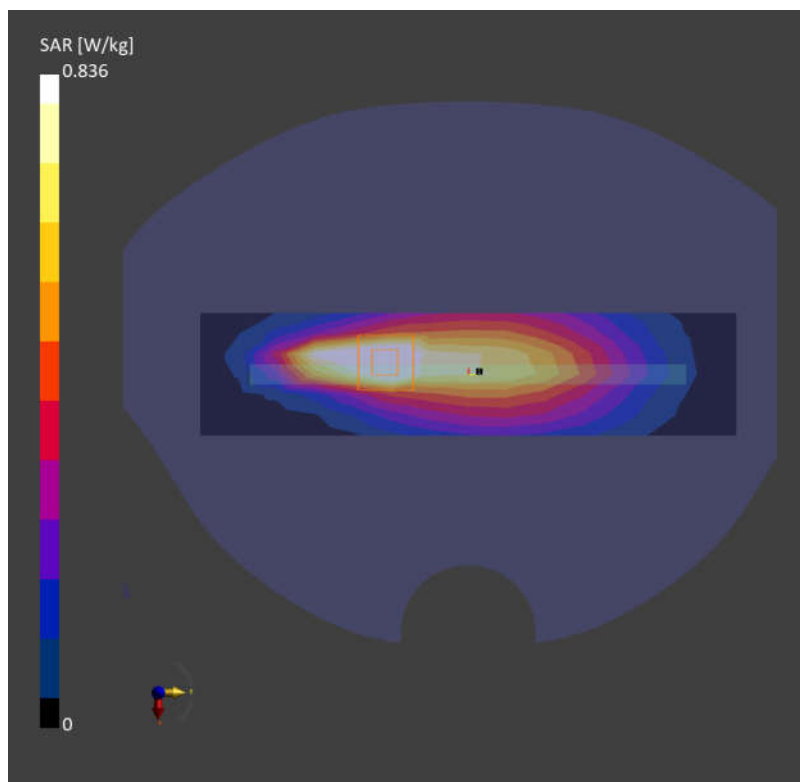

Date: 2024-12-08

36_LTE Band 12_10M_QPSK_1RB_0Offset_Right Side_5mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.832$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.692 W/kg; SAR (10g) = 0.430 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.711 W/kg; SAR (10g) = 0.419 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

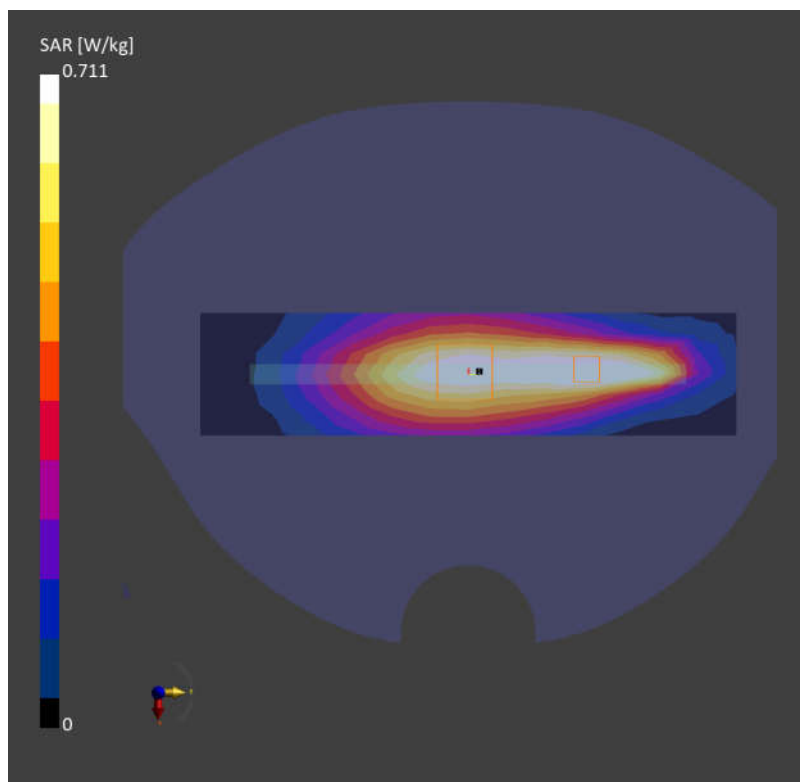

Date: 2024-12-08

37_LTE Band 13_10M_QPSK_1RB_0Offset_Right Side_5mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.346 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.595 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

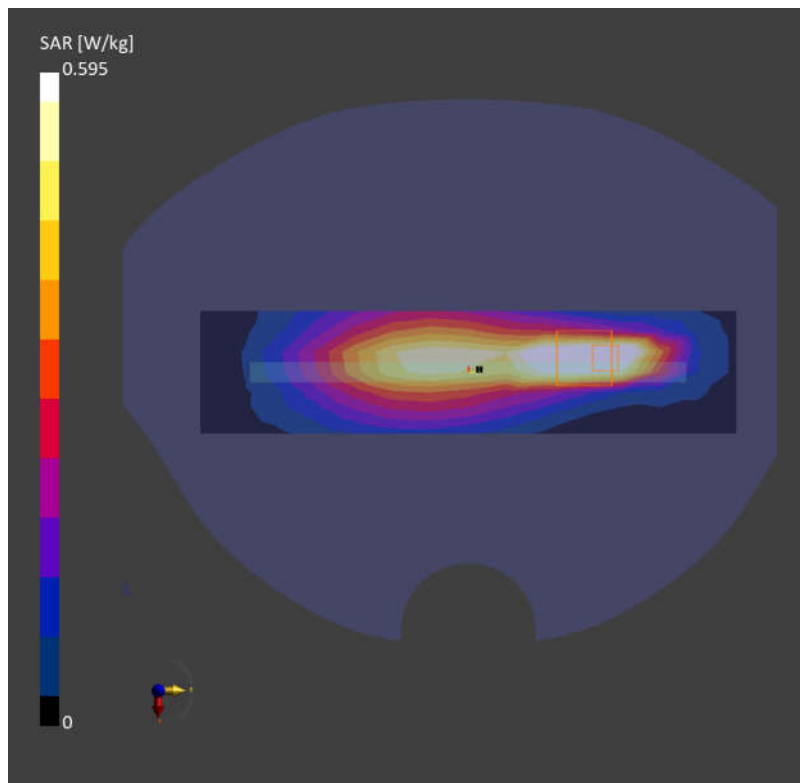

Date: 2024-12-08

38_LTE Band 14_10M_QPSK_1RB_0Offset_Right Side_5mm_Ch23330

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.676 W/kg; SAR (10g) = 0.405 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

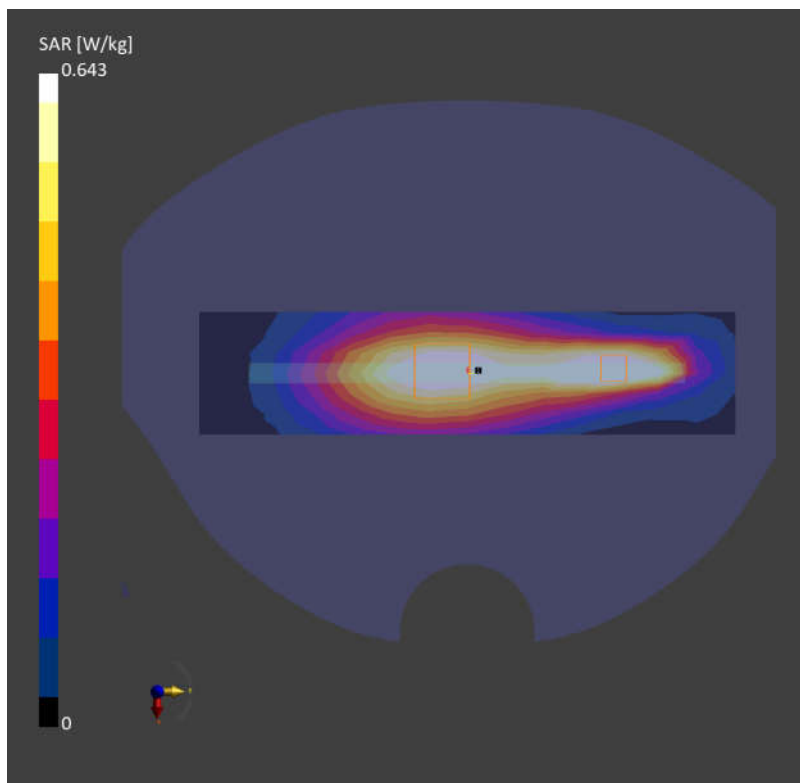

Date: 2024-12-08

39_FR1 n71_35M_QPSK_90RB_45Offset_Left Side_5mm_Ch136100

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 35 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.494 W/kg; SAR (10g) = 0.294 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.470 W/kg; SAR (10g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

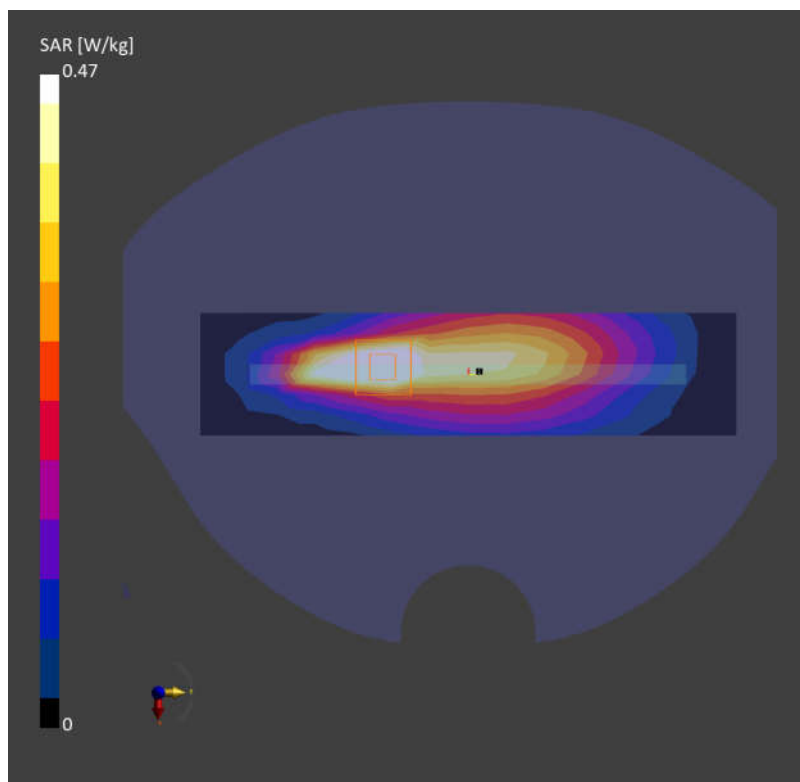

Date: 2024-12-08

40_FR1 n12_15M_QPSK_36RB_22Offset_Right Side_5mm_Ch141500

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.832$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.576 W/kg; SAR (10g) = 0.349 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.338 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.6 %

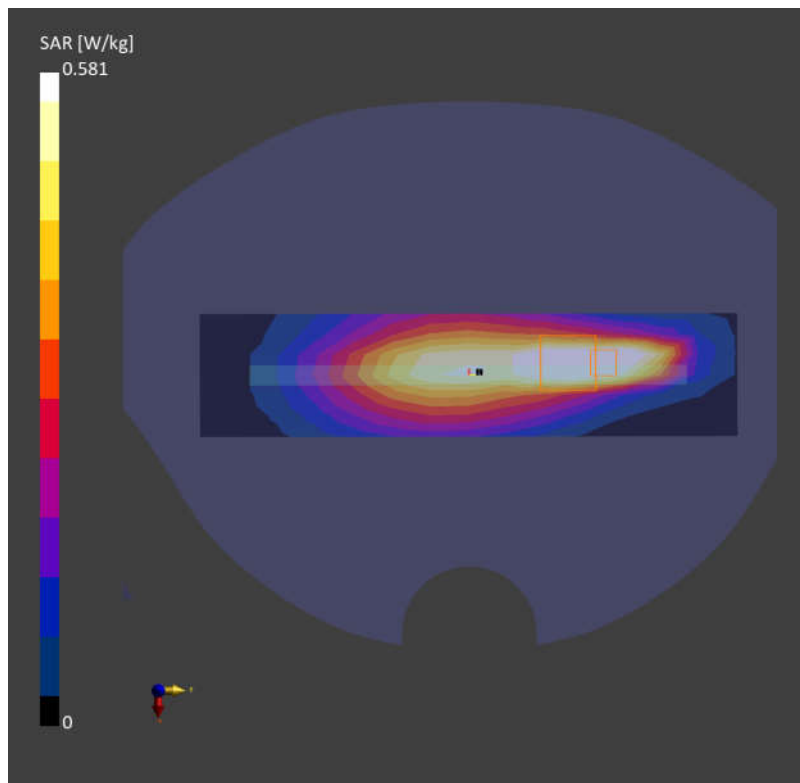

Date: 2024-12-08

41_FR1 n14_10M_QPSK_1RB_1Offset_Back_5mm_Ch158600


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 40.6$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.12, 8.81, 8.04); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.527 W/kg; SAR (10g) = 0.334 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.520 W/kg; SAR (10g) = 0.312 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 78.0 %

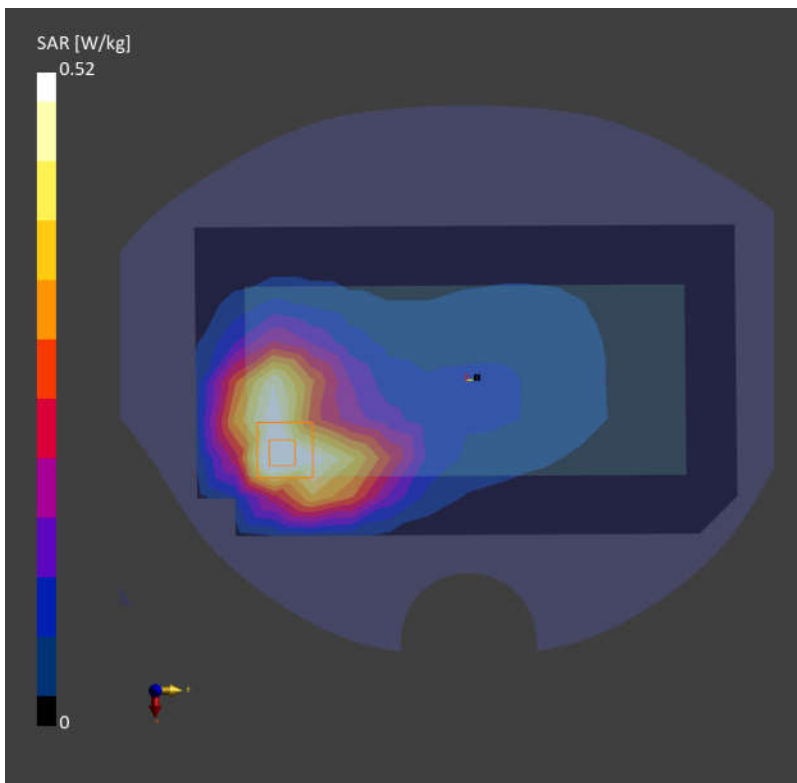

Date: 2024-12-09

42_GSM850_GPRS (3 Tx slots)_Back_5mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2)

Frequency: 836.400 MHz; DutyCycle: 1:2.77

Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(7.76, 8.53, 7.85); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.736 W/kg; SAR (10g) = 0.466 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.484 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

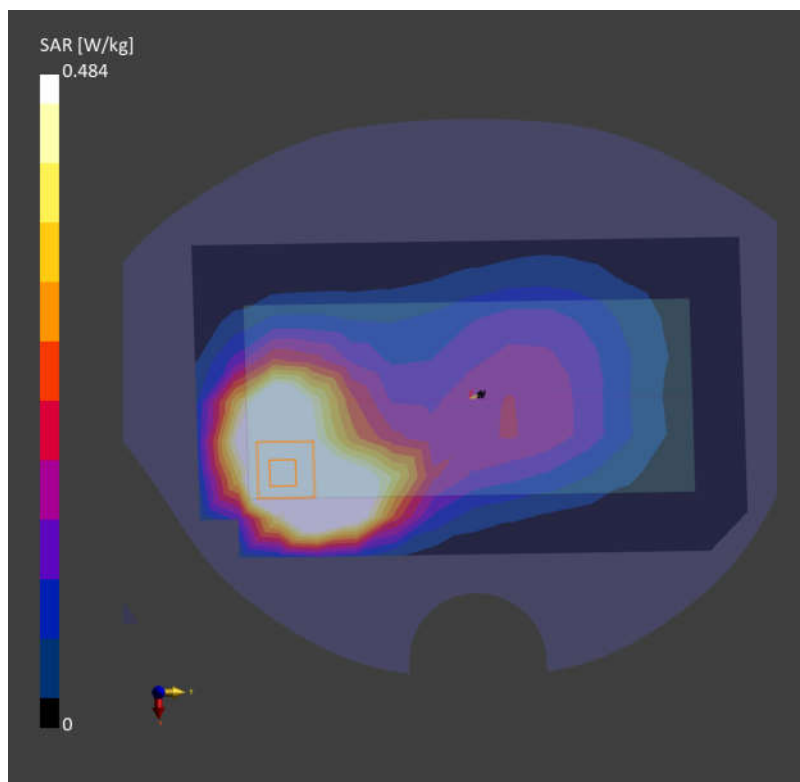

Date: 2024-12-09

43_FR1 n26_20M_QPSK_1RB_1Offset_Back_5mm_Ch166300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 40.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(7.76, 8.53, 7.85); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.554 W/kg; SAR (10g) = 0.350 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.540 W/kg; SAR (10g) = 0.323 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 80.4 %

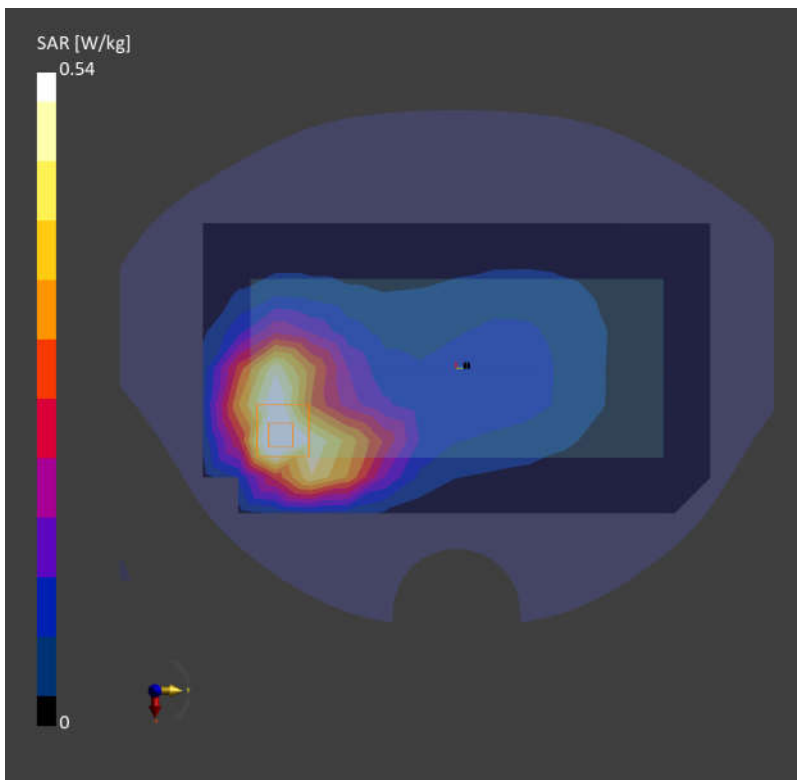

Date: 2024-12-10

44_WCDMA IV_RMC 12.2Kbps_Right Side_5mm_Ch1312

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.82, 7.54, 7.06); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.521 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.483 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

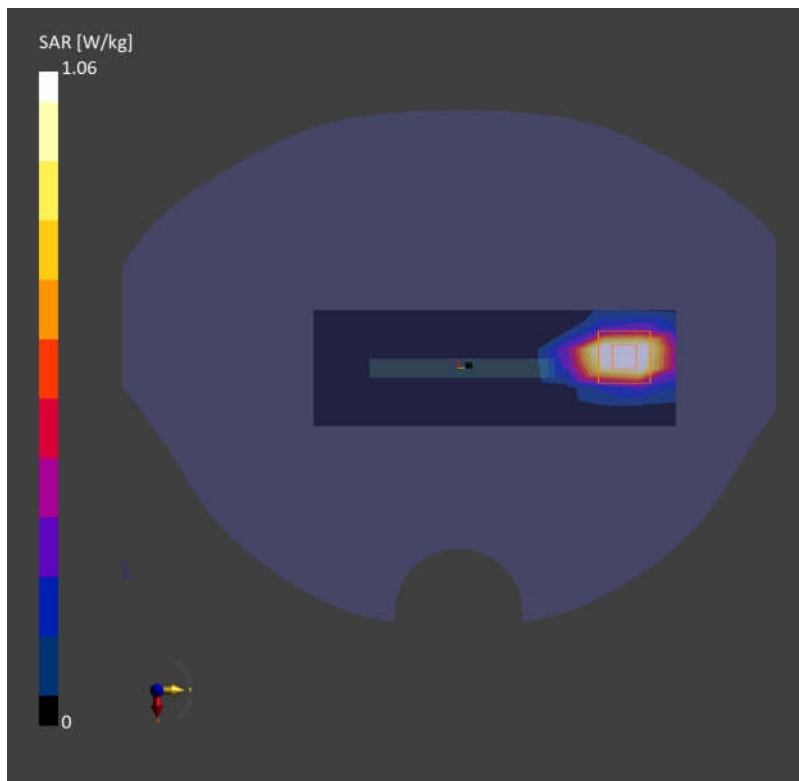

Date: 2024-12-10

45_FR1 n66_45M_QPSK_120RB_60Offset_Left Side_5mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 45 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.82, 7.54, 7.06); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.902 W/kg; SAR (10g) = 0.414 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.971 W/kg; SAR (10g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

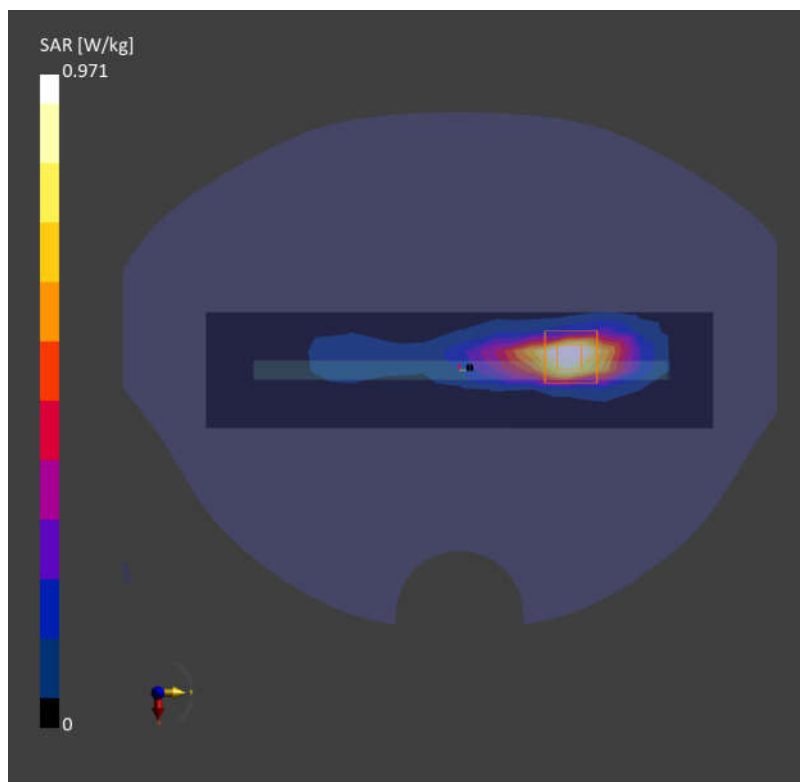

Date: 2024-12-10

46_FR1 n70_15M_QPSK_1RB_1Offset_Right Side_5mm_Ch340500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1702.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.82, 7.54, 7.06); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.918 W/kg; SAR (10g) = 0.441 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.945 W/kg; SAR (10g) = 0.440 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 82.4 %

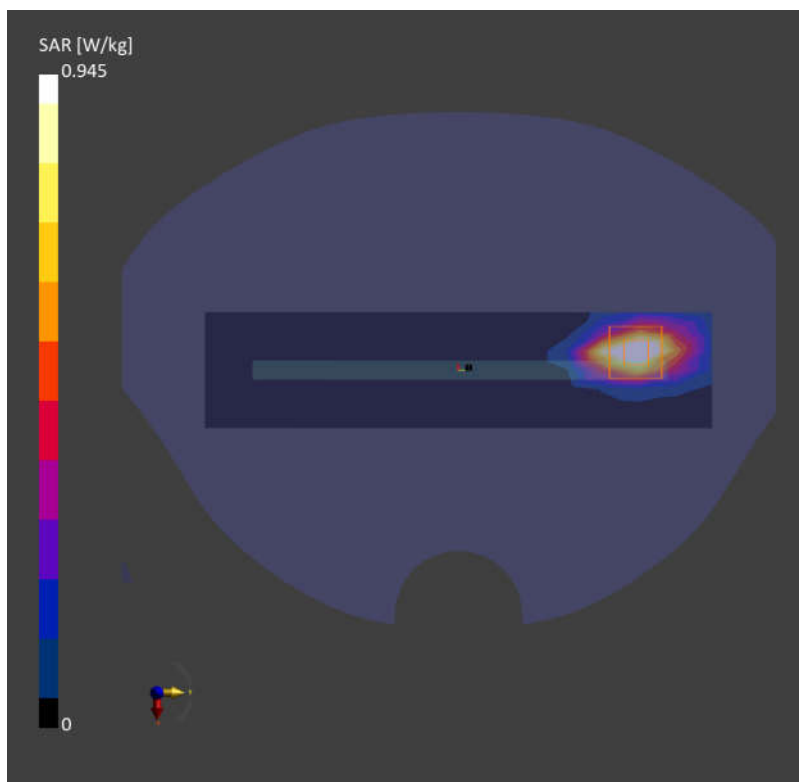

Date: 2024-12-11

47_WCDMA II_RMC 12.2Kbps_Left Side_5mm_Ch9400


Communication System: UMTS-FDD (WCDMA); Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.48, 7.12, 6.7); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 1.08 W/kg; SAR (10g) = 0.495 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 1.07 W/kg; SAR (10g) = 0.489 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 77.1 %

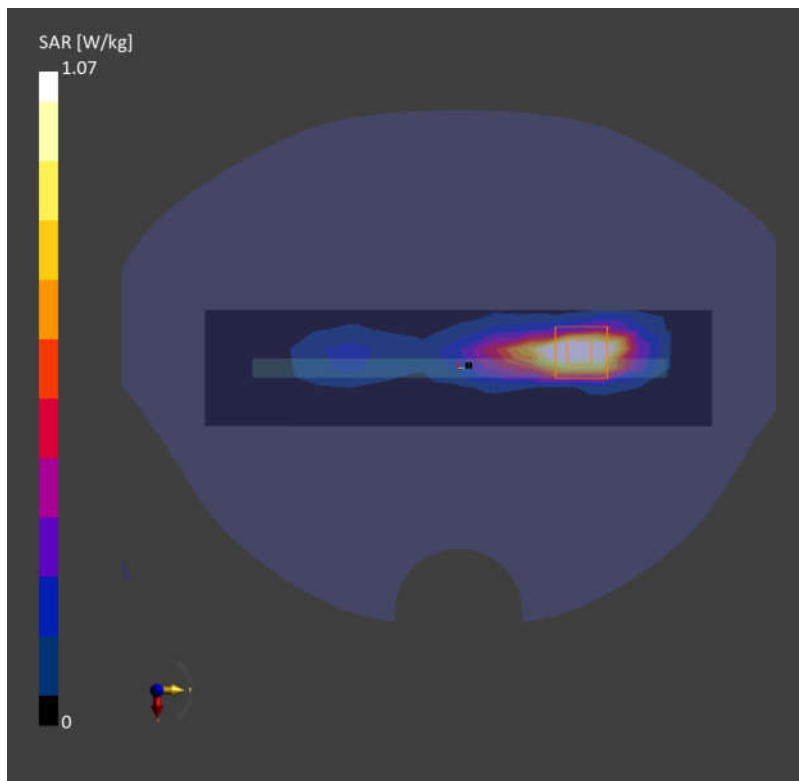

Date: 2024-12-11

48_LTE Band 25_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch26590

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1905.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.48, 7.12, 6.7); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.483 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.470 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

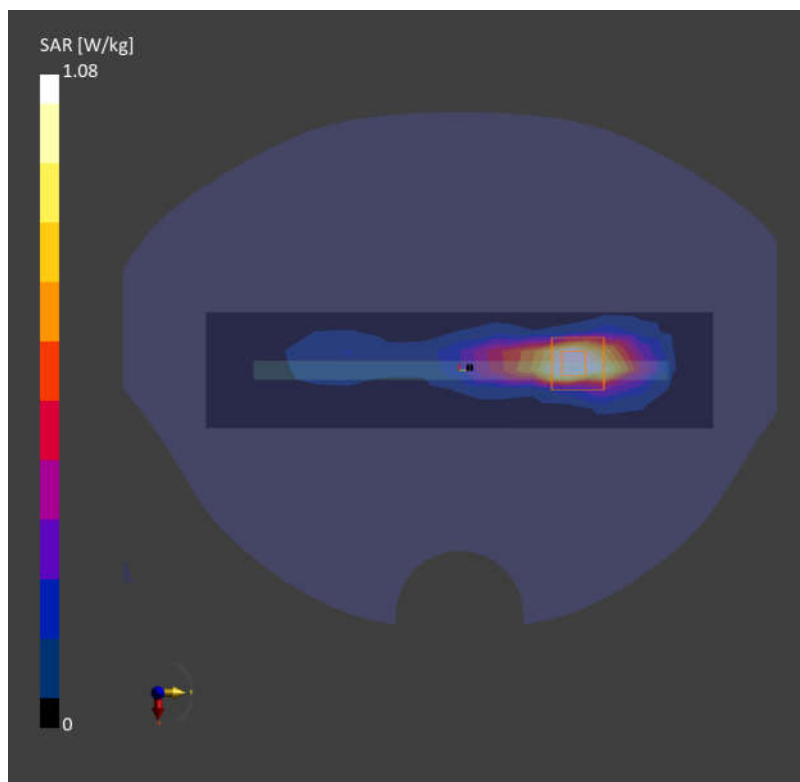

Date: 2024-12-11

49_FR1 n25_40M_QPSK_1RB_1Offset_Top Side_5mm_Ch376500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.48, 7.12, 6.7); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.993 W/kg; SAR (10g) = 0.470 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.990 W/kg; SAR (10g) = 0.487 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 76.2 %

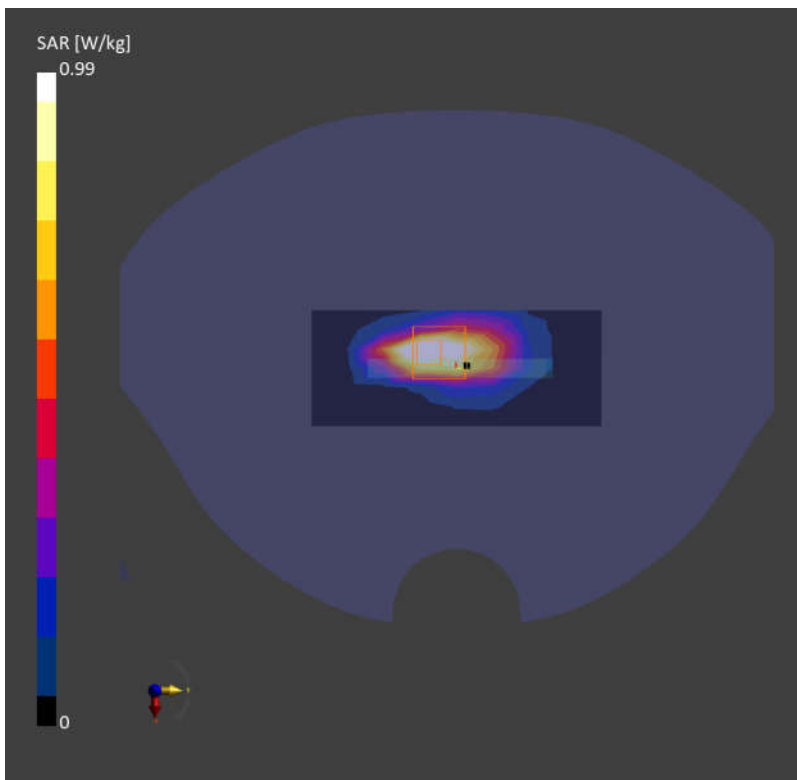

Date: 2024-12-11

50_LTE Band 30_10M_QPSK_1RB_0Offset_Right Side_5mm_Ch27710

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.32, 6.92, 6.49); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 1.22 W/kg; SAR (10g) = 0.465 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

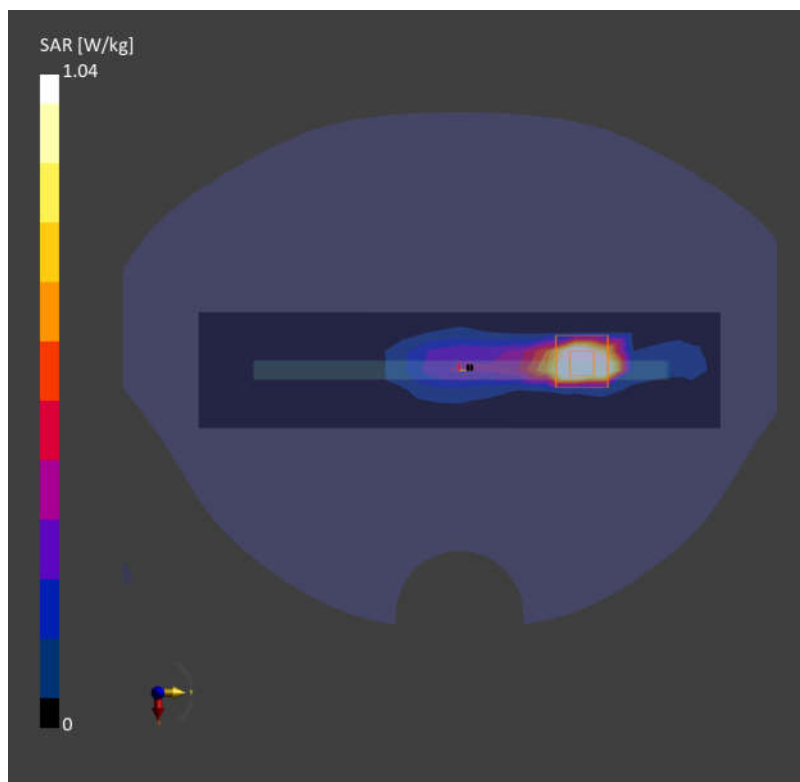

Date: 2024-12-11

51_FR1 n30_10M_QPSK_25RB_14Offset_Right Side_5mm_Ch462000


Communication System: 5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.65$ S/m; $\epsilon_r = 39.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.32, 6.92, 6.49); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm
SAR (1g) = 1.06 W/kg; SAR (10g) = 0.402 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 1.04 W/kg; SAR (10g) = 0.402 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 77.2 %

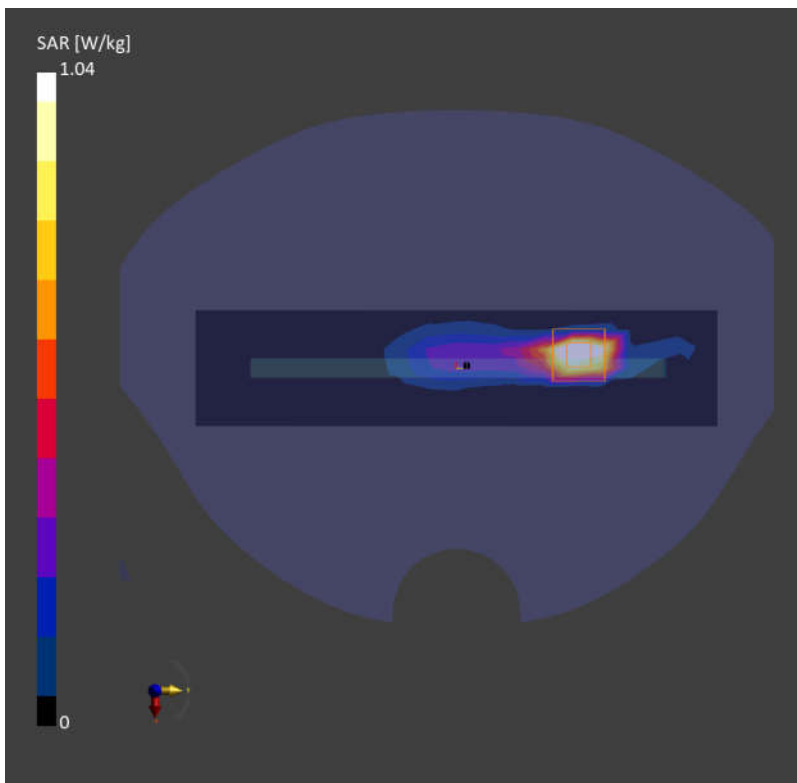

Date: 2024-12-12

52_LTE Band 7_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch21350

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.16, 6.71, 6.3); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 0.876 W/kg; SAR (10g) = 0.383 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.9 %

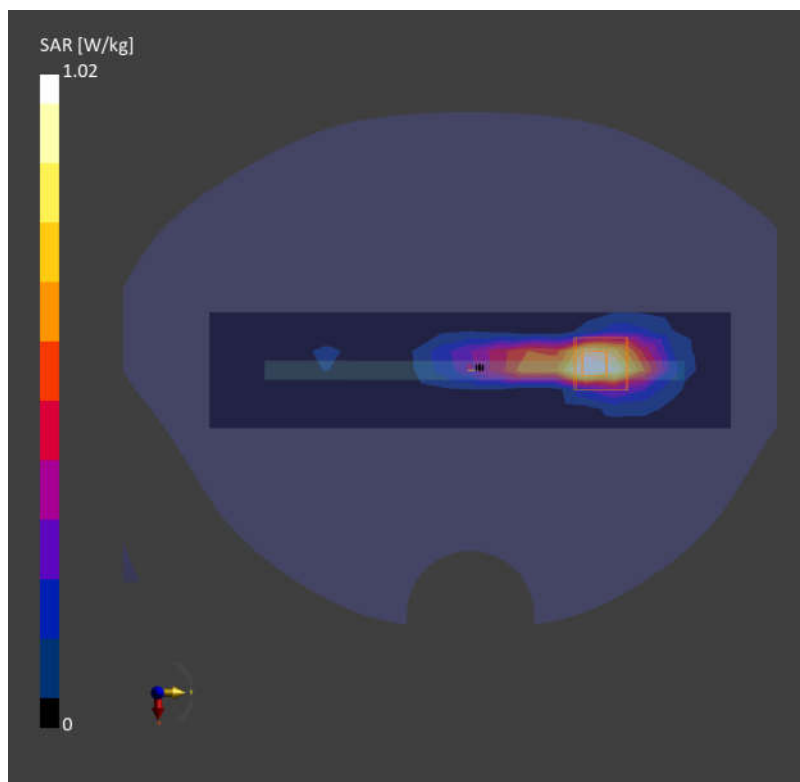

Date: 2024-12-12

53_LTE Band 41_20M_QPSK_1RB_0Offset_Right Side_5mm_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2636.500 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 37.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.16, 6.71, 6.3); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.494 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

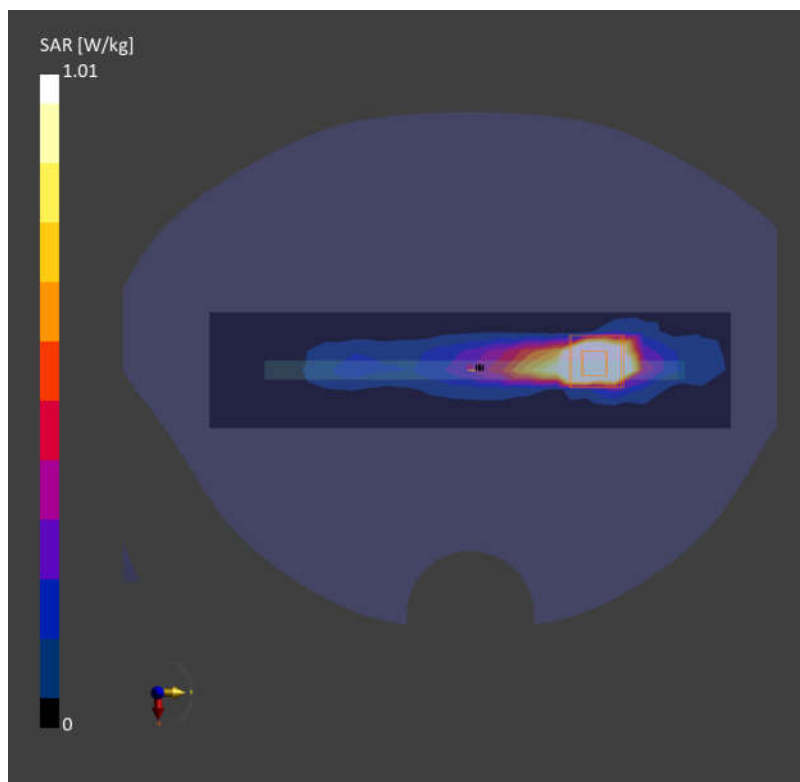

Date: 2024-12-12

54_FR1 n7_50M_QPSK_135RB_68Offset_Left Side_5mm_Ch507000

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.16, 6.71, 6.3); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.375 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

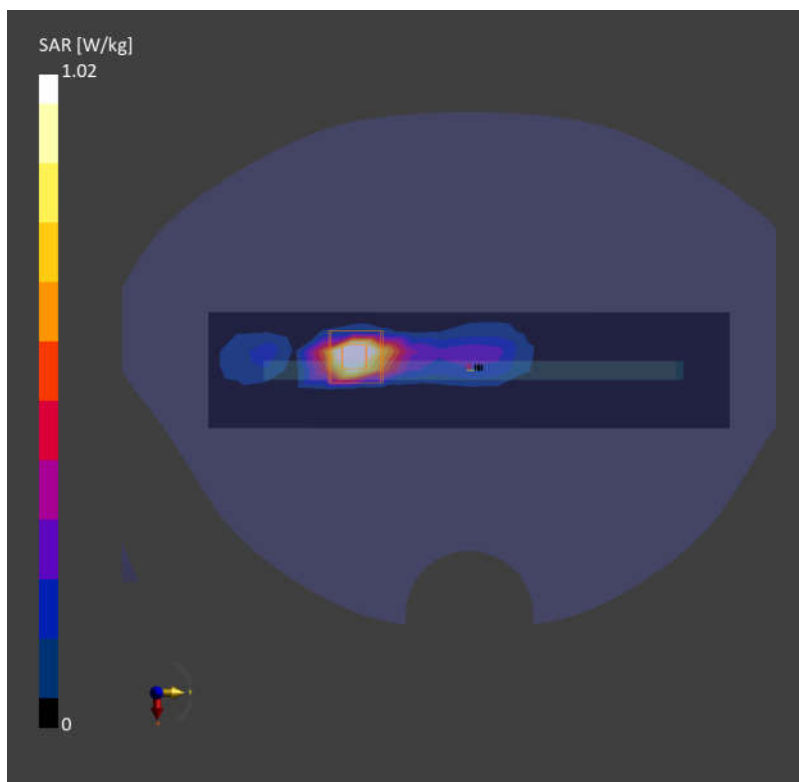

Date: 2024-12-12

55_FR1 n41_100M_QPSK_1RB_1Offset_Top Side_5mm_Ch518598


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 37.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.16, 6.71, 6.3); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 12.0 mm
SAR (1g) = 0.981 W/kg; SAR (10g) = 0.381 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 1.06 W/kg; SAR (10g) = 0.385 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 72.5 %

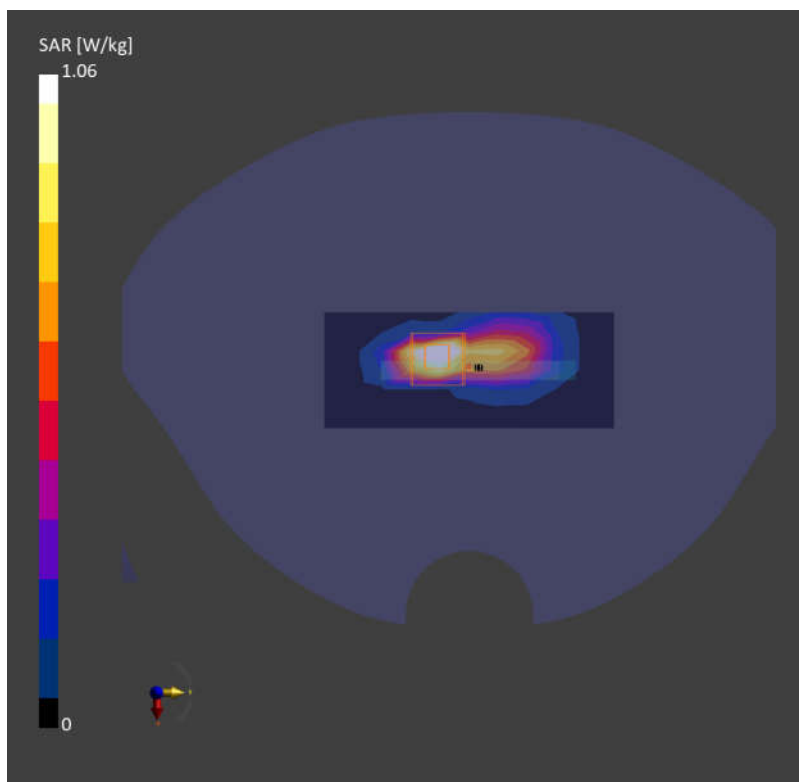

Date: 2024-12-13

56_LTE Band 42_20M_QPSK_1RB_0Offset_Right Side_5mm_Ch42990

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 3540.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.82$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 6.05, 5.64); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.19 W/kg; SAR (10g) = 0.414 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.2 %

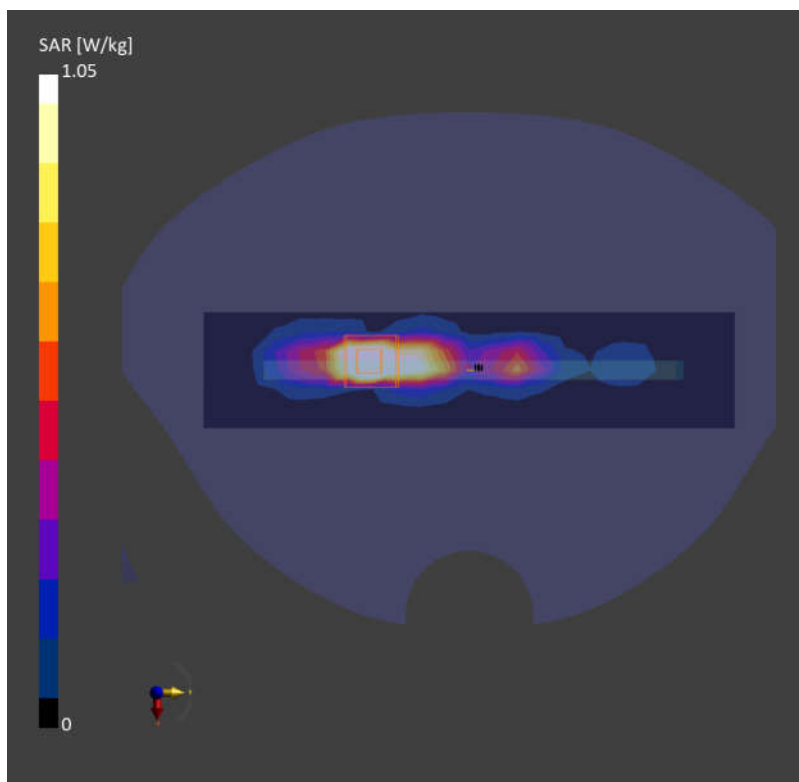

Date: 2024-12-14

57_LTE Band 48_20M_QPSK_1RB_0Offset_Right Side_5mm_Ch56640

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 3690.000 MHz; Duty Cycle: 1:1.59

Medium: HSL Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.18, 5.67, 5.29); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.15 W/kg; SAR (10g) = 0.383 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.0 %

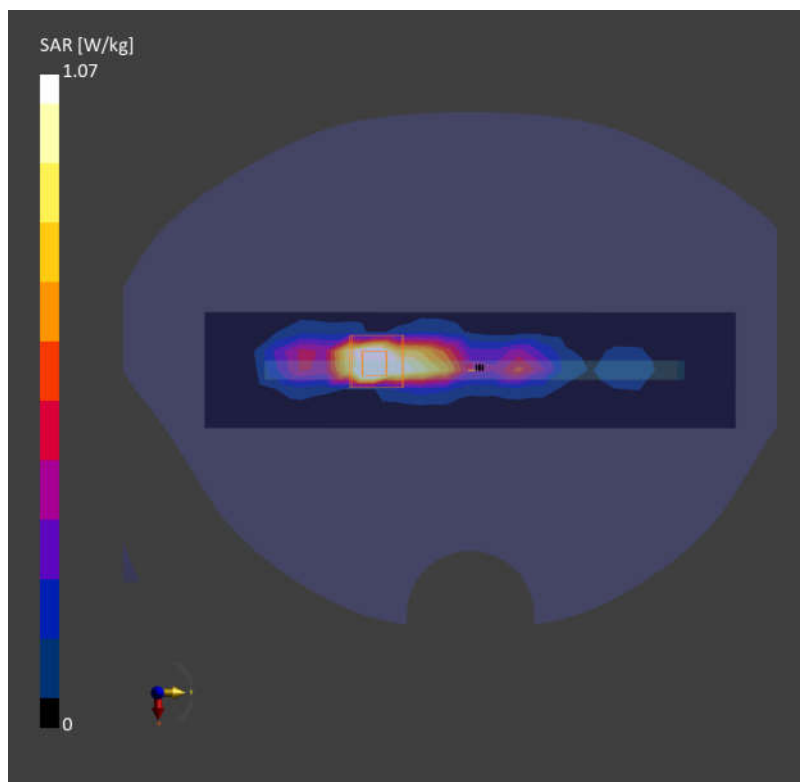

Date: 2024-12-14

58_FR1 n48_40M_QPSK_1RB_1Offset_Top Side_5mm_Ch641666


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 3624.990 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3624.990$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.18, 5.67, 5.29); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.697 W/kg; SAR (10g) = 0.300 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.972 W/kg; SAR (10g) = 0.301 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 74.1 %

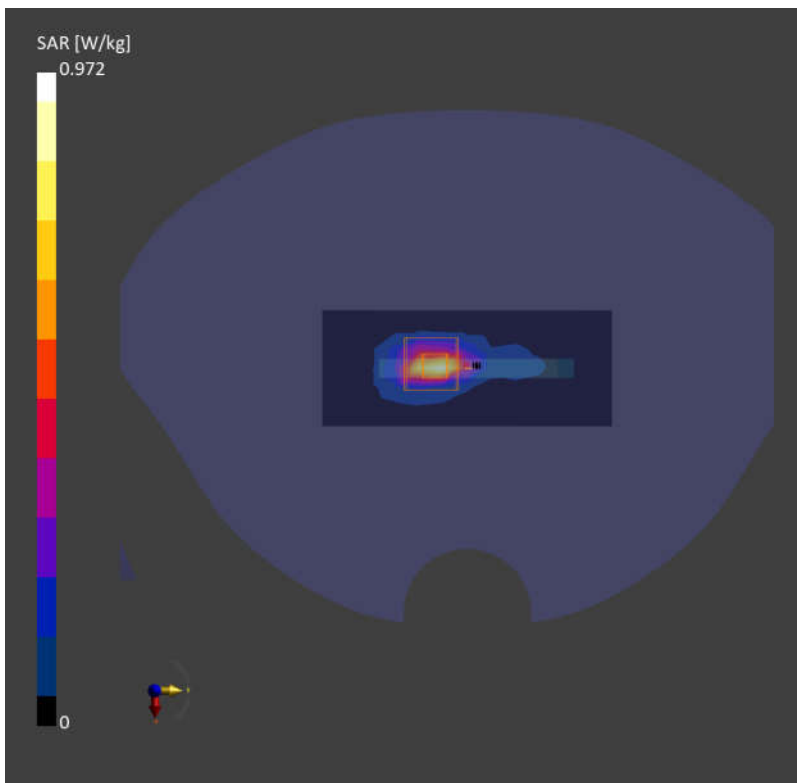

Date: 2024-12-15

59_FR1 n77_100M_QPSK_1RB_1Offset_Top Side_5mm_Ch656000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.13$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.5, 6.03, 5.62); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 1.05 W/kg; SAR (10g) = 0.339 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.07 dB
SAR (1g) = 1.06 W/kg; SAR (10g) = 0.332 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 74.1 %

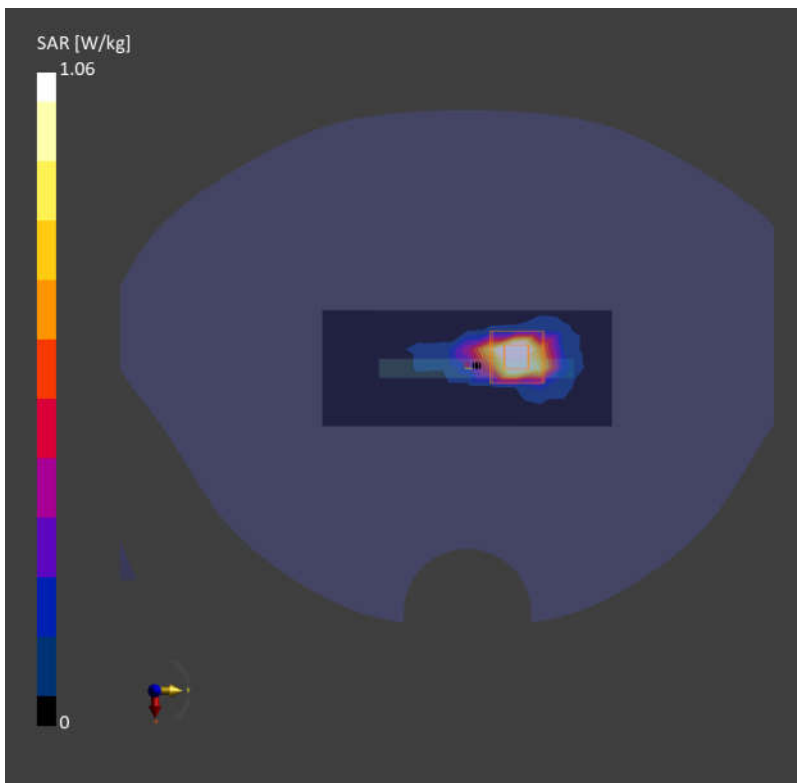

Date: 2024-12-26

60_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)

Frequency: 2462.000 MHz; Duty Cycle: 1:1.03

Medium: HSL Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.08, 6.63, 6.23); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.403 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.991 W/kg; SAR (10g) = 0.389 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

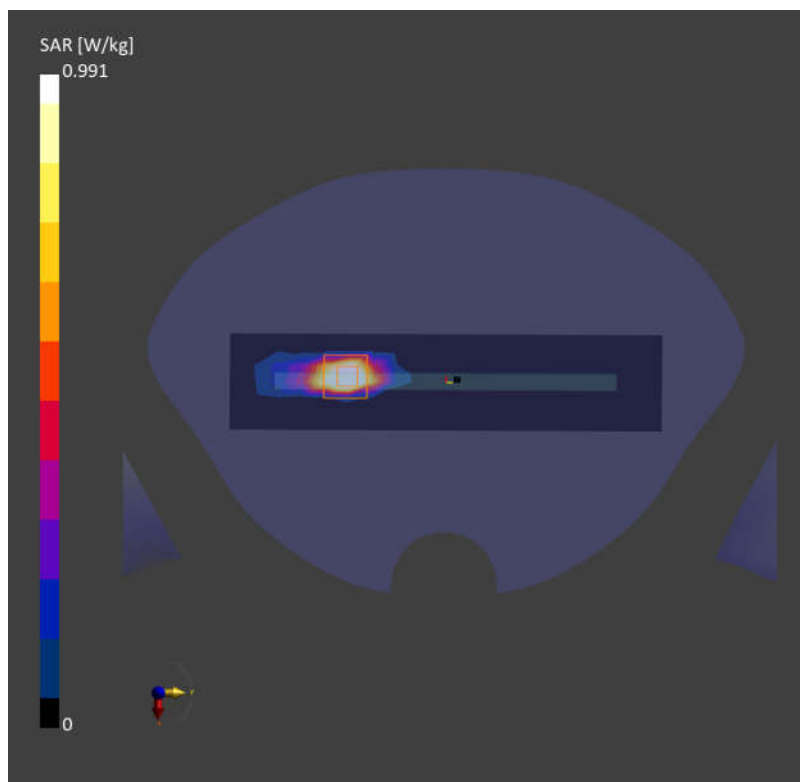

Date: 2024-12-27

61_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch42


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5210.000 MHz; Duty Cycle: 1:1.004
Medium: HSL Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 36.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.32, 4.72, 4.38); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.574 W/kg; SAR (10g) = 0.206 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.07 dB
SAR (1g) = 0.902 W/kg; SAR (10g) = 0.229 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.1 %

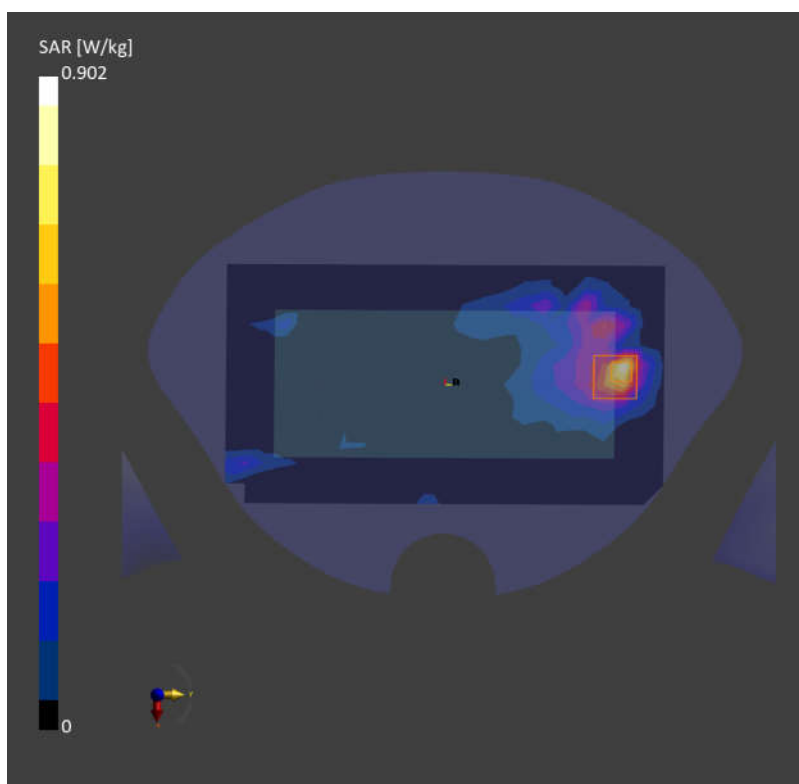

Date: 2024-12-29

62_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch155


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5775.000 MHz; Duty Cycle: 1:1.004
Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 35.1$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(3.91, 4.24, 3.96); Calibrated: 2024-06-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.975 W/kg; SAR (10g) = 0.305 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 0.899 W/kg; SAR (10g) = 0.280 W/kg
Smallest distance from peaks to all points 3 dB below = 4.6 mm
Ratio of SAR at M2 to SAR at M1 = 57.6 %

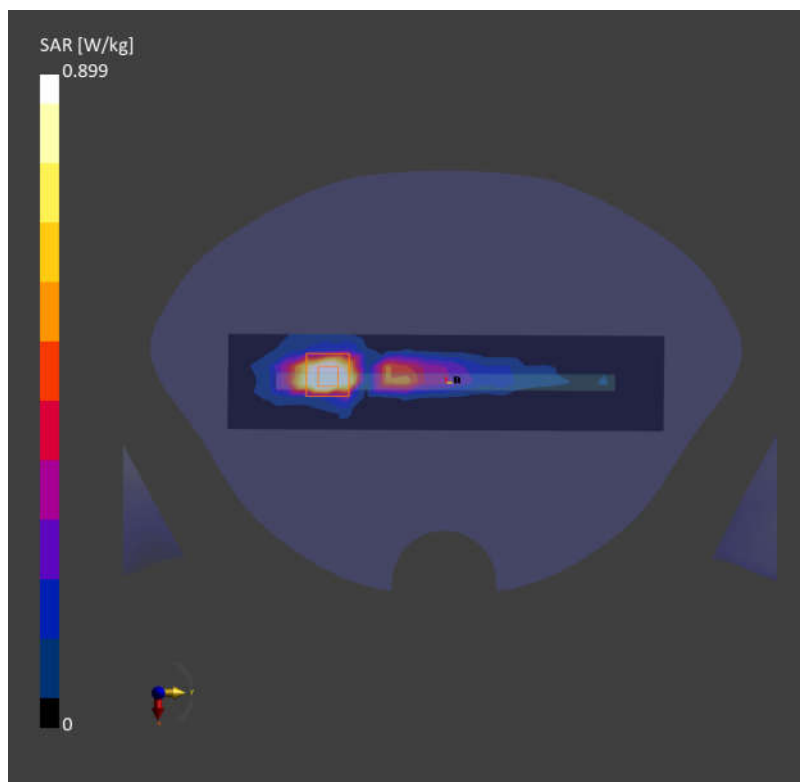

Date: 2024-12-17

63_WCDMA V_RMC 12.2Kbps_Left Side_5mm_Ch4233


Communication System: UMTS-FDD (WCDMA); Frequency: 846.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.812 W/kg; SAR (10g) = 0.512 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.04 dB
SAR (1g) = 0.903 W/kg; SAR (10g) = 0.523 W/kg
Smallest distance from peaks to all points 3 dB below = 8.7 mm
Ratio of SAR at M2 to SAR at M1 = 74.7 %

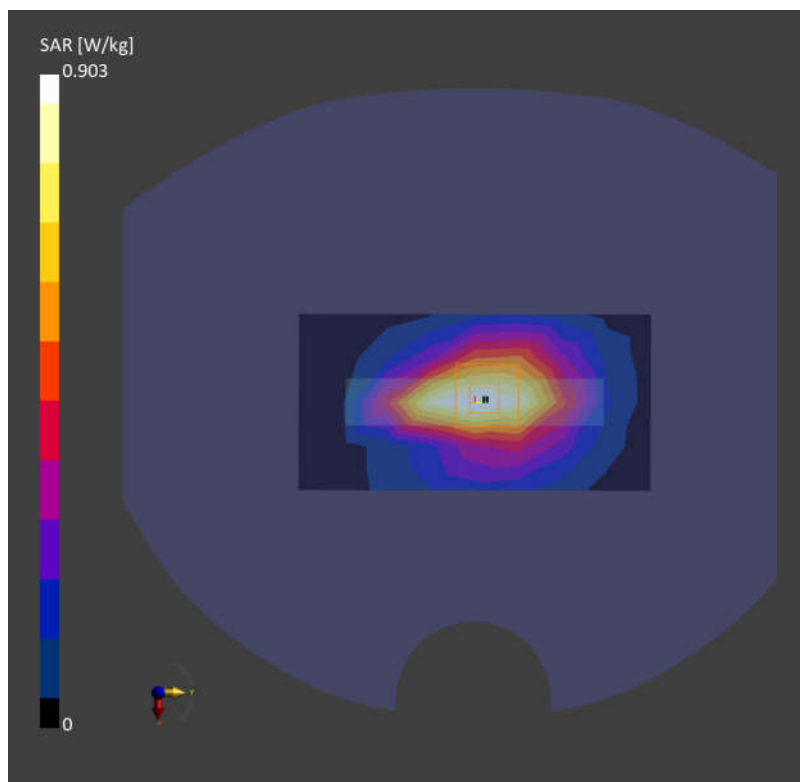

Date: 2024-12-17

64_LTE Band 26_15M_QPSK_1RB_0Offset_Right Side_5mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.433 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.752 W/kg; SAR (10g) = 0.396 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

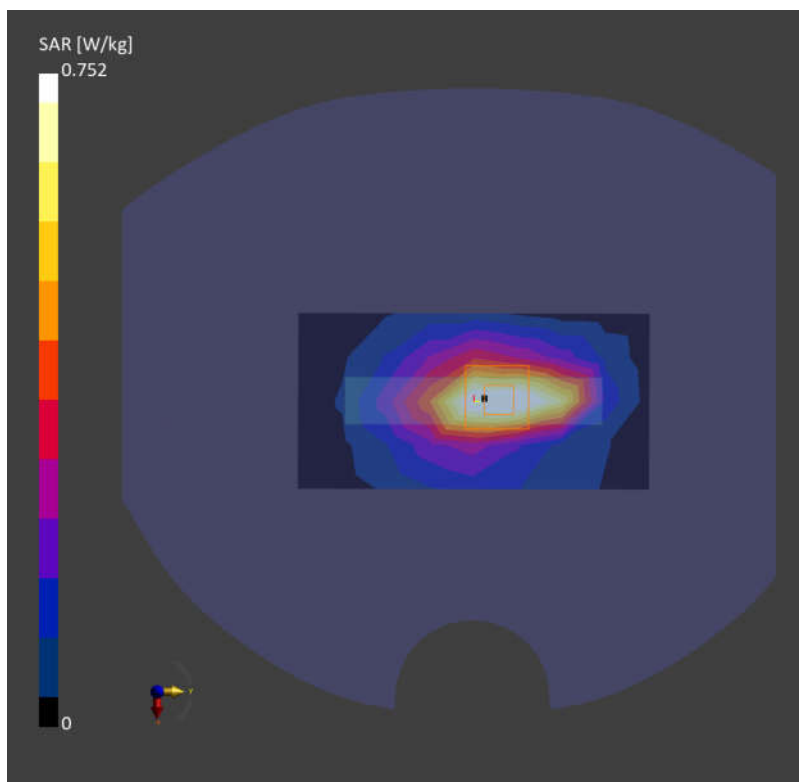

Date: 2024-12-18

65_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch132322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.999 W/kg; SAR (10g) = 0.484 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.535 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

