

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304
 Rev.: 01
 Page: 1 of 226

TEST REPORT

Application No.: SUCR2502000063WM
Applicant: Motorola Mobility LLC
Address of Applicant: 222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer: Motorola Mobility LLC
Address of Manufacturer: 222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
EUT Description: Mobile Cellular Phone
Model No.: XT2507-6(Retail), XT2507-3(Softbank) -----♣
 ♣ Please refer to section 2.4 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: Motorola
FCC ID: IHDT56AU4
Standards: FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C
Date of Receipt: February 24, 2025
Date of Test: February 24, 2025 to March 14, 2025
Date of Issue: March 14, 2025

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
 Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.



Report No.: SUCR250200006304

Rev.: 01

Page: 2 of 226

Version

<i>Revision Record</i>			
<i>Version</i>	<i>Description</i>	<i>Date</i>	<i>Remark</i>
01	Original	March 14, 2025	/

Authorized for issue by:			
Tested By			
		<hr/> Nature Shen / Project Manager	
Approved By			
		<hr/> Cloud Peng/Technical Manager	

Contents

Version	2
1 Test Summary	4
2 General Information	5
2.1 Details of Client	5
2.2 Test Location	5
2.3 Test Facility	5
2.4 General Description of EUT	6
2.5 Test Environment and Mode	8
2.6 Description of Support Units.....	8
2.7 Worst-case configuration and mode.....	8
3 Equipment List	9
4 Measurement Uncertainty (95% confidence levels, k=2)	11
5 Test results and Measurement Data	12
5.1 Antenna Requirement	12
5.2 AC Power Line Conducted Emissions.....	14
5.3 Duty Cycle	18
5.4 Conducted Output Power	19
5.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	20
5.6 Power Spectral Density	21
5.7 Band-edge for RF Conducted Emissions	22
5.8 RF Conducted Spurious Emissions.....	23
5.9 Radiated Spurious Emissions	24
5.10 Restricted bands around fundamental frequency.....	27
6 Photographs - Setup Photos	29
7 Appendix	30

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 4 of 226

1 Test Summary

Test Item	FCC Rule No.	Test Method	Test Result	Result
Antenna Requirement	15.203/15.247(b)	--	Clause 3.1	PASS
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013 Section 6.2	Clause 3.2	PASS
Duty Cycle	--	ANSI C63.10 2013 Section 11.6	Clause 3.3	For Report Purpose
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013 Section 11.9.1.3	Clause 3.4	PASS
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013 Section 11.8 Option 2 / 6.9.3	Clause 3.5	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013 Section 11.10.2	Clause 3.6	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013 Section 11.11	Clause 3.7	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013 Section 11.11	Clause 3.8	PASS
Radiated Spurious Emissions	15.247(d);15.205/15.209	ANSI C63.10 2013 Section 11.12	Clause 3.9	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d);15.205/15.209	ANSI C63.10 2013 Section 11.12	Clause 3.10	PASS



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304
Rev.: 01
Page: 5 of 226

2 General Information

2.1 Details of Client

Applicant:	Motorola Mobility LLC
Address of Applicant:	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer:	Motorola Mobility LLC
Address of Manufacturer:	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Tizzy Song, Ives Cheng

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

2.4 General Description of EUT

EUT Description:	Mobile Cellular Phone	
Model No.:	XT2507-6(Retail), XT2507-3(Softbank)	
Trade Mark:	Motorola	
Hardware Version:	DVT2	
Software Version:	V2VV35.69	
Power Supply:	3.88V from Battery	
IMEI:	RF Conducted	358482680006739/358482680006747
	RSE & AC power line	35179440007258/35179440007266
Operation Frequency:	802.11b/g/n(HT20)/ax(HE20):	2412MHz to 2462MHz
	802.11n(HT40)/ax(HE40):	2422MHz to 2452MHz
Modulation Type:	802.11b:	DSSS (DBPSK, DQPSK, CCK)
	802.11g/n:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11ax:	OFDM/OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Number of Channels:	802.11b/g/n(HT20)/ax(HE20): 11 802.11n(HT40)/ax(HE40): 7	
Channel Spacing:	5MHz	
Smart System:	<input type="checkbox"/> SISO	802.11b/g/n/ax
	<input checked="" type="checkbox"/> MIMO	802.11b/g/n/ax: 2Tx & 2Rx
	<input type="checkbox"/> Diversity	802.11b/g : Tx & Rx
Antenna Type:	PIFA Antenna	
Antenna Gain:	-6.8dBi(ANT 6); -5.9dBi(ANT 3)	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
RF Cable*:	1dB	

Note:

- 1.Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- 2.The two models named XT2507-6(Retail) and XT2507-3(Softbank) are the same product except that their model names are different for different market segments.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 7 of 226

Accessories Information				
AC Adapter 2	Brand Name	Motorola (AOHAI)	Model Name	MC-1251
	Power Rating	I/P: 100 - 240 Vac, 1700 mA, O/P: 5/9/15/20/5-20 Vdc, 3000/3000/3000/6250/6250 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
AC Adapter 1	Brand Name	Motorola (Chenyang)	Model Name	MC-1251
	Power Rating	I/P: 100 - 240 Vac, 1700 mA, O/P: 5/9/15/20/5-20 Vdc, 3000/3000/3000/6250/6250 mA		
	Power Cord	0 meter, non-shielded cable, with w/o ferrite core		
USB Cable 1	Brand Name	Saibao	Model Name	SC18D71644
	Signal Line	1 meter, shielded cable, w/o ferrite core		
USB Cable 2	Brand Name	Luxshare	Model Name	SC18E08104
	Signal Line	1 meter, shielded cable, w/o ferrite core		

Operation Frequency of each channel (802.11b/g/n HT20 /ax HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency of each channel (802.11n HT40 /ax HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				
Remark:							
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:							
Channel	Frequency for 802.11 b/g/n (HT20) /ax (HE20)			Frequency for 802.11n (HT40) /ax(HE40)			
The Lowest channel	2412MHz			2422MHz			
The Middle channel	2437MHz			2437MHz			
The Highest channel	2462MHz			2452MHz			
Remark:							
1. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power > partial RU, therefore the full RU perform full test to cover partial RU except for PSD/Duty cycle/BE.							

2.5 Test Environment and Mode

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44~46 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	3.88
Remark: NV: Normal Voltage NT: Normal Temperature		

2.6 Description of Support Units

The EUT has been tested as an independent unit.

2.7 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

Modulation Type	SISO - Data Rate	MIMO - Data Rate
802.11b	1 Mbps	2 Mbps
802.11g	6 Mbps	12 Mbps
802.11n (HT 20)	MCS0 (6.5 Mbps)	MCS0 (13 Mbps)
802.11n (HT 40)	MCS0 (13.5 Mbps)	MCS0 (27 Mbps)
802.11ax (HE 20)	MCS0 (8 Mbps)	MCS0 (16 Mbps)
802.11ax (HE 40)	MCS0 (16 Mbps)	MCS0 (32 Mbps)

The output power and PSD for the 802.11 ax mode were investigated between all different tones, and we found that SU mode had the highest output power and the lowest tone had the highest PSD readings. And after investigation, conducted tests were performed on both SU and lowest tones.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 9 of 226

3 Equipment List

RF Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	Brilliant-emc	N/A	SUWI-04-08-01	11/9/2022	11/8/2025
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
Measurement Software	Tonscend	TST272 V2.0	SUWI-03-55-03	NCR	NCR
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	5/8/2024	5/7/2025
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-02	5/9/2024	5/8/2025
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	1/21/2025	1/20/2026
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/19/2024	11/18/2025
Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/19/2024	11/18/2025
MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/15/2025	1/14/2026
Router	ASUS	GT-AXE11000(FCC ID MSQ-RTAXJF00)	SUWI-03-14-02	NCR	NCR
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/19/2024	11/18/2025



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 10 of 226

CE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2/13/2025	2/12/2026
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	5/6/2024	5/5/2025
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	5/6/2024	5/5/2025
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR

RSE Test Equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	5/8/2024	5/7/2025
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2024	11/20/2025
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	5/13/2023	5/12/2025
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/13/2023	5/12/2025
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/12/2023	5/11/2025
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/13/2023	5/12/2025
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	11/19/2024	11/24/2025
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	11/19/2024	11/24/2025
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	11/19/2024	11/24/2025
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

Remark: NCR=No Calibration Requirement.

4 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	1%
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	1%
7	Conduction Emission	± 2.90dB (150kHz to 30MHz)
8	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.88dB (30M -1GHz)
		± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results
 – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(b)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<p>The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is -6.8dBi(ANT 6); -5.9dBi(ANT 3).</p> <p><i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i></p> <p><i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i></p>	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 13 of 226

Cyclic Delay Diversity (CDD) System:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 $Array\ Gain = 10 \log(N_{ANT}/N_{SS}=1) \text{ dB}$.
- For power measurements on IEEE 802.11 devices:
 $Array\ Gain = 0 \text{ dB}$ (i.e., no array gain) for $N_{ANT} \leq 4$;

For power, the directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

For PSD, the directional gain calculation is following F2)f)ii) of KDB 662911 D01 v02r01.

The Power and PSD limit should be modified if the directional gain of eut is over 6dbi.

The EUT supports CDD System.


ANT Gain0 (dBi)	ANT Gain1 (dBi)	Power DG (dBi)	PSD DG (dBi)	Power Limit Reduction(dB)	PSD Limit Reduction(dB)
-6.8	-5.9	-5.9	-3.33	0	0

Power Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0

PSD Limit Reduction = Directional gain – 6dBi, (Directional gain < 6dBi) =0


5.2 AC Power Line Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	<p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p>		
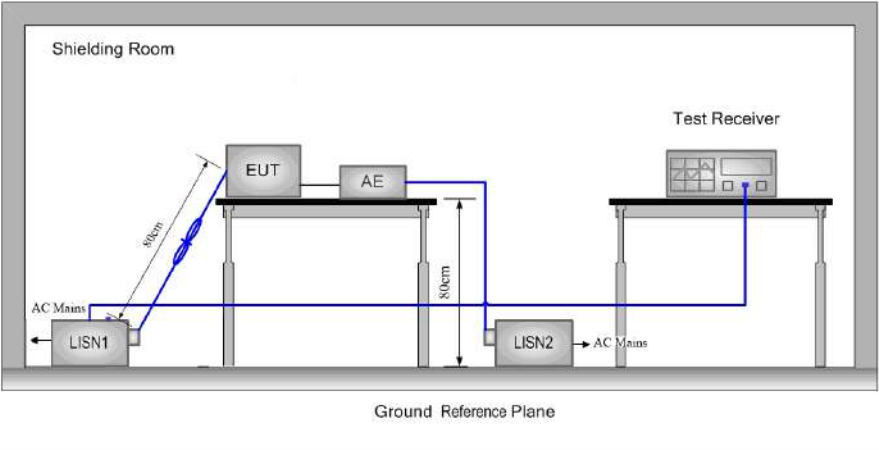
<p>Test Setup:</p>	 <p>The diagram illustrates the test setup within a shielding room. An Equipment Under Test (EUT) and an Adapter (AE) are placed on a table that is 80cm high above a Ground Reference Plane. A Test Receiver is positioned on a separate table to the right. Two Line Impedance Stabilization Networks (LISN1 and LISN2) are used to interface with the AC Mains. LISN1 is connected to the AC Mains and the EUT, while LISN2 is connected to the EUT and the AC Mains. A distance of 80cm is indicated between the table surface and the ground reference plane.</p>
<p>Exploratory Test Mode:</p>	<p>Transmitting with all kind of modulations, data rates at lowest, middle and highest channel. Adapter + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Refer to section 3.7 for details. Only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 6 for details.</p>
<p>Test Results:</p>	<p>Pass</p>


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

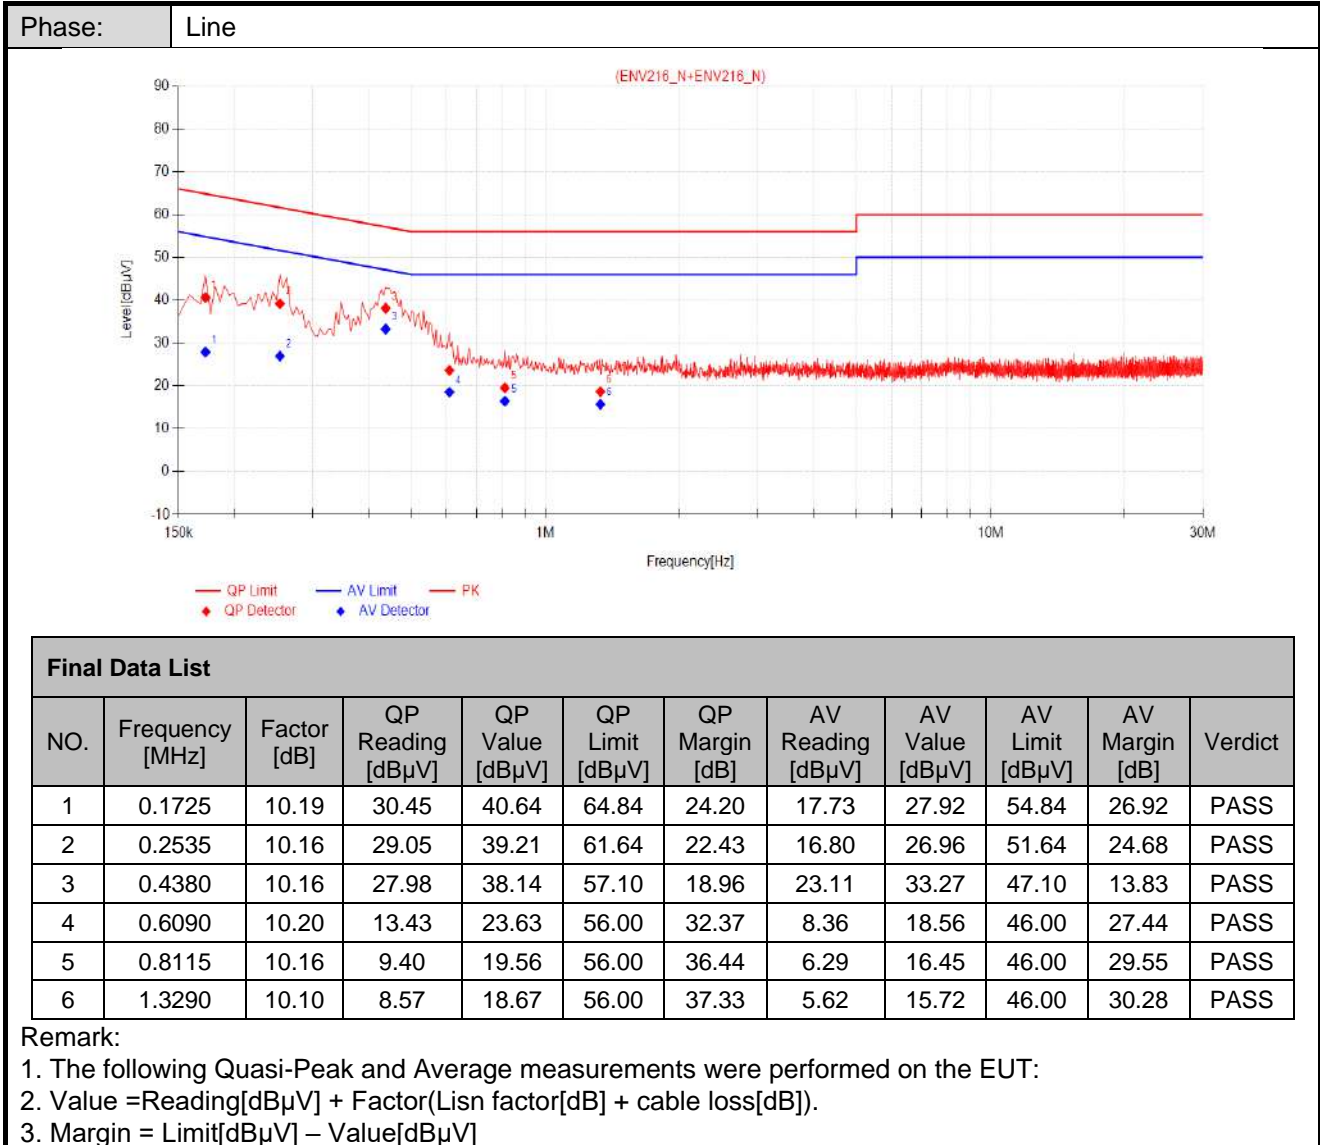


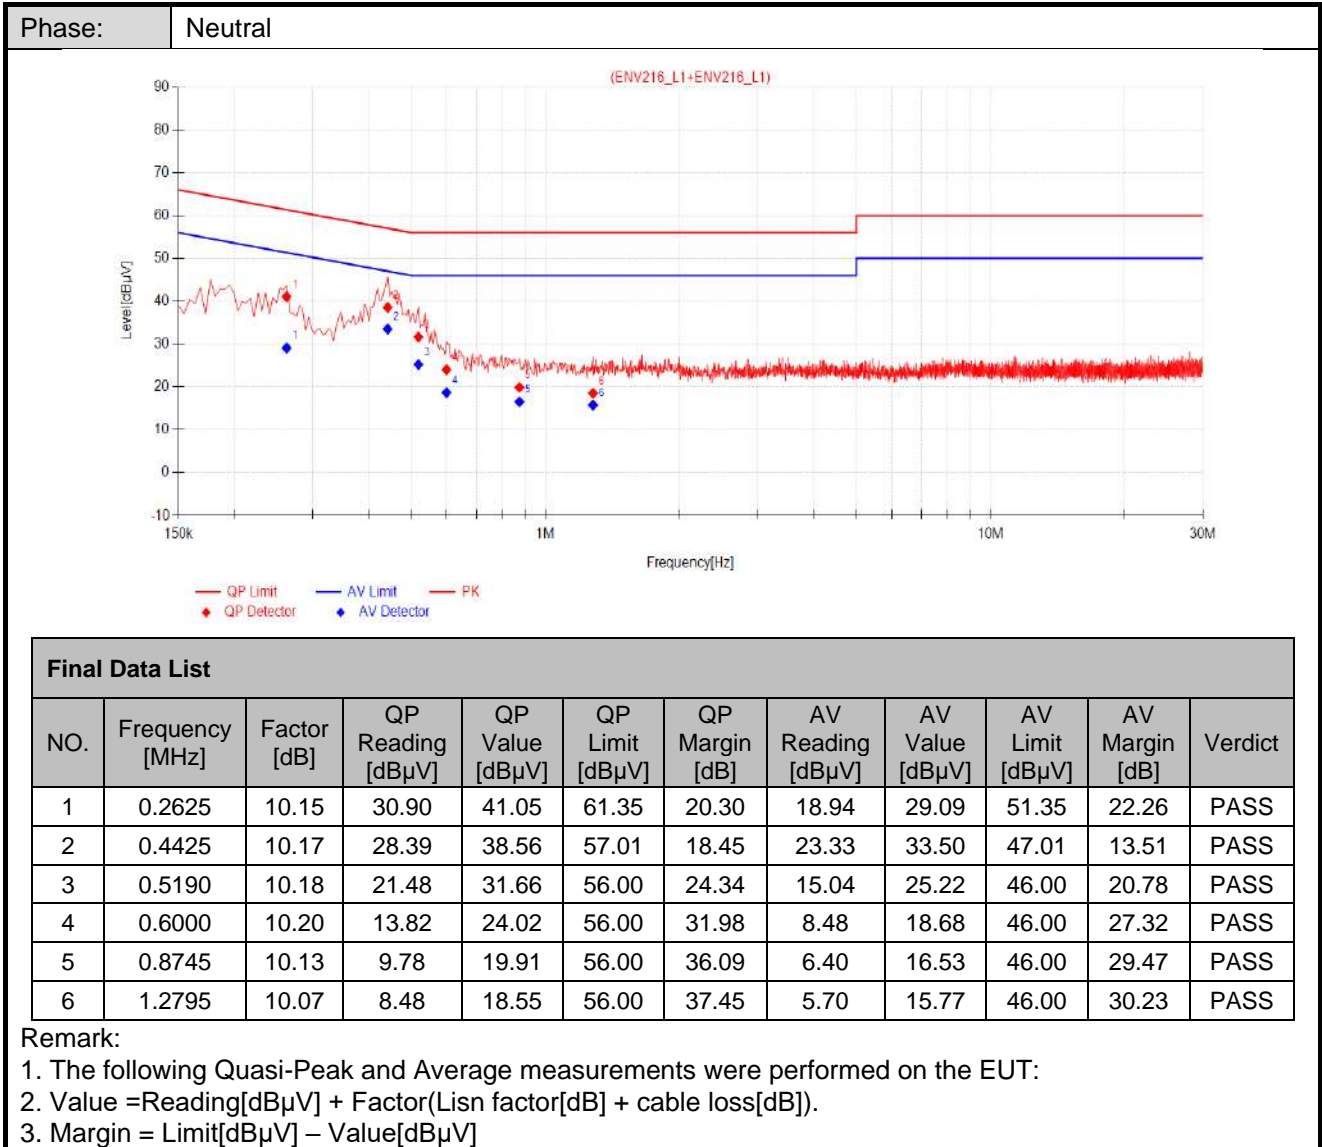


5.3 Duty Cycle

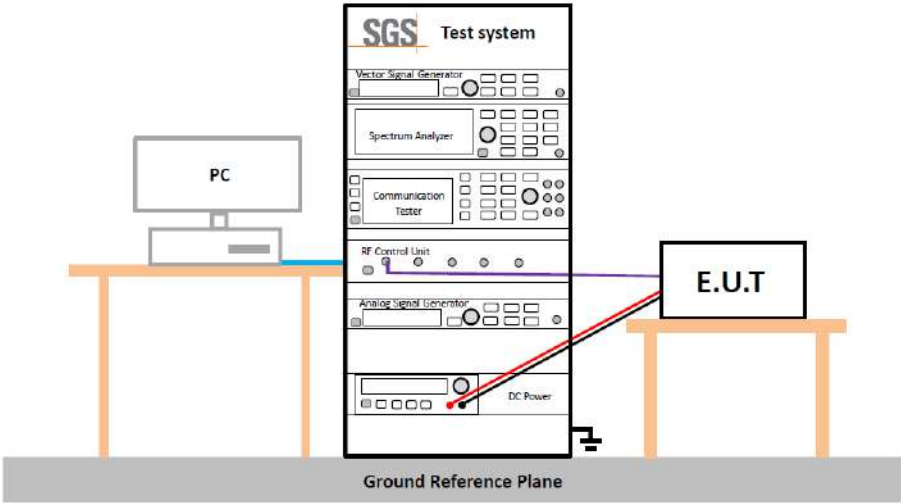Test Requirement:	ANSI C63.10 :2013 Section 11.6
Test Method:	ANSI C63.10 :2013 Section 11.6
Test Setup:	
Instruments Used:	Refer to section 6 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	No restriction limits
Test Results:	For Report Purpose
The detailed test data see: Appendix	


5.4 Conducted Output Power

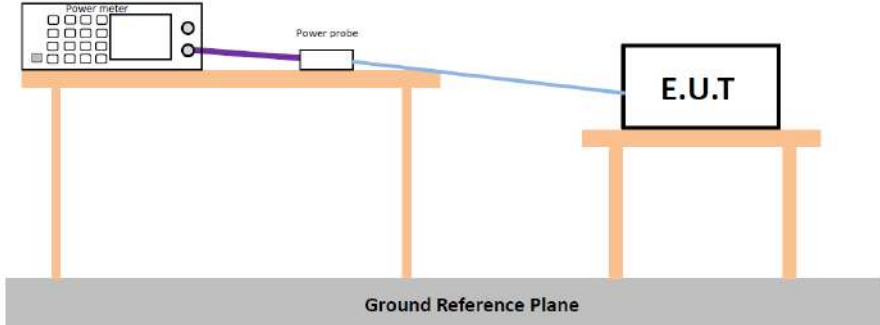Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section 11.9.1.3
Test Setup:	 <p>* Test with power meter (Detector function: Peak)</p>
Test Instruments:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	30dBm
Test Results:	Pass
The detailed test data see: Appendix	


5.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

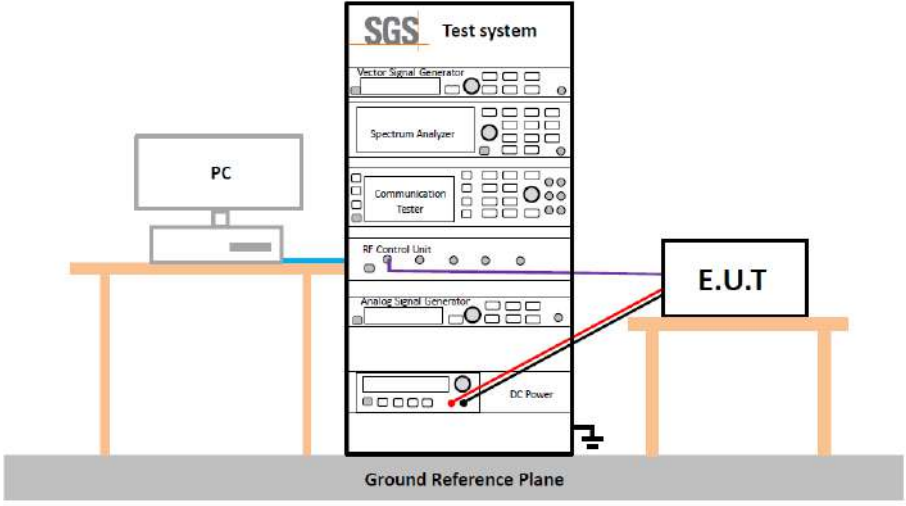Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8 Option 2 / 6.9.3
Test Setup:	
Instruments Used:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	≥ 500 kHz for DTS Bandwidth
Test Results:	Pass
The detailed test data see: Appendix	


5.6 Power Spectral Density

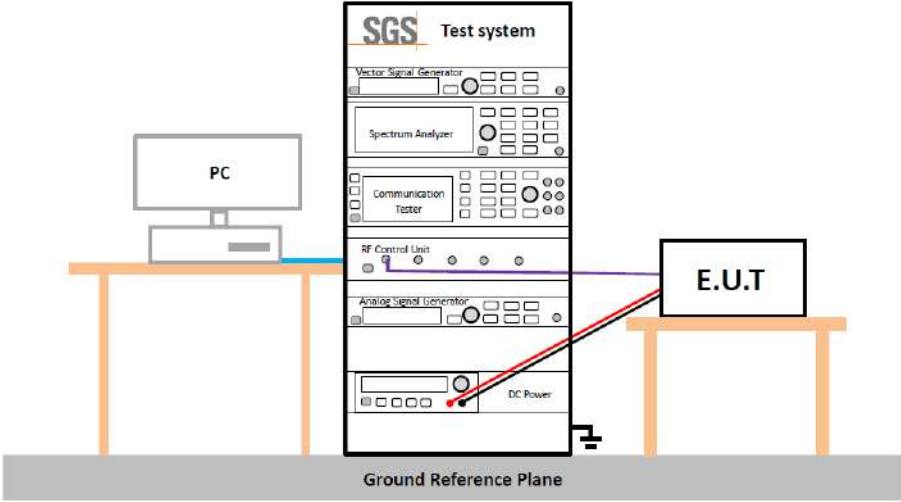Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	
Test Instruments:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass
The detailed test data see: Appendix	

5.7 Band-edge for RF Conducted Emissions

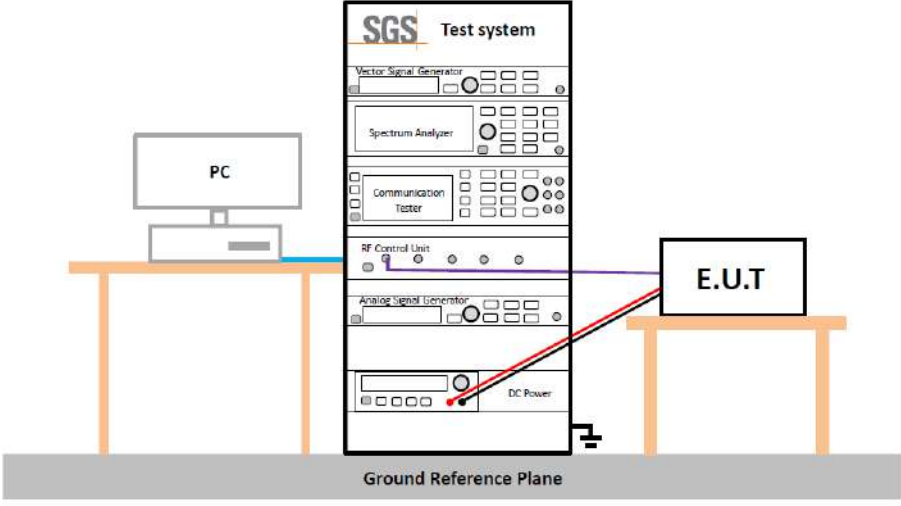Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	
Instruments Used:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass
The detailed test data see: Appendix	

5.8 RF Conducted Spurious Emissions

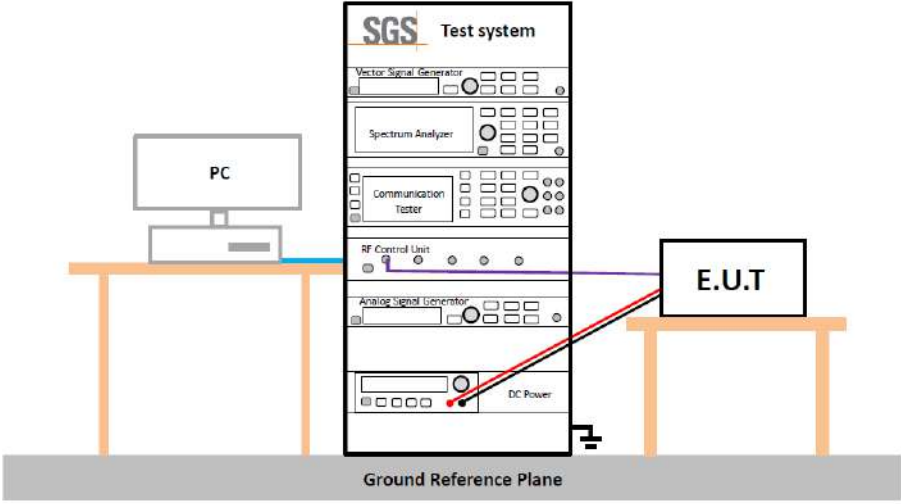Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	
Instruments Used:	Refer to section 6 for details.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass
The detailed test data see: Appendix	

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Test Frequency:	9kHz ~ 25GHz				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak	
	Peak	1MHz	3MHz	Peak	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

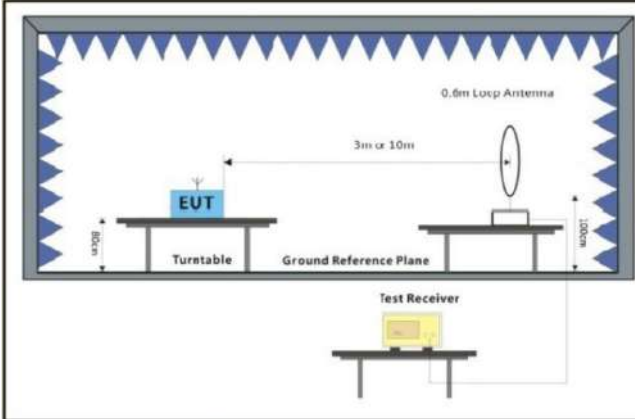


Figure 1. Below 30MHz

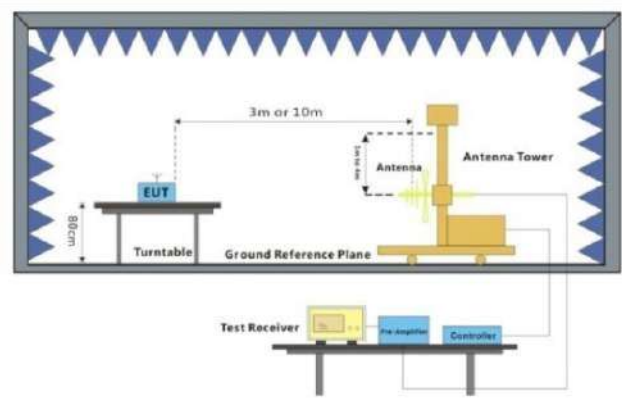


Figure 2. 30MHz to 1GHz

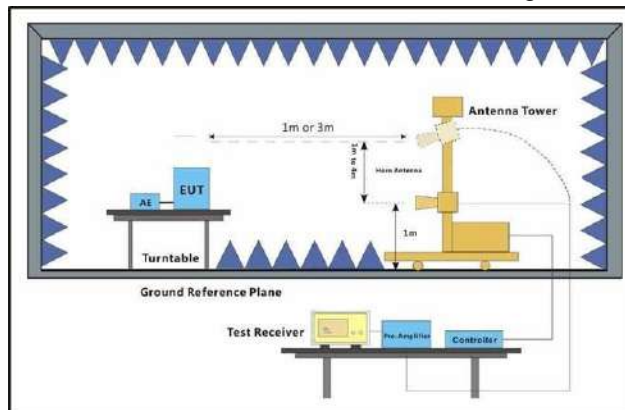


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Test the EUT in the lowest channel, the middle channel, the Highest

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 26 of 226

	<p>channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported</p> <p>k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed.</p> <p>l. At a measurement distance of 1 meter the limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54 \text{ dB}$.</p>
<p>Test Configuration:</p>	<p>Measurements below 30MHz</p> <ul style="list-style-type: none"> • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold <p>Measurements Below 1000MHz</p> <ul style="list-style-type: none"> • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"> • RBW = 1 MHz • VBW \geq 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"> • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
<p>Exploratory Test Mode:</p>	<p>Transmitting with all kind of modulations, data rates. Adapter + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Refer to section 3.7 for details. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.</p>
<p>Instruments Used:</p>	<p>Refer to section 6 for details.</p>
<p>Test Results:</p>	<p>Pass</p>
<p>The detailed test data see: Appendix</p>	

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
Above 1GHz		54.0	Average Value
		74.0	Peak Value

Test Setup:

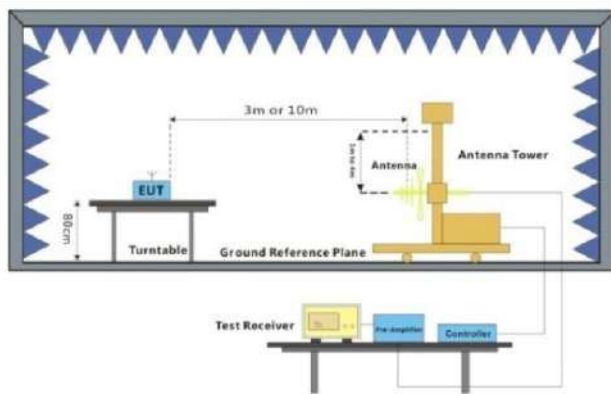


Figure 1. 30MHz to 1GHz

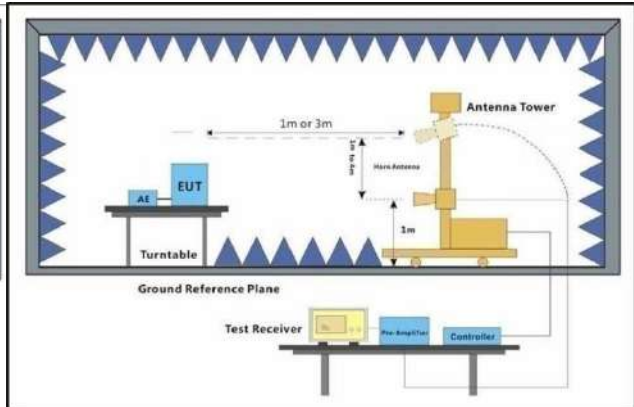


Figure 2. Above 1 GHz

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 28 of 226

<p>Test Procedure:</p>	<ol style="list-style-type: none"> a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
<p>Test Configuration:</p>	<p>Measurements Below 1000MHz</p> <ul style="list-style-type: none"> • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"> • RBW = 1 MHz • VBW ≥ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"> • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
<p>Exploratory Test Mode:</p>	<p>Transmitting with all kind of modulations, data rates. Adapter + Transmitting mode.</p>
<p>Final Test Mode:</p>	<p>Refer to section 3.7 for details.</p>
<p>Instruments Used:</p>	<p>Refer to section 6 for details.</p>
<p>Test Results:</p>	<p>Pass</p>
<p>The detailed test data see: Appendix</p>	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 29 of 226

6 Photographs - Setup Photos

Refer to Appendix A.2 BT&WLAN&NFC Setup Photos.

7 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant6

Mode	TX Type	Frequency (MHz)	RU	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	MIMO	2412	/	100.000	100.000	100.00	0.00	0.00
802.11g	MIMO	2412	/	100.000	100.000	100.00	0.00	0.00
802.11n (HT20)	MIMO	2412	/	100.000	100.000	100.00	0.00	0.00
802.11n (HT40)	MIMO	2422	/	100.000	100.000	100.00	0.00	0.00
802.11ax (HEW20)	MIMO	2412	SU	100.000	100.000	100.00	0.00	0.00
802.11ax (HEW40)	MIMO	2422	SU	100.000	100.000	100.00	0.00	0.00

1.1.2 Ant3

Mode	TX Type	Frequency (MHz)	RU	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	MIMO	2412	/	100.000	100.000	100.00	0.00	0.00
802.11g	MIMO	2412	/	100.000	100.000	100.00	0.00	0.00
802.11n (HT20)	MIMO	2412	/	100.000	100.000	100.00	0.00	0.00
802.11n (HT40)	MIMO	2422	/	100.000	100.000	100.00	0.00	0.00
802.11ax (HEW20)	MIMO	2412	SU	100.000	100.000	100.00	0.00	0.00
802.11ax (HEW40)	MIMO	2422	SU	100.000	100.000	100.00	0.00	0.00

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 31 of 226

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	RU	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
802.11b	MIMO	2412	/	6	12.352	/	Pass
		2437	/	6	12.850	/	Pass
		2462	/	6	12.690	/	Pass
802.11g	MIMO	2412	/	6	18.288	/	Pass
		2437	/	6	18.396	/	Pass
		2462	/	6	19.081	/	Pass
802.11ax (HEW20)	MIMO	2412	SU	6	19.076	/	Pass
		2437	SU	6	19.984	/	Pass
		2462	SU	6	19.696	/	Pass
802.11ax (HEW40)	MIMO	2422	SU	6	38.062	/	Pass
		2437	SU	6	38.267	/	Pass
		2452	SU	6	38.138	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	RU	ANT	6dB Bandwidth (MHz)		Verdict
					Result	Limit	
802.11b	MIMO	2412	/	6	8.222	≥ 0.5	Pass
		2437	/	6	8.238	≥ 0.5	Pass
		2462	/	6	8.220	≥ 0.5	Pass
802.11g	MIMO	2412	/	6	16.468	≥ 0.5	Pass
		2437	/	6	16.735	≥ 0.5	Pass
		2462	/	6	16.639	≥ 0.5	Pass
802.11ax (HEW20)	MIMO	2412	SU	6	18.860	≥ 0.5	Pass
		2437	SU	6	19.287	≥ 0.5	Pass
		2462	SU	6	19.168	≥ 0.5	Pass
802.11ax (HEW40)	MIMO	2422	SU	6	37.533	≥ 0.5	Pass
		2437	SU	6	37.659	≥ 0.5	Pass
		2452	SU	6	37.596	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

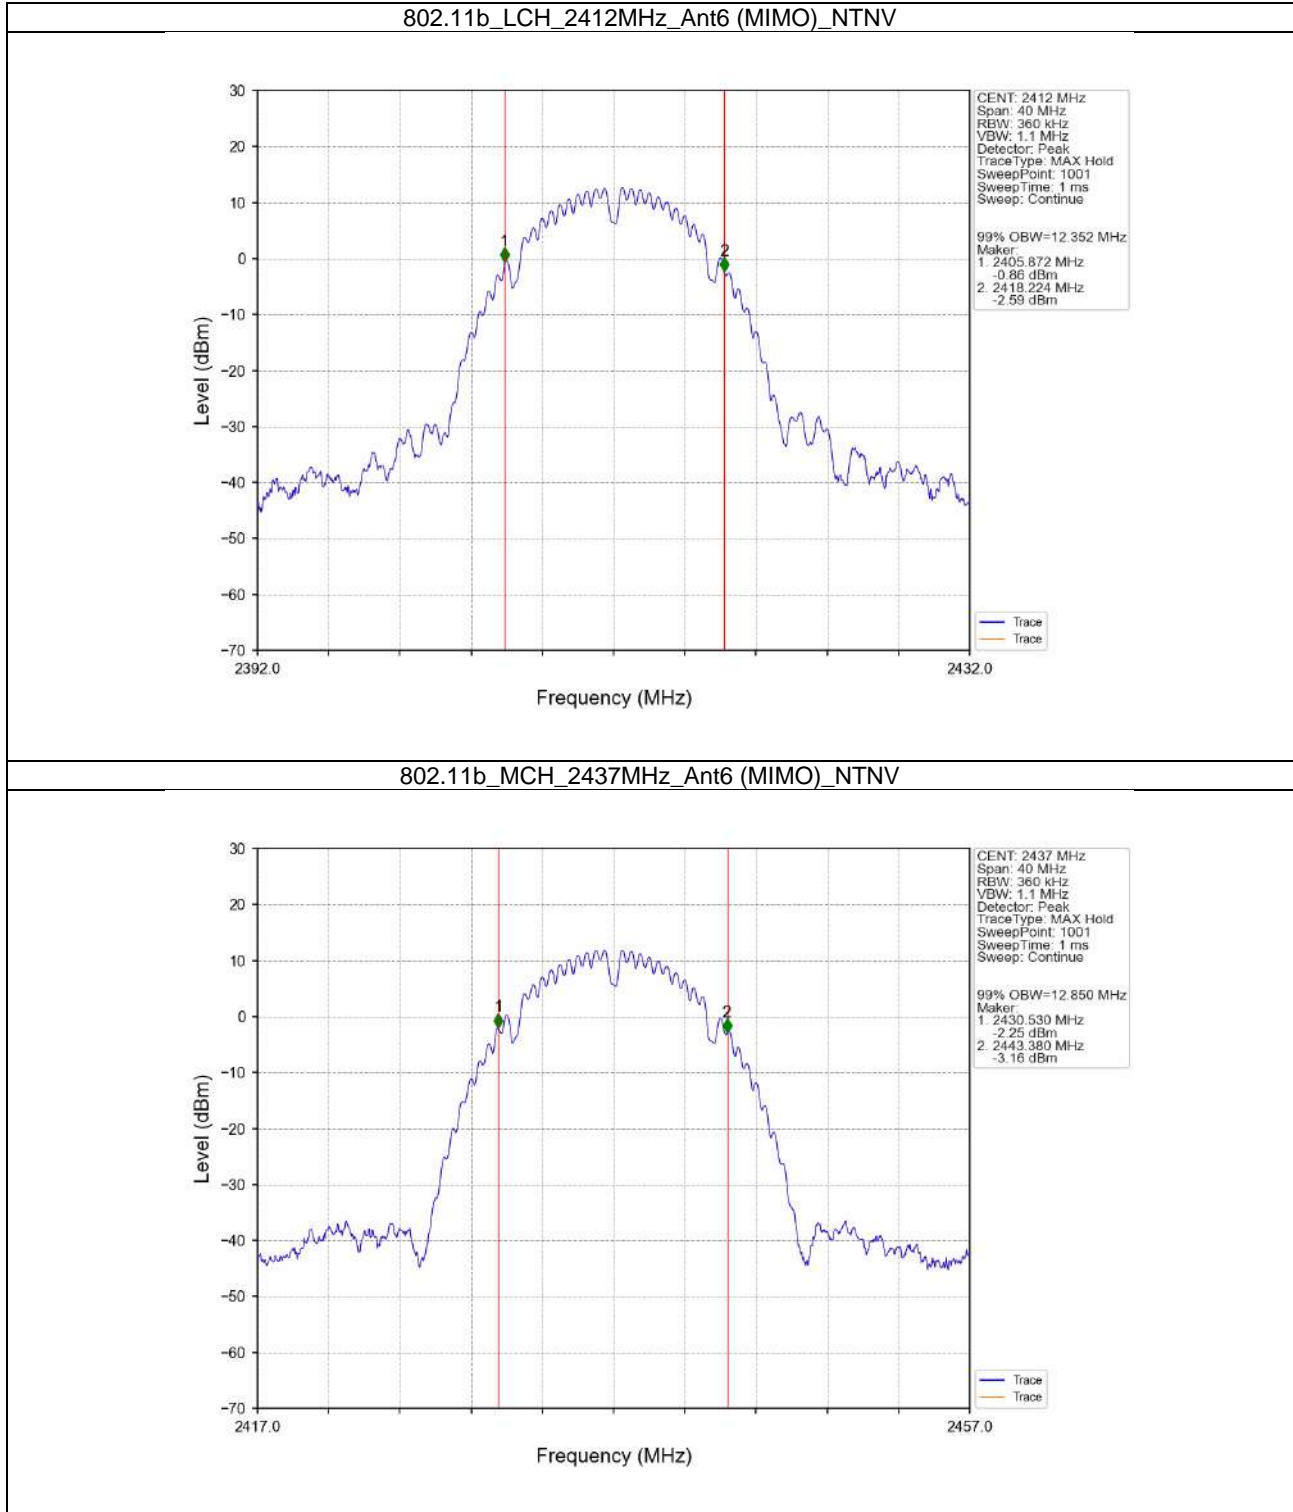


802.11b_HCH_2462MHz_Ant6 (MIMO)_NTNV

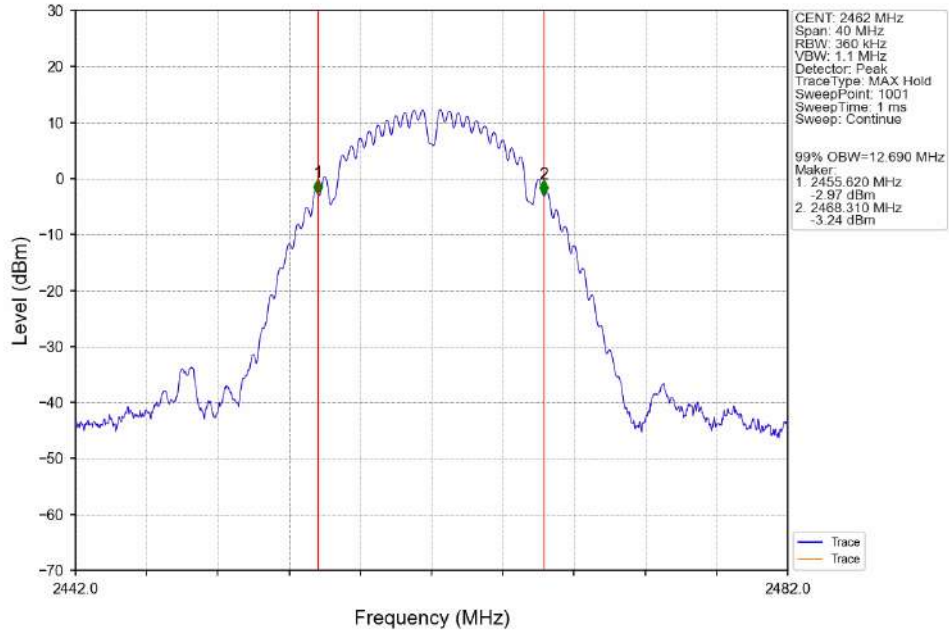


802.11g_LCH_2412MHz_Ant6 (MIMO)_NTNV

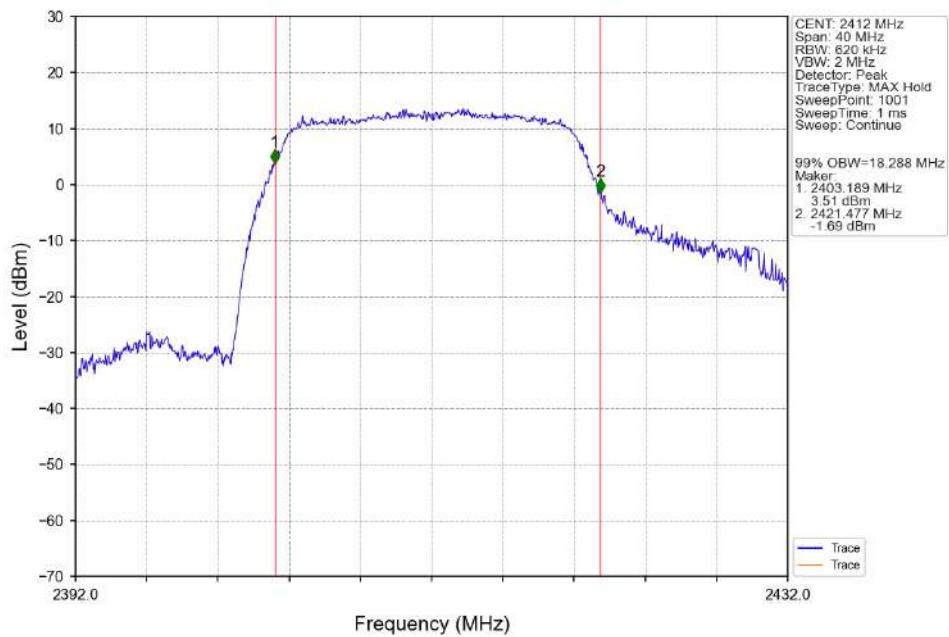


802.11g_MCH_2437MHz_Ant6 (MIMO)_NTNV

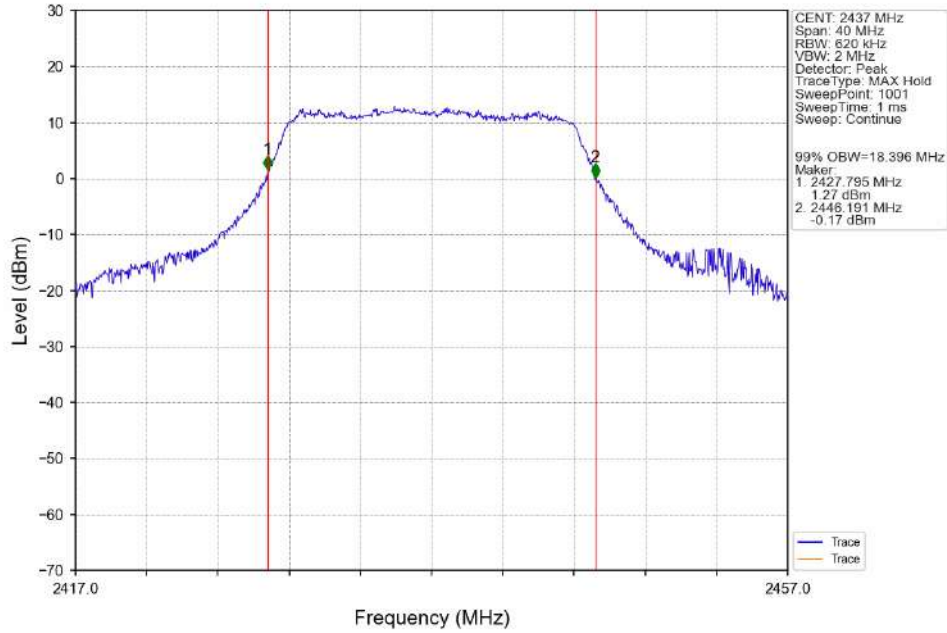


802.11g_HCH_2462MHz_Ant6 (MIMO)_NTNV

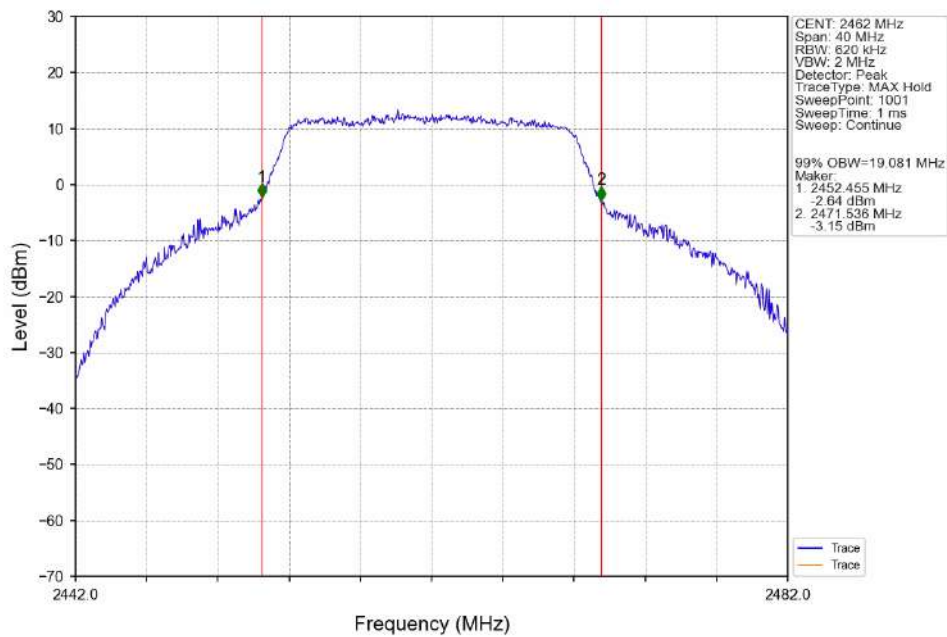


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant6 (MIMO)_NTNV

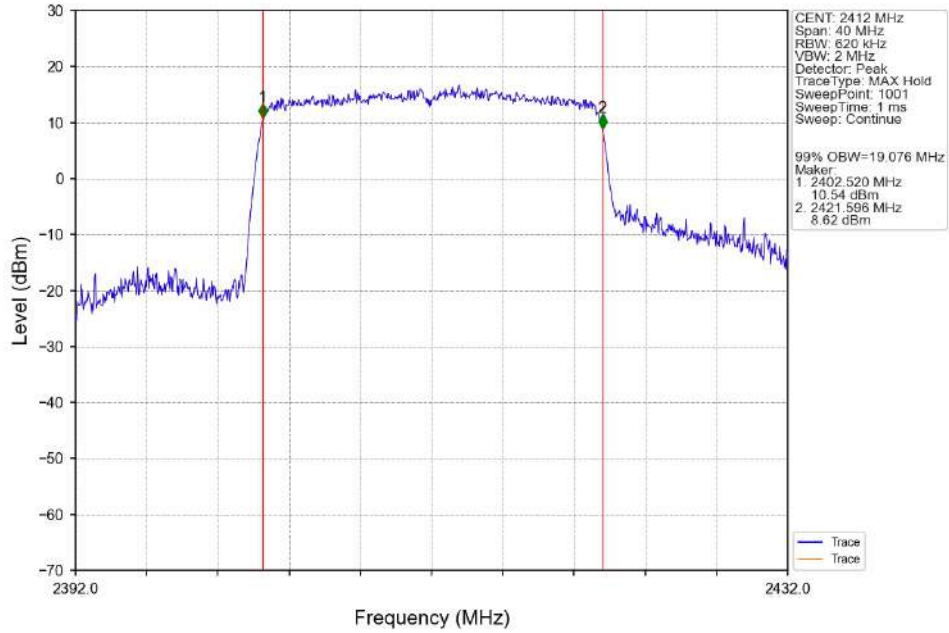


802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

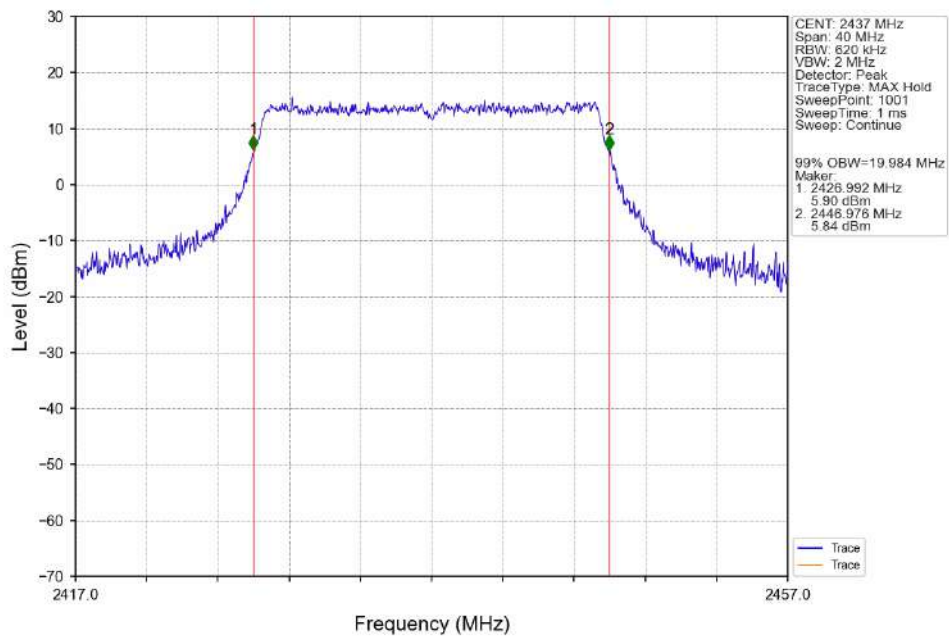


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant6 (MIMO)_NTNV

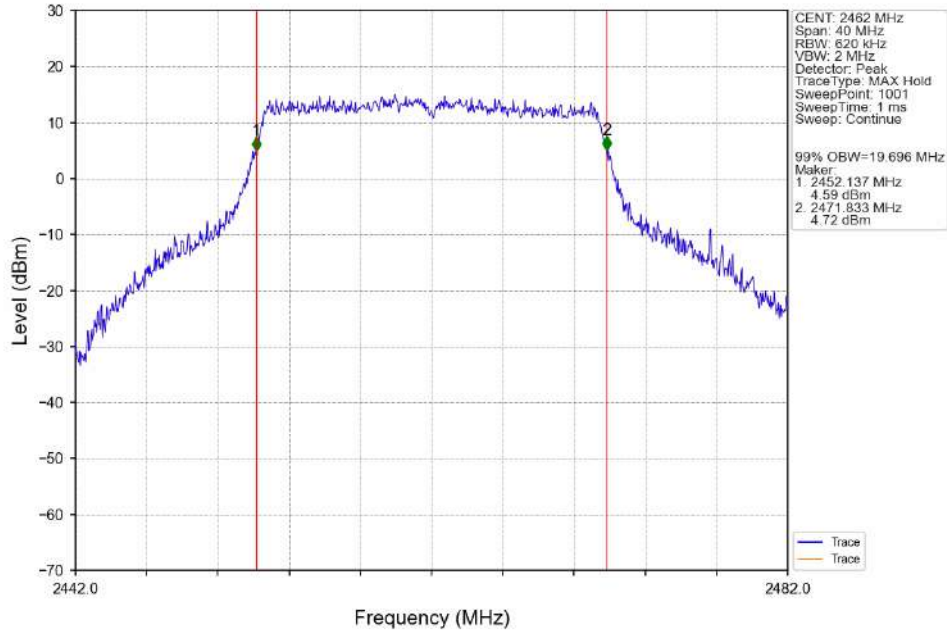


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant6 (MIMO)_NTNV

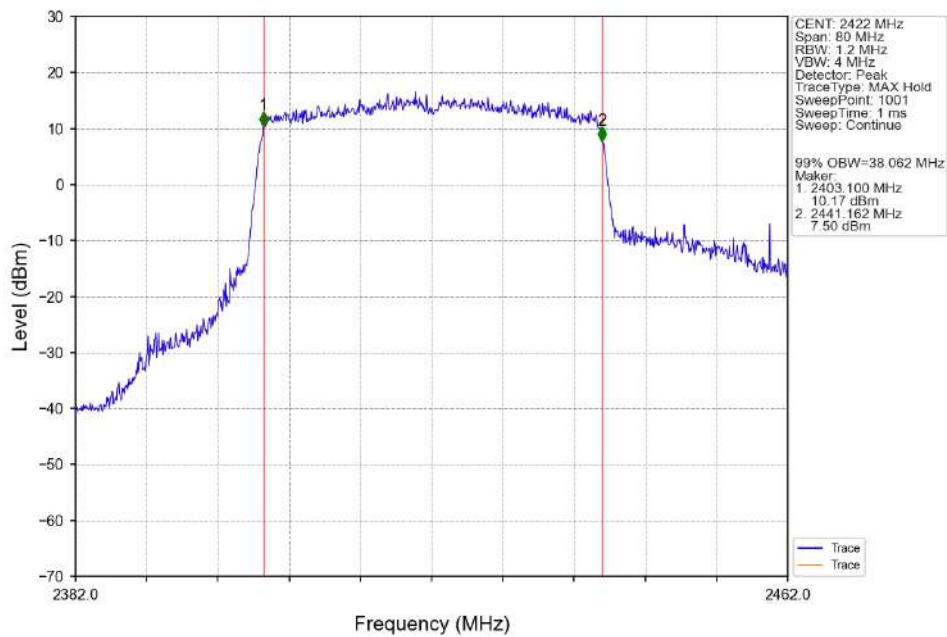


802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

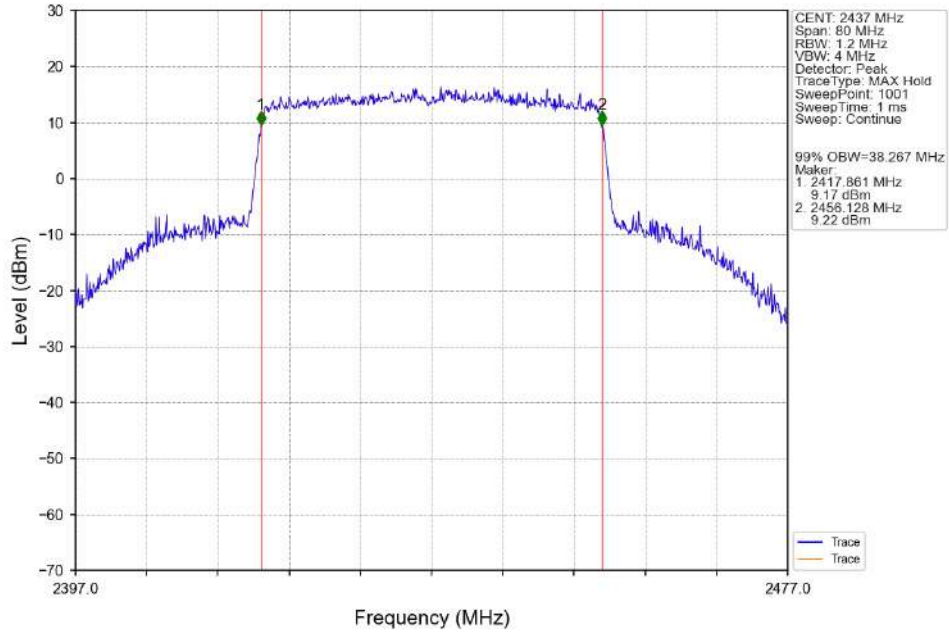


802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant6 (MIMO)_NTNV

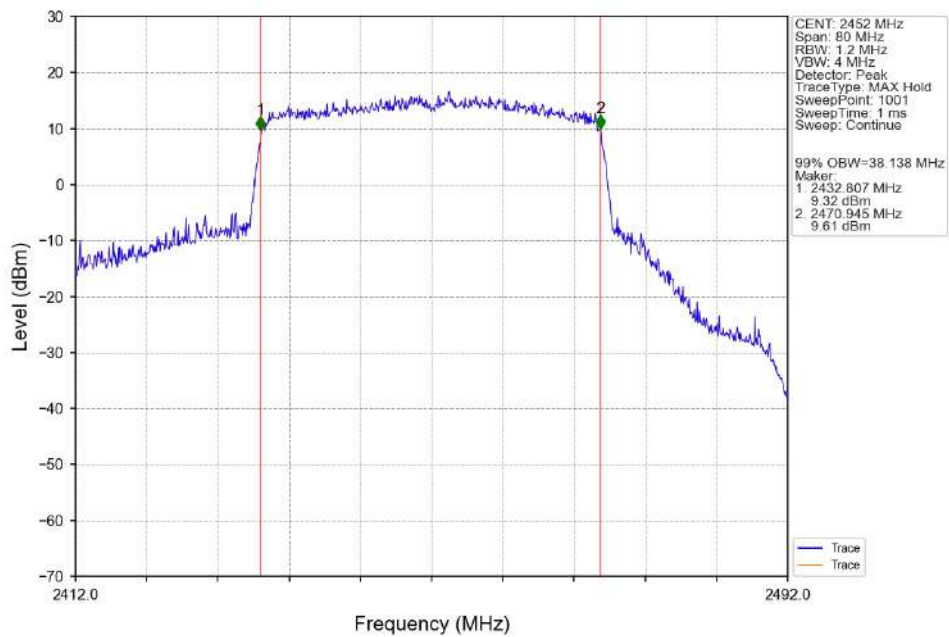


2.2.2 6dB BW

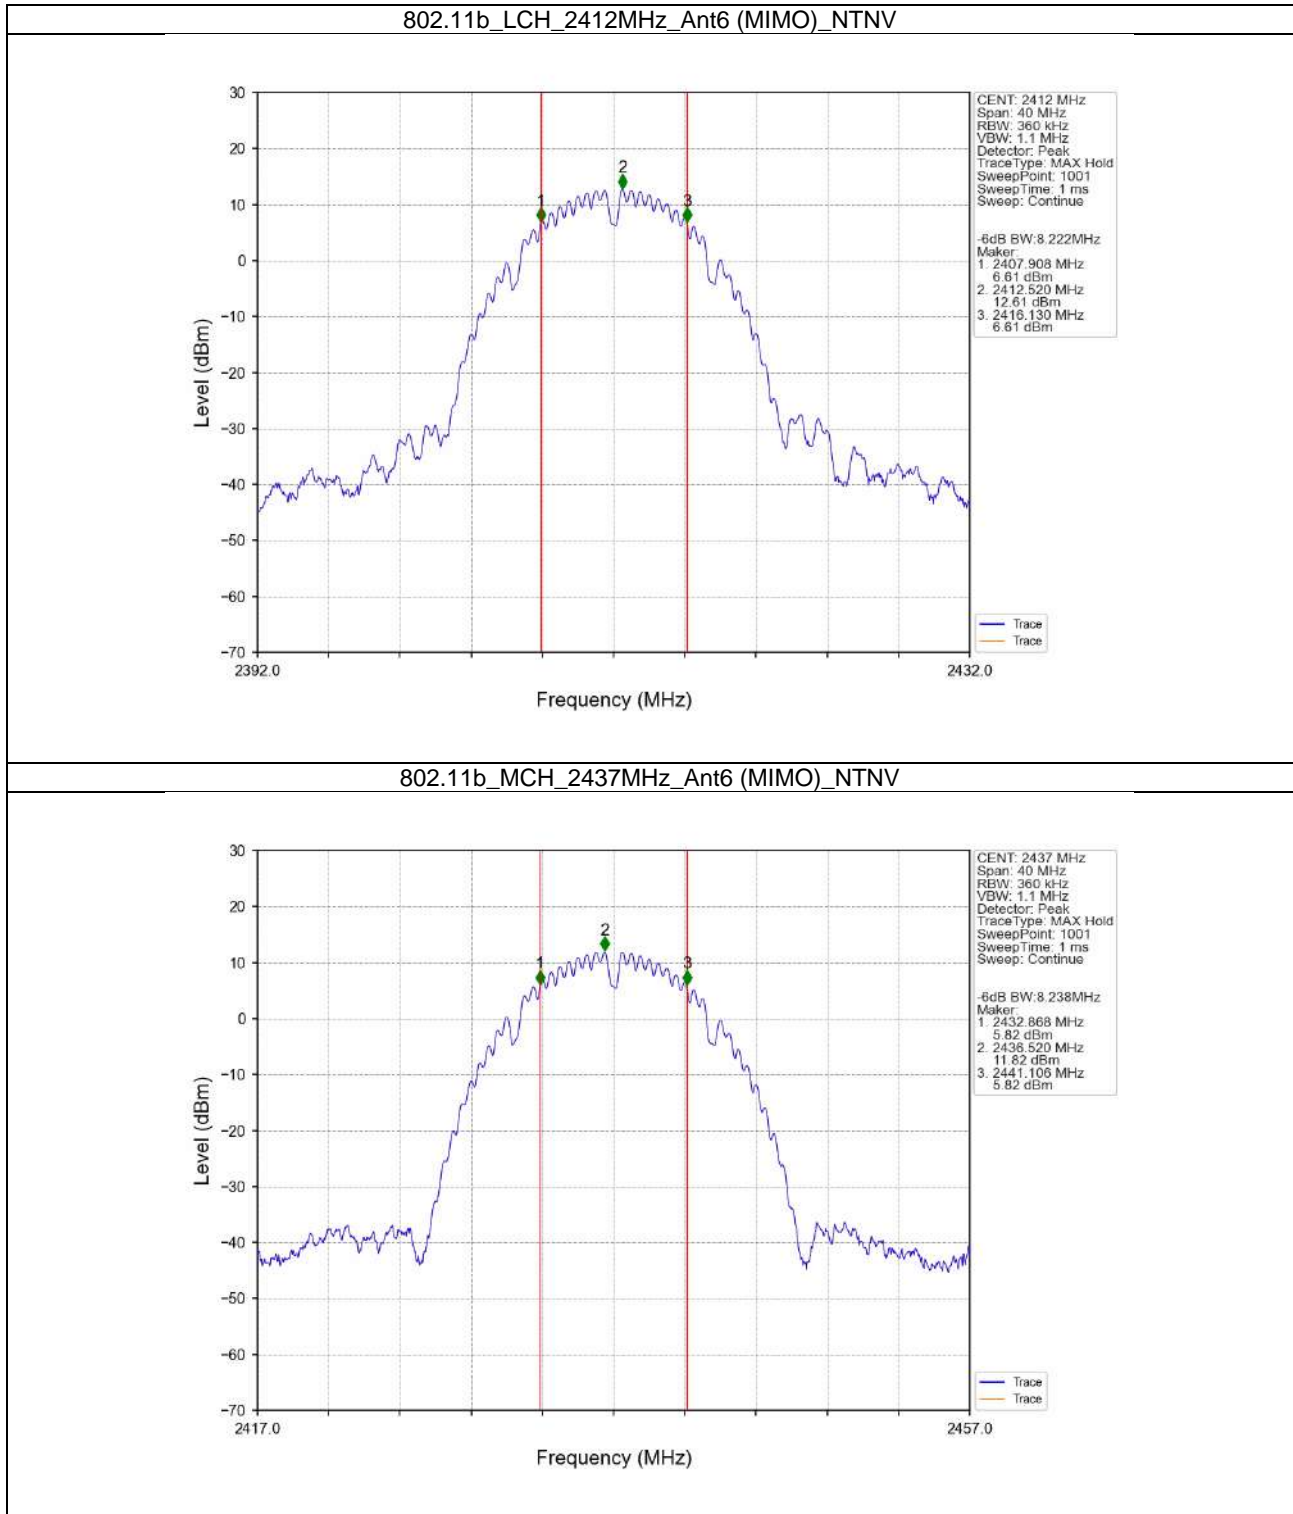


802.11b_HCH_2462MHz_Ant6 (MIMO)_NTNV

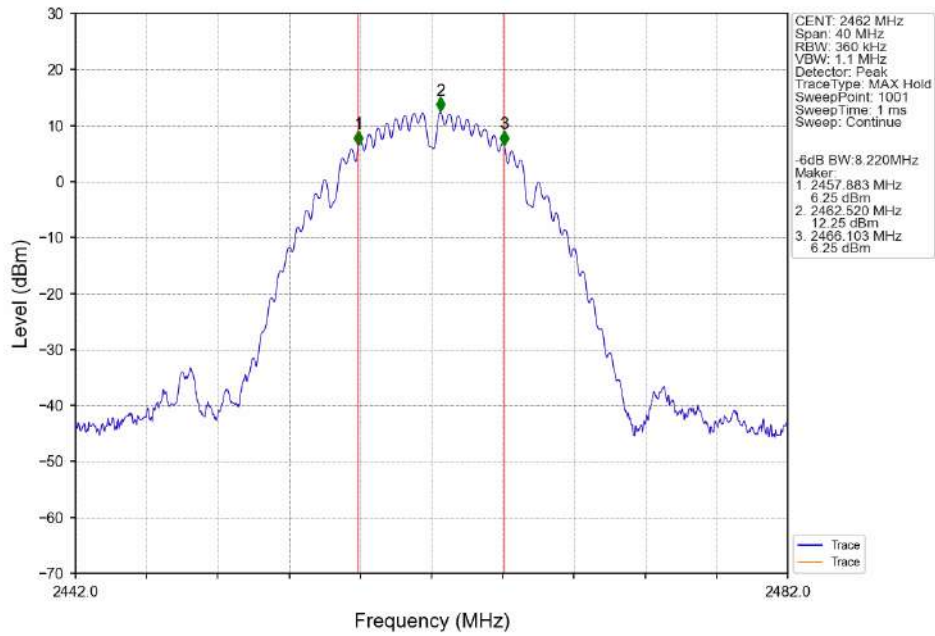


802.11g_LCH_2412MHz_Ant6 (MIMO)_NTNV

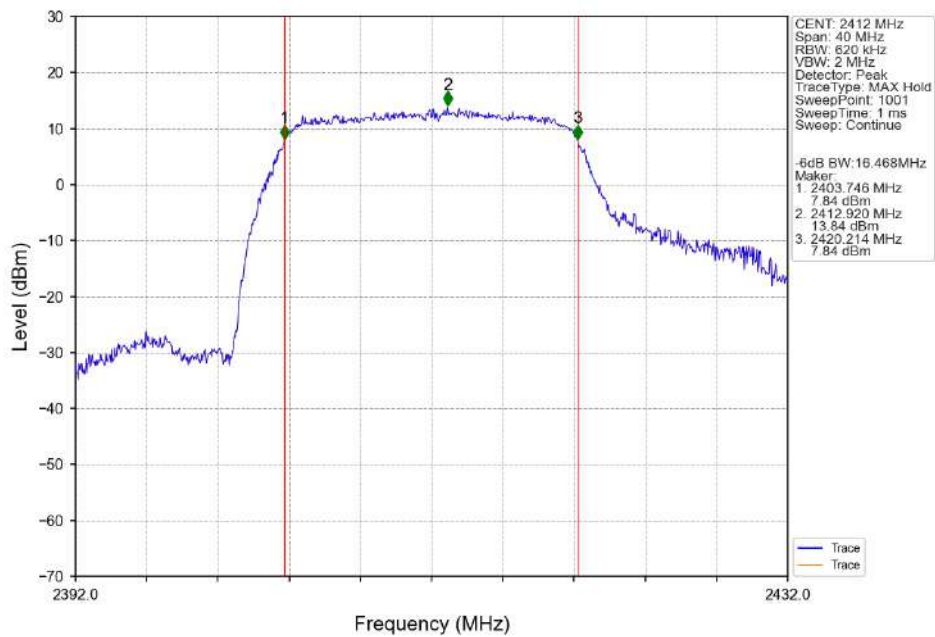


802.11g_MCH_2437MHz_Ant6 (MIMO)_NTNV

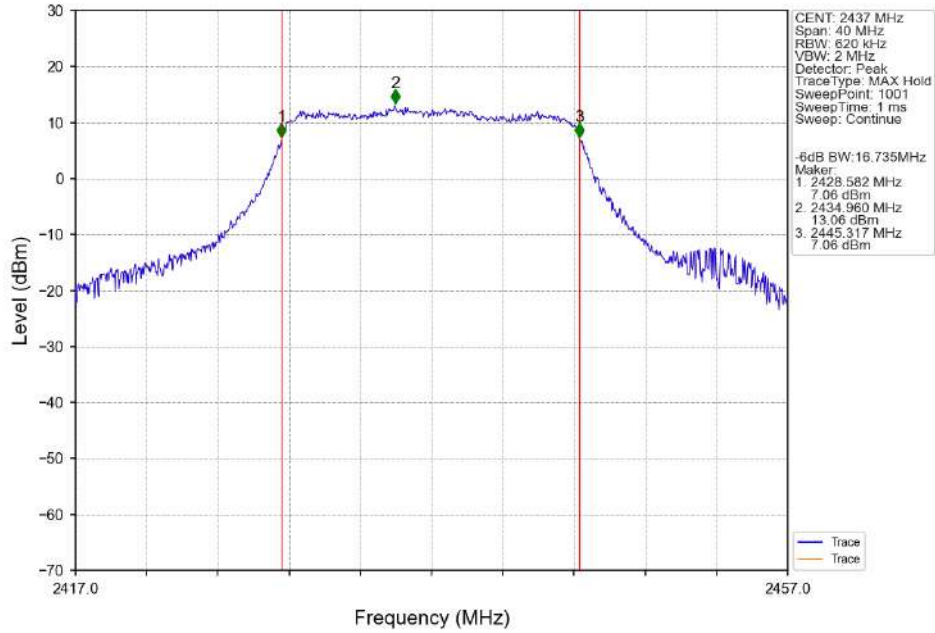


802.11g_HCH_2462MHz_Ant6 (MIMO)_NTNV

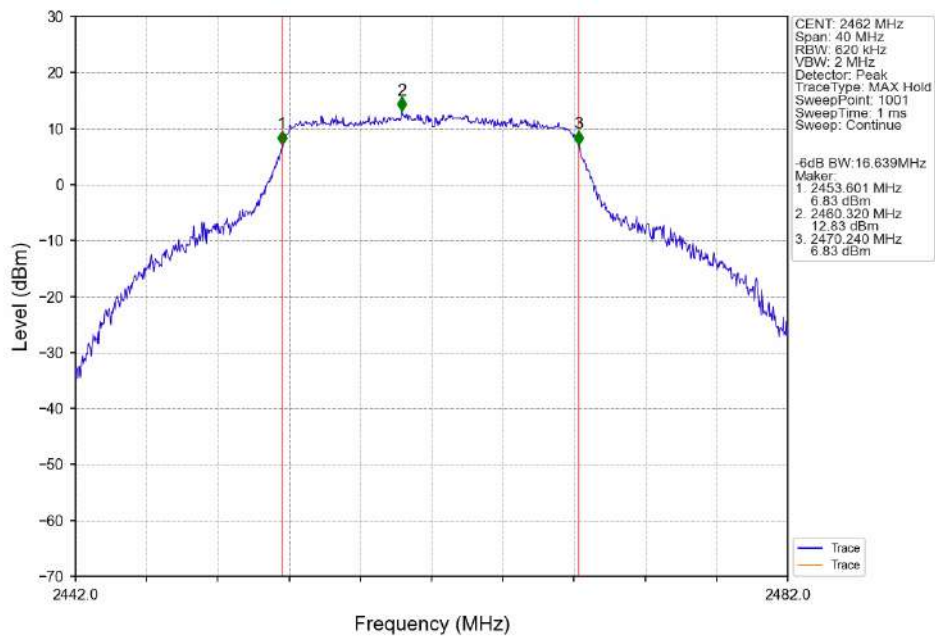


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant6 (MIMO)_NTNV

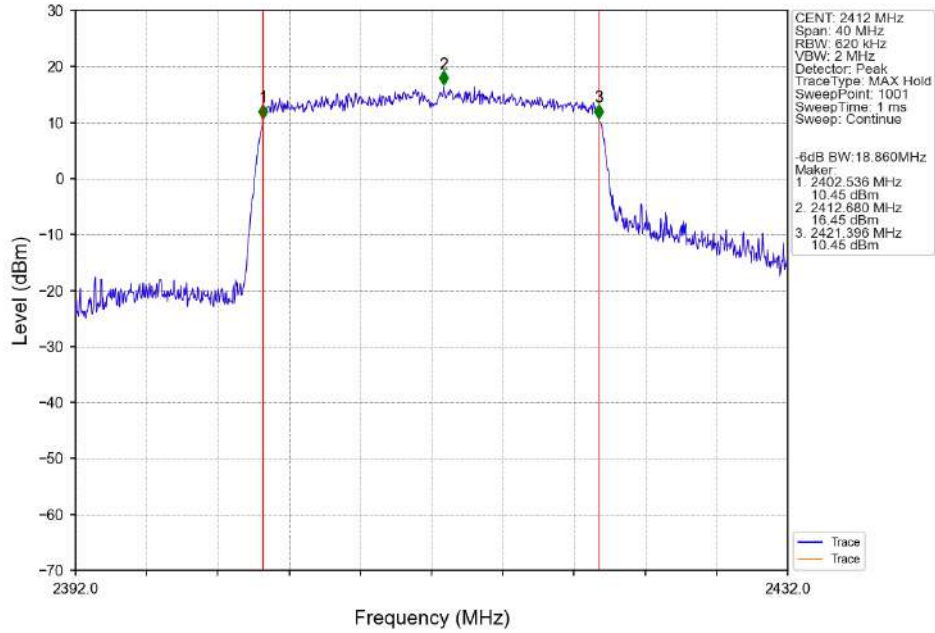


802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

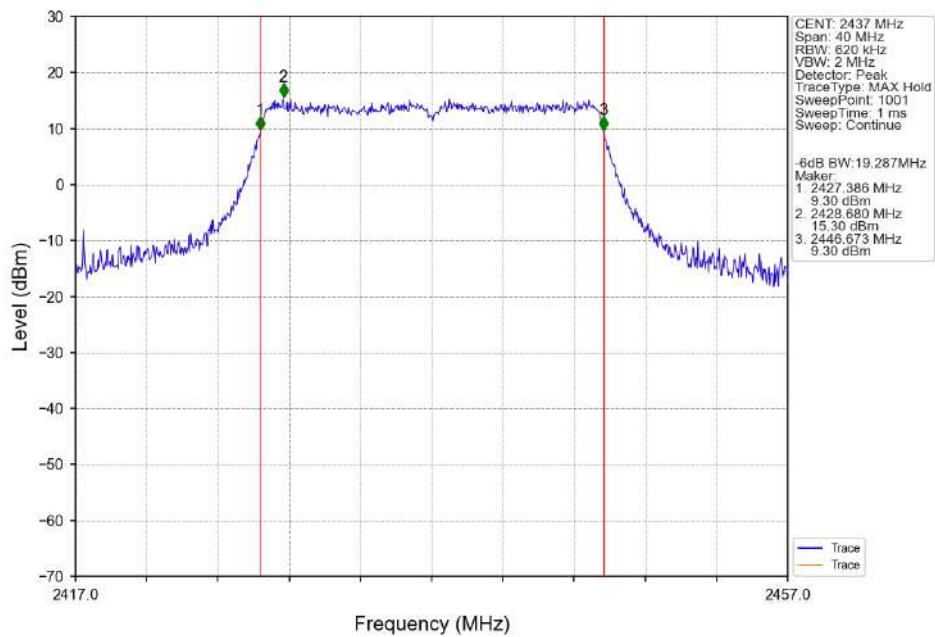


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant6 (MIMO)_NTNV

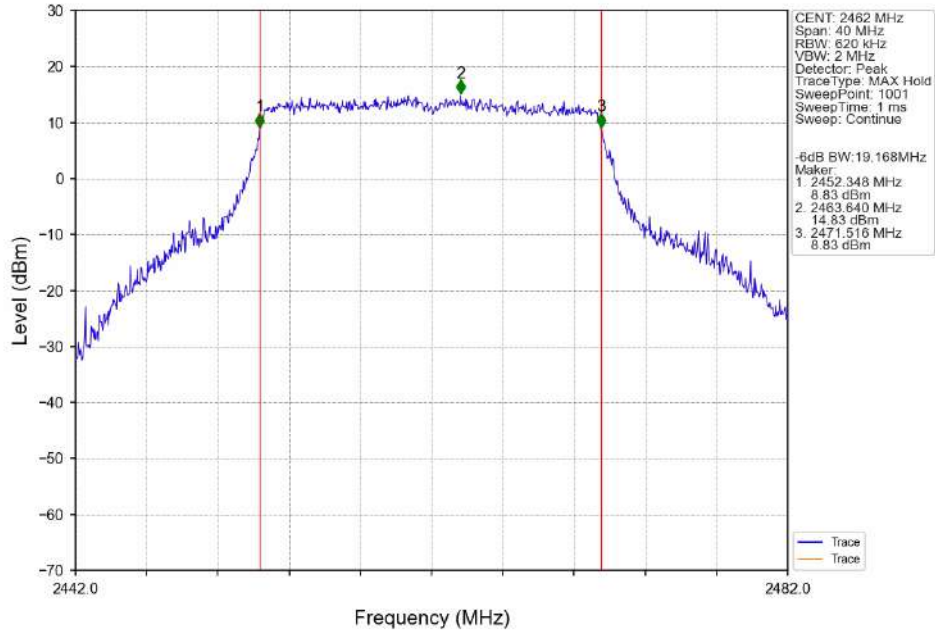


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant6 (MIMO)_NTNV

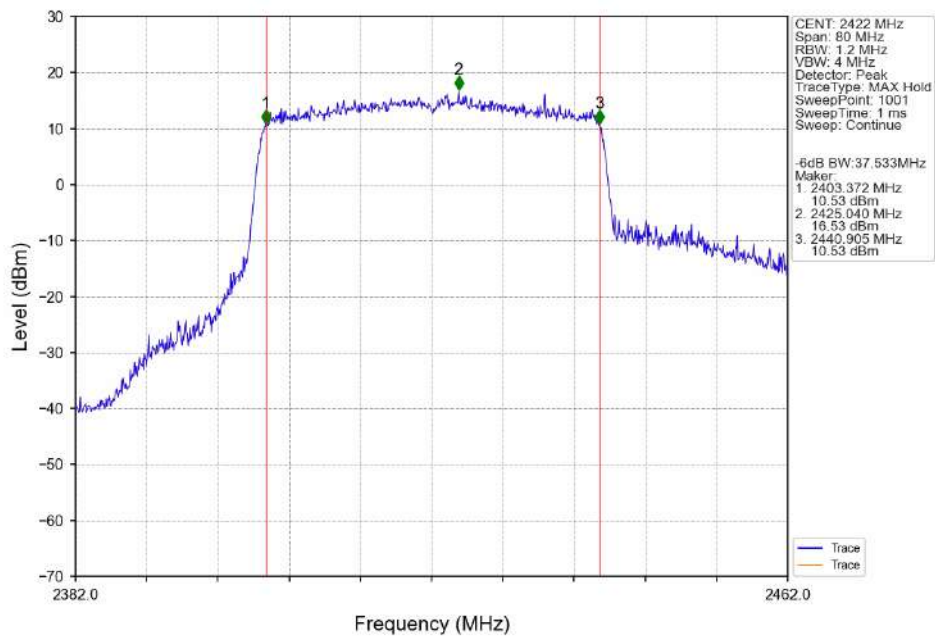

802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

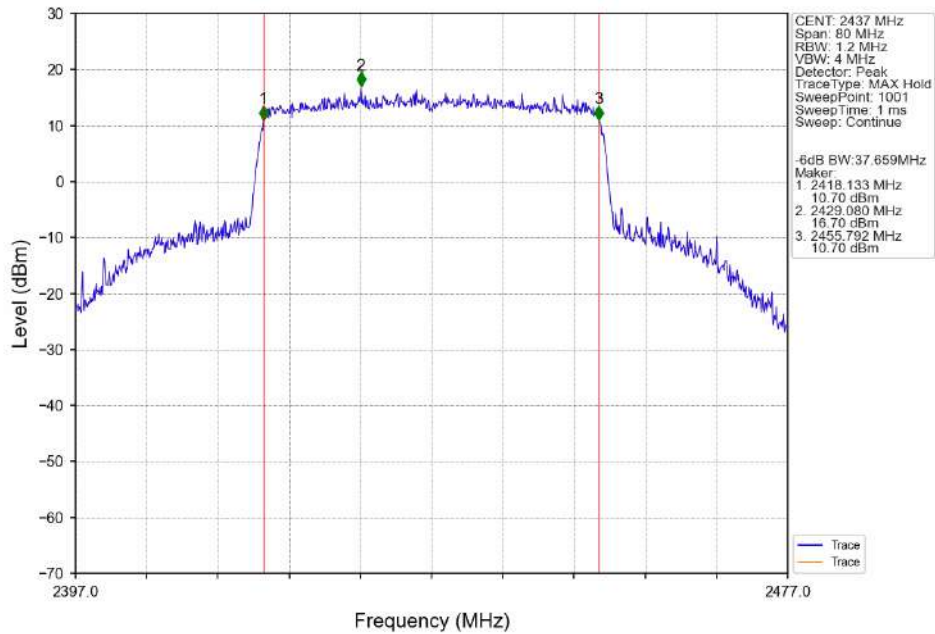

802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant6 (MIMO)_NTNV

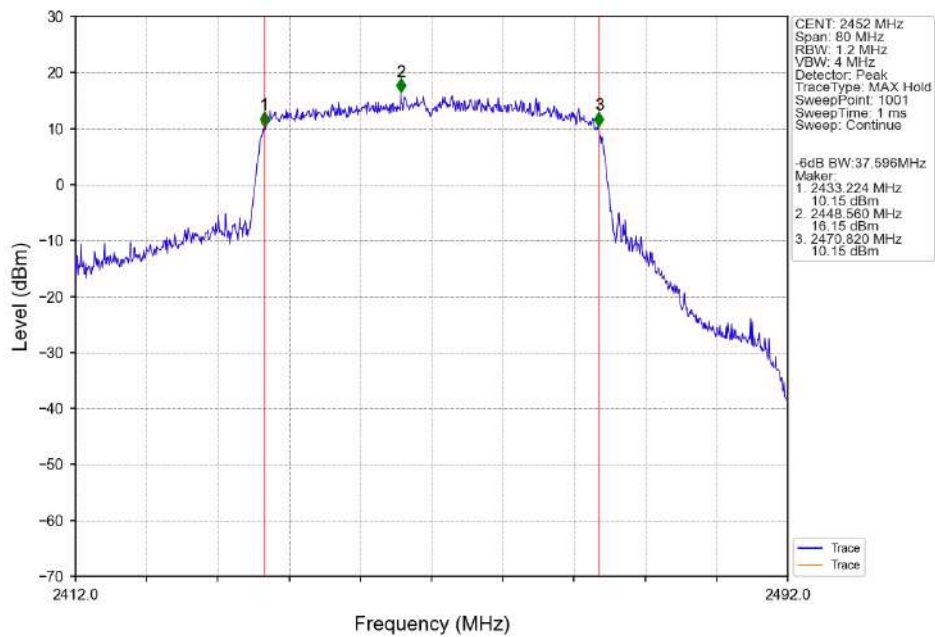

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 44 of 226

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	RU	Maximum Peak Conducted Output Power (dBm)				Verdict
				ANT6	ANT3	MIMO	Limit	
802.11b	MIMO	2412	/	24.83	24.78	27.82	<=30	Pass
		2437	/	24.89	24.91	27.91	<=30	Pass
		2462	/	24.74	24.83	27.80	<=30	Pass
802.11g	MIMO	2412	/	24.88	24.92	27.91	<=30	Pass
		2437	/	25.58	25.46	28.53	<=30	Pass
		2462	/	24.79	24.85	27.83	<=30	Pass
802.11N (HT20)	MIMO	2412	SU	24.92	24.98	27.96	<=30	Pass
		2437	SU	25.91	25.31	28.63	<=30	Pass
		2462	SU	24.62	24.88	27.76	<=30	Pass
802.11N (HT40)	MIMO	2422	SU	24.30	24.81	27.57	<=30	Pass
		2437	SU	25.32	25.34	28.34	<=30	Pass
		2447	SU	24.81	24.85	27.84	<=30	Pass
		2452	SU	22.81	22.84	25.84	<=30	Pass
802.11ax (HEW20)	MIMO	2412	RU26	24.52	24.12	27.33	<=30	Pass
			RU52	24.32	24.16	27.25	<=30	Pass
			RU106	24.65	24.10	27.39	<=30	Pass
			SU	24.95	25.01	27.99	<=30	Pass
		2437	RU26	25.32	24.88	28.12	<=30	Pass
			RU52	24.98	24.74	27.87	<=30	Pass
			RU106	25.03	24.88	27.97	<=30	Pass
			SU	25.98	25.38	28.70	<=30	Pass
		2462	RU26	24.11	24.88	27.52	<=30	Pass
			RU52	24.32	24.52	27.43	<=30	Pass
			RU106	24.06	24.12	27.10	<=30	Pass
			SU	24.67	24.91	27.80	<=30	Pass
802.11ax (HEW40)	MIMO	2422	SU	24.32	24.85	27.60	<=30	Pass
		2437	SU	25.36	25.56	28.47	<=30	Pass
		2447	SU	24.87	24.98	27.94	<=30	Pass
		2452	SU	22.85	22.91	25.89	<=30	Pass

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	RU	Maximum PSD (dBm/3kHz)				Verdict
				ANT6	ANT3	MIMO	Limit	
802.11b	MIMO	2412	/	-1.59	-1.10	0.52	<=8	Pass
		2437	/	-2.79	-1.81	-0.55	<=8	Pass
		2462	/	-2.11	-1.47	0.87	<=8	Pass
802.11g	MIMO	2412	/	-5.29	-5.04	-3.25	<=8	Pass
		2437	/	-4.59	-4.73	-2.29	<=8	Pass
		2462	/	-7.13	-6.74	-4.69	<=8	Pass
802.11ax (HEW20)	MIMO	2412	RU26	-7.60	-7.75	-5.93	<=8	Pass
			RU52	-7.97	-8.78	-5.89	<=8	Pass
			RU106	-7.91	-8.44	-5.87	<=8	Pass
			SU	-7.10	-6.94	-5.11	<=8	Pass
		2437	RU26	-5.61	-5.25	-2.84	<=8	Pass
			RU52	-5.38	-6.05	-3.28	<=8	Pass
			RU106	-5.93	-5.06	-2.83	<=8	Pass
			SU	-4.33	-5.38	-2.54	<=8	Pass
		2462	RU26	-8.59	-9.49	-6.37	<=8	Pass
			RU52	-8.85	-8.36	-5.83	<=8	Pass
			RU106	-8.49	-8.10	-6.18	<=8	Pass
			SU	-7.22	-7.15	-5.70	<=8	Pass
802.11ax (HEW40)	MIMO	2422	SU	-10.11	-9.10	-7.94	<=8	Pass
		2437	SU	-7.16	-7.10	-5.17	<=8	Pass
		2452	SU	-11.70	-11.79	-10.07	<=8	Pass

4.2 Test Graph


4.2.1 PSD

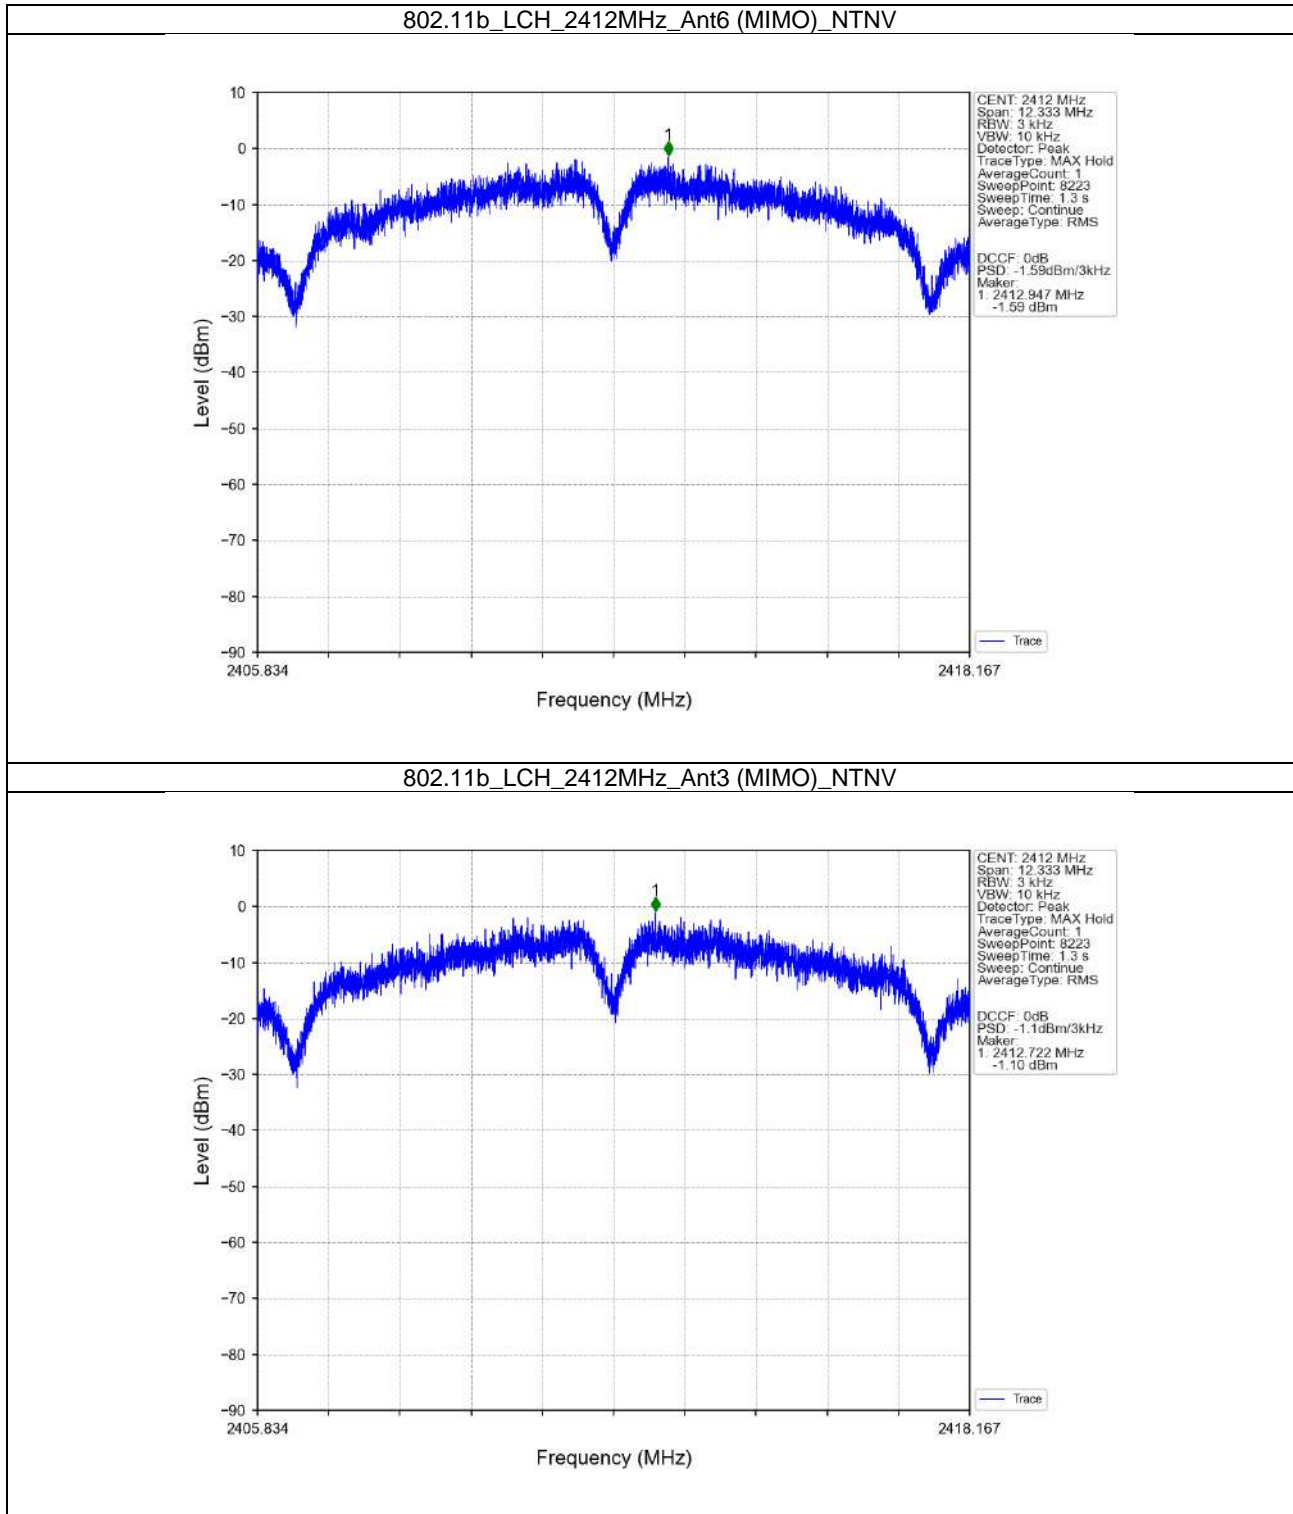


802.11b_LCH_2412MHz_MIMO_NTNV

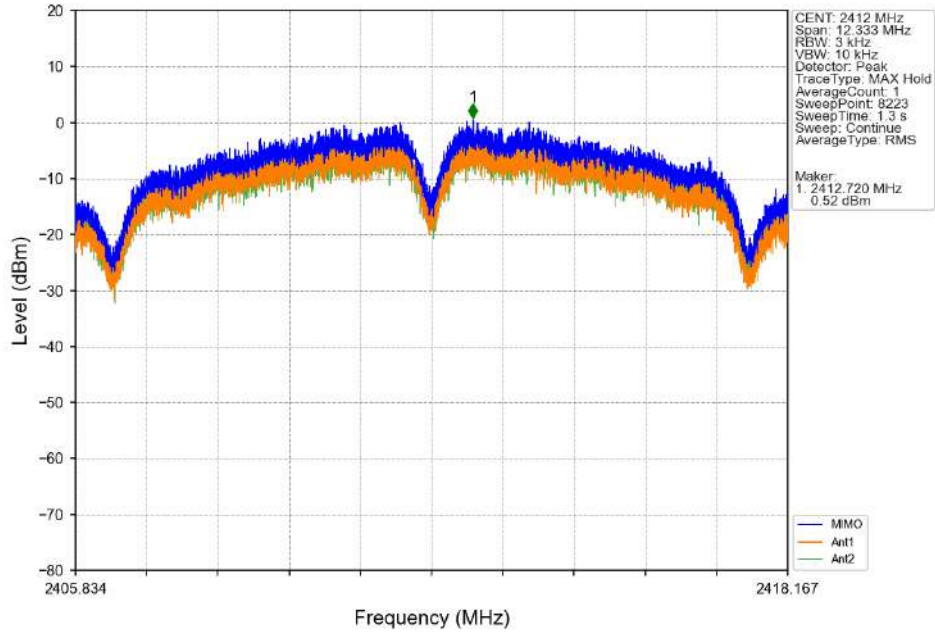


802.11b_MCH_2437MHz_Ant6 (MIMO)_NTNV

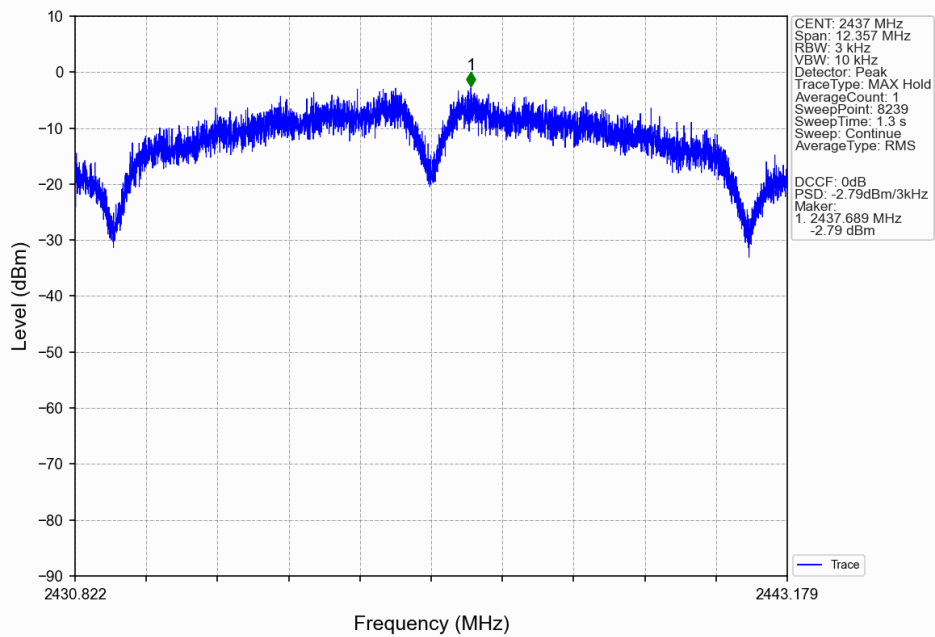


802.11b_MCH_2437MHz_Ant3 (MIMO)_NTNV

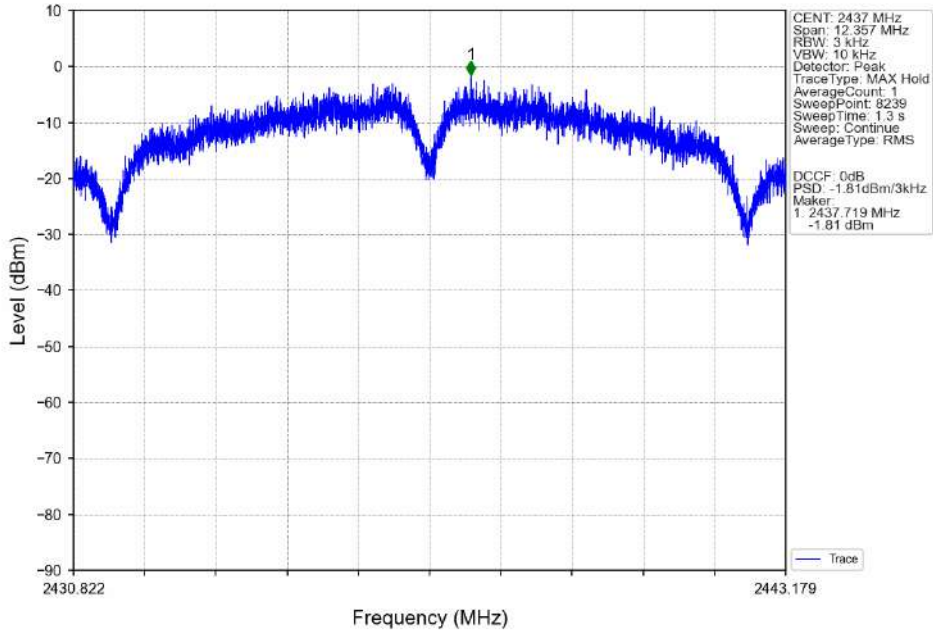


802.11b_MCH_2437MHz_MIMO_NTNV

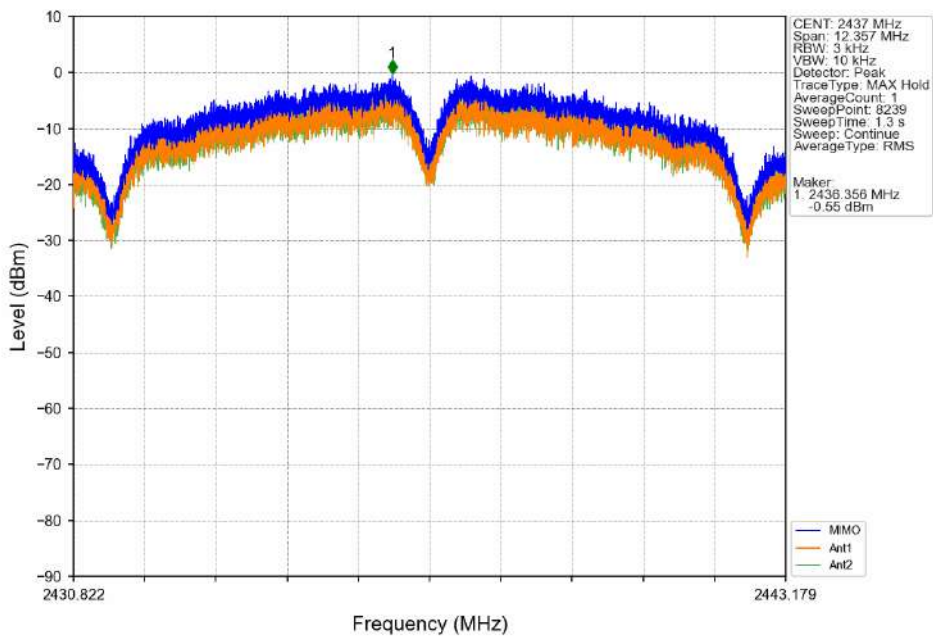


802.11b_HCH_2462MHz_Ant6 (MIMO)_NTNV

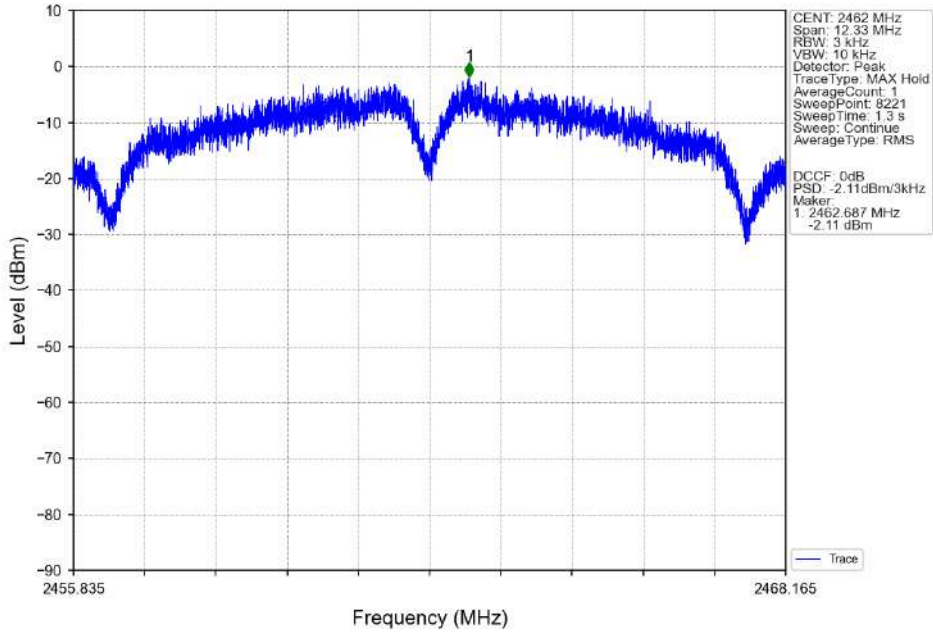


802.11b_HCH_2462MHz_Ant3 (MIMO)_NTNV

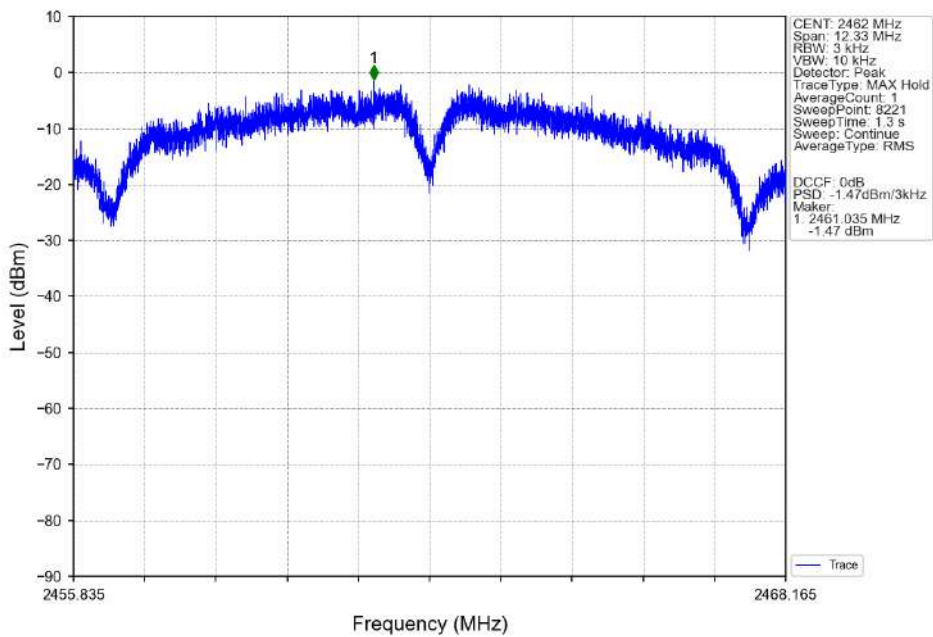


802.11b_HCH_2462MHz_MIMO_NTNV

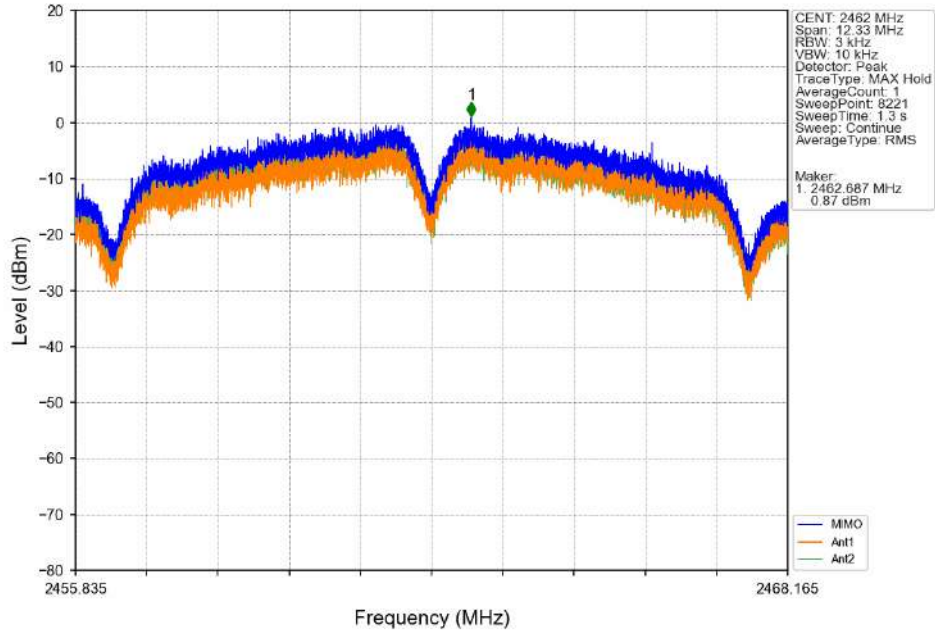


802.11g_LCH_2412MHz_Ant6 (MIMO)_NTNV

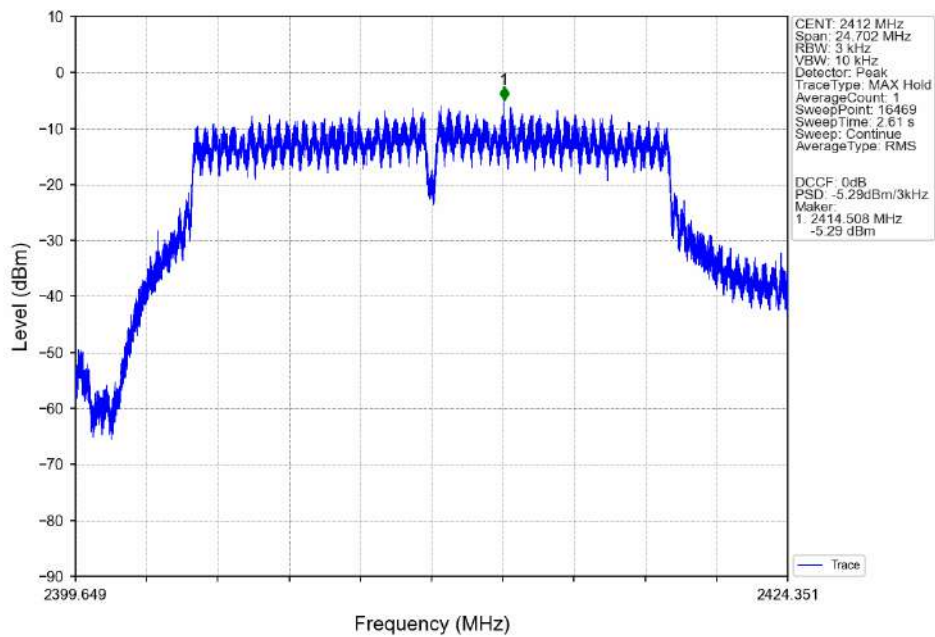


802.11g_LCH_2412MHz_Ant3 (MIMO)_NTNV

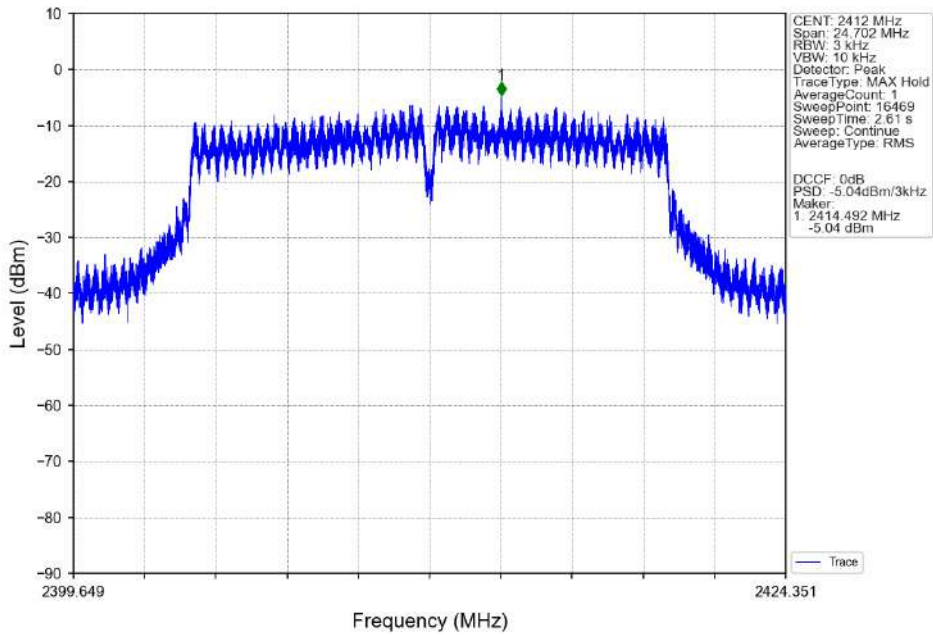


802.11g_LCH_2412MHz_MIMO_NTNV

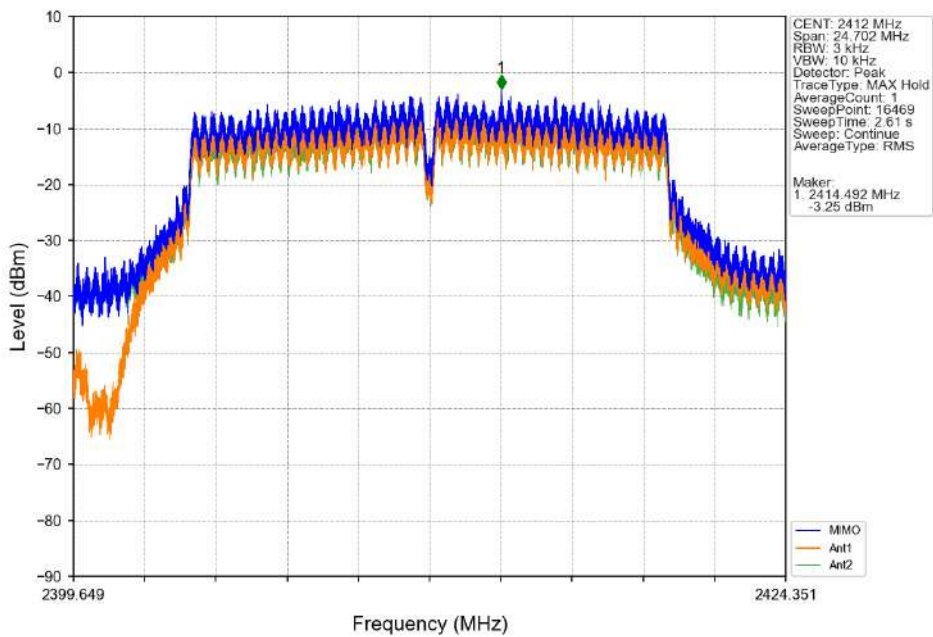


802.11g_MCH_2437MHz_Ant6 (MIMO)_NTNV

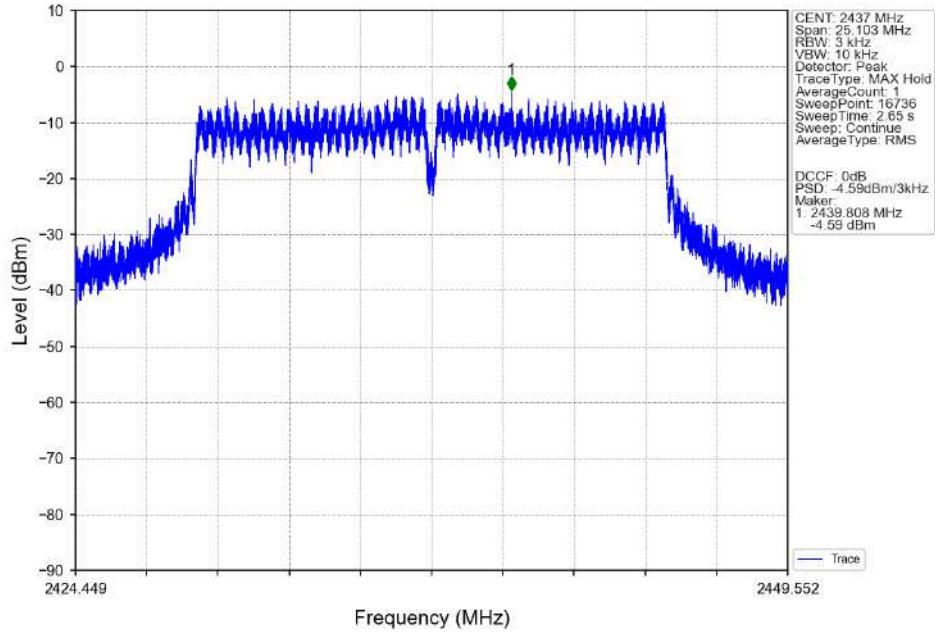


802.11g_MCH_2437MHz_Ant3 (MIMO)_NTNV

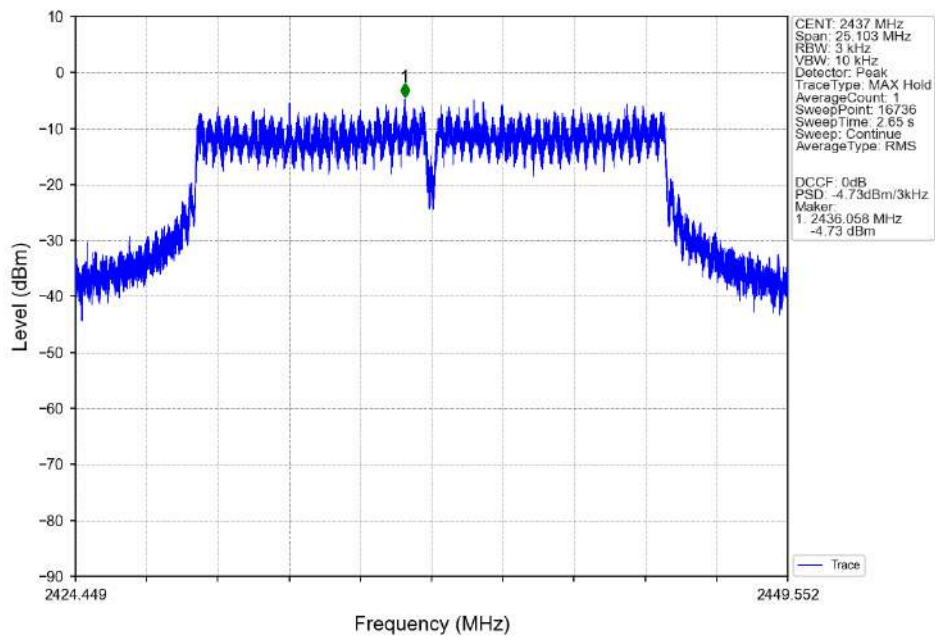


802.11g_MCH_2437MHz_MIMO_NTNV

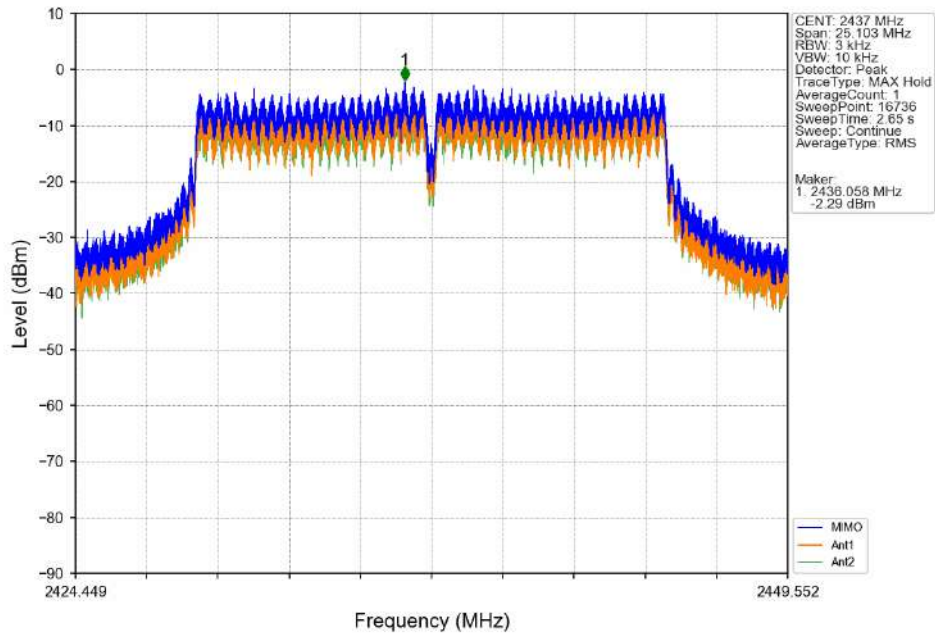


802.11g_HCH_2462MHz_Ant6 (MIMO)_NTNV

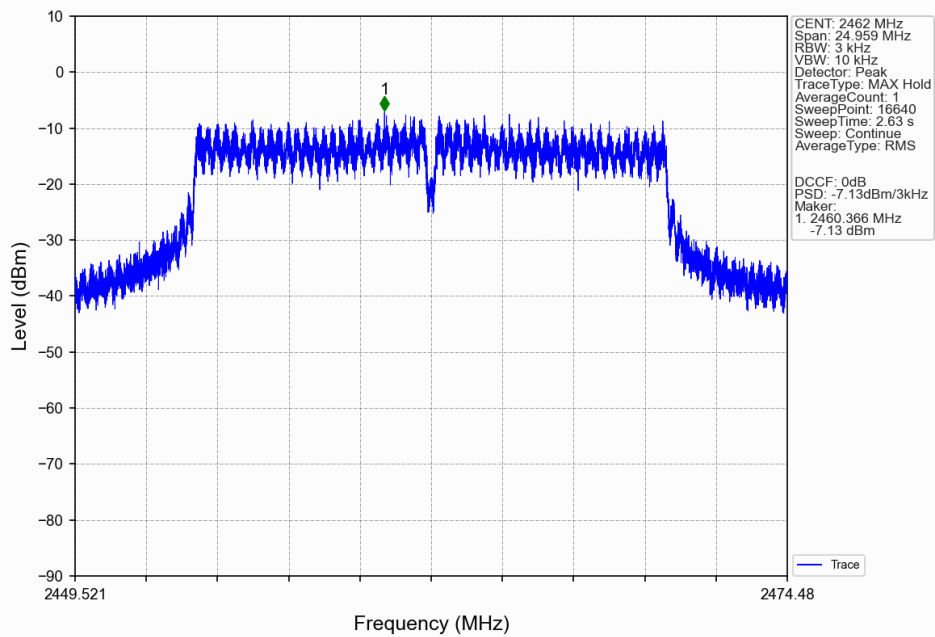


802.11g_HCH_2462MHz_Ant3 (MIMO)_NTNV

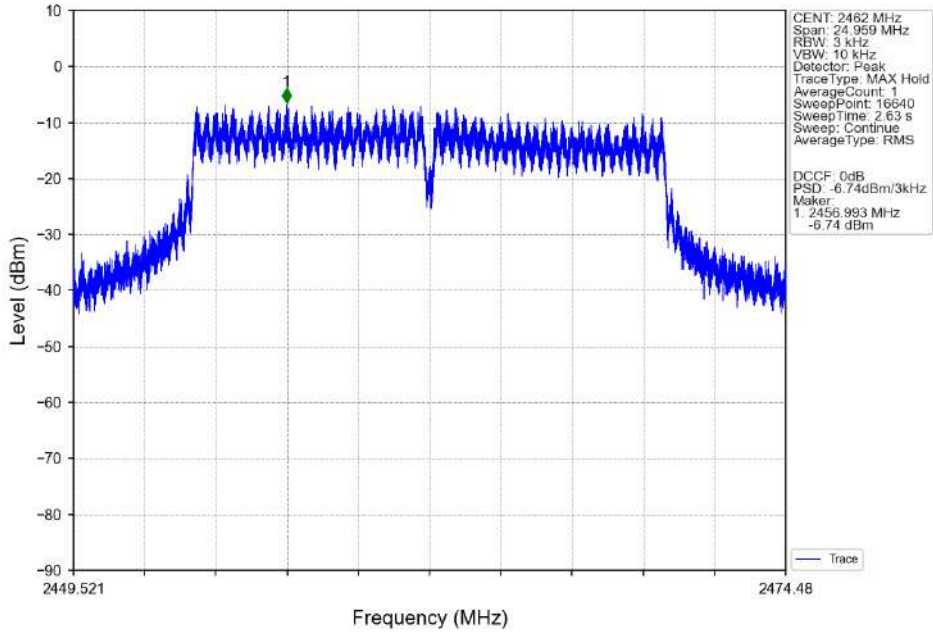


802.11g_HCH_2462MHz_MIMO_NTNV

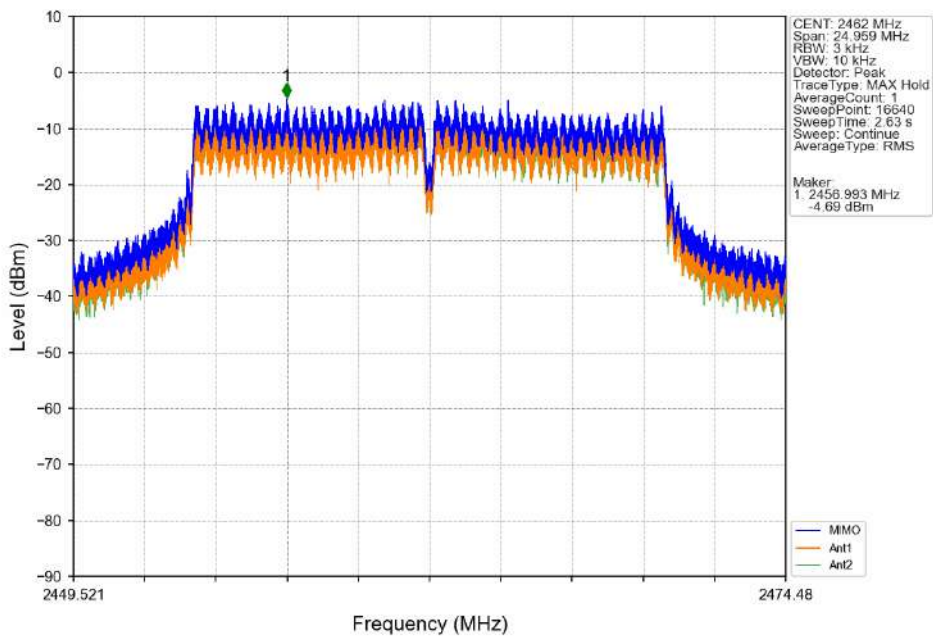


802.11ax(HEW20)_LCH_2412MHz_RU26_Left_Ant6 (MIMO)_NTNV

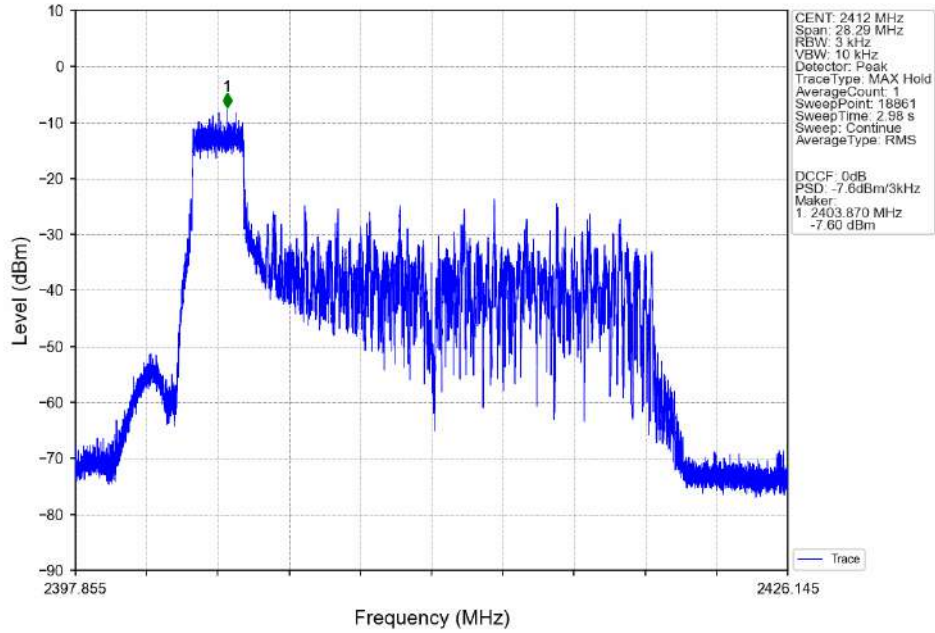


802.11ax(HEW20)_LCH_2412MHz_RU26_Left_Ant3 (MIMO)_NTNV

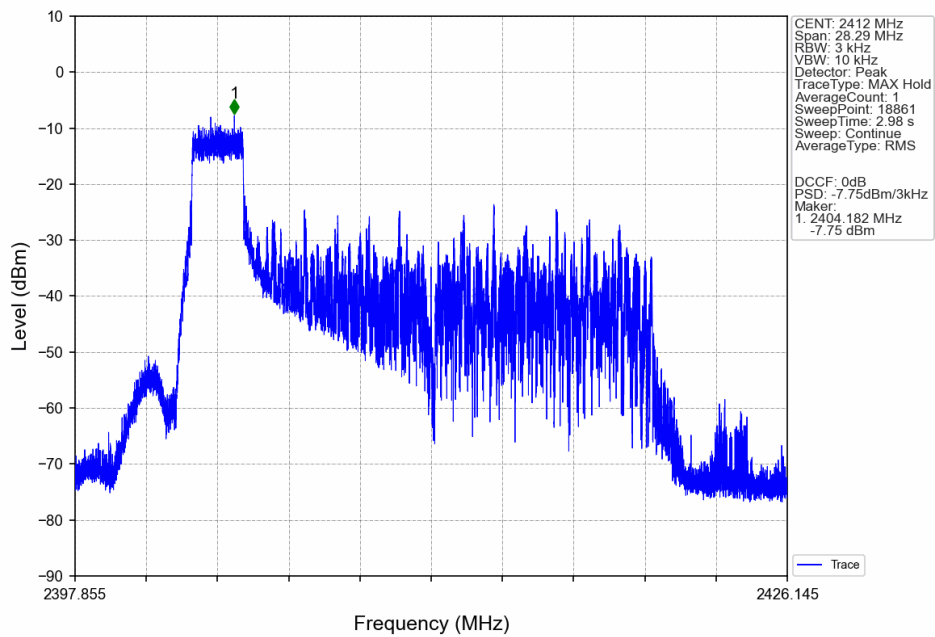


802.11ax(HEW20)_LCH_2412MHz_RU26_Left_MIMO_NTNV

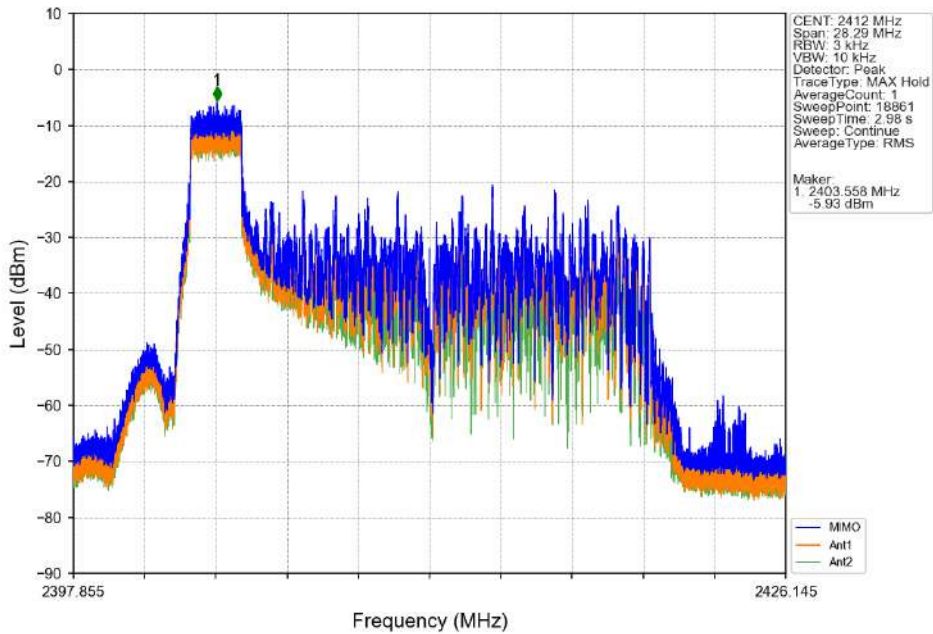


802.11ax(HEW20)_LCH_2412MHz_RU52_Left_Ant6 (MIMO)_NTNV

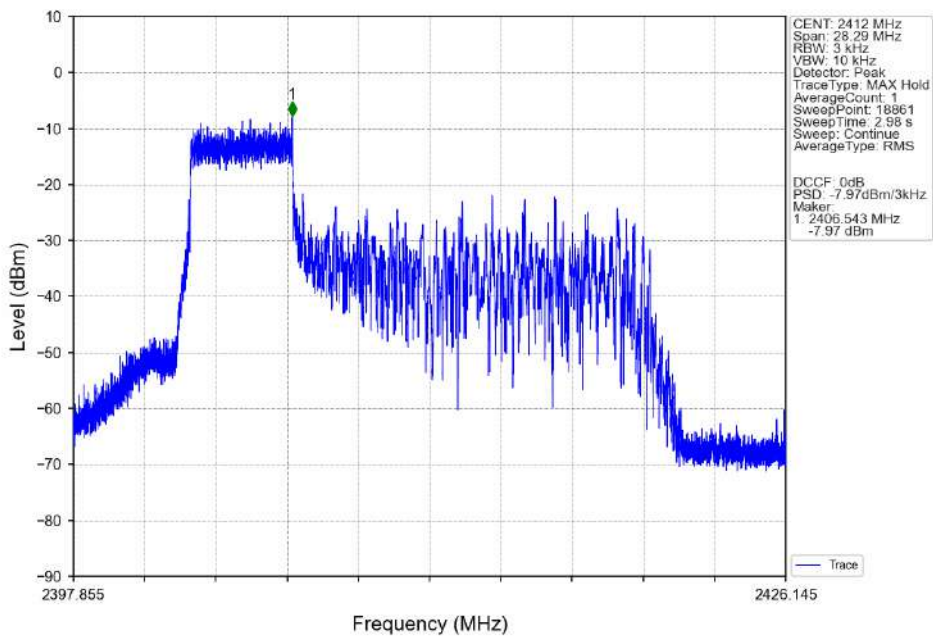


802.11ax(HEW20)_LCH_2412MHz_RU52_Left_Ant3 (MIMO)_NTNV

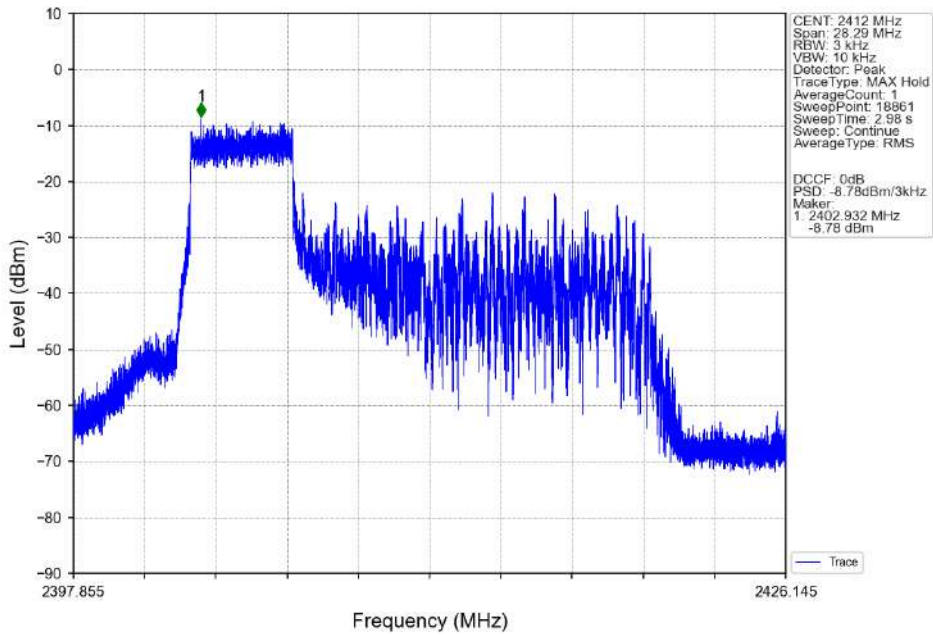


802.11ax(HEW20)_LCH_2412MHz_RU52_Left_MIMO_NTNV

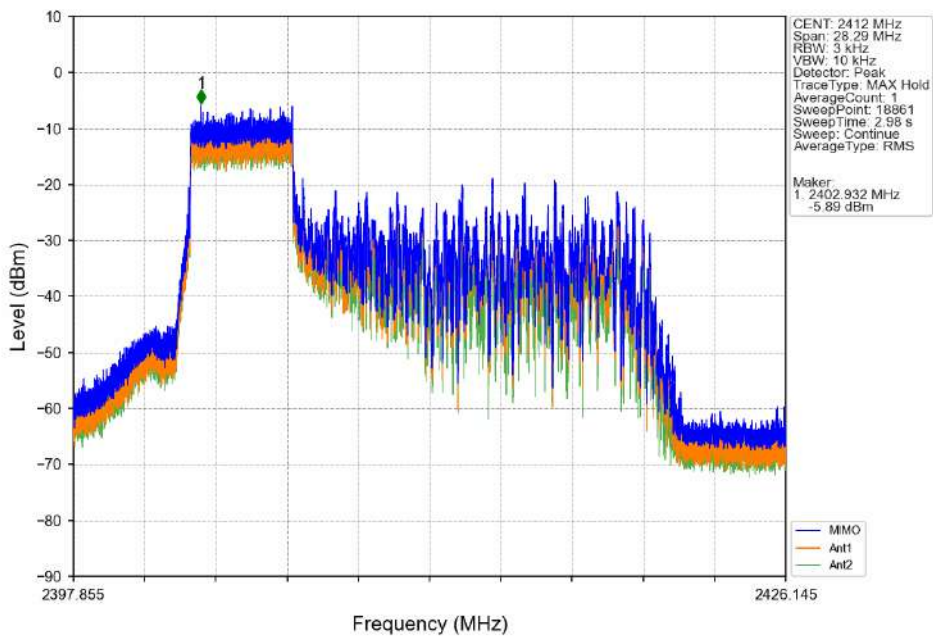


802.11ax(HEW20)_LCH_2412MHz_RU106_Left_Ant6 (MIMO)_NTNV

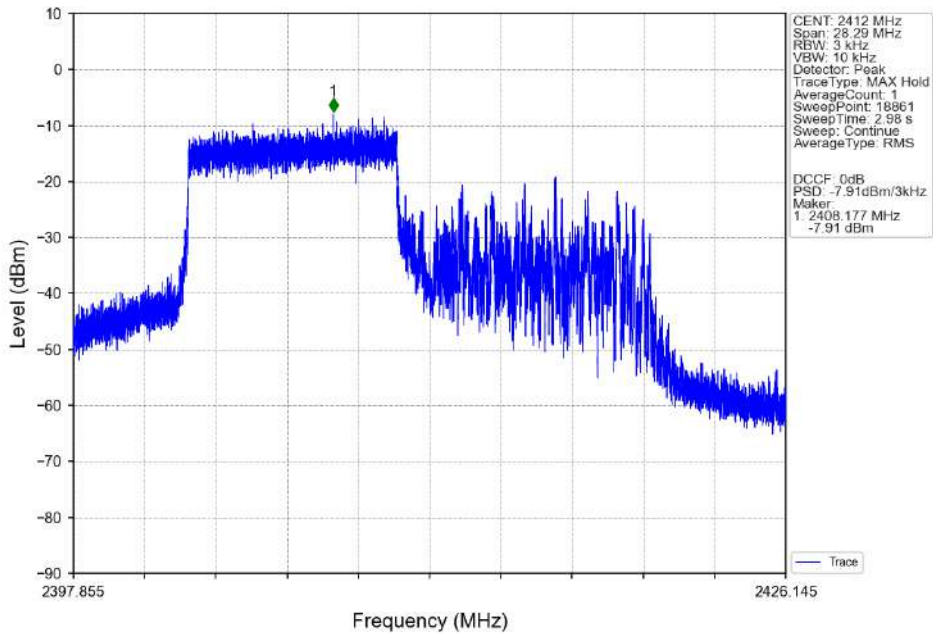


802.11ax(HEW20)_LCH_2412MHz_RU106_Left_Ant3 (MIMO)_NTNV

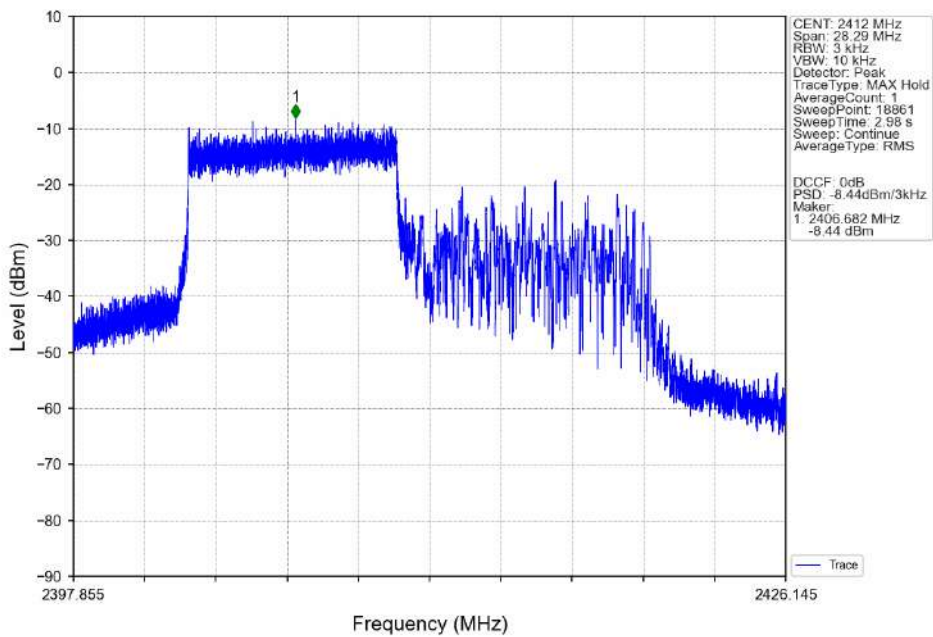


802.11ax(HEW20)_LCH_2412MHz_RU106_Left_MIMO_NTNV

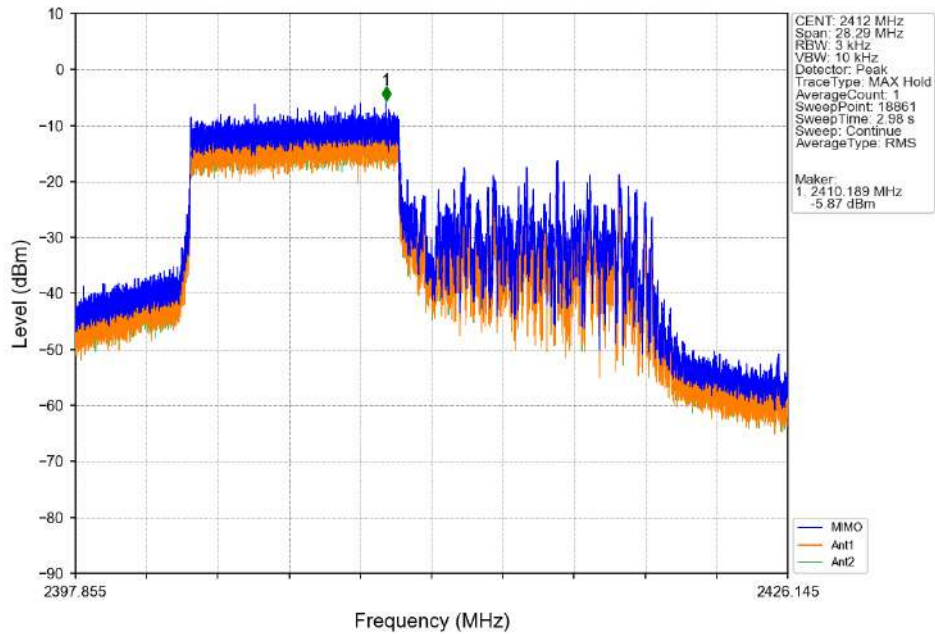


802.11ax(HEW20)_LCH_2412MHz_SU_/_Ant6(MIMO)_NTNV

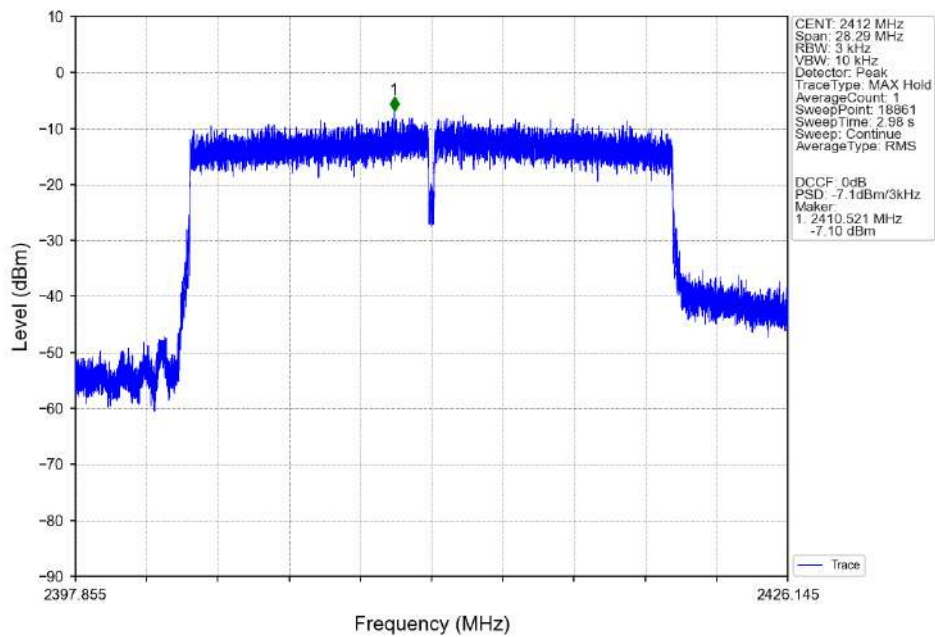


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant3 (MIMO)_NTNV

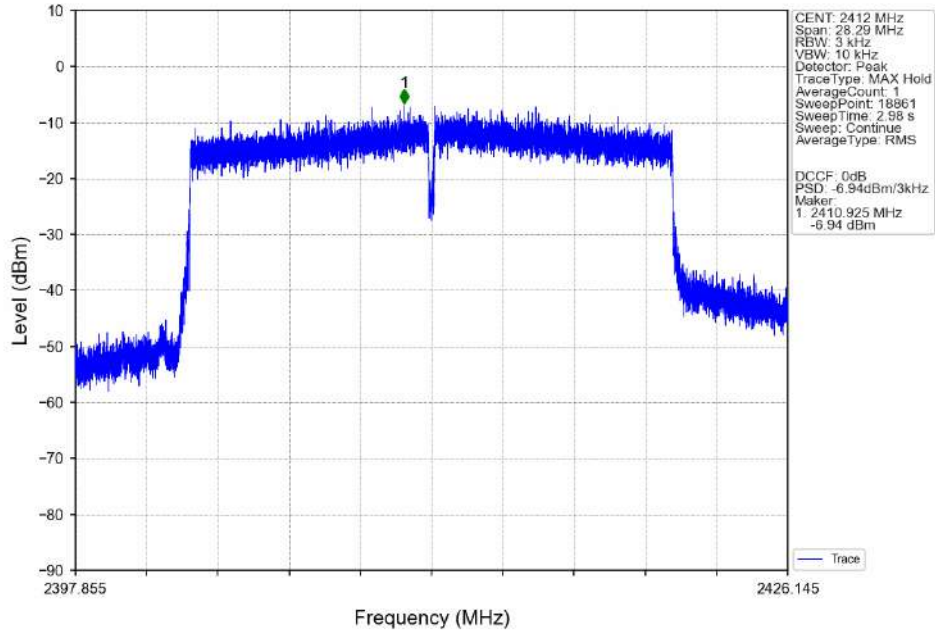


802.11ax(HEW20)_LCH_2412MHz_SU_ / _MIMO_NTNV

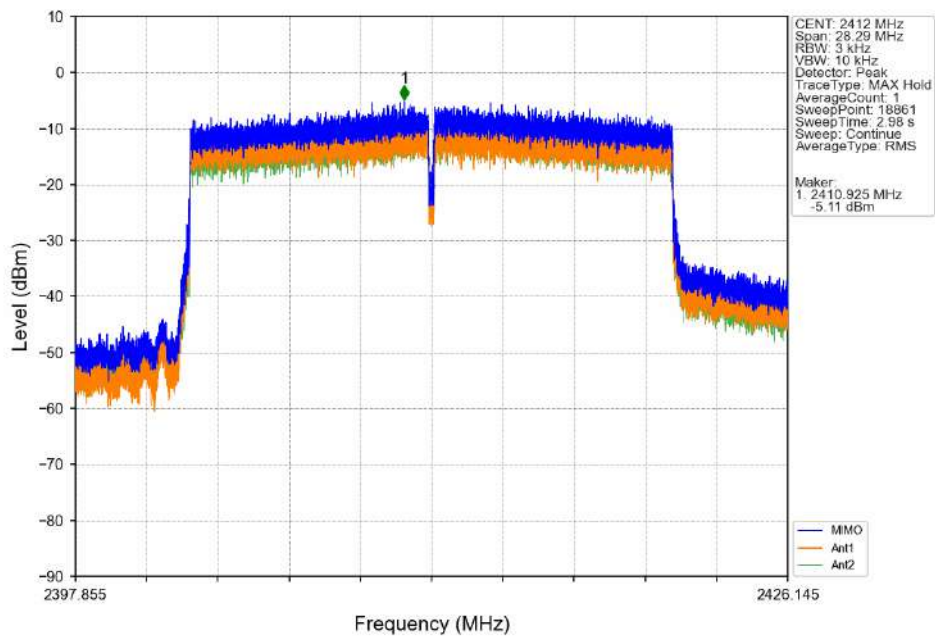


802.11ax(HEW20)_MCH_2437MHz_RU26_Left_Ant6 (MIMO)_NTNV

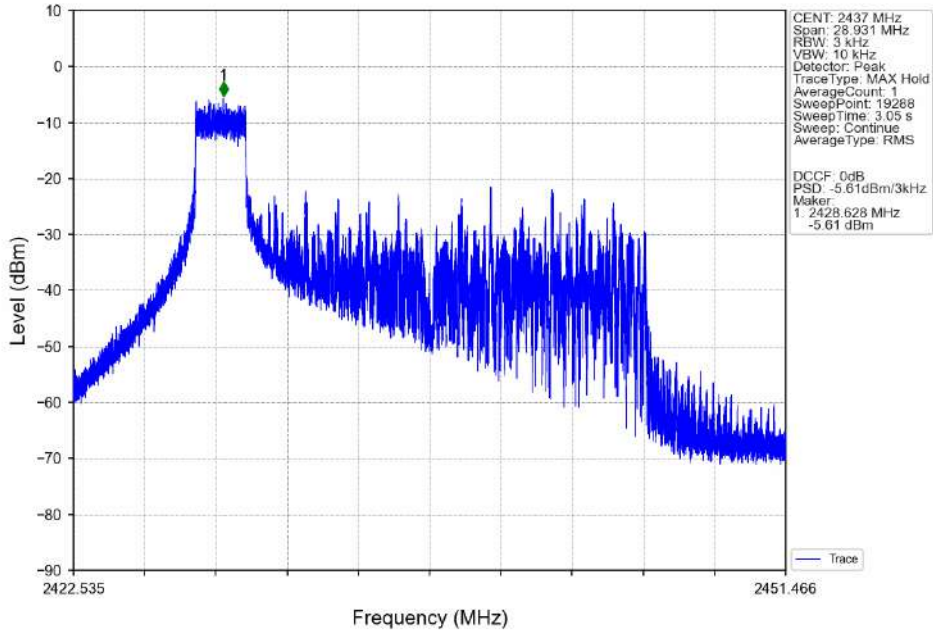


802.11ax(HEW20)_MCH_2437MHz_RU26_Left_Ant3 (MIMO)_NTNV

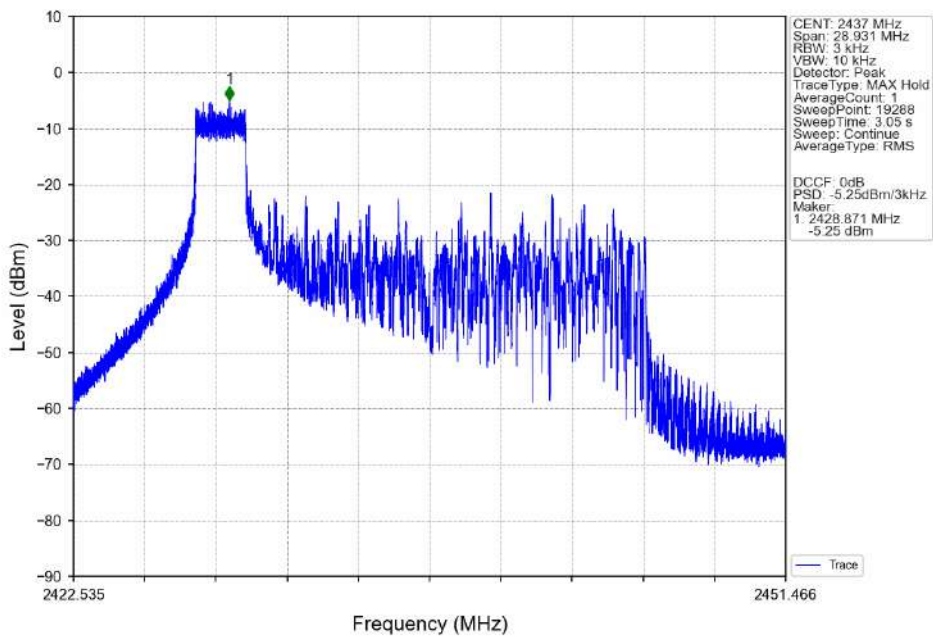


802.11ax(HEW20)_MCH_2437MHz_RU26_Left_MIMO_NTNV

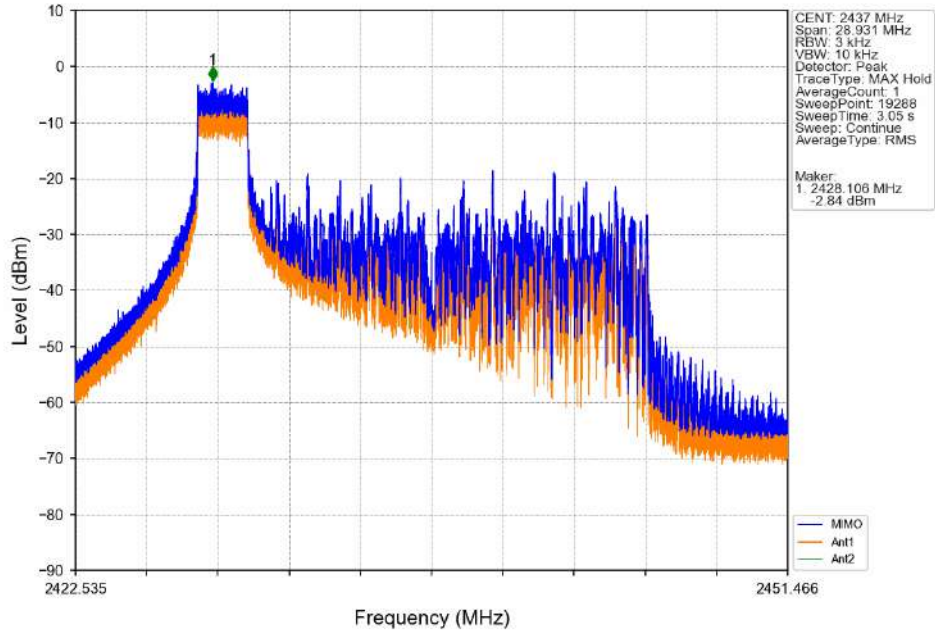


802.11ax(HEW20)_MCH_2437MHz_RU52_Left_Ant6 (MIMO)_NTNV

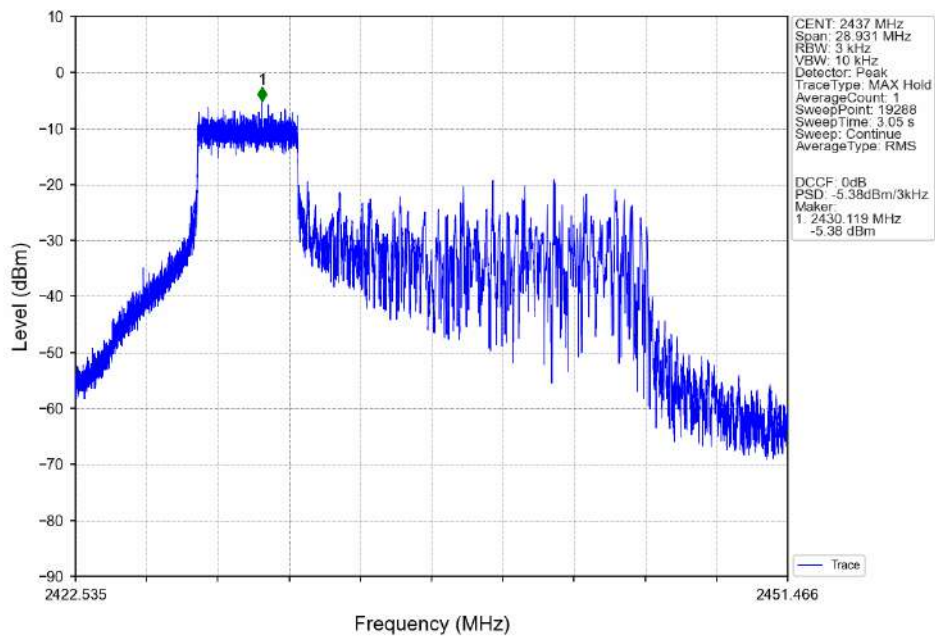


802.11ax(HEW20)_MCH_2437MHz_RU52_Left_Ant3 (MIMO)_NTNV

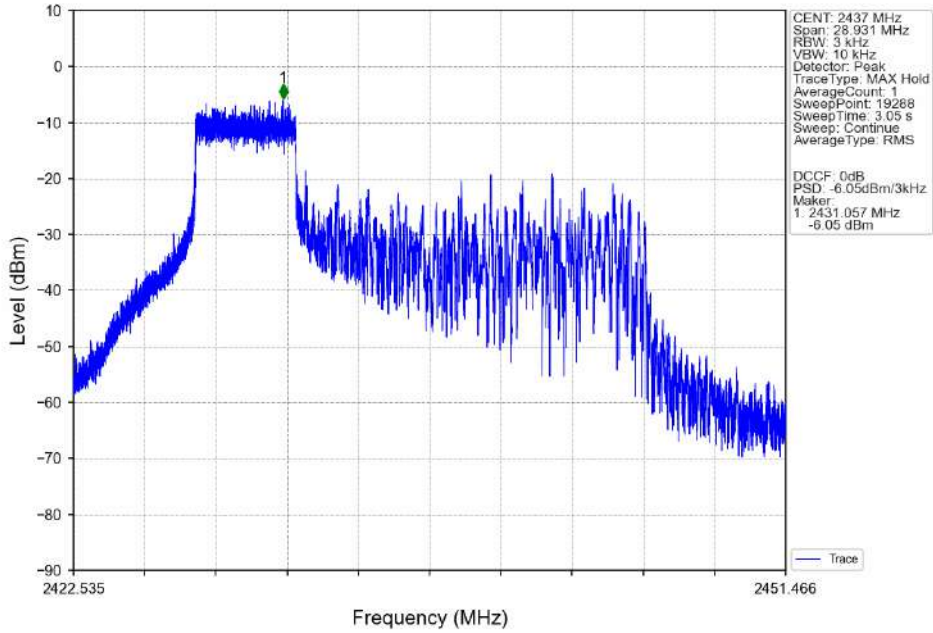


802.11ax(HEW20)_MCH_2437MHz_RU52_Left_MIMO_NTNV

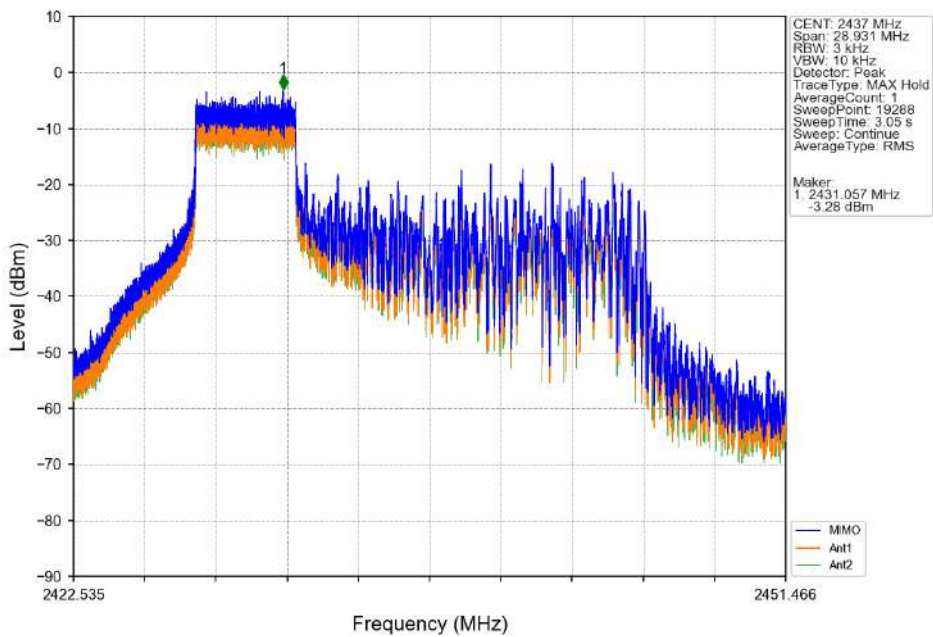


802.11ax(HEW20)_MCH_2437MHz_RU106_Left_Ant6 (MIMO)_NTNV

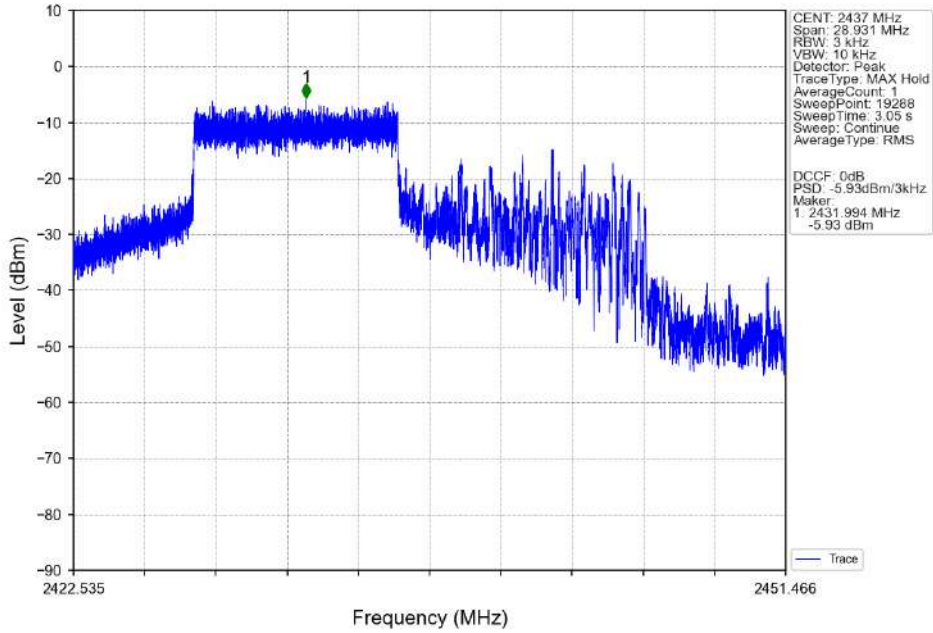


802.11ax(HEW20)_MCH_2437MHz_RU106_Left_Ant3 (MIMO)_NTNV

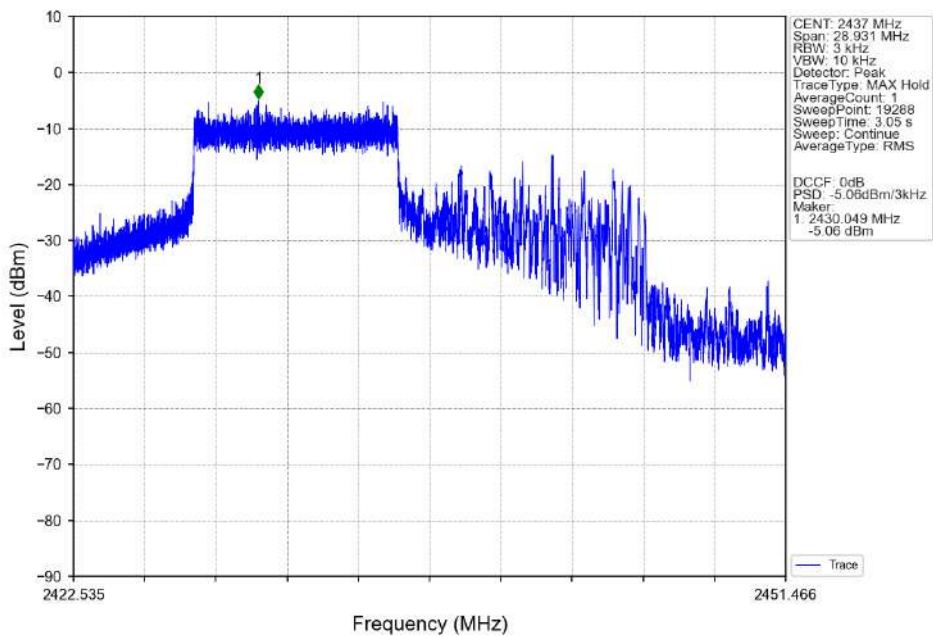


802.11ax(HEW20)_MCH_2437MHz_RU106_Left_MIMO_NTNV

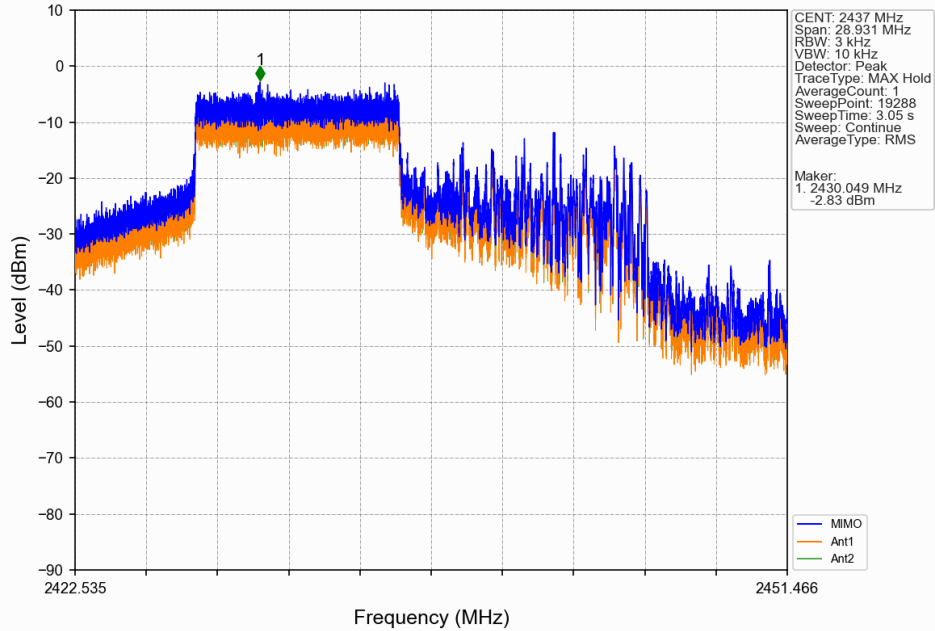


802.11ax(HEW20)_MCH_2437MHz_SU_/_Ant6 (MIMO)_NTNV

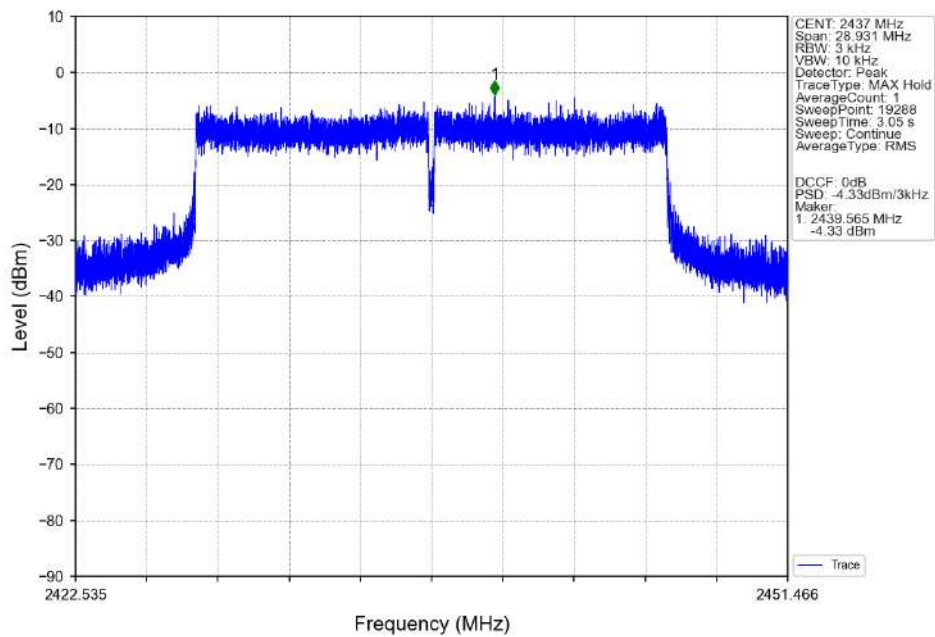


802.11ax(HEW20)_MCH_2437MHz_SU_/_Ant3 (MIMO)_NTNV

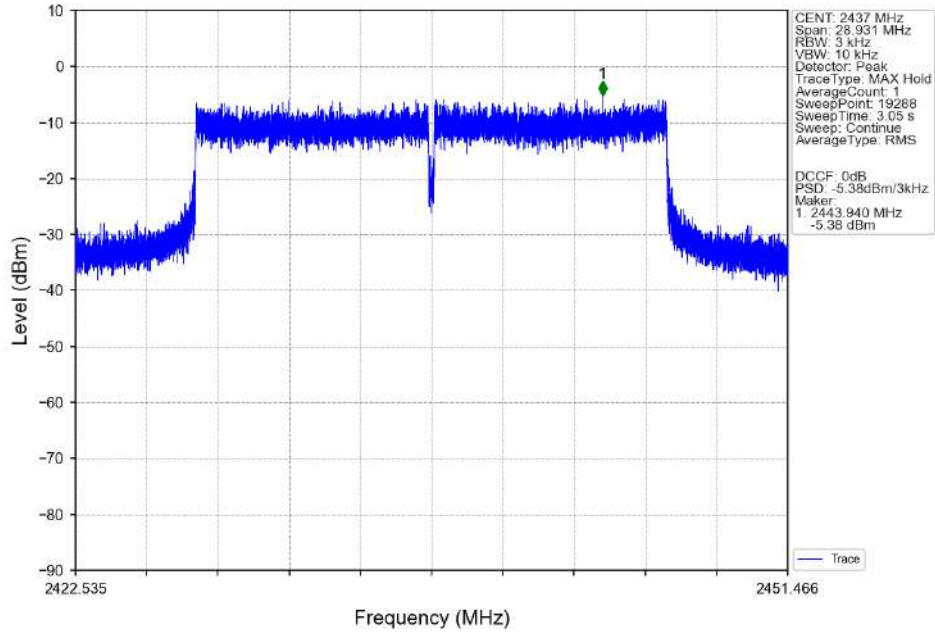


802.11ax(HEW20)_MCH_2437MHz_SU_/_MIMO_NTNV

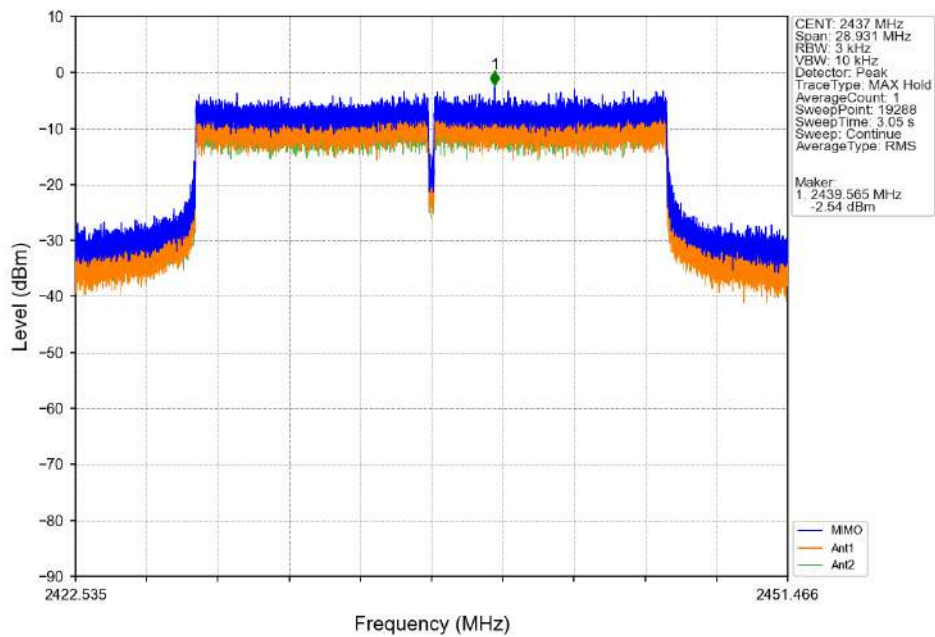


802.11ax(HEW20)_HCH_2462MHz_RU26_Left_Ant6 (MIMO)_NTNV

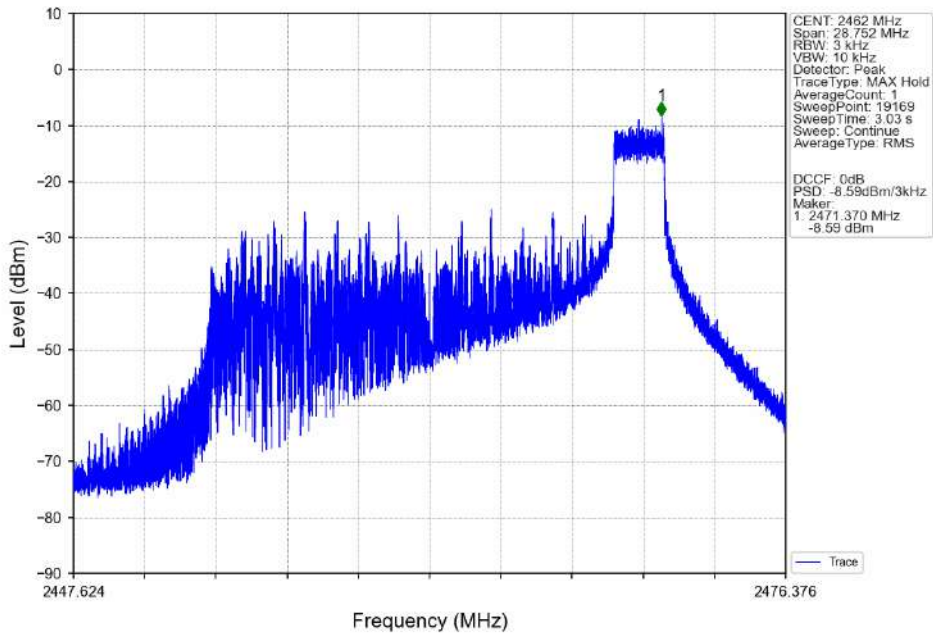


802.11ax(HEW20)_HCH_2462MHz_RU26_Left_Ant3 (MIMO)_NTNV

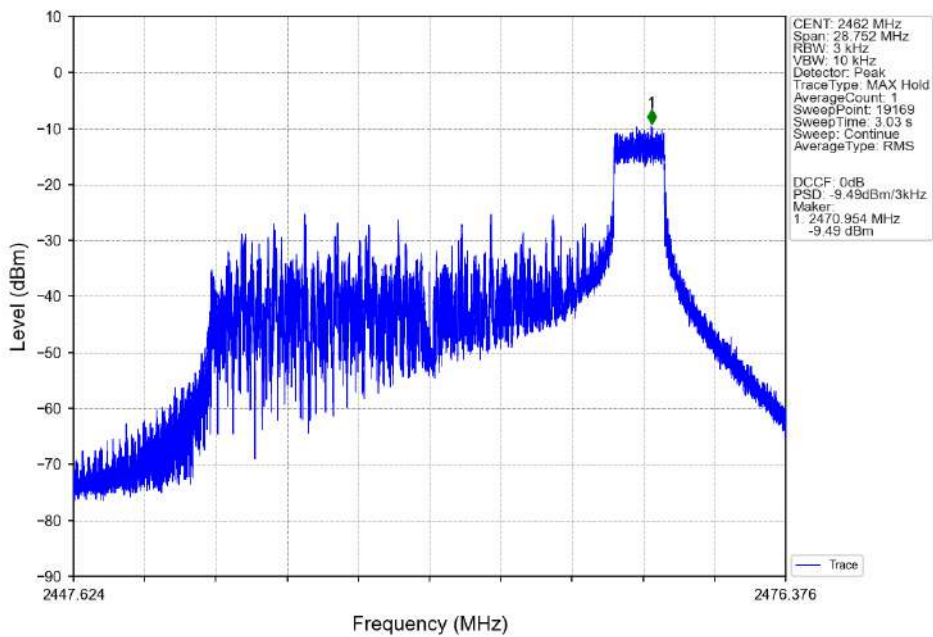


802.11ax(HEW20)_HCH_2462MHz_RU26_Left_MIMO_NTNV

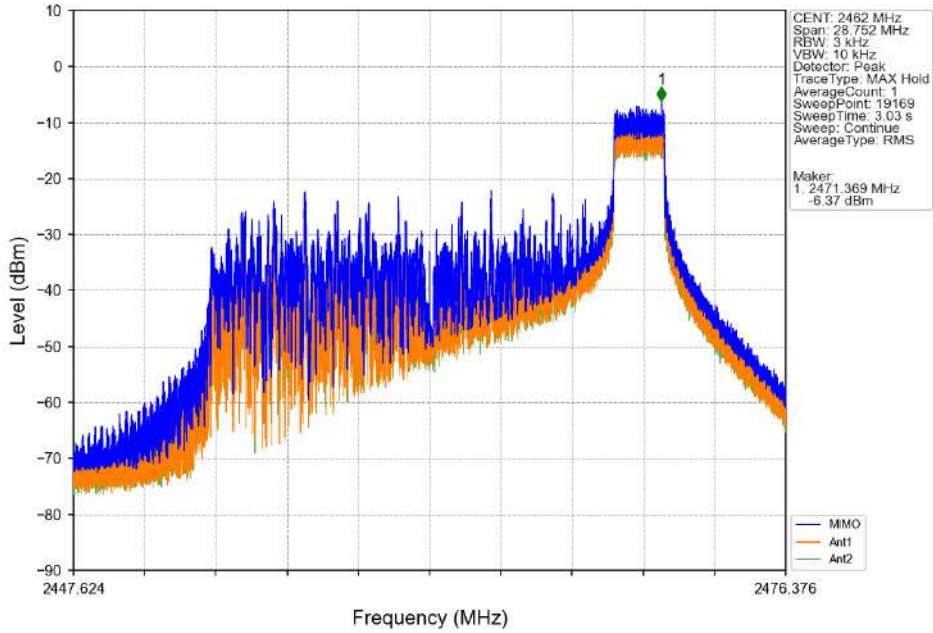


802.11ax(HEW20)_HCH_2462MHz_RU52_Left_Ant6 (MIMO)_NTNV

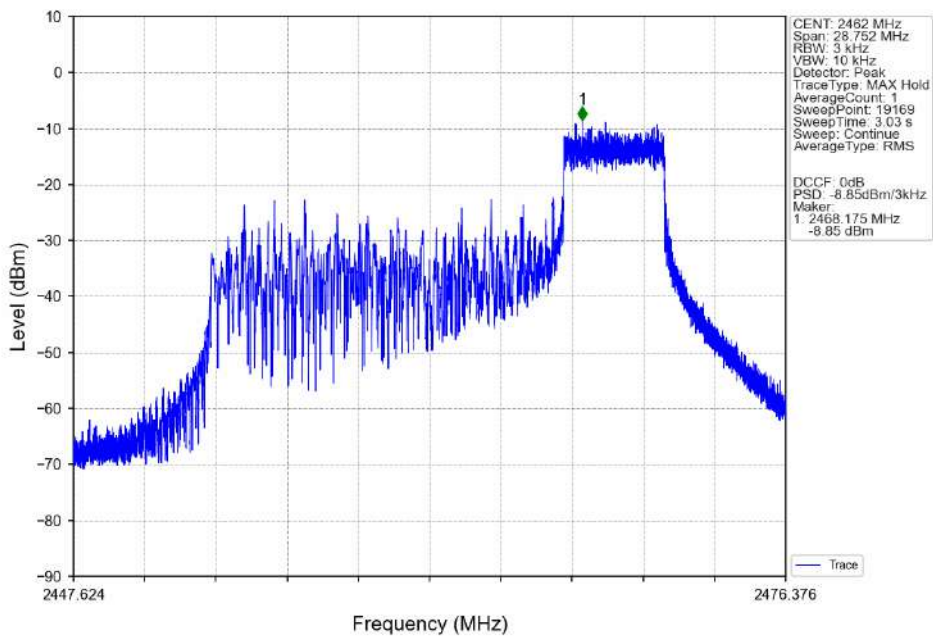


802.11ax(HEW20)_HCH_2462MHz_RU52_Left_Ant3 (MIMO)_NTNV

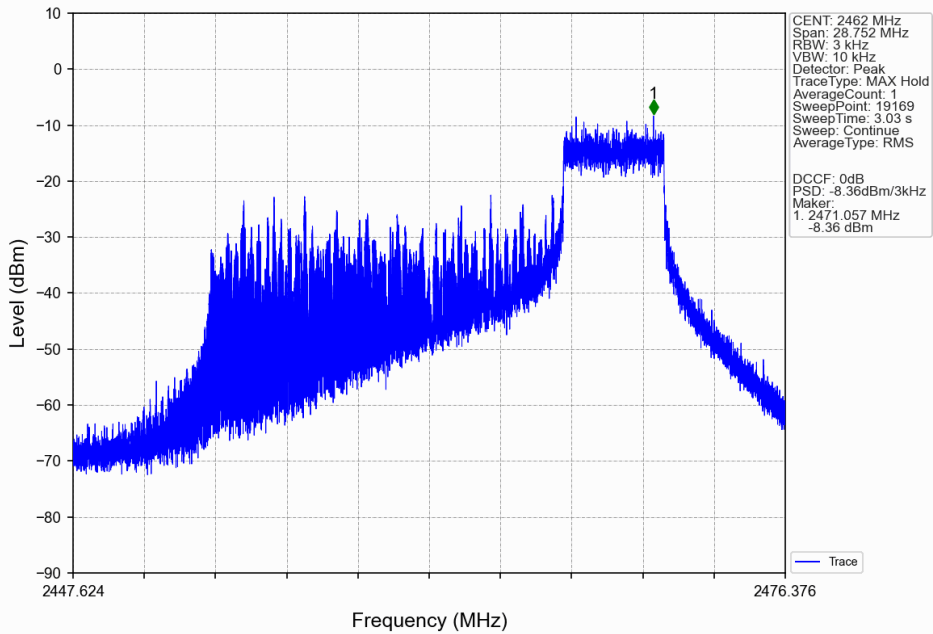


802.11ax(HEW20)_HCH_2462MHz_RU52_Left_MIMO_NTNV

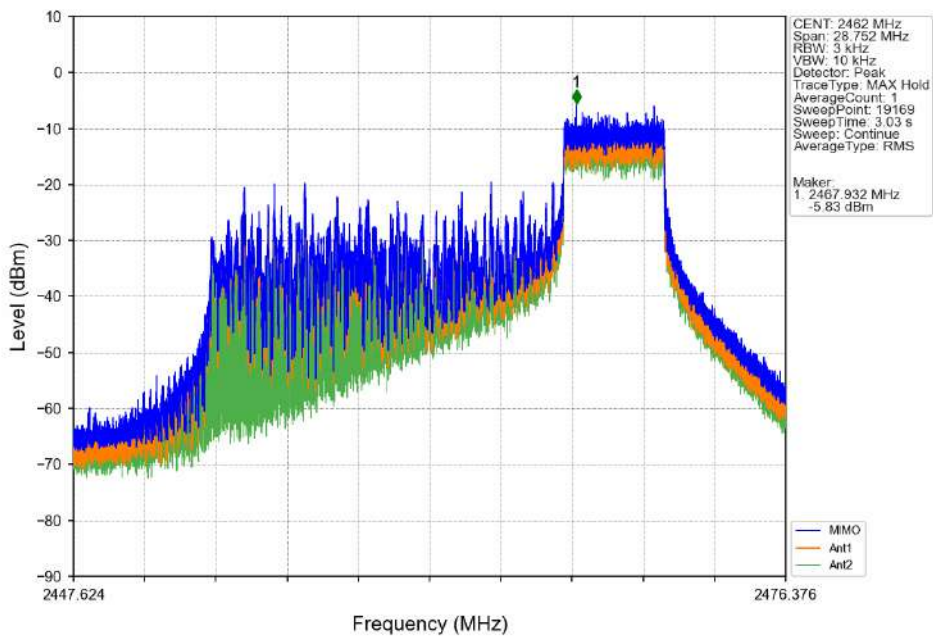


802.11ax(HEW20)_HCH_2462MHz_RU106_Left_Ant6 (MIMO)_NTNV

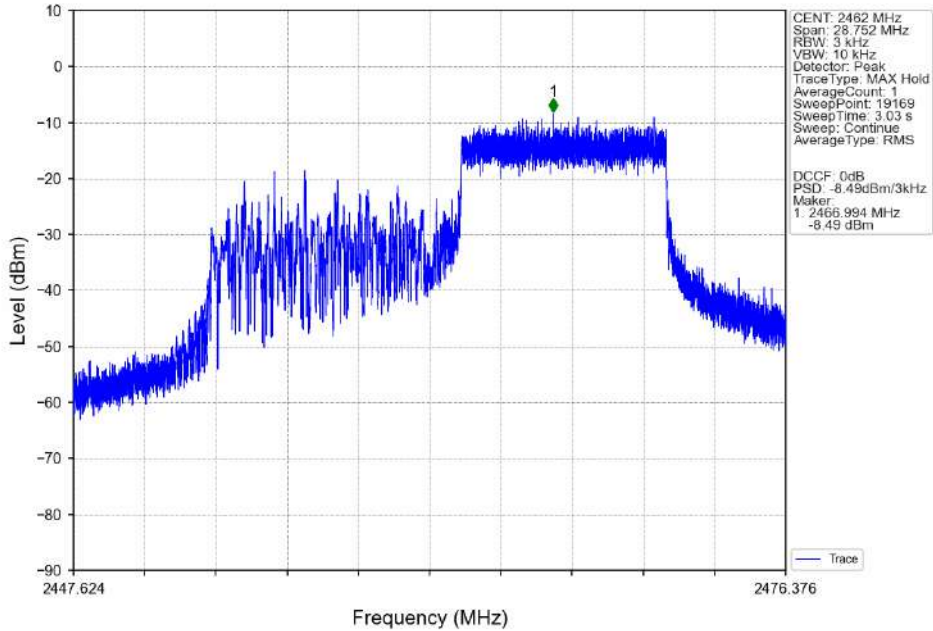


802.11ax(HEW20)_HCH_2462MHz_RU106_Left_Ant3 (MIMO)_NTNV

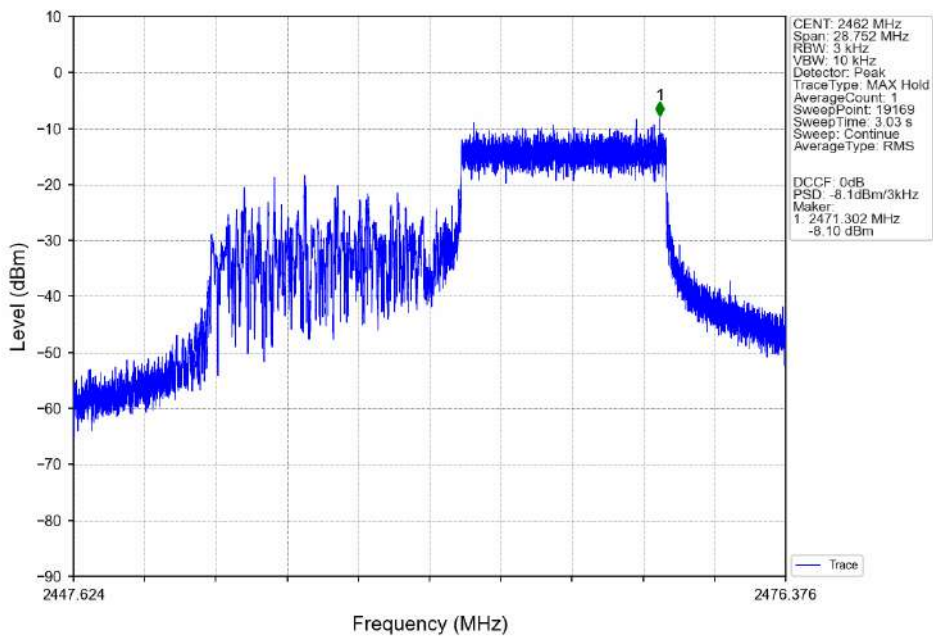


802.11ax(HEW20)_HCH_2462MHz_RU106_Left_MIMO_NTNV

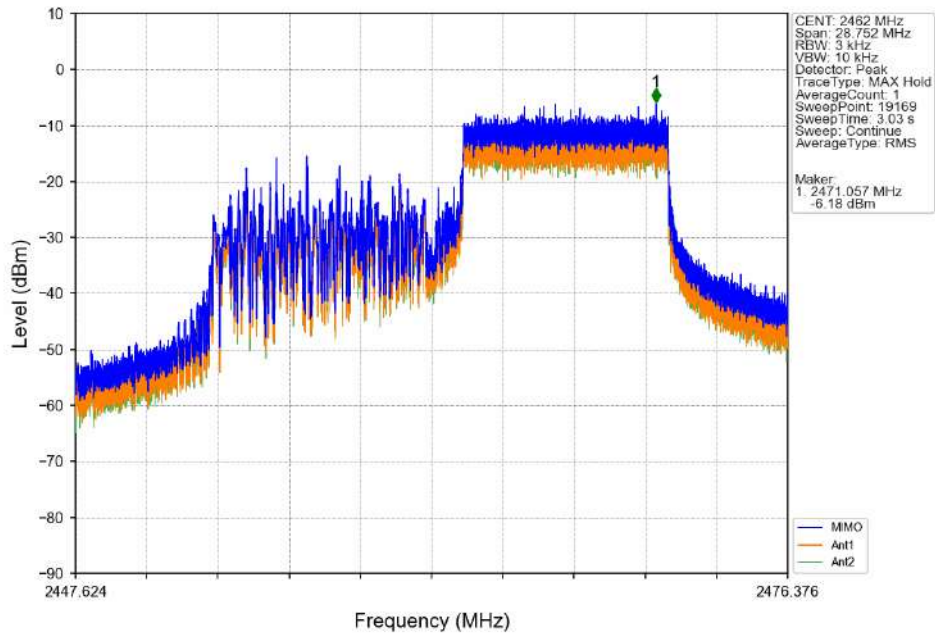


802.11ax(HEW20)_HCH_2462MHz_SU_/_Ant6 (MIMO)_NTNV

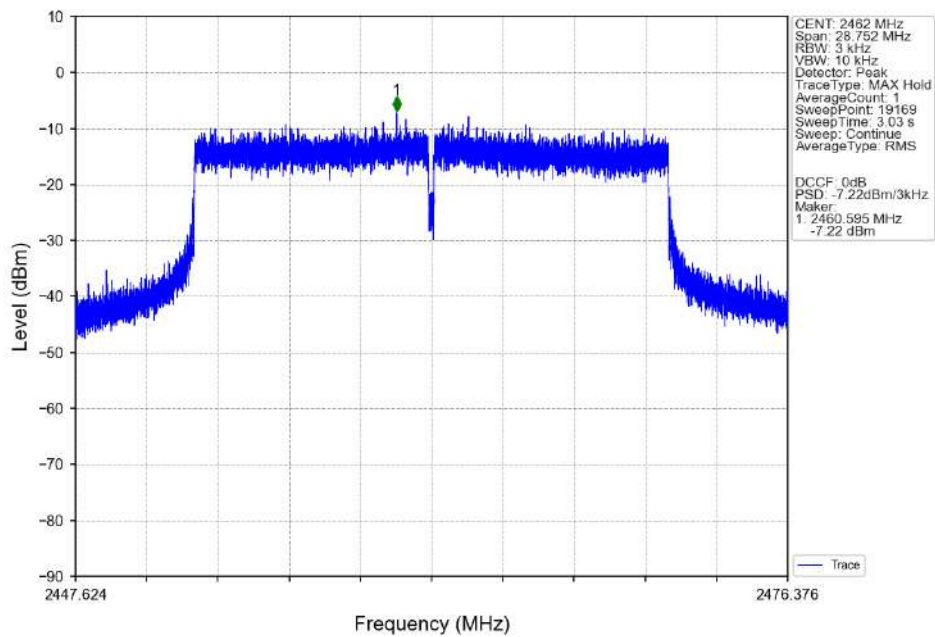


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant3 (MIMO)_NTNV

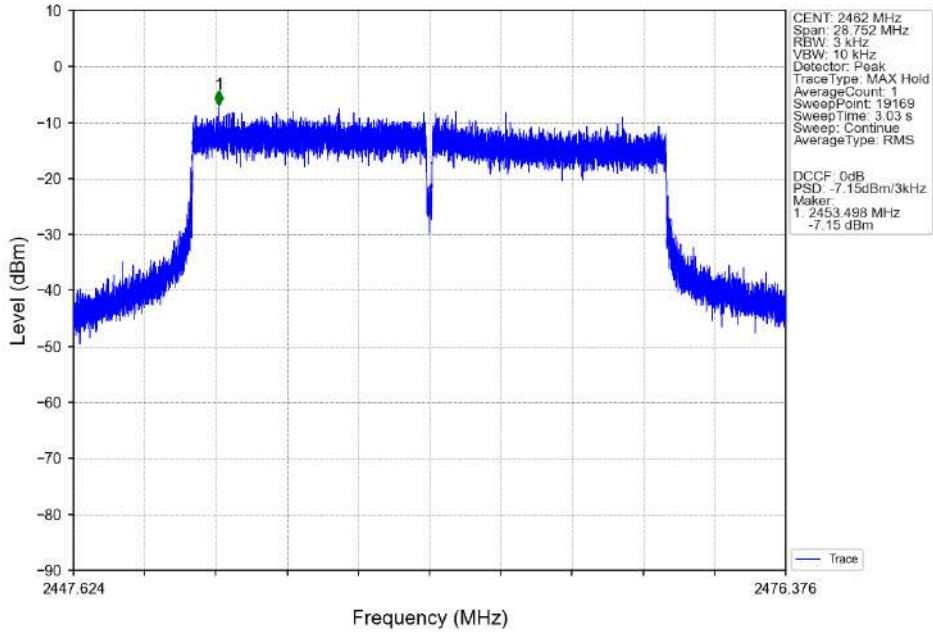


802.11ax(HEW20)_HCH_2462MHz_SU_ / _MIMO_NTNV

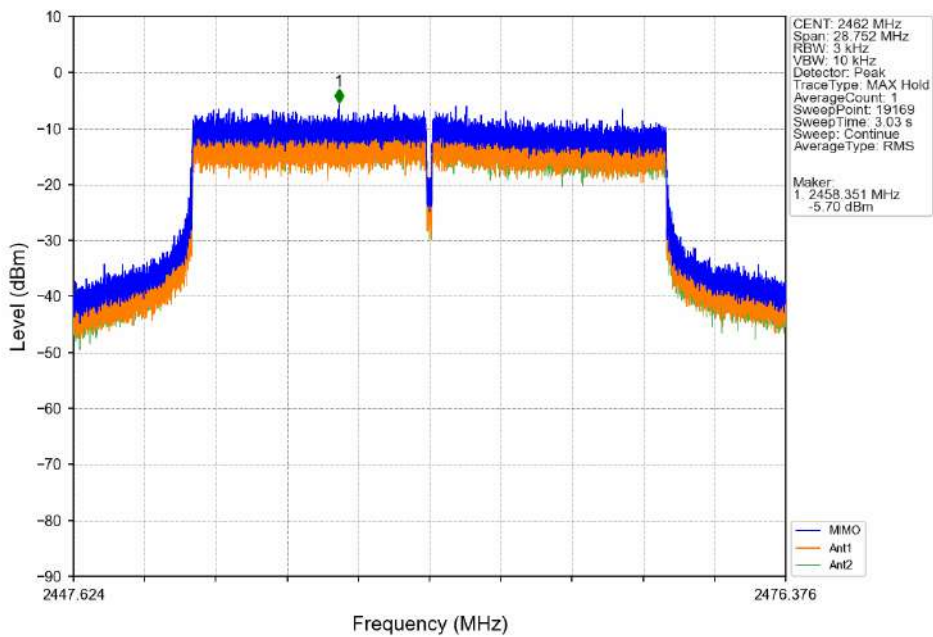


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant6 (MIMO)_NTNV

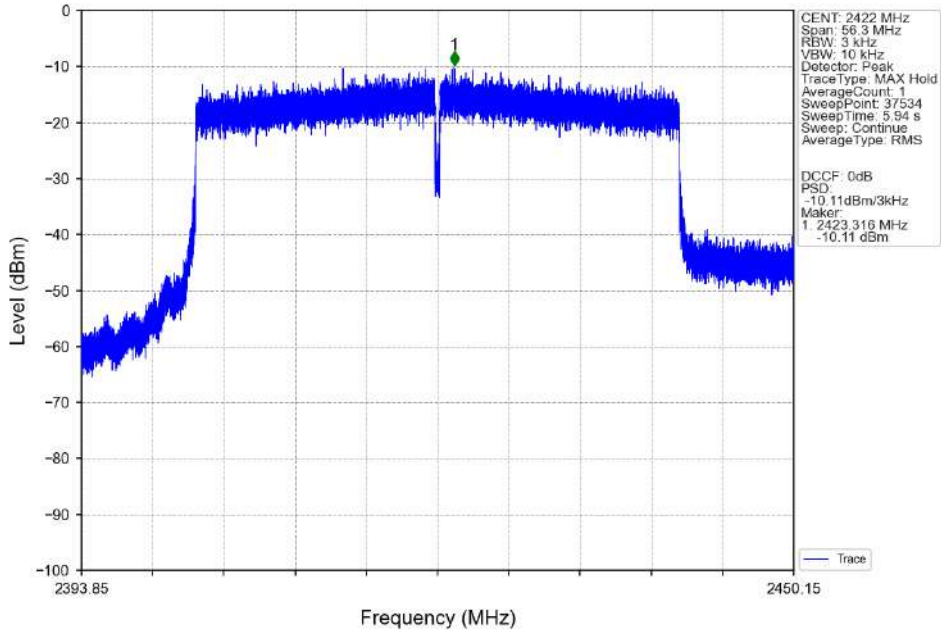


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant3 (MIMO)_NTNV

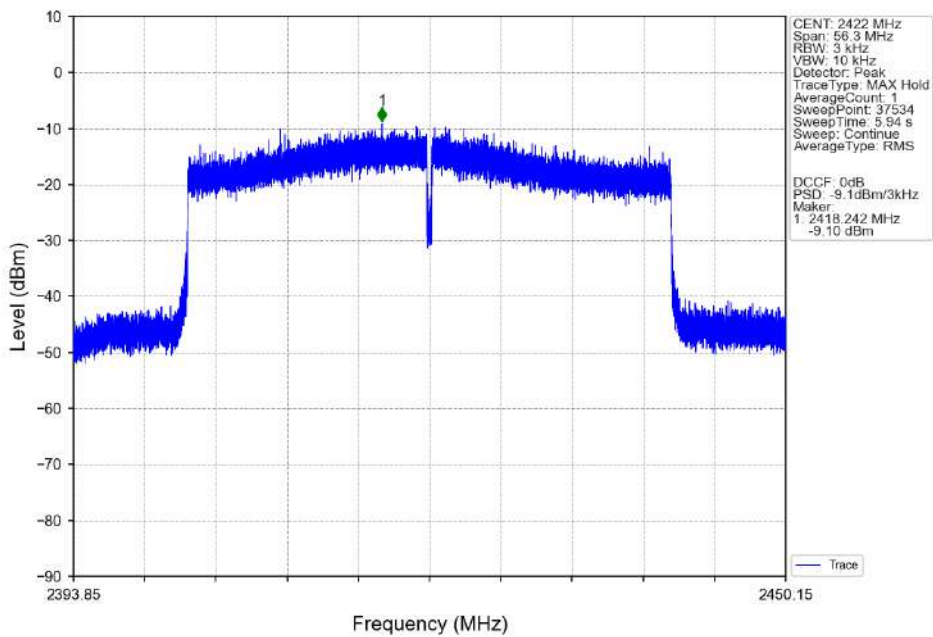


802.11ax(HEW40)_LCH_2422MHz_SU_/_MIMO_NTNV

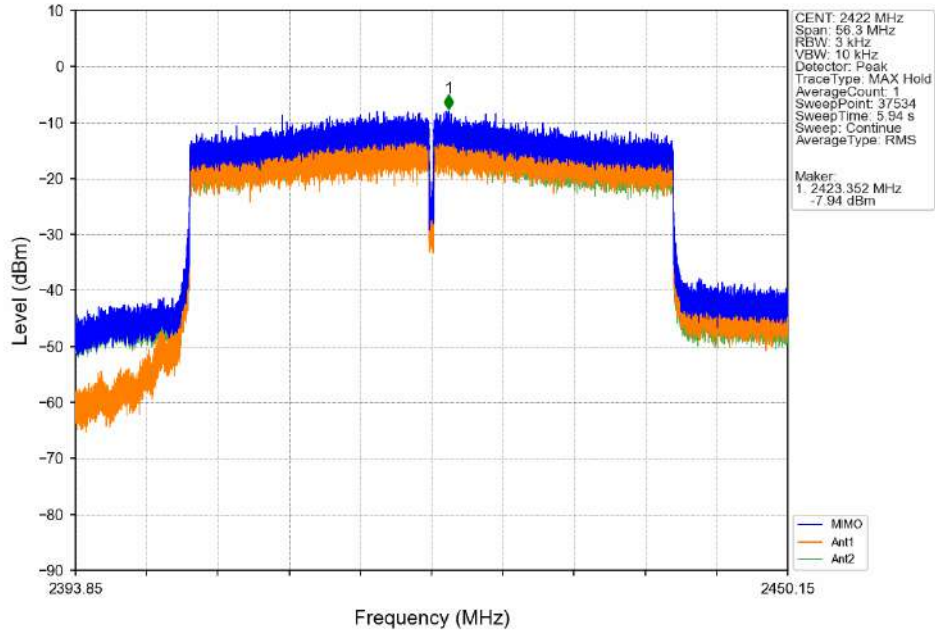


802.11ax(HEW40)_MCH_2437MHz_SU_/_Ant6 (MIMO)_NTNV

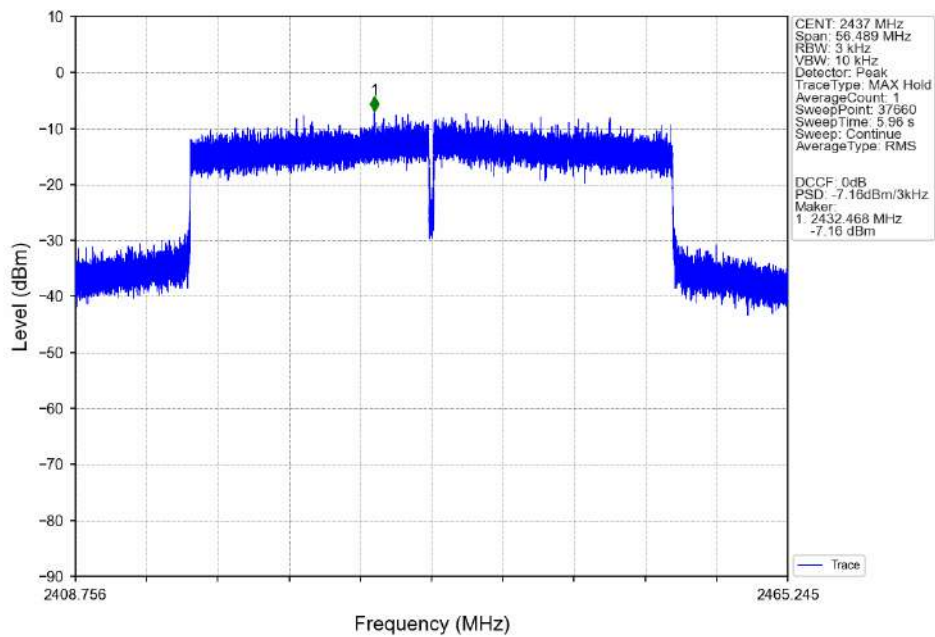


802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant3 (MIMO)_NTNV

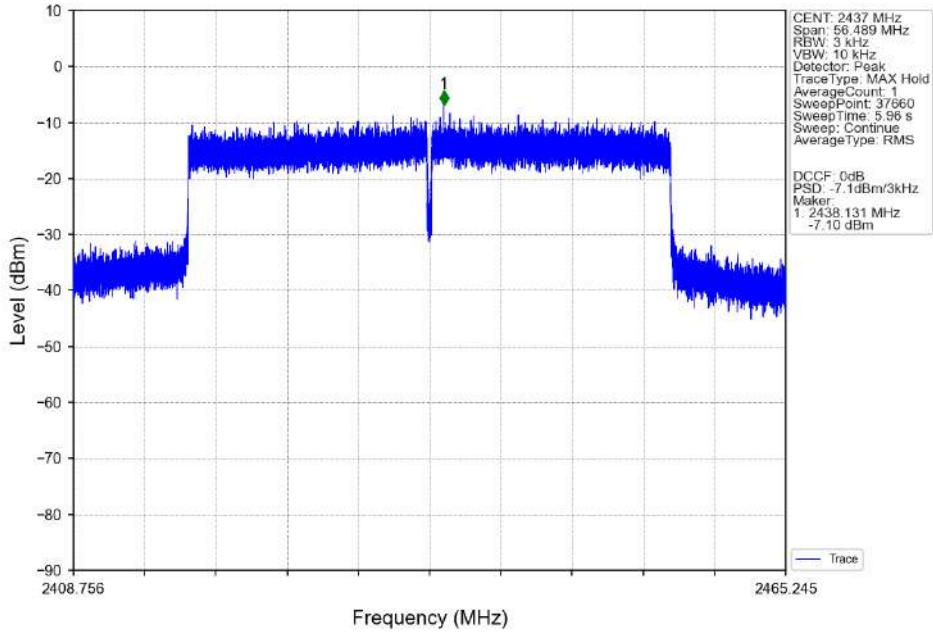


802.11ax(HEW40)_MCH_2437MHz_SU_ / _MIMO_NTNV

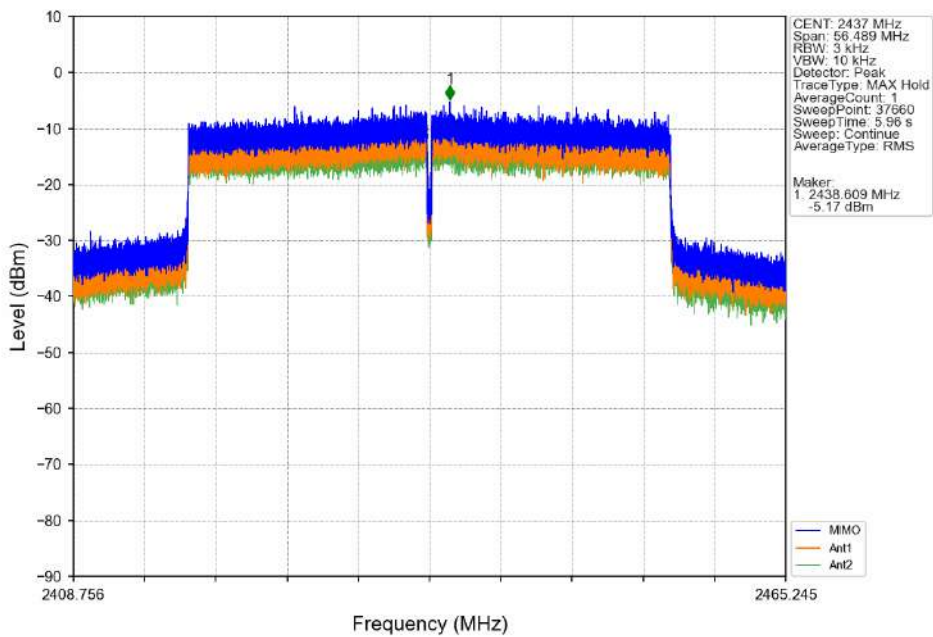


802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant6 (MIMO)_NTNV

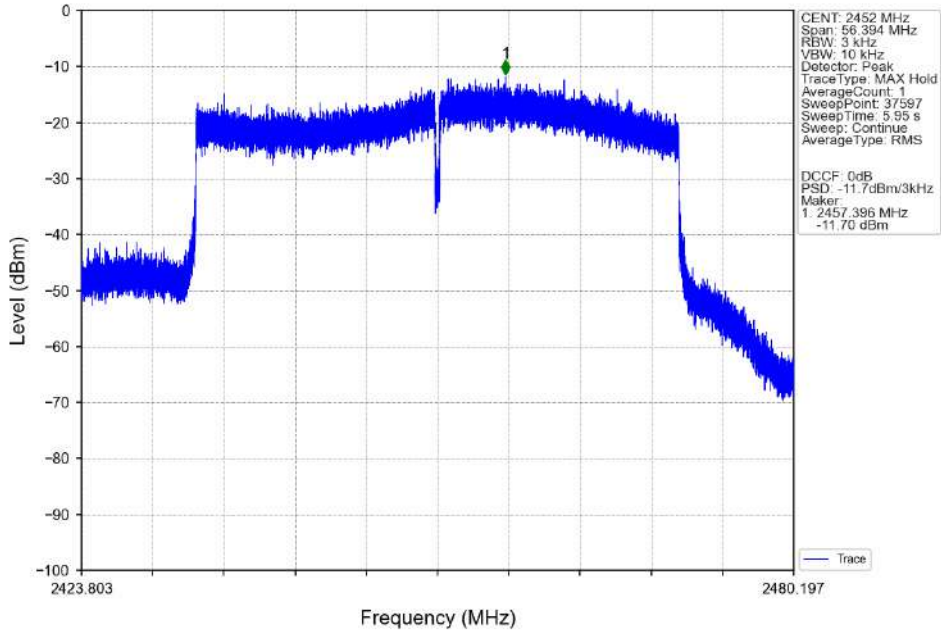

802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant3 (MIMO)_NTNV

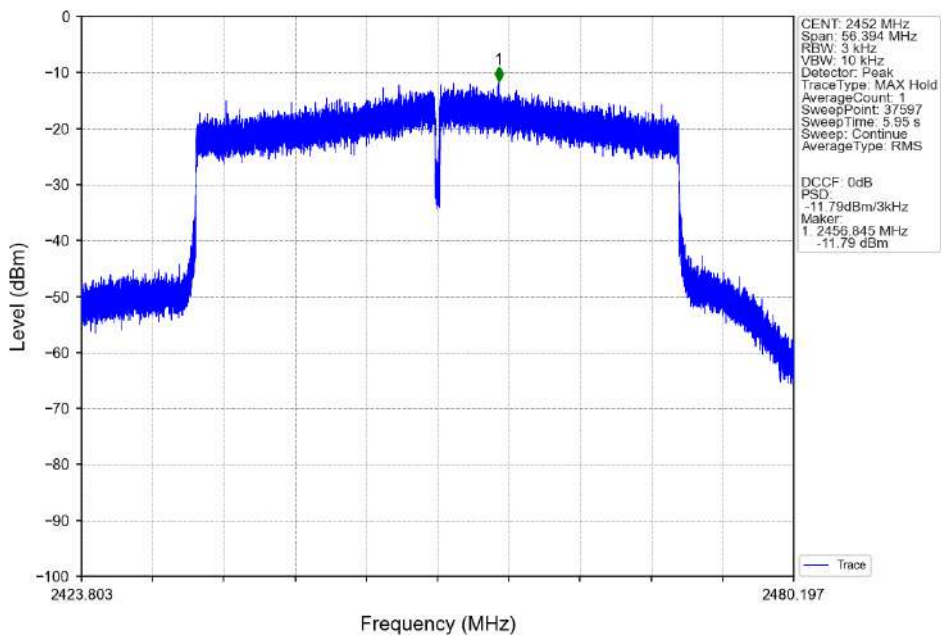

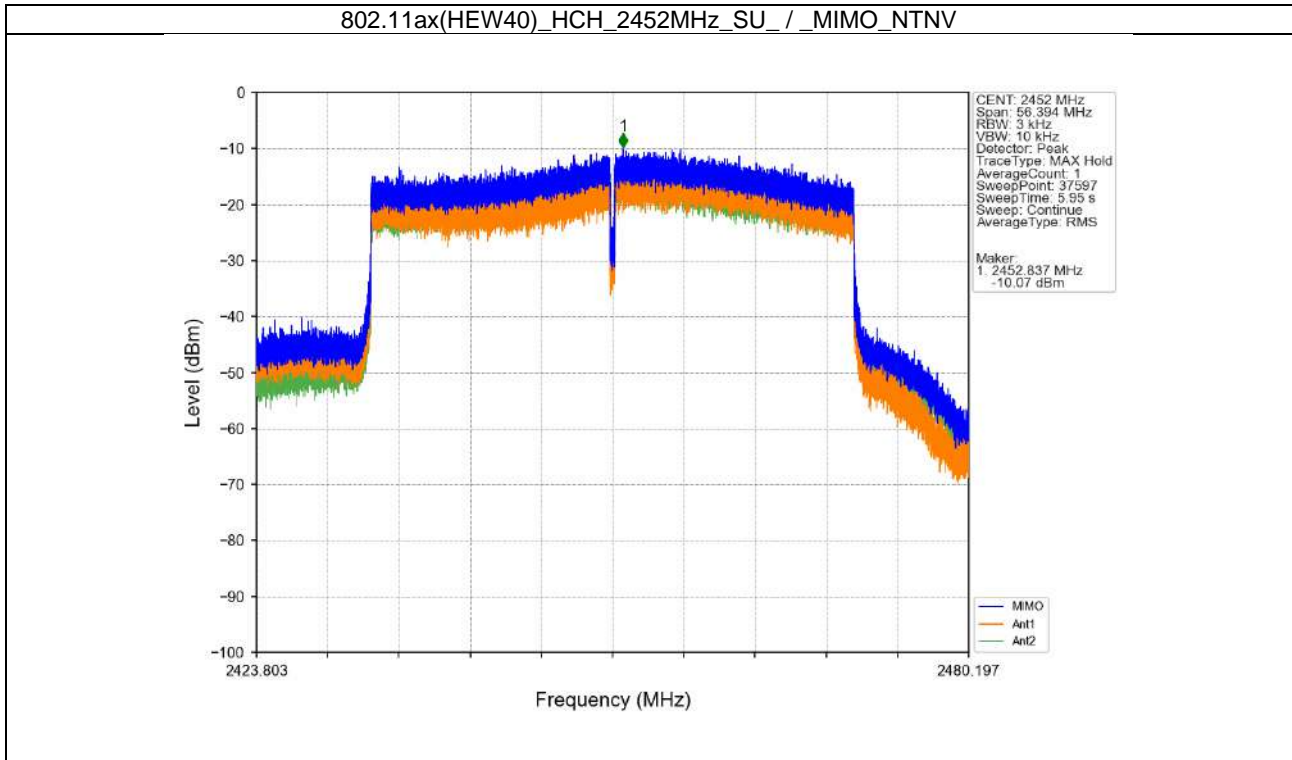

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	RU	ANT	Level of Reference (dBm)
802.11b	MIMO	2412	/	6	12.54
				3	12.83
		2437	/	6	11.79
				3	11.73
		2462	/	6	12.07
				3	12.47
802.11g	MIMO	2412	/	6	5.27
				3	5.70
		2437	/	6	7.54
				3	6.68
		2462	/	6	4.53
				3	4.81
802.11ax (HEW20)	MIMO	2412	SU	6	5.61
				3	5.76
		2437	SU	6	8.24
				3	7.03
		2462	SU	6	4.55
				3	4.72
802.11ax (HEW40)	MIMO	2422	SU	6	2.24
				3	2.90
		2437	SU	6	5.78
				3	4.05
		2452	SU	6	1.38
				3	1.18

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	RU	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
802.11b	MIMO	2412	/	6	12.54	-7.46	Pass
				3	12.83	-7.17	Pass
		2437	/	6	12.54	-7.46	Pass
				3	12.83	-7.17	Pass
		2462	/	6	12.54	-7.46	Pass
				3	12.83	-7.17	Pass
802.11g	MIMO	2412	/	6	7.54	-12.46	Pass
				3	6.68	-13.32	Pass
		2437	/	6	7.54	-12.46	Pass
				3	6.68	-13.32	Pass
		2462	/	6	7.54	-12.46	Pass
				3	6.68	-13.32	Pass
802.11ax (HEW20)	MIMO	2412	SU	6	8.24	-11.76	Pass
				3	7.03	-12.97	Pass
		2437	SU	6	8.24	-11.76	Pass
				3	7.03	-12.97	Pass
		2462	SU	6	8.24	-11.76	Pass
				3	7.03	-12.97	Pass
802.11ax (HEW40)	MIMO	2422	SU	6	5.78	-14.22	Pass
				3	4.05	-15.95	Pass
		2437	SU	6	5.78	-14.22	Pass
				3	4.05	-15.95	Pass
		2452	SU	6	5.78	-14.22	Pass
				3	4.05	-15.95	Pass

5.2 Test Graph


5.2.1 Ref

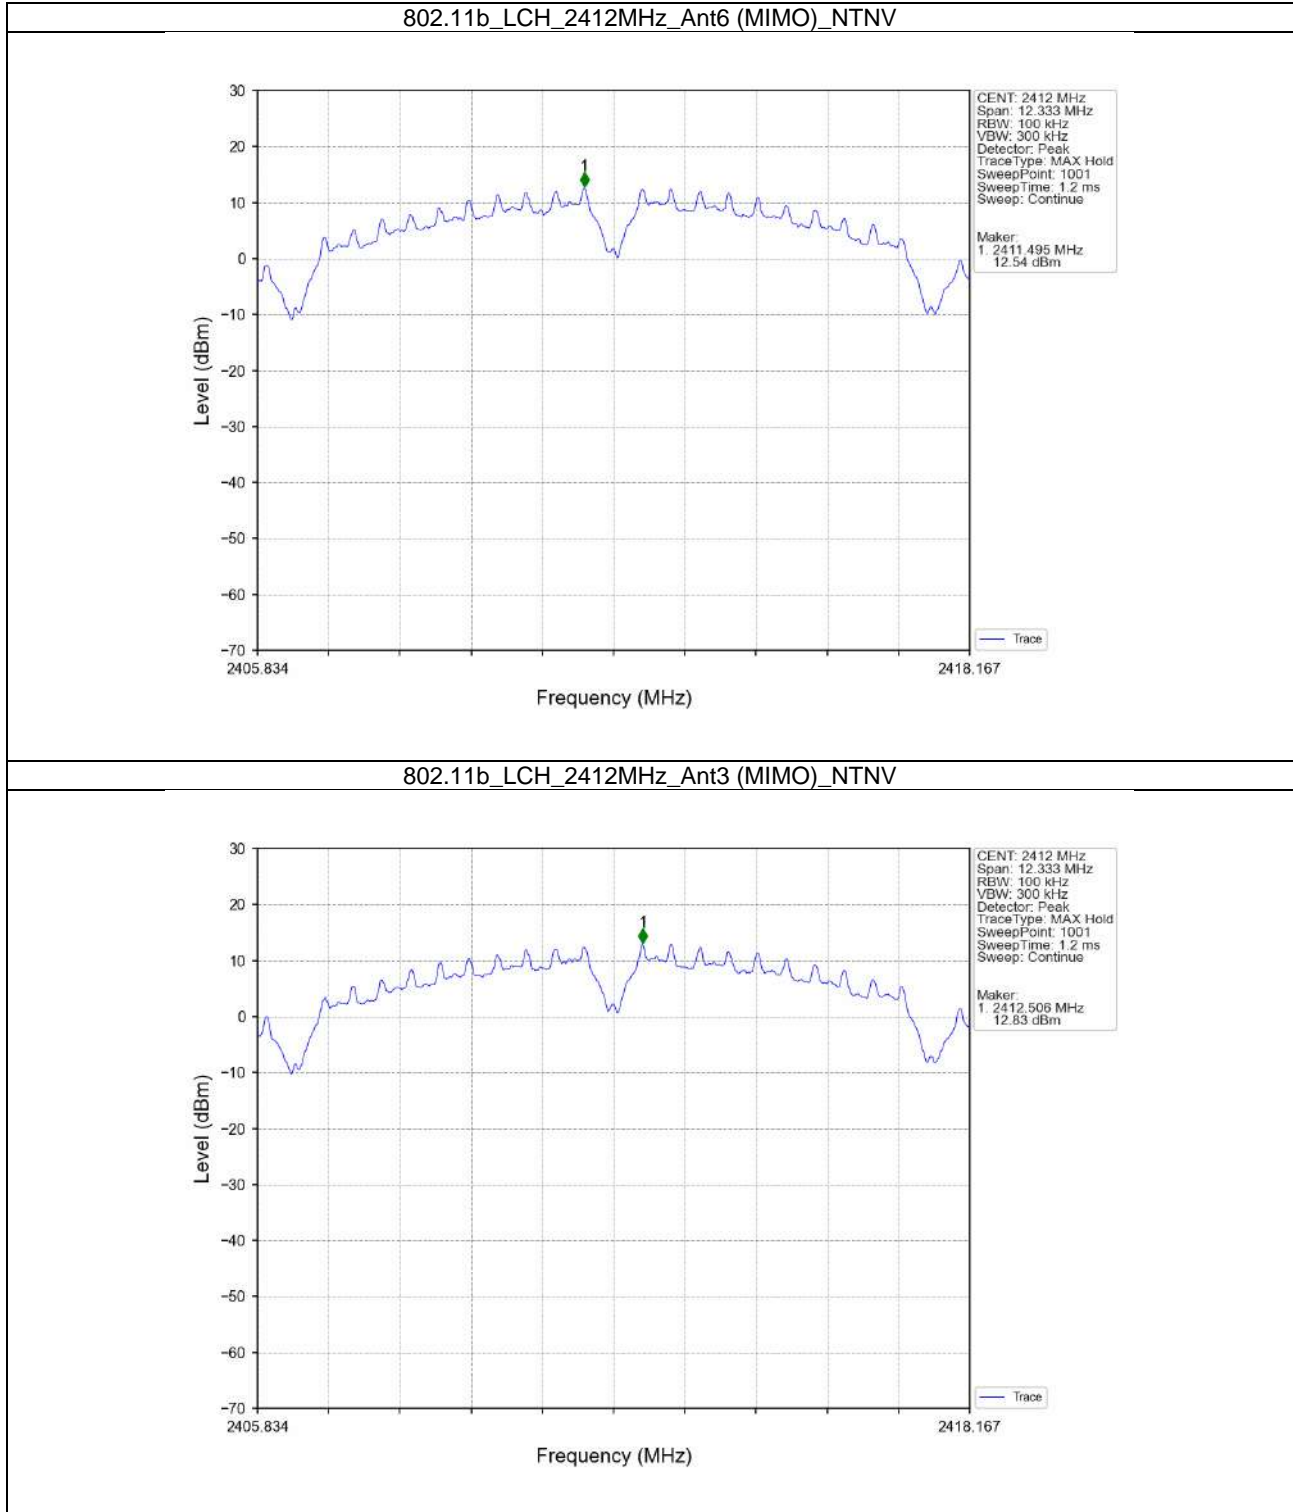


802.11b_MCH_2437MHz_Ant6 (MIMO)_NTNV

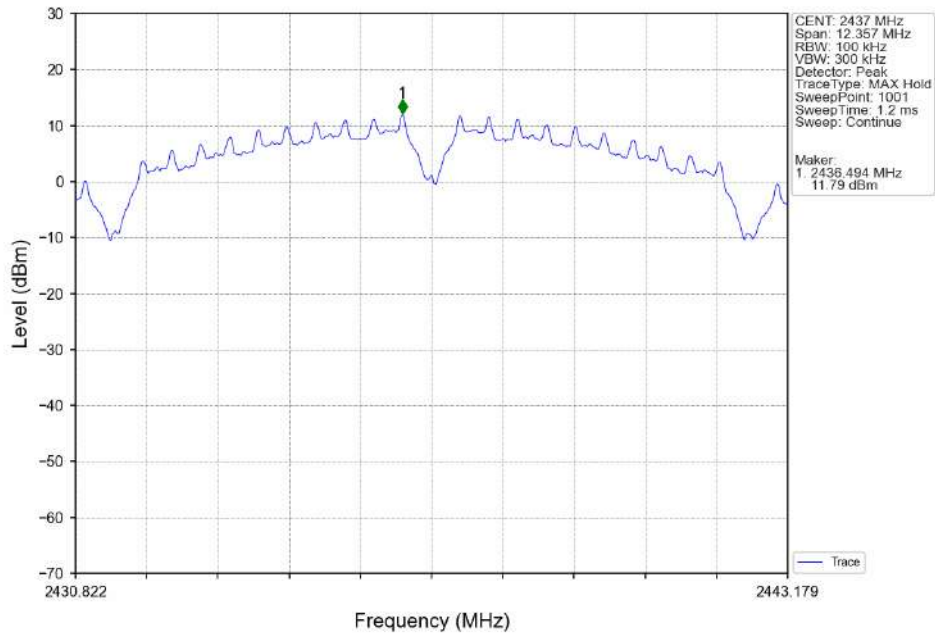


802.11b_MCH_2437MHz_Ant3 (MIMO)_NTNV

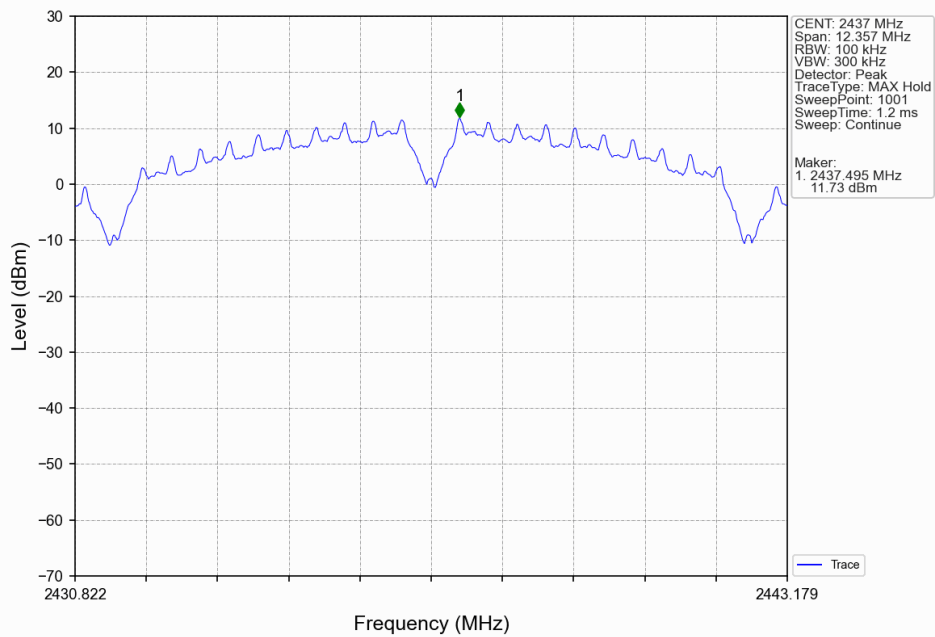


802.11b_HCH_2462MHz_Ant6 (MIMO)_NTNV

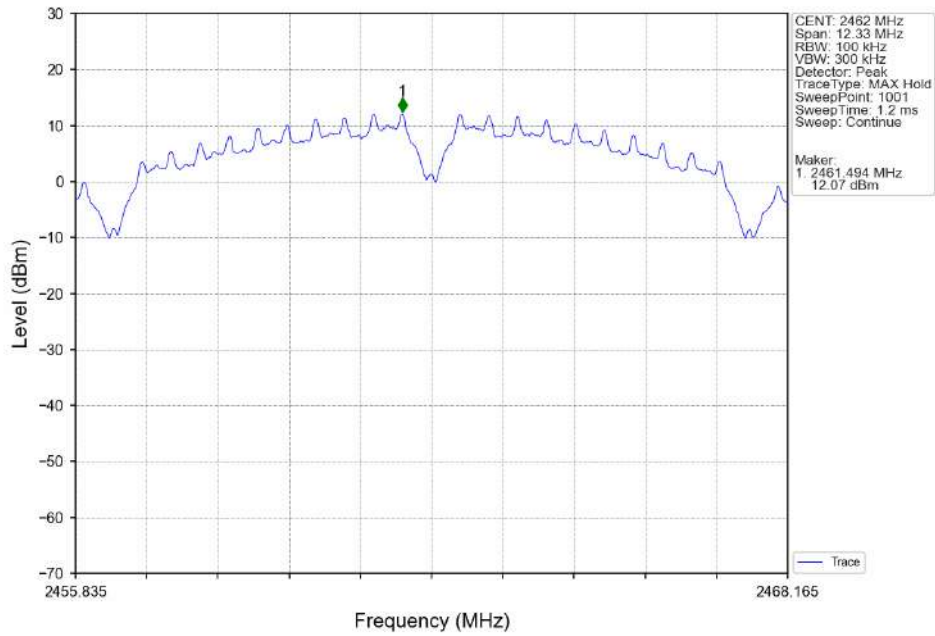


802.11b_HCH_2462MHz_Ant3 (MIMO)_NTNV

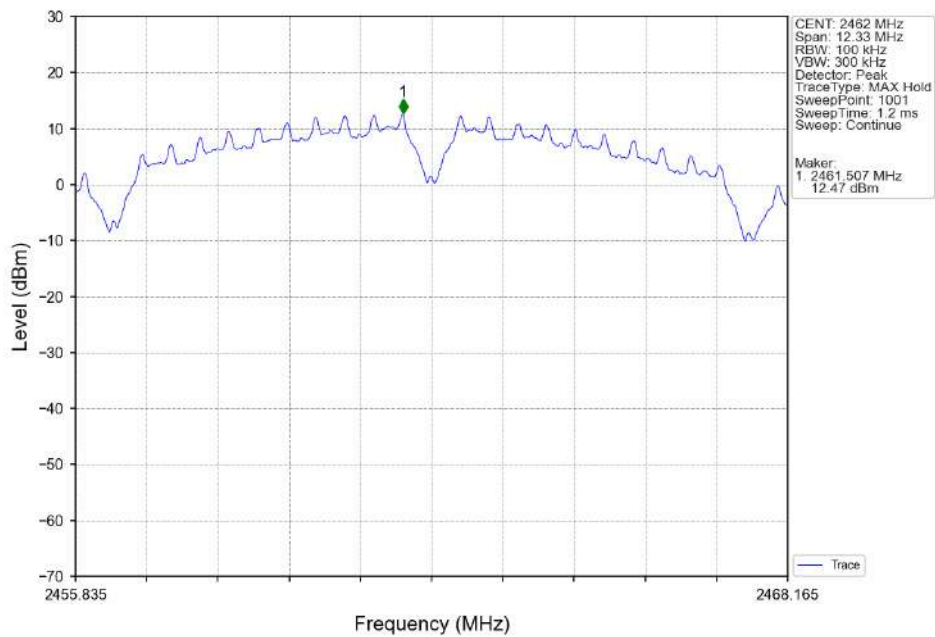


802.11g_LCH_2412MHz_Ant6 (MIMO)_NTNV

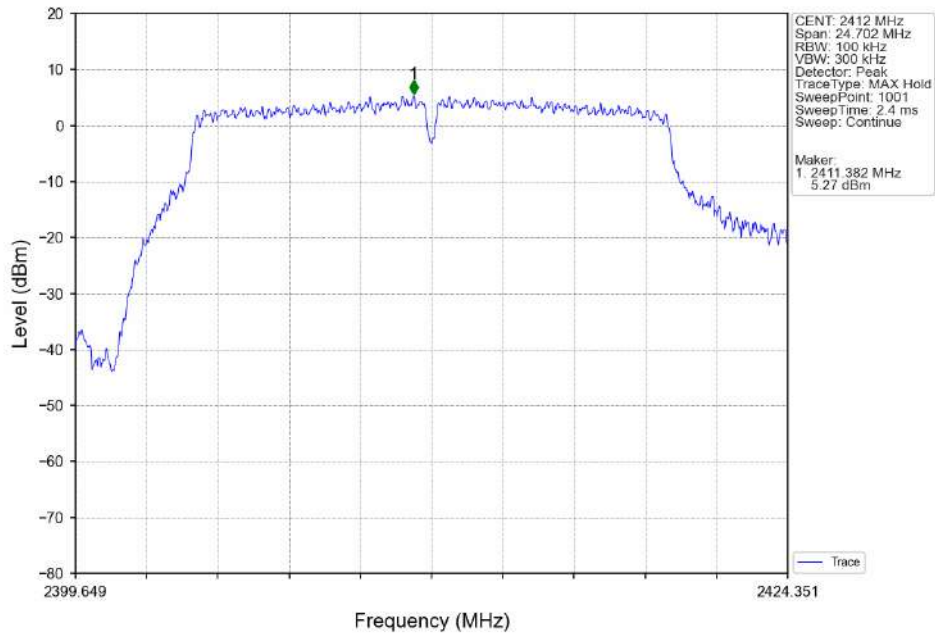


802.11g_LCH_2412MHz_Ant3 (MIMO)_NTNV

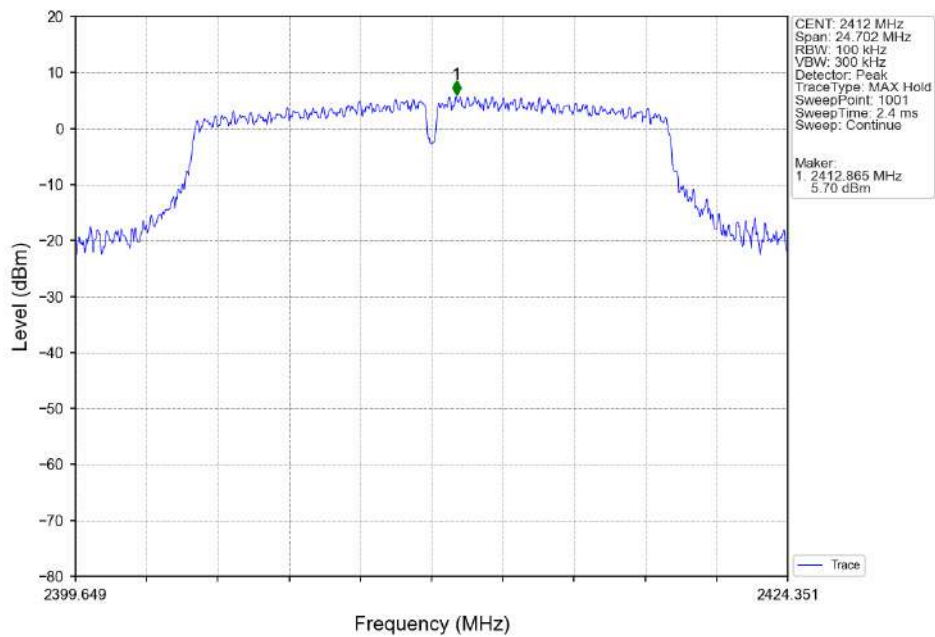


802.11g_MCH_2437MHz_Ant6 (MIMO)_NTNV

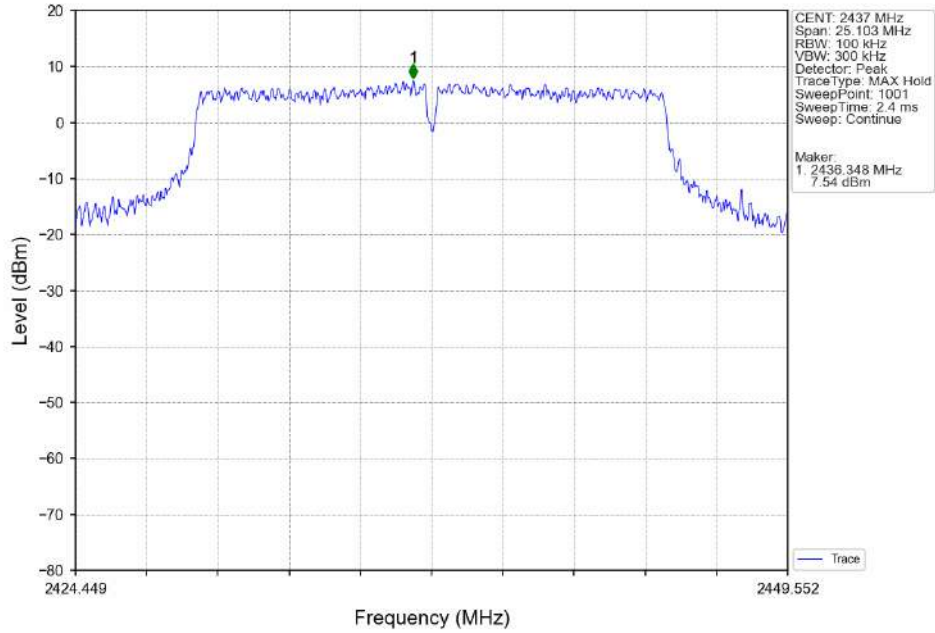


802.11g_MCH_2437MHz_Ant3 (MIMO)_NTNV

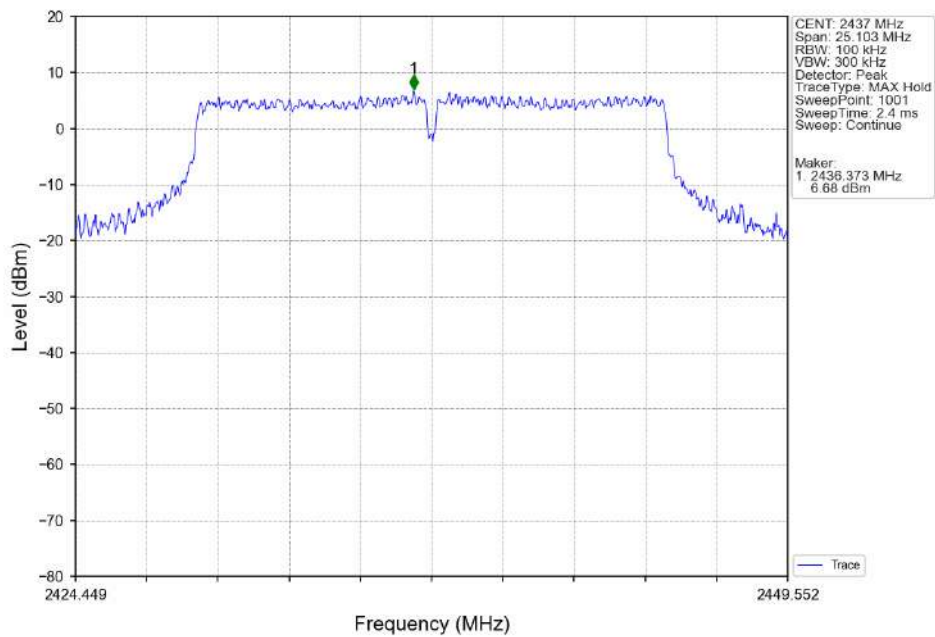


802.11g_HCH_2462MHz_Ant6 (MIMO)_NTNV

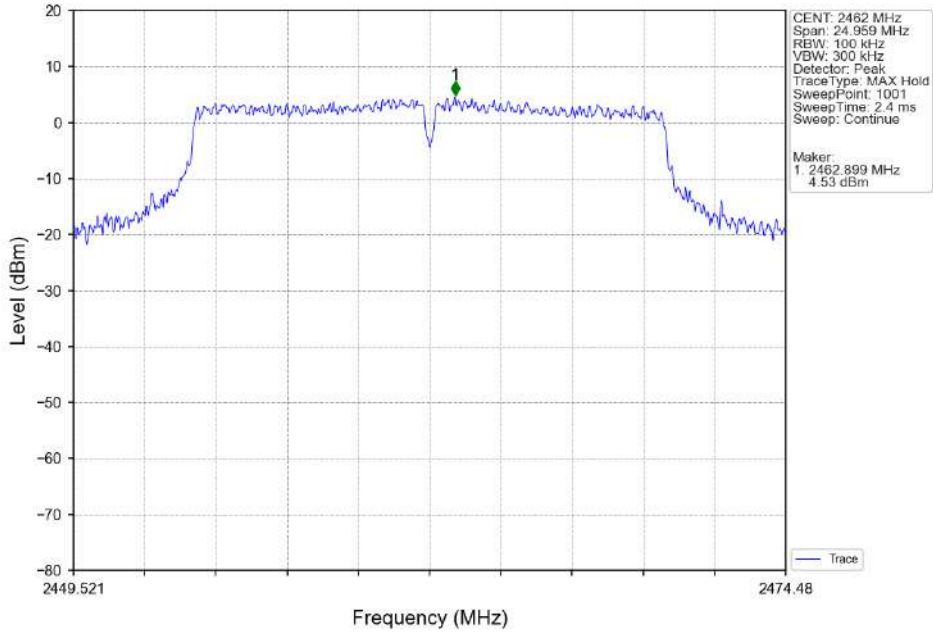


802.11g_HCH_2462MHz_Ant3 (MIMO)_NTNV

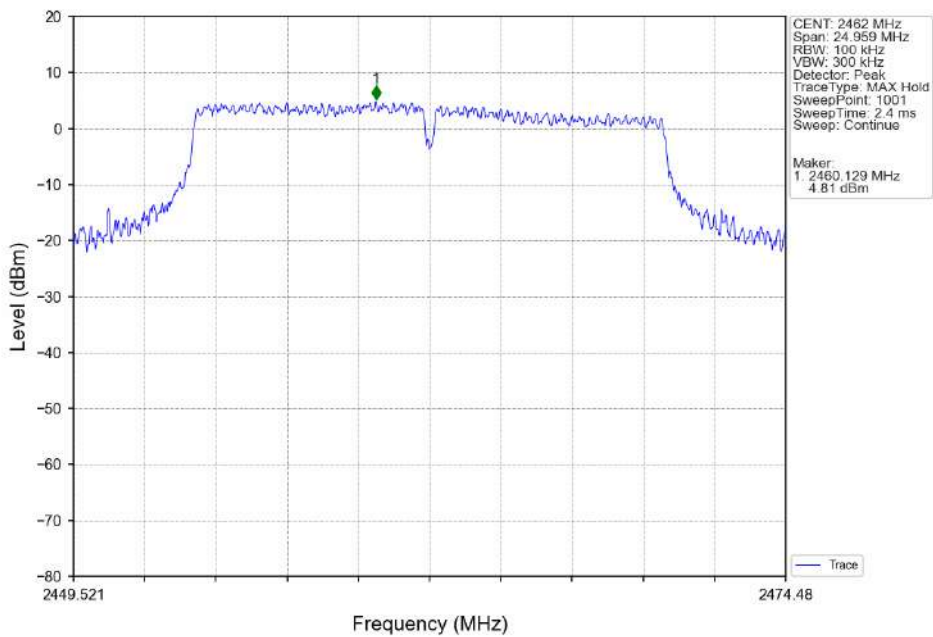


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant6 (MIMO)_NTNV

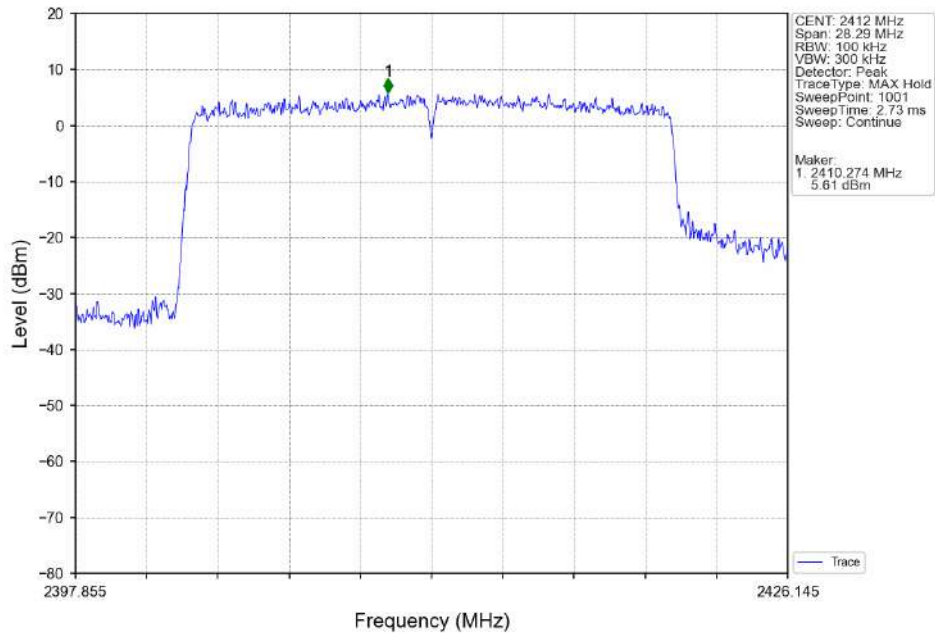


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant3 (MIMO)_NTNV

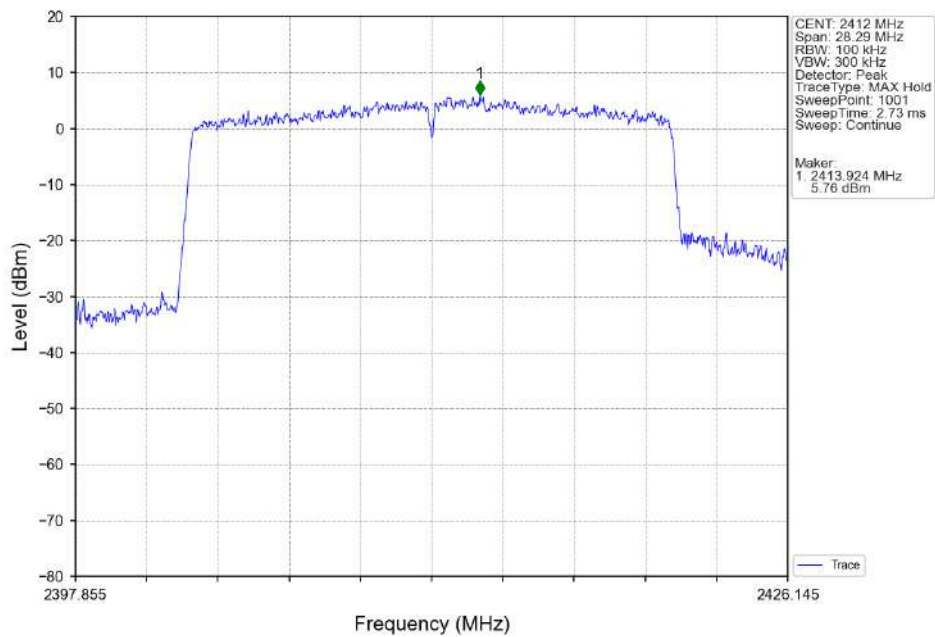


802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

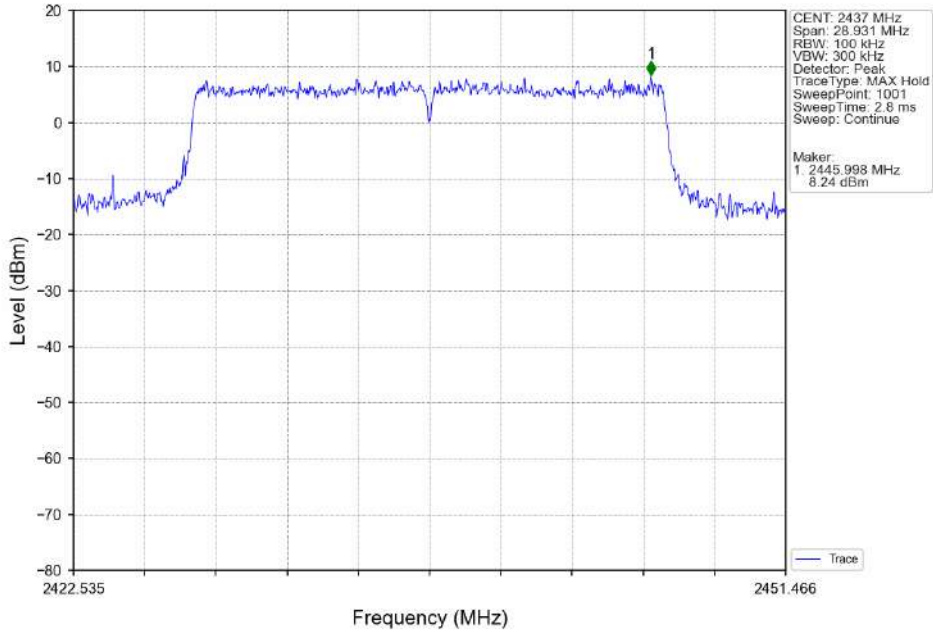


802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant3 (MIMO)_NTNV

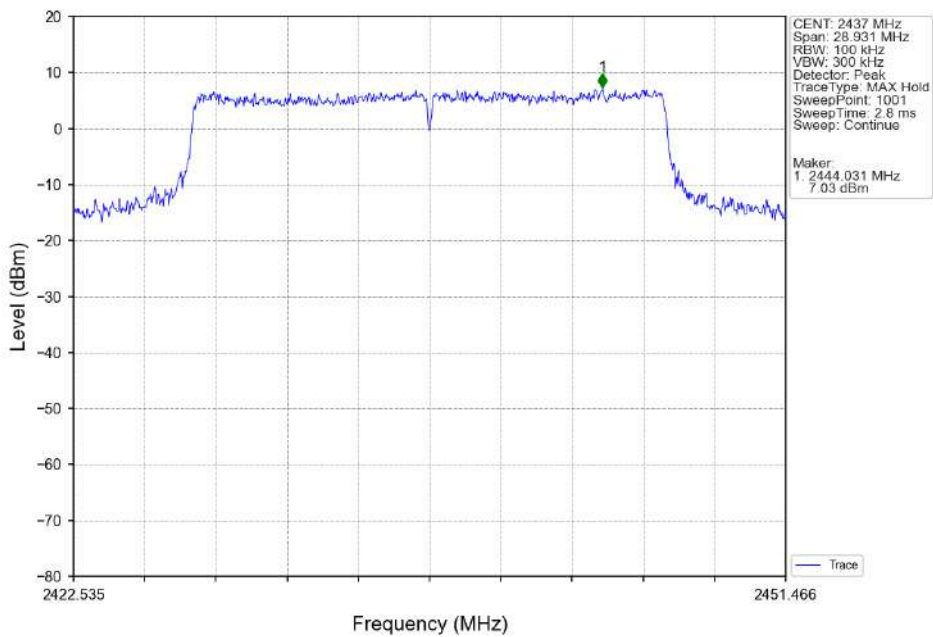


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant6 (MIMO)_NTNV

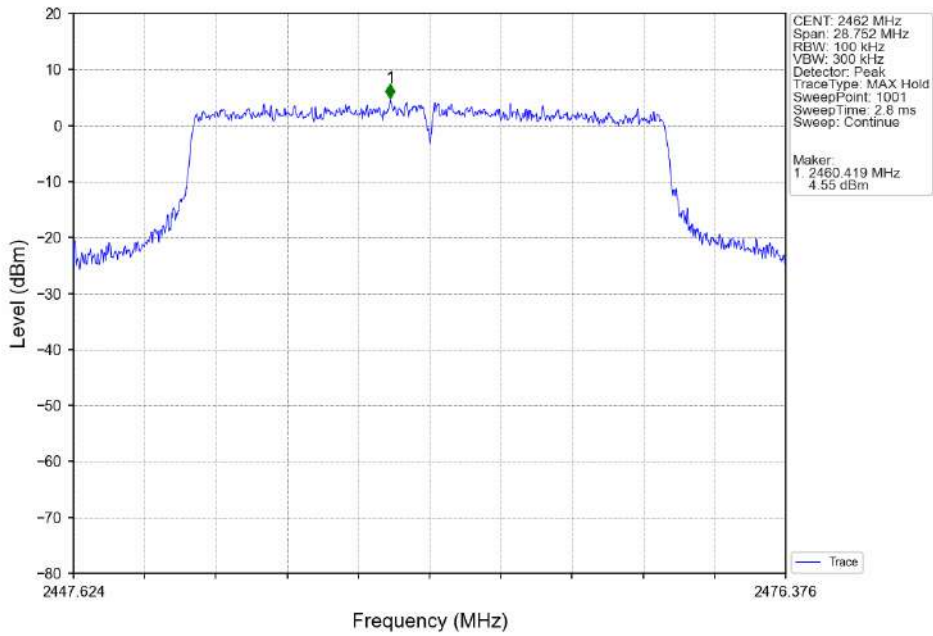


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant3 (MIMO)_NTNV

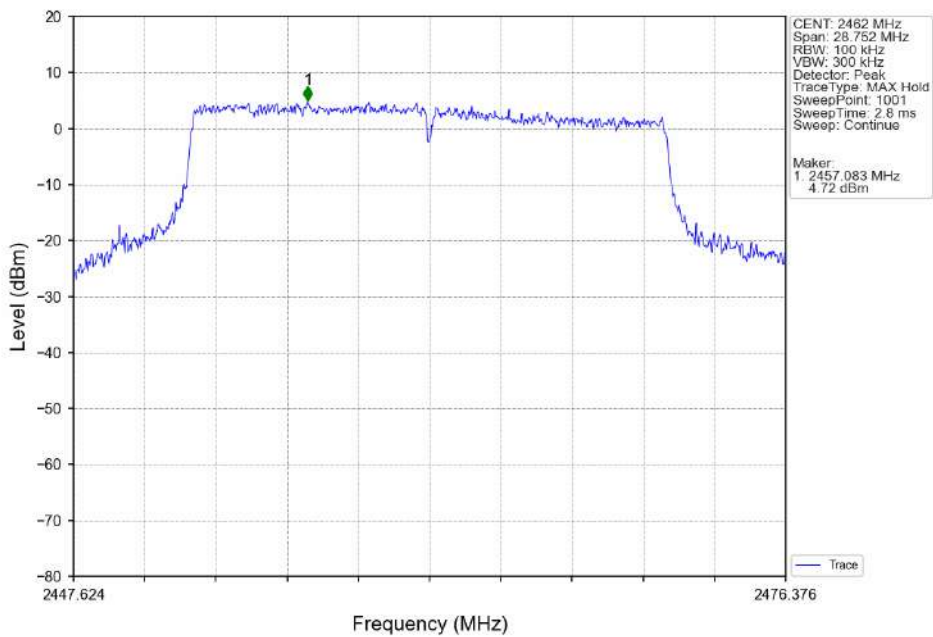


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant6 (MIMO)_NTNV

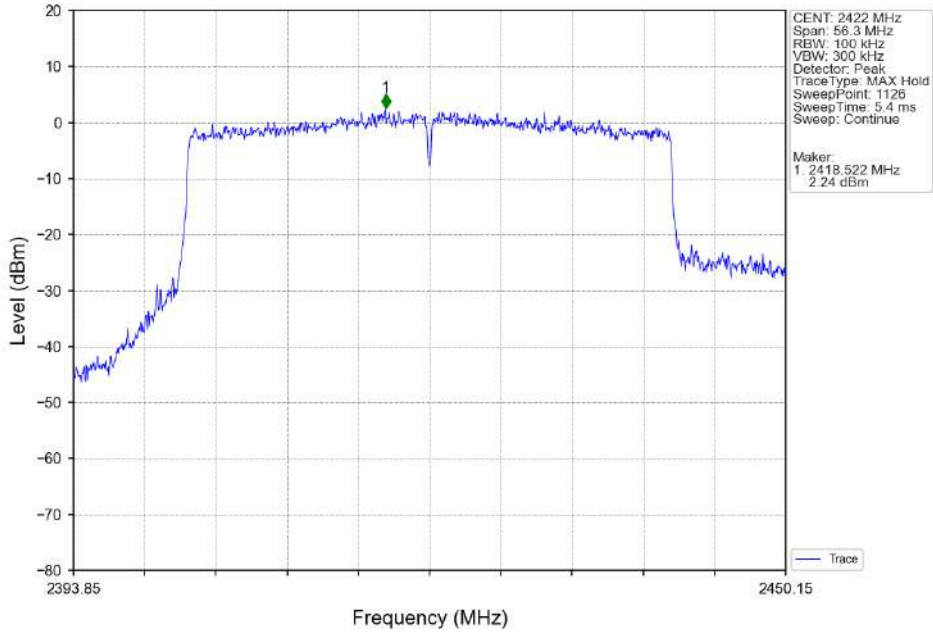


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant3 (MIMO)_NTNV

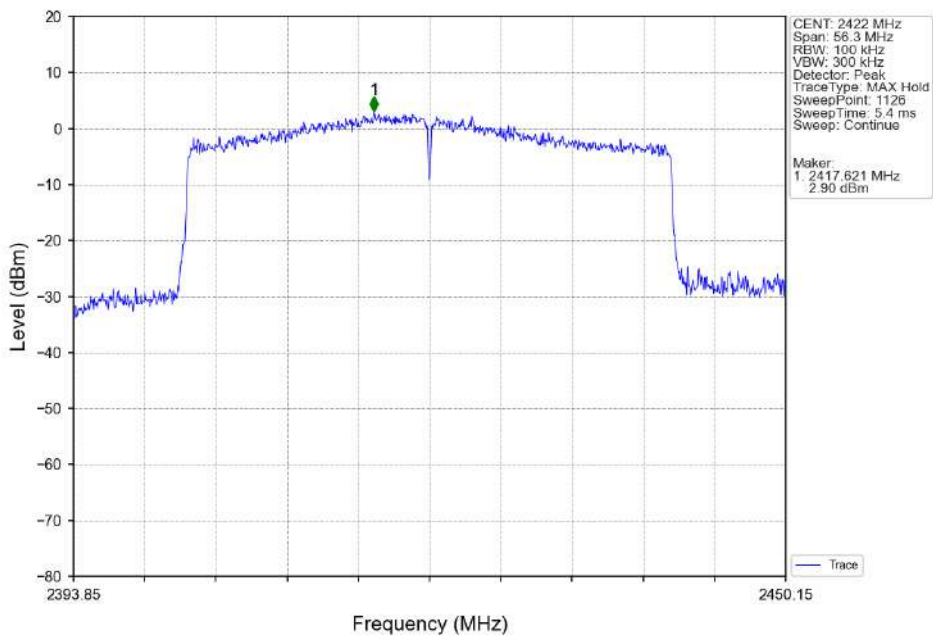

802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

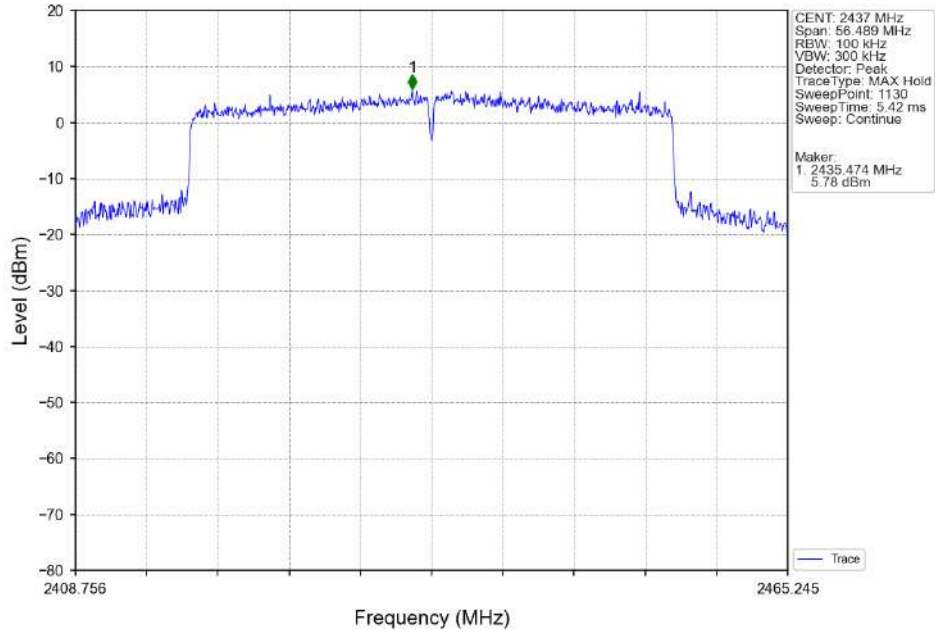

802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant3 (MIMO)_NTNV

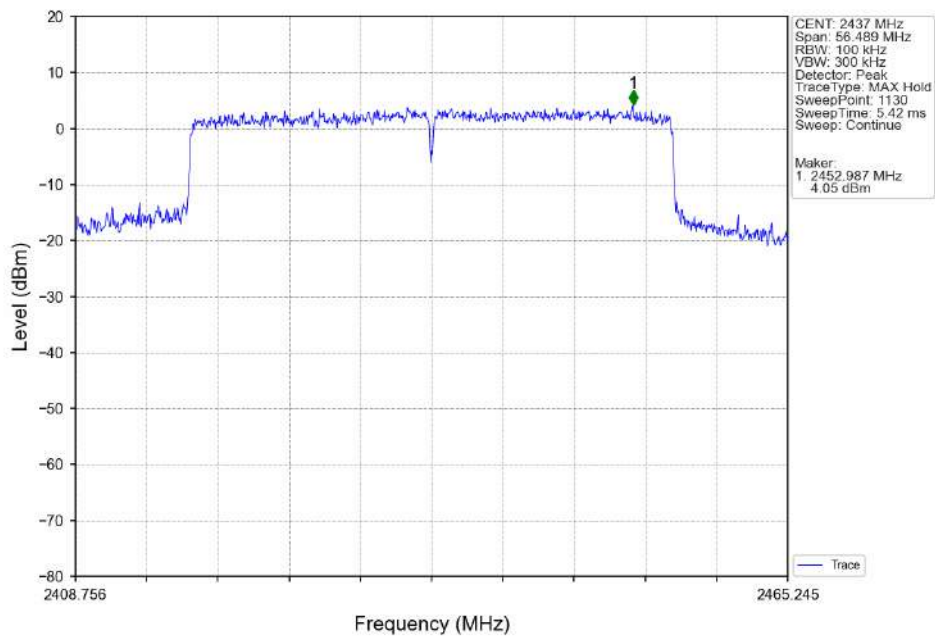


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304


Rev.: 01

Page: 90 of 226



802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant6 (MIMO)_NTNV

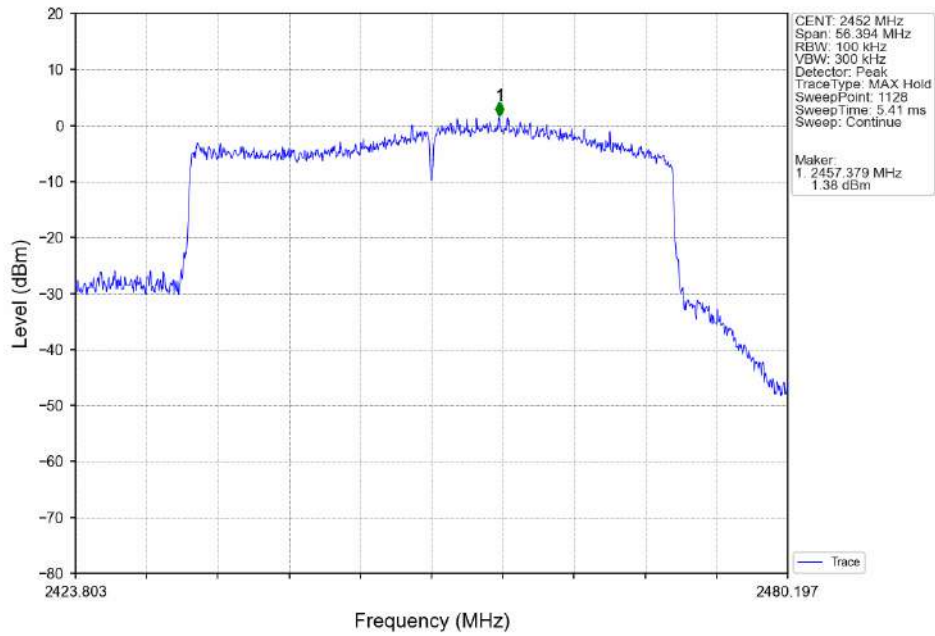


802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant3 (MIMO)_NTNV

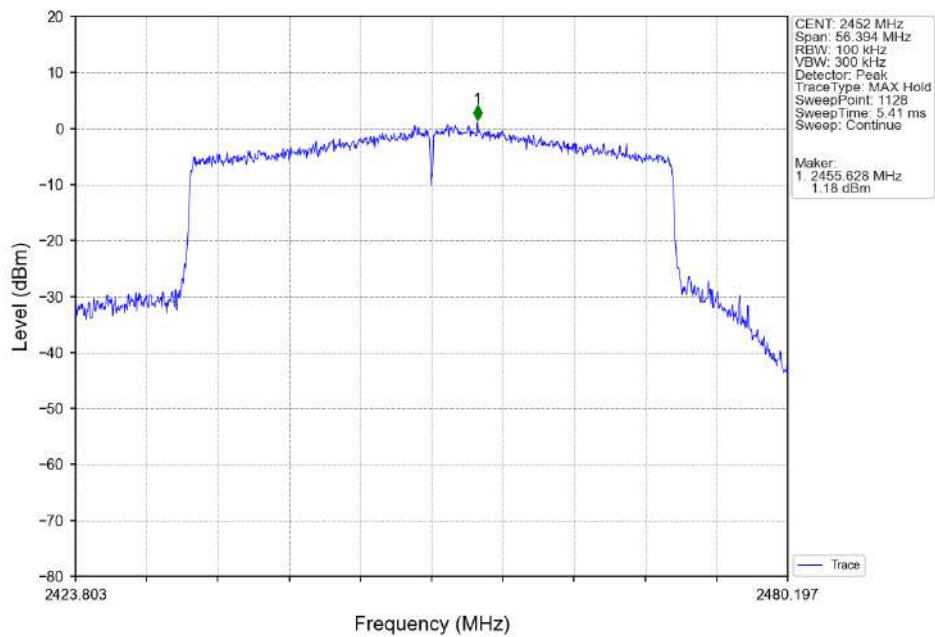


5.2.2 CSE

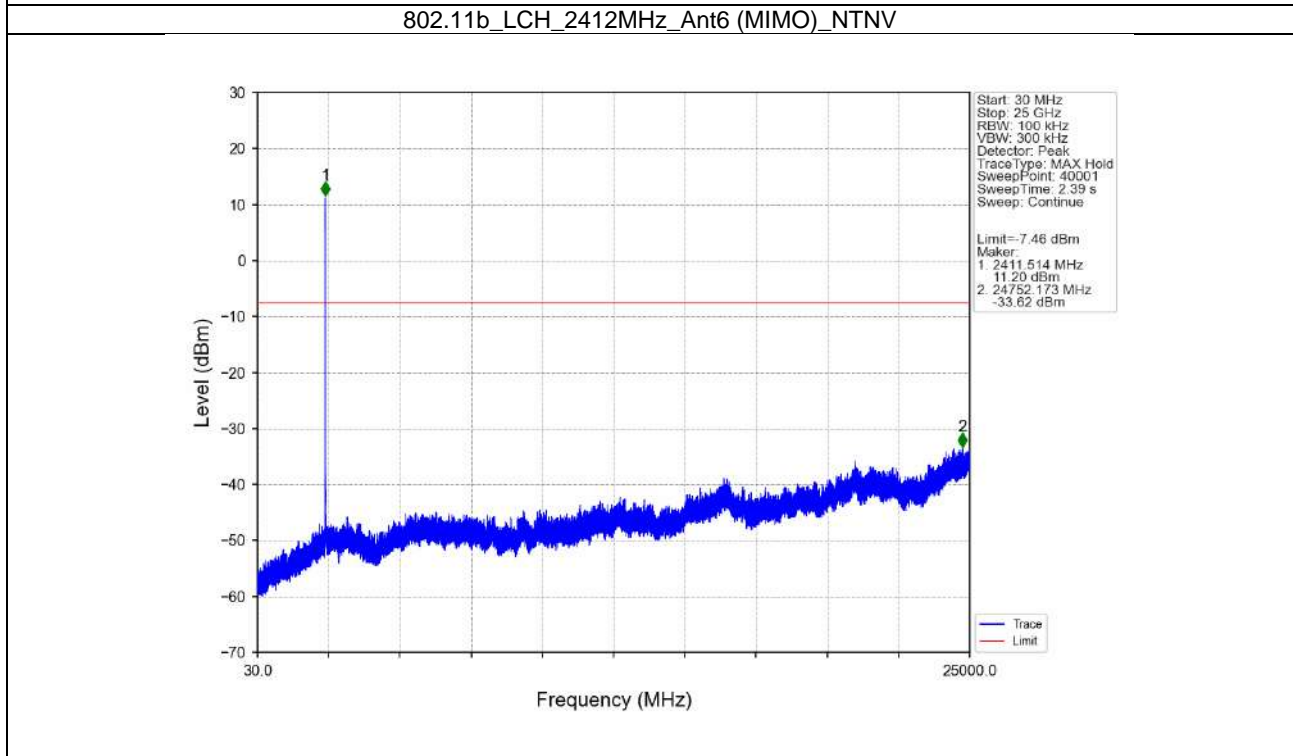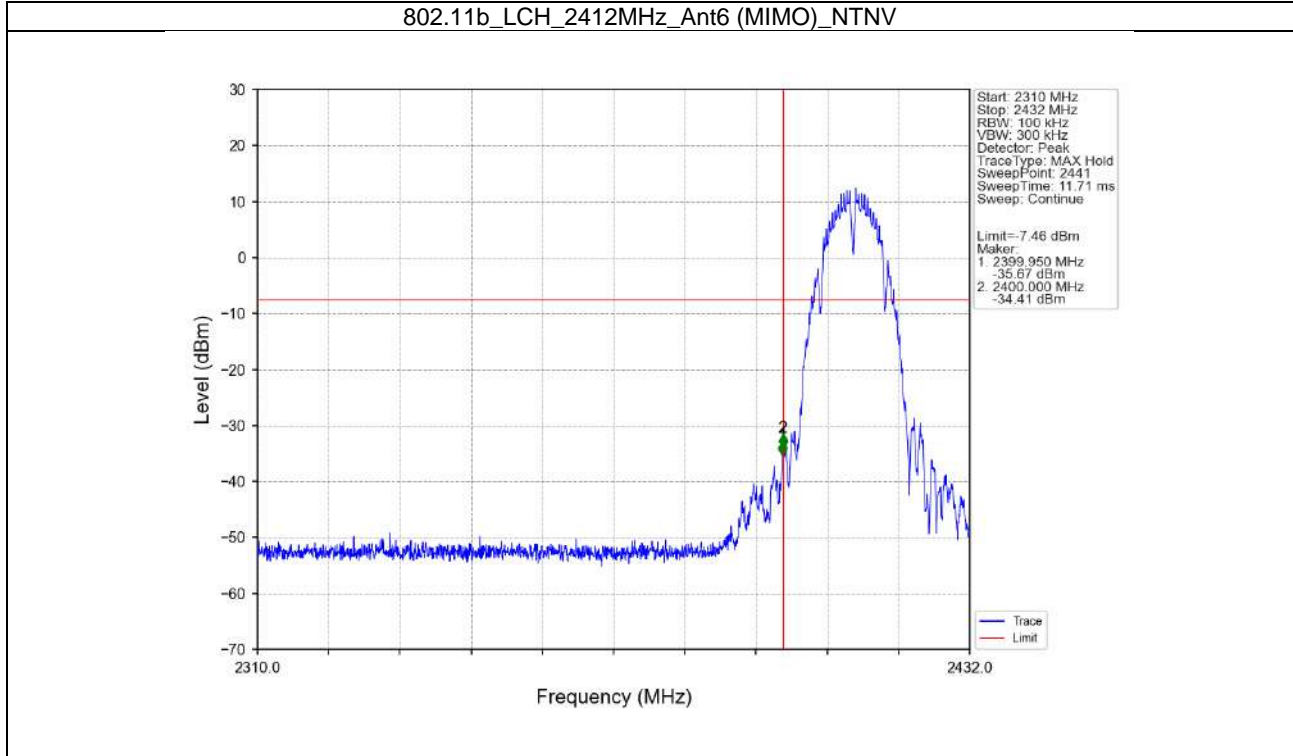


802.11b_LCH_2412MHz_Ant3 (MIMO)_NTNV

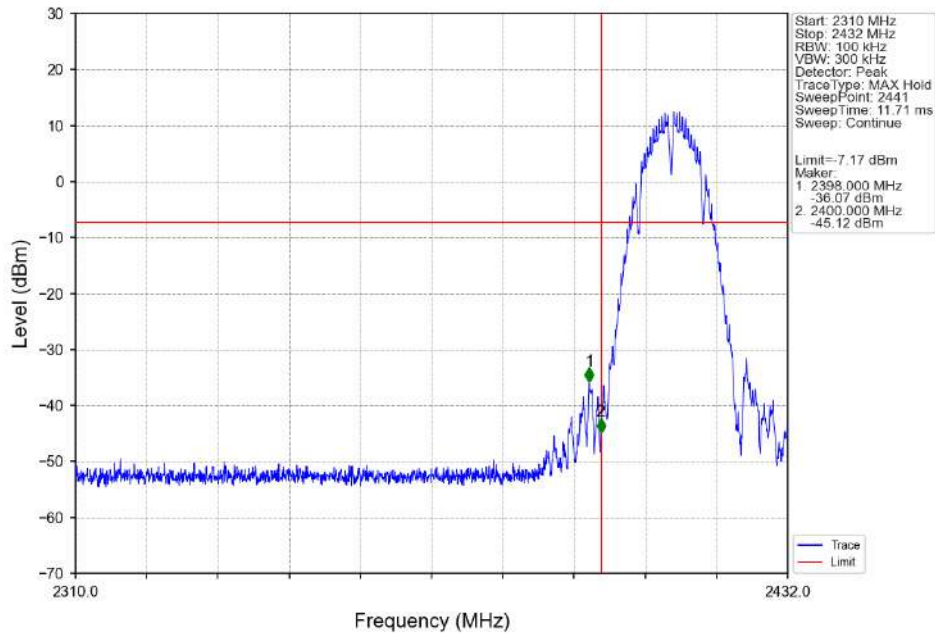


802.11b_LCH_2412MHz_Ant3 (MIMO)_NTNV

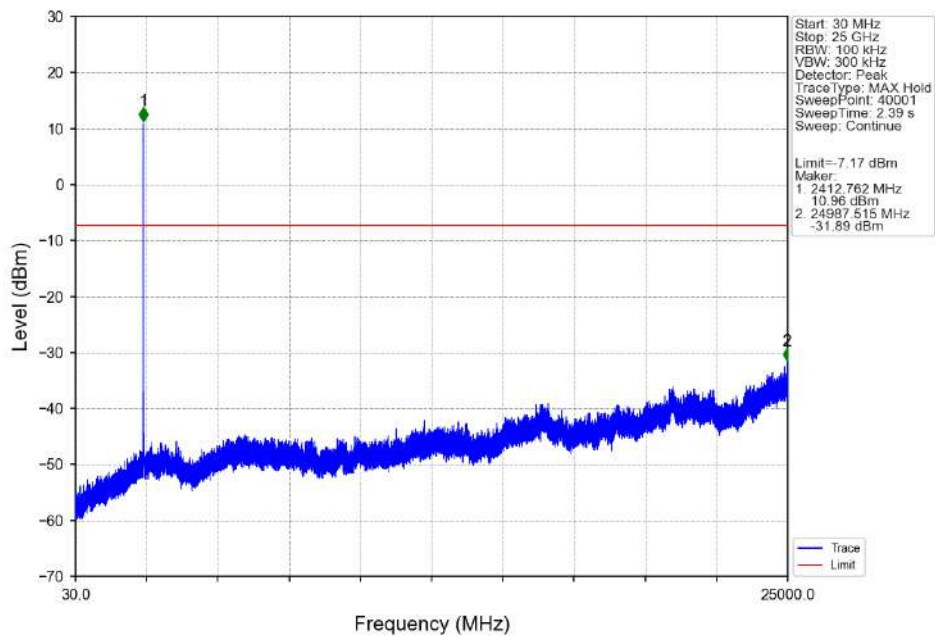


802.11b_MCH_2437MHz_Ant6 (MIMO)_NTNV

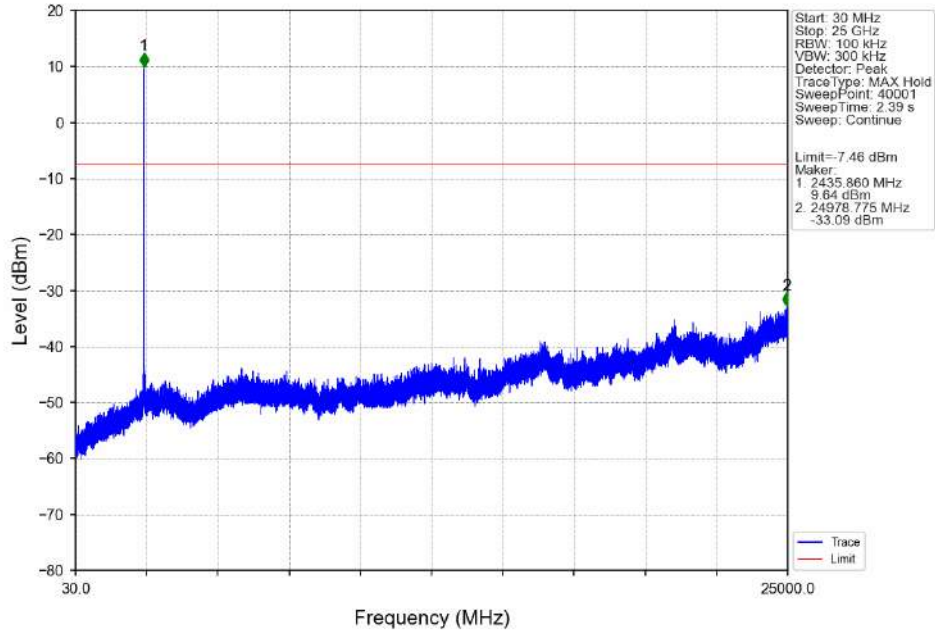


802.11b_MCH_2437MHz_Ant3 (MIMO)_NTNV

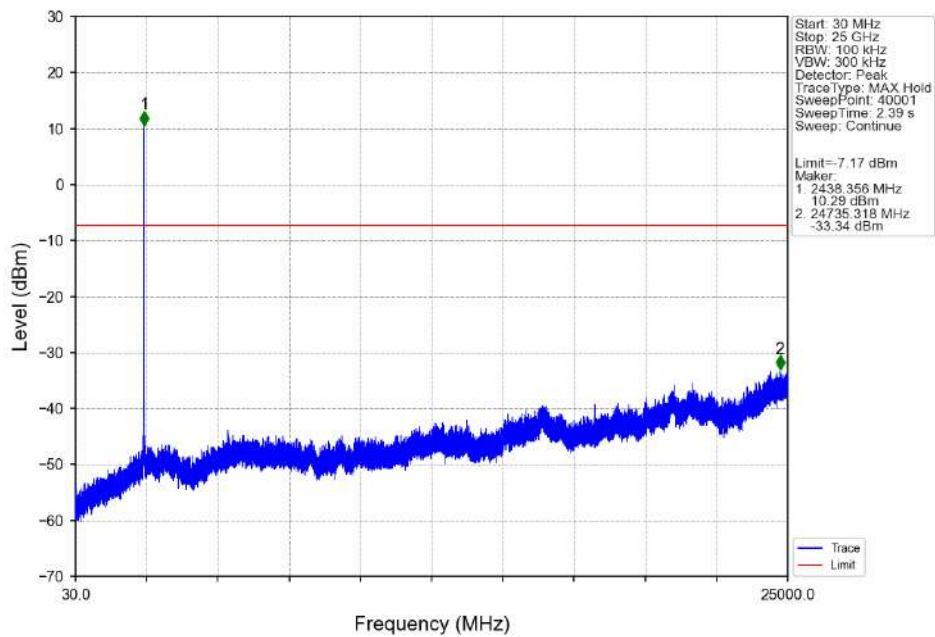


802.11b_HCH_2462MHz_Ant6 (MIMO)_NTNV

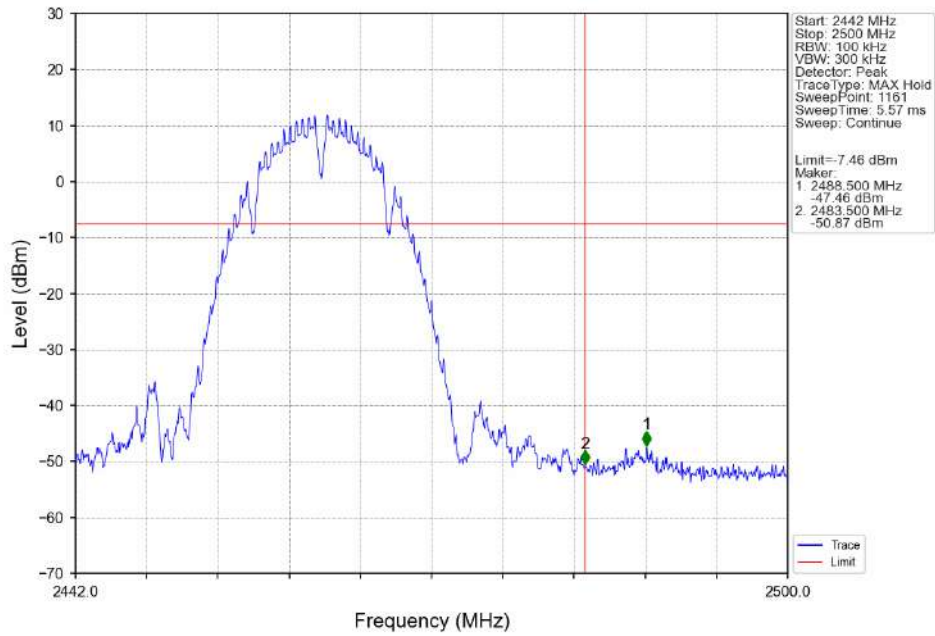


802.11b_HCH_2462MHz_Ant6 (MIMO)_NTNV

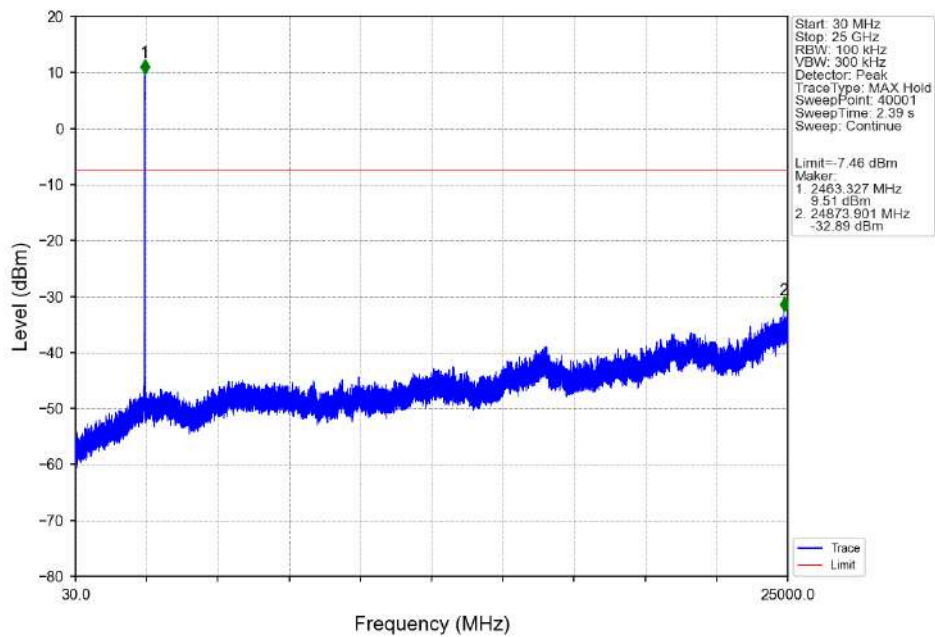

802.11b_HCH_2462MHz_Ant3 (MIMO)_NTNV

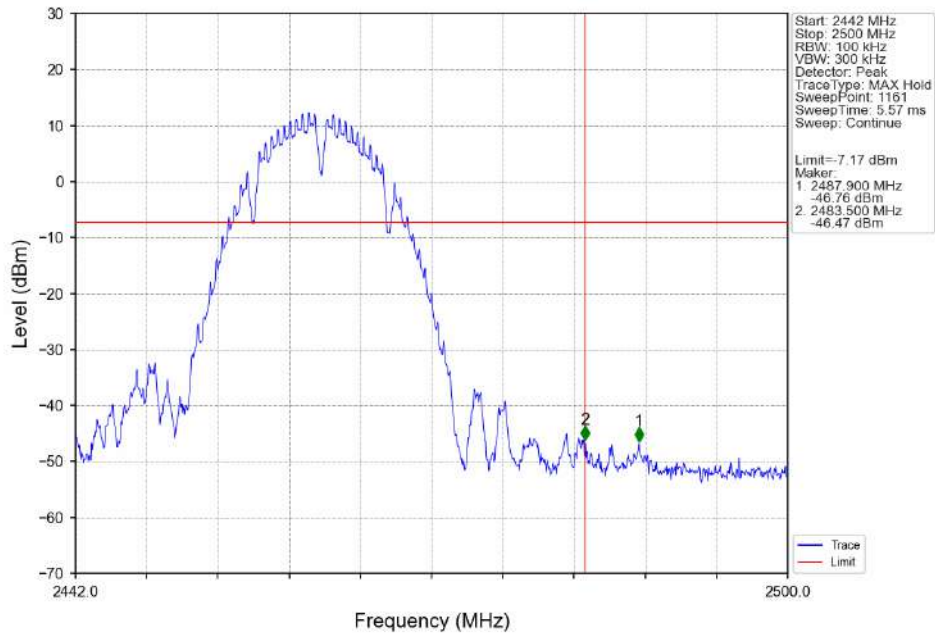

802.11b_HCH_2462MHz_Ant3 (MIMO)_NTNV

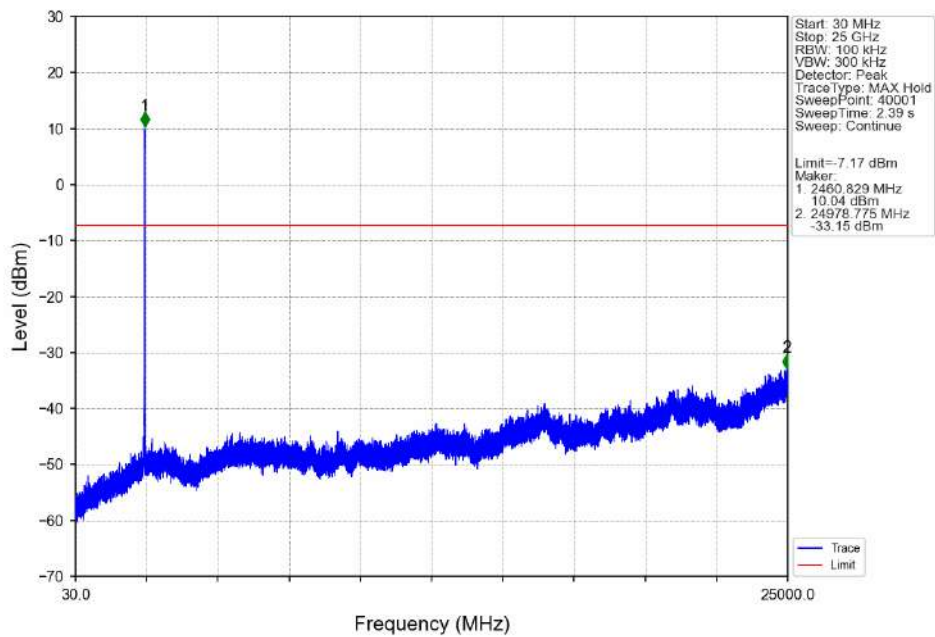




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304


Rev.: 01

Page: 96 of 226


802.11g_LCH_2412MHz_Ant6 (MIMO)_NTNV

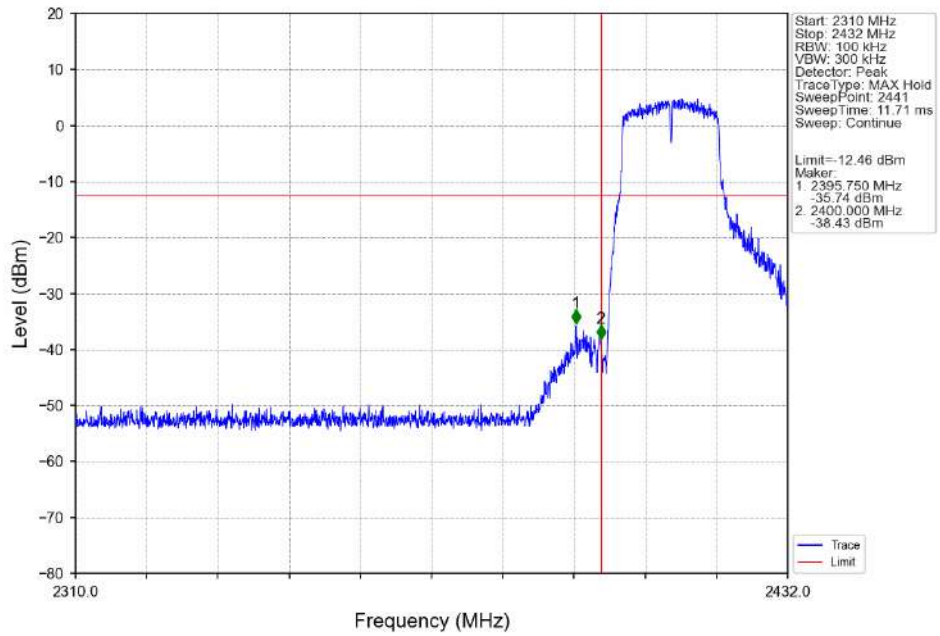


802.11g_LCH_2412MHz_Ant6 (MIMO)_NTNV

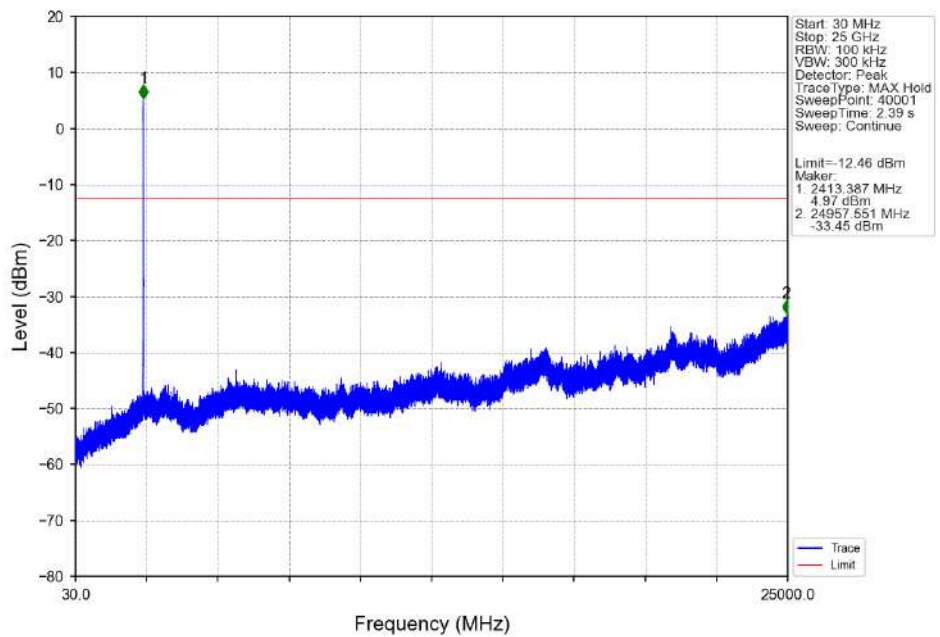


802.11g_LCH_2412MHz_Ant3 (MIMO)_NTNV

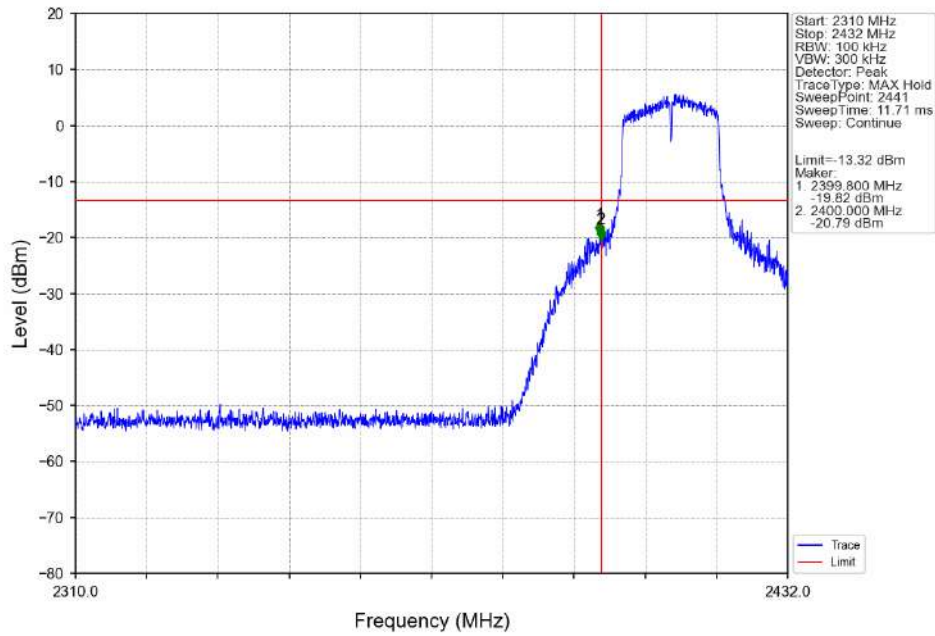


802.11g_LCH_2412MHz_Ant3 (MIMO)_NTNV

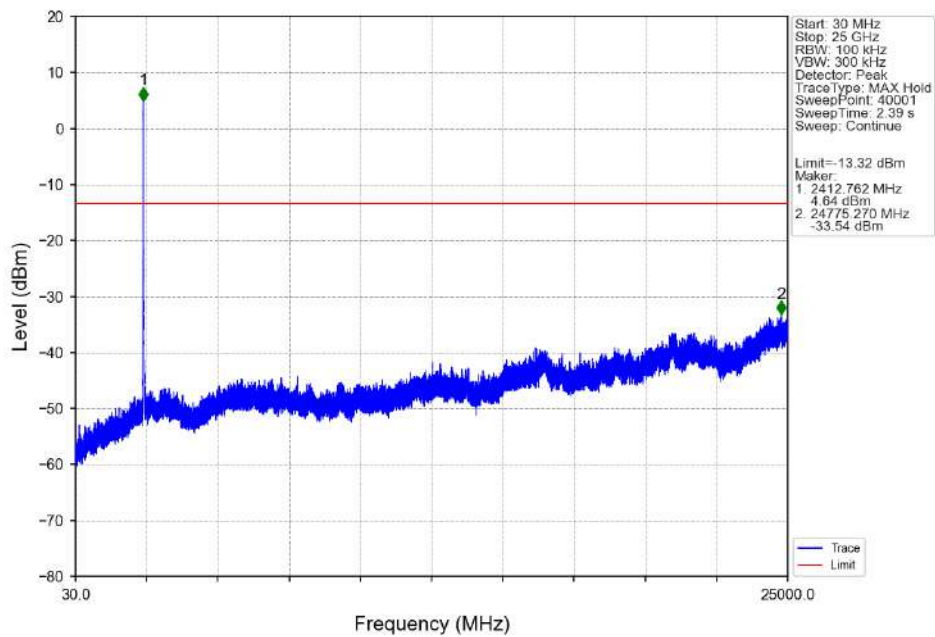


802.11g_MCH_2437MHz_Ant6 (MIMO)_NTNV

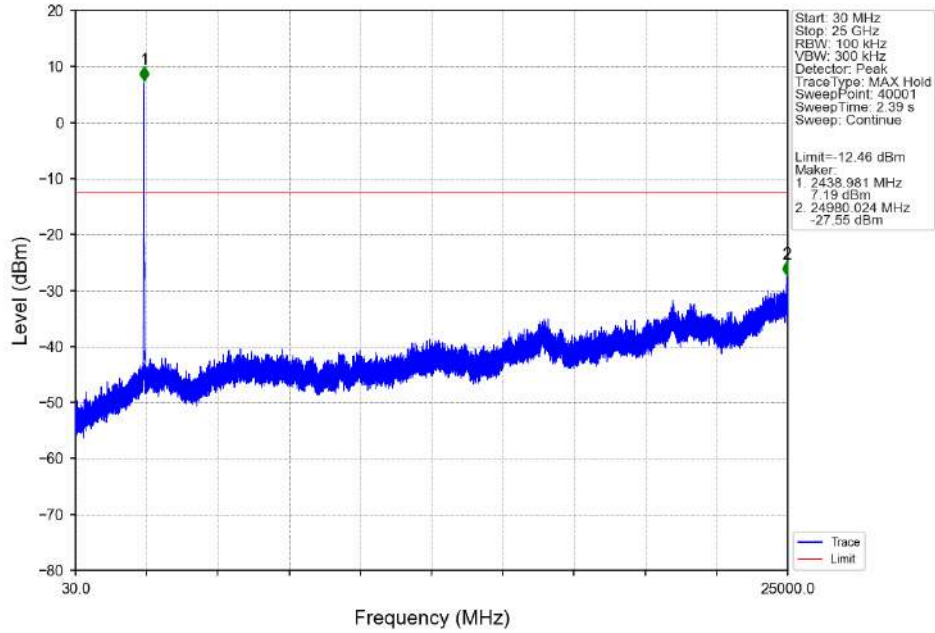


802.11g_MCH_2437MHz_Ant3 (MIMO)_NTNV

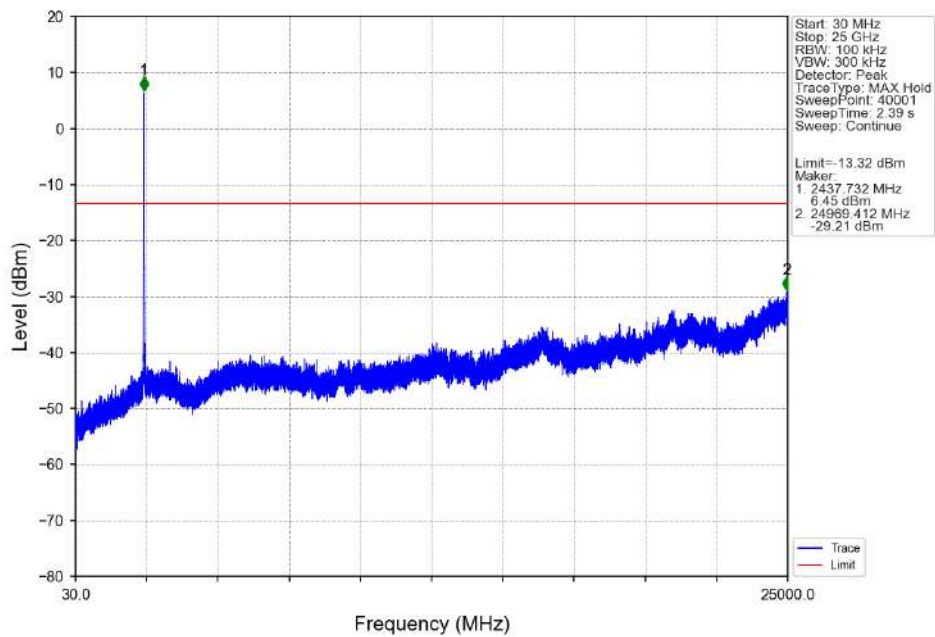


802.11g_HCH_2462MHz_Ant6 (MIMO)_NTNV

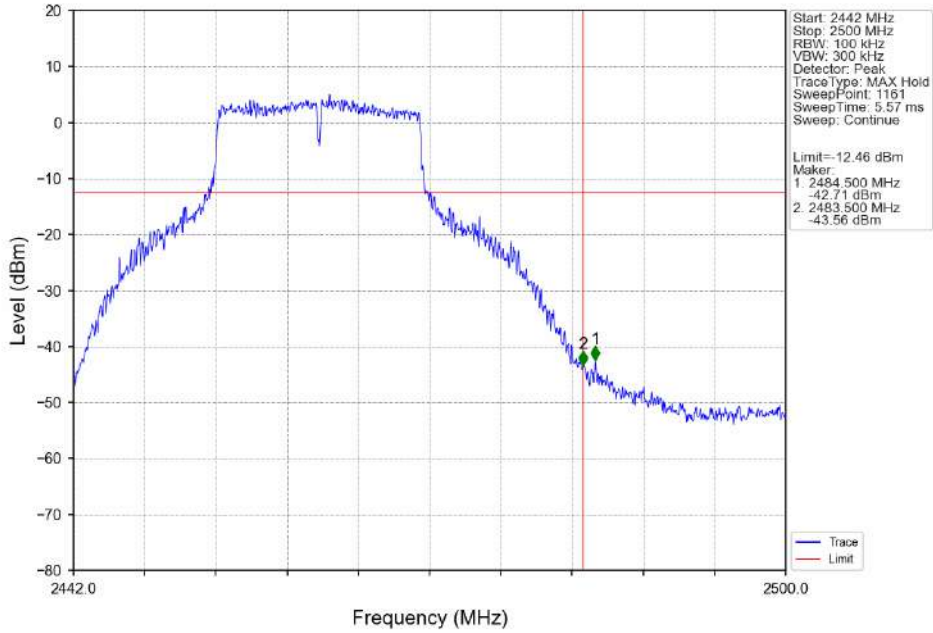


802.11g_HCH_2462MHz_Ant6 (MIMO)_NTNV

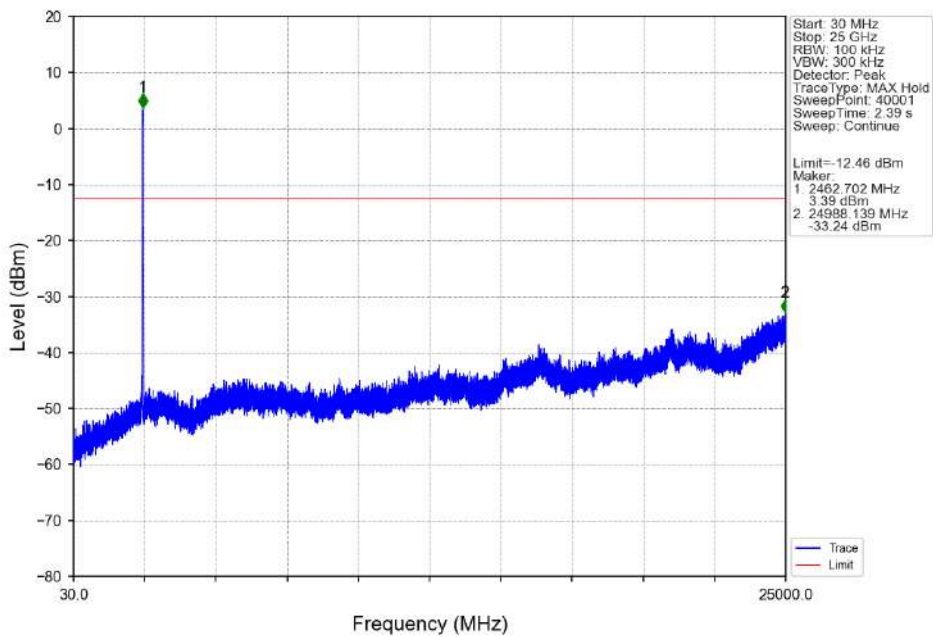


802.11g_HCH_2462MHz_Ant3 (MIMO)_NTNV

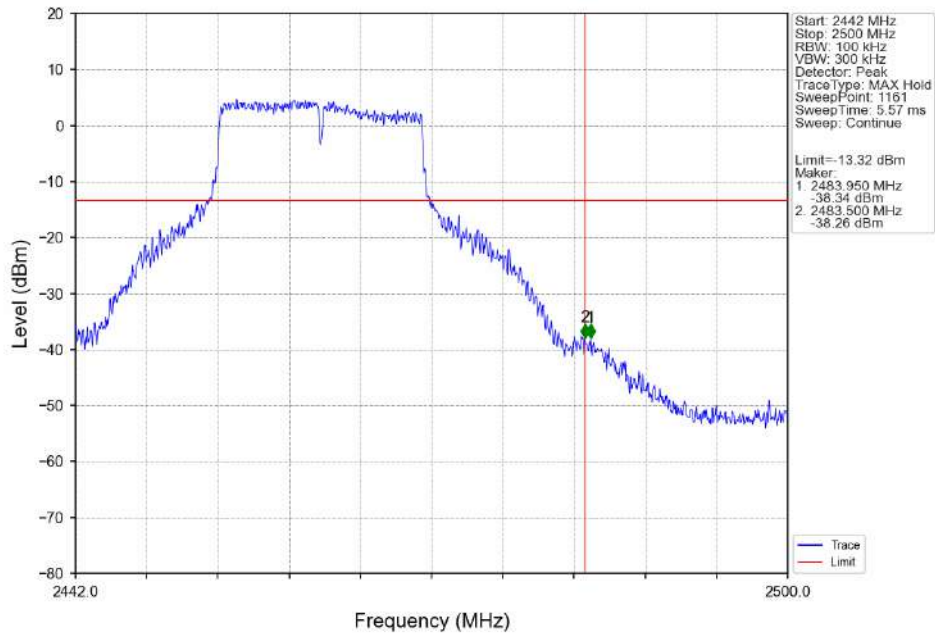


802.11g_HCH_2462MHz_Ant3 (MIMO)_NTNV

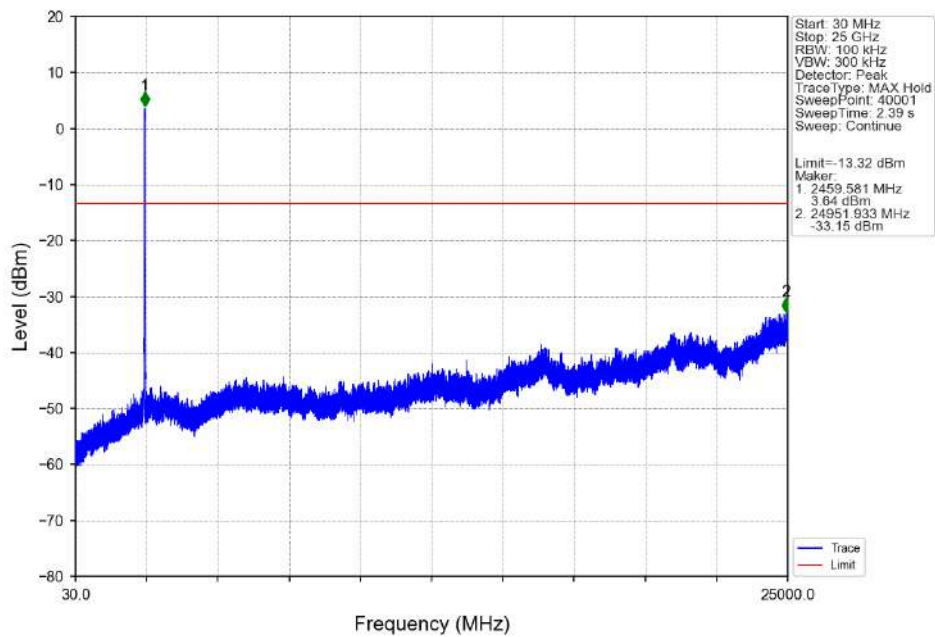


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant6 (MIMO)_NTNV

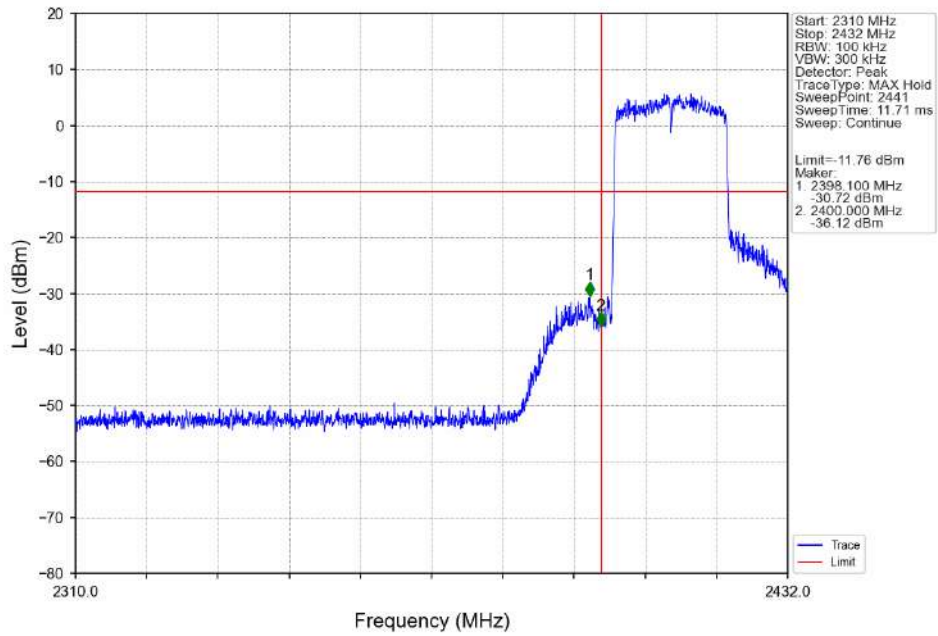


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant6 (MIMO)_NTNV

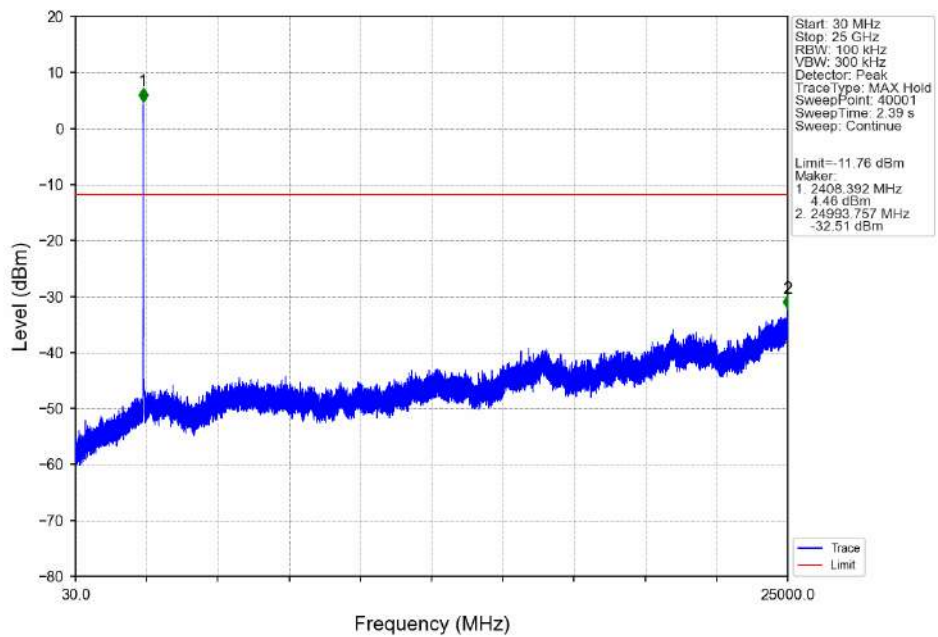


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant3 (MIMO)_NTNV

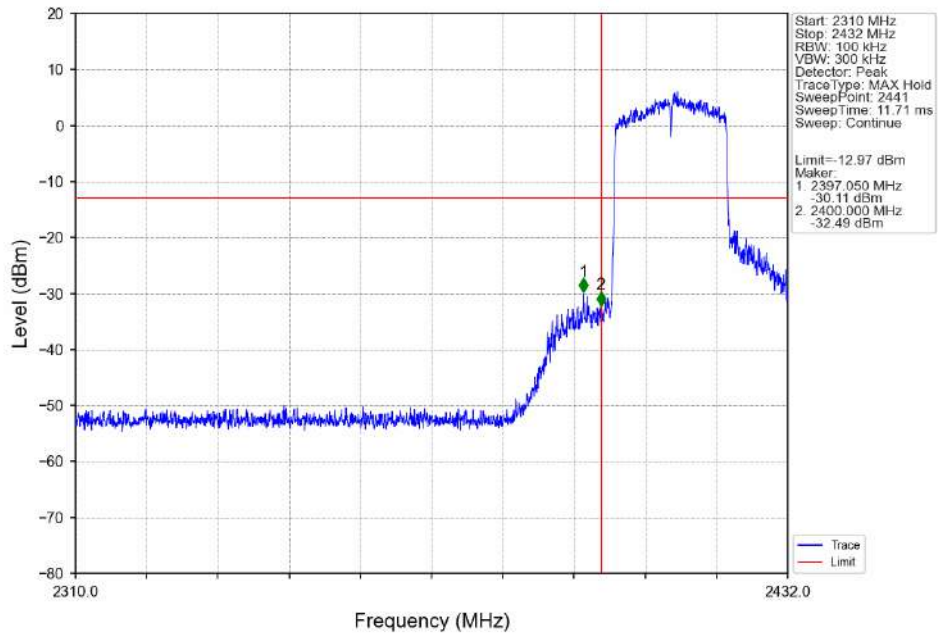


802.11ax(HEW20)_LCH_2412MHz_SU_ / _Ant3 (MIMO)_NTNV

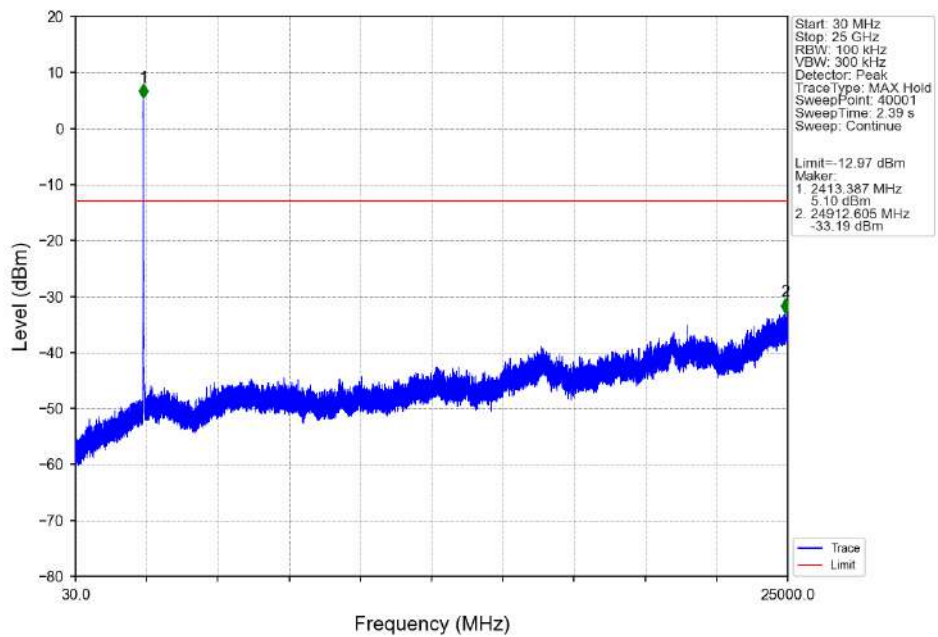

802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

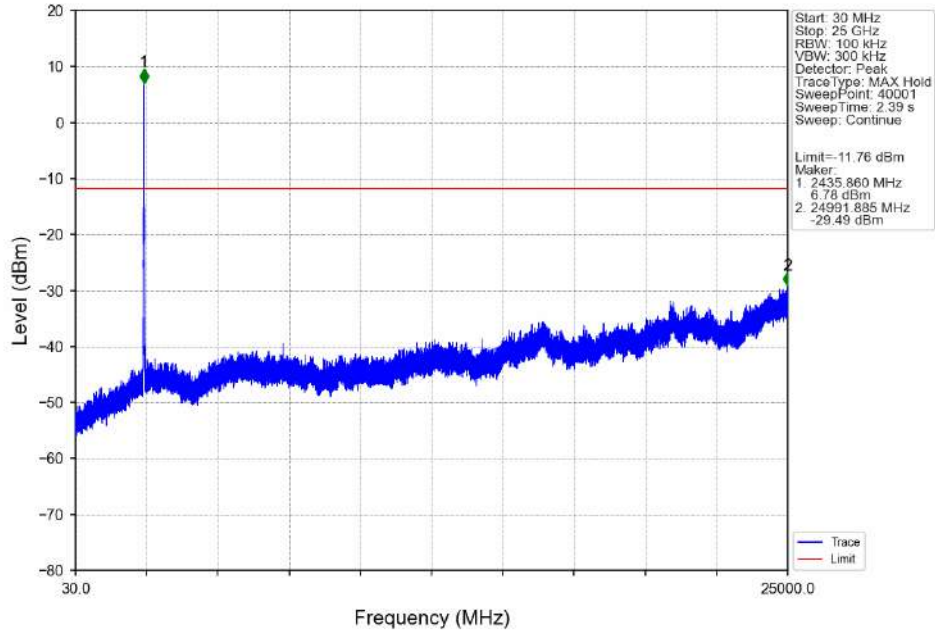

802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant3 (MIMO)_NTNV

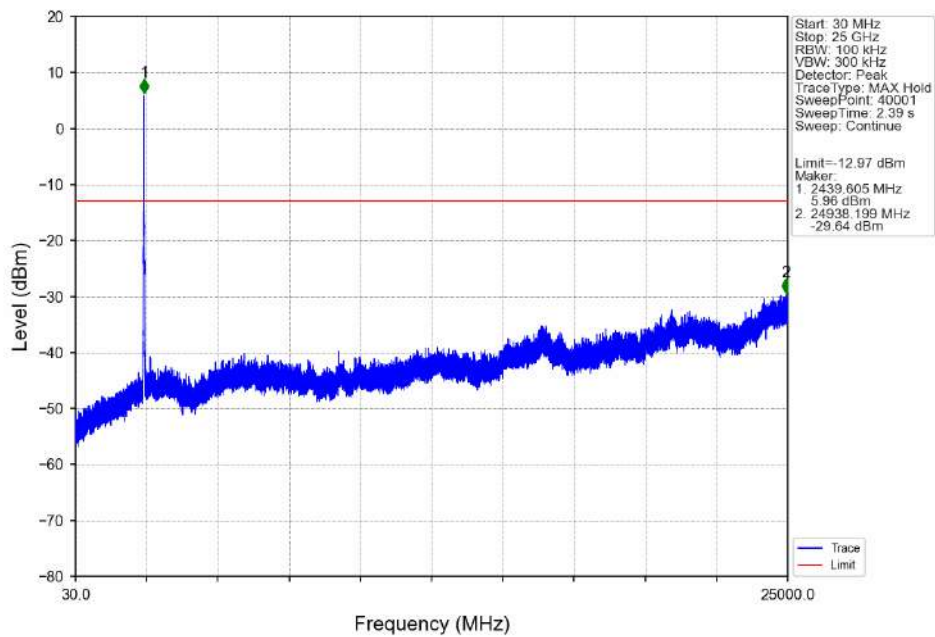




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304


Rev.: 01

Page: 104 of 226

802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant6 (MIMO)_NTNV

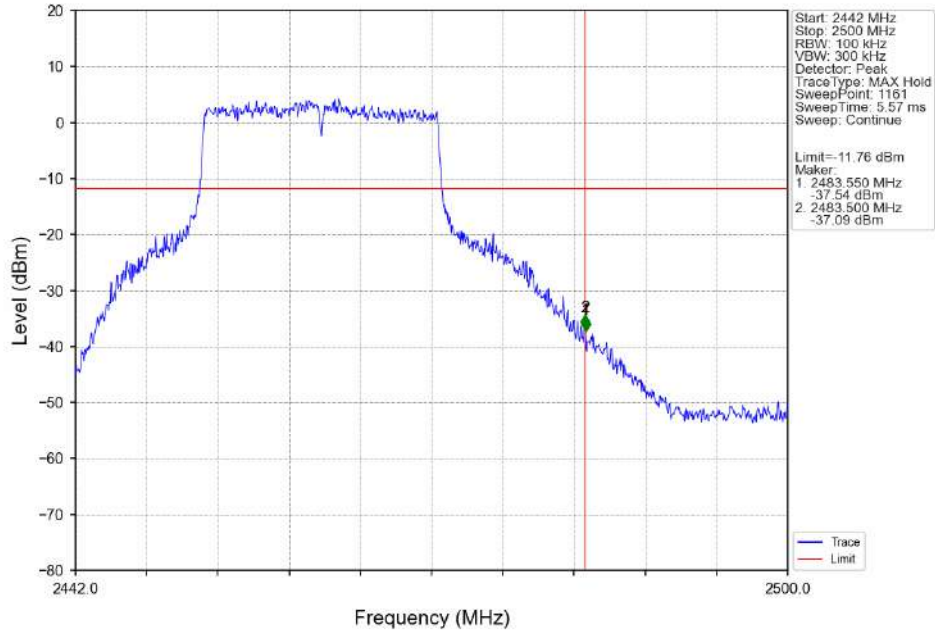

802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant6 (MIMO)_NTNV

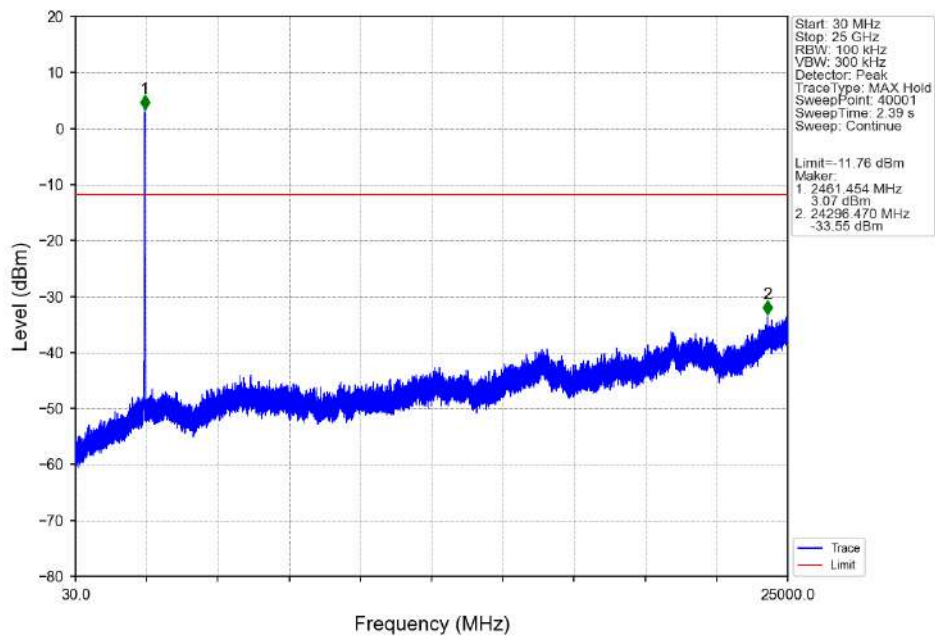


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304


Rev.: 01

Page: 105 of 226


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant3 (MIMO)_NTNV

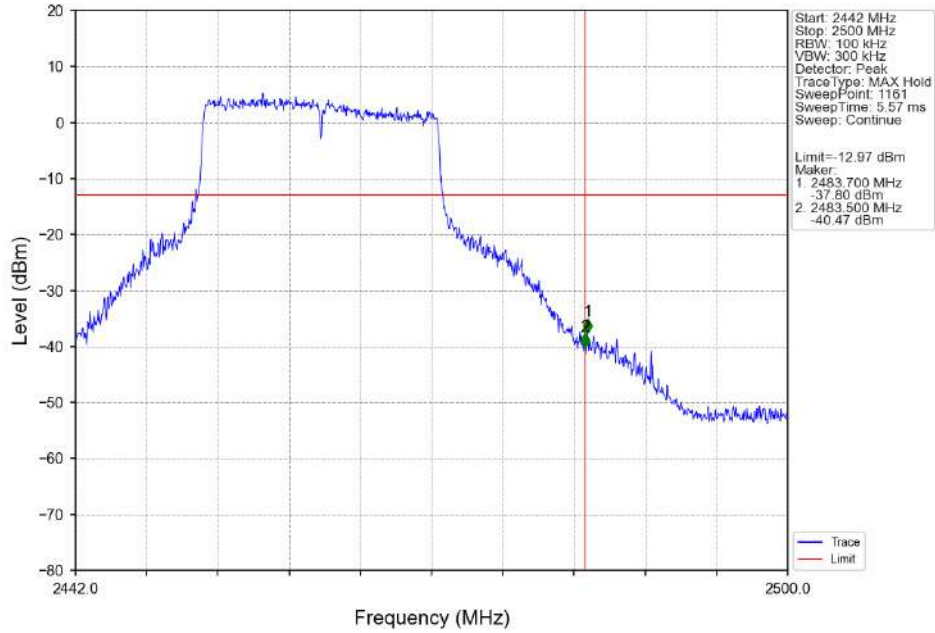


802.11ax(HEW20)_HCH_2462MHz_SU_ / _Ant3 (MIMO)_NTNV

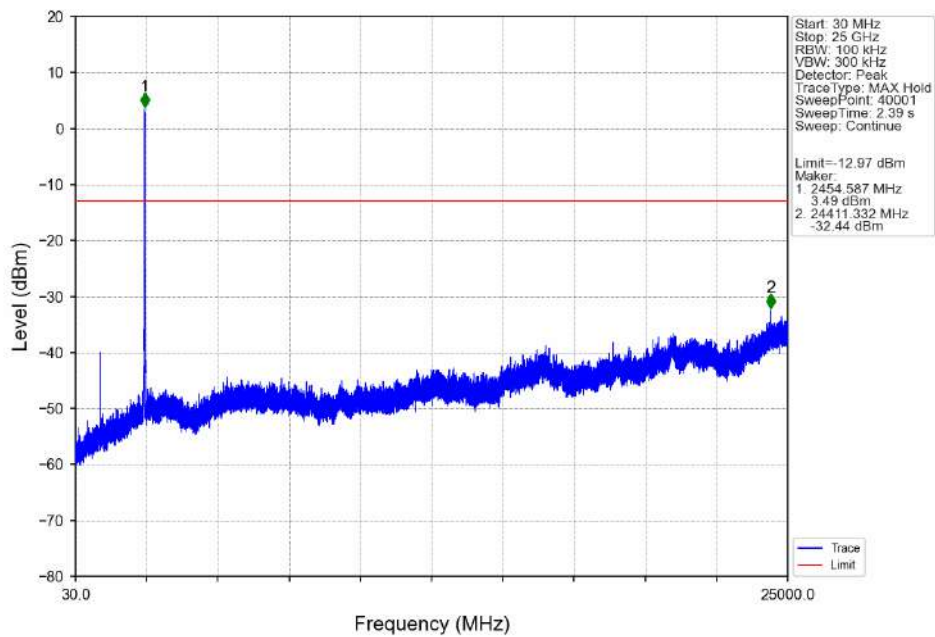


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant6 (MIMO)_NTNV

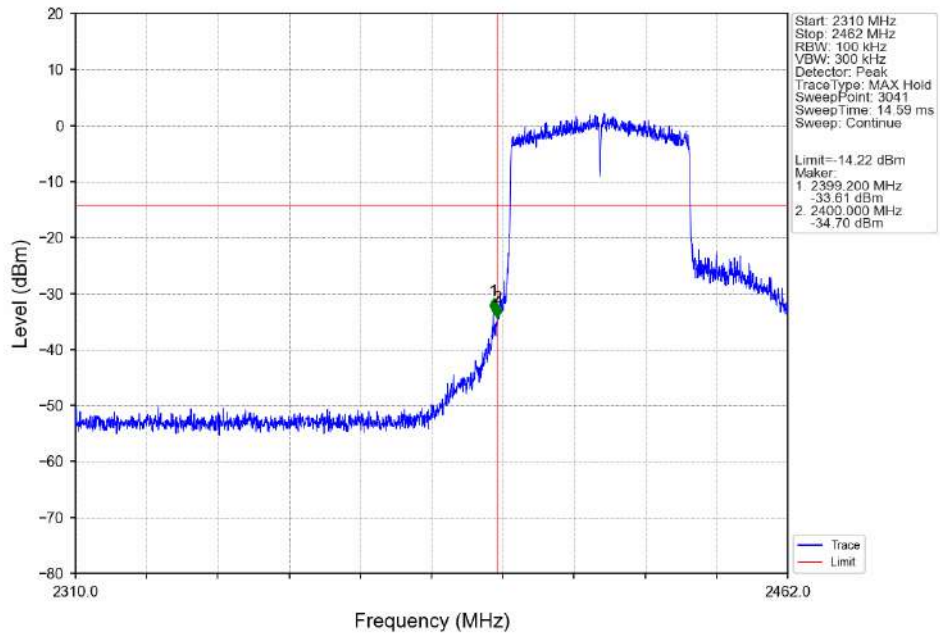


802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant6 (MIMO)_NTNV

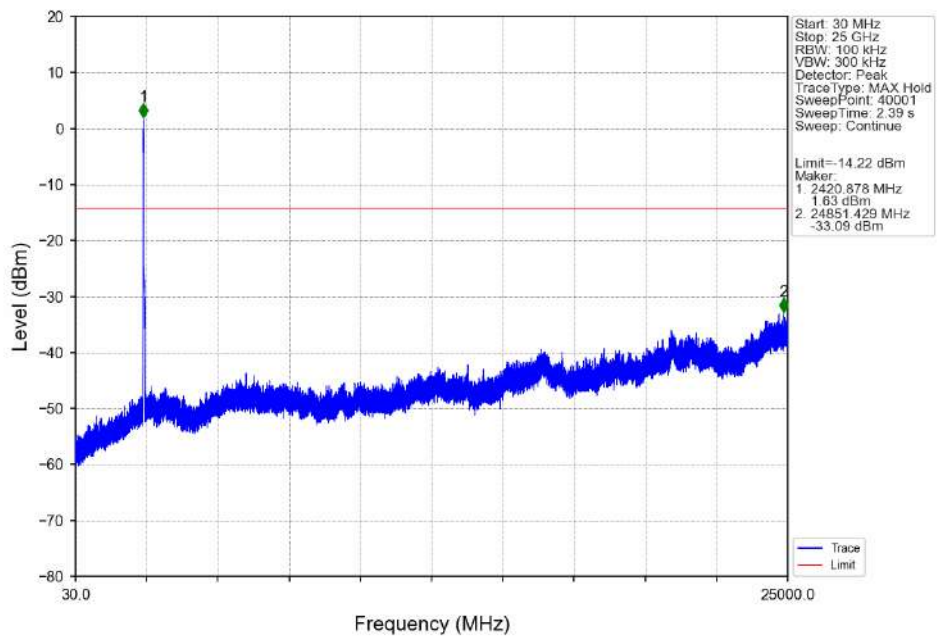

802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant3 (MIMO)_NTNV

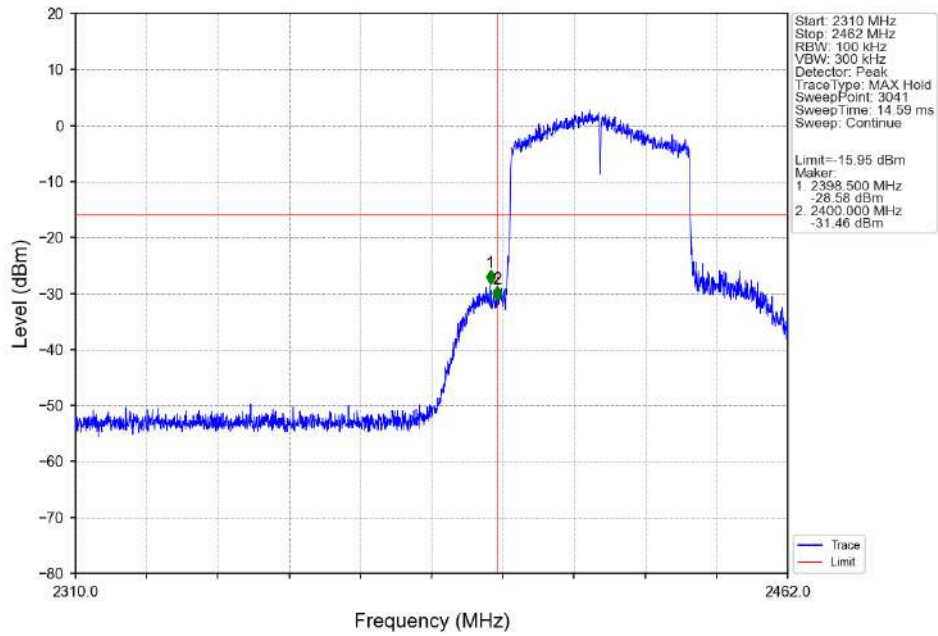

802.11ax(HEW40)_LCH_2422MHz_SU_ / _Ant3 (MIMO)_NTNV

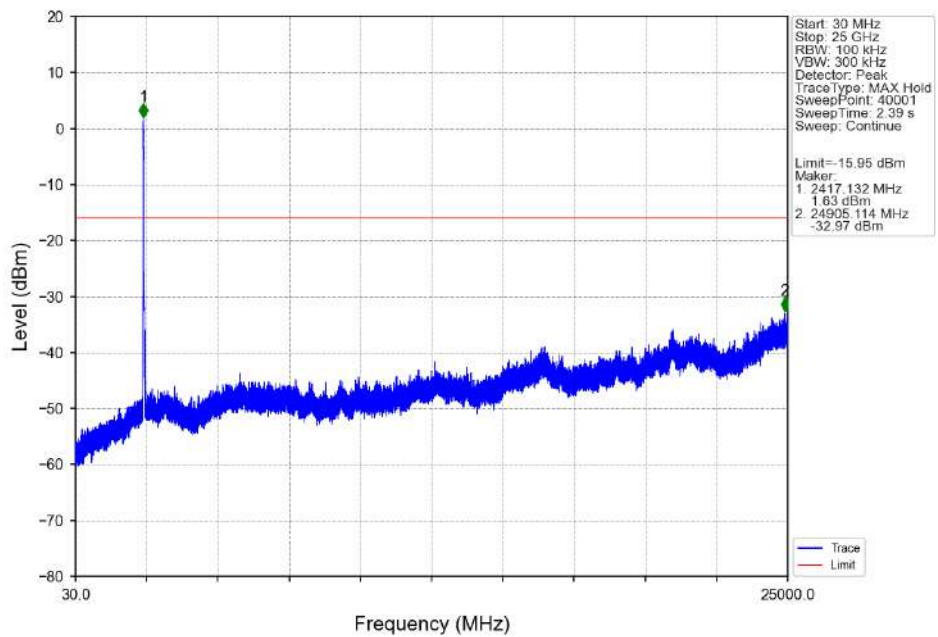


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304


Rev.: 01

Page: 108 of 226

802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant6 (MIMO)_NTNV

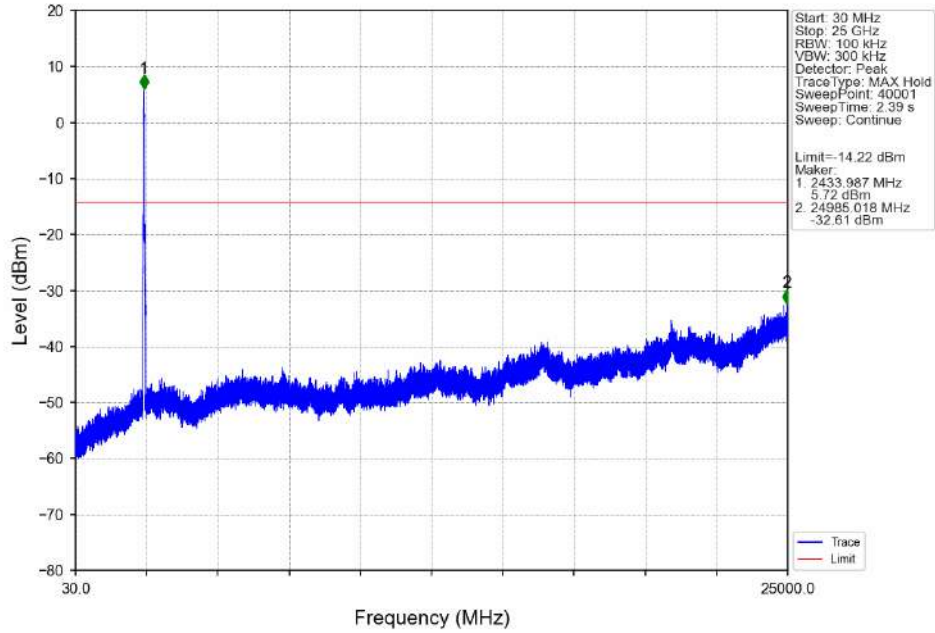

802.11ax(HEW40)_MCH_2437MHz_SU_ / _Ant3 (MIMO)_NTNV

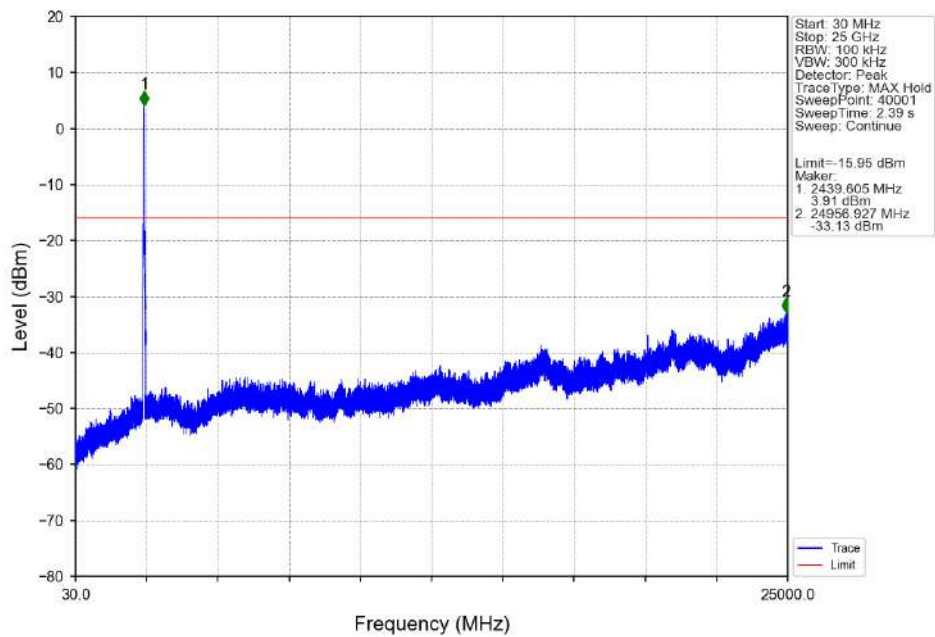




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304


Rev.: 01

Page: 109 of 226

802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant6 (MIMO)_NTNV

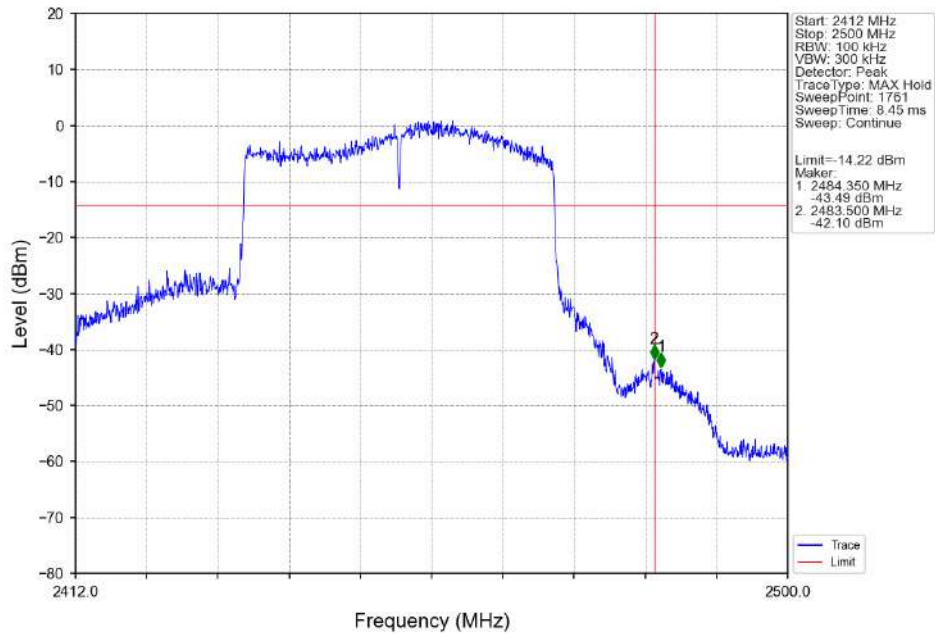

802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant6 (MIMO)_NTNV

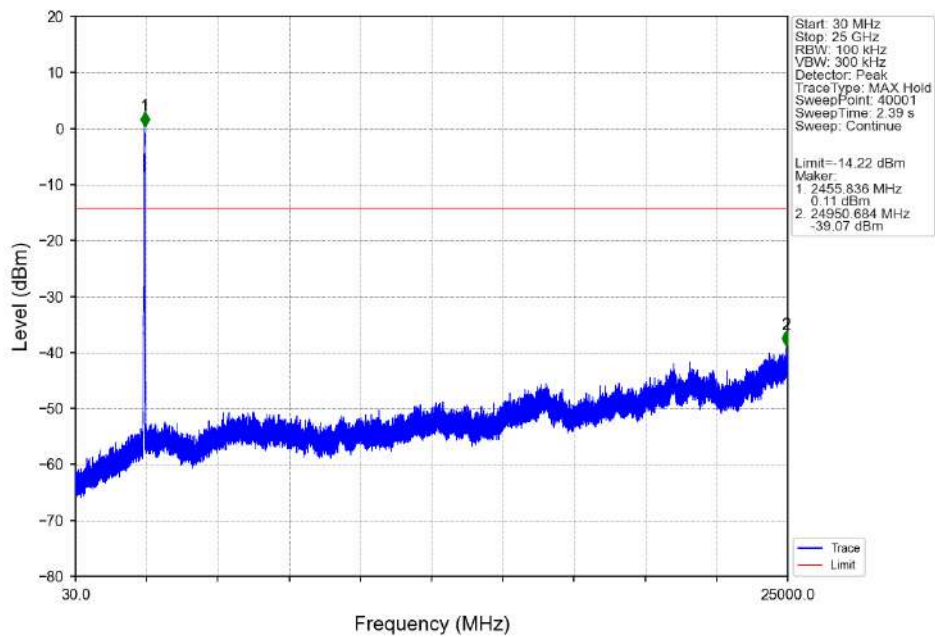




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200006304

Rev.: 01

Page: 110 of 226

802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant3 (MIMO)_NTNV

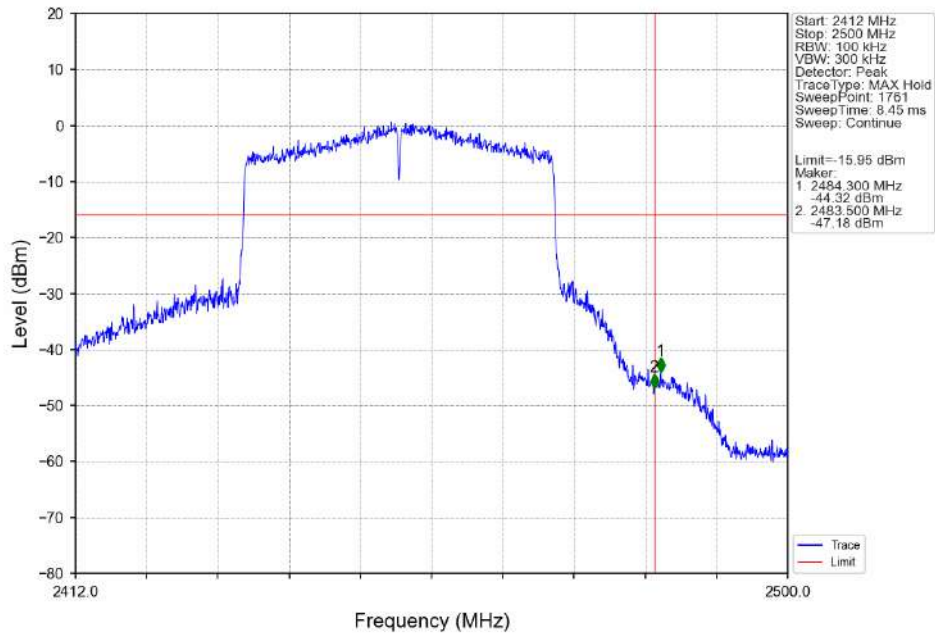

802.11ax(HEW40)_HCH_2452MHz_SU_ / _Ant3 (MIMO)_NTNV

