






N26(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

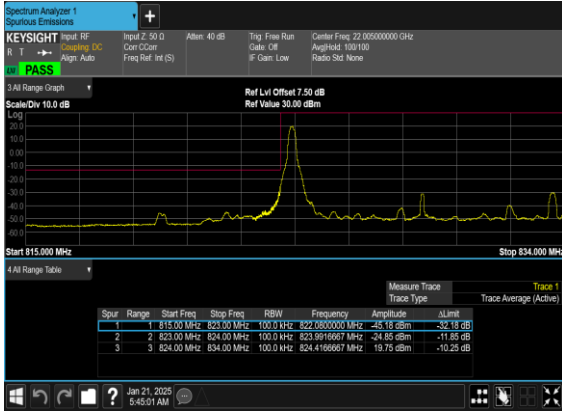


N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

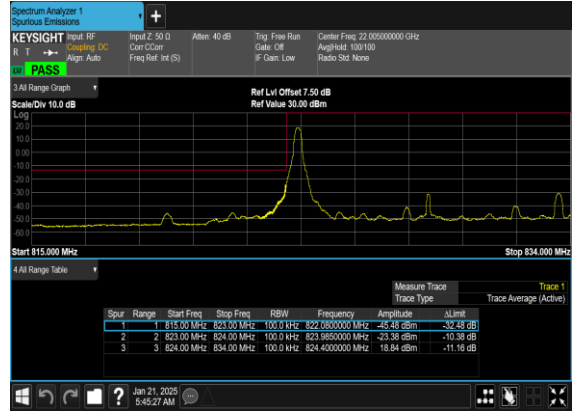

N26(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

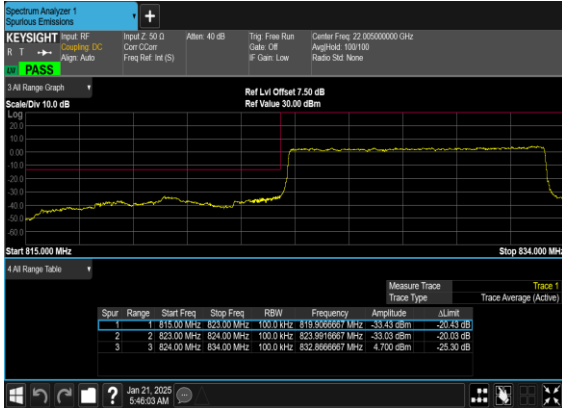

N26(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

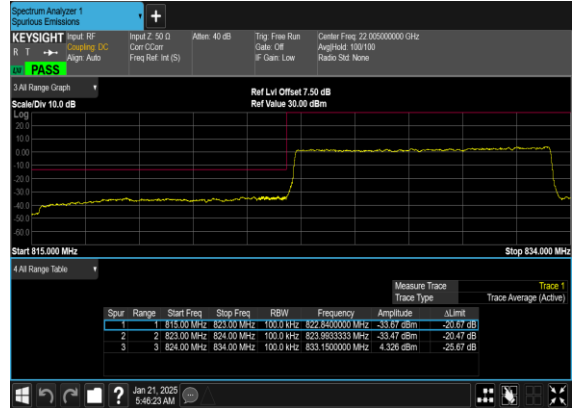




N26(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH



N26(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

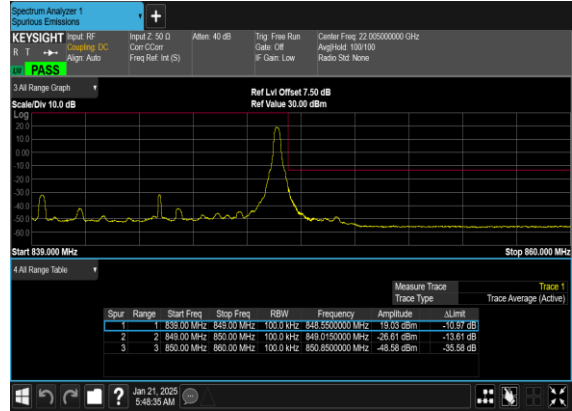

N26(10M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH




N26(10M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH






N26(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

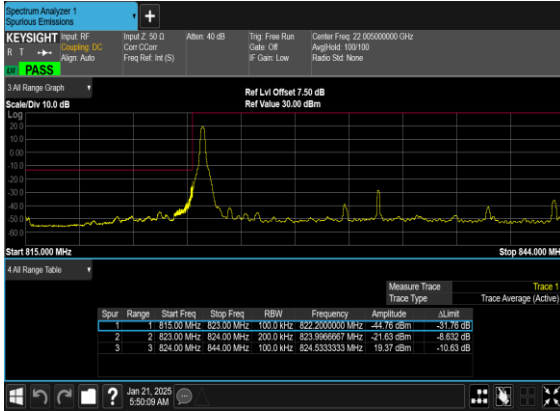


N26(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

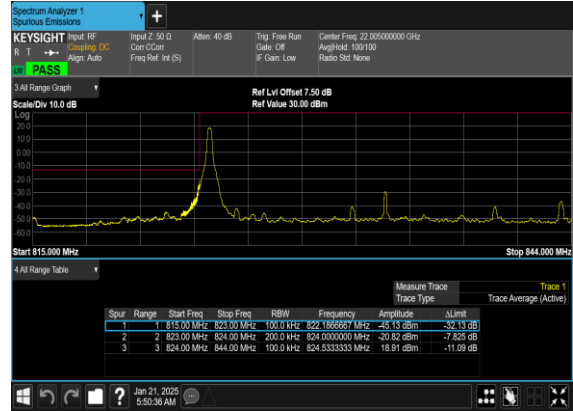

N26(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH



N26(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

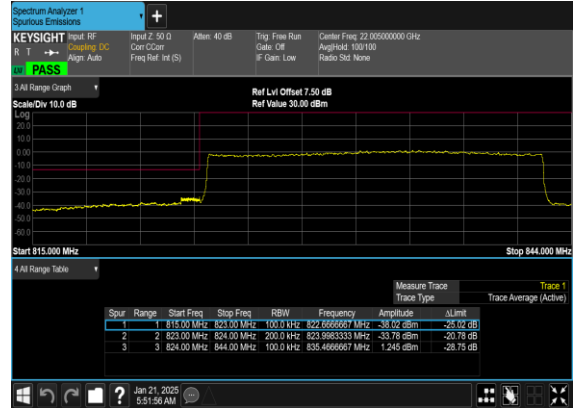



N26(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH



N26(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH



N26(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH



N26(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH





Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Shunping You	Temperature :	22~25°C
		Relative Humidity :	48~52%

Note: Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test.

n25 SA / NR 40MHz / QPSK(ANT0)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3701.4	-64.64	-13	-51.64	-78.96	-71.40	5.82	12.58	H
	5552.1	-62.62	-13	-49.62	-80.01	-68.34	7.28	13.00	H
	7402.8	-57.24	-13	-44.24	-79.53	-60.40	8.32	11.48	H
	3701.4	-64.36	-13	-51.36	-78.97	-71.12	5.82	12.58	V
	5552.1	-62.78	-13	-49.78	-80.21	-68.50	7.28	13.00	V
	7402.8	-57.45	-13	-44.45	-79.79	-60.61	8.32	11.48	V
Middle	3726.6	-64.11	-13	-51.11	-78.47	-70.86	5.85	12.60	H
	5589.9	-62.40	-13	-49.40	-79.88	-68.20	7.30	13.10	H
	7453.2	-57.19	-13	-44.19	-79.30	-60.34	8.35	11.50	H
	3726.6	-63.26	-13	-50.26	-77.87	-70.01	5.85	12.60	V
	5589.9	-62.72	-13	-49.72	-80.16	-68.52	7.30	13.10	V
	7453.2	-57.41	-13	-44.41	-79.49	-60.56	8.35	11.50	V
Highest	3751.4	-64.32	-13	-51.32	-78.71	-71.06	5.88	12.62	H
	5627.1	-62.14	-13	-49.14	-79.67	-67.95	7.32	13.13	H
	7502.8	-57.47	-13	-44.47	-79.40	-60.63	8.38	11.54	H
	3751.4	-63.93	-13	-50.93	-78.52	-70.67	5.88	12.62	V
	5627.1	-62.16	-13	-49.16	-79.6	-67.97	7.32	13.13	V
	7502.8	-57.68	-13	-44.68	-79.51	-60.84	8.38	11.54	V



DC_26A_n25A/ LTE 10MHz + NR 40MHz / QPSK (ANT0+1)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n25 Lowest	3701.4	-64.35	-13	-51.35	-78.67	-71.11	5.82	12.58	H
	5552.1	-63.07	-13	-50.07	-80.46	-68.79	7.28	13.00	H
	7402.8	-57.00	-13	-44.00	-79.29	-60.16	8.32	11.48	H
	3701.4	-64.35	-13	-51.35	-78.96	-71.11	5.82	12.58	V
	5552.1	-62.93	-13	-49.93	-80.36	-68.65	7.28	13.00	V
	7402.8	-57.27	-13	-44.27	-79.61	-60.43	8.32	11.48	V
LTE Band26 Lowest	1649.5	-67.80	-13	-54.80	-73.70	-71.05	4.00	9.40	H
	2474.25	-63.98	-13	-50.98	-74.29	-67.55	4.88	10.60	H
	3299	-63.81	-13	-50.81	-76.20	-68.74	5.52	12.60	H
	1649.5	-67.69	-13	-54.69	-73.47	-70.94	4.00	9.40	V
	2474.25	-64.49	-13	-51.49	-75.15	-68.06	4.88	10.60	V
	3299	-63.70	-13	-50.70	-76.54	-68.63	5.52	12.60	V
NR n25 Middle	3726.6	-64.07	-13	-51.07	-78.43	-70.82	5.85	12.60	H
	5589.9	-62.19	-13	-49.19	-79.67	-67.99	7.30	13.10	H
	7453.2	-56.98	-13	-43.98	-79.09	-60.13	8.35	11.50	H
	3726.6	-63.90	-13	-50.90	-78.51	-70.65	5.85	12.60	V
	5589.9	-62.67	-13	-49.67	-80.11	-68.47	7.30	13.10	V
	7453.2	-57.35	-13	-44.35	-79.43	-60.50	8.35	11.50	V
LTE Band26 Middle	1649.5	-67.30	-13	-54.30	-73.20	-70.55	4.00	9.40	H
	2474.25	-64.08	-13	-51.08	-74.39	-67.65	4.88	10.60	H
	3299	-63.91	-13	-50.91	-76.30	-68.84	5.52	12.60	H
	1649.5	-67.75	-13	-54.75	-73.53	-71.00	4.00	9.40	V
	2474.25	-64.78	-13	-51.78	-75.44	-68.35	4.88	10.60	V
	3299	-63.59	-13	-50.59	-76.43	-68.52	5.52	12.60	V
NR n25 Highest	3751.4	-64.22	-13	-51.22	-78.61	-70.96	5.88	12.62	H
	5627.1	-62.34	-13	-49.34	-79.87	-68.15	7.32	13.13	H
	7502.8	-57.35	-13	-44.35	-79.28	-60.51	8.38	11.54	H
	3751.4	-63.83	-13	-50.83	-78.42	-70.57	5.88	12.62	V
	5627.1	-62.50	-13	-49.50	-79.94	-68.31	7.32	13.13	V
	7502.8	-57.52	-13	-44.52	-79.35	-60.68	8.38	11.54	V
LTE Band5 Highest	1649.5	-67.07	-13	-54.07	-72.97	-70.32	4.00	9.40	H
	2474.25	-63.96	-13	-50.96	-74.27	-67.53	4.88	10.60	H
	3299	-63.72	-13	-50.72	-76.11	-68.65	5.52	12.60	H
	1649.5	-68.17	-13	-55.17	-73.95	-71.42	4.00	9.40	V
	2474.25	-65.43	-13	-52.43	-76.09	-69.00	4.88	10.60	V
	3299	-63.33	-13	-50.33	-76.17	-68.26	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



DC_7A_n25A Other PA/ LTE 10MHz + NR 40MHz / QPSK (ANT0+1)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n25 Lowest	3701.4	-64.15	-13	-51.15	-78.47	-70.91	5.82	12.58	H
	5552.1	-62.85	-13	-49.85	-80.24	-68.57	7.28	13.00	H
	7578.27	-57.91	-13	-44.91	-79.64	-61.07	8.32	11.48	H
	3701.4	-63.84	-13	-50.84	-78.45	-70.60	5.82	12.58	V
	5552.1	-62.81	-13	-49.81	-80.24	-68.53	7.28	13.00	V
	7578.27	-57.96	-13	-44.96	-79.49	-61.12	8.32	11.48	V
LTE Band7 Lowest	5052.18	-61.07	-25	-36.07	-78.39	-66.63	7.12	12.68	H
	7402.80	-57.65	-25	-32.65	-79.94	-60.98	8.26	11.59	H
	10104.36	-53.43	-25	-28.43	-79.52	-54.96	10.45	11.98	H
	5052.18	-60.39	-25	-35.39	-77.64	-65.95	7.12	12.68	V
	7402.80	-57.37	-25	-32.37	-79.71	-60.70	8.26	11.59	V
	10104.36	-53.82	-25	-28.82	-79.42	-55.35	10.45	11.98	V
NR n25 Middle	3726.6	-64.11	-13	-51.11	-78.47	-70.86	5.85	12.60	H
	5589.9	-62.40	-13	-49.40	-79.88	-68.20	7.30	13.10	H
	7578.27	-57.78	-13	-44.78	-79.51	-60.93	8.35	11.50	H
	3726.6	-63.73	-13	-50.73	-78.34	-70.48	5.85	12.60	V
	5589.9	-62.78	-13	-49.78	-80.22	-68.58	7.30	13.10	V
	7578.27	-57.89	-13	-44.89	-79.42	-61.04	8.35	11.50	V
LTE Band7 Middle	5052.18	-61.07	-25	-36.07	-78.39	-66.63	7.14	12.70	H
	7453.20	-57.16	-25	-32.16	-79.27	-60.46	8.30	11.60	H
	10104.36	-53.98	-25	-28.98	-80.07	-55.50	10.48	12.00	H
	5052.18	-60.32	-25	-35.32	-77.57	-65.88	7.14	12.70	V
	7453.20	-57.61	-25	-32.61	-79.69	-60.91	8.30	11.60	V
	10104.36	-54.18	-25	-29.18	-79.78	-55.70	10.48	12.00	V
NR n25 Highest	3751.4	-63.87	-13	-50.87	-78.26	-70.61	5.88	12.62	H
	5627.1	-62.07	-13	-49.07	-79.60	-67.88	7.32	13.13	H
	7578.27	-57.55	-13	-44.55	-79.28	-60.71	8.38	11.54	H
	3751.4	-63.90	-13	-50.90	-78.49	-70.64	5.88	12.62	V
	5627.1	-62.37	-13	-49.37	-79.81	-68.18	7.32	13.13	V
	7578.27	-57.84	-13	-44.84	-79.37	-61.00	8.38	11.54	V
LTE Band7 Highest	5052.18	-60.82	-25	-35.82	-78.14	-66.38	7.16	12.72	H
	7502.80	-57.25	-25	-32.25	-79.18	-60.55	8.33	11.63	H
	10104.36	-53.65	-25	-28.65	-79.74	-55.25	10.50	12.10	H
	5052.18	-60.25	-25	-35.25	-77.5	-65.81	7.16	12.72	V
	7502.80	-57.66	-25	-32.66	-79.49	-60.96	8.33	11.63	V
	10104.36	-54.32	-25	-29.32	-79.92	-55.92	10.50	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n25 UL MIMO / NR 40MHz / QPSK(ANT0+1)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3701.4	-65.00	-13	-52.00	-79.32	-71.76	5.82	12.58	H
	5552.1	-63.69	-13	-50.69	-81.08	-69.41	7.28	13.00	H
	7402.8	-57.27	-13	-44.27	-79.56	-60.43	8.32	11.48	H
	3701.4	-64.52	-13	-51.52	-79.13	-71.28	5.82	12.58	V
	5552.1	-63.42	-13	-50.42	-80.85	-69.14	7.28	13.00	V
	7402.8	-57.37	-13	-44.37	-79.71	-60.53	8.32	11.48	V
Middle	3726.6	-64.34	-13	-51.34	-78.70	-71.09	5.85	12.60	H
	5589.9	-63.31	-13	-50.31	-80.79	-69.11	7.30	13.10	H
	7453.2	-57.57	-13	-44.57	-79.68	-60.72	8.35	11.50	H
	3726.6	-64.35	-13	-51.35	-78.96	-71.10	5.85	12.60	V
	5589.9	-63.40	-13	-50.40	-80.84	-69.20	7.30	13.10	V
	7453.2	-57.70	-13	-44.70	-79.78	-60.85	8.35	11.50	V
Highest	3751.4	-64.73	-13	-51.73	-79.12	-71.47	5.88	12.62	H
	5627.1	-62.88	-13	-49.88	-80.41	-68.69	7.32	13.13	H
	7502.8	-57.71	-13	-44.71	-79.64	-60.87	8.38	11.54	H
	3751.4	-64.55	-13	-51.55	-79.14	-71.29	5.88	12.62	V
	5627.1	-63.29	-13	-50.29	-80.73	-69.10	7.32	13.13	V
	7502.8	-58.12	-13	-45.12	-79.95	-61.28	8.38	11.54	V

n25 SA Other PA / NR 40MHz / QPSK(ANT0)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3701.4	-65.09	-13	-52.09	-79.41	-71.85	5.82	12.58	H
	5552.1	-63.15	-13	-50.15	-80.54	-68.87	7.28	13.00	H
	7402.8	-57.22	-13	-44.22	-79.51	-60.38	8.32	11.48	H
	3701.4	-64.54	-13	-51.54	-79.15	-71.30	5.82	12.58	V
	5552.1	-63.12	-13	-50.12	-80.55	-68.84	7.28	13.00	V
	7402.8	-56.97	-13	-43.97	-79.31	-60.13	8.32	11.48	V
Middle	3726.6	-63.99	-13	-50.99	-78.35	-70.74	5.85	12.60	H
	5589.9	-63.09	-13	-50.09	-80.57	-68.89	7.30	13.10	H
	7453.2	-56.91	-13	-43.91	-79.02	-60.06	8.35	11.50	H
	3726.6	-64.13	-13	-51.13	-78.74	-70.88	5.85	12.60	V
	5589.9	-62.92	-13	-49.92	-80.36	-68.72	7.30	13.10	V
	7453.2	-57.36	-13	-44.36	-79.44	-60.51	8.35	11.50	V
Highest	3751.4	-65.07	-13	-52.07	-79.46	-71.81	5.88	12.62	H
	5627.1	-63.14	-13	-50.14	-80.67	-68.95	7.32	13.13	H
	7502.8	-57.49	-13	-44.49	-79.42	-60.65	8.38	11.54	H
	3751.4	-64.93	-13	-51.93	-79.52	-71.67	5.88	12.62	V
	5627.1	-63.25	-13	-50.25	-80.69	-69.06	7.32	13.13	V
	7502.8	-57.58	-13	-44.58	-79.41	-60.74	8.38	11.54	V



n26 SA / NR 20MHz / QPSK(ANT0)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1649.2	-66.91	-13	-53.91	-72.81	-70.14	3.98	9.36	H
	2473.8	-58.62	-13	-45.62	-68.93	-62.17	4.85	10.55	H
	3298.4	-64.61	-13	-51.61	-77.00	-69.54	5.50	12.58	H
	1649.2	-67.01	-13	-54.01	-72.79	-70.24	3.98	9.36	V
	2473.8	-60.55	-13	-47.55	-71.22	-64.10	4.85	10.55	V
	3298.4	-64.09	-13	-51.09	-76.94	-69.02	5.50	12.58	V
Middle	1654.2	-63.58	-13	-50.58	-69.46	-66.83	4.00	9.40	H
	2481.3	-57.52	-13	-44.52	-67.80	-61.09	4.88	10.60	H
	3308.4	-64.68	-13	-51.68	-76.99	-69.61	5.52	12.60	H
	4135.5	-62.82	-13	-49.82	-78.06	-67.29	6.00	12.62	H
	1654.2	-64.78	-13	-51.78	-70.51	-68.03	4.00	9.40	V
	2481.3	-60.22	-13	-47.22	-70.86	-63.79	4.88	10.60	V
	3308.4	-64.42	-13	-51.42	-77.17	-69.35	5.52	12.60	V
	4135.5	-63.50	-13	-50.50	-78.87	-67.97	6.00	12.62	V
Highest	1659.2	-64.77	-13	-51.77	-70.65	-67.94	4.10	9.42	H
	2488.8	-58.57	-13	-45.57	-68.83	-62.15	4.90	10.63	H
	3318.4	-63.92	-13	-50.92	-76.15	-68.84	5.55	12.62	H
	1659.2	-65.53	-13	-52.53	-71.23	-68.70	4.10	9.42	V
	2488.8	-62.02	-13	-49.02	-72.63	-65.60	4.90	10.63	V
	3318.4	-63.25	-13	-50.25	-75.90	-68.17	5.55	12.62	V

N5 SA / NR 20MHz / QPSK(ANT0)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-63.95	-13	-50.95	-69.85	-67.18	3.98	9.36	H
	2473	-59.26	-13	-46.26	-69.57	-62.81	4.85	10.55	H
	3298	-64.55	-13	-51.55	-76.94	-69.48	5.50	12.58	H
	1648	-65.54	-13	-52.54	-71.34	-68.77	3.98	9.36	V
	2473	-60.79	-13	-47.79	-71.46	-64.34	4.85	10.55	V
	3298	-64.25	-13	-51.25	-77.10	-69.18	5.50	12.58	V
Middle	1654.5	-63.88	-13	-50.88	-69.76	-67.13	4.00	9.40	H
	2481.75	-58.70	-13	-45.70	-68.98	-62.27	4.88	10.60	H
	3309	-64.40	-13	-51.40	-76.70	-69.33	5.52	12.60	H
	1654.5	-65.96	-13	-52.96	-71.69	-69.21	4.00	9.40	V
	2481.75	-60.09	-13	-47.09	-70.73	-63.66	4.88	10.60	V
	3309	-64.49	-13	-51.49	-77.23	-69.42	5.52	12.60	V
Highest	1660	-64.85	-13	-51.85	-70.73	-68.02	4.10	9.42	H
	2490	-59.02	-13	-46.02	-69.33	-62.60	4.90	10.63	H
	3320	-64.80	-13	-51.80	-77.01	-69.72	5.55	12.62	H
	1660	-65.76	-13	-52.76	-71.45	-68.93	4.10	9.42	V
	2490	-62.40	-13	-49.40	-73.05	-65.98	4.90	10.63	V
	3320	-64.39	-13	-51.39	-77.02	-69.31	5.55	12.62	V



DC_7A_n26A / LTE 10MHz + NR 20MHz / QPSK (ANT2+1)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n26 Lowest	1649.2	-67.97	-13	-54.97	-73.87	-71.20	3.98	9.36	H
	2473.8	-65.05	-13	-52.05	-75.36	-68.60	4.85	10.55	H
	3298.4	-63.71	-13	-50.71	-76.10	-68.64	5.50	12.58	H
	1649.2	-68.24	-13	-55.24	-74.02	-71.47	3.98	9.36	V
	2473.8	-65.04	-13	-52.04	-75.71	-68.59	4.85	10.55	V
	3298.4	-63.49	-13	-50.49	-76.34	-68.42	5.50	12.58	V
LTE Band7 Lowest	5061.18	-60.80	-25	-35.80	-78.12	-66.36	7.14	12.70	H
	7591.77	-57.57	-25	-32.57	-79.26	-60.87	8.30	11.60	H
	10122.36	-53.46	-25	-28.46	-79.55	-54.98	10.48	12.00	H
	5061.18	-61.20	-25	-36.20	-78.45	-66.76	7.14	12.70	V
	7591.77	-57.36	-25	-32.36	-78.83	-60.66	8.30	11.60	V
	10122.36	-54.24	-25	-29.24	-79.86	-55.76	10.48	12.00	V
NR n26 Middle	1654.2	-68.14	-13	-55.14	-74.02	-71.39	4.00	9.40	H
	2481.3	-63.99	-13	-50.99	-74.27	-67.56	4.88	10.60	H
	3308.4	-63.86	-13	-50.86	-76.17	-68.79	5.52	12.60	H
	1654.2	-68.44	-13	-55.44	-74.17	-71.69	4.00	9.40	V
	2481.3	-64.67	-13	-51.67	-75.31	-68.24	4.88	10.60	V
	3308.4	-63.78	-13	-50.78	-76.53	-68.71	5.52	12.60	V
LTE Band7 Middle	5061.18	-59.94	-25	-34.94	-77.26	-65.50	7.14	12.70	H
	7591.77	-57.91	-25	-32.91	-79.60	-61.21	8.30	11.60	H
	10122.36	-53.52	-25	-28.52	-79.61	-55.04	10.48	12.00	H
	5061.18	-60.22	-25	-35.22	-77.47	-65.78	7.14	12.70	V
	7591.77	-57.95	-25	-32.95	-79.42	-61.25	8.30	11.60	V
	10122.36	-54.10	-25	-29.10	-79.72	-55.62	10.48	12.00	V
NR n26 Highest	1659.2	-67.81	-13	-54.81	-73.69	-70.98	4.10	9.42	H
	2488.8	-64.96	-13	-51.96	-75.22	-68.54	4.90	10.63	H
	3318.4	-62.70	-13	-49.70	-74.93	-67.62	5.55	12.62	H
	1659.2	-68.03	-13	-55.03	-73.73	-71.20	4.10	9.42	V
	2488.8	-64.47	-13	-51.47	-75.08	-68.05	4.90	10.63	V
	3318.4	-64.26	-13	-51.26	-76.91	-69.18	5.55	12.62	V
LTE Band7 Highest	5061.18	-60.74	-25	-35.74	-78.06	-66.30	7.14	12.70	H
	7591.77	-57.47	-25	-32.47	-79.16	-60.77	8.30	11.60	H
	10122.36	-53.52	-25	-28.52	-79.61	-55.04	10.48	12.00	H
	5061.18	-59.97	-25	-34.97	-77.22	-65.53	7.14	12.70	V
	7591.77	-58.01	-25	-33.01	-79.48	-61.31	8.30	11.60	V
	10122.36	-53.96	-25	-28.96	-79.58	-55.48	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



DC_48A_n5A / LTE 10MHz + NR 20MHz / QPSK (ANT1+1)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 Lowest	1650	-68.72	-13	-55.72	-74.61	-71.95	3.98	9.36	H
	2475	-65.79	-13	-52.79	-76.09	-69.34	4.85	10.55	H
	3300	-64.08	-13	-51.08	-76.46	-69.01	5.50	12.58	H
	1650	-68.69	-13	-55.69	-74.47	-71.92	3.98	9.36	V
	2475	-65.29	-13	-52.29	-75.95	-68.84	4.85	10.55	V
	3300	-63.61	-13	-50.61	-76.44	-68.54	5.50	12.58	V
LTE Band48 Lowest	7232.00	-57.42	-40	-17.42	-53.83	-63.67	6.45	12.70	H
	10848.00	-55.01	-40	-15.01	-57.58	-58.41	8.40	11.80	H
	14464.00	-50.00	-40	-10.00	-57.95	-52.35	9.65	12.00	H
	7232.00	-53.39	-40	-13.39	-49.84	-59.64	6.45	12.70	V
	10848.00	-54.85	-40	-14.85	-57.18	-58.25	8.40	11.80	V
	14464.00	-50.52	-40	-10.52	-58.26	-52.87	9.65	12.00	V
NR n5 Middle	1654.5	-68.63	-13	-55.63	-74.51	-71.88	4.00	9.40	H
	2481.75	-66.04	-13	-53.04	-76.32	-69.61	4.88	10.60	H
	3309	-63.83	-13	-50.83	-76.13	-68.76	5.52	12.60	H
	1654.5	-68.64	-13	-55.64	-74.37	-71.89	4.00	9.40	V
	2481.75	-65.64	-13	-52.64	-76.28	-69.21	4.88	10.60	V
	3309	-63.65	-13	-50.65	-76.39	-68.58	5.52	12.60	V
LTE Band48 Middle	7232.00	-55.50	-40	-15.50	-51.91	-61.75	6.45	12.70	H
	10848.00	-54.87	-40	-14.87	-57.44	-58.27	8.40	11.80	H
	14464.00	-49.91	-40	-9.91	-57.86	-52.26	9.65	12.00	H
	7232.00	-55.94	-40	-15.94	-52.39	-62.19	6.45	12.70	V
	10848.00	-55.05	-40	-15.05	-57.38	-58.45	8.40	11.80	V
	14464.00	-50.21	-40	-10.21	-57.95	-52.56	9.65	12.00	V
NR n5 Highest	1660	-68.72	-13	-55.72	-74.60	-71.89	4.10	9.42	H
	2490	-65.89	-13	-52.89	-76.20	-69.47	4.90	10.63	H
	3320	-63.76	-13	-50.76	-75.97	-68.68	5.55	12.62	H
	1660	-68.70	-13	-55.70	-74.39	-71.87	4.10	9.42	V
	2490	-65.65	-13	-52.65	-76.30	-69.23	4.90	10.63	V
	3320	-63.52	-13	-50.52	-76.15	-68.44	5.55	12.62	V
LTE Band48 Highest	7232.00	-58.25	-40	-18.25	-54.66	-64.50	6.45	12.70	H
	10848.00	-54.73	-40	-14.73	-57.30	-58.13	8.40	11.80	H
	14464.00	-50.08	-40	-10.08	-58.03	-52.43	9.65	12.00	H
	7232.00	-50.41	-40	-10.41	-46.86	-56.66	6.45	12.70	V
	10848.00	-55.05	-40	-15.05	-57.38	-58.45	8.40	11.80	V
	14464.00	-50.33	-40	-10.33	-58.07	-52.68	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.