



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2519-1, XT2519-2, XT2519V  
**FCC ID** : IHDT56AU6  
**STANDARD** : 47 CFR Part 27  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : Jan. 20, 2025 ~ Feb. 17, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 5
1.5 Modification of EUT ..... 6
1.6 Maximum EIRP Power and Emission Designator ..... 6
1.7 Testing Site ..... 6
1.8 Test Software ..... 7
1.9 Applied Standards ..... 7
1.10 Specification of Accessory ..... 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8
2.1 Test Mode ..... 8
2.2 Connection Diagram of Test System ..... 9
2.3 Support Unit used in test configuration and system ..... 9
2.4 Measurement Results Explanation Example ..... 9
2.5 Frequency List of Low/Middle/High Channels ..... 10
3 CONDUCTED TEST ITEMS ..... 11
3.1 Measuring Instruments ..... 11
3.2 Test Setup ..... 11
3.3 Test Result of Conducted Test ..... 11
3.4 Conducted Output Power Measurement ..... 12
3.5 Peak-to-Average Ratio ..... 13
3.6 EIRP ..... 14
3.7 Occupied Bandwidth ..... 15
3.8 Conducted Band Edge Measurement ..... 16
3.9 Conducted Spurious Emission Measurement ..... 17
3.10 Frequency Stability Measurement ..... 18
4 RADIATED TEST ITEMS ..... 19
4.1 Measuring Instruments ..... 19
4.2 Test Setup ..... 19
4.3 Test Result of Radiated Test ..... 20
4.4 Radiated Spurious Emission Measurement ..... 21
5 LIST OF MEASURING EQUIPMENT ..... 22
6 MEASUREMENT UNCERTAINTY ..... 23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	-	Peak-to-Average Ratio	—	Report Only	
3.6	§27.50 (a)(3)	EIRP	EIRP < 250mW/5MHz	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.9	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	< 70+10log <sub>10</sub> (P[Watts])	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	< 70+10log <sub>10</sub> (P[Watts])	PASS	Under limit 13.59 dB at 9231.00 MHz

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2519-1, XT2519-2, XT2519V
FCC ID	IHDT56AU6
IMEI Code	Conducted: 355782390039091/355782390039109 Radiation: 355782390037798/355782390037806
HW Version	DVT2
SW Version	V2VD35.27
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The different model name is different for market purpose.

## 1.4 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	LTE Band 30 : 2305 MHz ~ 2315 MHz
Rx Frequency	LTE Band 30 : 2350 MHz ~ 2360 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 30 : 22.62 dBm for Ant.1 LTE Band 30 : 23.09 dBm for Ant.2
Antenna Gain	LTE Band 30 : -1.0 dBi for Ant.1 LTE Band 30 : -2.2 dBi for Ant.2
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

Note: The maximum EIRP is calculated from max output power and max antenna gain, so only the maximum EIRP of Antenna 1 for LTE Band30 are shown in the report.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum EIRP Power and Emission Designator

LTE Band 30		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2307.5 ~ 2312.5	0.1445	4M49G7D	0.1227	4M49W7D
10	2310.0	0.1452	8M99G7D	0.1233	9M03W7D

### 1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH03-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test case in section 4 of this report

### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24

### 1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27(D)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

### 1.10 Specification of Accessory

Accessories Information				
Battery	Brand Name	Motorola(ATL)	Model Name	RM52
USB Cable 1	Brand Name	Motorola(saibao)	Model Name	SC18D86731
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Z Plane)

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	30	-	-	V		-	-	V	V	V	V	V	V	V	V	V	V	V
		-	-		V	-	-	V	V	V	V	V	V	V		V		
Peak-to-Average Ratio	30	-	-		V	-	-	V	V	V		V		V		V		
E.I.R.P	30	-	-	V		-	-	V	V	V	V	V			V	V	V	
		-	-		V	-	-	V	V	V	V	V				V		
26dB and 99% Bandwidth	30	-	-	V		-	-	V	V	V				V	V	V	V	
		-	-		V	-	-	V	V					V		V		
Conducted Band Edge	30	-	-	V		-	-	V	V			V		V	V		V	
		-	-		V	-	-	V	V	V		V		V		V		
Conducted Spurious Emission	30	-	-	V		-	-	V				V			V	V	V	
		-	-		V	-	-	V				V				V		
Frequency Stability	30	-	-	V		-	-	V						V		V		
Radiated Spurious Emission	30	-	-	V		-	-	V				V			V	V	V	
					V			V			V				V			
Note	<ol style="list-style-type: none"> <li>The mark "v " means that this configuration is chosen for testing</li> <li>The mark "- " means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>																	

## 2.2 Connection Diagram of Test System

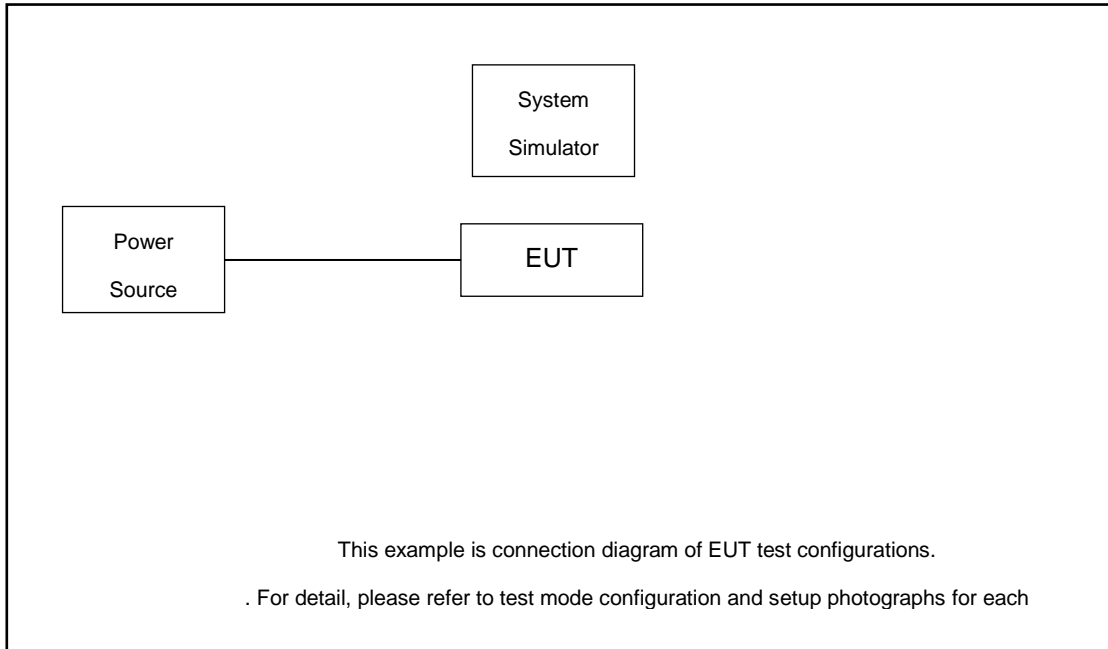

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.0 + 10 = 15.0 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

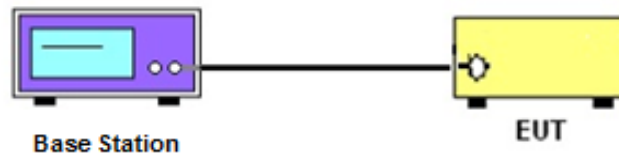

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

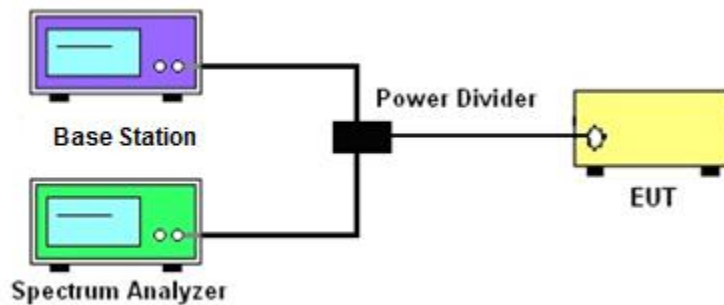

##### 3.2.3 Frequency Stability

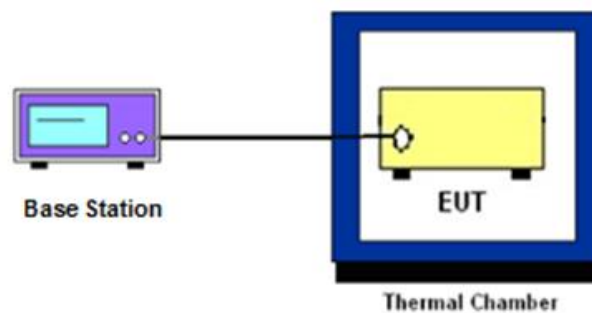

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.4 Conducted Output Power Measurement

### 3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

## 3.6 EIRP

### 3.6.1 Description of EIRP

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

### 3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2.  $EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.8 Conducted Band Edge Measurement

### 3.8.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;
- (iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used and the measured power was integrated over the full required measurement bandwidth of 1 MHz.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm.}$$

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $70 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [70 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[70 + 10\log(P)]$  (dB)  
= -40dBm

## 3.10 Frequency Stability Measurement

### 3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz



#### 4.2.2 For radiated test from 30MHz to 1GHz

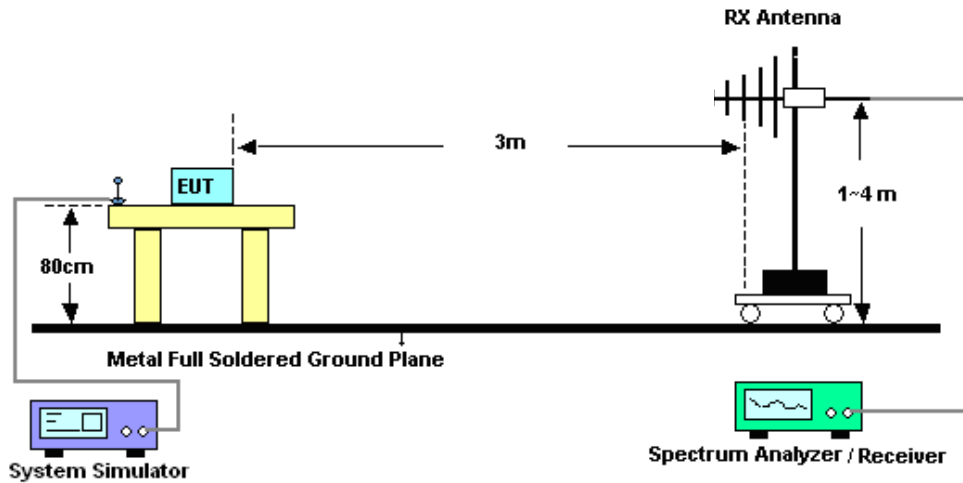

### 4.2.3 For radiated test above 1GHz

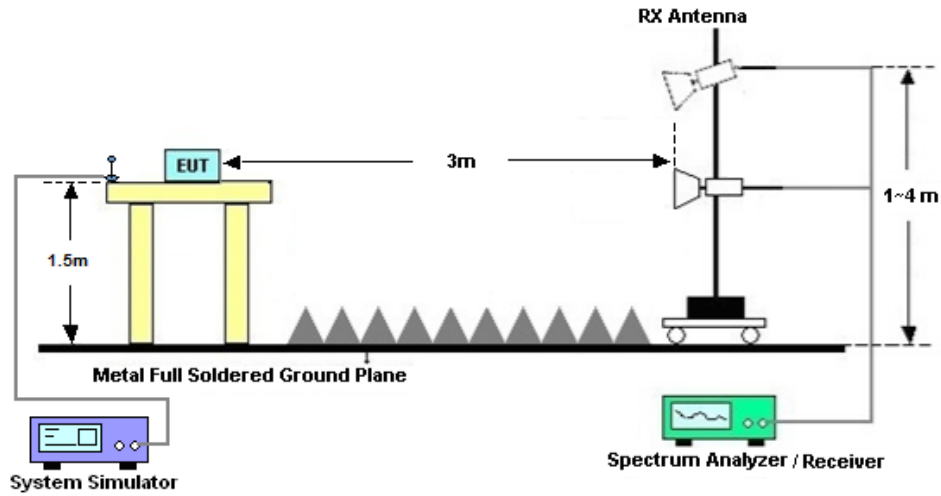

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $70 + 10 \log(P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $70 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [70 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$$

$$= -40\text{dBm.}$$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Jan. 20, 2025~ Jan. 24, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jan. 20, 2025~ Jan. 24, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jan. 20, 2025~ Jan. 24, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Feb. 17, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Feb. 17, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Feb. 17, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 20, 2023	Feb. 17, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Feb. 17, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Feb. 17, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Feb. 17, 2025	Jul. 02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Feb. 17, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Feb. 17, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 17, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 17, 2025	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.90 dB
Frequency Stability	±0.04ppm

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.6 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.8 dB
---	--------

----- THE END -----



## Appendix A. Test Results of Conducted Test

Test Engineer :	Fly	Temperature :	22~23°C
		Relative Humidity :	40~42%

### Conducted Output Power(Average power) and EIRP

LTE Band 30\_ANT1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				27710					
Frequency (MHz)				2310				M	
10	QPSK	1	0		22.62			0.1452	
10	QPSK	1	25		22.50			0.1413	
10	QPSK	1	49		22.50			0.1413	
10	QPSK	25	0		21.71			0.1178	
10	QPSK	25	12		21.57			0.1140	
10	QPSK	25	25		21.49			0.1119	
10	QPSK	50	0		21.60			0.1148	
10	16QAM	1	0		21.91			0.1233	
10	16QAM	1	25		21.86			0.1219	
10	16QAM	1	49		21.89			0.1227	
10	16QAM	25	0		20.52			0.0895	
10	16QAM	25	12		20.57			0.0906	
10	16QAM	25	25		20.40			0.0871	
10	16QAM	50	0		20.42			0.0875	
10	64QAM	1	0		20.84			0.0964	
10	64QAM	1	25		20.72			0.0938	
10	64QAM	1	49		20.63			0.0918	
10	64QAM	25	0		19.49			0.0706	
10	64QAM	25	12		19.47			0.0703	
10	64QAM	25	25		19.39			0.0690	
10	64QAM	50	0		19.42			0.0695	
10	256QAM	1	0		17.66			0.0463	
10	256QAM	1	25		17.65			0.0462	
10	256QAM	1	49		17.60			0.0457	
10	256QAM	25	0		17.49			0.0446	
10	256QAM	25	12		17.43			0.0440	
10	256QAM	25	25		17.40			0.0437	
10	256QAM	50	0		17.47			0.0444	
Channel				27685	27710	27735	ERP(W)		
Frequency (MHz)				2307.5	2310	2312.5	L	M	H




5	QPSK	1	0	22.58	22.53	22.60	0.1439	0.1422	0.1445
5	QPSK	1	12	22.39	22.45	22.42	0.1377	0.1396	0.1387
5	QPSK	1	24	22.40	22.39	22.47	0.1380	0.1377	0.1403
5	QPSK	12	0	21.60	21.62	21.59	0.1148	0.1153	0.1146
5	QPSK	12	7	21.48	21.51	21.49	0.1117	0.1125	0.1119
5	QPSK	12	13	21.39	21.47	21.47	0.1094	0.1114	0.1114
5	QPSK	25	0	21.51	21.54	21.56	0.1125	0.1132	0.1138
5	16QAM	1	0	21.89	21.86	21.83	0.1227	0.1219	0.1211
5	16QAM	1	12	21.74	21.83	21.76	0.1186	0.1211	0.1191
5	16QAM	1	24	21.83	21.88	21.78	0.1211	0.1225	0.1197
5	16QAM	12	0	20.47	20.48	20.48	0.0885	0.0887	0.0887
5	16QAM	12	7	20.55	20.45	20.56	0.0902	0.0881	0.0904
5	16QAM	12	13	20.35	20.31	20.35	0.0861	0.0853	0.0861
5	16QAM	25	0	20.38	20.37	20.34	0.0867	0.0865	0.0859
5	64QAM	1	0	20.77	20.79	20.72	0.0948	0.0953	0.0938
5	64QAM	1	12	20.70	20.61	20.66	0.0933	0.0914	0.0925
5	64QAM	1	24	20.53	20.63	20.55	0.0897	0.0918	0.0902
5	64QAM	12	0	19.38	19.40	19.45	0.0689	0.0692	0.0700
5	64QAM	12	7	19.37	19.38	19.38	0.0687	0.0689	0.0689
5	64QAM	12	13	19.33	19.37	19.36	0.0681	0.0687	0.0685
5	64QAM	25	0	19.40	19.34	19.42	0.0692	0.0682	0.0695
5	256QAM	1	0	17.63	17.64	17.60	0.0460	0.0461	0.0457
5	256QAM	1	12	17.65	17.64	17.63	0.0462	0.0461	0.0460
5	256QAM	1	24	17.53	17.49	17.58	0.0450	0.0446	0.0455
5	256QAM	12	0	17.45	17.39	17.45	0.0442	0.0436	0.0442
5	256QAM	12	7	17.40	17.32	17.37	0.0437	0.0429	0.0434
5	256QAM	12	13	17.37	17.33	17.34	0.0434	0.0430	0.0431
5	256QAM	25	0	17.45	17.37	17.44	0.0442	0.0434	0.0441



## LTE Band 30

### Peak-to-Average Ratio

Mode	LTE Band 30 / 10MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.55	5.45	6.12	<b>PASS</b>

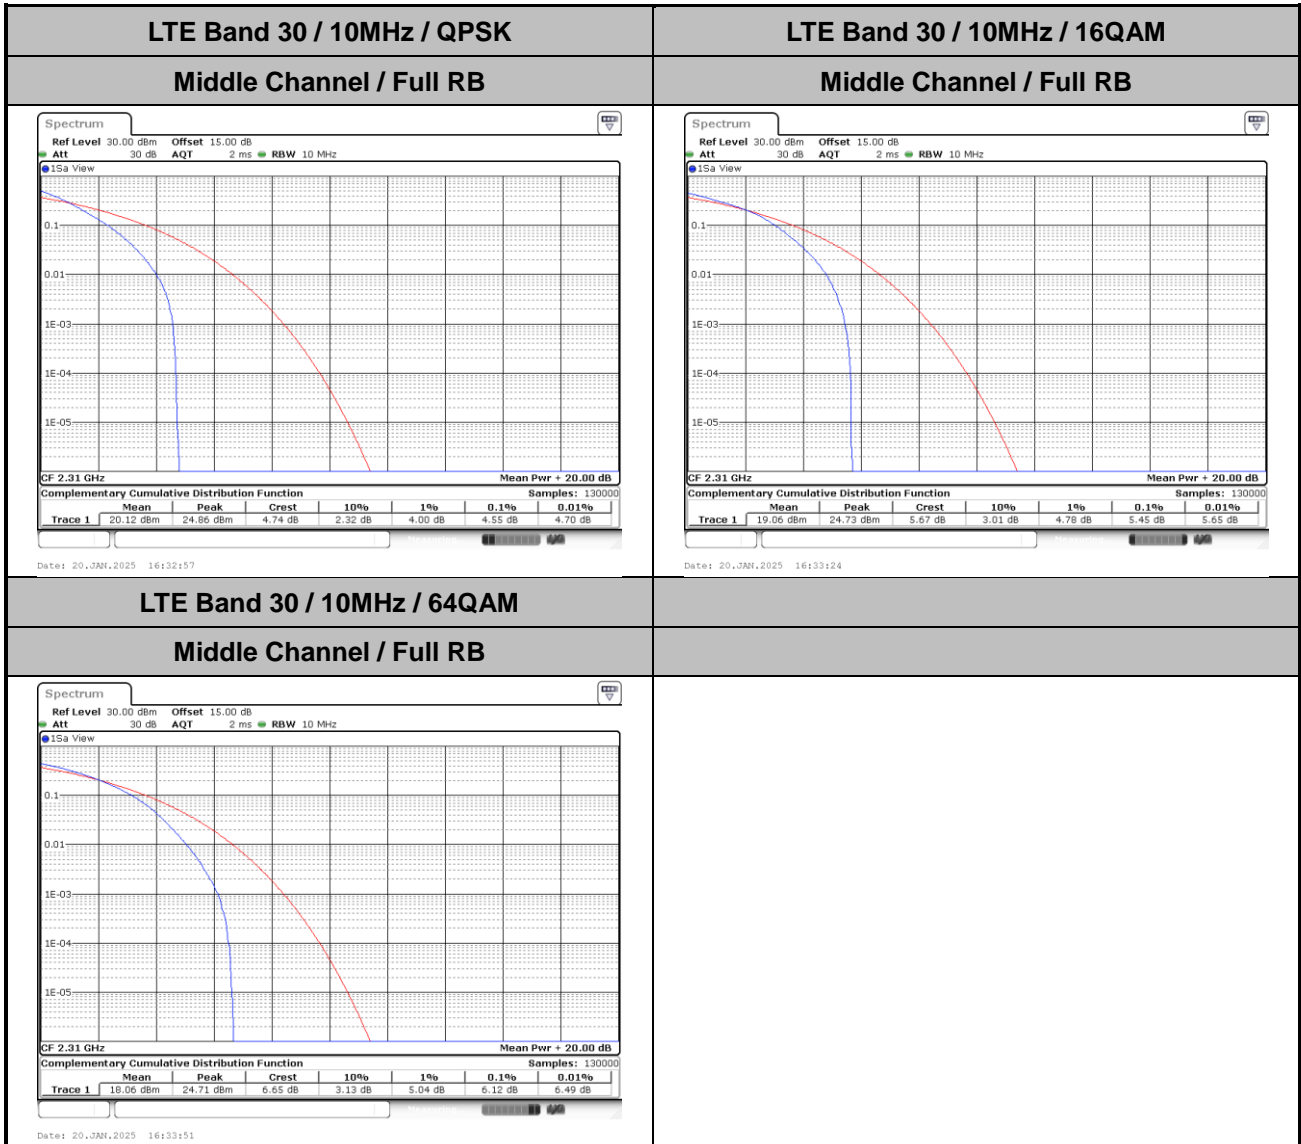




**26dB Bandwidth**

Mode	LTE Band 30 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	4.94	4.85	9.63	9.75	-	-	-	-




LTE Band 30

Middle Channel / 5MHz / QPSK

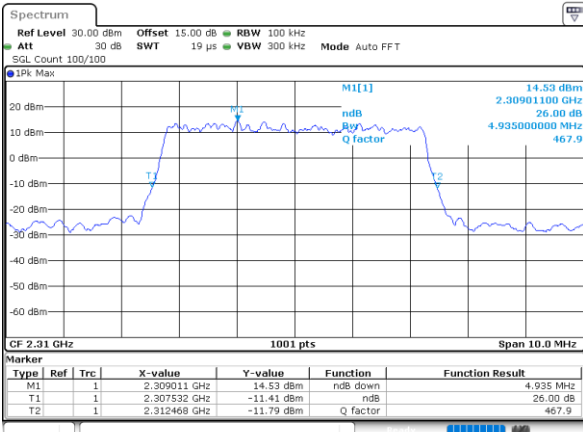


Date: 20\_JAN\_2025 16:20:12

Middle Channel / 5MHz / 16QAM

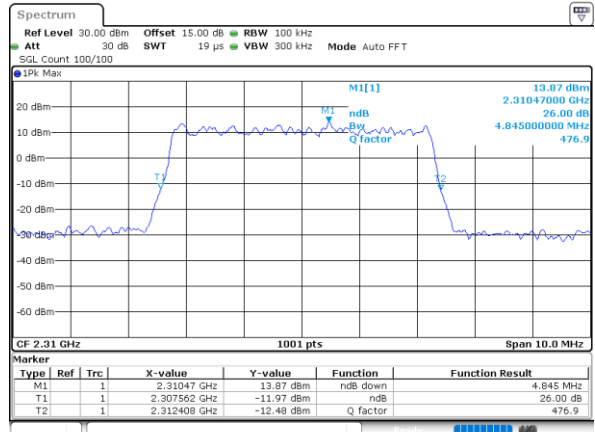


Date: 20\_JAN\_2025 16:20:52

Middle Channel / 10MHz / QPSK

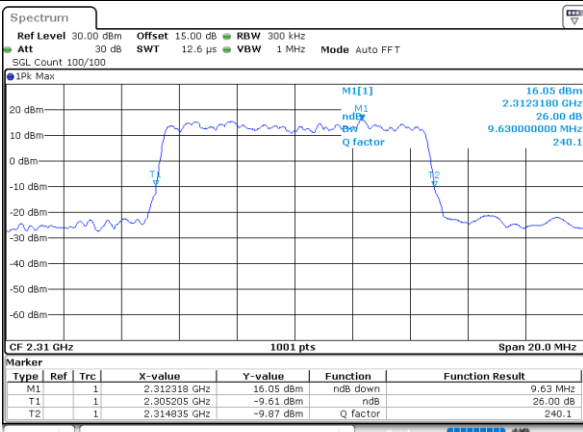

Date: 20\_JAN\_2025 16:31:51

Middle Channel / 10MHz / 16QAM

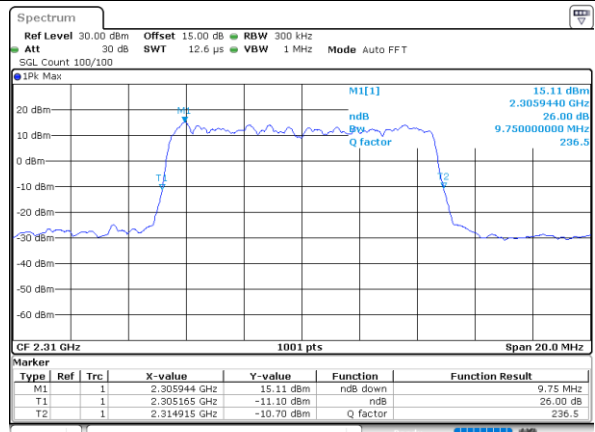

Date: 20\_JAN\_2025 16:32:31




### Occupied Bandwidth

Mode	LTE Band 30 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	4.49	4.49	8.99	9.03	-	-	-	-




LTE Band 30

Middle Channel / 5MHz / QPSK

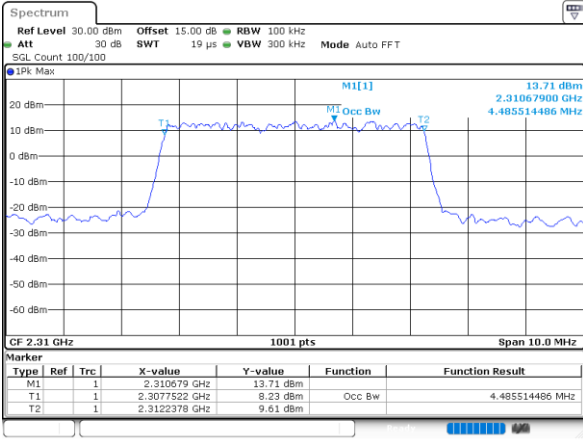


Date: 20\_JAN\_2025 16:19:58

Middle Channel / 5MHz / 16QAM

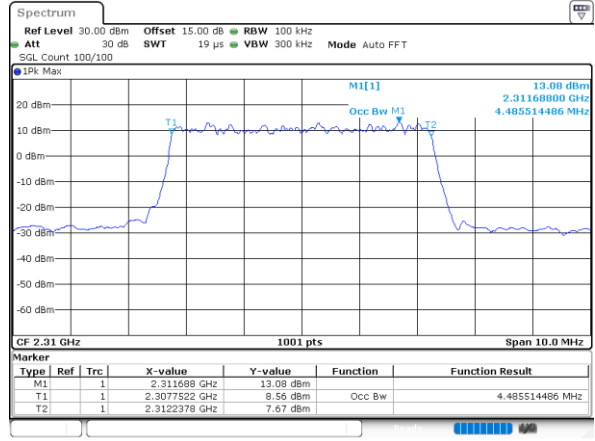


Date: 20\_JAN\_2025 16:20:38

Middle Channel / 10MHz / QPSK

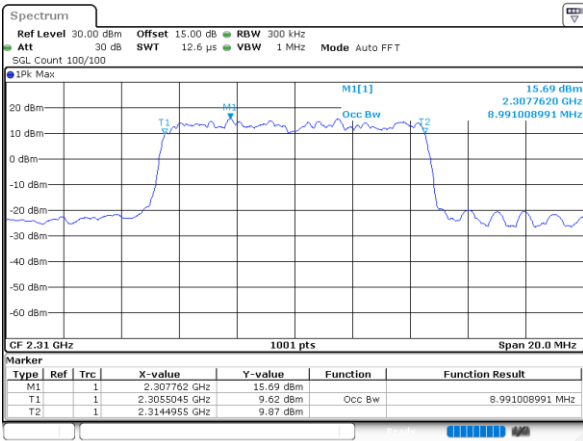

Date: 20\_JAN\_2025 16:31:38

Middle Channel / 10MHz / 16QAM

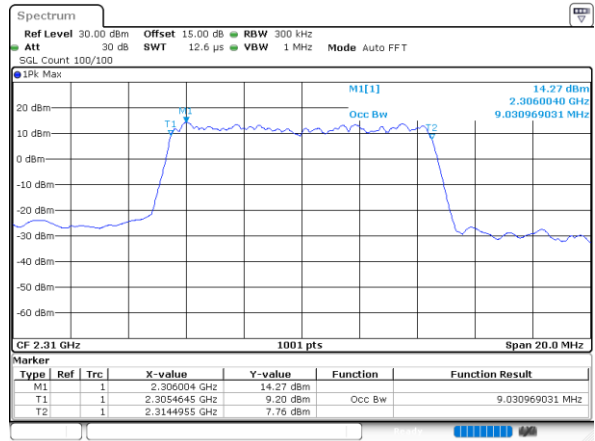


Date: 20\_JAN\_2025 16:32:17



# Conducted Band Edge

## LTE Band 30 / 5MHz / QPSK


### Lowest Band Edge / 1 RB

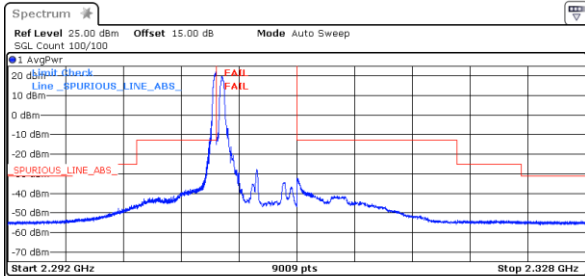

Range Low	Range Up	RBW	Frequency	Power Abs	ALimit
2.292 GHz	2.296 GHz	1.000 MHz	2.29571 GHz	-53.60 dBm	-22.60 dB
2.296 GHz	2.300 GHz	1.000 MHz	2.30000 GHz	-45.90 dBm	-20.90 dB
2.300 GHz	2.304 GHz	1.000 MHz	2.30394 GHz	-36.97 dBm	-23.97 dB
2.304 GHz	2.305 GHz	1.000 MHz	2.30499 GHz*	22.20 dBm*	35.20 dB*
2.305 GHz	2.310 GHz	100.000 kHz	2.30533 GHz	-19.77 dBm	-10.23 dB
2.310 GHz	2.311 GHz	1.000 MHz	2.31004 GHz	-32.40 dBm	-19.40 dB
2.311 GHz	2.320 GHz	1.000 MHz	2.31103 GHz	-40.97 dBm	-27.97 dB
2.320 GHz	2.324 GHz	1.000 MHz	2.32228 GHz	-53.65 dBm	-28.65 dB
2.324 GHz	2.328 GHz	1.000 MHz	2.32773 GHz	-53.97 dBm	-22.97 dB

Date: 24\_JAN\_2025 10:23:40


### Highest Band Edge / 1 RB

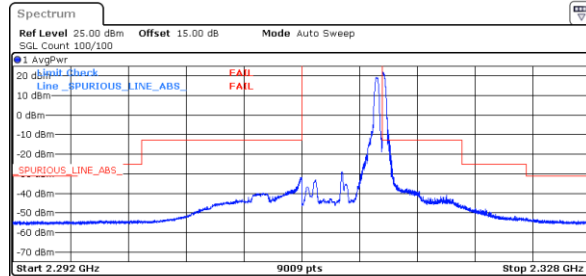

Range Low	Range Up	RBW	Frequency	Power Abs	ALimit
2.292 GHz	2.296 GHz	1.000 MHz	2.29550 GHz	-54.30 dBm	-23.30 dB
2.296 GHz	2.300 GHz	1.000 MHz	2.29981 GHz	-53.80 dBm	-28.80 dB
2.300 GHz	2.309 GHz	1.000 MHz	2.30760 GHz	-39.89 dBm	-26.89 dB
2.309 GHz	2.310 GHz	1.000 MHz	2.30998 GHz	-31.85 dBm	-19.85 dB
2.310 GHz	2.315 GHz	100.000 kHz	2.31463 GHz	19.34 dBm	-10.66 dB
2.315 GHz	2.316 GHz	1.000 MHz	2.31503 GHz*	22.34 dBm*	35.34 dB*
2.316 GHz	2.320 GHz	1.000 MHz	2.31605 GHz	-37.07 dBm	-24.07 dB
2.320 GHz	2.324 GHz	1.000 MHz	2.32011 GHz	-46.15 dBm	-21.15 dB
2.324 GHz	2.328 GHz	1.000 MHz	2.32403 GHz	-52.94 dBm	-21.94 dB

Date: 24\_JAN\_2025 11:22:37

### Lowest Band Edge / 1 RB / Lower zoom in

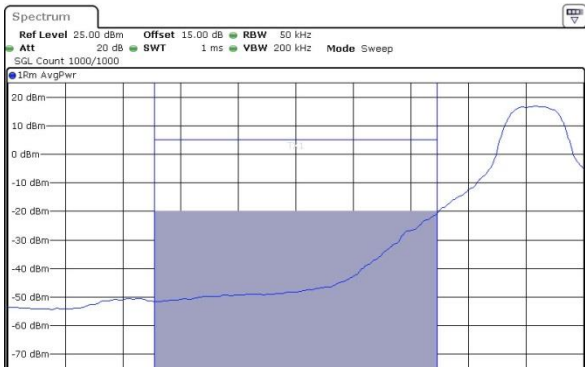

CF	Bandwidth	Power	Tx Total
2.3045 GHz	1.00 MHz	-19.81 dBm	-19.81 dBm

Date: 24\_JAN\_2025 10:24:35

### Highest Band Edge / 1 RB / Lower zoom in




CF	Bandwidth	Power	Tx Total
2.3155 GHz	1.00 MHz	-19.80 dBm	-19.80 dBm

Date: 24\_JAN\_2025 11:23:06




LTE Band 30 / 5MHz / QPSK

Lowest Band Edge / Full RB

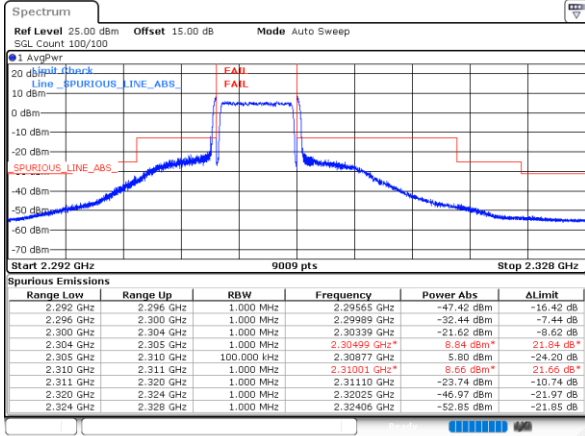


Date: 24.JAN.2025 11:06:59

Highest Band Edge / Full RB

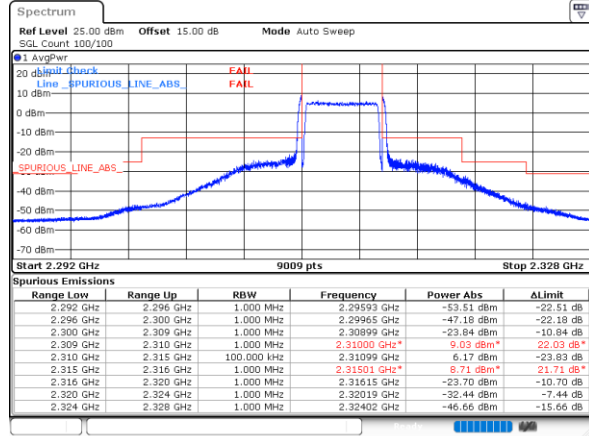


Date: 24.JAN.2025 11:26:53

Lowest Band Edge / Full RB / Lower zoom in

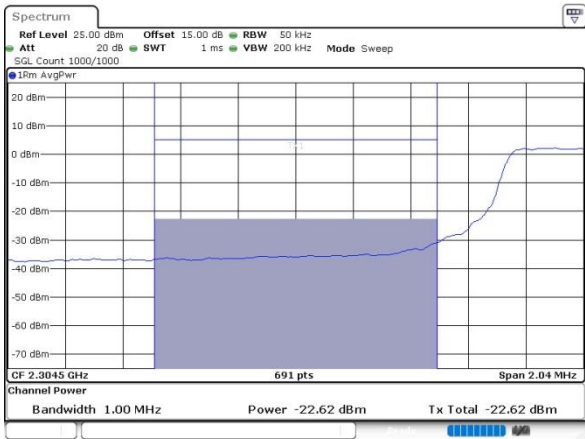


Date: 24.JAN.2025 11:14:24

Highest Band Edge / Full RB / Lower zoom in

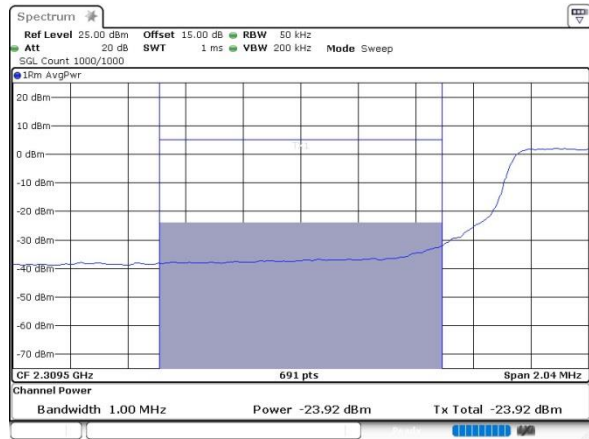


Date: 24.JAN.2025 11:28:01

Lowest Band Edge / Full RB / Upper zoom in

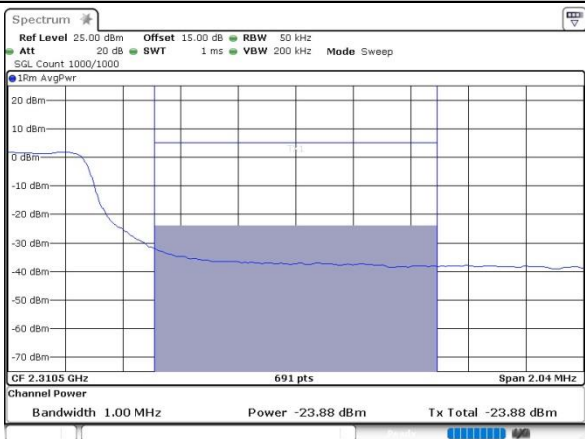

Date: 24.JAN.2025 11:14:48

Highest Band Edge / Full RB / Upper zoom in

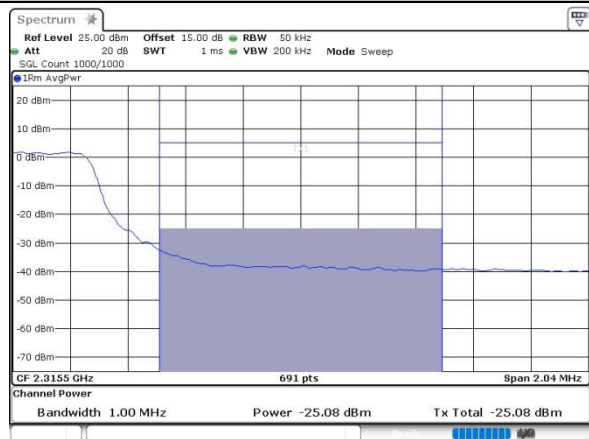


Date: 24.JAN.2025 11:28:34




LTE Band 30 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

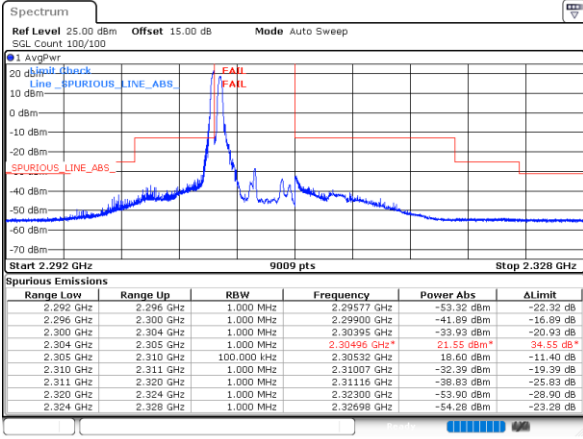


Date: 24.JAN.2025 10:29:10

Highest Band Edge / 1 RB

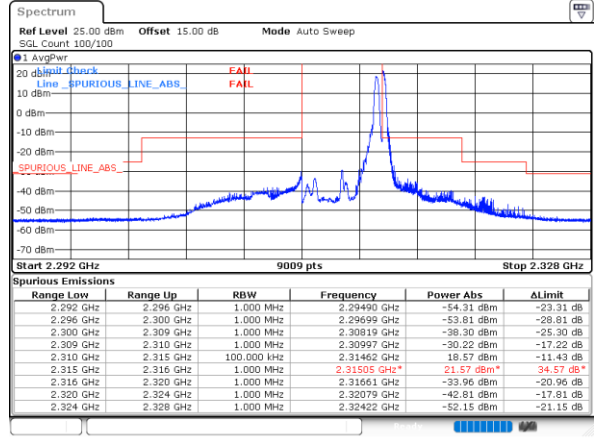


Date: 24.JAN.2025 11:23:43

Lowest Band Edge / 1 RB / Lower zoom in

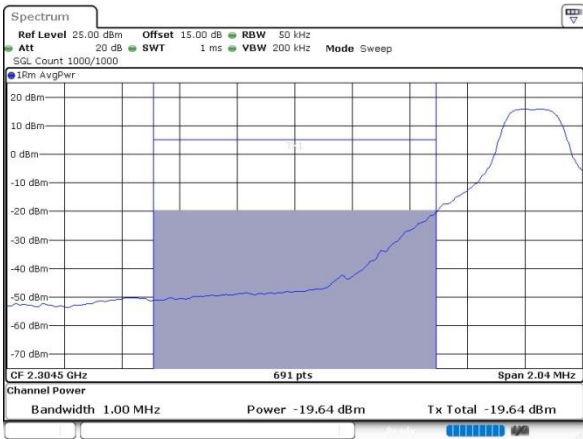

Date: 24.JAN.2025 10:29:42

Highest Band Edge / 1 RB / Lower zoom in

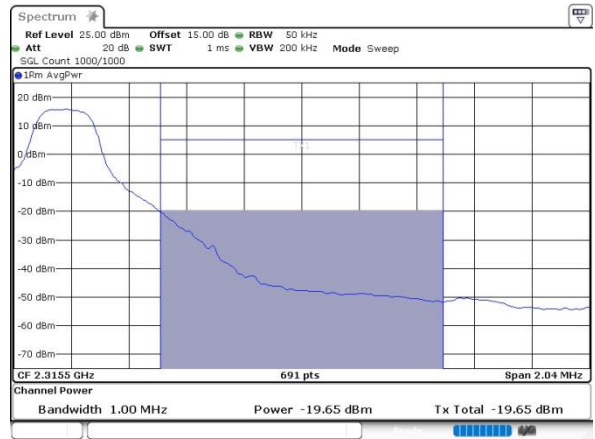


Date: 24.JAN.2025 11:24:17




LTE Band 30 / 5MHz / 16QAM

Lowest Band Edge / Full RB

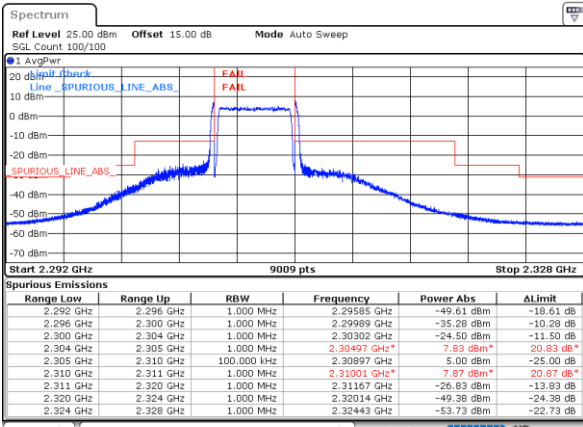


Date: 24\_JAN\_2025 11:15:36

Highest Band Edge / Full RB

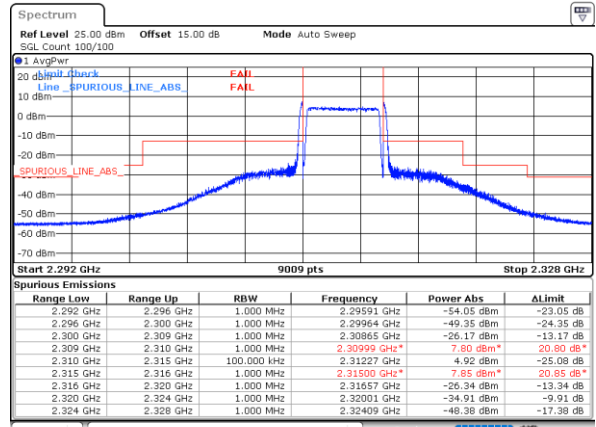


Date: 24\_JAN\_2025 11:13:33

Lowest Band Edge / Full RB / Lower zoom in

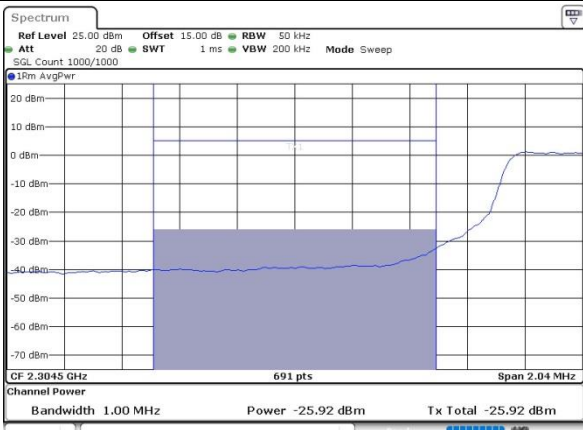


Date: 24\_JAN\_2025 11:16:12

Highest Band Edge / Full RB / Lower zoom in

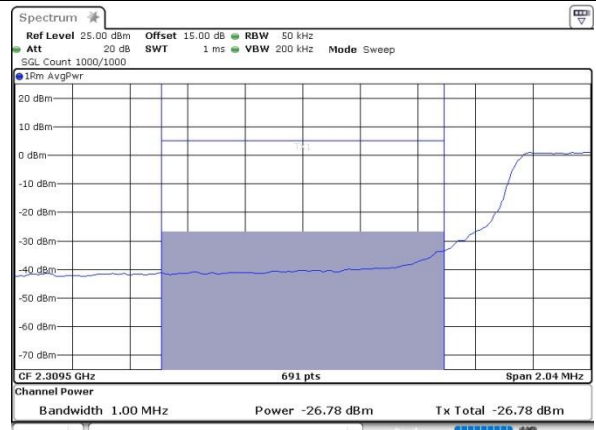


Date: 24\_JAN\_2025 11:14:27

Lowest Band Edge / Full RB / Upper zoom in

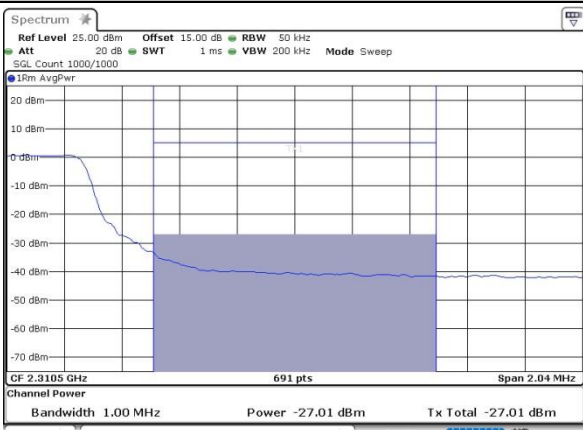

Date: 24\_JAN\_2025 11:16:20

Highest Band Edge / Full RB / Upper zoom in

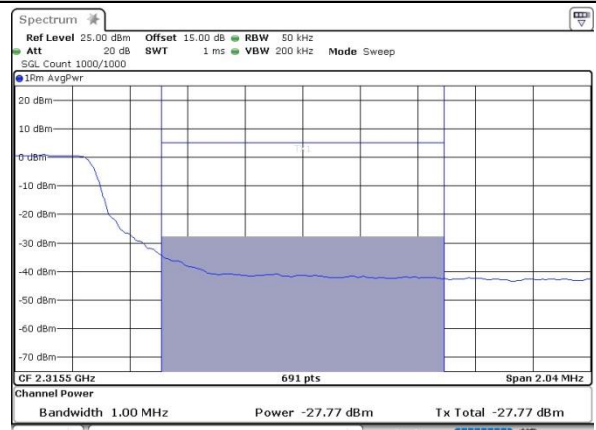


Date: 24\_JAN\_2025 11:14:57




LTE Band 30 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

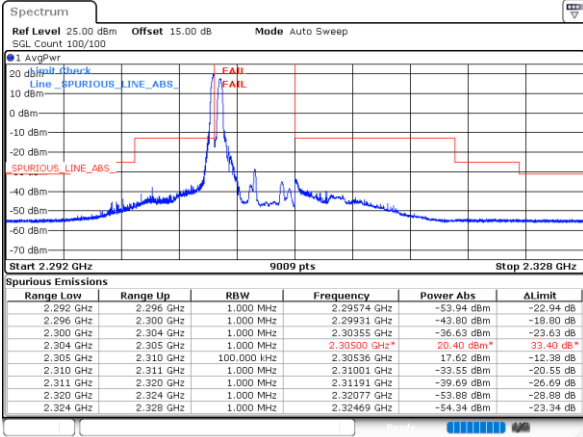

Date: 24\_JAN\_2025 10:30:48

Highest Band Edge / 1 RB

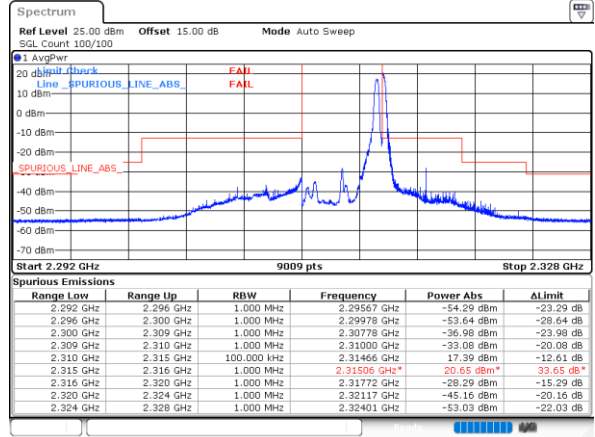


Date: 24\_JAN\_2025 11:24:55

Lowest Band Edge / 1 RB / Lower zoom in



Date: 24\_JAN\_2025 10:31:11

Highest Band Edge / 1 RB / Lower zoom in

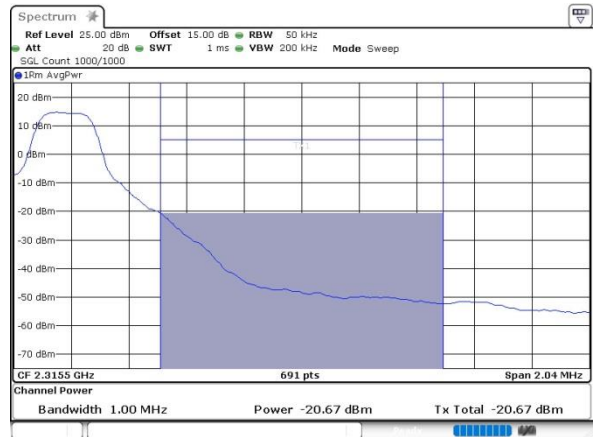


Date: 24\_JAN\_2025 11:25:33




LTE Band 30 / 5MHz / 64QAM

Lowest Band Edge / Full RB

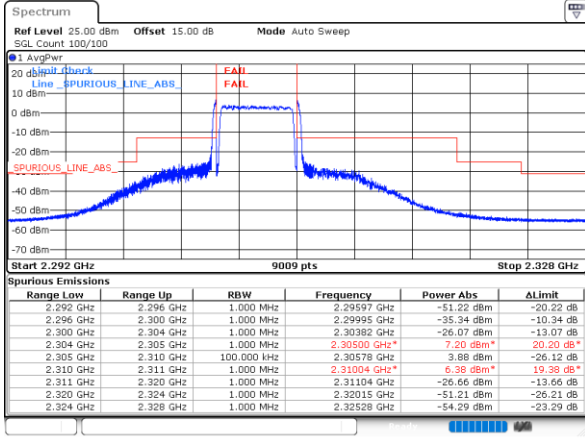


Date: 24\_JAN.2025 11:18:02

Highest Band Edge / Full RB

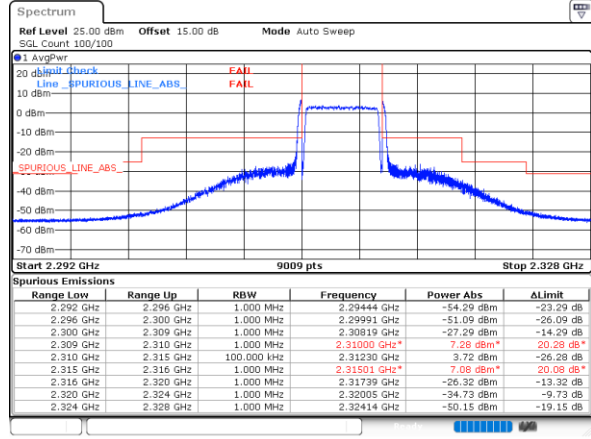


Date: 24\_JAN.2025 11:45:08

Lowest Band Edge / Full RB / Lower zoom in

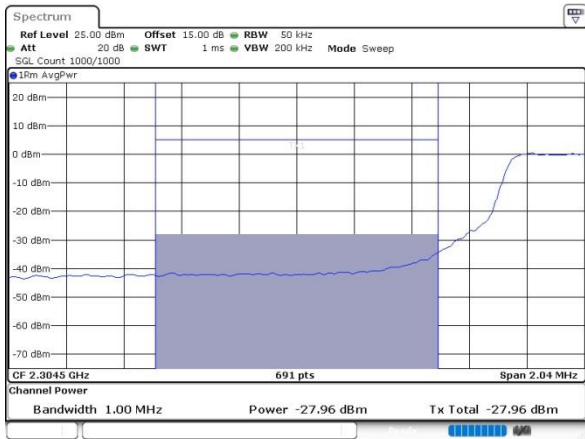

Date: 24\_JAN.2025 11:18:27

Highest Band Edge / Full RB / Lower zoom in

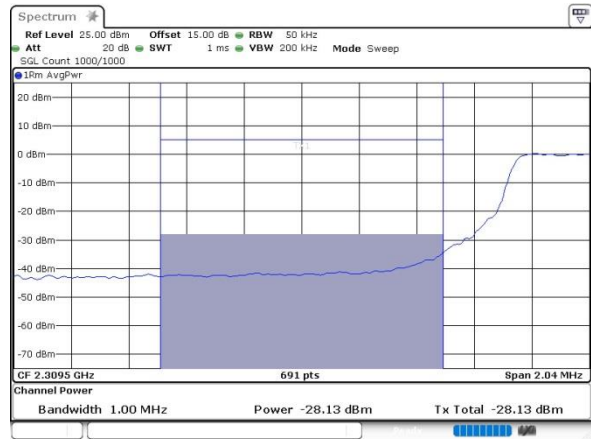


Date: 24\_JAN.2025 11:46:06

Lowest Band Edge / Full RB / Upper zoom in




Date: 24\_JAN.2025 11:18:44

Highest Band Edge / Full RB / Upper zoom in

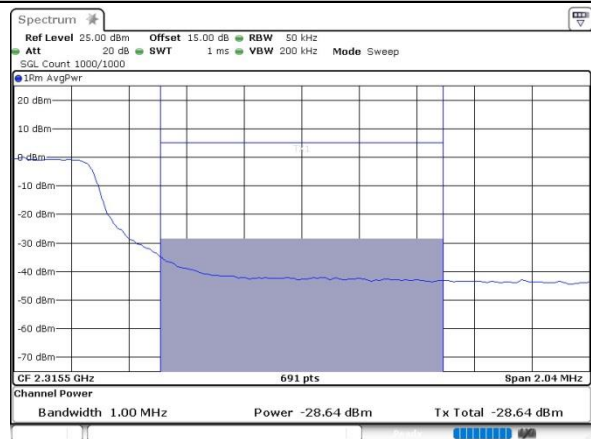


Date: 24\_JAN.2025 11:47:08

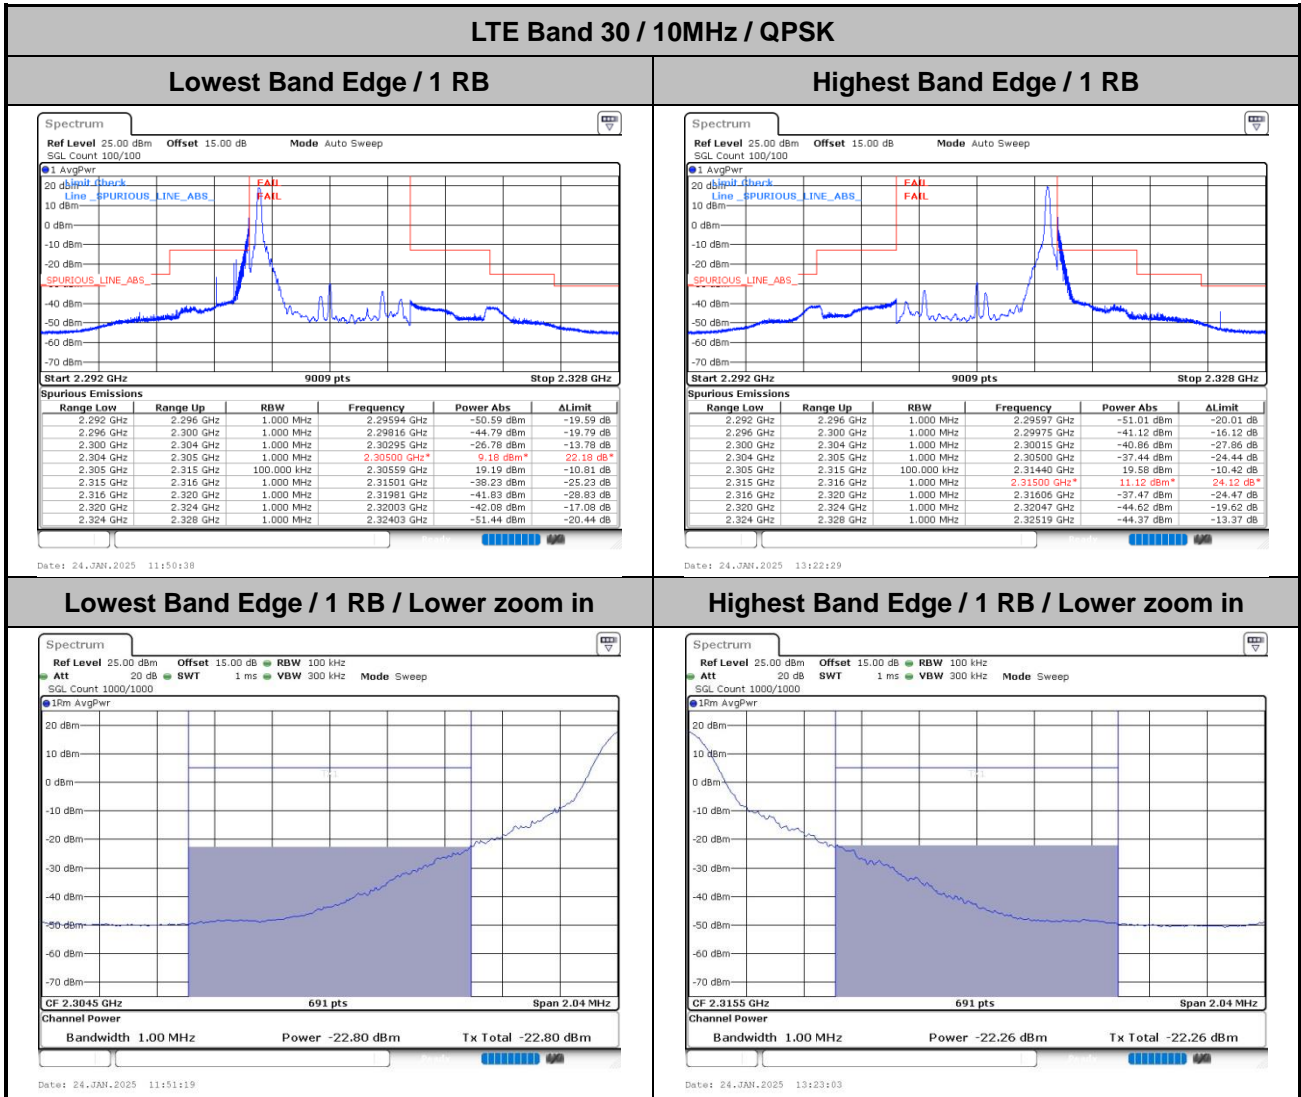




LTE Band 30 / 10MHz / QPSK

Lowest Band Edge / Full RB

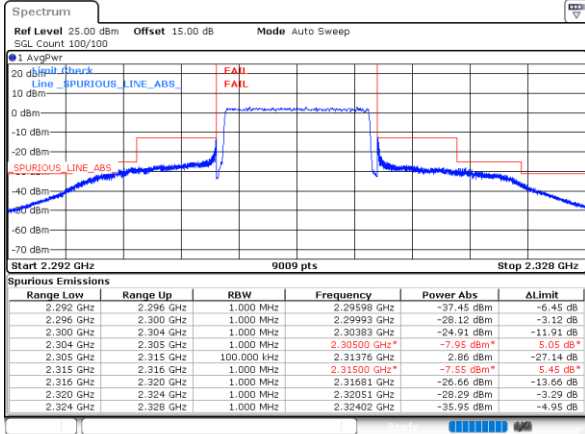


Date: 24\_JAN\_2025 13:25:19

Lowest Band Edge / Full RB / Lower zoom in

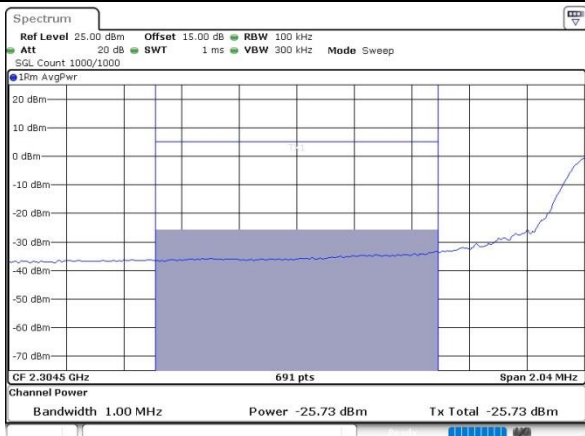

Date: 24\_JAN\_2025 13:25:51

Lowest Band Edge / Full RB / Upper zoom in

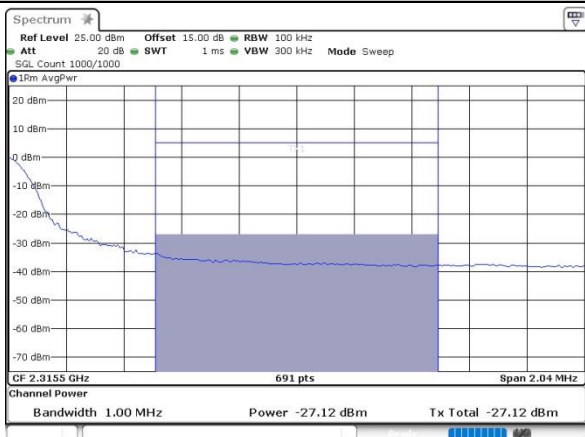


Date: 24\_JAN\_2025 13:26:09




LTE Band 30 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

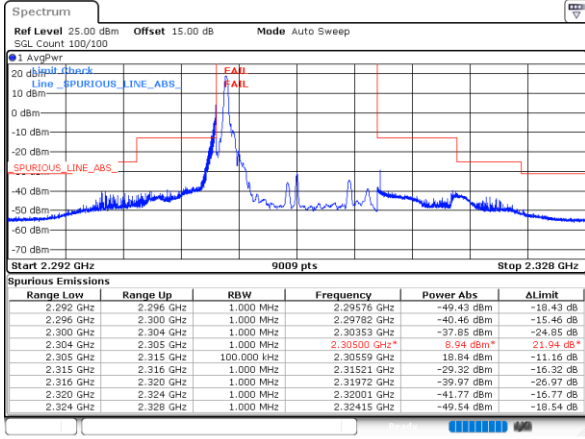


Date: 24.JAN.2025 13:16:30

Highest Band Edge / 1 RB

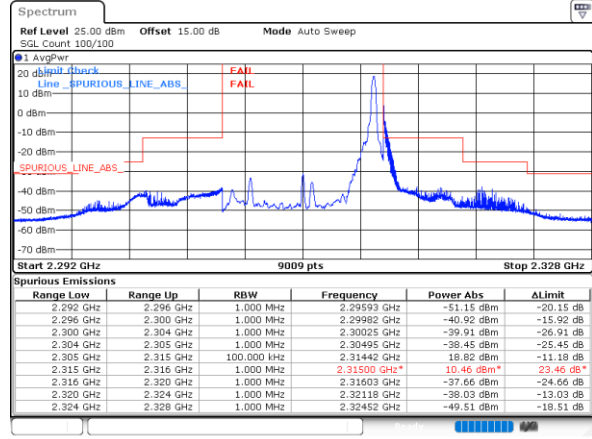


Date: 24.JAN.2025 13:21:26

Lowest Band Edge / 1 RB / Lower zoom in

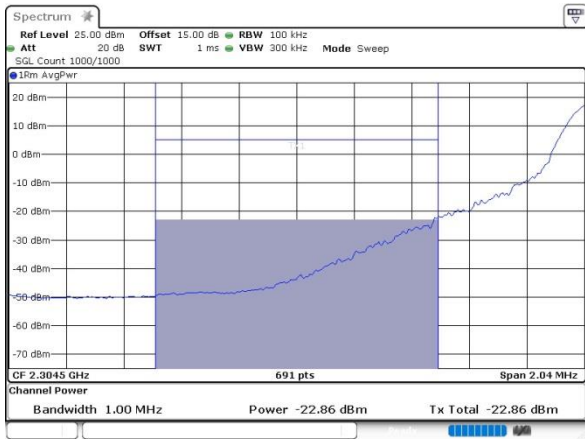

Date: 24.JAN.2025 13:17:59

Highest Band Edge / 1 RB / Lower zoom in

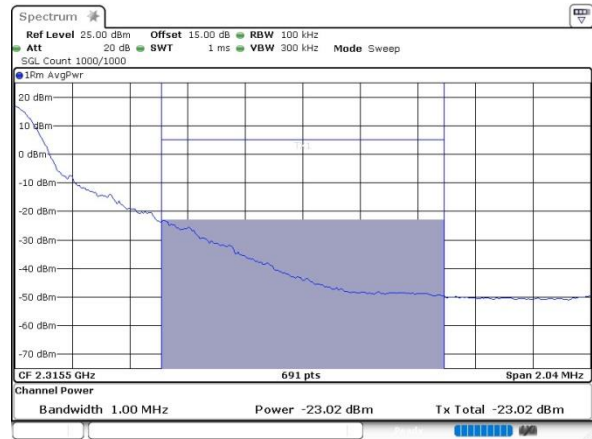


Date: 24.JAN.2025 13:21:55




LTE Band 30 / 10MHz / 16QAM

Lowest Band Edge / Full RB

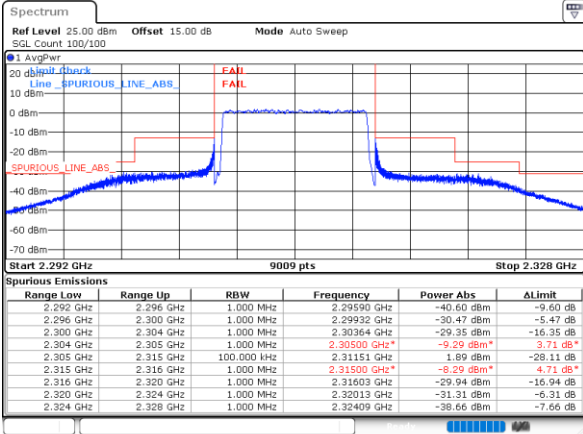


Date: 24\_JAN\_2025 13:27:06

Lowest Band Edge / Full RB / Lower zoom in

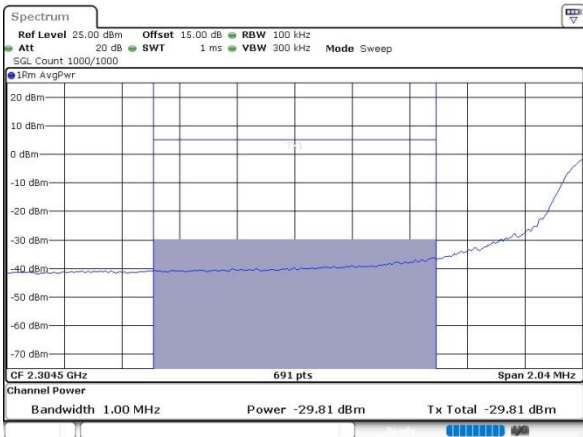

Date: 24\_JAN\_2025 13:27:33

Lowest Band Edge / Full RB / Upper zoom in

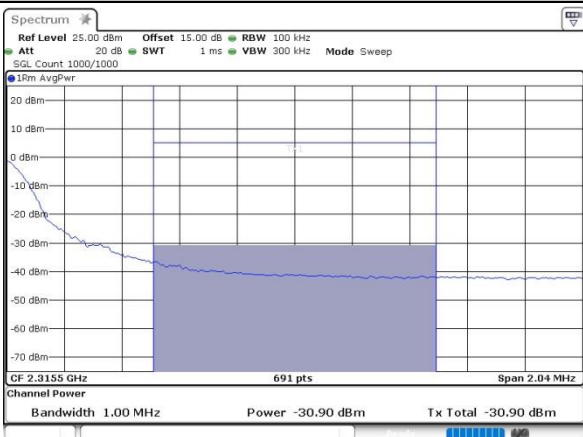


Date: 24\_JAN\_2025 13:28:05




**LTE Band 30 / 10MHz / 64QAM**

**Lowest Band Edge / 1 RB**

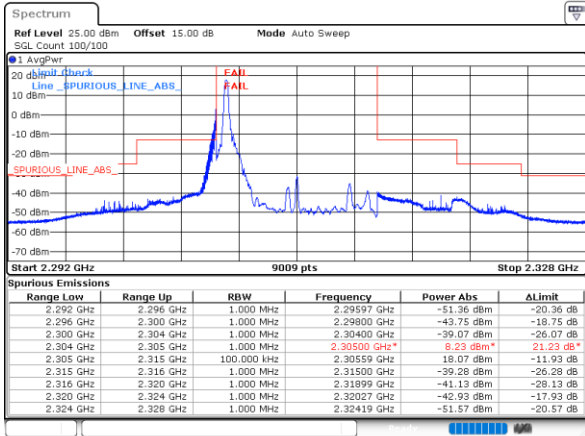


Date: 24\_JAN.2025 13:18:41

**Highest Band Edge / 1 RB**

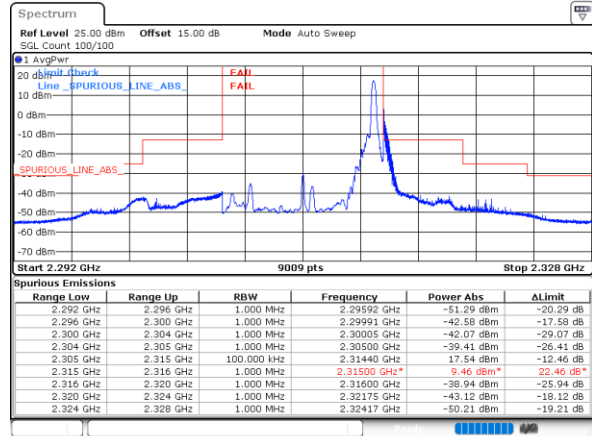


Date: 24\_JAN.2025 13:19:49

**Lowest Band Edge / 1 RB / Lower zoom in**

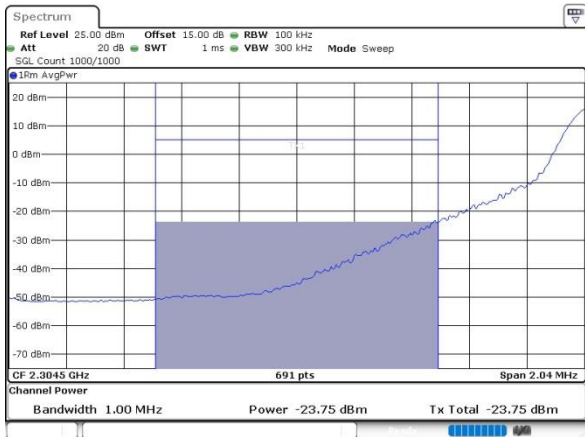

Date: 24\_JAN.2025 13:19:09

**Highest Band Edge / 1 RB / Lower zoom in**

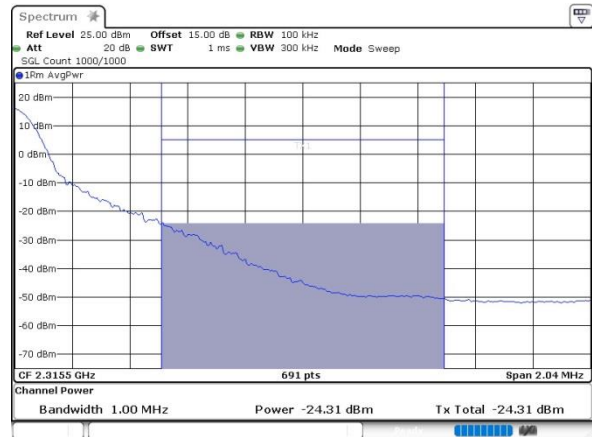


Date: 24\_JAN.2025 13:20:37



LTE Band 30 / 10MHz / 64QAM

Lowest Band Edge / Full RB

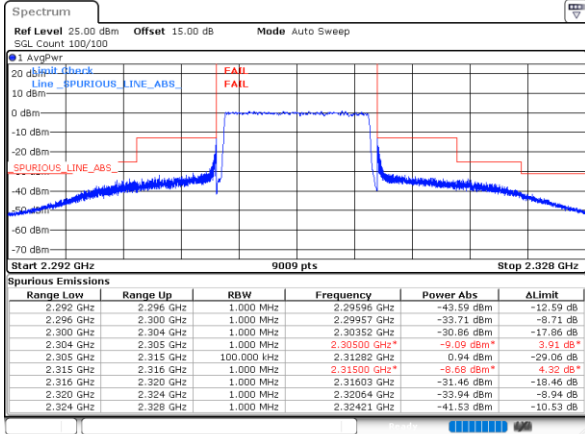


Date: 24\_JAN\_2025 13:28:40

Lowest Band Edge / Full RB / Lower zoom in



Date: 24\_JAN\_2025 13:29:08

Lowest Band Edge / Full RB / Upper zoom in

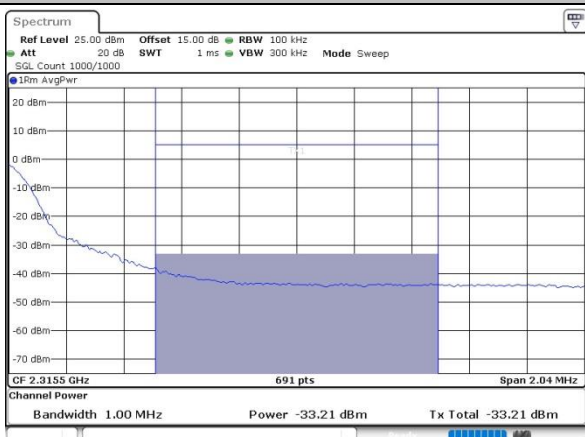

Date: 24\_JAN\_2025 13:29:44




# Conducted Spurious Emission





LTE Band 30 / 10MHz

Middle Channel / QPSK

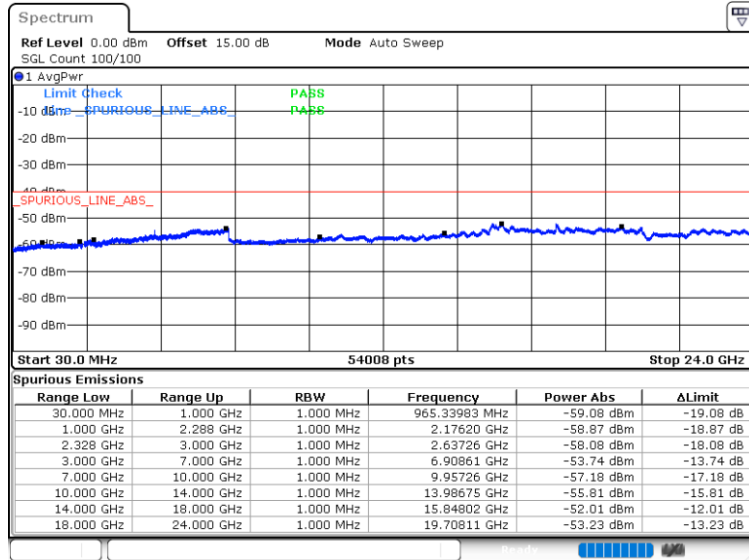

Date: 20.JAN.2025 16:31:11

## Frequency Stability

Test Conditions		LTE Band 30 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 5MHz	Note 2.
		Frequency Offset ( $\Delta f$ ) (Hz)	Result
50	Normal Voltage	3.1	PASS
40	Normal Voltage	1.7	
30	Normal Voltage	2.5	
20(Ref.)	Normal Voltage	3.6	
10	Normal Voltage	-4.6	
0	Normal Voltage	1.9	
-10	Normal Voltage	-4	
-20	Normal Voltage	2.6	
-30	Normal Voltage	-2.7	
20	Maximum Voltage	3.9	
20	Normal Voltage	3.6	
20	Battery End Point	-5.2	

**Note:**

1. Normal Voltage = 3.91 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.5 V.
2. The frequency fundamental emissions stay within the authorized frequency block.

$$\text{MAX}(\Delta f) = 5.2\text{Hz}$$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L -  \text{MAX}(\Delta f) $	2305.252195	$\geq 2305$ MHz	PASS
$f_H +  \text{MAX}(\Delta f) $	2314.747805	$\leq 2315$ MHz	



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

Test Engineer :	Shunping You	Temperature :	22~25°C
		Relative Humidity :	48~52%

Note: Pre-scanned harmonic for the different antennas, we choose the worst antenna mode to perform final test and record in the report.

LTE Band 30 / 5MHz / QPSK / ANT2									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4610.50	-64.31	-40	-24.31	-57.77	-70.56	6.30	12.55	H
	6915.75	-62.27	-40	-22.27	-57.28	-65.67	8.25	11.65	H
	9221.00	-56.18	-40	-16.18	-57.56	-58.53	9.50	11.85	H
	4610.50	-64.51	-40	-24.51	-57.82	-70.76	6.30	12.55	V
	6915.75	-62.08	-40	-22.08	-57.06	-65.48	8.25	11.65	V
	9221.00	-56.36	-40	-16.36	-57.32	-58.71	9.50	11.85	V
Middle	4615.50	-63.90	-40	-23.90	-57.38	-70.15	6.45	12.70	H
	6923.25	-61.38	-40	-21.38	-56.43	-64.78	8.40	11.80	H
	9231.00	-53.59	-40	-13.59	-54.98	-55.94	9.65	12.00	H
	4615.50	-63.85	-40	-23.85	-57.19	-70.10	6.45	12.70	V
	6923.25	-60.99	-40	-20.99	-56.02	-64.39	8.40	11.80	V
	9231.00	-55.81	-40	-15.81	-56.79	-58.16	9.65	12.00	V
Highest	4620.50	-63.92	-40	-23.92	-57.40	-70.17	6.61	12.86	H
	6930.75	-61.36	-40	-21.36	-56.44	-64.74	8.56	11.94	H
	9241.00	-54.81	-40	-14.81	-56.21	-57.16	9.81	12.16	H
	4620.50	-64.14	-40	-24.14	-57.49	-70.39	6.61	12.86	V
	6930.75	-61.24	-40	-21.24	-56.33	-64.62	8.56	11.94	V
	9241.00	-56.25	-40	-16.25	-57.25	-58.60	9.81	12.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 30 / 10MHz / QPSK / ANT2									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4611.50	-63.98	-40	-23.98	-57.44	-70.23	6.45	12.70	H
	6916.50	-61.70	-40	-21.70	-56.72	-65.10	8.40	11.80	H
	9222.00	-55.95	-40	-15.95	-57.33	-58.30	9.65	12.00	H
	4611.50	-63.63	-40	-23.63	-56.94	-69.88	6.45	12.70	V
	6916.50	-61.78	-40	-21.78	-56.76	-65.18	8.40	11.80	V
	9222.00	-56.06	-40	-16.06	-57.02	-58.41	9.65	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.