



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2503-4, XT2505-1
FCC ID : IHDT56AU8
STANDARD : 47 CFR Part 2, 22, 24, 27, 90S
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Jan. 03, 2025 ~ Jan. 23, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (KunShan)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	6
1.8 Specification of Accessory.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	13
4 MEASUREMENT UNCERTAINTY	15
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4D1311-01E	Rev. 01	Initial issue of report	Feb. 10, 2025

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2503-4, XT2505-1
FCC ID	IHDT56AU8
IMEI Code	Conducted/DFS: 357706750005150/357706750005168 Radiation: 357706750006133/357706750006141 Conduction: 357706750006158/357706750006166
HW Version	DVT2
SW Version	V2VC35.13
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ DFS01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS 03CH08-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH08-KS	AUDIX	E3	210616
4.	03CH01-SZ	AUDIX	E3	6.2009-8-24
5.	DFS01-SZ	Sporton	Test Tools	1.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 484596 D01 Referencing Test Data v02r03
- 47 CFR Part 2, 22, 24, 27, 90S
- 47 CFR Part 15 Subpart C §15.225
- 47 CFR Part 15 Subpart C §15.247
- 47 CFR Part 15 Subpart E §15.407
- ANSI C63.10-2013
- ANSI C63.26-2015

1.8 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola(Chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola(Acbel)	Model Name	MC-687N
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-689N
Battery 1	Brand Name	Motorola(ATL)	Model Name	RM52
Battery 2	Brand Name	Motorola(Cosmx)	Model Name	RM52
Earphone	Brand Name	Motorola(Lyand)	Model Name	MI181C
USB Cable 1	Brand Name	Motorola(saibao)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
USB Cable 3	Brand Name	Motorola(saibao)	Model Name	SC18D86731
USB Cable 4	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2503-4, XT2505-1, FCC ID: IHDT56AU8) is electrically identical to the reference device (Model: XT2503-1, XT2505-3, FCC ID: IHDT56AU7) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA4D1311-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AU8 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AU7 and FCC ID: IHDT56AU8 is as below:

- Remove WCDMA B4, LTE B4/12/13/17/66 and 5G NR n2/n66.
- Add LTE B18/19/20/32/43/71, 5G NR n20/n71/n75.
- Add n5 NSA mode and n41 SA mode.
- LTE B41, 5G NR n77/N78 upgraded to PC2 via software.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AU8 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AU7	Full test	FR4D1311A	IHDT56AU8	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AU7	Full test	FR4D1311B	IHDT56AU8	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AU7	Full test	FR4D1311C	IHDT56AU8	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AU7	Full test	FR4D1311D	IHDT56AU8	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5260~5320	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5500~5720	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5745~5825	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AU7	Full test	FZ4D1311	IHDT56AU8	Spot check	Y, All test items
22, 24, 27, 90,	PCE (GSM)	GSM 850/1900	IHDT56AU7	Full test	FG4D1311A	IHDT56AU8	Spot check	Y, All test items
	PCE (WCDMA)	Band II, V	IHDT56AU7	Full test	FG4D1311A	IHDT56AU8	Spot check	Y, All test items
	PCE (LTE)	B2/5/7/26/38/42/ 7C/38C/42C	IHDT56AU7	Full test	FG4D1311B FG4D1311C FG4D1311E FG4D1311F	IHDT56AU8	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	IHDT56AU7	Full test	FG4D1311D	IHDT56AU8	Spot check	Y, All test items
	PCE (NR)	n5/n7/n26/n38/n41	IHDT56AU7	Full test	FG4D1311G FG4D1311H	IHDT56AU8	Spot check	Y, All test items except for n5 NSA RSE, n41 RSE
	PCE (NR)	n26 (90S)	IHDT56AU7	Full test	FG4D1311I	IHDT56AU8	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.

Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AU7 Parent Worst mode Test Result	IHDT56AU8 Variant Check Test Result	Deviation	Deviation Limit
BT 1Mbps (CH39)	Number of Channels	79	79	0	3
	Hopping Channel Separation	1	1.003	0.003 MHz	3
	Dwell Time of Each Channel	0.306	0.307	0.001 s	3
	20dB Bandwidth	0.87	0.865	0.005 MHz	3
	99% Bandwidth	0.758	0.757	0.01 MHz	3
	Conducted Band Edges	-43.67	-45.85	2.18 dBm	3
	Conducted Spurious Emission	-36.12	-38.30	2.18 dBm	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission	-18.78	-18	0.78 dB	3
BT	AC Conducted Emission	-13.67	-11.94	1.73 dB	3
BLE 2Mbps (CH01)	6dB Bandwidth	1.16	1.17	0.01 MHz	3
	99% Bandwidth	2.056	2.050	0.006 MHz	3
	Power Spectral Density	-4.23	-4.94	0.71 dBm/3kHz	3
	Conducted Band Edges	-52.99	-53.56	0.57 dBm/100kHz	3
	Conducted Spurious Emission	-35.36	-37.17	1.81 dBm/100kHz	3
BLE 1Mbps (CH19)	Radiated Band Edges and Spurious Emission	-3.41	-3.13	0.28 dB	3
BLE	AC Conducted Emission	-13.67	-11.94	1.73 dB	3
WIFI 2.4G (802.11ax HE20 CH06)	6dB Bandwidth	18.48	18.70	0.22 MHz	3
	99% Bandwidth	19.874	20.280	0.406 MHz	3
	Power Spectral Density	-6.15	-7.19	1.04 dBm/3kHz	3
	Conducted Band Edges	-14.78	-15.00	0.22 dBm/100kHz	3
	Conducted Spurious Emission	-35.5	-38.06	-2.56 dBm/100kHz	3
WIFI 2.4G (802.11ax HE40 CH06)	Radiated Band Edges and Spurious Emission	-3.11	-3.38	0.27 dB	3
WIFI 2.4G	AC Conducted Emission	-13.67	-11.94	1.73 dB	3
WIFI 5G (802.11ax HE40 CH142)	26dB & 99% Bandwidth	75.60	75.24	0.36 MHz	3
	Power Spectral Density	3.62	3.14	0.48 dBm/MHz	3
WIFI 5G (802.11ax HE80 CH58)	DFS	0.951632	0.88803	0.63602 s	3
WIFI 5G (802.11ax HE20 CH36)	Radiated Band Edges and Spurious Emission	-3.07	-3.23	0.16 dB	3
WIFI 5G	AC Conducted Emission	-17.62	-15.89	1.73 dB	3
NFC	20dB Spectrum Bandwidth	2.58	2.57	0.01 kHz	3
	99% Occupied Bandwidth	2.19	2.19	0 kHz	3
	Field Strength of Fundamental Emissions@3m	52.46	52.54	0.08 dBuV/m	3
	Radiated Spurious Emissions	47.17	49.99	0.82 dBuV/m	3
	AC Power Line Conducted Emissions	-14.93	-13.10	1.83 dB	3
Part 22H (GSM 850)	Peak-to-Average Ratio	0.17	0.14	0.03 dB	3
	Occupied Bandwidth	0.242	0.243	0.001 MHz	3
	Conducted Band Edge	-14.83	-14.60	0.23 dBm	3
	Conducted Spurious Emission	-31.6	-30.52	1.08 dBm	3
	Frequency Stability	0.0023	0.0024	0.0001 ppm	3
Part 27M (LTE Band 7)	26dB Bandwidth	0.32	0.31	0.01 MHz	3
	Radiated Spurious Emission	-49.04	-51.39	2.35 dB	3



Test Item	Mode	IHDT56AU7 Parent Worst mode Test Result	IHDT56AU8 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	17.40	17.30	0.10	3
	BLE 1Mbps/2Mbps	12.66	11.40	1.26	3
	11b, 2.4GHz	21.28	20.82	0.46	3
	11g, 2.4GHz	23.72	23.55	0.17	3
	11n HT20, 2.4GHz	23.68	23.53	0.15	3
	11n HT40, 2.4GHz	22.95	22.48	0.47	3
	11ax HE20, 2.4GHz	23.77	23.49	0.28	3
	11ax HE40, 2.4GHz	23.03	22.5	0.53	3
	11a, 5GHz	18.78	18.67	0.11	3
	11n HT20, 5GHz	18.69	18.67	0.02	3
	11n HT40, 5GHz	18.79	18.70	0.09	3
	11ac VHT20, 5GHz	18.75	18.74	0.01	3
	11ac VHT40, 5GHz	18.83	18.70	0.13	3
	11ac VHT80, 5GHz	17.98	17.95	0.03	3
	11ax HE20, 5GHz	18.83	18.78	0.05	3
	11ax HE40, 5GHz	18.95	18.82	0.13	3
	11ax HE80, 5GHz	18.07	18.06	0.01	3
	GSM 850	31.75	31.34	0.41	3
	GSM 1900	28.86	26.57	2.29	3
	WCDMA II	22.68	20.42	2.26	3
	WCDMA V	22.81	22.39	0.42	3
	LTE B2	22.51	22.27	0.24	3
	LTE B5	22.49	22.39	0.10	3
	LTE B7	23.67	22.36	1.31	3
	LTE B7C	22.52	22.39	0.13	3
	LTE B26L	22.47	22.13	0.34	3
	LTE B26H	22.52	22.28	0.24	3
	LTE B38	23.58	23.28	0.30	3
	LTE B38C	22.39	22.53	0.14	3
	LTE B42	22.49	22.23	0.26	3
	LTE B42C	22.38	22.18	0.20	3
	5GNR n5	23.17	22.95	0.22	3
	5GNR n7	23.57	22.84	0.73	3
	5GNR n38	23.10	23.01	0.29	3
	5GNR n41	23.62	23.26	0.36	3
	5GNR n26L	23.66	22.87	0.79	3
	5GNR n26H	23.45	23.19	0.26	3

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 22, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jan. 22, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.14, 2024	Jan. 22, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 04, 2024	Jan. 20, 2025	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz~44GHz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Jan. 20, 2025	Sep. 07, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 18, 2024	Jan. 20, 2025	Aug.17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	Jan. 20, 2025	Jul. 05, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1Ghz~18Ghz	Jul. 23, 2024	Jan. 20, 2025	Jul. 22, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Jan. 20, 2025	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Jan. 20, 2025	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Jan. 20, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 20, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Jan. 20, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Jan. 20, 2025	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jan. 20, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101473	10Hz~7GHz	Dec. 25, 2024	Jan. 08, 2025	Dec. 24, 2025	DFS (DFS01-SZ)
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200424	9kHz~6GHz	Apr. 09, 2024	Jan. 08, 2025	Apr. 08, 2025	DFS (DFS01-SZ)
Combiner	TOJOIN	PS-2AM-0460	SZE14011007	0.4~6GHz	Sep. 05, 2024	Jan. 08, 2025	Sep. 04, 2025	DFS (DFS01-SZ)

NCR: No Calibration Required.



For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 23, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jan. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2024	Jan. 03, 2025	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Jan. 03, 2025	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 18, 2024	Jan. 03, 2025	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 03, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 03, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 03, 2025	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 02, 2025	Jan. 03, 2025	Jan. 01, 2026	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jan. 20, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Conduction (CO01-KS)

For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 08, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct.14, 2024	Jan. 08, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
Power Divider	Titan	P02N005180	923402	0.4GHz~26.5GHz	Nov. 08, 2024	Jan. 08, 2025	Nov. 07, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Jan. 08, 2025	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 25, 2024	Jan. 18, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jan. 18, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Jan. 18, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Jan. 18, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 09, 2024	Jan. 18, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Jan. 18, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jan. 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jan. 18, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Jan. 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 18, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 18, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	± 0.012 MHz
Frequency	± 1.3 Hz

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	± 1.23 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

**Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

03CH08-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.40 dB
---	---------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04 dB
---	---------

**03CH01-SZ(WWAN):****Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission

For Simultaneous transmission:

Test Engineer :	Zhaohui Liang	Relative Humidity :	50%
		Temperature :	20-22℃





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2400-2483.5	3	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Full RU	-
	LTE Band 41C								

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	19	2490.46	44.29	54.00	-9.71	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	19	4880.00	50.74	54.00	-3.26	H	AVERAGE	Pass	Harmonic
1	802.11ax HE20	36	5149.65	50.39	54.00	-3.61	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	36	10360.00	44.85	68.20	-23.35	H	PEAK	Pass	Harmonic

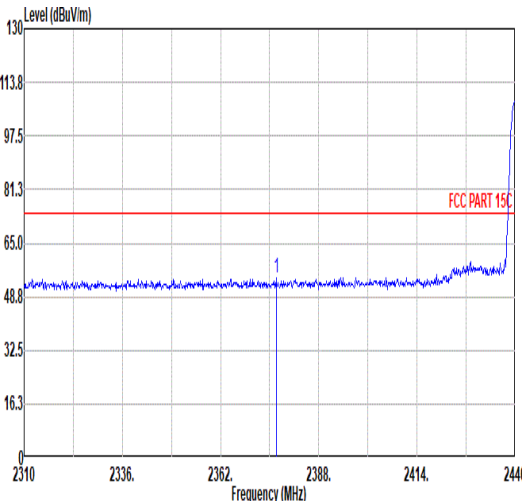
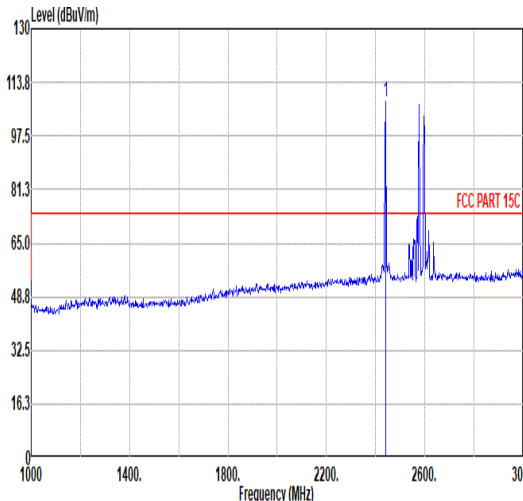
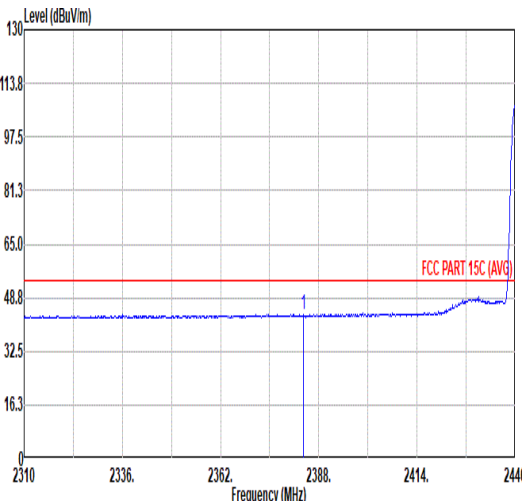
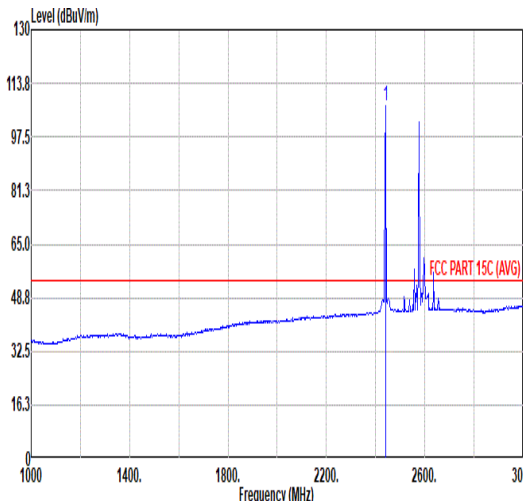


Mode	1																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_2400-2483.5 Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																		
ANT	3																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.69</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>38.95</td><td>32.06</td><td>8.03</td><td>30.69</td><td>6.00</td><td>300</td><td>349</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.69	54.35	74.00	-19.65	38.95	32.06	8.03	30.69	6.00	300	349	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>108.03</td><td>-----</td><td>-----</td><td>92.27</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>300</td><td>349</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	108.03	-----	-----	92.27	32.28	8.15	30.67	6.00	300	349
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2376.69	54.35	74.00	-19.65	38.95	32.06	8.03	30.69	6.00	300	349	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	108.03	-----	-----	92.27	32.28	8.15	30.67	6.00	300	349	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.84</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>28.21</td><td>32.10</td><td>8.04</td><td>30.69</td><td>6.00</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.84	43.66	54.00	-10.34	28.21	32.10	8.04	30.69	6.00	300	349	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>106.84</td><td>-----</td><td>-----</td><td>91.08</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.84	-----	-----	91.08	32.28	8.15	30.67	6.00	300	349
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2383.84	43.66	54.00	-10.34	28.21	32.10	8.04	30.69	6.00	300	349	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	106.84	-----	-----	91.08	32.28	8.15	30.67	6.00	300	349	AVERAGE																																																																																							





Mode	1																																													
	Band Edge - R																																													
	2400-2483.5_2400-2483.5 Bluetooth-LE_GSKF_CH19_2440MHz																																													
ANT	3																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.44</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>38.75</td><td>32.39</td><td>8.26</td><td>30.65</td><td>6.00</td><td>300</td><td>349</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.44	54.75	74.00	-19.25	38.75	32.39	8.26	30.65	6.00	300	349	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2495.44	54.75	74.00	-19.25	38.75	32.39	8.26	30.65	6.00	300	349	PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.46</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>28.31</td><td>32.38</td><td>8.25</td><td>30.65</td><td>6.00</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.46	44.29	54.00	-9.71	28.31	32.38	8.25	30.65	6.00	300	349	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2490.46	44.29	54.00	-9.71	28.31	32.38	8.25	30.65	6.00	300	349	AVERAGE																																		

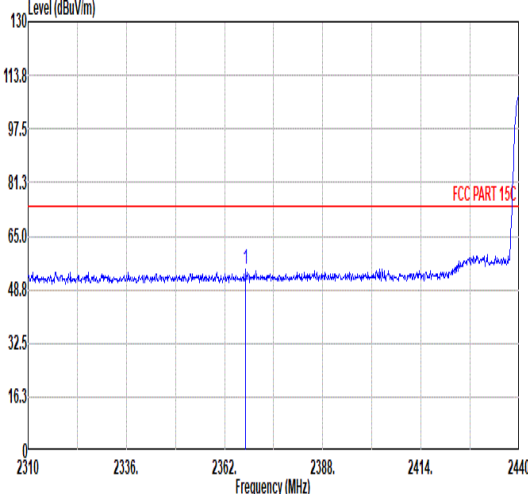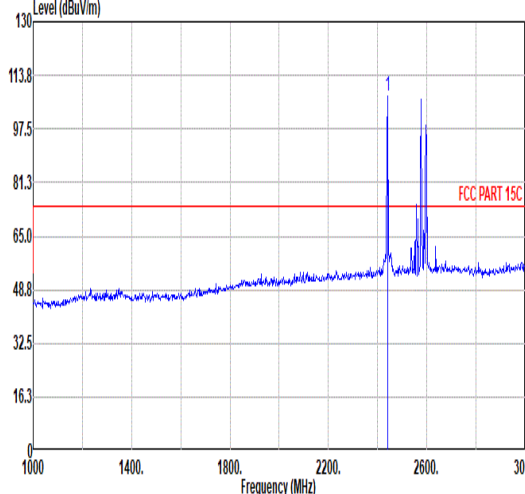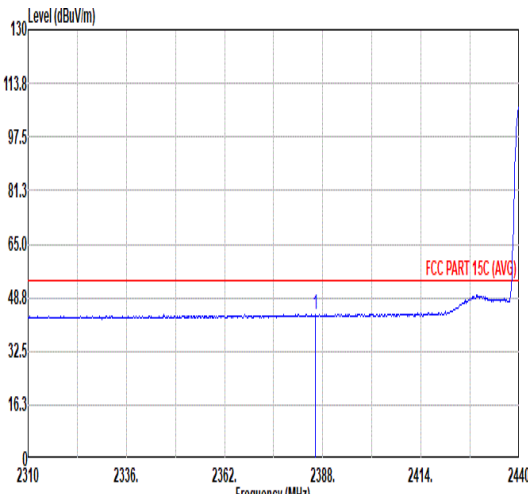
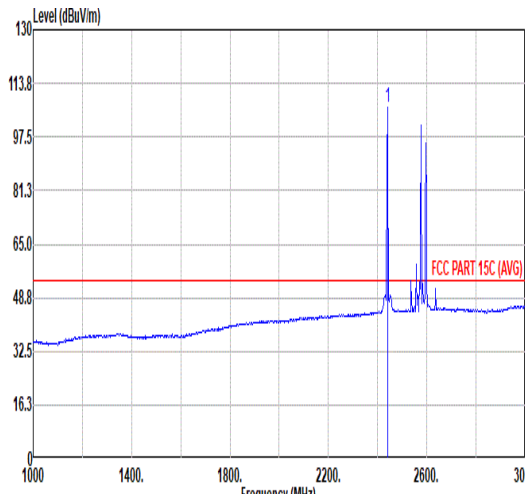


Mode	1																																																						
	Band Edge - L																																																						
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																						
ANT	3																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.59</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>39.39</td><td>32.01</td><td>8.02</td><td>30.70</td><td>6.00</td><td>397</td><td>45</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.59	54.72	74.00	-19.28	39.39	32.01	8.02	30.70	6.00	397	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2367.59	54.72	74.00	-19.28	39.39	32.01	8.02	30.70	6.00	397	45	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>107.48</td><td>-----</td><td>-----</td><td>91.72</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>397</td><td>45</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	107.48	-----	-----	91.72	32.28	8.15	30.67	6.00	397	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2440.00	107.48	-----	-----	91.72	32.28	8.15	30.67	6.00	397	45	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.05</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>28.36</td><td>32.12</td><td>8.05</td><td>30.69</td><td>6.00</td><td>397</td><td>45</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.05	43.84	54.00	-10.16	28.36	32.12	8.05	30.69	6.00	397	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2386.05	43.84	54.00	-10.16	28.36	32.12	8.05	30.69	6.00	397	45	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>106.28</td><td>-----</td><td>-----</td><td>90.52</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>397</td><td>45</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.28	-----	-----	90.52	32.28	8.15	30.67	6.00	397	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2440.00	106.28	-----	-----	90.52	32.28	8.15	30.67	6.00	397	45	AVERAGE																																											



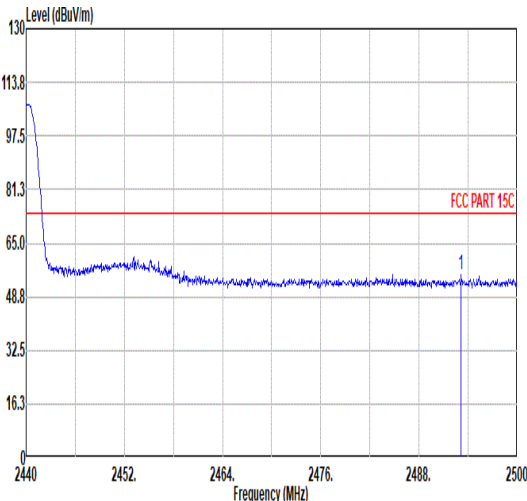
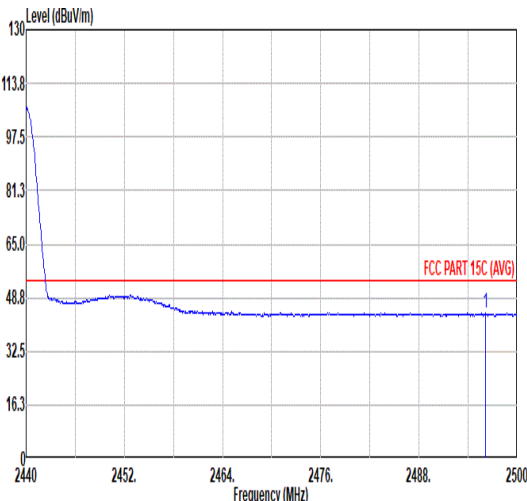


Mode	1																																																							
	Band Edge - R																																																							
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																							
ANT	3																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.16</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>39.45</td><td>32.39</td><td>8.25</td><td>30.65</td><td>6.00</td><td>397</td><td>45</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.16	55.44	74.00	-18.56	39.45	32.39	8.25	30.65	6.00	397	45	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2493.16	55.44	74.00	-18.56	39.45	32.39	8.25	30.65	6.00	397	45	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.10</td><td>44.10</td><td>54.00</td><td>-9.90</td><td>28.10</td><td>32.39</td><td>8.26</td><td>30.65</td><td>6.00</td><td>397</td><td>45</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.10	44.10	54.00	-9.90	28.10	32.39	8.26	30.65	6.00	397	45	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2496.10	44.10	54.00	-9.90	28.10	32.39	8.26	30.65	6.00	397	45	AVERAGE																																												



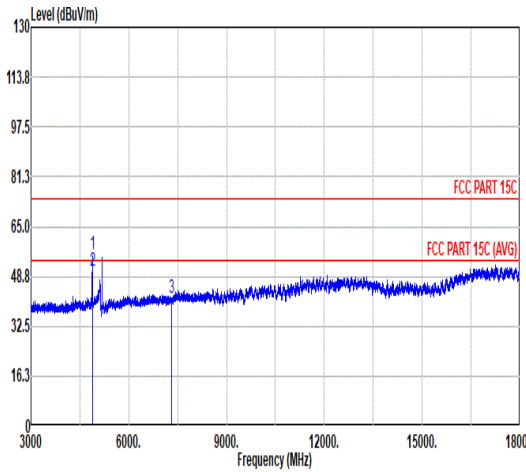
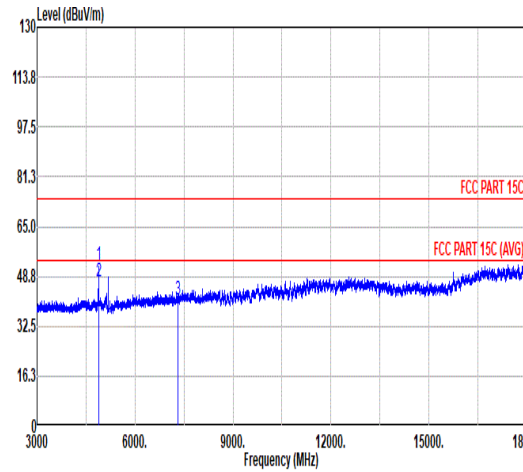


Mode	1																																																																															
	Harmonic																																																																															
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																															
ANT	3																																																																															
Pol.	Horizontal																																																																															
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>75.48</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>100</td><td>57</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>50.74</td><td>54.00</td><td>-3.26</td><td>70.16</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>100</td><td>57</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>41.79</td><td>74.00</td><td>-32.21</td><td>58.99</td><td>35.76</td><td>14.49</td><td>67.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	56.06	74.00	-17.94	75.48	34.14	11.69	65.25	0.00	100	57	PEAK	2	4880.00	50.74	54.00	-3.26	70.16	34.14	11.69	65.25	0.00	100	57	AVERAGE	3	7320.00	41.79	74.00	-32.21	58.99	35.76	14.49	67.45	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4880.00	56.06	74.00	-17.94	75.48	34.14	11.69	65.25	0.00	100	57	PEAK																																																																				
2	4880.00	50.74	54.00	-3.26	70.16	34.14	11.69	65.25	0.00	100	57	AVERAGE																																																																				
3	7320.00	41.79	74.00	-32.21	58.99	35.76	14.49	67.45	0.00	--	--	PEAK																																																																				
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>71.85</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>366</td><td>211</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>47.14</td><td>54.00</td><td>-6.86</td><td>66.56</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>366</td><td>211</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>41.30</td><td>74.00</td><td>-32.70</td><td>58.50</td><td>35.76</td><td>14.49</td><td>67.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	52.43	74.00	-21.57	71.85	34.14	11.69	65.25	0.00	366	211	PEAK	2	4880.00	47.14	54.00	-6.86	66.56	34.14	11.69	65.25	0.00	366	211	AVERAGE	3	7320.00	41.30	74.00	-32.70	58.50	35.76	14.49	67.45	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4880.00	52.43	74.00	-21.57	71.85	34.14	11.69	65.25	0.00	366	211	PEAK																																																																				
2	4880.00	47.14	54.00	-6.86	66.56	34.14	11.69	65.25	0.00	366	211	AVERAGE																																																																				
3	7320.00	41.30	74.00	-32.70	58.50	35.76	14.49	67.45	0.00	--	--	PEAK																																																																				

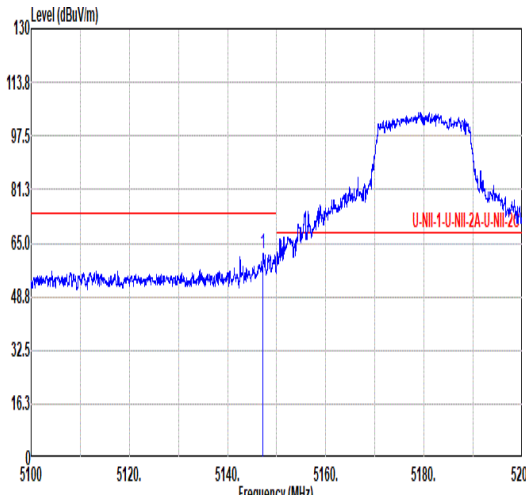
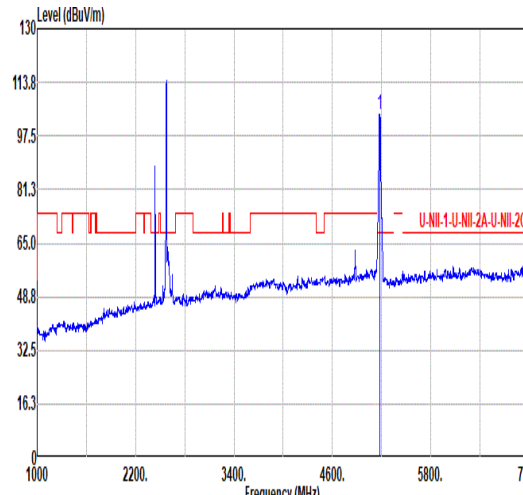
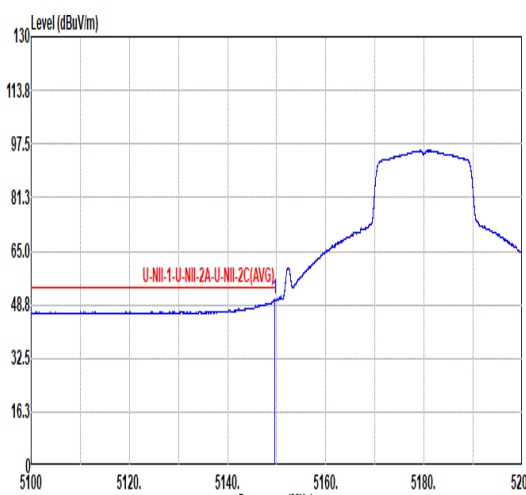
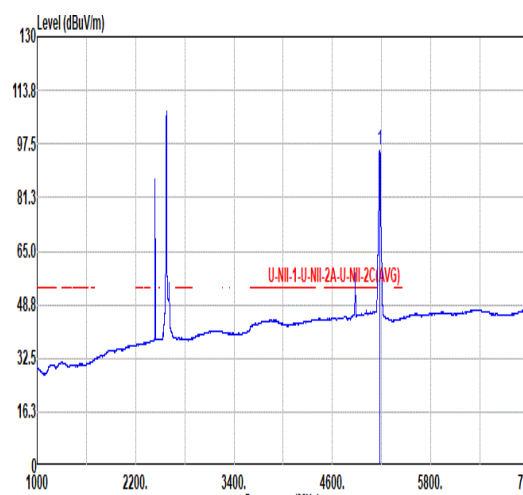


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.25</td><td>62.01</td><td>74.00</td><td>-11.99</td><td>45.74</td><td>34.11</td><td>12.03</td><td>29.87</td><td>0.00</td><td>105</td><td>246</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.25	62.01	74.00	-11.99	45.74	34.11	12.03	29.87	0.00	105	246	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.18</td><td>-----</td><td>-----</td><td>87.78</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>105</td><td>246</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.18	-----	-----	87.78	34.22	12.06	29.88	0.00	105	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5147.25	62.01	74.00	-11.99	45.74	34.11	12.03	29.87	0.00	105	246	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	104.18	-----	-----	87.78	34.22	12.06	29.88	0.00	105	246	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.65</td><td>50.39</td><td>54.00</td><td>-3.61</td><td>34.13</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>105</td><td>246</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.65	50.39	54.00	-3.61	34.13	34.10	12.03	29.87	0.00	105	246	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.61</td><td>-----</td><td>-----</td><td>79.21</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>105</td><td>246</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.61	-----	-----	79.21	34.22	12.06	29.88	0.00	105	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.65	50.39	54.00	-3.61	34.13	34.10	12.03	29.87	0.00	105	246	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	95.61	-----	-----	79.21	34.22	12.06	29.88	0.00	105	246	AVERAGE																																																																																							

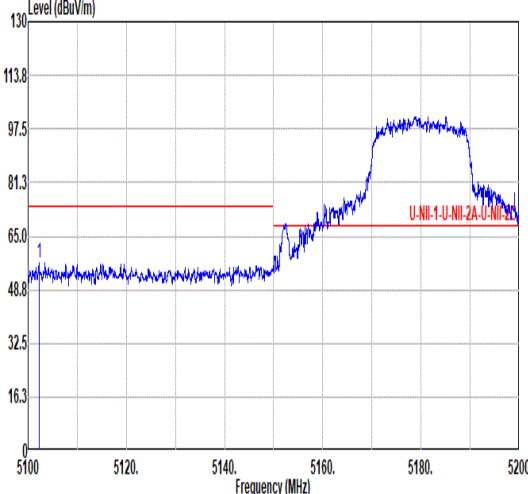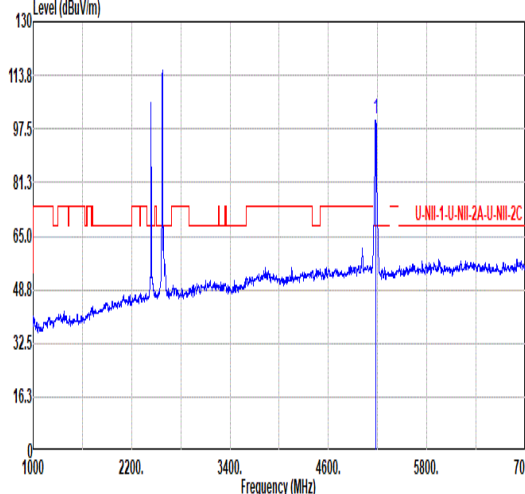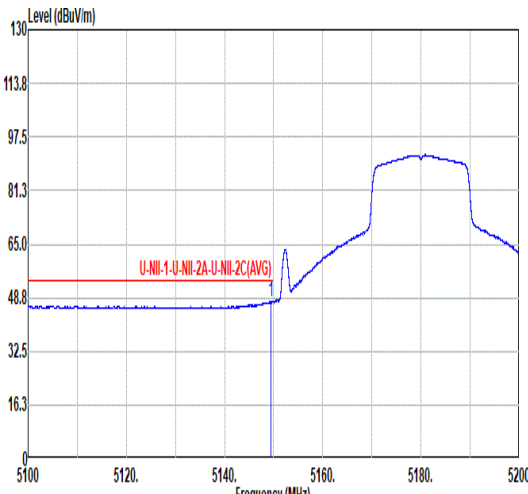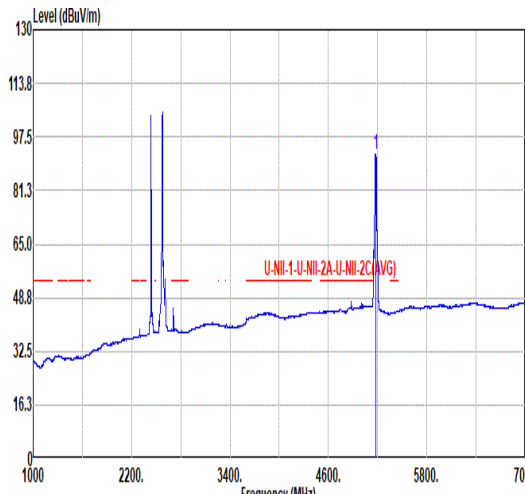

Mode	1																																																						
	Band Edge																																																						
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																						
ANT	4																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5102.25</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>40.62</td><td>34.29</td><td>12.00</td><td>29.85</td><td>0.00</td><td>338</td><td>50</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5102.25	57.06	74.00	-16.94	40.62	34.29	12.00	29.85	0.00	338	50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5102.25	57.06	74.00	-16.94	40.62	34.29	12.00	29.85	0.00	338	50	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>100.33</td><td>-----</td><td>-----</td><td>83.93</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>338</td><td>50</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.33	-----	-----	83.93	34.22	12.06	29.88	0.00	338	50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5180.00	100.33	-----	-----	83.93	34.22	12.06	29.88	0.00	338	50	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.45</td><td>47.65</td><td>54.00</td><td>-6.35</td><td>31.39</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>338</td><td>50</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.45	47.65	54.00	-6.35	31.39	34.10	12.03	29.87	0.00	338	50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5149.45	47.65	54.00	-6.35	31.39	34.10	12.03	29.87	0.00	338	50	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>92.18</td><td>-----</td><td>-----</td><td>75.78</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>338</td><td>50</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	92.18	-----	-----	75.78	34.22	12.06	29.88	0.00	338	50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5180.00	92.18	-----	-----	75.78	34.22	12.06	29.88	0.00	338	50	AVERAGE																																											

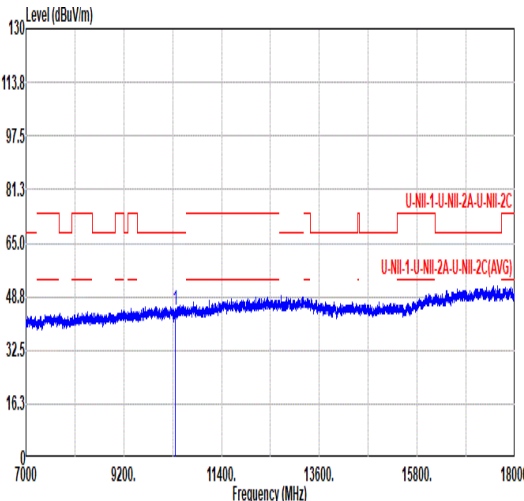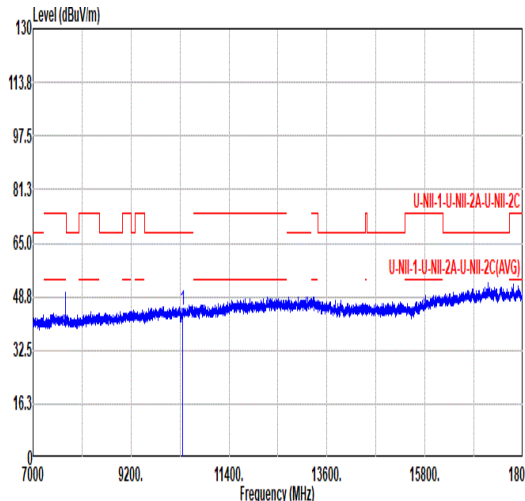

Mode	1																																																					
	Harmonic																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																					
ANT	4																																																					
Pol.	Horizontal																																																					
Peak Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.85</td><td>68.20</td><td>-23.35</td><td>56.40</td><td>37.46</td><td>17.53</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.85	68.20	-23.35	56.40	37.46	17.53	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10360.00	44.85	68.20	-23.35	56.40	37.46	17.53	66.54	0.00	--	PEAK																																											
Peak Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.85</td><td>68.20</td><td>-23.35</td><td>56.40</td><td>37.46</td><td>17.53</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.85	68.20	-23.35	56.40	37.46	17.53	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10360.00	44.85	68.20	-23.35	56.40	37.46	17.53	66.54	0.00	--	PEAK																																											
Peak Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.55</td><td>68.20</td><td>-23.65</td><td>56.08</td><td>37.47</td><td>17.54</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.55	68.20	-23.65	56.08	37.47	17.54	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10360.00	44.55	68.20	-23.65	56.08	37.47	17.54	66.54	0.00	--	PEAK																																											
Peak Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.55</td><td>68.20</td><td>-23.65</td><td>56.08</td><td>37.47</td><td>17.54</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.55	68.20	-23.65	56.08	37.47	17.54	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10360.00	44.55	68.20	-23.65	56.08	37.47	17.54	66.54	0.00	--	PEAK																																											

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored

**For 5G NR n5 NSA:**

Test Engineer :	HuaCong Liang	Relative Humidity :	48~52%
		Temperature :	22-25℃

EN-DC_7A_n5A / LTE 10MHz + NR 20MHz / QPSK (ANT2+0)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 Middle	1654.5	-65.70	-13	-52.70	-77.23	-68.95	4.00	9.40	H
	2481.75	-59.92	-13	-46.92	-78.65	-63.49	4.88	10.60	H
	3309	-59.16	-13	-46.16	-79.95	-64.09	5.52	12.60	H
	1654.5	-64.93	-13	-51.93	-77.10	-68.18	4.00	9.40	V
	2481.75	-59.78	-13	-46.78	-78.83	-63.35	4.88	10.60	V
	3309	-58.45	-13	-45.45	-79.94	-63.38	5.52	12.60	V
LTE Band7 Middle	5061.18	-58.04	-25	-33.04	-81.16	-63.60	7.14	12.70	H
	7591.77	-55.00	-25	-30.00	-81.25	-58.30	8.30	11.60	H
	10122.36	-52.53	-25	-27.53	-82.91	-54.05	10.48	12.00	H
	5061.18	-57.38	-25	-32.38	-81.71	-62.94	7.14	12.70	V
	7591.77	-55.73	-25	-30.73	-81.98	-59.03	8.30	11.60	V
	10122.36	-51.58	-25	-26.58	-83.01	-53.10	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2503-1, XT2505-3
FCC ID : IHDT56AU7
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Dec. 18, 2024 ~ Dec. 30, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
1.9 Specification of Accessory.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	24
3.4 Unwanted Emissions Measurement.....	27
3.5 AC Conducted Emission Measurement.....	32
3.6 Antenna Requirements	34
4 LIST OF MEASURING EQUIPMENT	35
5 MEASUREMENT UNCERTAINTY	36
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4D1311E	Rev. 01	Initial issue of report	Jan. 24, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.07 dB at 5149.85 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 17.62 dB at 0.727 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2503-1, XT2505-3
FCC ID	IHDT56AU7
IMEI /SN Code	Conducted: 354424860019573/354424860019581 Conduction: 354424860020134/354424860020142 Radiation: NM3R220146
HW Version	DVT2
SW Version	V2VC35.13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, model name: XT2503-1 is sample 1 and model name: XT2505-3 is sample 2, the differences could be referred to the XT2503-1, XT2505-3_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, for RF report, we choose sample 1 to full test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 18.46 dBm / 0.0701 W 802.11n HT20 : 18.47 dBm / 0.0703 W 802.11n HT40 : 18.40 dBm / 0.0692 W 802.11ac VHT20: 18.52 dBm / 0.0711 W 802.11ac VHT40: 18.43 dBm / 0.0697 W 802.11ac VHT80: 12.68 dBm / 0.0185 W 802.11ax HE20: 18.63 dBm / 0.0729 W 802.11ax HE40: 18.53 dBm / 0.0713 W 802.11ax HE80: 12.79 dBm / 0.0190 W <5260 MHz ~ 5320 MHz> 802.11a : 18.54 dBm / 0.0714 W 802.11n HT20 : 18.53 dBm / 0.0713 W 802.11n HT40 : 18.42 dBm / 0.0695 W 802.11ac VHT20: 18.56 dBm / 0.0718 W 802.11ac VHT40: 18.45 dBm / 0.0700 W 802.11ac VHT80: 13.81 dBm / 0.0240 W 802.11ax HE20: 18.64 dBm / 0.0731 W 802.11ax HE40: 18.56 dBm / 0.0718 W 802.11ax HE80: 13.92 dBm / 0.0247 W <5500 MHz ~ 5720 MHz > 802.11a : 18.78 dBm / 0.0755 W 802.11n HT20 : 18.67 dBm / 0.0736 W 802.11n HT40 : 18.79 dBm / 0.0757 W 802.11ac VHT20: 18.74 dBm / 0.0748 W 802.11ac VHT40: 18.83 dBm / 0.0764 W 802.11ac VHT80: 17.97 dBm / 0.0627 W 802.11ax HE20: 18.82 dBm / 0.0762 W 802.11ax HE40: 18.95 dBm / 0.0785 W 802.11ax HE80: 18.07 dBm / 0.0641 W <5745 MHz ~ 5825 MHz> 802.11a : 18.75 dBm / 0.0750 W 802.11n HT20 : 18.69 dBm / 0.0740 W 802.11n HT40 : 18.72 dBm / 0.0745 W 802.11ac VHT20: 18.75 dBm / 0.0750 W 802.11ac VHT40: 18.74 dBm / 0.0748 W 802.11ac VHT80: 17.98 dBm / 0.0628 W 802.11ax HE20: 18.83 dBm / 0.0764 W 802.11ax HE40: 18.86 dBm / 0.0769 W 802.11ax HE80: 18.07 dBm / 0.0641 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 19.310 MHz 802.11ax HE20: 19.938 MHz 802.11ax HE40: 38.924 MHz 802.11ax HE80: 78.600 MHz <5260 MHz ~ 5320 MHz> 802.11a : 19.622 MHz 802.11ax HE20: 19.898 MHz 802.11ax HE40: 38.980 MHz 802.11ax HE80: 78.888 MHz <5500 MHz ~ 5720 MHz> 802.11a : 19.670 MHz 802.11ax HE20: 19.958 MHz 802.11ax HE40: 39.476 MHz 802.11ax HE80: 78.648 MHz <5745 MHz ~ 5825 MHz> 802.11a : 19.802 MHz 802.11ax HE20: 19.910 MHz 802.11ax HE40: 39.004 MHz 802.11ax HE80: 78.408 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> PIFA Antenna type with gain -6.5 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna type with gain -6.7 dBi <5500 MHz ~ 5720 MHz> PIFA Antenna type with gain -6.9 dBi <5745 MHz ~ 5825 MHz> PIFA Antenna type with gain -6.7 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n HT20 /ac VHT20 /ax HE20 and 802.11n HT40 /ac VHT40/ax HE40, 802.11 ac VHT80/ax HE80 mode, the whole testing have assessed only 802.11ax HE20/HE40/HE80 by referring to the higher output power.
2. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU Power/PSD > partial RU, therefore the full RU perform full test to cover partial RU except for Spurious and bandedge.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test data subcontracted: conducted test case in section 3.1~3.3 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola(Chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola(Acbel)	Model Name	MC-687N
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-689N
Battery 1	Brand Name	Motorola(ATL)	Model Name	RM52
Battery 2	Brand Name	Motorola(Cosmx)	Model Name	RM52
USB Cable 1	Brand Name	Motorola(saibao)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
USB Cable 3	Brand Name	Motorola(saibao)	Model Name	SC18D86731
USB Cable 4	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z for Adapter mode and Earphone mode. The worst cases (X plane-Adapter mode) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + BT Link + WLAN Link(5G) + USB Cable 4 (Charging From Adaptor 1)
Remark: For Radiated Test Cases, the tests were performed with Adapter 1 and USB Cable 1.	




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

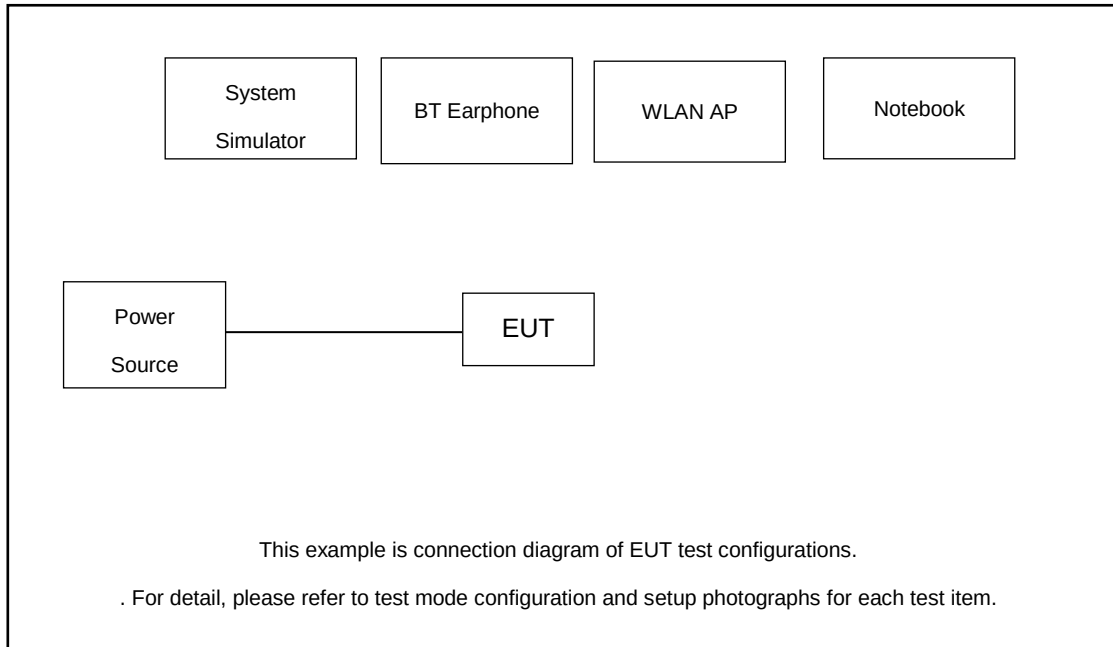

Radiated Emission:

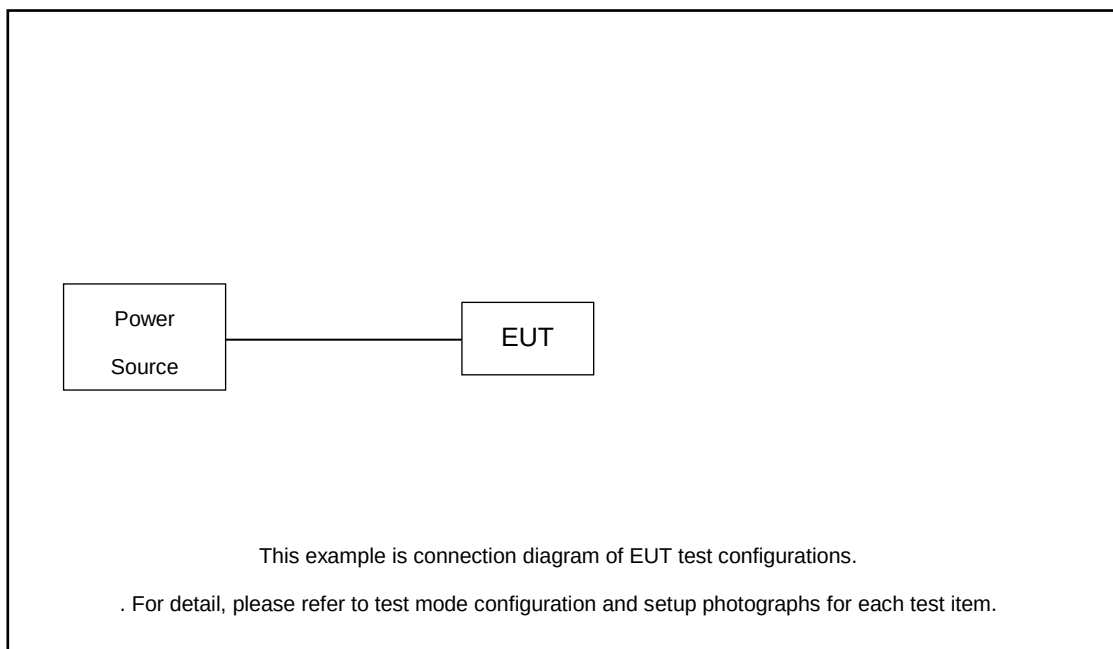

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.53 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.53 + 10 = 14.53 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	- Set RBW = approximately 1% of the emission bandwidth. - Set the VBW > RBW. - Detector = Peak. - Trace mode = max hold - Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. - For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 \times$ RBW. - Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	- Set RBW = 100kHz. - Set the VBW $\geq 3 \times$ RBW. - Detector = Peak. - Trace mode = max hold - Measure the maximum width of the emission that is 6 dB down from the peak of the emission. - Measure and record the results in the test report.

3.1.4 Test Setup

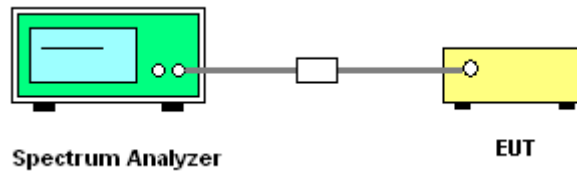

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

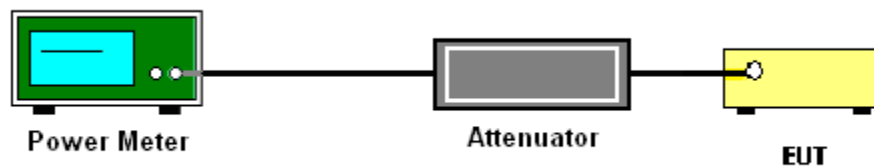



3.2.5 Test Result of Maximum Conducted Output Power

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
11a	6Mbps	1	36	5180	0.13	17.96	24.00	-6.50	Pass	18.5
11a	6Mbps	1	44	5220	0.13	18.42	24.00	-6.50	Pass	19
11a	6Mbps	1	48	5240	0.13	18.46	24.00	-6.50	Pass	19
HT20	MCS0	1	36	5180	0.14	17.23	24.00	-6.50	Pass	18
HT20	MCS0	1	44	5220	0.14	18.47	24.00	-6.50	Pass	19
HT20	MCS0	1	48	5240	0.14	18.45	24.00	-6.50	Pass	19
HT40	MCS0	1	38	5190	0.28	13.74	24.00	-6.50	Pass	14
HT40	MCS0	1	46	5230	0.28	18.40	24.00	-6.50	Pass	18.5
VHT20	MCS0	1	36	5180	0.14	17.30	24.00	-6.50	Pass	18
VHT20	MCS0	1	44	5220	0.14	18.50	24.00	-6.50	Pass	19
VHT20	MCS0	1	48	5240	0.14	18.52	24.00	-6.50	Pass	19
VHT40	MCS0	1	38	5190	0.29	13.80	24.00	-6.50	Pass	14
VHT40	MCS0	1	46	5230	0.29	18.43	24.00	-6.50	Pass	18.5
VHT80	MCS0	1	42	5210	0.55	12.68	24.00	-6.50	Pass	13

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
HE20	MCS0	1	36	5180	0.18	17.41	24.00	-6.50	Pass	18
HE20	MCS0	1	44	5220	0.18	18.60	24.00	-6.50	Pass	19
HE20	MCS0	1	48	5240	0.18	18.63	24.00	-6.50	Pass	19
HE40	MCS0	1	38	5190	0.34	13.93	24.00	-6.50	Pass	14
HE40	MCS0	1	46	5230	0.34	18.53	24.00	-6.50	Pass	18.5
HE80	MCS0	1	42	5210	0.61	12.79	24.00	-6.50	Pass	13



<5260 MHz ~ 5320 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
11a	6M bps	1	52	5260	0.13	18.54	23.98	-6.70	26.99	Pass	19
11a	6M bps	1	60	5300	0.13	18.44	23.98	-6.70	26.99	Pass	19
11a	6M bps	1	64	5320	0.13	18.05	23.98	-6.70	26.99	Pass	18.5
HT20	MCS 0	1	52	5260	0.14	18.44	23.98	-6.70	26.99	Pass	19
HT20	MCS 0	1	60	5300	0.14	18.53	23.98	-6.70	26.99	Pass	19
HT20	MCS 0	1	64	5320	0.14	17.53	23.98	-6.70	26.99	Pass	18
HT40	MCS 0	1	54	5270	0.28	18.42	23.98	-6.70	26.99	Pass	18.5
HT40	MCS 0	1	62	5310	0.28	14.00	23.98	-6.70	26.99	Pass	14
VHT20	MCS 0	1	52	5260	0.14	18.51	23.98	-6.70	26.99	Pass	19
VHT20	MCS 0	1	60	5300	0.14	18.56	23.98	-6.70	26.99	Pass	19
VHT20	MCS 0	1	64	5320	0.14	17.60	23.98	-6.70	26.99	Pass	18
VHT40	MCS 0	1	54	5270	0.29	18.45	23.98	-6.70	26.99	Pass	18.5
VHT40	MCS 0	1	62	5310	0.29	14.05	23.98	-6.70	26.99	Pass	14
VHT80	MCS 0	1	58	5290	0.55	13.81	23.98	-6.70	26.99	Pass	14

<5260 MHz ~ 5320 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
HE20	MCS 0	1	52	5260	0.18	18.60	23.98	-6.70	26.99	Pass	19
HE20	MCS 0	1	60	5300	0.18	18.64	23.98	-6.70	26.99	Pass	19
HE20	MCS 0	1	64	5320	0.18	17.71	23.98	-6.70	26.99	Pass	18
HE40	MCS 0	1	54	5270	0.34	18.56	23.98	-6.70	26.99	Pass	18.5
HE40	MCS 0	1	62	5310	0.34	14.16	23.98	-6.70	26.99	Pass	14
HE80	MCS 0	1	58	5290	0.61	13.92	23.98	-6.70	26.99	Pass	14



<5500 MHz ~ 5720 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
11a	6M bps	1	100	5500	0.13	18.60	23.98	-6.90	26.99	Pass	19
11a	6M bps	1	116	5580	0.13	18.78	23.98	-6.90	26.99	Pass	19
11a	6M bps	1	140	5700	0.13	18.67	23.98	-6.90	26.99	Pass	19
11a	6M bps	1	144	5720	0.13	18.69	23.98	-6.90	26.99	Pass	19
HT20	MCS 0	1	100	5500	0.14	18.61	23.98	-6.90	26.99	Pass	19
HT20	MCS 0	1	116	5580	0.14	18.67	23.98	-6.90	26.99	Pass	19
HT20	MCS 0	1	140	5700	0.14	16.61	23.98	-6.90	26.99	Pass	17
HT20	MCS 0	1	144	5720	0.14	18.66	23.98	-6.90	26.99	Pass	19
HT40	MCS 0	1	102	5510	0.28	18.76	23.98	-6.90	26.99	Pass	18.5
HT40	MCS 0	1	110	5550	0.28	18.56	23.98	-6.90	26.99	Pass	18.5
HT40	MCS 0	1	134	5670	0.28	18.55	23.98	-6.90	26.99	Pass	18.5
HT40	MCS 0	1	142	5710	0.28	18.79	23.98	-6.90	26.99	Pass	18.5
VHT20	MCS 0	1	100	5500	0.14	18.67	23.98	-6.90	26.99	Pass	19
VHT20	MCS 0	1	116	5580	0.14	18.74	23.98	-6.90	26.99	Pass	19
VHT20	MCS 0	1	140	5700	0.14	16.66	23.98	-6.90	26.99	Pass	17
VHT20	MCS 0	1	144	5720	0.14	18.72	23.98	-6.90	26.99	Pass	19
VHT40	MCS 0	1	102	5510	0.29	18.78	23.98	-6.90	26.99	Pass	18.5
VHT40	MCS 0	1	110	5550	0.29	18.58	23.98	-6.90	26.99	Pass	18.5
VHT40	MCS 0	1	134	5670	0.29	18.59	23.98	-6.90	26.99	Pass	18.5
VHT40	MCS 0	1	142	5710	0.29	18.83	23.98	-6.90	26.99	Pass	18.5
VHT80	MCS 0	1	106	5530	0.55	17.97	23.98	-6.90	26.99	Pass	18
VHT80	MCS 0	1	122	5610	0.55	17.92	23.98	-6.90	26.99	Pass	18
VHT80	MCS 0	1	138	5690	0.55	17.89	23.98	-6.90	26.99	Pass	18



<5500 MHz ~ 5720 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
HE20	MCS 0	1	100	5500	0.18	18.73	23.98	-6.90	26.99	Pass	19
HE20	MCS 0	1	116	5580	0.18	18.82	23.98	-6.90	26.99	Pass	19
HE20	MCS 0	1	140	5700	0.18	16.74	23.98	-6.90	26.99	Pass	17
HE20	MCS 0	1	144	5720	0.18	18.80	23.98	-6.90	26.99	Pass	19
HE40	MCS 0	1	102	5510	0.34	18.89	23.98	-6.90	26.99	Pass	18.5
HE40	MCS 0	1	110	5550	0.34	18.69	23.98	-6.90	26.99	Pass	18.5
HE40	MCS 0	1	134	5670	0.34	18.69	23.98	-6.90	26.99	Pass	18.5
HE40	MCS 0	1	142	5710	0.34	18.95	23.98	-6.90	26.99	Pass	18.5
HE80	MCS 0	1	106	5530	0.61	18.07	23.98	-6.90	26.99	Pass	18
HE80	MCS 0	1	122	5610	0.61	18.03	23.98	-6.90	26.99	Pass	18
HE80	MCS 0	1	138	5690	0.61	17.98	23.98	-6.90	26.99	Pass	18

<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Setting
11a	6M bps	1	149	5745	0.13	18.70	30.00	-6.70	Pass	19
11a	6Mbps	1	157	5785	0.13	18.71	30.00	-6.70	Pass	19
11a	6Mbps	1	165	5825	0.13	18.75	30.00	-6.70	Pass	19
HT20	MCS 0	1	149	5745	0.14	18.63	30.00	-6.70	Pass	19
HT20	MCS 0	1	157	5785	0.14	18.69	30.00	-6.70	Pass	19
HT20	MCS 0	1	165	5825	0.14	18.59	30.00	-6.70	Pass	19
HT40	MCS 0	1	151	5755	0.28	18.72	30.00	-6.70	Pass	18.5
HT40	MCS 0	1	159	5795	0.28	18.67	30.00	-6.70	Pass	18.5
VHT20	MCS 0	1	149	5745	0.14	18.67	30.00	-6.70	Pass	19
VHT20	MCS 0	1	157	5785	0.14	18.75	30.00	-6.70	Pass	19
VHT20	MCS 0	1	165	5825	0.14	18.62	30.00	-6.70	Pass	19
VHT40	MCS 0	1	151	5755	0.28	18.74	30.00	-6.70	Pass	18.5
VHT40	MCS 0	1	159	5795	0.28	18.71	30.00	-6.70	Pass	18.5
VHT80	MCS 0	1	155	5775	0.55	17.98	30.00	-6.70	Pass	18



<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Setting
HE20	MCS 0	1	149	5745	0.18	18.77	30.00	-6.70	Pass	19
HE20	MCS 0	1	157	5785	0.18	18.83	30.00	-6.70	Pass	19
HE20	MCS 0	1	165	5825	0.18	18.74	30.00	-6.70	Pass	19
HE40	MCS 0	1	151	5755	0.34	18.86	30.00	-6.70	Pass	18.5
HE40	MCS 0	1	159	5795	0.34	18.81	30.00	-6.70	Pass	18.5
HE80	MCS 0	1	155	5775	0.61	18.07	30.00	-6.70	Pass	18

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

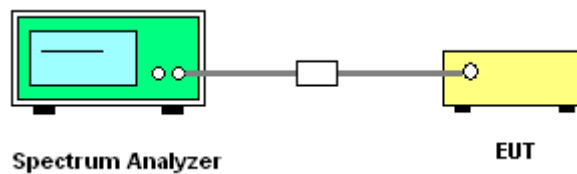

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

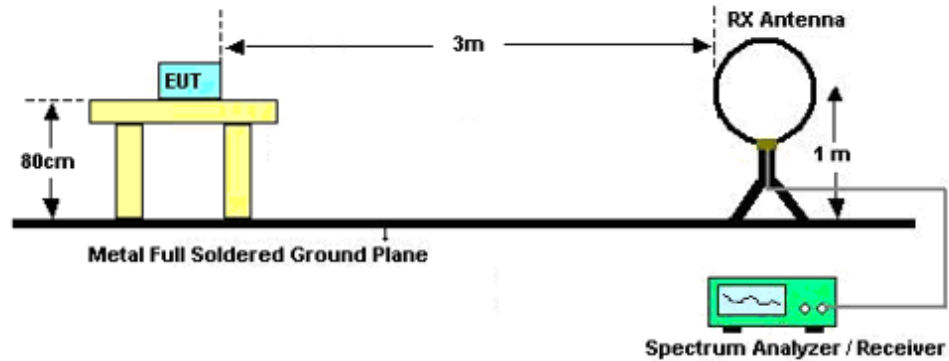

For radiated emissions from 30MHz to 1GHz

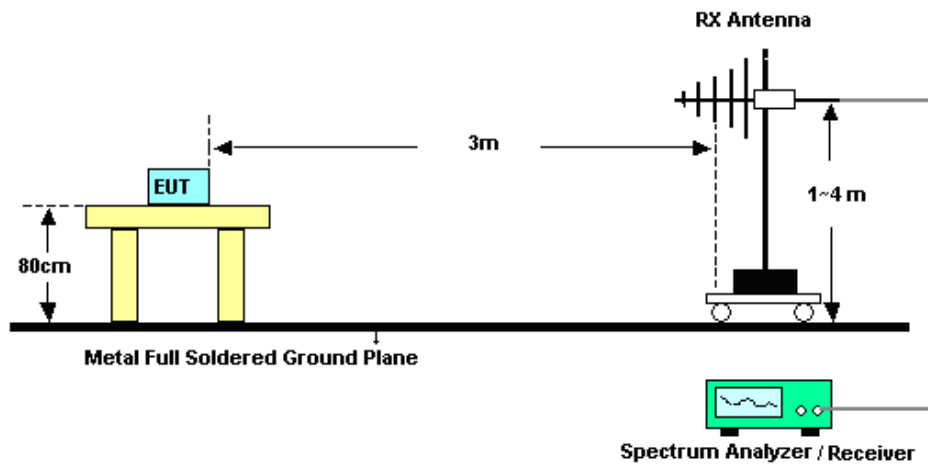

For radiated emissions above 1GHz

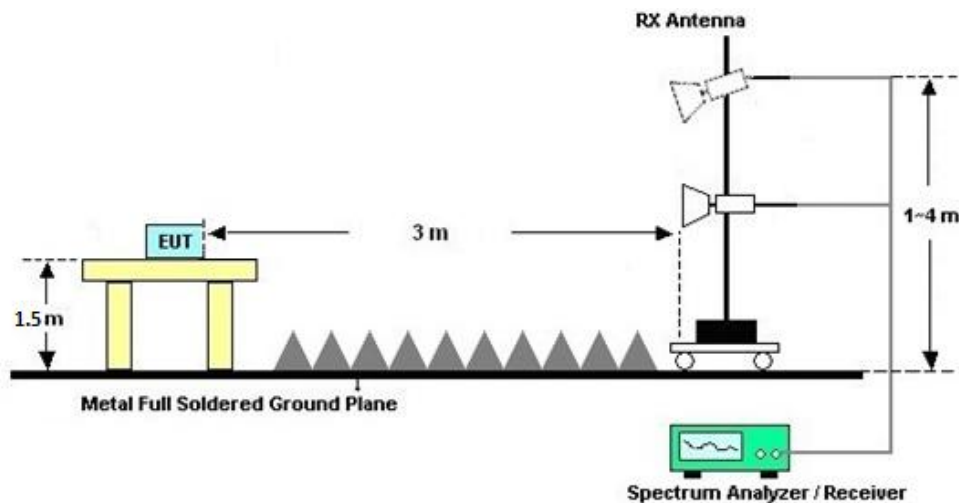

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

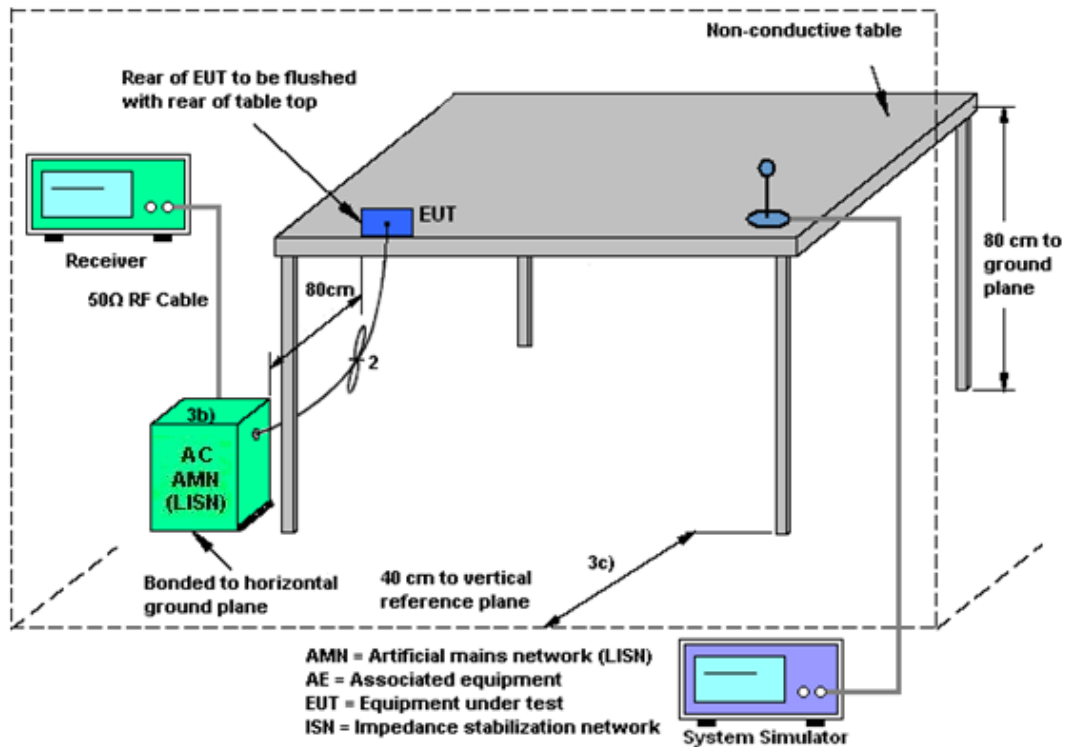

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Dec. 28, 2024~ Dec. 30, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2024	Dec. 28, 2024~ Dec. 30, 2024	Dec. 26, 2025	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 09, 2024	Dec. 28, 2024~ Dec. 30, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
EMI Test Receiver	Keysight	N9038A	MY572901 51	3Hz~8.5GHz;Ma x 30dBm	Jul. 04, 2024	Dec. 18, 2024	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY574410 79	10Hz~44GHz	Oct. 09, 2024	Dec. 18, 2024	Oct. 08, 2025	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Dec. 18, 2024	Sep. 07, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 18, 2024	Dec. 18, 2024	Aug.17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	Dec. 18, 2024	Jul. 05, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1Ghz~18Ghz	Jul. 23, 2024	Dec. 18, 2024	Jul. 22, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Dec. 18, 2024	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Dec. 18, 2024	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY532704 17	500MHz~26.5GHz	Oct. 09, 2024	Dec. 18, 2024	Oct. 08, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2024	Dec. 18, 2024	Jan. 02, 2025	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Dec. 18, 2024	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Dec. 18, 2024	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Dec. 18, 2024	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Dec. 20, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Dec. 20, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Dec. 20, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Dec. 20, 2024	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 24-26 °C, 45-55 %RH

According Standard: ■Part15E

Test Date: 2024.12.28~2024.12.30

Test Engineer: Chen ZhiQiang

Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant4	5180	33.80	5163.80	5197.60
		5220	31.90	5204.40	5236.30
		5240	32.90	5223.60	5256.50
		5260	35.20	5242.30	5277.50
		5300	32.40	5283.90	5316.30
		5320	32.60	5303.60	5336.20
		5500	32.20	5483.90	5516.10
		5580	33.80	5564.10	5597.90
		5700	33.90	5682.10	5716.00
		5720	35.40	5702.00	5737.40
		5745	34.30	5729.10	5763.40
		5785	33.50	5768.70	5802.20
		5825	34.90	5806.60	5841.50
11AX20SISO	Ant4	5180	36.00	5163.80	5199.80
		5220	34.40	5201.80	5236.20
		5240	37.60	5223.90	5261.50
		5260	37.10	5242.00	5279.10
		5300	39.80	5278.20	5318.00
		5320	35.90	5301.80	5337.70
		5500	34.70	5483.70	5518.40
		5580	38.20	5559.80	5598.00
		5700	38.90	5680.10	5719.00
		5720	41.20	5699.20	5740.40
		5745	35.20	5727.10	5762.30
		5785	42.30	5763.10	5805.40
		5825	39.40	5804.90	5844.30
11AX40SISO	Ant4	5190	74.60	5156.20	5230.80
		5230	74.60	5192.60	5267.20
		5270	72.60	5233.60	5306.20
		5310	72.40	5272.20	5344.60
		5510	70.00	5477.20	5547.20
		5550	75.40	5512.00	5587.40



		5670	72.20	5632.20	5704.40
		5710	75.60	5672.00	5747.60
		5755	78.20	5717.80	5796.00
		5795	78.00	5760.60	5838.60
11AX80SISO	Ant4	5210	130.80	5148.40	5279.20
		5290	118.00	5226.40	5344.40
		5530	139.20	5462.40	5601.60
		5610	125.20	5546.80	5672.00
		5690	108.80	5629.20	5738.00
		5775	118.40	5710.60	5829.00



Test Graphs

