



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2527-2
FCC ID : IHDT56AV4
STANDARD : 47 CFR Part 22(H), 24(E), 27(M), 27(Q), 90(S)
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Apr. 05, 2025 ~ Apr. 27, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	6
1.8 Specification of Accessory.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	13
4 MEASUREMENT UNCERTAINTY	16
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG530724-01F	Rev. 01	Initial issue of report	Apr. 30, 2025

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2527-2
FCC ID	IHDT56AV4
IMEI Code	Conducted/DFS: 258674600017032/258674600017040 Radiation: 358674600016810/358674600016828 Conduction: 358674600016612/358674600016620
HW Version	DVT2
SW Version	V2VN35.50
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS DFS01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH02-SZ 03CH03-SZ 03CH05-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
4.	03CH03-SZ	AUDIX	E3	6.2009-8-24
5.	03CH05-SZ	AUDIX	E3	6.2009-8-24a1
6.	CO02-SZ	AUDIX	E3	6.120613b

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 484596 D01 Referencing Test Data v02r03
- 47 CFR Part 22(H), 24(E), 27(M), 27(Q), 90(S)
- 47 CFR Part 15 Subpart C §15.225
- 47 CFR Part 15 Subpart C §15.247
- 47 CFR Part 15 Subpart E §15.407
- ANSI C63.10-2013
- ANSI C63.26-2015

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(NVT)	Model Name	RA52
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	RA52
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	HX-ZN-34
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	JWUB1928-ZN01H
Earphone	Brand Name	Motorola (Juwei)	Model Name	ZN80400118H001



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2527-2, FCC ID: IHDT56AV4) is electrically identical to the reference device (Model: XT2527-1, FCC ID: IHDT56AV5) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA530724-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AV4 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AV5 and FCC ID: IHDT56AV4 is as below:

- Remove WCDMA B4, LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32/71/38C/41C and 5G NR n8/n20/n71.
- B41/B41C/n77/n78 Enable PC2 by software.
- Add NSA mode for 5G NR n5/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AV4 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AV5	Full test	FR530724A	IHDT56AV4	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AV5	Full test	FR530724B	IHDT56AV4	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AV5	Full test	FR530724C	IHDT56AV4	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AV5	Full test	FR530724D	IHDT56AV4	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5260~5320	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5500~5720	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5745~5825	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AV5	Full test	FZ530724	IHDT56AV4	Spot check	Y, All test items
22, 24, 27, 90,	PCE (GSM)	GSM 850/1900	IHDT56AV5	Full test	FG530724A	IHDT56AV4	Spot check	Y, All test items
	PCE (WCDMA)	Band II, V	IHDT56AV5	Full test	FG530724A	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B5/26/7/7C/42	IHDT56AV5	Full test	FG530724B FG530724C FG530724E FG530724F	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	IHDT56AV5	Full test	FG530724D	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B2/38/38C/41/41C/71	-	-	-	-	-	N

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

Remark: All 5G NR spot check or full test bands are not included in this report and will be issued separately.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.

Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AV5 Parent Worst mode Test Result	IHDT56AV4 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.991	0.998	0.007	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.86	0.86	0	3
	99% Bandwidth	0.758	0.758	0	3
	Conducted Band Edges	-46.95	-46.67	0.28	3
	Conducted Spurious Emission	-36.21	-36.45	0.24	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission	46.35	46.95	0.6	3
BT	AC Conducted Emission	7.98	8.08	0.1	3
BLE 2Mbps (CH38)	6dB Bandwidth	1.18	1.17	0.01	3
	99% Bandwidth	2.054	2.054	0	3
	Power Spectral Density	-5	-5.08	0.08	3
	Conducted Band Edges	-46.83	-47.02	0.19	3
	Conducted Spurious Emission	-35.82	-35.51	0.31	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	41.54	41.29	0.25	3
BLE	AC Conducted Emission	7.98	8.08	0.1	3
WIFI 2.4G	6dB Bandwidth	17.24	17.96	0.72	3



(802.11ax20 CH01)	99% Bandwidth	19.341	19.5	0.159	3
	Power Spectral Density	-7.83	-8.05	0.22	3
	Conducted Band Edges	-18.38	-18.82	0.44	3
	Conducted Spurious Emission	-36.09	-35.22	0.87	3
WIFI 2.4G (802.11g CH11)	Radiated Band Edges and Spurious Emission	50.75	49.21	1.54	3
WIFI 2.4G	AC Conducted Emission	7.98	8.08	0.1	3
FCC-WIFI 5G (802.11ax20 CH149)	26dB Bandwidth	29	28.06	0.94	3
FCC-WIFI 5G (802.11ax20 CH149)	99% Bandwidth	19.341	19.295	0.046	3
FCC-WIFI 5G (802.11ax20 CH149)	Power Spectral Density	3.98	3.93	0.05	3
FCC-WIFI 5G (802.11ax20 CH149)	Unwanted Emissions	17.52	18.14	0.62	3
WIFI 5G (802.11ax HE80 CH106)	DFS	0.91522	0.830828	0.084392	3
5G WIFI 11ax HE20_CH64	Radiated Band Edges and Spurious Emission	50.65	50.01	0.64	3
WIFI 5G	AC Conducted Emission	8.68	9.38	0.7	3
NFC	20dB Emission Bandwidth (MHz)	2.48	2.48	0	3
	99% Occupied Bandwidth (MHz)	2.10	2.11	0.01	3
	Frequency Stability	-0.5531	-0.5045	0.0486	3
	Field Strength of Fundamental (dBuV/m)	55.24	55.48	0.24	3
	Radiated Spurious Emissions (dBuV/m)	36.16	33.85	2.31	3
	AC Power Line Conducted Emissions(dBuV)	9.75	8.40	1.35	3
Part 22/24/27/90 (LTE Band 7C)	Equivalent Isotropic Radiated Power	20.47	20.15	0.32	3
	Peak-to-Average Ratio	6.41	6.22	0.19	3
	Occupied Bandwidth	28.77	28.89	0.12	3
	Conducted Band Edge	-26.22	-27.35	1.13	3
	Conducted Spurious Emission	-51.75	-53.16	1.41	3
Part 22/24/27/90 (GSM 850)	Frequency Stability	0.0012	0.0027	0.0015	3
	Radiated Spurious Emission	-34.48	-32.78	1.7	3



Test Item	Mode	IHDT56AV5 Parent Worst mode Test Result	IHDT56AV4 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	16.74	15.87	0.87	3
	BLE 1Mbps	11.92	11.67	0.25	3
	BLE 2Mbps	11.96	11.64	0.32	3
	11b, 2.4GHz	18.51	18.18	0.33	3
	11g, 2.4GHz	18.57	18.47	0.10	3
	11n HT20, 2.4GHz	18.59	18.25	0.34	3
	11n HT40, 2.4GHz	16.86	16.59	0.33	3
	11ax HE20, 2.4GHz	18.69	18.50	0.19	3
	11ax HE40, 2.4GHz	17.05	17.59	0.54	3
	11a, 5.2GHz	18.24	18.21	0.03	3
	11a, 5.3GHz	18.30	18.26	0.04	3
	11a, 5.5GHz	18.01	17.96	0.05	3
	11a, 5.8GHz	17.92	17.86	0.06	3
	11n HT20, 5.2GHz	18.07	17.92	0.15	3
	11n HT20, 5.3GHz	18.27	18.11	0.16	3
	11n HT20, 5.5GHz	18.08	17.97	0.11	3
	11n HT20, 5.8GHz	17.81	17.61	0.20	3
	11ac VHT20, 5.2GHz	18.12	18.04	0.08	3
	11ac VHT20, 5.3GHz	18.34	18.21	0.13	3
	11ac VHT20, 5.5GHz	18.12	18.03	0.09	3
	11ac VHT20, 5.8GHz	17.88	17.81	0.07	3
	11ax HE20, 5.2GHz	18.23	18.18	0.05	3
	11ax HE20, 5.3GHz	18.41	18.36	0.05	3
	11ax HE20, 5.5GHz	18.21	18.18	0.03	3
	11ax HE20, 5.8GHz	17.97	17.93	0.04	3
	11n HT40, 5.2GHz	17.29	17.21	0.08	3
	11n HT40, 5.3GHz	17.70	17.62	0.08	3
	11n HT40, 5.5GHz	17.19	17.07	0.12	3
	11n HT40, 5.8GHz	17.18	17.12	0.06	3
	11ac VHT40, 5.2GHz	17.36	17.35	0.01	3
	11ac VHT40, 5.3GHz	17.73	17.71	0.02	3
	11ac VHT40, 5.5GHz	17.25	17.21	0.04	3
	11ac VHT40, 5.8GHz	17.24	17.22	0.02	3
	11ax HE40, 5.2GHz	17.47	17.41	0.06	3
	11ax HE40, 5.3GHz	17.82	17.77	0.05	3
	11ax HE40, 5.5GHz	17.37	17.34	0.03	3
	11ax HE40, 5.8GHz	17.34	17.30	0.04	3
	11ac VHT80, 5.2GHz	16.33	16.26	0.07	3
	11ac VHT80, 5.3GHz	16.46	16.30	0.16	3
	11ac VHT80, 5.5GHz	16.27	16.23	0.04	3
	11ac VHT80, 5.8GHz	16.20	16.19	0.01	3
	11ax HE80, 5.2GHz	16.43	16.38	0.05	3
	11ax HE80, 5.3GHz	16.58	16.55	0.03	3
	11ax HE80, 5.5GHz	16.38	16.34	0.04	3
	11ax HE80, 5.8GHz	16.33	16.30	0.03	3
	GSM 850	31.76	31.65	0.11	3
	GSM 1900	28.52	28.24	0.28	3
	WCDMA 850	22.58	22.53	0.05	3
	WCDMA 1900	22.70	22.65	0.05	3
	LTE B5	22.59	22.49	0.1	3
	LTE B26	22.65	22.54	0.11	3



	LTE B26-90S	22.81	22.48	0.33	3
	LTE B7	22.84	22.72	0.12	3
	LTE B42	23.04	22.92	0.12	3
	LTE B7C	22.77	22.45	0.32	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 16, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Apr. 16, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 16, 2025	Jul. 02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Apr. 16, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Apr. 16, 2025	Oct. 13, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Apr. 16, 2025	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Apr. 16, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 16, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 16, 2025	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2025	Apr. 16, 2025	Jan. 02, 2026	Conducted (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Apr. 16, 2025	Apr. 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Apr. 16, 2025	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required.

**For NFC:**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 23, 2025	Dec. 27, 2025	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2024	Apr. 23, 2025	Jul. 07, 2025	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	Apr. 23, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Apr. 23, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Apr. 23, 2025	NCR	Radiation (03CH05-SZ)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
DC Power Supply	GW INSTEK	PLR36-10	GET220683	Max 20A, 36V	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 22, 2025~ Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Apr. 22, 2025~ Apr. 23, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 22, 2025~ Apr. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 16, 2025~ Apr. 27, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Apr. 16, 2025~ Apr. 27, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08, 2025	Apr. 16, 2025~ Apr. 27, 2025	Apr. 07, 2026	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 16, 2025~ Apr. 27, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 16, 2025~ Apr. 27, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of Conducted Measurement (DFS)

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	±0.04 Hz

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.90 dB
Frequency Stability	±0.04 ppm

**Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
---	--------

03CH03-SZ(BT/WIF):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.00 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.00 dB
---	---------

03CH05-SZ(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.20 dB
---	---------

03CH02-SZ(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission

Test Engineer :	Shunping You	Relative Humidity :	50%
		Temperature :	20-24℃





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	CO-TX	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
		-	-	BT on	-	-	-	-	-
		-	-	NFC on	-	-	-	-	-
		-	-	LTE Band 71	LINK	-	-	-	-
Mode 2	CO-TX	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
		-	-	BT on	-	-	-	-	-
		-	-	NFC on	-	-	-	-	-
		-	-	LTE Band 41	LINK	-	-	-	-
Mode 3	CO-TX			LF					





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	64	5350.24	49.99	54.00	-4.01	H	Average	Pass	Band Edge
	802.11ax HE20	64	15960.00	46.33	74.00	-27.67	H	Peak	Pass	Harmonic
2	802.11ax HE20	64	5350.10	49.71	54.00	-4.29	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	64	10640.00	47.57	74.00	-26.43	H	Peak	Pass	Harmonic
3	802.11ax HE20_LF	64	34.85	26.73	40.00	-13.27	V	Peak	Pass	LF

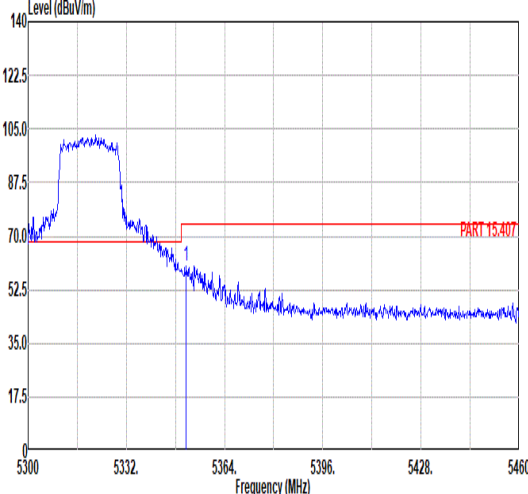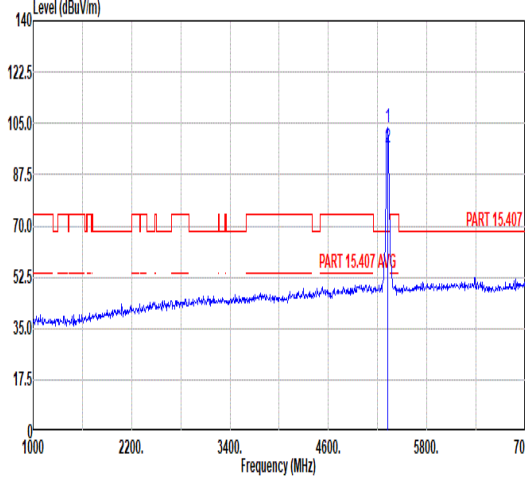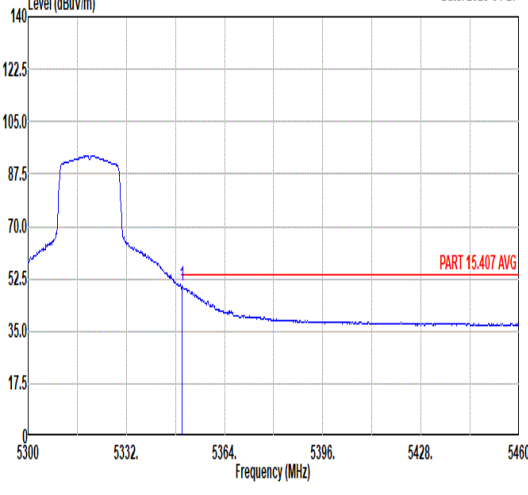
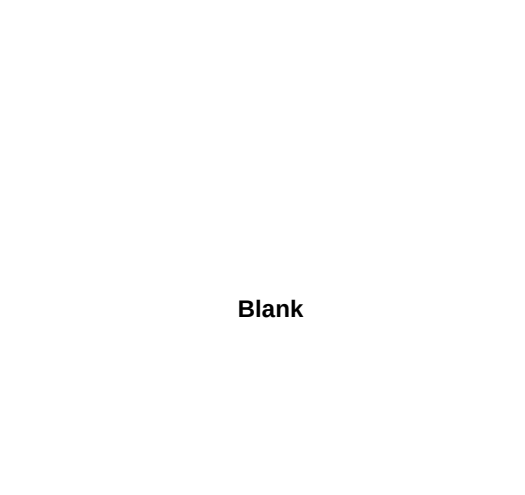


Mode	1																																																																
	Band Edge																																																																
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																
ANT	5																																																																
Pol.	Horizontal																																																																
Peak																																																																	
	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5351.52</td><td>60.07</td><td>74.00</td><td>-13.93</td><td>50.29</td><td>34.11</td><td>8.33</td><td>32.66</td><td>161</td><td>40</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5351.52	60.07	74.00	-13.93	50.29	34.11	8.33	32.66	161	40	Peak												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5351.52	60.07	74.00	-13.93	50.29	34.11	8.33	32.66	161	40	Peak																																																						
Fundamental																																																																	
	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5320.00</td><td>103.66</td><td>-----</td><td>-----</td><td>93.99</td><td>34.09</td><td>8.25</td><td>32.67</td><td>161</td><td>40</td><td>Peak</td></tr><tr><td>2</td><td>5320.00</td><td>96.65</td><td>-----</td><td>-----</td><td>86.98</td><td>34.09</td><td>8.25</td><td>32.67</td><td>161</td><td>40</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5320.00	103.66	-----	-----	93.99	34.09	8.25	32.67	161	40	Peak	2	5320.00	96.65	-----	-----	86.98	34.09	8.25	32.67	161	40	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5320.00	103.66	-----	-----	93.99	34.09	8.25	32.67	161	40	Peak																																																						
2	5320.00	96.65	-----	-----	86.98	34.09	8.25	32.67	161	40	Average																																																						
Avg																																																																	
	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.24</td><td>49.99</td><td>54.00</td><td>-4.01</td><td>40.21</td><td>34.11</td><td>8.33</td><td>32.66</td><td>161</td><td>40</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.24	49.99	54.00	-4.01	40.21	34.11	8.33	32.66	161	40	Average												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5350.24	49.99	54.00	-4.01	40.21	34.11	8.33	32.66	161	40	Average																																																						
Blank																																																																	

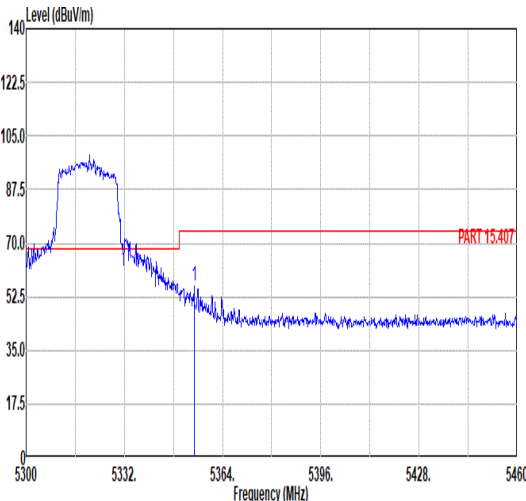
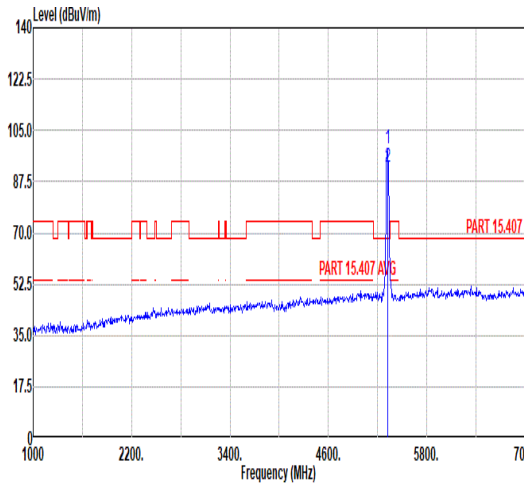
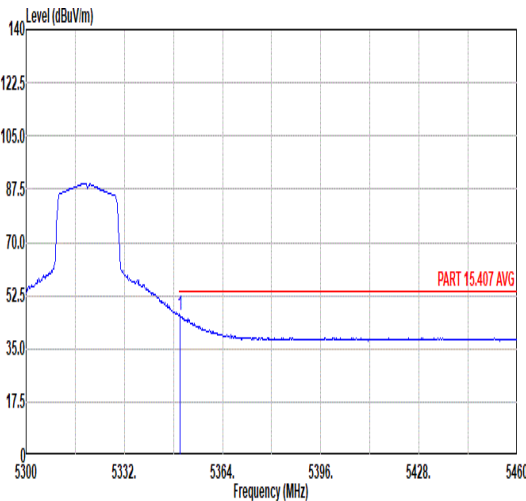
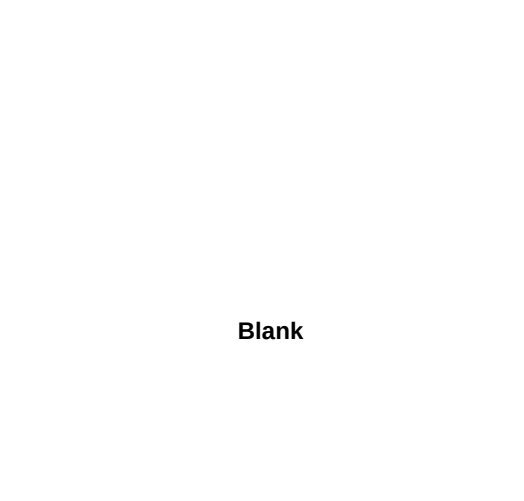


Mode	1																																																													
	Band Edge																																																													
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																													
ANT	5																																																													
Pol.	Vertical																																																													
Peak																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.72</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>46.44</td><td>34.11</td><td>8.34</td><td>32.66</td><td>115</td><td>266</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5354.72	56.23	74.00	-17.77	46.44	34.11	8.34	32.66	115	266	Peak											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	5354.72	56.23	74.00	-17.77	46.44	34.11	8.34	32.66	115	266	Peak																																																			
Fundamental																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>98.84</td><td>-----</td><td>-----</td><td>89.17</td><td>34.09</td><td>8.25</td><td>32.67</td><td>115</td><td>266</td><td>Peak</td></tr><tr><td>2</td><td>5320.00</td><td>92.32</td><td>-----</td><td>-----</td><td>82.65</td><td>34.09</td><td>8.25</td><td>32.67</td><td>115</td><td>266</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	98.84	-----	-----	89.17	34.09	8.25	32.67	115	266	Peak	2	5320.00	92.32	-----	-----	82.65	34.09	8.25	32.67	115	266
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	5320.00	98.84	-----	-----	89.17	34.09	8.25	32.67	115	266	Peak																																																			
2	5320.00	92.32	-----	-----	82.65	34.09	8.25	32.67	115	266	Average																																																			
Avg																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.08</td><td>45.73</td><td>54.00</td><td>-8.27</td><td>35.95</td><td>34.11</td><td>8.33</td><td>32.66</td><td>115</td><td>266</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.08	45.73	54.00	-8.27	35.95	34.11	8.33	32.66	115	266	Average											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	5350.08	45.73	54.00	-8.27	35.95	34.11	8.33	32.66	115	266	Average																																																			
Blank																																																														

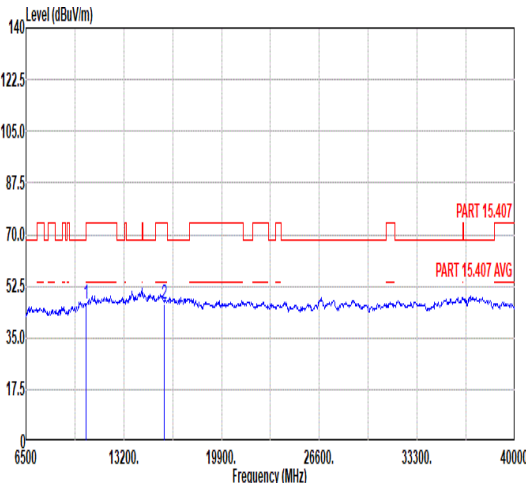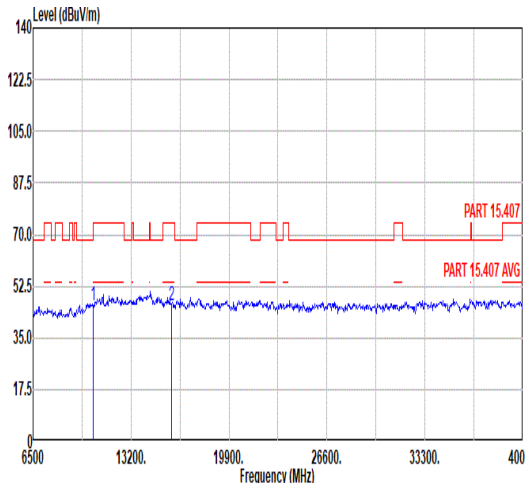





Mode	1																																																																																																															
	Harmonic																																																																																																															
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																																															
ANT	5																																																																																																															
Pol.	Horizontal								Vertical																																																																																																							
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10640.00</td><td>46.26</td><td>74.00</td><td>-27.74</td><td>56.23</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15960.00</td><td>46.33</td><td>74.00</td><td>-27.67</td><td>53.41</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>-- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	46.26	74.00	-27.74	56.23	37.78	10.94	58.69	--	-- Peak	2 15960.00	46.33	74.00	-27.67	53.41	39.59	12.70	59.37	--	-- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10640.00</td><td>46.15</td><td>74.00</td><td>-27.85</td><td>56.12</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15960.00</td><td>46.03</td><td>74.00</td><td>-27.97</td><td>53.11</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>-- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	46.15	74.00	-27.85	56.12	37.78	10.94	58.69	--	-- Peak	2 15960.00	46.03	74.00	-27.97	53.11	39.59	12.70	59.37	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 10640.00	46.26	74.00	-27.74	56.23	37.78	10.94	58.69	--	-- Peak																																																																																																							
2 15960.00	46.33	74.00	-27.67	53.41	39.59	12.70	59.37	--	-- Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 10640.00	46.15	74.00	-27.85	56.12	37.78	10.94	58.69	--	-- Peak																																																																																																							
2 15960.00	46.03	74.00	-27.97	53.11	39.59	12.70	59.37	--	-- Peak																																																																																																							

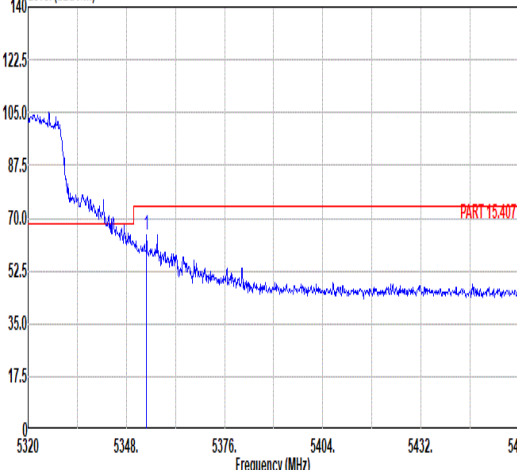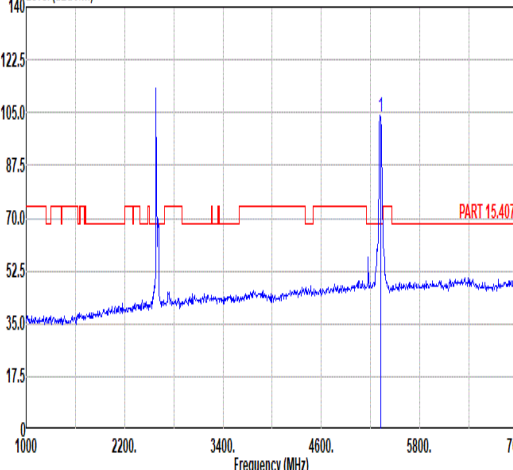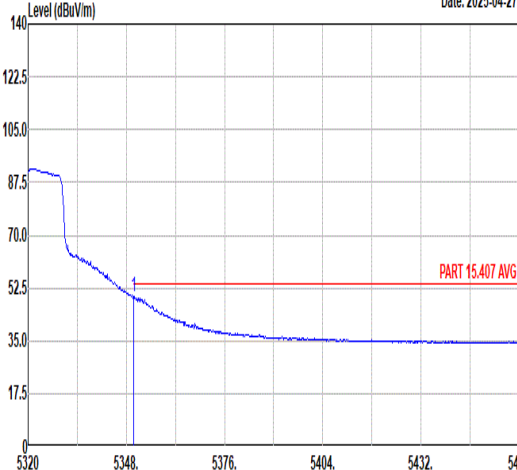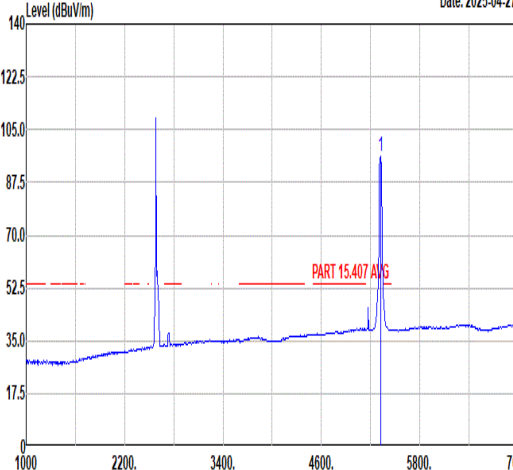

Mode	2																						
	Band Edge																						
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																						
ANT	5																						
Pol.	Horizontal																						
Peak	Level (dBuV/m) Date: 2025-04-27  532053485376540454325460 Limit Read Ant Cable Preamp APos TPos Remark Freq Level Line Margin Level Factor Loss Factor Factor cm deg MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 15353.7464.5674.00-9.4454.7734.118.3432.6610658PEAK											Level (dBuV/m) Date: 2025-04-27  100022003400460058007000 Limit Read Ant Cable Preamp APos TPos Remark Freq Level Line Margin Level Factor Loss Factor Factor cm deg MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 15320.00103.80-----101.5330.645.0633.4310658PEAK											
	Avg	Level (dBuV/m) Date: 2025-04-27  532053485376540454325460 Limit Read Ant Cable Preamp APos TPos Remark Freq Level Line Margin Level Factor Loss Factor Factor cm deg MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 15350.1049.7154.00-4.2939.9334.118.3332.6610658AVERAGE											Level (dBuV/m) Date: 2025-04-27  100022003400460058007000 Limit Read Ant Cable Preamp APos TPos Remark Freq Level Line Margin Level Factor Loss Factor Factor cm deg MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 15320.0095.90-----93.6330.645.0633.4310658AVERAGE										

Remark: All signals exceeding the limit are fundamental frequency signals and can be ignored.

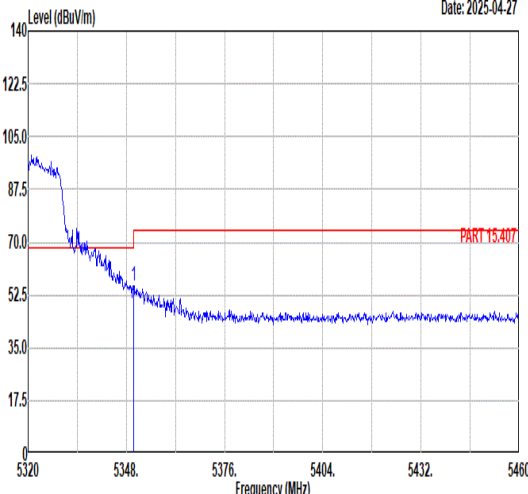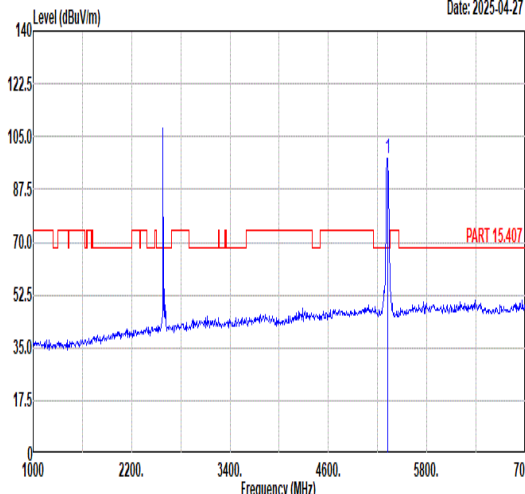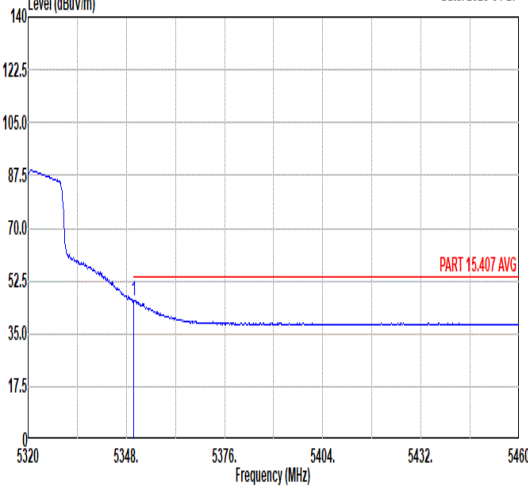
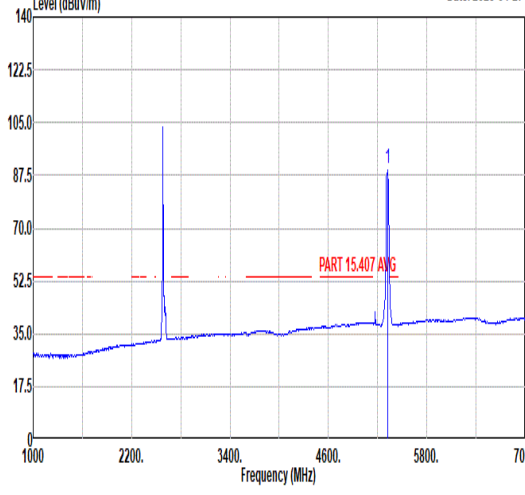


Mode	2																																																																																											
	Band Edge																																																																																											
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																											
ANT	5																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>45.71</td><td>34.11</td><td>8.33</td><td>32.66</td><td>103</td><td>257</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	55.49	74.00	-18.51	45.71	34.11	8.33	32.66	103	257	PEAK	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>97.58</td><td>-----</td><td>-----</td><td>95.31</td><td>30.64</td><td>5.06</td><td>33.43</td><td>103</td><td>257</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	97.58	-----	-----	95.31	30.64	5.06	33.43	103	257	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.10	55.49	74.00	-18.51	45.71	34.11	8.33	32.66	103	257	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	97.58	-----	-----	95.31	30.64	5.06	33.43	103	257	PEAK																																																																																	
Avg	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>36.43</td><td>34.11</td><td>8.33</td><td>32.66</td><td>103</td><td>257</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	46.21	54.00	-7.79	36.43	34.11	8.33	32.66	103	257	AVERAGE	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>89.80</td><td>-----</td><td>-----</td><td>87.53</td><td>30.64</td><td>5.06</td><td>33.43</td><td>103</td><td>257</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	89.80	-----	-----	87.53	30.64	5.06	33.43	103	257	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.10	46.21	54.00	-7.79	36.43	34.11	8.33	32.66	103	257	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	89.80	-----	-----	87.53	30.64	5.06	33.43	103	257	AVERAGE																																																																																	



Mode	2																																																																																																																			
	Harmonic																																																																																																																			
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																																																			
ANT	5																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>57.54</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>52.27</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94	58.69	--	--	Peak	2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70	59.37	--	--	Peak	Level (dBuV/m) Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>56.74</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>52.29</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94	58.69	--	--	Peak	2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70	59.37	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94	58.69	--	--	Peak																																																																																																									
2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70	59.37	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94	58.69	--	--	Peak																																																																																																									
2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70	59.37	--	--	Peak																																																																																																									

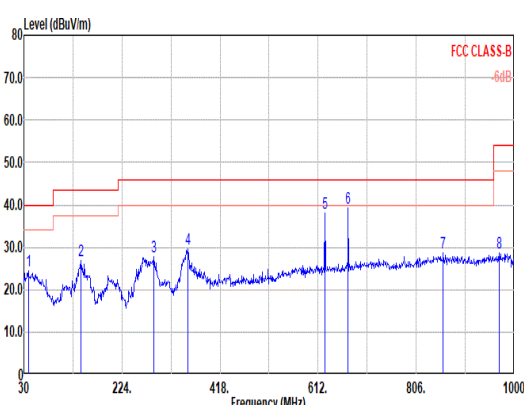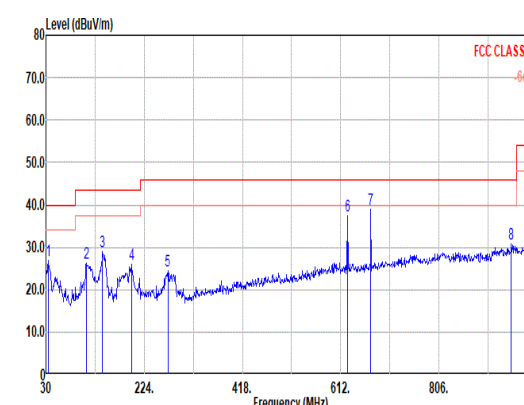

Mode	3																																																																																																																																													
	LF																																																																																																																																													
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																																																																													
ANT	5																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																							
Peak Avg																																																																																																																																														
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>38.73</td><td>24.31</td><td>40.00</td><td>-15.69</td><td>39.43</td><td>19.16</td><td>0.62</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2</td><td>142.52</td><td>26.81</td><td>43.50</td><td>-16.69</td><td>41.93</td><td>18.35</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>3</td><td>287.05</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>42.06</td><td>18.72</td><td>1.76</td><td>34.63</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>4</td><td>353.98</td><td>29.69</td><td>46.00</td><td>-16.31</td><td>42.02</td><td>20.31</td><td>1.95</td><td>34.59</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>5</td><td>625.50</td><td>38.03</td><td></td><td></td><td>43.75</td><td>26.17</td><td>2.66</td><td>34.55</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>6</td><td>671.50</td><td>39.23</td><td></td><td></td><td>44.32</td><td>26.62</td><td>2.75</td><td>34.46</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>7</td><td>859.35</td><td>28.78</td><td>46.00</td><td>-17.22</td><td>31.20</td><td>28.77</td><td>3.11</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>970.90</td><td>28.79</td><td>54.00</td><td>-25.21</td><td>29.87</td><td>29.88</td><td>3.30</td><td>34.26</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	38.73	24.31	40.00	-15.69	39.43	19.16	0.62	34.90	--	--	Peak		2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	Peak		3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	--	Peak		4	353.98	29.69	46.00	-16.31	42.02	20.31	1.95	34.59	--	--	Peak		5	625.50	38.03			43.75	26.17	2.66	34.55	--	--	Peak		6	671.50	39.23			44.32	26.62	2.75	34.46	--	--	Peak		7	859.35	28.78	46.00	-17.22	31.20	28.77	3.11	34.30	--	--	Peak		8	970.90	28.79	54.00	-25.21	29.87	29.88	3.30	34.26	--	--	Peak	
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	38.73	24.31	40.00	-15.69	39.43	19.16	0.62	34.90	--	--	Peak																																																																																																																																			
2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	Peak																																																																																																																																			
3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	--	Peak																																																																																																																																			
4	353.98	29.69	46.00	-16.31	42.02	20.31	1.95	34.59	--	--	Peak																																																																																																																																			
5	625.50	38.03			43.75	26.17	2.66	34.55	--	--	Peak																																																																																																																																			
6	671.50	39.23			44.32	26.62	2.75	34.46	--	--	Peak																																																																																																																																			
7	859.35	28.78	46.00	-17.22	31.20	28.77	3.11	34.30	--	--	Peak																																																																																																																																			
8	970.90	28.79	54.00	-25.21	29.87	29.88	3.30	34.26	--	--	Peak																																																																																																																																			
																																																																																																																																														
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>34.85</td><td>26.73</td><td>40.00</td><td>-13.27</td><td>42.37</td><td>18.68</td><td>0.58</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2</td><td>109.54</td><td>26.35</td><td>43.50</td><td>-17.15</td><td>44.34</td><td>15.68</td><td>1.11</td><td>34.78</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>3</td><td>141.55</td><td>29.03</td><td>43.50</td><td>-14.47</td><td>44.23</td><td>18.27</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>4</td><td>198.78</td><td>25.84</td><td>43.50</td><td>-17.66</td><td>43.01</td><td>16.05</td><td>1.48</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>5</td><td>270.56</td><td>24.31</td><td>46.00</td><td>-21.69</td><td>39.05</td><td>18.21</td><td>1.71</td><td>34.66</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>6</td><td>625.50</td><td>37.44</td><td></td><td></td><td>43.16</td><td>26.17</td><td>2.66</td><td>34.55</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>7</td><td>671.50</td><td>38.82</td><td></td><td></td><td>43.91</td><td>26.62</td><td>2.75</td><td>34.46</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>8</td><td>948.59</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>31.99</td><td>29.74</td><td>3.26</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	34.85	26.73	40.00	-13.27	42.37	18.68	0.58	34.90	--	--	Peak		2	109.54	26.35	43.50	-17.15	44.34	15.68	1.11	34.78	--	--	Peak		3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	--	Peak		4	198.78	25.84	43.50	-17.66	43.01	16.05	1.48	34.70	--	--	Peak		5	270.56	24.31	46.00	-21.69	39.05	18.21	1.71	34.66	--	--	Peak		6	625.50	37.44			43.16	26.17	2.66	34.55	--	--	Peak		7	671.50	38.82			43.91	26.62	2.75	34.46	--	--	Peak		8	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	34.85	26.73	40.00	-13.27	42.37	18.68	0.58	34.90	--	--	Peak																																																																																																																																			
2	109.54	26.35	43.50	-17.15	44.34	15.68	1.11	34.78	--	--	Peak																																																																																																																																			
3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	--	Peak																																																																																																																																			
4	198.78	25.84	43.50	-17.66	43.01	16.05	1.48	34.70	--	--	Peak																																																																																																																																			
5	270.56	24.31	46.00	-21.69	39.05	18.21	1.71	34.66	--	--	Peak																																																																																																																																			
6	625.50	37.44			43.16	26.17	2.66	34.55	--	--	Peak																																																																																																																																			
7	671.50	38.82			43.91	26.62	2.75	34.46	--	--	Peak																																																																																																																																			
8	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	Peak																																																																																																																																			

Remark: 625.5MHz & 671.5MHz are WWAN fundamental frequency signals and can be ignored



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2527-1
FCC ID : IHDT56AV5
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Mar. 30, 2025 ~ Apr. 09, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software	6
1.8 Applicable Standards	6
1.9 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration and system	9
2.4 Frequency List of Low/Middle/High Channels	9
3 RADIATED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Radiated Test	12
3.4 Radiated Spurious Emission	13
4 LIST OF MEASURING EQUIPMENT	15
5 MEASUREMENT UNCERTAINTY	16
APPENDIX A. TEST RESULTS OF RADIATED TEST	
APPENDIX B. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG530724F	Rev. 01	Initial issue of report	Apr. 21, 2025
FG530724F	Rev. 02	Delete related information of 2A-5A. This report is an update version, replacing the report issued on Apr. 21, 2025.	Apr. 23, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(h) §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 66)	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 24.80 dB at 1664.00 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	$< 55 + 10\log_{10}(P[\text{Watts}])$		

Remark 1 : The conducted test items of inter band CA were cover by LTE single carrier due to the CA power is reduced according to 3GPP MPR.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2527-1
FCC ID	IHDT56AV5
IMEI Code	Radiation: 358887330039734/358887330039742
HW Version	DVT2
SW Version	V2VN35.50
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification		
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz	
	LTE Band 4 : 1710 MHz ~ 1755 MHz	
	LTE Band 5 : 824 MHz ~ 849 MHz	
	LTE Band 7 : 2500 MHz ~ 2570 MHz	
	LTE Band 66 : 1710 MHz ~ 1780 MHz	
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz	
	LTE Band 4 : 2110 MHz ~ 2155 MHz	
	LTE Band 5 : 869 MHz ~ 894 MHz	
	LTE Band 7 : 2620 MHz ~ 2690 MHz	
	LTE Band 66 : 2110 MHz~ 2180 MHz	
Uplink CA Bands	2A-4A	4A-5A
	2A-7A	4A-7A
	2A-66A	5A-7A
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM	

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Applicable Standards

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(NVT)	Model Name	RA52
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	RA52
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	HX-ZN-34
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	JWUB1928-ZN01H
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y-Plane)

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	2A-4A	Worst Case													v		
	2A-7A	Worst Case													v		
	2A-66A	Worst Case													v		
	4A-5A	Worst Case													v		
	4A-7A	Worst Case													v		
	5A-7A	Worst Case													v		
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

2.2 Connection Diagram of Test System

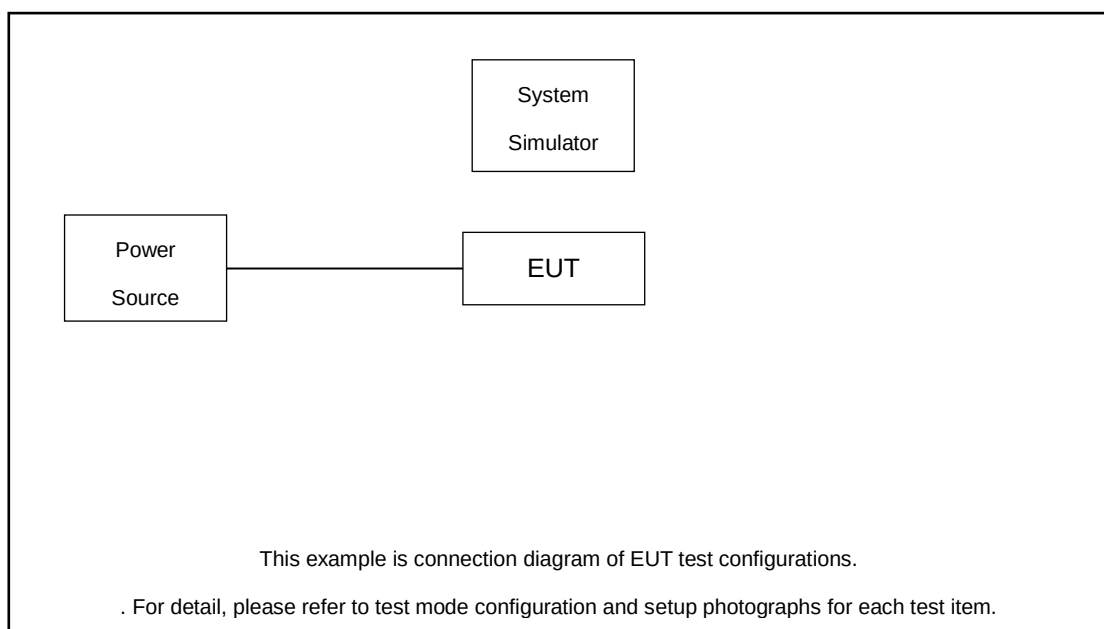



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

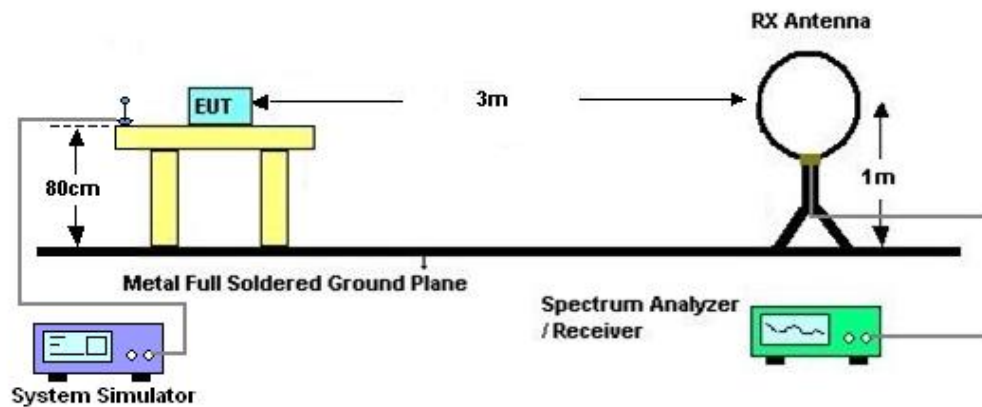

3.2.2 For radiated test from 30MHz to 1GHz

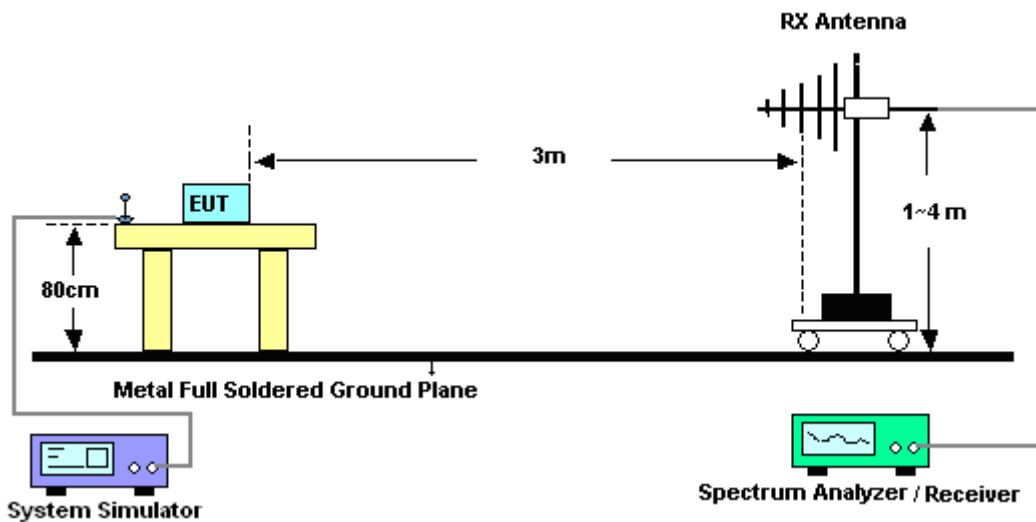

3.2.3 For radiated test above 1GHz

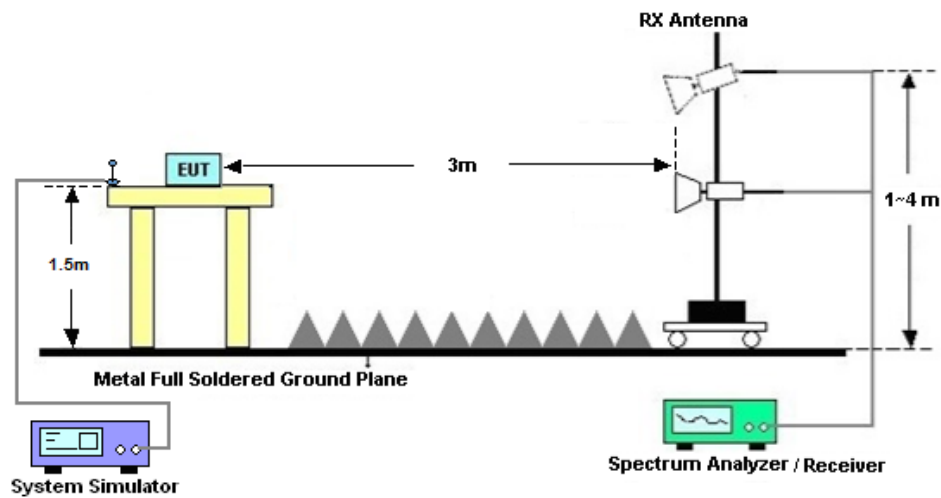

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.



3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For LTE Band 2, 4, 5, 66

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7,

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Band 2, 4, 5, 66:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Mar. 30, 2025~ Apr. 09, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Mar. 30, 2025~ Apr. 09, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Mar. 30, 2025~ Apr. 09, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Mar. 30, 2025~ Apr. 09, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Mar. 30, 2025~ Apr. 09, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Mar. 30, 2025~ Apr. 09, 2025	Apr. 08, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 08, 2025		Apr. 07, 2026	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2024	Mar. 30, 2025~ Apr. 09, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Mar. 30, 2025~ Apr. 09, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Mar. 30, 2025~ Apr. 09, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Mar. 30, 2025~ Apr. 09, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Mar. 30, 2025~ Apr. 09, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	LiangPingZhou	Temperature :	22~25℃
		Relative Humidity :	48~52%

Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test and record in the report.

ULCA 2A-4A (ANT1+4)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3742	-60.92	-13	-47.92	-79.50	-67.67	5.85	12.60	H
	5613	-58.36	-13	-45.36	-80.75	-64.16	7.30	13.10	H
	7484	-54.13	-13	-41.13	-81.06	-57.28	8.35	11.50	H
	3742	-61.14	-13	-48.14	-79.64	-67.89	5.85	12.60	V
	5613	-59.08	-13	-46.08	-81.66	-64.88	7.30	13.10	V
	7484	-54.06	-13	-41.06	-80.98	-57.21	8.35	11.50	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3447	-60.49	-13	-47.49	-77.26	-67.34	5.65	12.50	H
	5170.5	-60.00	-13	-47.00	-81.83	-65.67	7.13	12.80	H
	6894	-55.30	-13	-42.30	-80.87	-58.70	8.40	11.80	H
	3447	-59.86	-13	-46.86	-76.67	-66.71	5.65	12.50	V
	5170.5	-59.84	-13	-46.84	-81.94	-65.51	7.13	12.80	V
	6894	-55.04	-13	-42.04	-81.09	-58.44	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA 2A-7A (ANT1+4)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3742	-61.55	-13	-48.55	-80.13	-68.30	5.85	12.60	H
	5613	-59.47	-13	-46.47	-81.86	-65.27	7.30	13.10	H
	7484	-54.81	-13	-41.81	-81.74	-57.96	8.35	11.50	H
	3742	-62.06	-13	-49.06	-80.56	-68.81	5.85	12.60	V
	5613	-60.00	-13	-47.00	-82.58	-65.80	7.30	13.10	V
	7484	-54.90	-13	-41.90	-81.82	-58.05	8.35	11.50	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5052.00	-60.95	-25	-35.95	-82.96	-66.51	7.14	12.70	H
	7578.00	-54.39	-25	-29.39	-81.04	-57.69	8.30	11.60	H
	10104.00	-50.84	-25	-25.84	-82.25	-52.36	10.48	12.00	H
	5052.00	-60.55	-25	-35.55	-82.68	-66.11	7.14	12.70	V
	7578.00	-55.05	-25	-30.05	-81.66	-58.35	8.30	11.60	V
	10104.00	-52.32	-25	-27.32	-82.33	-53.84	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA 2A-66A (ANT1+4)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Middle 1RB0,QPSK	3742	-62.05	-13	-49.05	-80.63	-68.80	5.85	12.60	H
	5613	-59.73	-13	-46.73	-82.12	-65.53	7.30	13.10	H
	7484	-55.23	-13	-42.23	-82.16	-58.38	8.35	11.50	H
	3742	-61.80	-13	-48.80	-80.3	-68.55	5.85	12.60	V
	5613	-60.14	-13	-47.14	-82.72	-65.94	7.30	13.10	V
	7484	-55.16	-13	-42.16	-82.08	-58.31	8.35	11.50	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3472	-62.37	-13	-49.37	-79.27	-69.22	5.65	12.50	H
	5208	-61.00	-13	-48.00	-82.73	-66.67	7.13	12.80	H
	6944	-56.61	-13	-43.61	-82.53	-60.01	8.40	11.80	H
	3472	-62.25	-13	-49.25	-79.17	-69.10	5.65	12.50	V
	5208	-60.71	-13	-47.71	-82.69	-66.38	7.13	12.80	V
	6944	-55.90	-13	-42.90	-82.29	-59.30	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA 4A-5A (ANT1+4)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Middle 1RB0,QPSK	3447	-61.03	-13	-48.03	-77.80	-67.88	5.65	12.50	H
	5170.5	-59.99	-13	-46.99	-81.82	-65.66	7.13	12.80	H
	6894	-56.01	-13	-43.01	-81.58	-59.41	8.40	11.80	H
	3447	-61.67	-13	-48.67	-78.48	-68.52	5.65	12.50	V
	5170.5	-60.15	-13	-47.15	-82.25	-65.82	7.13	12.80	V
	6894	-56.01	-13	-43.01	-82.06	-59.41	8.40	11.80	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-37.80	-13	-24.80	-47.74	-41.05	4.00	9.40	H
	2496	-47.73	-13	-34.73	-62.17	-51.30	4.88	10.60	H
	3328	-62.05	-13	-49.05	-78.21	-66.98	5.52	12.60	H
	1664	-43.61	-13	-30.61	-53.15	-46.86	4.00	9.40	V
	2496	-52.83	-13	-39.83	-67.23	-56.40	4.88	10.60	V
	3328	-62.36	-13	-49.36	-78.28	-67.29	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-7A (ANT1+4)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Middle 1RB0,QPSK	3447	-62.08	-13	-49.08	-78.85	-68.93	5.65	12.50	H
	5170.5	-60.27	-13	-47.27	-82.10	-65.94	7.13	12.80	H
	6894	-56.67	-13	-43.67	-82.24	-60.07	8.40	11.80	H
	3447	-62.13	-13	-49.13	-78.94	-68.98	5.65	12.50	V
	5170.5	-60.51	-13	-47.51	-82.61	-66.18	7.13	12.80	V
	6894	-56.06	-13	-43.06	-82.11	-59.46	8.40	11.80	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5052.00	-60.61	-25	-35.61	-82.62	-66.17	7.14	12.70	H
	7578.00	-54.77	-25	-29.77	-81.42	-58.07	8.30	11.60	H
	10104.00	-50.57	-25	-25.57	-81.98	-52.09	10.48	12.00	H
	5052.00	-60.75	-25	-35.75	-82.88	-66.31	7.14	12.70	V
	7578.00	-54.49	-25	-29.49	-81.1	-57.79	8.30	11.60	V
	10104.00	-51.83	-25	-26.83	-81.84	-53.35	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

ULCA_5A-7A (ANT4+1)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-42.45	-13	-29.45	-52.39	-45.70	4.00	9.40	H
	2496	-51.81	-13	-38.81	-66.25	-55.38	4.88	10.60	H
	3328	-62.53	-13	-49.53	-78.69	-67.46	5.52	12.60	H
	1664	-47.25	-13	-34.25	-56.79	-50.50	4.00	9.40	V
	2496	-52.89	-13	-39.89	-67.29	-56.46	4.88	10.60	V
	3328	-62.67	-13	-49.67	-78.59	-67.60	5.52	12.60	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5052.00	-60.96	-25	-35.96	-82.97	-66.52	7.14	12.70	H
	7578.00	-54.69	-25	-29.69	-81.34	-57.99	8.30	11.60	H
	10104.00	-50.58	-25	-25.58	-81.99	-52.10	10.48	12.00	H
	5052.00	-60.59	-25	-35.59	-82.72	-66.15	7.14	12.70	V
	7578.00	-54.90	-25	-29.90	-81.51	-58.20	8.30	11.60	V
	10104.00	-52.26	-25	-27.26	-82.27	-53.78	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.