



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2527-2
FCC ID : IHDT56AV4
STANDARD : 47 CFR Part 22(H), 24(E), 27(M), 27(Q), 90(S)
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Apr. 05, 2025 ~ Apr. 27, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	6
1.8 Specification of Accessory.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	13
4 MEASUREMENT UNCERTAINTY	16
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR530724-01C	Rev. 01	Initial issue of report	Apr. 30, 2025

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2527-2
FCC ID	IHDT56AV4
IMEI Code	Conducted/DFS: 258674600017032/258674600017040 Radiation: 358674600016810/358674600016828 Conduction: 358674600016612/358674600016620
HW Version	DVT2
SW Version	V2VN35.50
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS DFS01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH02-SZ 03CH03-SZ 03CH05-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
4.	03CH03-SZ	AUDIX	E3	6.2009-8-24
5.	03CH05-SZ	AUDIX	E3	6.2009-8-24a1
6.	CO02-SZ	AUDIX	E3	6.120613b

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 484596 D01 Referencing Test Data v02r03
- 47 CFR Part 22(H), 24(E), 27(M), 27(Q), 90(S)
- 47 CFR Part 15 Subpart C §15.225
- 47 CFR Part 15 Subpart C §15.247
- 47 CFR Part 15 Subpart E §15.407
- ANSI C63.10-2013
- ANSI C63.26-2015

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(NVT)	Model Name	RA52
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	RA52
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	HX-ZN-34
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	JWUB1928-ZN01H
Earphone	Brand Name	Motorola (Juwei)	Model Name	ZN80400118H001

2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2527-2, FCC ID: IHDT56AV4) is electrically identical to the reference device (Model: XT2527-1, FCC ID: IHDT56AV5) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA530724-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AV4 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AV5 and FCC ID: IHDT56AV4 is as below:

- Remove WCDMA B4, LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32/71/38C/41C and 5G NR n8/n20/n71.
- B41/B41C/n77/n78 Enable PC2 by software.
- Add NSA mode for 5G NR n5/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AV4 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AV5	Full test	FR530724A	IHDT56AV4	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AV5	Full test	FR530724B	IHDT56AV4	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AV5	Full test	FR530724C	IHDT56AV4	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AV5	Full test	FR530724D	IHDT56AV4	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5260~5320	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5500~5720	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5745~5825	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AV5	Full test	FZ530724	IHDT56AV4	Spot check	Y, All test items
22, 24, 27, 90,	PCE (GSM)	GSM 850/1900	IHDT56AV5	Full test	FG530724A	IHDT56AV4	Spot check	Y, All test items
	PCE (WCDMA)	Band II, V	IHDT56AV5	Full test	FG530724A	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B5/26/7/7C/42	IHDT56AV5	Full test	FG530724B FG530724C FG530724E FG530724F	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	IHDT56AV5	Full test	FG530724D	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B2/38/38C/41/41C/71	-	-	-	-	-	N

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

Remark: All 5G NR spot check or full test bands are not included in this report and will be issued separately.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.

Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AV5 Parent Worst mode Test Result	IHDT56AV4 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.991	0.998	0.007	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.86	0.86	0	3
	99% Bandwidth	0.758	0.758	0	3
	Conducted Band Edges	-46.95	-46.67	0.28	3
	Conducted Spurious Emission	-36.21	-36.45	0.24	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission	46.35	46.95	0.6	3
BT	AC Conducted Emission	7.98	8.08	0.1	3
BLE 2Mbps (CH38)	6dB Bandwidth	1.18	1.17	0.01	3
	99% Bandwidth	2.054	2.054	0	3
	Power Spectral Density	-5	-5.08	0.08	3
	Conducted Band Edges	-46.83	-47.02	0.19	3
	Conducted Spurious Emission	-35.82	-35.51	0.31	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	41.54	41.29	0.25	3
BLE	AC Conducted Emission	7.98	8.08	0.1	3
WIFI 2.4G	6dB Bandwidth	17.24	17.96	0.72	3



(802.11ax20 CH01)	99% Bandwidth	19.341	19.5	0.159	3
	Power Spectral Density	-7.83	-8.05	0.22	3
	Conducted Band Edges	-18.38	-18.82	0.44	3
	Conducted Spurious Emission	-36.09	-35.22	0.87	3
WIFI 2.4G (802.11g CH11)	Radiated Band Edges and Spurious Emission	50.75	49.21	1.54	3
WIFI 2.4G	AC Conducted Emission	7.98	8.08	0.1	3
FCC-WIFI 5G (802.11ax20 CH149)	26dB Bandwidth	29	28.06	0.94	3
FCC-WIFI 5G (802.11ax20 CH149)	99% Bandwidth	19.341	19.295	0.046	3
FCC-WIFI 5G (802.11ax20 CH149)	Power Spectral Density	3.98	3.93	0.05	3
FCC-WIFI 5G (802.11ax20 CH149)	Unwanted Emissions	17.52	18.14	0.62	3
WIFI 5G (802.11ax HE80 CH106)	DFS	0.91522	0.830828	0.084392	3
5G WIFI 11ax HE20_CH64	Radiated Band Edges and Spurious Emission	50.65	50.01	0.64	3
WIFI 5G	AC Conducted Emission	8.68	9.38	0.7	3
NFC	20dB Emission Bandwidth (MHz)	2.48	2.48	0	3
	99% Occupied Bandwidth (MHz)	2.10	2.11	0.01	3
	Frequency Stability	-0.5531	-0.5045	0.0486	3
	Field Strength of Fundamental (dBuV/m)	55.24	55.48	0.24	3
	Radiated Spurious Emissions (dBuV/m)	36.16	33.85	2.31	3
	AC Power Line Conducted Emissions(dBuV)	9.75	8.40	1.35	3
Part 22/24/27/90 (LTE Band 7C)	Equivalent Isotropic Radiated Power	20.47	20.15	0.32	3
	Peak-to-Average Ratio	6.41	6.22	0.19	3
	Occupied Bandwidth	28.77	28.89	0.12	3
	Conducted Band Edge	-26.22	-27.35	1.13	3
	Conducted Spurious Emission	-51.75	-53.16	1.41	3
Part 22/24/27/90 (GSM 850)	Frequency Stability	0.0012	0.0027	0.0015	3
	Radiated Spurious Emission	-34.48	-32.78	1.7	3



Test Item	Mode	IHDT56AV5 Parent Worst mode Test Result	IHDT56AV4 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	16.74	15.87	0.87	3
	BLE 1Mbps	11.92	11.67	0.25	3
	BLE 2Mbps	11.96	11.64	0.32	3
	11b, 2.4GHz	18.51	18.18	0.33	3
	11g, 2.4GHz	18.57	18.47	0.10	3
	11n HT20, 2.4GHz	18.59	18.25	0.34	3
	11n HT40, 2.4GHz	16.86	16.59	0.33	3
	11ax HE20, 2.4GHz	18.69	18.50	0.19	3
	11ax HE40, 2.4GHz	17.05	17.59	0.54	3
	11a, 5.2GHz	18.24	18.21	0.03	3
	11a, 5.3GHz	18.30	18.26	0.04	3
	11a, 5.5GHz	18.01	17.96	0.05	3
	11a, 5.8GHz	17.92	17.86	0.06	3
	11n HT20, 5.2GHz	18.07	17.92	0.15	3
	11n HT20, 5.3GHz	18.27	18.11	0.16	3
	11n HT20, 5.5GHz	18.08	17.97	0.11	3
	11n HT20, 5.8GHz	17.81	17.61	0.20	3
	11ac VHT20, 5.2GHz	18.12	18.04	0.08	3
	11ac VHT20, 5.3GHz	18.34	18.21	0.13	3
	11ac VHT20, 5.5GHz	18.12	18.03	0.09	3
	11ac VHT20, 5.8GHz	17.88	17.81	0.07	3
	11ax HE20, 5.2GHz	18.23	18.18	0.05	3
	11ax HE20, 5.3GHz	18.41	18.36	0.05	3
	11ax HE20, 5.5GHz	18.21	18.18	0.03	3
	11ax HE20, 5.8GHz	17.97	17.93	0.04	3
	11n HT40, 5.2GHz	17.29	17.21	0.08	3
	11n HT40, 5.3GHz	17.70	17.62	0.08	3
	11n HT40, 5.5GHz	17.19	17.07	0.12	3
	11n HT40, 5.8GHz	17.18	17.12	0.06	3
	11ac VHT40, 5.2GHz	17.36	17.35	0.01	3
	11ac VHT40, 5.3GHz	17.73	17.71	0.02	3
	11ac VHT40, 5.5GHz	17.25	17.21	0.04	3
	11ac VHT40, 5.8GHz	17.24	17.22	0.02	3
	11ax HE40, 5.2GHz	17.47	17.41	0.06	3
	11ax HE40, 5.3GHz	17.82	17.77	0.05	3
	11ax HE40, 5.5GHz	17.37	17.34	0.03	3
	11ax HE40, 5.8GHz	17.34	17.30	0.04	3
	11ac VHT80, 5.2GHz	16.33	16.26	0.07	3
	11ac VHT80, 5.3GHz	16.46	16.30	0.16	3
	11ac VHT80, 5.5GHz	16.27	16.23	0.04	3
	11ac VHT80, 5.8GHz	16.20	16.19	0.01	3
	11ax HE80, 5.2GHz	16.43	16.38	0.05	3
	11ax HE80, 5.3GHz	16.58	16.55	0.03	3
	11ax HE80, 5.5GHz	16.38	16.34	0.04	3
	11ax HE80, 5.8GHz	16.33	16.30	0.03	3
	GSM 850	31.76	31.65	0.11	3
	GSM 1900	28.52	28.24	0.28	3
	WCDMA 850	22.58	22.53	0.05	3
	WCDMA 1900	22.70	22.65	0.05	3
	LTE B5	22.59	22.49	0.1	3
	LTE B26	22.65	22.54	0.11	3



	LTE B26-90S	22.81	22.48	0.33	3
	LTE B7	22.84	22.72	0.12	3
	LTE B42	23.04	22.92	0.12	3
	LTE B7C	22.77	22.45	0.32	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 16, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Apr. 16, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 16, 2025	Jul. 02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Apr. 16, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Apr. 16, 2025	Oct. 13, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Apr. 16, 2025	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Apr. 16, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 16, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 16, 2025	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2025	Apr. 16, 2025	Jan. 02, 2026	Conducted (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Apr. 16, 2025	Apr. 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Apr. 16, 2025	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required.

**For NFC:**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 23, 2025	Dec. 27, 2025	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2024	Apr. 23, 2025	Jul. 07, 2025	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	Apr. 23, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Apr. 23, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Apr. 23, 2025	NCR	Radiation (03CH05-SZ)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
DC Power Supply	GW INSTEK	PLR36-10	GET220683	Max 20A, 36V	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 22, 2025~ Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Apr. 22, 2025~ Apr. 23, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 22, 2025~ Apr. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 16, 2025~ Apr. 27, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Apr. 16, 2025~ Apr. 27, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08, 2025	Apr. 16, 2025~ Apr. 27, 2025	Apr. 07, 2026	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 16, 2025~ Apr. 27, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 16, 2025~ Apr. 27, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of Conducted Measurement (DFS)

Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	±0.04 Hz

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.90 dB
Frequency Stability	±0.04 ppm

**Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
---	--------

03CH03-SZ(BT/WIF):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.00 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.00 dB
---	---------

03CH05-SZ(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.20 dB
---	---------

03CH02-SZ(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission

Test Engineer :	Shunping You	Relative Humidity :	50%
		Temperature :	20-24°C





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	CO-TX	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
		-	-	BT on	-	-	-	-	-
		-	-	NFC on	-	-	-	-	-
		-	-	LTE Band 71	LINK	-	-	-	-
Mode 2	CO-TX	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
		-	-	BT on	-	-	-	-	-
		-	-	NFC on	-	-	-	-	-
		-	-	LTE Band 41	LINK	-	-	-	-
Mode 3	CO-TX			LF					




Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	64	5350.24	49.99	54.00	-4.01	H	Average	Pass	Band Edge
	802.11ax HE20	64	15960.00	46.33	74.00	-27.67	H	Peak	Pass	Harmonic
2	802.11ax HE20	64	5350.10	49.71	54.00	-4.29	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	64	10640.00	47.57	74.00	-26.43	H	Peak	Pass	Harmonic
3	802.11ax HE20_LF	64	34.85	26.73	40.00	-13.27	V	Peak	Pass	LF

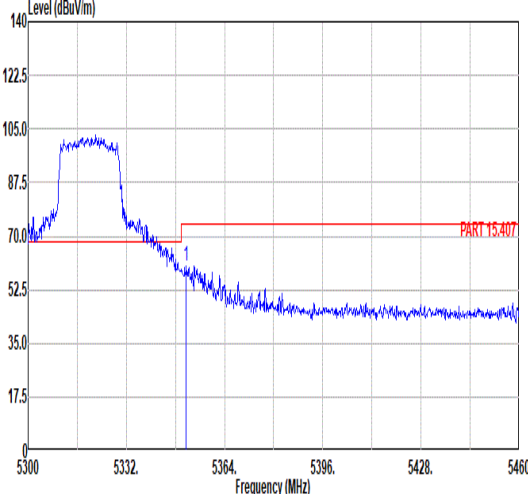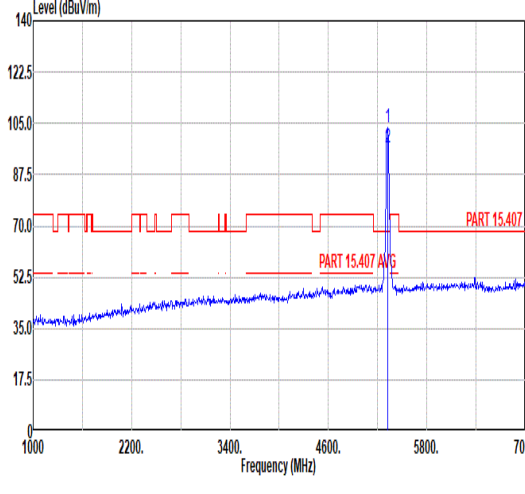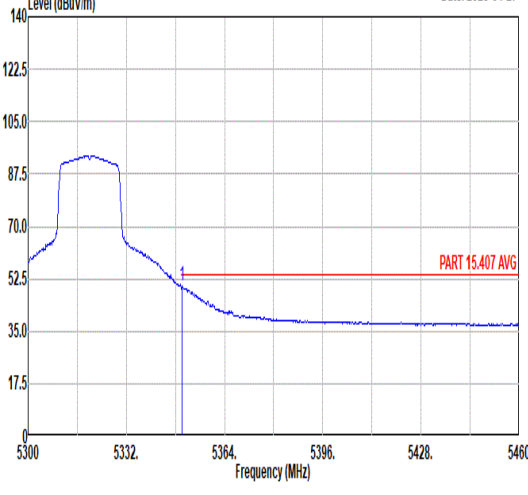
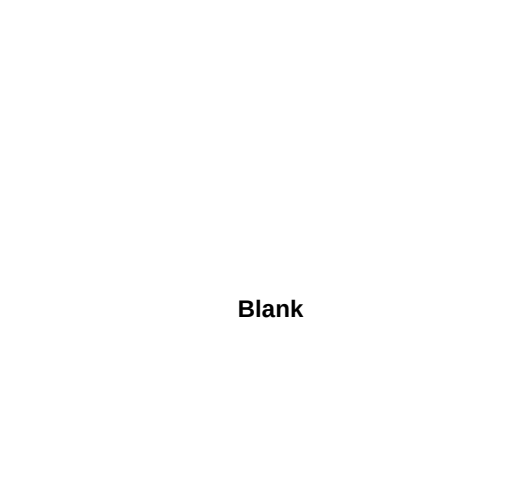


Mode	1																																																														
	Band Edge																																																														
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																														
ANT	5																																																														
Pol.	Horizontal																																																														
Peak																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.52</td><td>60.07</td><td>74.00</td><td>-13.93</td><td>50.29</td><td>34.11</td><td>8.33</td><td>32.66</td><td>161</td><td>40</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.52	60.07	74.00	-13.93	50.29	34.11	8.33	32.66	161	40	Peak												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5351.52	60.07	74.00	-13.93	50.29	34.11	8.33	32.66	161	40	Peak																																																				
Fundamental																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>103.66</td><td>-----</td><td>-----</td><td>93.99</td><td>34.09</td><td>8.25</td><td>32.67</td><td>161</td><td>40</td><td>Peak</td></tr><tr><td>2</td><td>5320.00</td><td>96.65</td><td>-----</td><td>-----</td><td>86.98</td><td>34.09</td><td>8.25</td><td>32.67</td><td>161</td><td>40</td><td>Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.66	-----	-----	93.99	34.09	8.25	32.67	161	40	Peak	2	5320.00	96.65	-----	-----	86.98	34.09	8.25	32.67	161	40	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5320.00	103.66	-----	-----	93.99	34.09	8.25	32.67	161	40	Peak																																																				
2	5320.00	96.65	-----	-----	86.98	34.09	8.25	32.67	161	40	Average																																																				
Avg																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.24</td><td>49.99</td><td>54.00</td><td>-4.01</td><td>40.21</td><td>34.11</td><td>8.33</td><td>32.66</td><td>161</td><td>40</td><td>Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.24	49.99	54.00	-4.01	40.21	34.11	8.33	32.66	161	40	Average												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5350.24	49.99	54.00	-4.01	40.21	34.11	8.33	32.66	161	40	Average																																																				
Blank																																																															


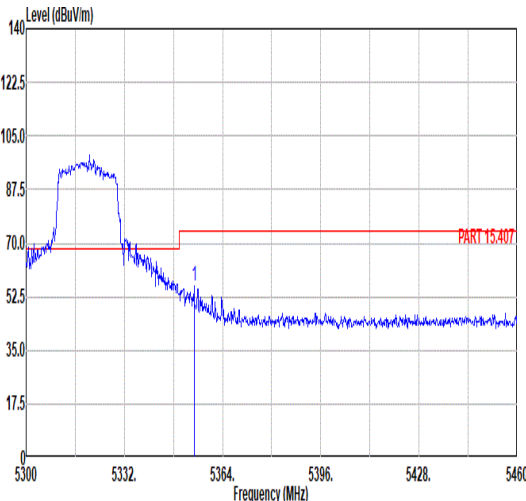
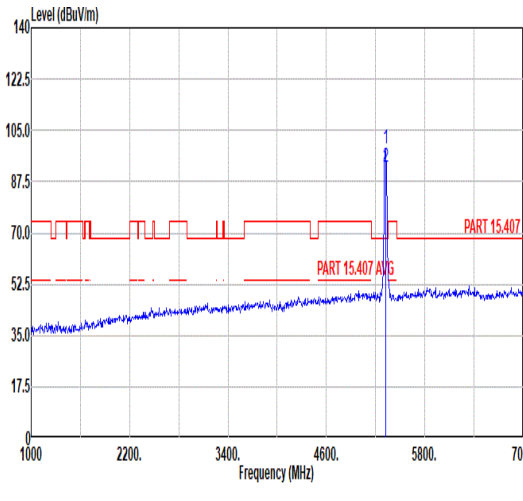
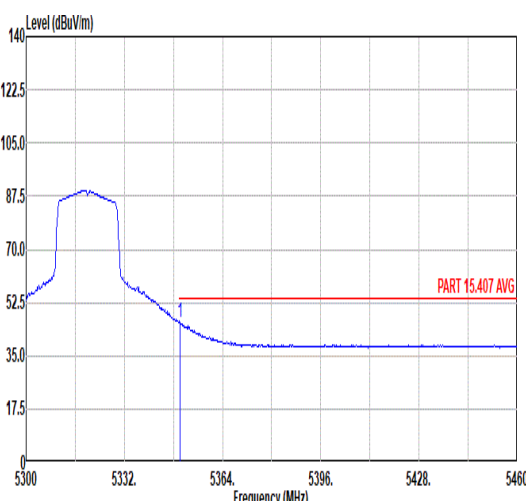


Mode	1																																																																																																				
	Band Edge																																																																																																				
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																																				
ANT	5																																																																																																				
Pol.	Vertical					Fundamental																																																																																															
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.72</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>46.44</td><td>34.11</td><td>8.34</td><td>32.66</td><td>115</td><td>266</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5354.72	56.23	74.00	-17.77	46.44	34.11	8.34	32.66	115	266	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>98.84</td><td>-----</td><td>-----</td><td>89.17</td><td>34.09</td><td>8.25</td><td>32.67</td><td>115</td><td>266</td><td>Peak</td></tr><tr><td>2</td><td>5320.00</td><td>92.32</td><td>-----</td><td>-----</td><td>82.65</td><td>34.09</td><td>8.25</td><td>32.67</td><td>115</td><td>266</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	98.84	-----	-----	89.17	34.09	8.25	32.67	115	266	Peak	2	5320.00	92.32	-----	-----	82.65	34.09	8.25	32.67	115	266
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5354.72	56.23	74.00	-17.77	46.44	34.11	8.34	32.66	115	266	Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5320.00	98.84	-----	-----	89.17	34.09	8.25	32.67	115	266	Peak																																																																																										
2	5320.00	92.32	-----	-----	82.65	34.09	8.25	32.67	115	266	Average																																																																																										
Avg						Blank																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.08</td><td>45.73</td><td>54.00</td><td>-8.27</td><td>35.95</td><td>34.11</td><td>8.33</td><td>32.66</td><td>115</td><td>266</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.08	45.73	54.00	-8.27	35.95	34.11	8.33	32.66	115	266	Average																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5350.08	45.73	54.00	-8.27	35.95	34.11	8.33	32.66	115	266	Average																																																																																										

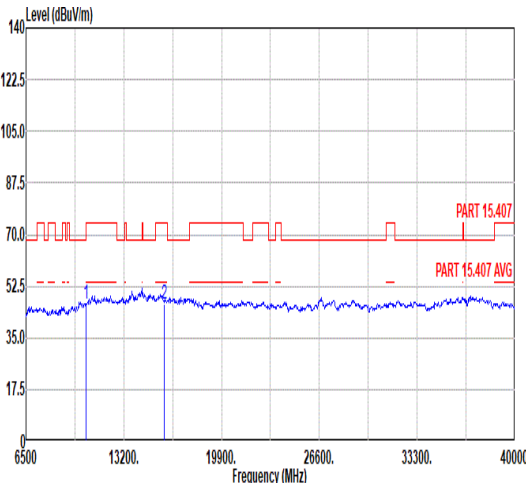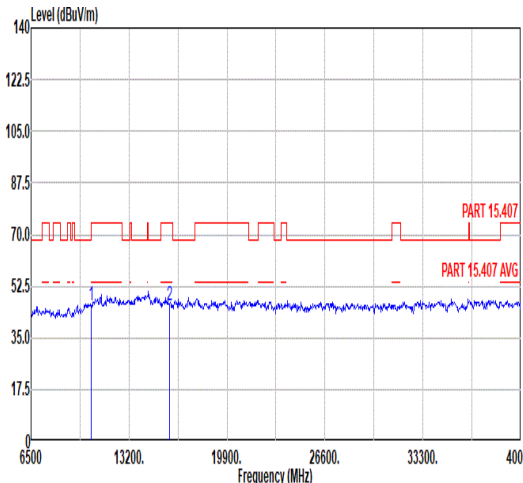





Mode	1																																																																																	
	Harmonic																																																																																	
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 10640.00</td><td>46.26</td><td>74.00</td><td>-27.74</td><td>56.23</td><td>37.78</td><td>10.94</td><td>58.69</td></tr><tr><td>2 15960.00</td><td>46.33</td><td>74.00</td><td>-27.67</td><td>53.41</td><td>39.59</td><td>12.70</td><td>59.37</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10640.00	46.26	74.00	-27.74	56.23	37.78	10.94	58.69	2 15960.00	46.33	74.00	-27.67	53.41	39.59	12.70	59.37	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 10640.00</td><td>46.15</td><td>74.00</td><td>-27.85</td><td>56.12</td><td>37.78</td><td>10.94</td><td>58.69</td></tr><tr><td>2 15960.00</td><td>46.03</td><td>74.00</td><td>-27.97</td><td>53.11</td><td>39.59</td><td>12.70</td><td>59.37</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10640.00	46.15	74.00	-27.85	56.12	37.78	10.94	58.69	2 15960.00	46.03	74.00	-27.97	53.11	39.59	12.70	59.37
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 10640.00	46.26	74.00	-27.74	56.23	37.78	10.94	58.69																																																																											
2 15960.00	46.33	74.00	-27.67	53.41	39.59	12.70	59.37																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 10640.00	46.15	74.00	-27.85	56.12	37.78	10.94	58.69																																																																											
2 15960.00	46.03	74.00	-27.97	53.11	39.59	12.70	59.37																																																																											

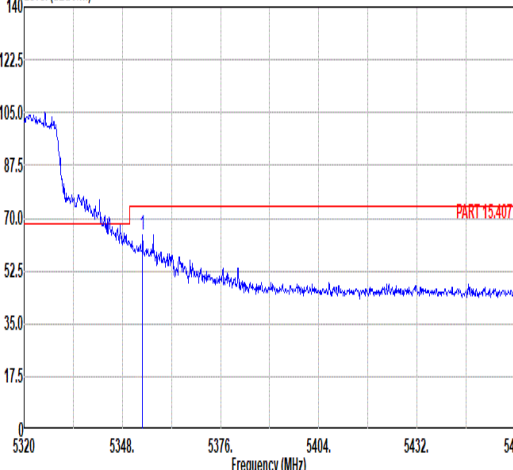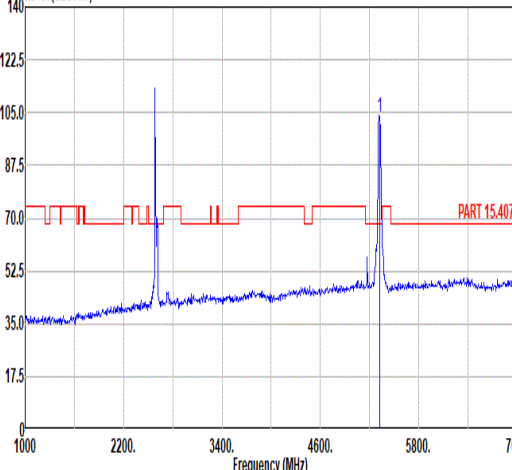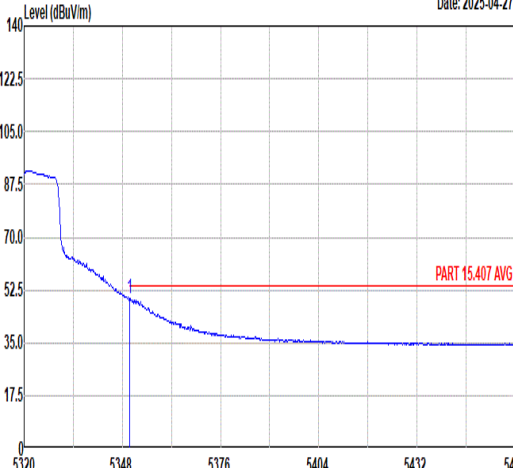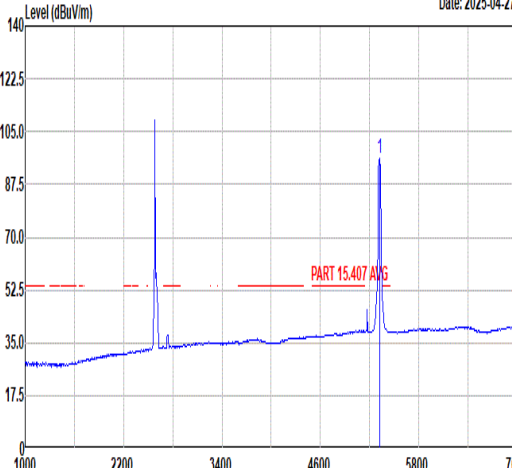



Mode	2																																																																																	
	Band Edge																																																																																	
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-04-27  532053485376540454325460 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.74</td><td>64.56</td><td>74.00</td><td>-9.44</td><td>54.77</td><td>34.11</td><td>8.34</td><td>32.66</td><td>106</td><td>58 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.74	64.56	74.00	-9.44	54.77	34.11	8.34	32.66	106	58 PEAK	Level (dBuV/m) Date: 2025-04-27  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.80</td><td>-----</td><td>-----</td><td>101.53</td><td>30.64</td><td>5.06</td><td>33.43</td><td>106</td><td>58 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.80	-----	-----	101.53	30.64	5.06	33.43	106	58 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5353.74	64.56	74.00	-9.44	54.77	34.11	8.34	32.66	106	58 PEAK																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	103.80	-----	-----	101.53	30.64	5.06	33.43	106	58 PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-04-27  532053485376540454325460 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>49.71</td><td>54.00</td><td>-4.29</td><td>39.93</td><td>34.11</td><td>8.33</td><td>32.66</td><td>106</td><td>58 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.10	49.71	54.00	-4.29	39.93	34.11	8.33	32.66	106	58 AVERAGE	Level (dBuV/m) Date: 2025-04-27  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.90</td><td>-----</td><td>-----</td><td>93.63</td><td>30.64</td><td>5.06</td><td>33.43</td><td>106</td><td>58 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	95.90	-----	-----	93.63	30.64	5.06	33.43	106	58 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5350.10	49.71	54.00	-4.29	39.93	34.11	8.33	32.66	106	58 AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	95.90	-----	-----	93.63	30.64	5.06	33.43	106	58 AVERAGE																																																																								

Remark: All signals exceeding the limit are fundamental frequency signals and can be ignored.

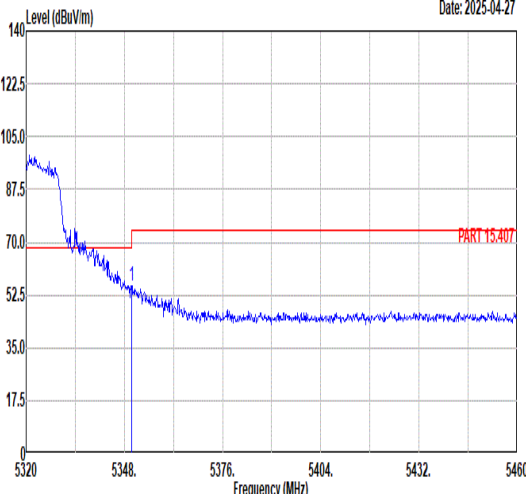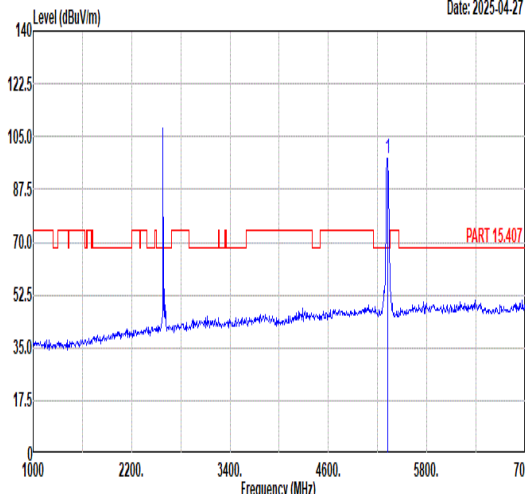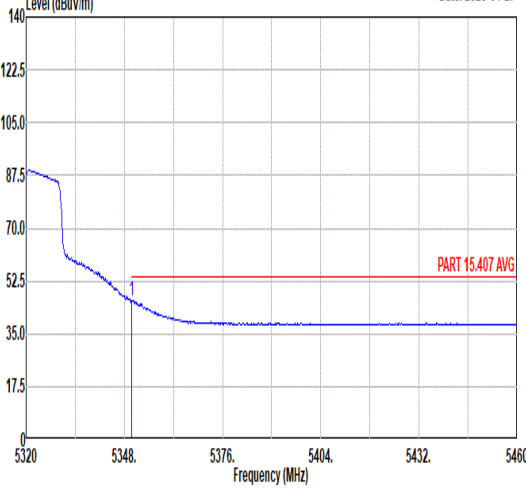
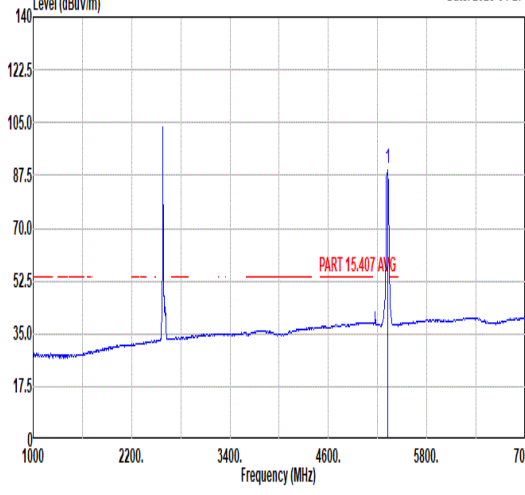


Mode	2																																																																																										
	Band Edge																																																																																										
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																										
ANT	5																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>45.71</td><td>34.11</td><td>8.33</td><td>32.66</td><td>103</td><td>257</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	55.49	74.00	-18.51	45.71	34.11	8.33	32.66	103	257	PEAK	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>97.58</td><td>-----</td><td>-----</td><td>95.31</td><td>30.64</td><td>5.06</td><td>33.43</td><td>103</td><td>257</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	97.58	-----	-----	95.31	30.64	5.06	33.43	103	257	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5350.10	55.49	74.00	-18.51	45.71	34.11	8.33	32.66	103	257	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5320.00	97.58	-----	-----	95.31	30.64	5.06	33.43	103	257	PEAK																																																																																
Avg	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>36.43</td><td>34.11</td><td>8.33</td><td>32.66</td><td>103</td><td>257</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	46.21	54.00	-7.79	36.43	34.11	8.33	32.66	103	257	AVERAGE	 Date: 2025-04-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>89.80</td><td>-----</td><td>-----</td><td>87.53</td><td>30.64</td><td>5.06</td><td>33.43</td><td>103</td><td>257</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	89.80	-----	-----	87.53	30.64	5.06	33.43	103	257	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5350.10	46.21	54.00	-7.79	36.43	34.11	8.33	32.66	103	257	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5320.00	89.80	-----	-----	87.53	30.64	5.06	33.43	103	257	AVERAGE																																																																																

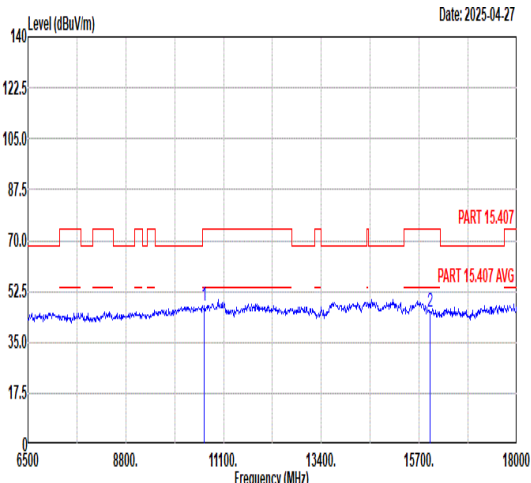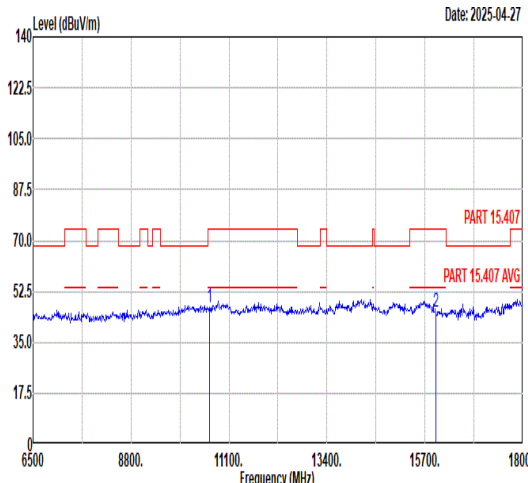

Mode	2																																																																																															
	Harmonic																																																																																															
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																															
ANT	5																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10640.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>57.54</td><td>37.78</td><td>10.94</td></tr><tr><td>2</td><td>15960.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>52.27</td><td>39.59</td><td>12.70</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94	2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10640.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>56.74</td><td>37.78</td><td>10.94</td></tr><tr><td>2</td><td>15960.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>52.29</td><td>39.59</td><td>12.70</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94	2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94																																																																																									
2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94																																																																																									
2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>10640.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>57.54</td><td>37.78</td><td>10.94</td></tr><tr><td>2</td><td>15960.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>52.27</td><td>39.59</td><td>12.70</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94	2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>10640.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>56.74</td><td>37.78</td><td>10.94</td></tr><tr><td>2</td><td>15960.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>52.29</td><td>39.59</td><td>12.70</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94	2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																									
1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94																																																																																									
2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																									
1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94																																																																																									
2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70																																																																																									

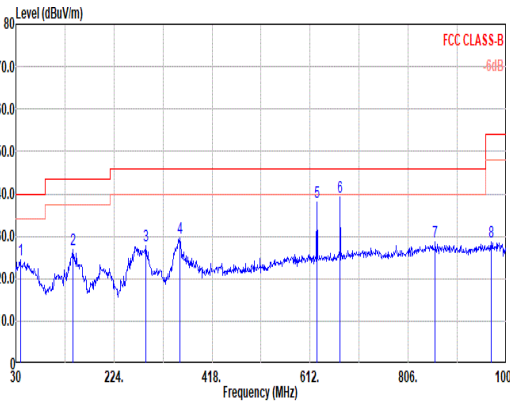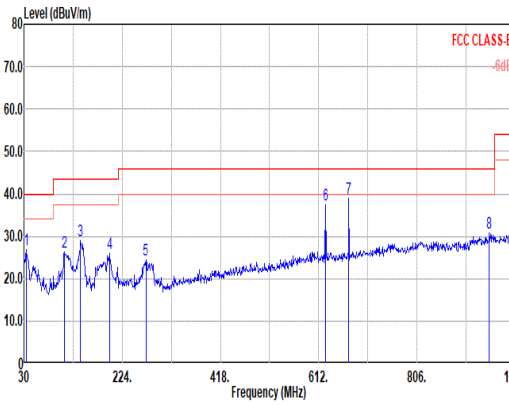

Mode	3																																																																																																																																																																																																																																																																																					
	LF																																																																																																																																																																																																																																																																																					
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																																																																																																																																																																																																																					
ANT	5																																																																																																																																																																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																																																															
Peak Avg																																																																																																																																																																																																																																																																																						
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>38.73</td><td>24.31</td><td>40.00</td><td>-15.69</td><td>39.43</td><td>19.16</td><td>0.62</td><td>34.90</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>142.52</td><td>26.81</td><td>43.50</td><td>-16.69</td><td>41.93</td><td>18.35</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>287.05</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>42.06</td><td>18.72</td><td>1.76</td><td>34.63</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>353.98</td><td>29.69</td><td>46.00</td><td>-16.31</td><td>42.02</td><td>20.31</td><td>1.95</td><td>34.59</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>625.50</td><td>38.03</td><td></td><td></td><td>43.75</td><td>26.17</td><td>2.66</td><td>34.55</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>671.50</td><td>39.23</td><td></td><td></td><td>44.32</td><td>26.62</td><td>2.75</td><td>34.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>859.35</td><td>28.78</td><td>46.00</td><td>-17.22</td><td>31.20</td><td>28.77</td><td>3.11</td><td>34.30</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>970.90</td><td>28.79</td><td>54.00</td><td>-25.21</td><td>29.87</td><td>29.88</td><td>3.30</td><td>34.26</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	38.73	24.31	40.00	-15.69	39.43	19.16	0.62	34.90	--	--	--	Peak	2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	--	Peak	3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	--	--	Peak	4	353.98	29.69	46.00	-16.31	42.02	20.31	1.95	34.59	--	--	--	Peak	5	625.50	38.03			43.75	26.17	2.66	34.55	--	--	--	Peak	6	671.50	39.23			44.32	26.62	2.75	34.46	--	--	--	Peak	7	859.35	28.78	46.00	-17.22	31.20	28.77	3.11	34.30	--	--	--	Peak	8	970.90	28.79	54.00	-25.21	29.87	29.88	3.30	34.26	--	--	--	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>34.85</td><td>26.73</td><td>40.00</td><td>-13.27</td><td>42.37</td><td>18.68</td><td>0.58</td><td>34.90</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>109.54</td><td>26.35</td><td>43.50</td><td>-17.15</td><td>44.34</td><td>15.68</td><td>1.11</td><td>34.78</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>141.55</td><td>29.03</td><td>43.50</td><td>-14.47</td><td>44.23</td><td>18.27</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>198.78</td><td>25.84</td><td>43.50</td><td>-17.66</td><td>43.01</td><td>16.05</td><td>1.48</td><td>34.70</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>270.56</td><td>24.31</td><td>46.00</td><td>-21.69</td><td>39.05</td><td>18.21</td><td>1.71</td><td>34.66</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>625.50</td><td>37.44</td><td></td><td></td><td>43.16</td><td>26.17</td><td>2.66</td><td>34.55</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>671.50</td><td>38.82</td><td></td><td></td><td>43.91</td><td>26.62</td><td>2.75</td><td>34.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>948.59</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>31.99</td><td>29.74</td><td>3.26</td><td>34.30</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	34.85	26.73	40.00	-13.27	42.37	18.68	0.58	34.90	--	--	--	Peak	2	109.54	26.35	43.50	-17.15	44.34	15.68	1.11	34.78	--	--	--	Peak	3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	--	--	Peak	4	198.78	25.84	43.50	-17.66	43.01	16.05	1.48	34.70	--	--	--	Peak	5	270.56	24.31	46.00	-21.69	39.05	18.21	1.71	34.66	--	--	--	Peak	6	625.50	37.44			43.16	26.17	2.66	34.55	--	--	--	Peak	7	671.50	38.82			43.91	26.62	2.75	34.46	--	--	--	Peak	8	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	--	Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																											
1	38.73	24.31	40.00	-15.69	39.43	19.16	0.62	34.90	--	--	--	Peak																																																																																																																																																																																																																																																																										
2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	--	Peak																																																																																																																																																																																																																																																																										
3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	--	--	Peak																																																																																																																																																																																																																																																																										
4	353.98	29.69	46.00	-16.31	42.02	20.31	1.95	34.59	--	--	--	Peak																																																																																																																																																																																																																																																																										
5	625.50	38.03			43.75	26.17	2.66	34.55	--	--	--	Peak																																																																																																																																																																																																																																																																										
6	671.50	39.23			44.32	26.62	2.75	34.46	--	--	--	Peak																																																																																																																																																																																																																																																																										
7	859.35	28.78	46.00	-17.22	31.20	28.77	3.11	34.30	--	--	--	Peak																																																																																																																																																																																																																																																																										
8	970.90	28.79	54.00	-25.21	29.87	29.88	3.30	34.26	--	--	--	Peak																																																																																																																																																																																																																																																																										
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																											
1	34.85	26.73	40.00	-13.27	42.37	18.68	0.58	34.90	--	--	--	Peak																																																																																																																																																																																																																																																																										
2	109.54	26.35	43.50	-17.15	44.34	15.68	1.11	34.78	--	--	--	Peak																																																																																																																																																																																																																																																																										
3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	--	--	Peak																																																																																																																																																																																																																																																																										
4	198.78	25.84	43.50	-17.66	43.01	16.05	1.48	34.70	--	--	--	Peak																																																																																																																																																																																																																																																																										
5	270.56	24.31	46.00	-21.69	39.05	18.21	1.71	34.66	--	--	--	Peak																																																																																																																																																																																																																																																																										
6	625.50	37.44			43.16	26.17	2.66	34.55	--	--	--	Peak																																																																																																																																																																																																																																																																										
7	671.50	38.82			43.91	26.62	2.75	34.46	--	--	--	Peak																																																																																																																																																																																																																																																																										
8	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	--	Peak																																																																																																																																																																																																																																																																										

Remark: 625.5MHz & 671.5MHz are WWAN fundamental frequency signals and can be ignored



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2527-1
FCC ID : IHDT56AV5
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Apr. 01, 2025 ~ Apr. 17, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards	8
1.9 Specification of Accessory	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement	14
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	20
3.6 AC Conducted Emission Measurement	24
3.7 Antenna Requirements	26
4 LIST OF MEASURING EQUIPMENT	27
5 MEASUREMENT UNCERTAINTY	28
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR530724C	Rev. 01	Initial issue of report	Apr. 21, 2025
FR530724C	Rev. 02	Update the equipment calibration date in section4. This report is an update version, replacing the report issued on Apr. 21, 2025.	Apr. 23, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
0	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.25 dB at 2483.55 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.75 dB at 0.18 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2527-1
FCC ID	IHDT56AV5
IMEI/SN Code	Conducted: NN0R260111 Conduction: 358887330039734/358887330039742 Radiation: 358887330040591/358887330040609
HW Version	DVT2
SW Version	V2VN35.50
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.76 dBm (0.1191 W) 802.11g : 24.69 dBm (0.2944 W) 802.11n HT20 : 24.55 dBm (0.2851 W) 802.11n HT40 : 24.22 dBm (0.2642 W) 802.11ax HE20 : 24.66 dBm (0.2924 W) 802.11ax HE40 : 24.47 dBm (0.2799 W)
99% Occupied Bandwidth	802.11b : 13.107MHz 802.11g : 17.662MHz 802.11n HT20 : 18.781MHz 802.11n HT40 : 37.163MHz 802.11ax HE20 : 19.341MHz 802.11ax HE40 : 37.962MHz
Antenna Type / Gain	IFA Antenna type with gain -2.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n/ax mode, the whole testing have assessed only 802.11ax HE20/HE40 by referring to the higher output power.
2. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH03-SZ	CN1256	421272

Note: Test data subcontracted: test cases in section 3.5&3.6 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24
3.	CO02-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(NVT)	Model Name	RA52
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	RA52
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	HX-ZN-34
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	JWUB1928-ZN01H
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link with Wireless Earphones + WLAN Link (2.4G) + USB Cable2 (Charging from Adapter2)
Remark: 1. For Radiated Test Cases, The tests were performance with Adapter 2 and USB Cable 2. 2. Accessories from 15B worse mode.	


RSE Co-location mode
802.11g CH11 Tx + LTE B13 Link

2.3 Connection Diagram of Test System

AC Conducted Emission:

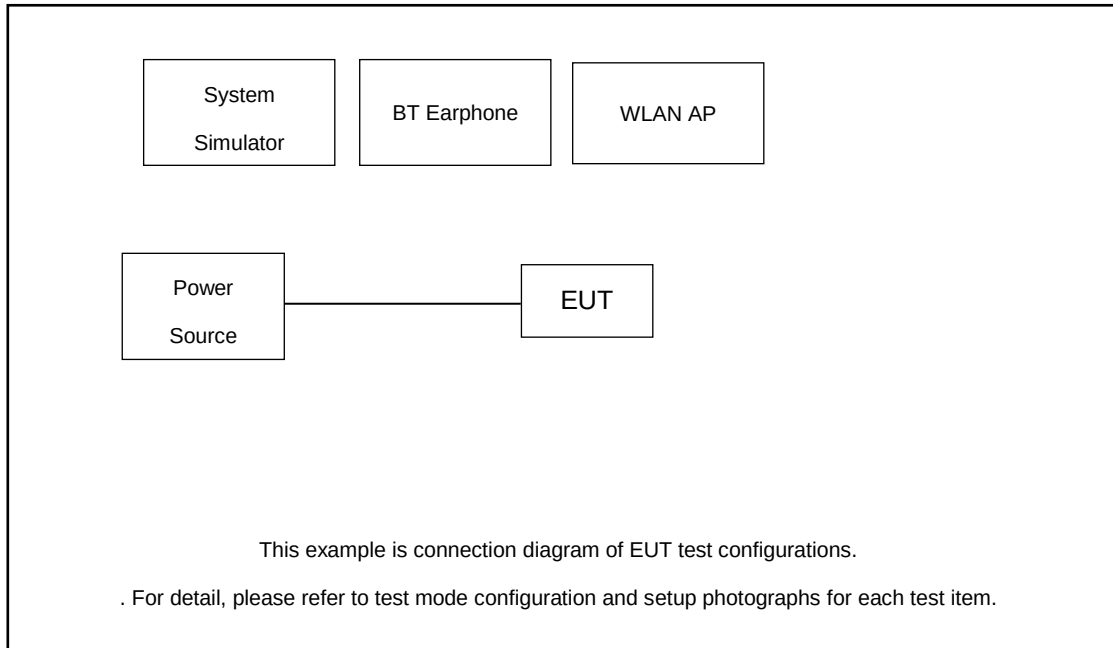

Radiated Emission:

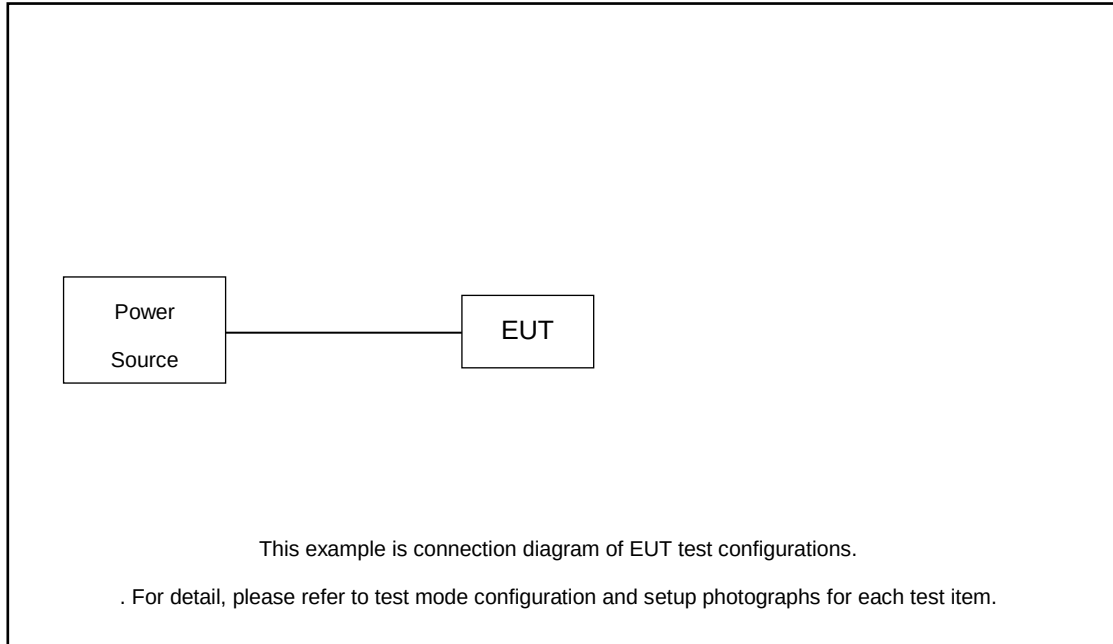

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.25 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.25 + 20 = 22.25 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

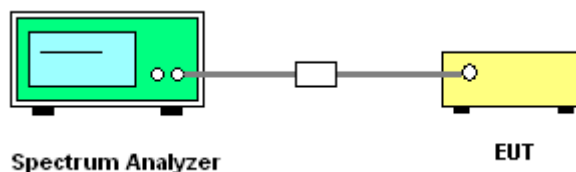

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

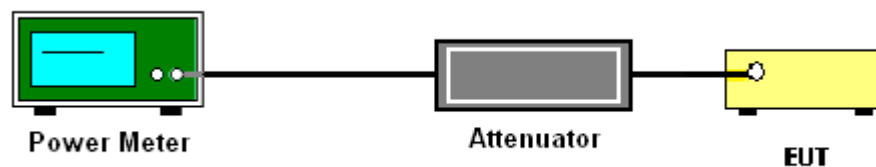



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant6	Ant6	Ant6	Ant6	Ant6	
11b	1Mbps	1	1	2412	20.69	30.00	-2.50	18.19	36.00	Pass
11b	1Mbps	1	6	2437	20.76	30.00	-2.50	18.26	36.00	Pass
11b	1Mbps	1	11	2462	20.57	30.00	-2.50	18.07	36.00	Pass
11g	6Mbps	1	1	2412	24.50	30.00	-2.50	22.00	36.00	Pass
11g	6Mbps	1	6	2437	24.69	30.00	-2.50	22.19	36.00	Pass
11g	6Mbps	1	10	2457	24.26	30.00	-2.50	21.76	36.00	Pass
11g	6Mbps	1	11	2462	23.07	30.00	-2.50	20.57	36.00	Pass
HT20	MCS0	1	1	2412	24.41	30.00	-2.50	21.91	36.00	Pass
HT20	MCS0	1	6	2437	24.55	30.00	-2.50	22.05	36.00	Pass
HT20	MCS0	1	10	2457	23.89	30.00	-2.50	21.39	36.00	Pass
HT20	MCS0	1	11	2462	22.45	30.00	-2.50	19.95	36.00	Pass
HT40	MCS0	1	3	2422	24.22	30.00	-2.50	21.72	36.00	Pass
HT40	MCS0	1	6	2437	23.67	30.00	-2.50	21.17	36.00	Pass
HT40	MCS0	1	9	2452	21.65	30.00	-2.50	19.15	36.00	Pass

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant6	Ant6	Ant6	Ant6	Ant6	
HE20	MCS0	1	1	2412	Full	24.51	30.00	-2.50	22.01	36.00	Pass
HE20	MCS0	1	1	2412	26/0	18.39	30.00	-2.50	15.89	36.00	Pass
HE20	MCS0	1	1	2412	52/37	21.45	30.00	-2.50	18.95	36.00	Pass
HE20	MCS0	1	1	2412	106/53	23.09	30.00	-2.50	20.59	36.00	Pass
HE20	MCS0	1	6	2437	Full	24.66	30.00	-2.50	22.16	36.00	Pass
HE20	MCS0	1	6	2437	26/0	18.43	30.00	-2.50	15.93	36.00	Pass
HE20	MCS0	1	6	2437	52/37	21.54	30.00	-2.50	19.04	36.00	Pass
HE20	MCS0	1	6	2437	106/53	23.14	30.00	-2.50	20.64	36.00	Pass
HE20	MCS0	1	10	2457	Full	24.03	30.00	-2.50	21.53	36.00	Pass
HE20	MCS0	1	11	2462	Full	22.61	30.00	-2.50	20.11	36.00	Pass
HE20	MCS0	1	11	2462	26/8	14.61	30.00	-2.50	12.11	36.00	Pass
HE20	MCS0	1	11	2462	52/40	17.71	30.00	-2.50	15.21	36.00	Pass
HE20	MCS0	1	11	2462	106/54	20.67	30.00	-2.50	18.17	36.00	Pass
HE40	MCS0	1	3	2422	Full	24.47	30.00	-2.50	21.97	36.00	Pass
HE40	MCS0	1	6	2437	Full	23.88	30.00	-2.50	21.38	36.00	Pass
HE40	MCS0	1	9	2452	Full	21.84	30.00	-2.50	19.34	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
					Ant 6	Ant6	Ant6	Ant6	Ant6	Ant6		Ant 6
11b	1Mbps	1	1	2412	0.04	18.44	30.00	-2.50	15.94	36.00	Pass	19.00
11b	1Mbps	1	6	2437	0.04	18.51	30.00	-2.50	16.01	36.00	Pass	19.00
11b	1Mbps	1	11	2462	0.04	18.37	30.00	-2.50	15.87	36.00	Pass	19.00
11g	6Mbps	1	1	2412	0.13	18.57	30.00	-2.50	16.07	36.00	Pass	19.00
11g	6Mbps	1	6	2437	0.13	18.48	30.00	-2.50	15.98	36.00	Pass	19.00
11g	6Mbps	1	10	2457	0.13	17.87	30.00	-2.50	15.37	36.00	Pass	18.50
11g	6Mbps	1	11	2462	0.13	14.96	30.00	-2.50	12.46	36.00	Pass	15.50
HT20	MCS0	1	1	2412	0.14	18.59	30.00	-2.50	16.09	36.00	Pass	19.00
HT20	MCS0	1	6	2437	0.14	18.46	30.00	-2.50	15.96	36.00	Pass	19.00
HT20	MCS0	1	10	2457	0.14	16.55	30.00	-2.50	14.05	36.00	Pass	17.00
HT20	MCS0	1	11	2462	0.14	13.62	30.00	-2.50	11.12	36.00	Pass	14.00
HT40	MCS0	1	3	2422	0.28	16.86	30.00	-2.50	14.36	36.00	Pass	17.50
HT40	MCS0	1	6	2437	0.28	14.73	30.00	-2.50	12.23	36.00	Pass	15.50
HT40	MCS0	1	9	2452	0.28	12.71	30.00	-2.50	10.21	36.00	Pass	13.00

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
						Ant6	Ant6	Ant6	Ant6	Ant6	Ant6		Ant 6
HE20	MCS0	1	1	2412	Full	0.18	18.69	30.00	-2.50	16.19	36.00	Pass	19.00
HE20	MCS0	1	1	2412	26/0	0.13	9.01	30.00	-2.50	6.51	36.00	Pass	9.00
HE20	MCS0	1	1	2412	52/37	0.05	11.96	30.00	-2.50	9.46	36.00	Pass	12.00
HE20	MCS0	1	1	2412	106/53	0.08	14.80	30.00	-2.50	12.30	36.00	Pass	15.00
HE20	MCS0	1	6	2437	Full	0.18	18.56	30.00	-2.50	16.06	36.00	Pass	19.00
HE20	MCS0	1	6	2437	26/0	0.13	9.20	30.00	-2.50	6.70	36.00	Pass	9.00
HE20	MCS0	1	6	2437	52/37	0.05	12.01	30.00	-2.50	9.51	36.00	Pass	12.00
HE20	MCS0	1	6	2437	106/53	0.08	14.87	30.00	-2.50	12.37	36.00	Pass	15.00
HE20	MCS0	1	10	2457	Full	0.18	16.70	30.00	-2.50	14.20	36.00	Pass	17.00
HE20	MCS0	1	11	2462	Full	0.18	13.80	30.00	-2.50	11.30	36.00	Pass	14.00
HE20	MCS0	1	11	2462	26/8	0.13	4.54	30.00	-2.50	2.04	36.00	Pass	4.00
HE20	MCS0	1	11	2462	52/40	0.05	7.78	30.00	-2.50	5.28	36.00	Pass	7.00
HE20	MCS0	1	11	2462	106/54	0.08	10.67	30.00	-2.50	8.17	36.00	Pass	10.00
HE40	MCS0	1	3	2422	Full	0.34	17.05	30.00	-2.50	14.55	36.00	Pass	17.50
HE40	MCS0	1	6	2437	Full	0.34	14.96	30.00	-2.50	12.46	36.00	Pass	15.00



HE40	MCS0	1	9	2452	Full	0.34	12.91	30.00	-2.50	10.41	36.00	Pass	13.00
------	------	---	---	------	------	------	-------	-------	-------	-------	-------	------	-------

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

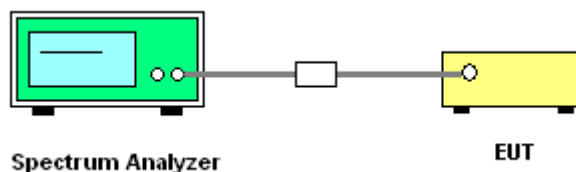

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

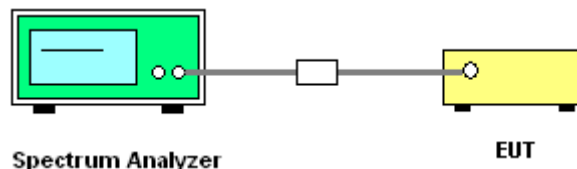

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

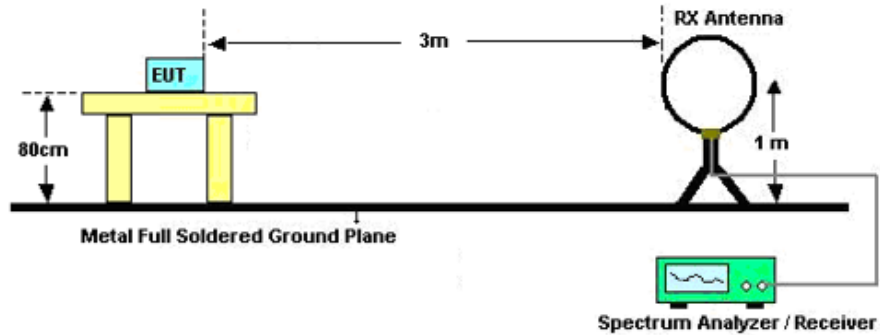

For radiated emissions from 30MHz to 1GHz

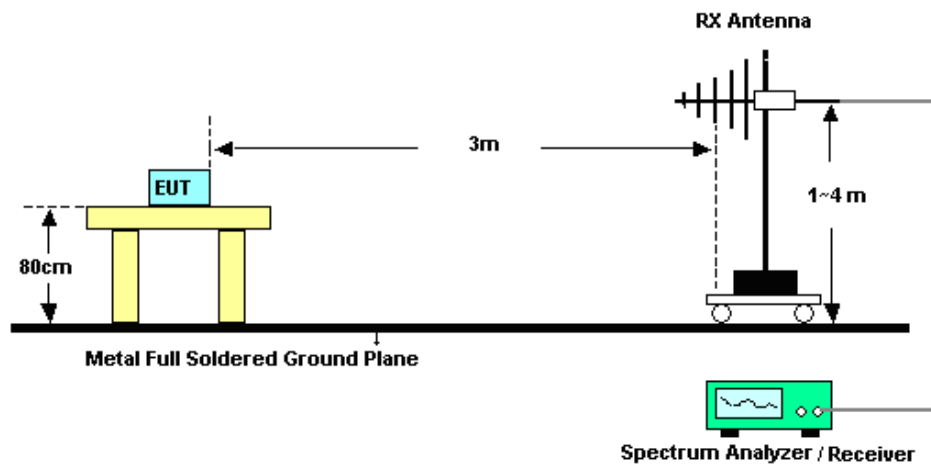

For radiated emissions above 1GHz

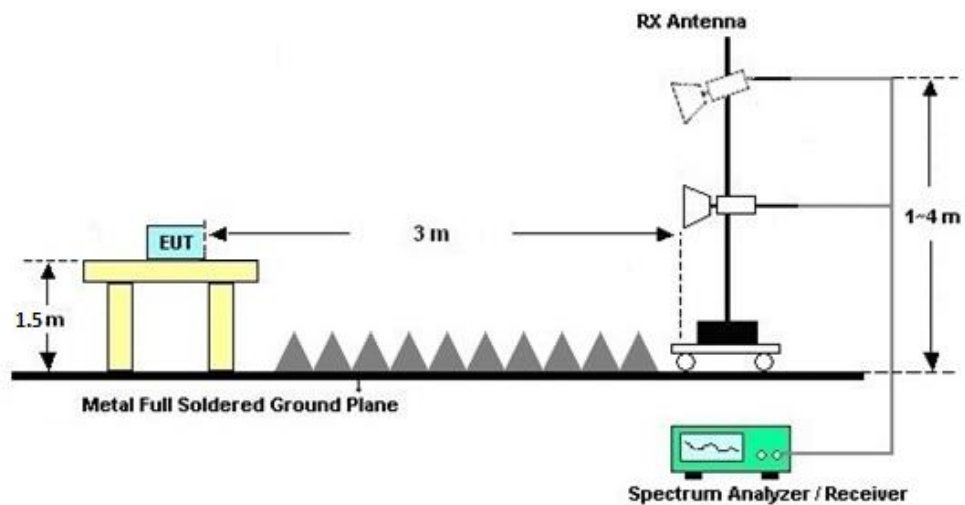



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

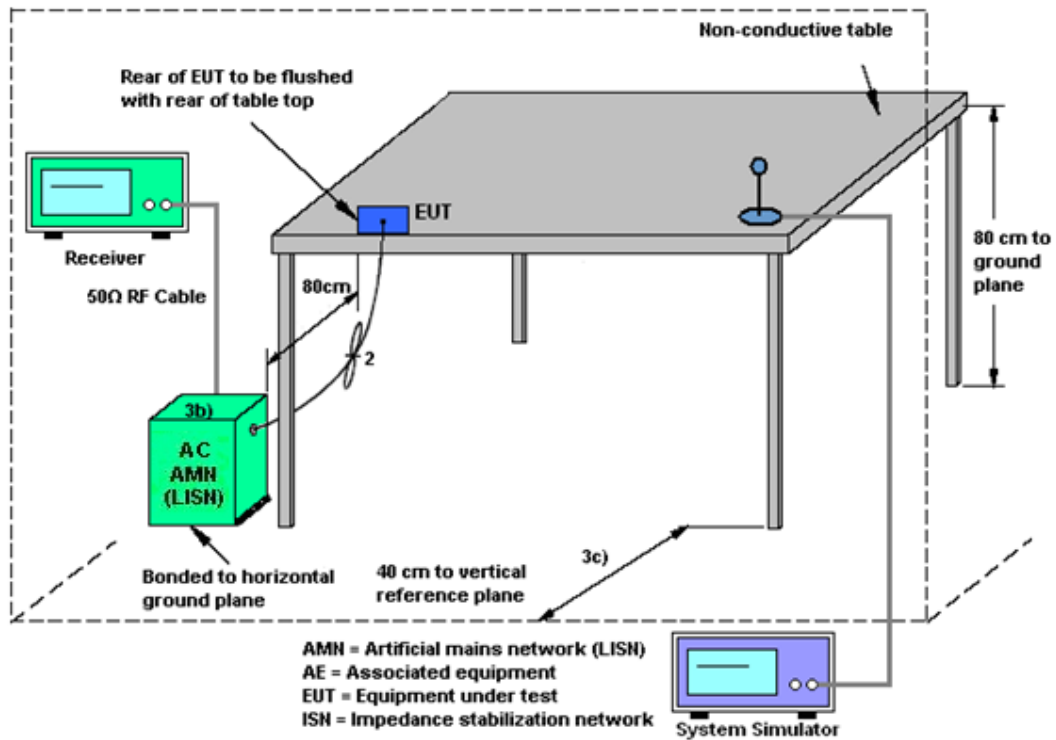

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Apr. 01, 2025~ Apr. 15, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 08, 2025		Apr. 07, 2026	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Apr. 01, 2025~ Apr. 15, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 08, 2025		Apr. 07, 2026	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 01, 2025~ Apr. 15, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Apr. 01, 2025~ Apr. 15, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Apr. 01, 2025~ Apr. 15, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2025		Apr. 07, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 01, 2025~ Apr. 15, 2025	Jul.02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Apr. 01, 2025~ Apr. 15, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2025		Apr. 07, 2026	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Apr. 01, 2025~ Apr. 15, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Apr. 01, 2025~ Apr. 15, 2025	Oct. 13, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2024	Apr. 01, 2025~ Apr. 15, 2025	Dec. 25, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Apr. 01, 2025~ Apr. 15, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 01, 2025~ Apr. 15, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 01, 2025~ Apr. 15, 2025	NCR	Radiation (03CH03-SZ)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 08, 2025~ Apr. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 08, 2025~ Apr. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 08, 2025~ Apr. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.00 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.00 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2025.4.8~2025.4.11

Test Engineer: Gene Wang


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant6	2412	7.56	2408.48	2416.04	0.5	PASS
		2437	8.04	2433.00	2441.04	0.5	PASS
		2462	8.04	2458.00	2466.04	0.5	PASS
11G	Ant6	2412	15.72	2404.44	2420.16	0.5	PASS
		2437	16.04	2429.12	2445.16	0.5	PASS
		2457	16.28	2448.88	2465.16	0.5	PASS
		2462	16.32	2453.84	2470.16	0.5	PASS
11N20	Ant6	2412	17.04	2403.48	2420.52	0.5	PASS
		2437	16.56	2428.60	2445.16	0.5	PASS
		2457	17.52	2448.24	2465.76	0.5	PASS
		2462	17.00	2453.52	2470.52	0.5	PASS
11N40	Ant6	2422	35.68	2404.48	2440.16	0.5	PASS
		2437	35.20	2419.48	2454.68	0.5	PASS
		2452	35.68	2434.48	2470.16	0.5	PASS
11AX20	Ant6	2412	17.24	2403.92	2421.16	0.5	PASS
		2437	18.60	2427.84	2446.44	0.5	PASS
		2457	18.40	2447.76	2466.16	0.5	PASS
		2462	18.24	2452.84	2471.08	0.5	PASS
11AX40	Ant6	2422	37.68	2403.44	2441.12	0.5	PASS
		2437	37.20	2418.68	2455.88	0.5	PASS
		2452	37.60	2433.28	2470.88	0.5	PASS





Test Graphs

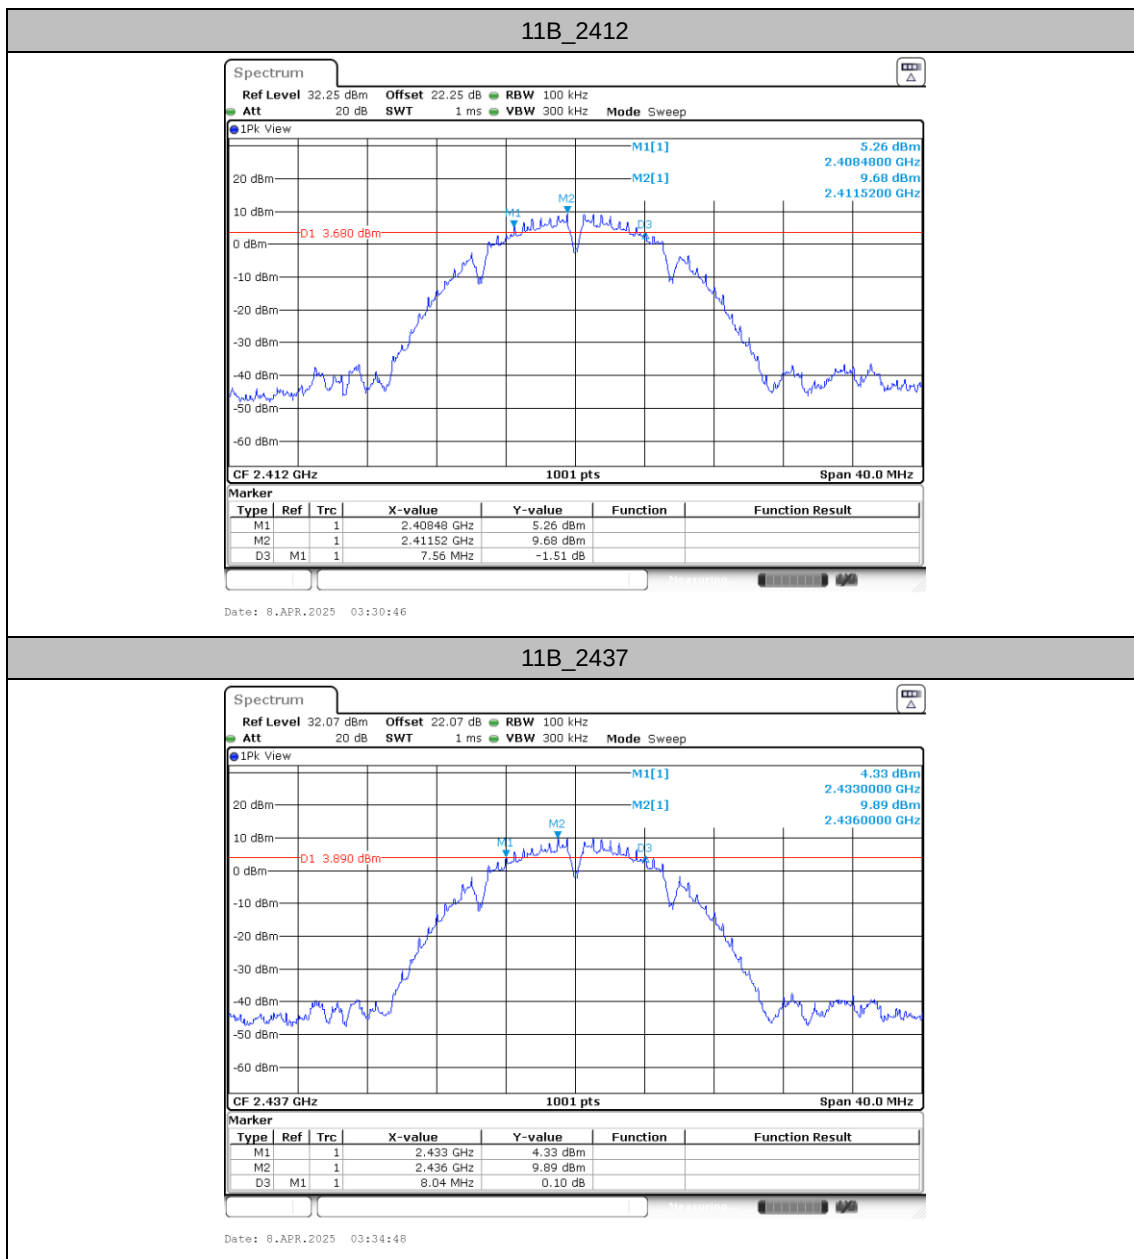


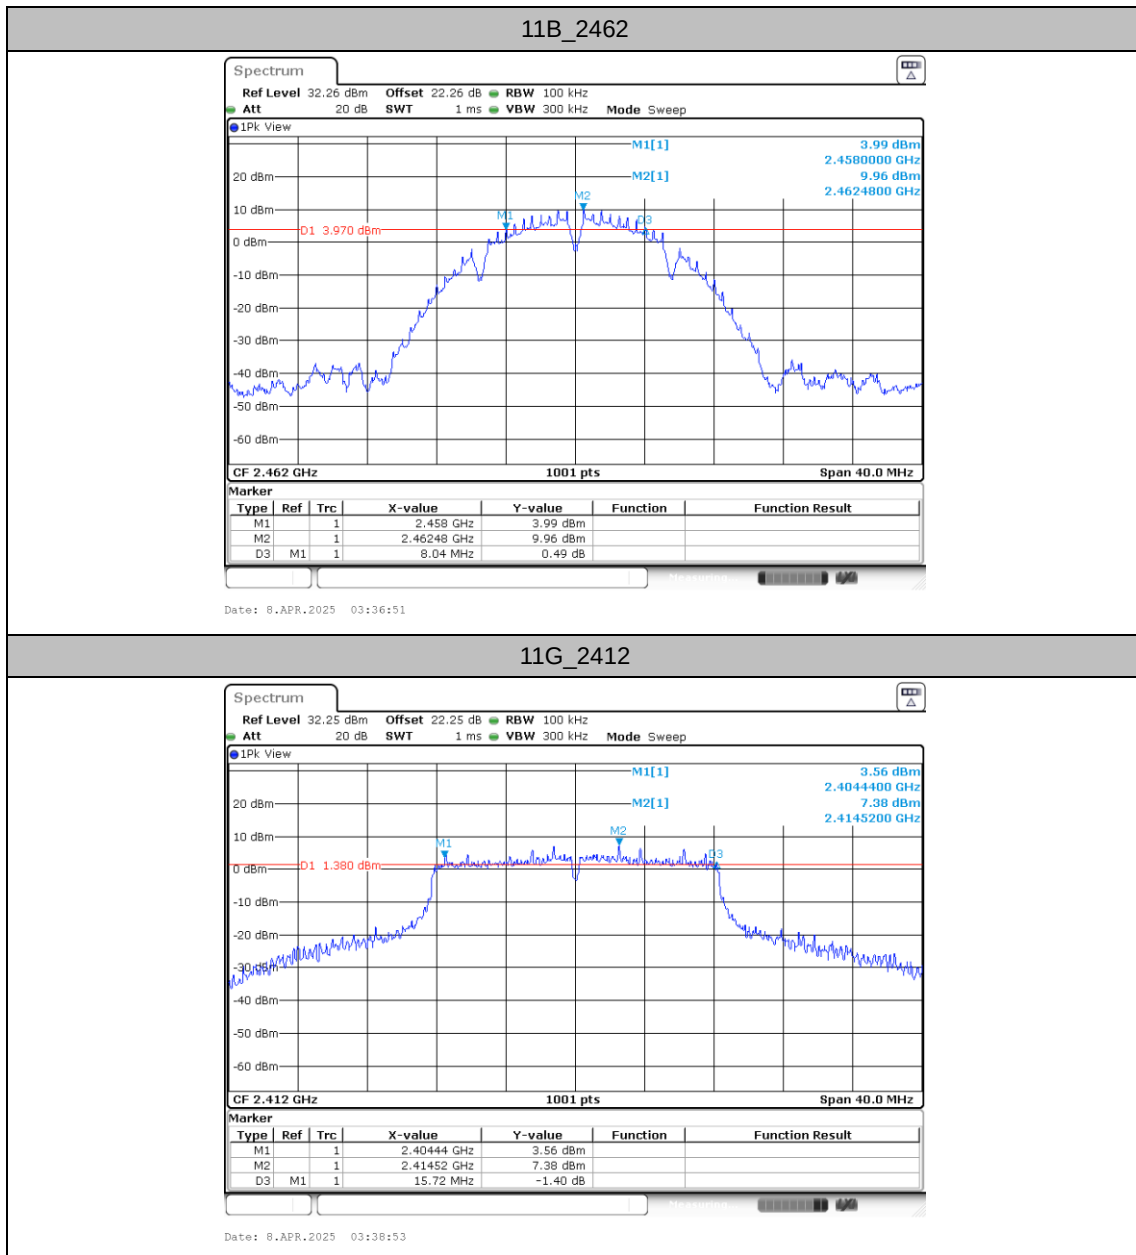


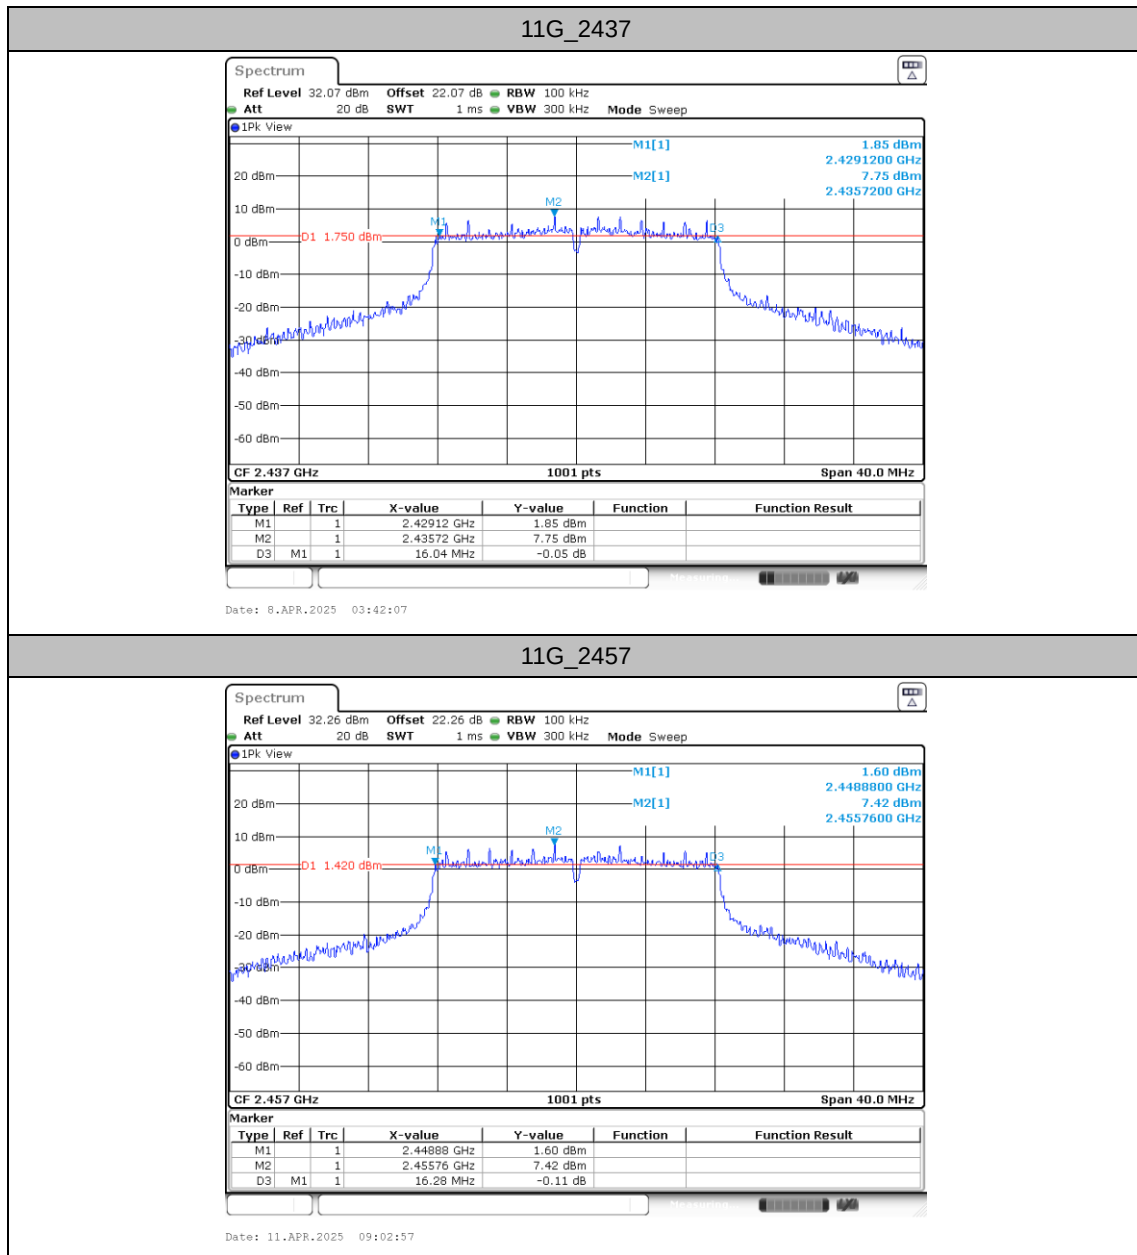


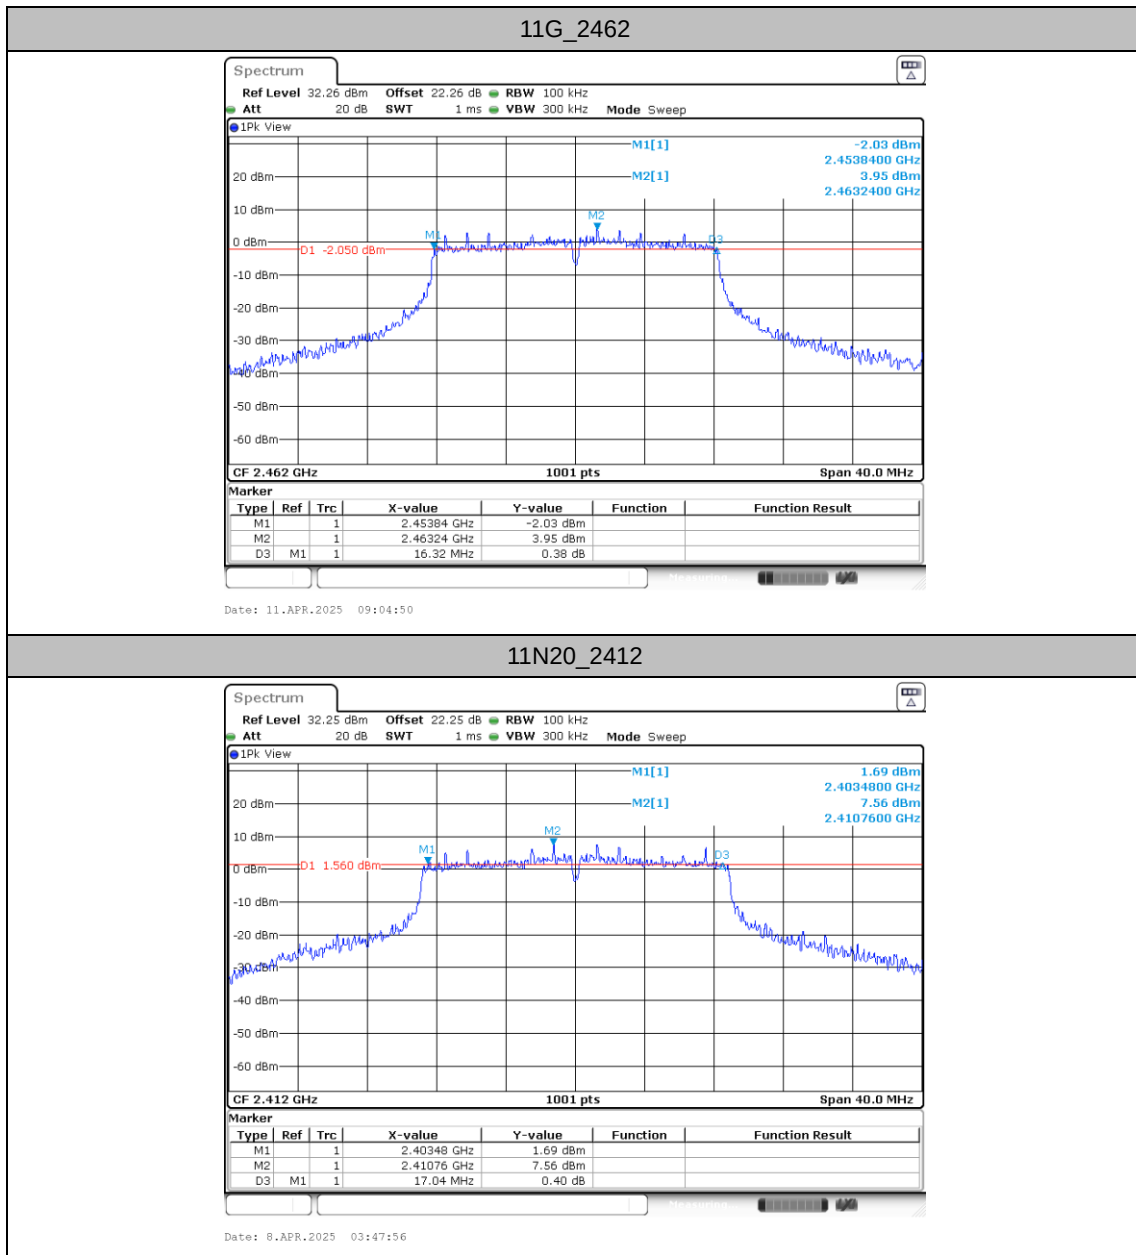


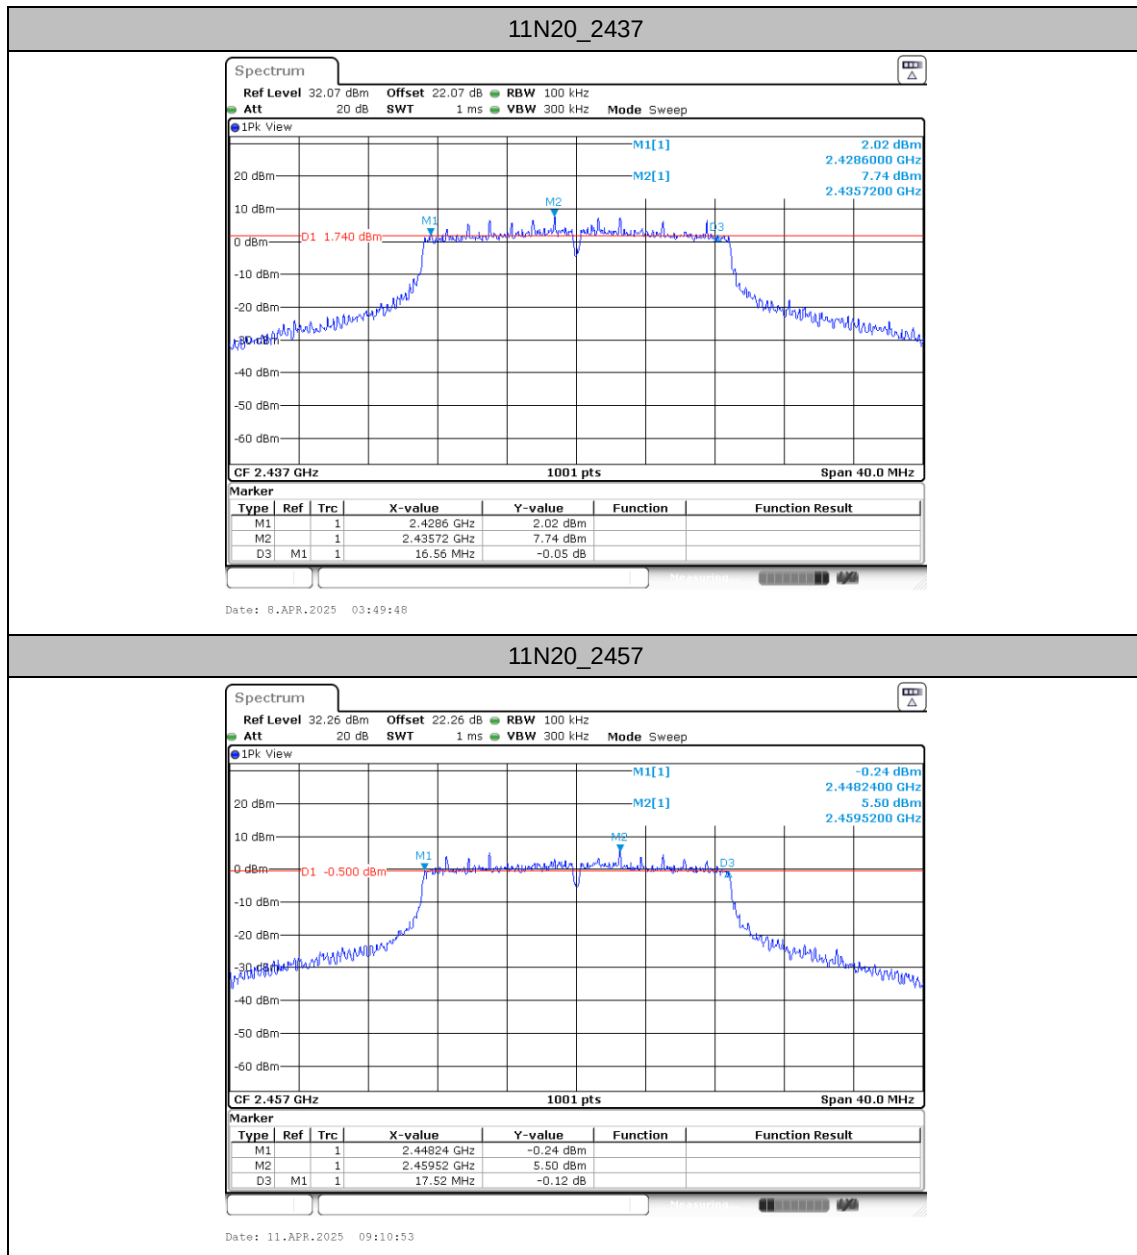


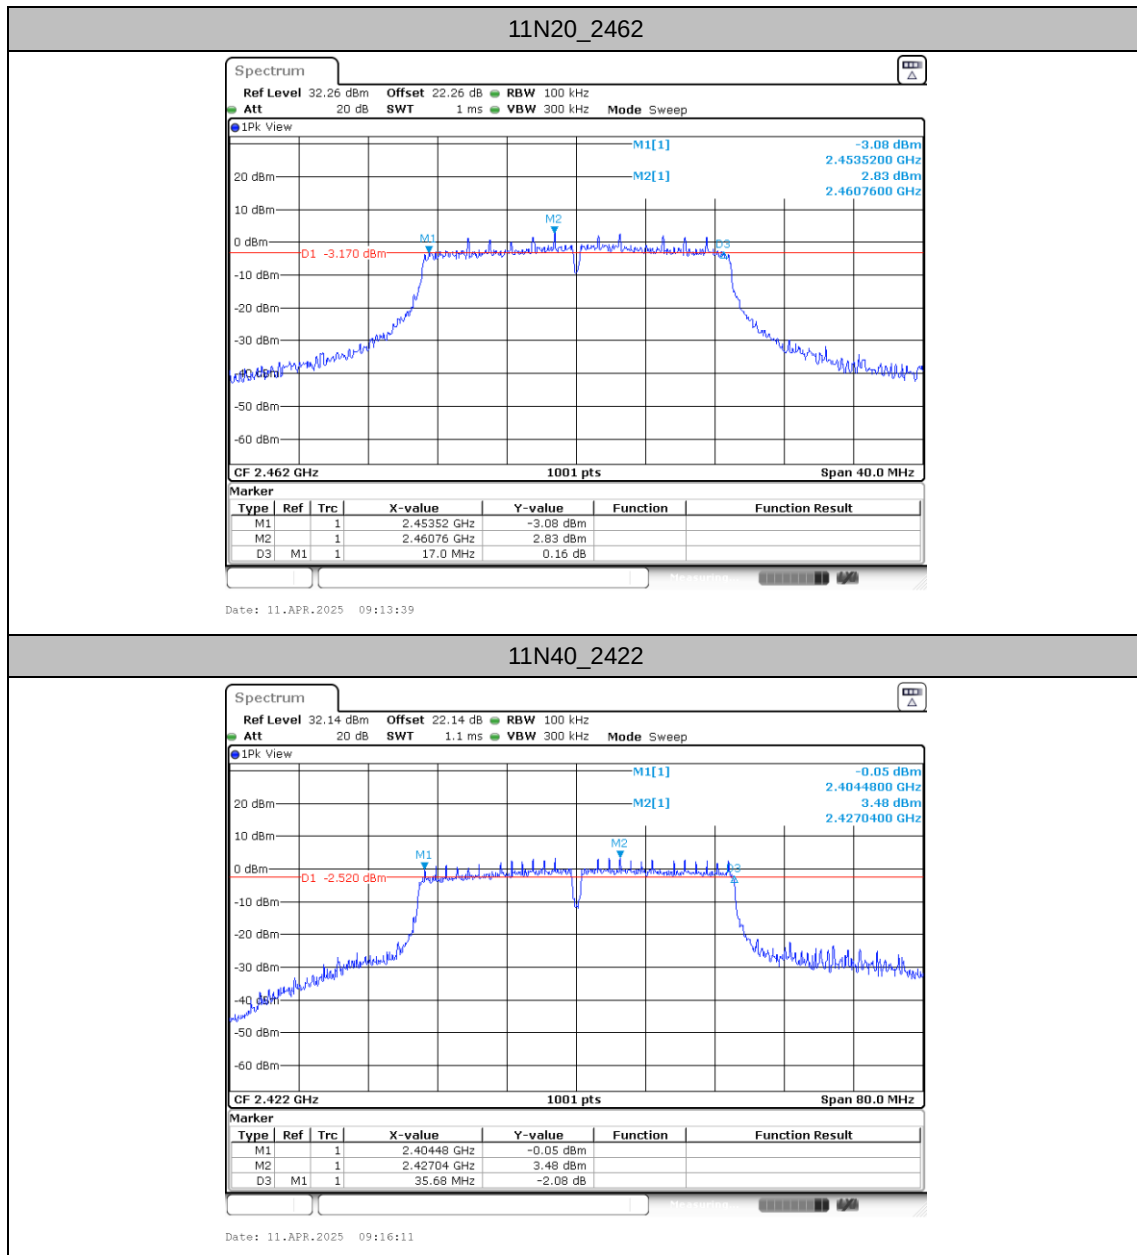


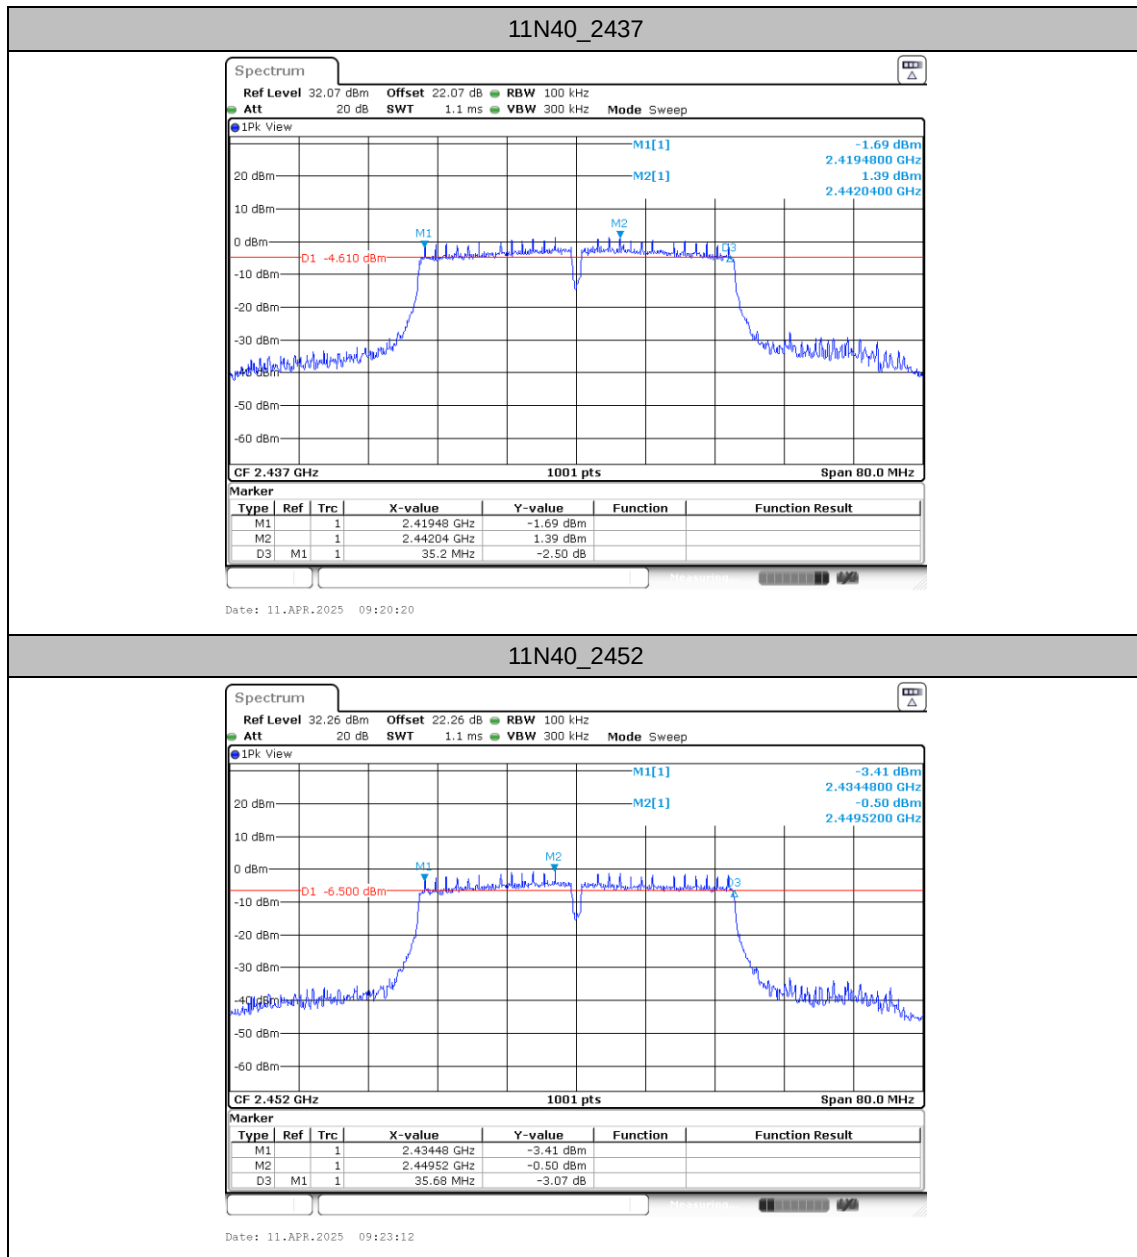

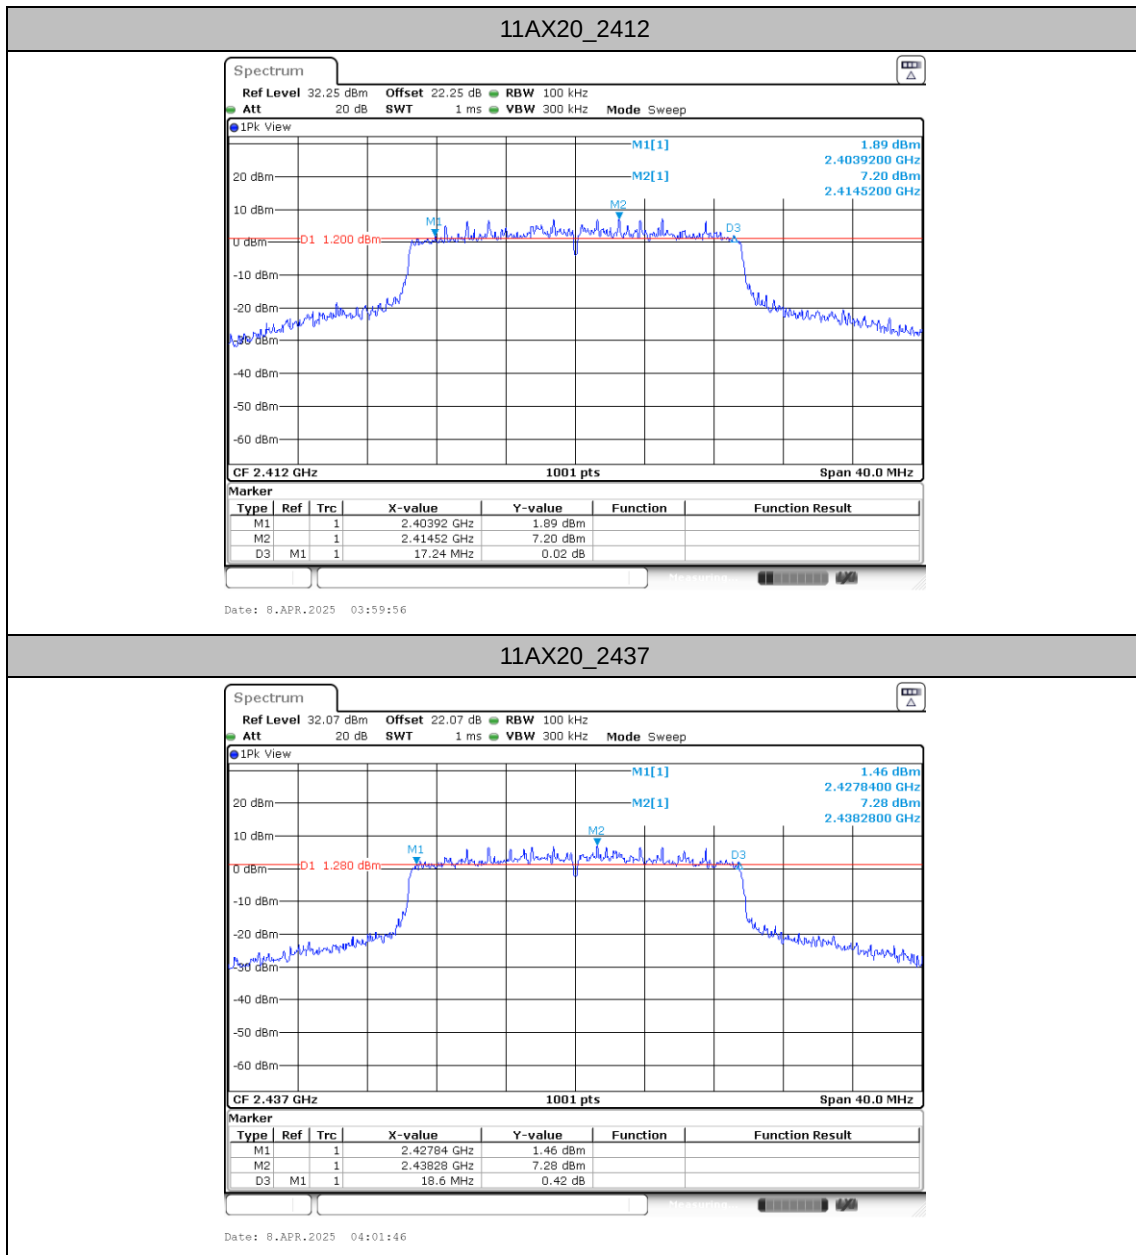

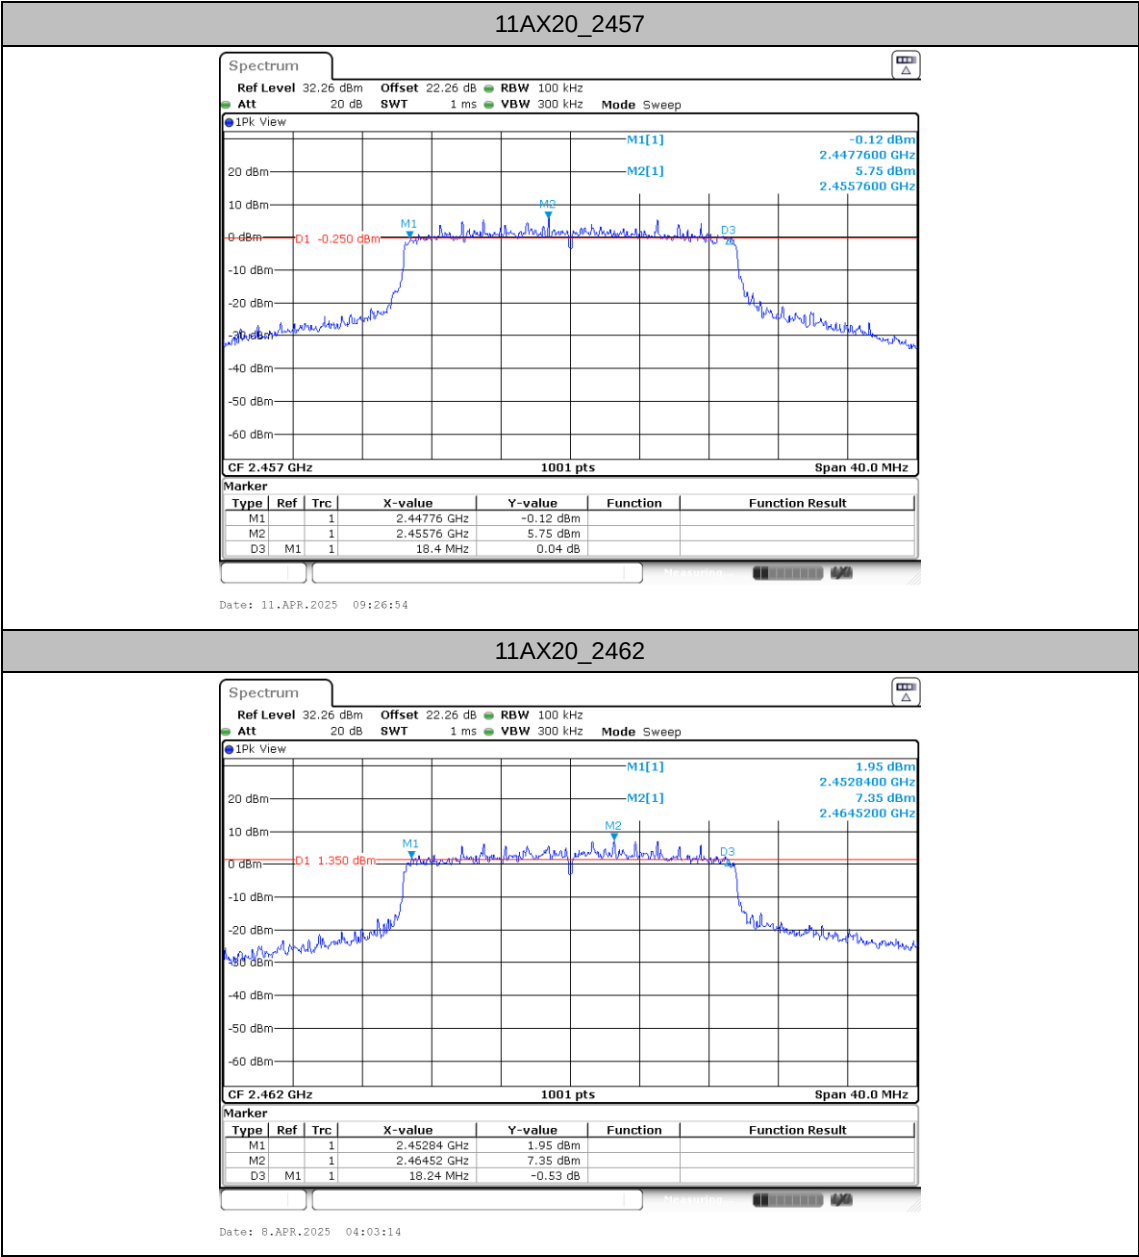

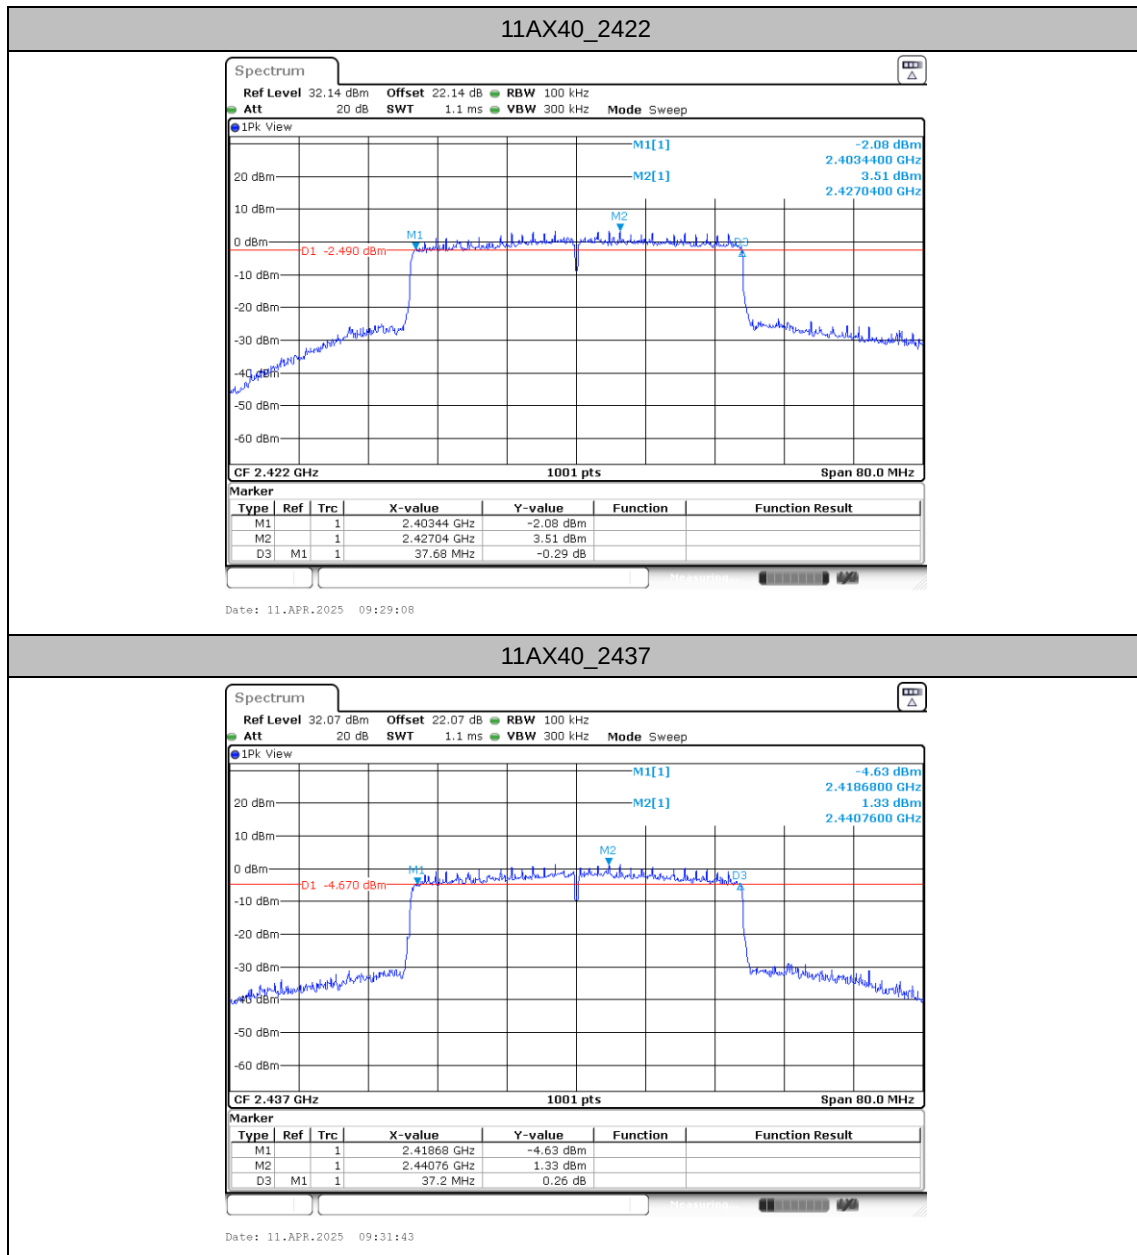

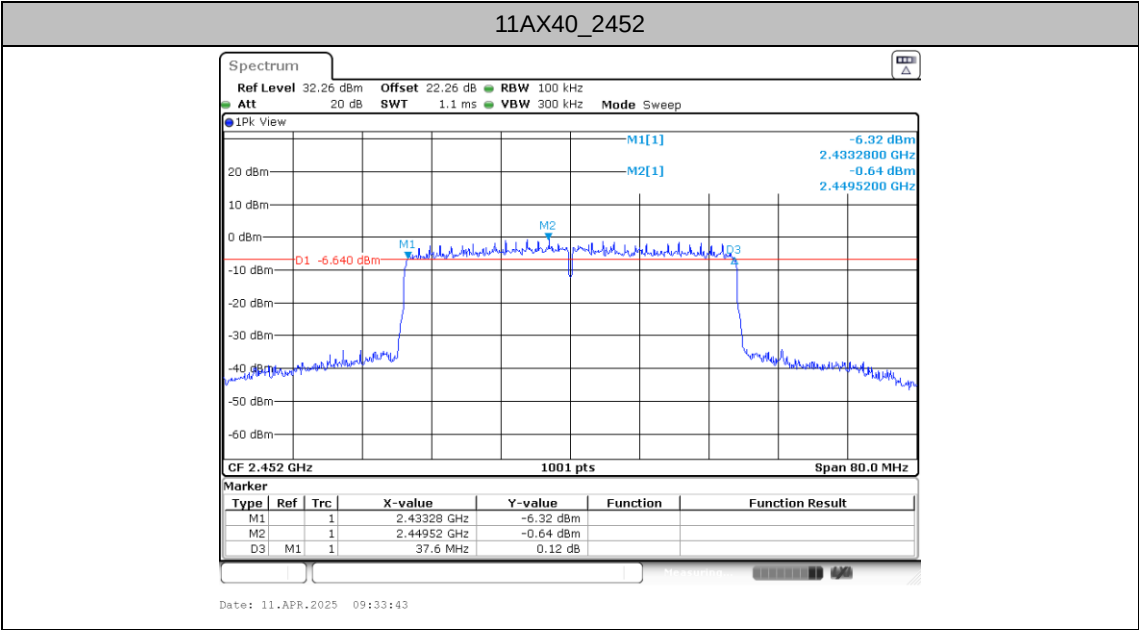




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant6	2412	13.107	2405.4865	2418.5934	---	---
		2437	12.987	2430.5265	2443.5135	---	---
		2462	13.107	2455.5265	2468.6334	---	---
11G	Ant6	2412	17.662	2403.2488	2420.9111	---	---
		2437	17.463	2428.3287	2445.7912	---	---
		2457	17.542	2448.2488	2465.7912	---	---
		2462	17.183	2453.4086	2470.5914	---	---
11N20	Ant6	2412	18.781	2402.6893	2421.4705	---	---
		2437	18.621	2427.7293	2446.3506	---	---
		2457	18.462	2447.7692	2466.2308	---	---
		2462	18.262	2452.8492	2471.1109	---	---
11N40	Ant6	2422	37.163	2403.6983	2440.8611	---	---
		2437	36.683	2418.6983	2455.3816	---	---
		2452	36.683	2433.6983	2470.3816	---	---
11AX20	Ant6	2412	19.341	2402.3696	2421.7103	---	---
		2437	19.341	2427.3696	2446.7103	---	---
		2457	19.261	2447.3696	2466.6304	---	---
		2462	19.061	2452.4496	2471.5105	---	---
11AX40	Ant6	2422	37.962	2403.1389	2441.1009	---	---
		2437	37.882	2418.0589	2455.9411	---	---
		2452	37.882	2433.1389	2471.0210	---	---





Test Graphs

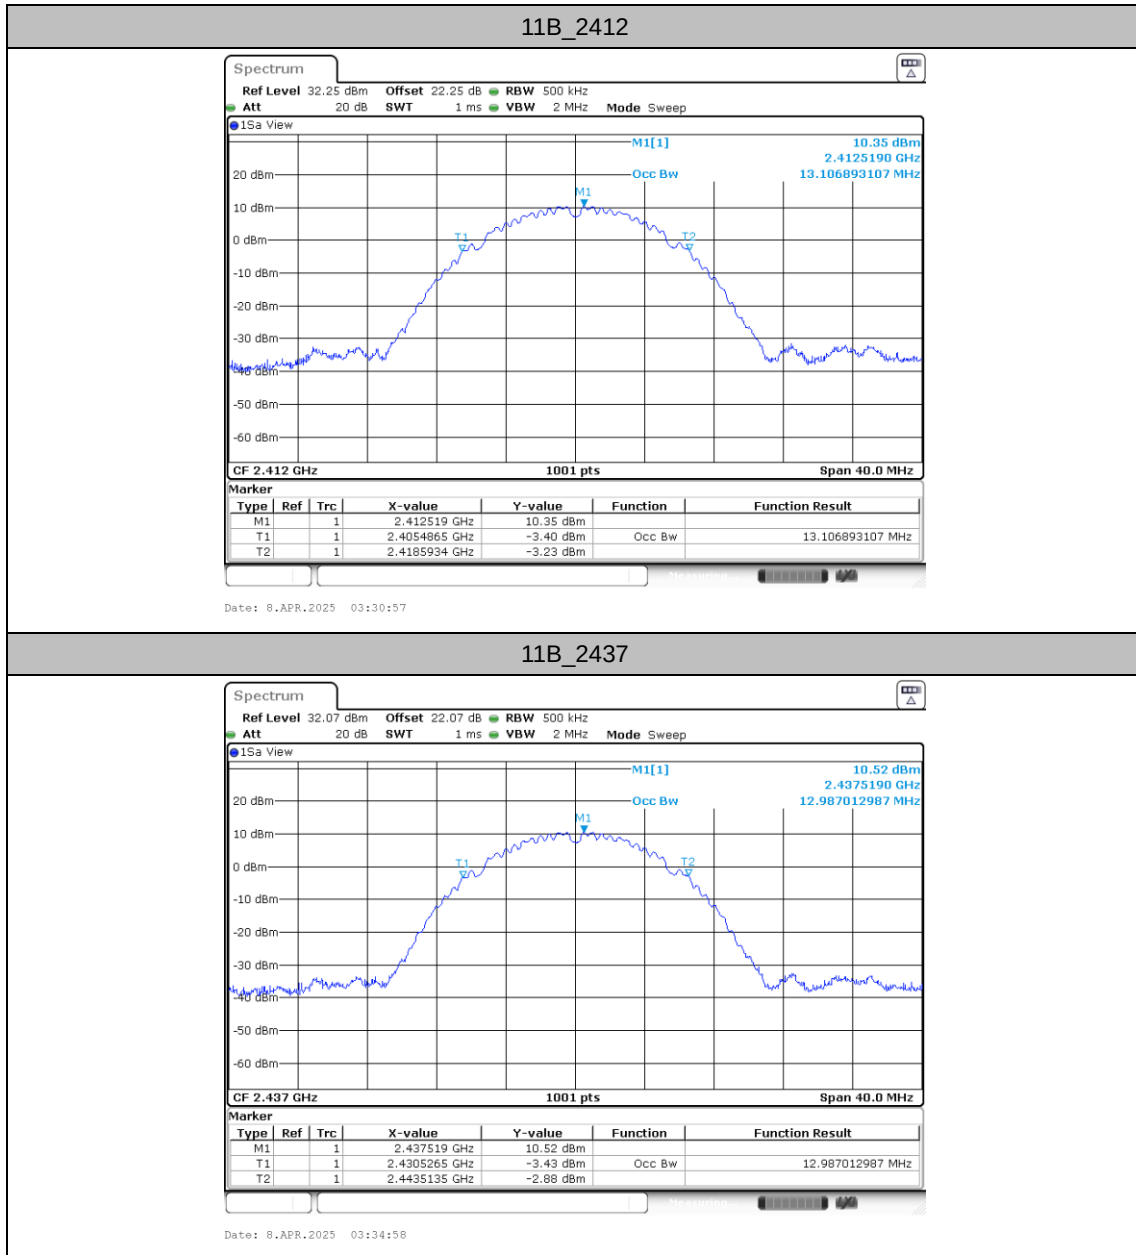


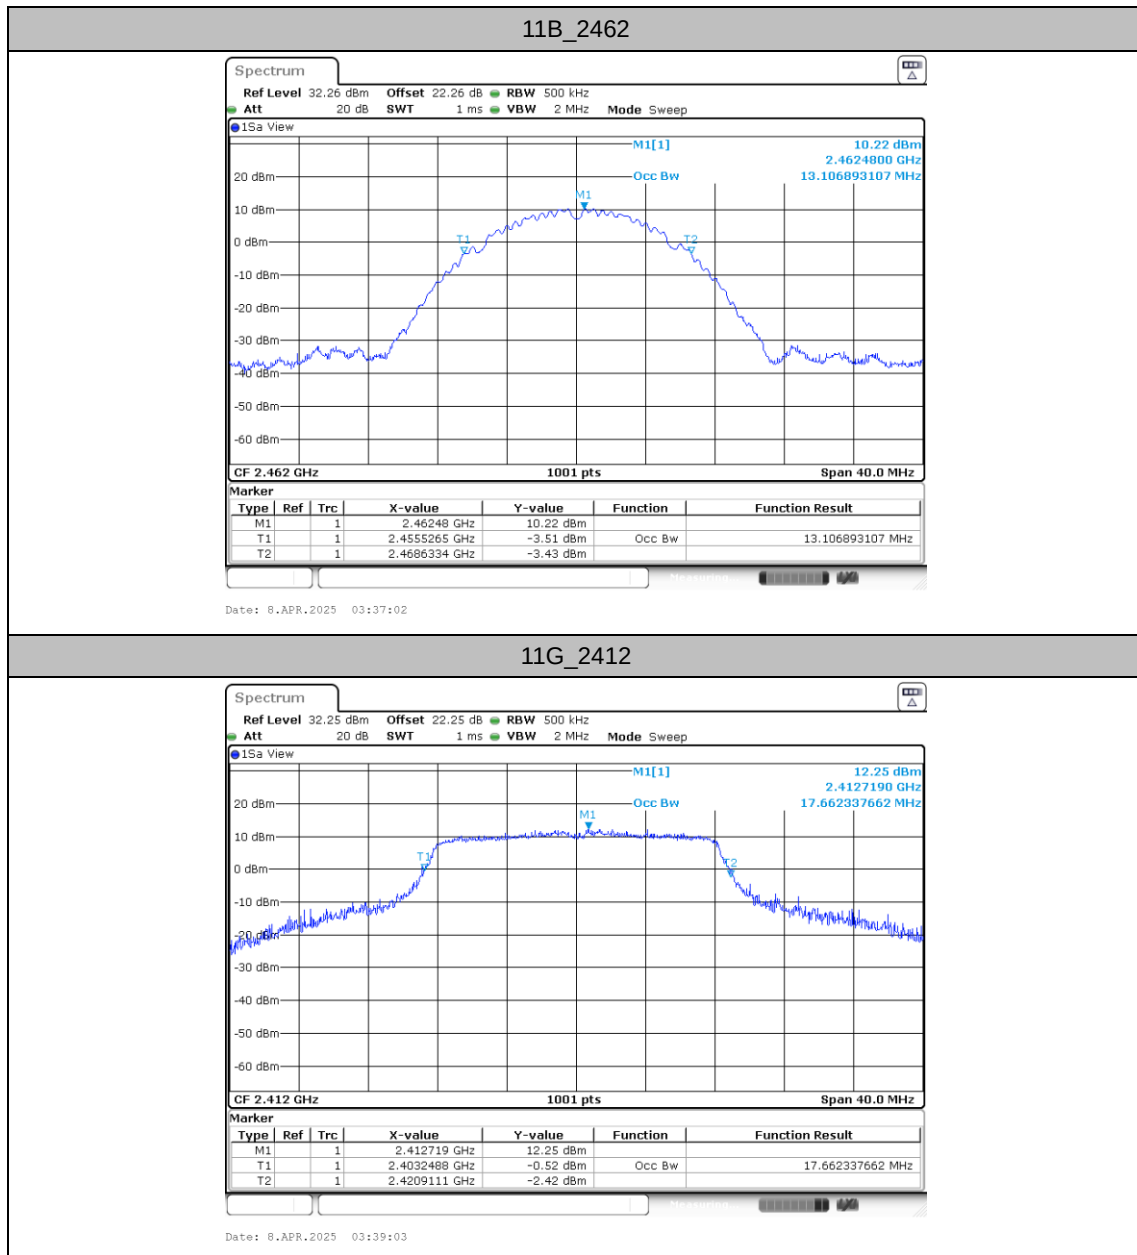


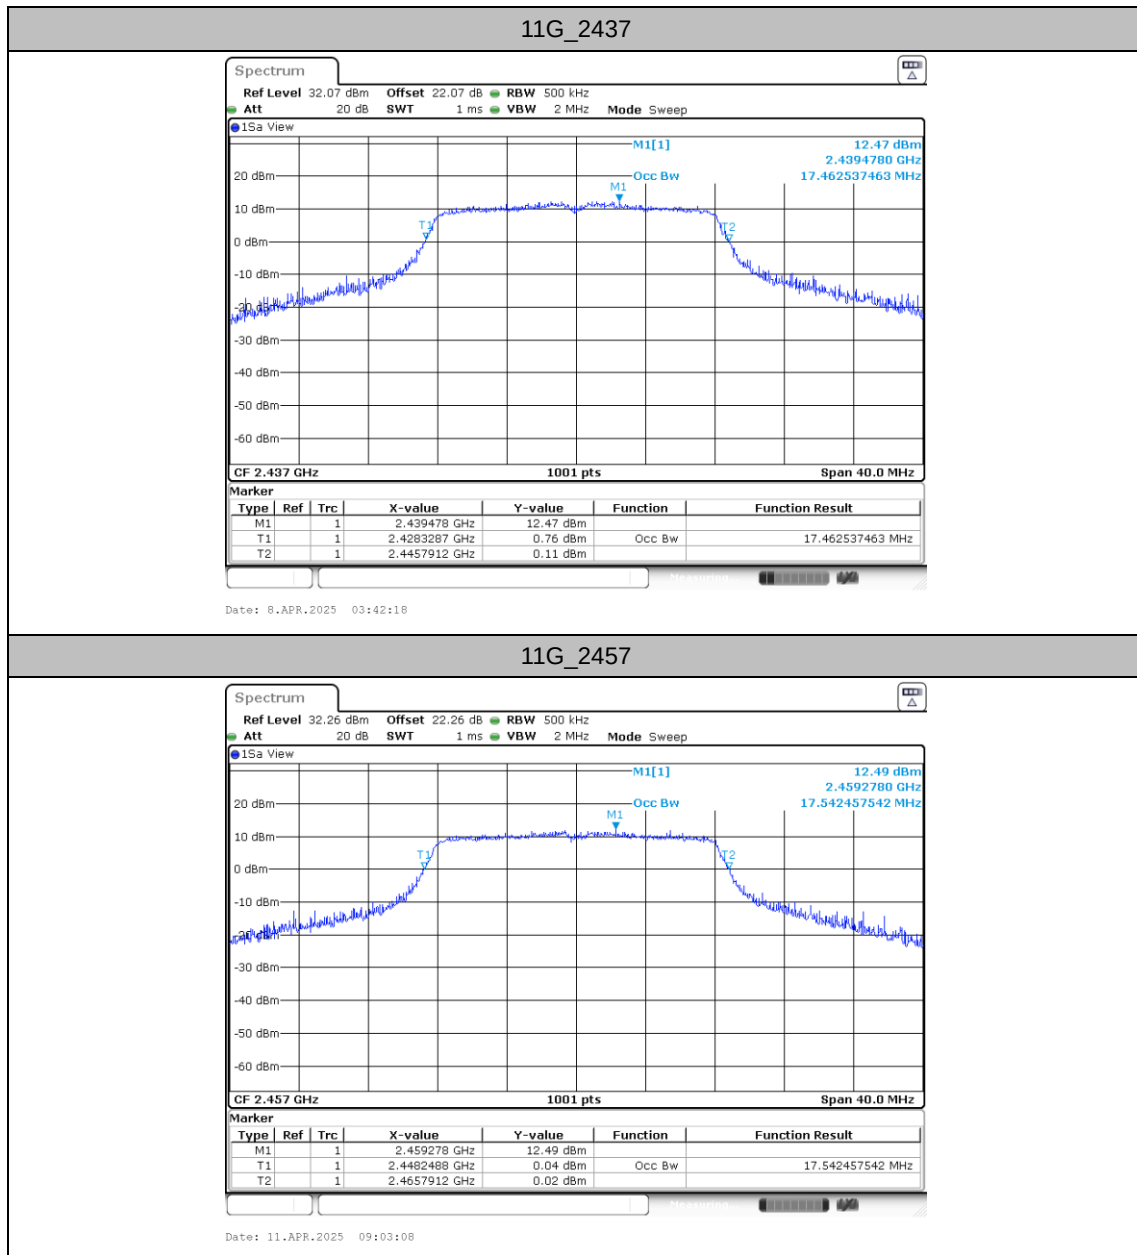


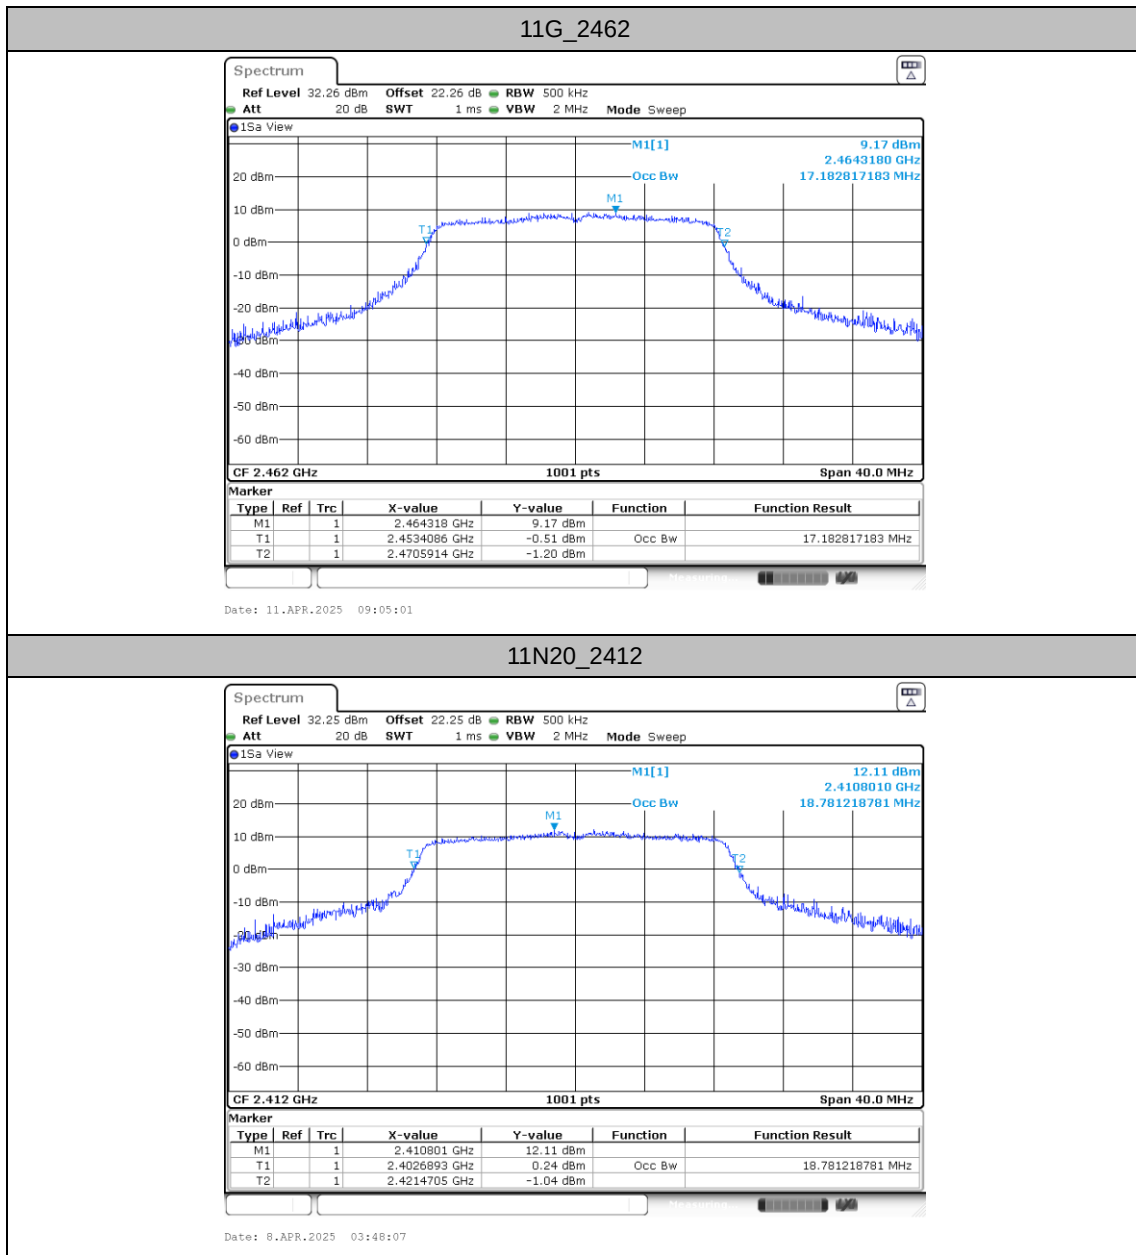


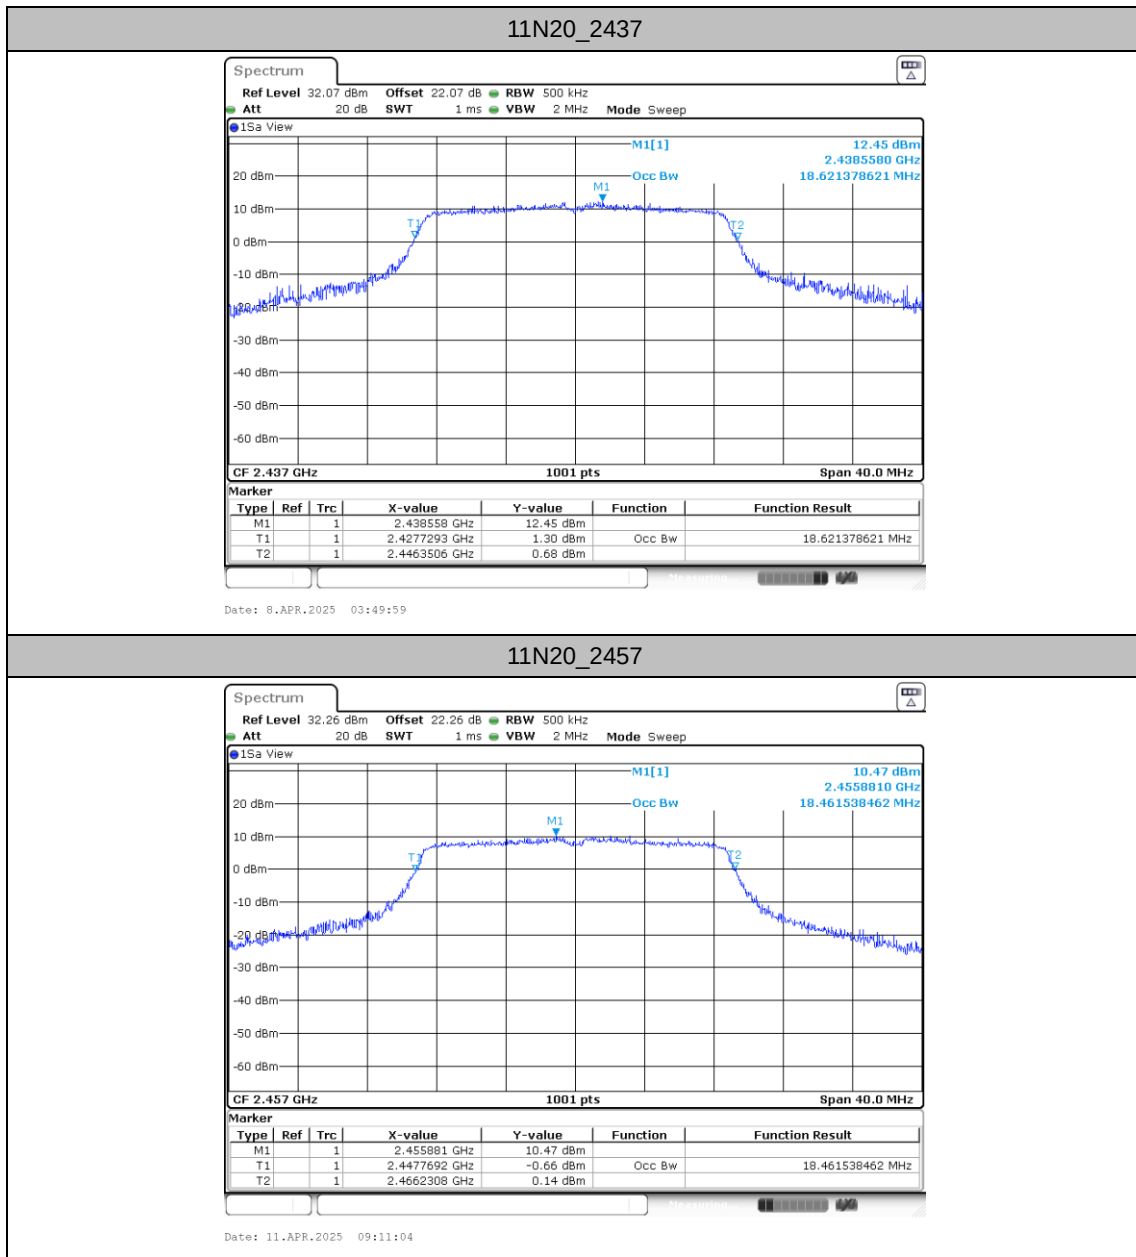


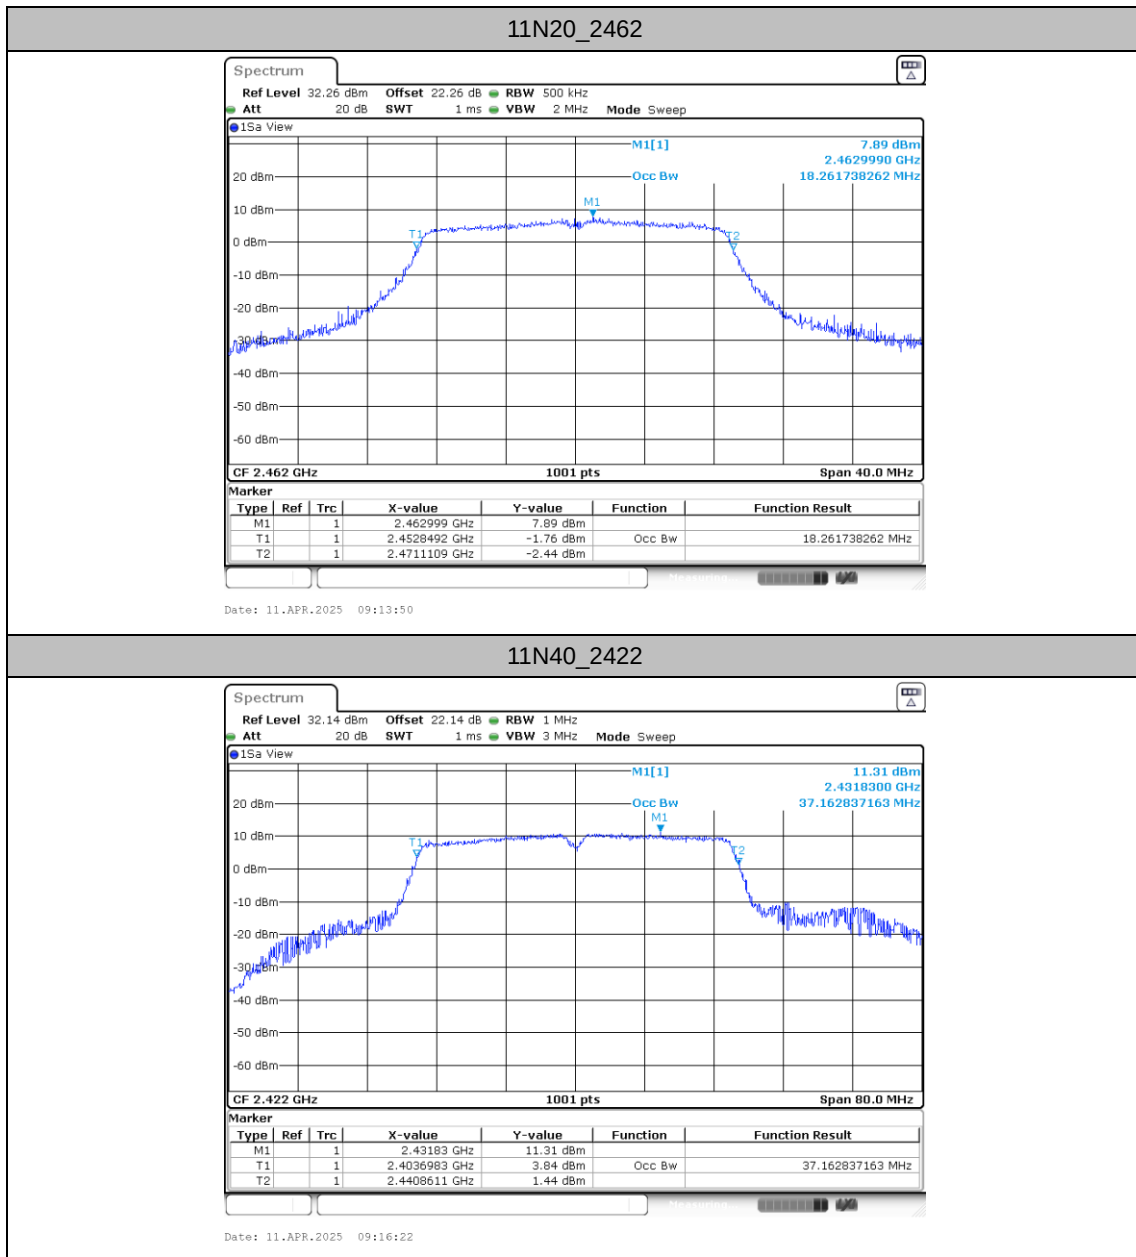


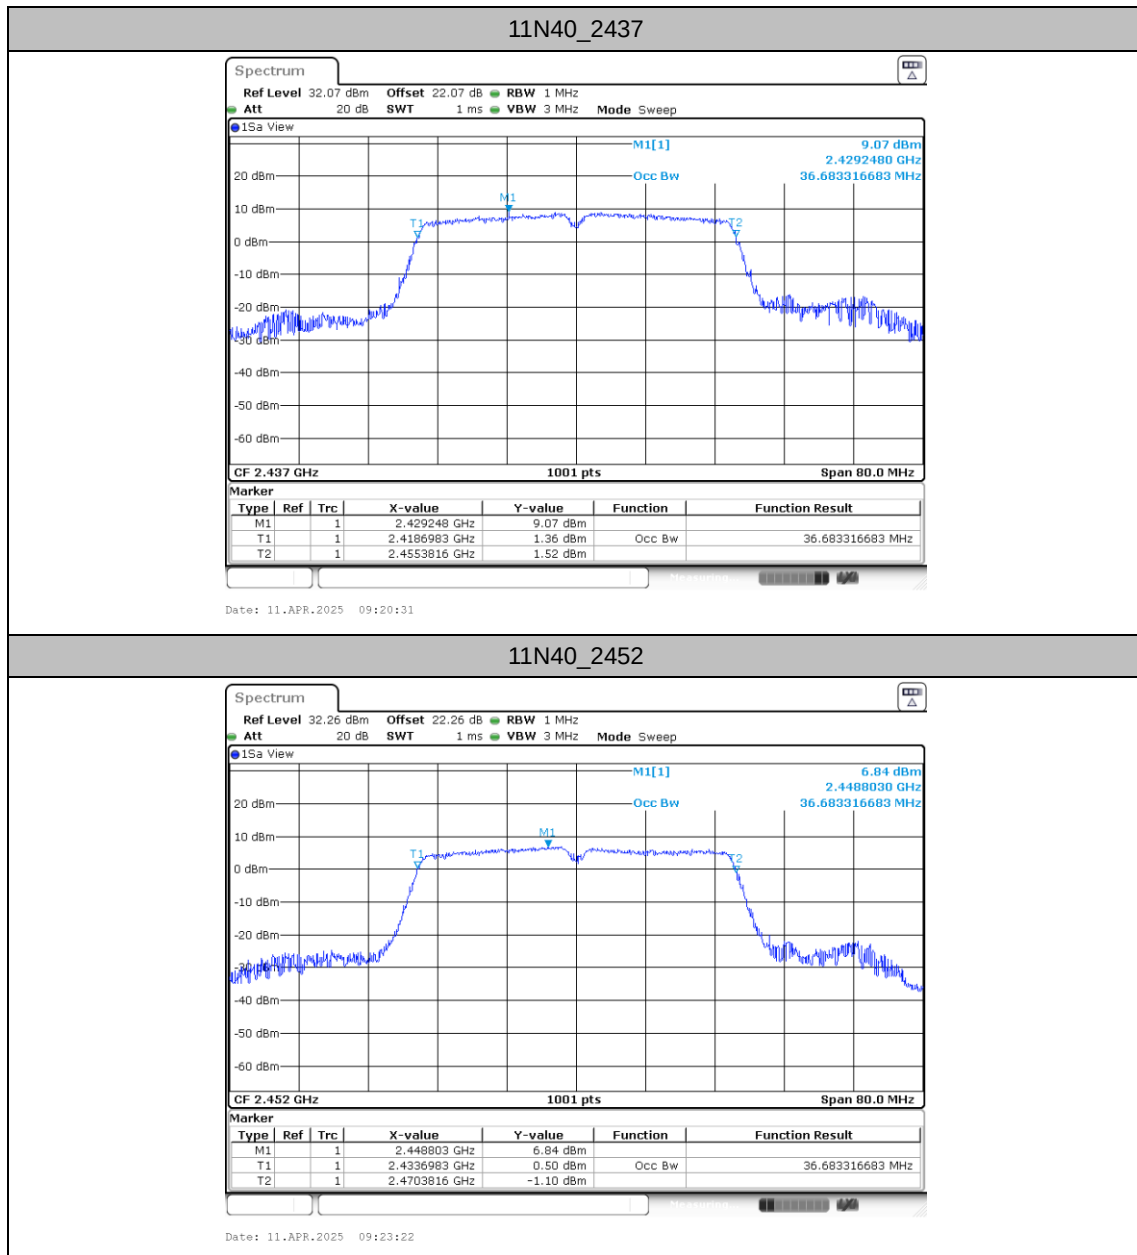

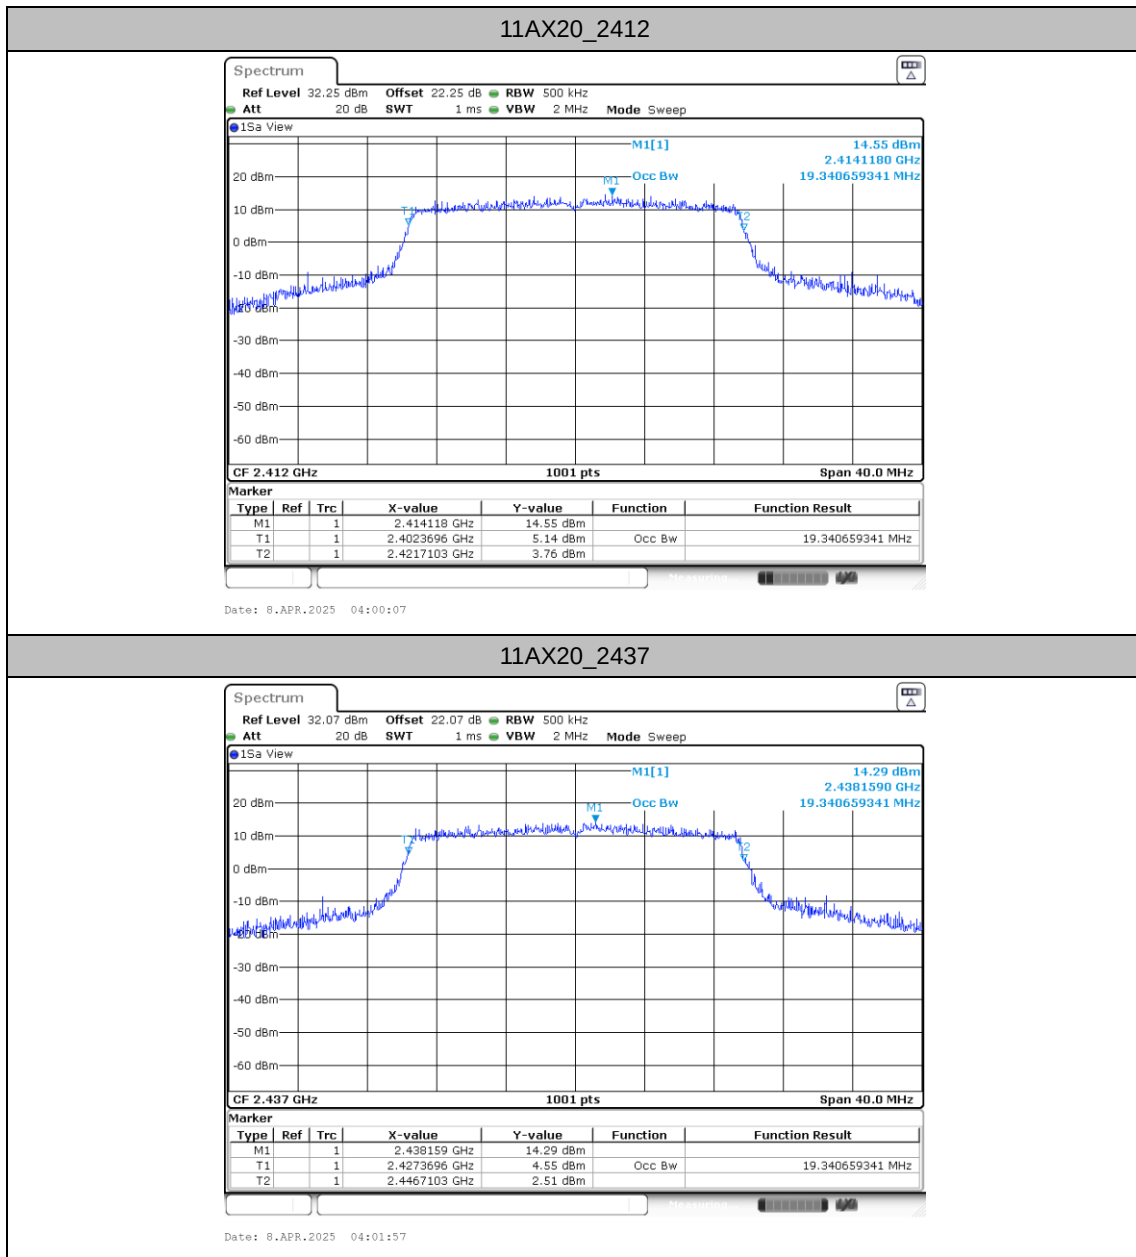

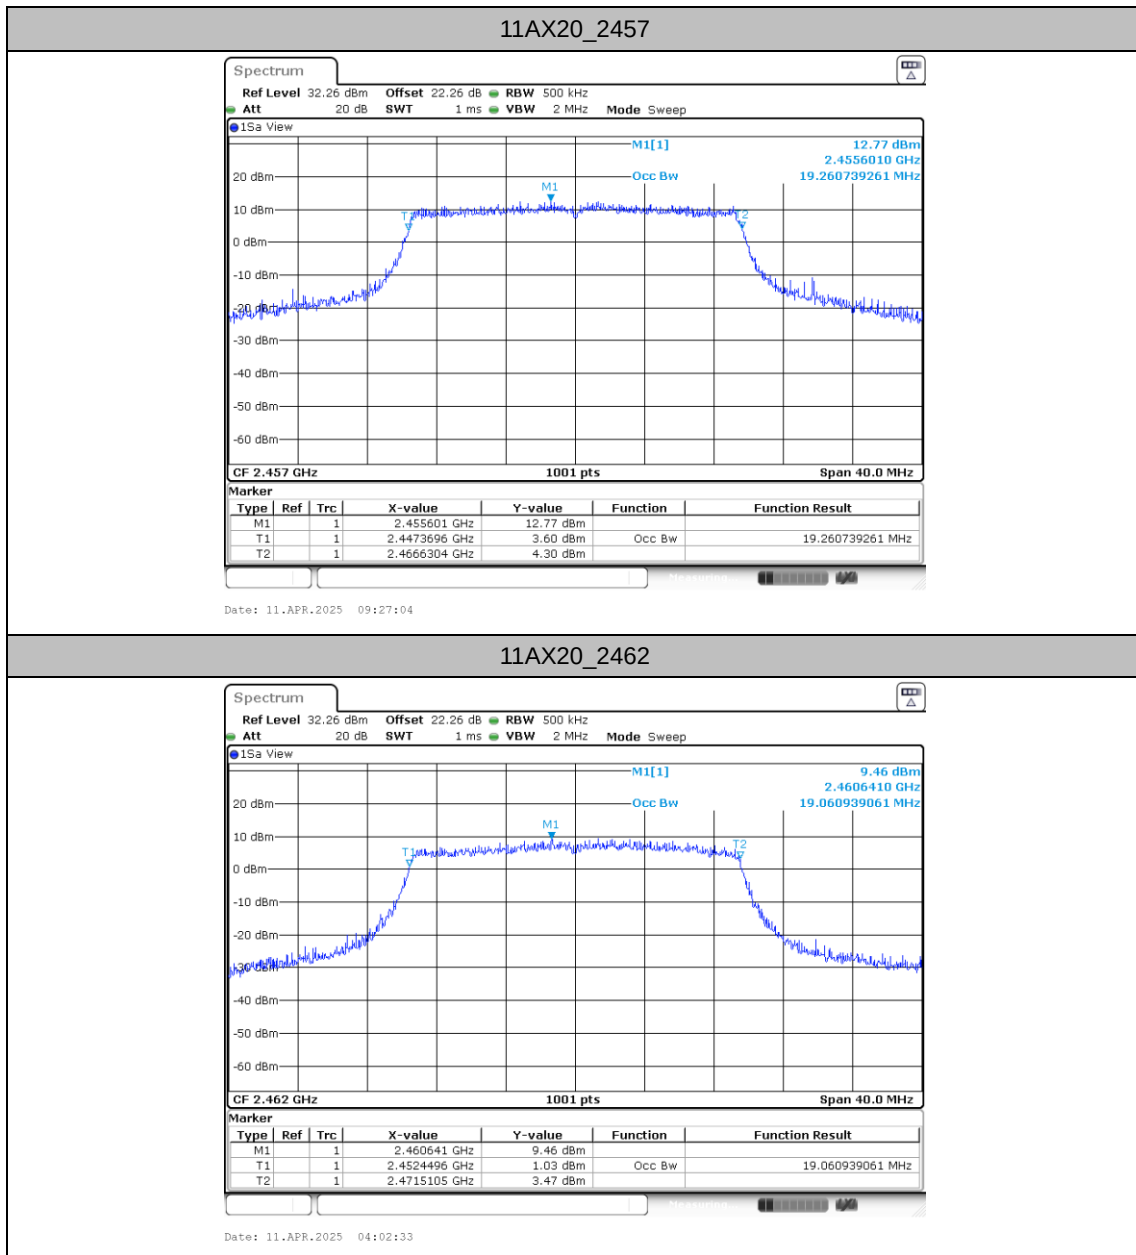

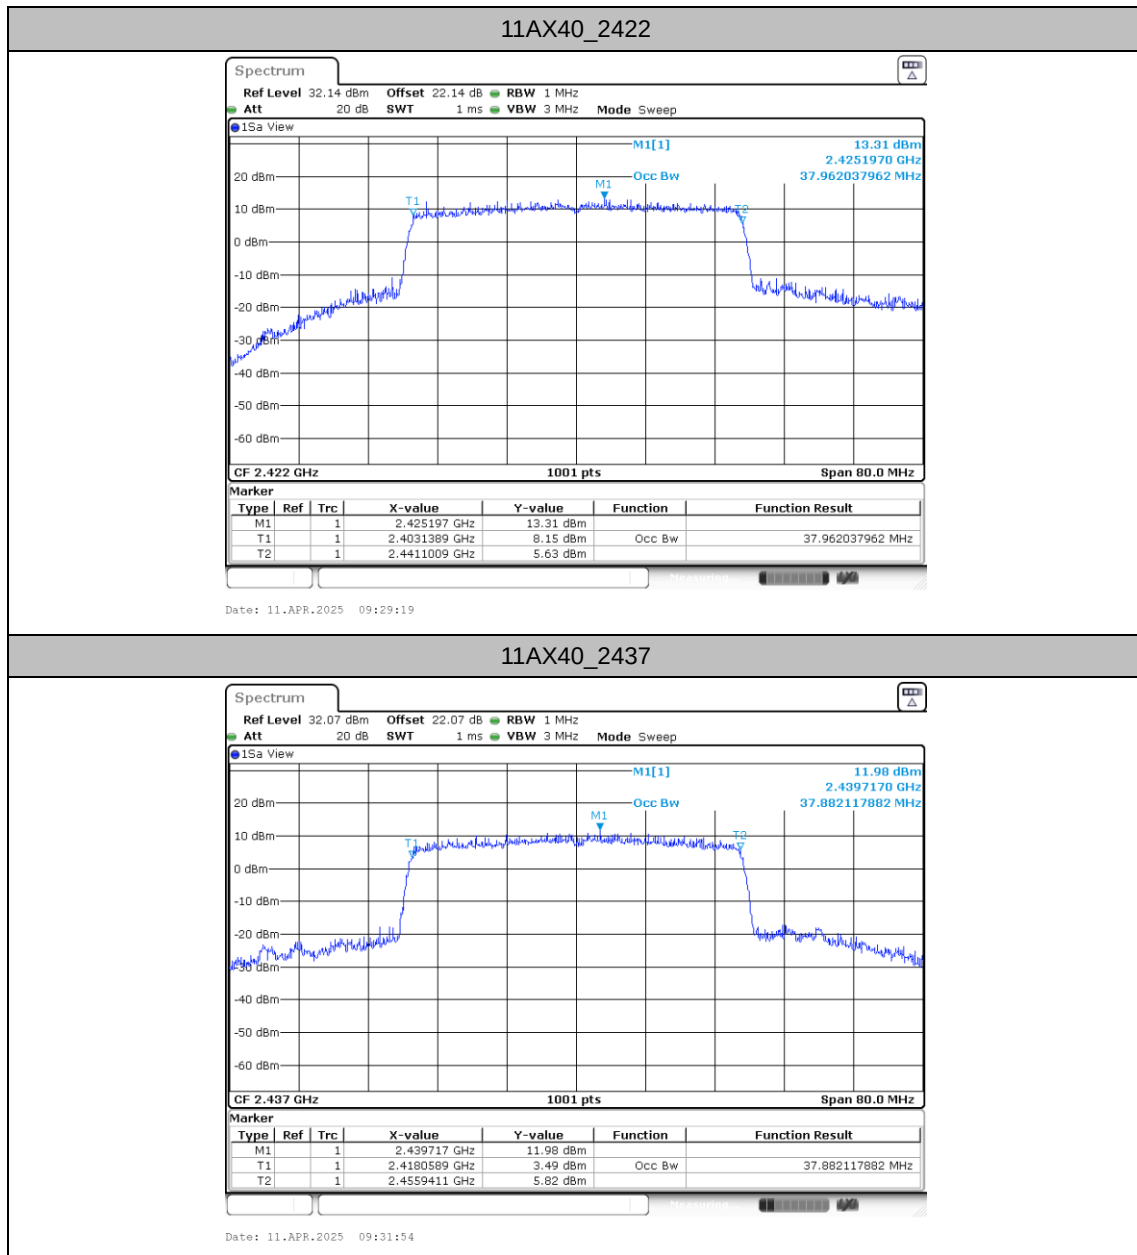

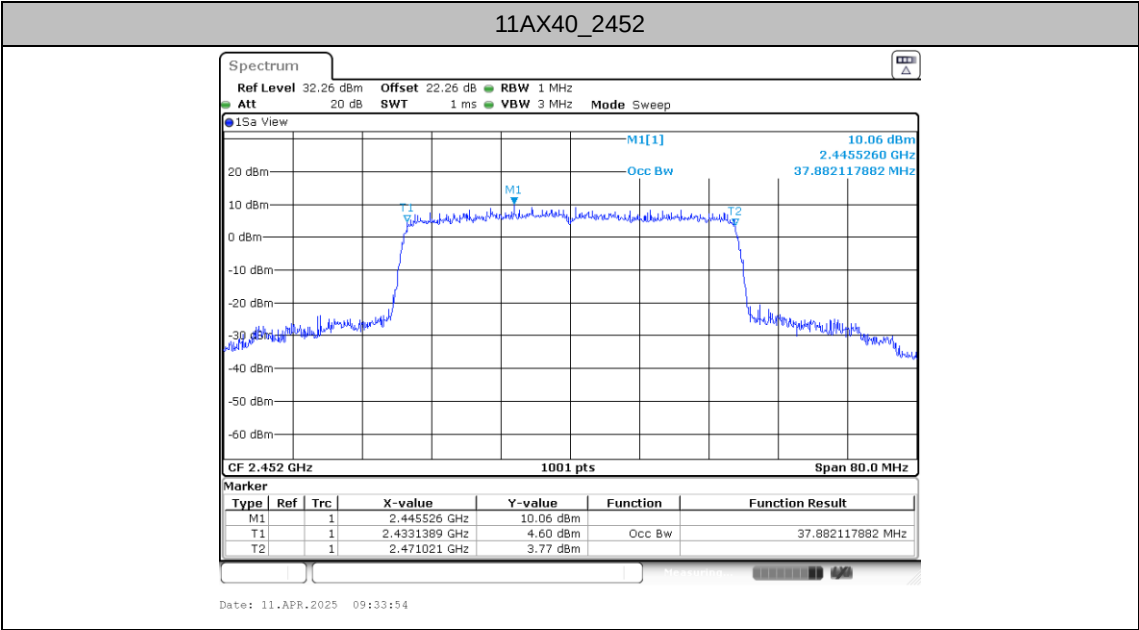




Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant6	2412	-3.59	≤8.00	PASS
		2437	-3.39	≤8.00	PASS
		2462	-4.10	≤8.00	PASS
11G	Ant6	2412	-6.01	≤8.00	PASS
		2437	-6.18	≤8.00	PASS
		2457	-6.68	≤8.00	PASS
		2462	-9.47	≤8.00	PASS
11N20	Ant6	2412	-6.42	≤8.00	PASS
		2437	-6.26	≤8.00	PASS
		2457	-8.82	≤8.00	PASS
		2462	-11.20	≤8.00	PASS
11N40	Ant6	2422	-11.07	≤8.00	PASS
		2437	-13.76	≤8.00	PASS
		2452	-15.84	≤8.00	PASS
11AX20	Ant6	2412	-7.83	≤8.00	PASS
		2437	-7.74	≤8.00	PASS
		2457	-9.43	≤8.00	PASS
		2462	-11.50	≤8.00	PASS
11AX40	Ant6	2422	-11.78	≤8.00	PASS
		2437	-13.42	≤8.00	PASS
		2452	-16.19	≤8.00	PASS





Test Graphs

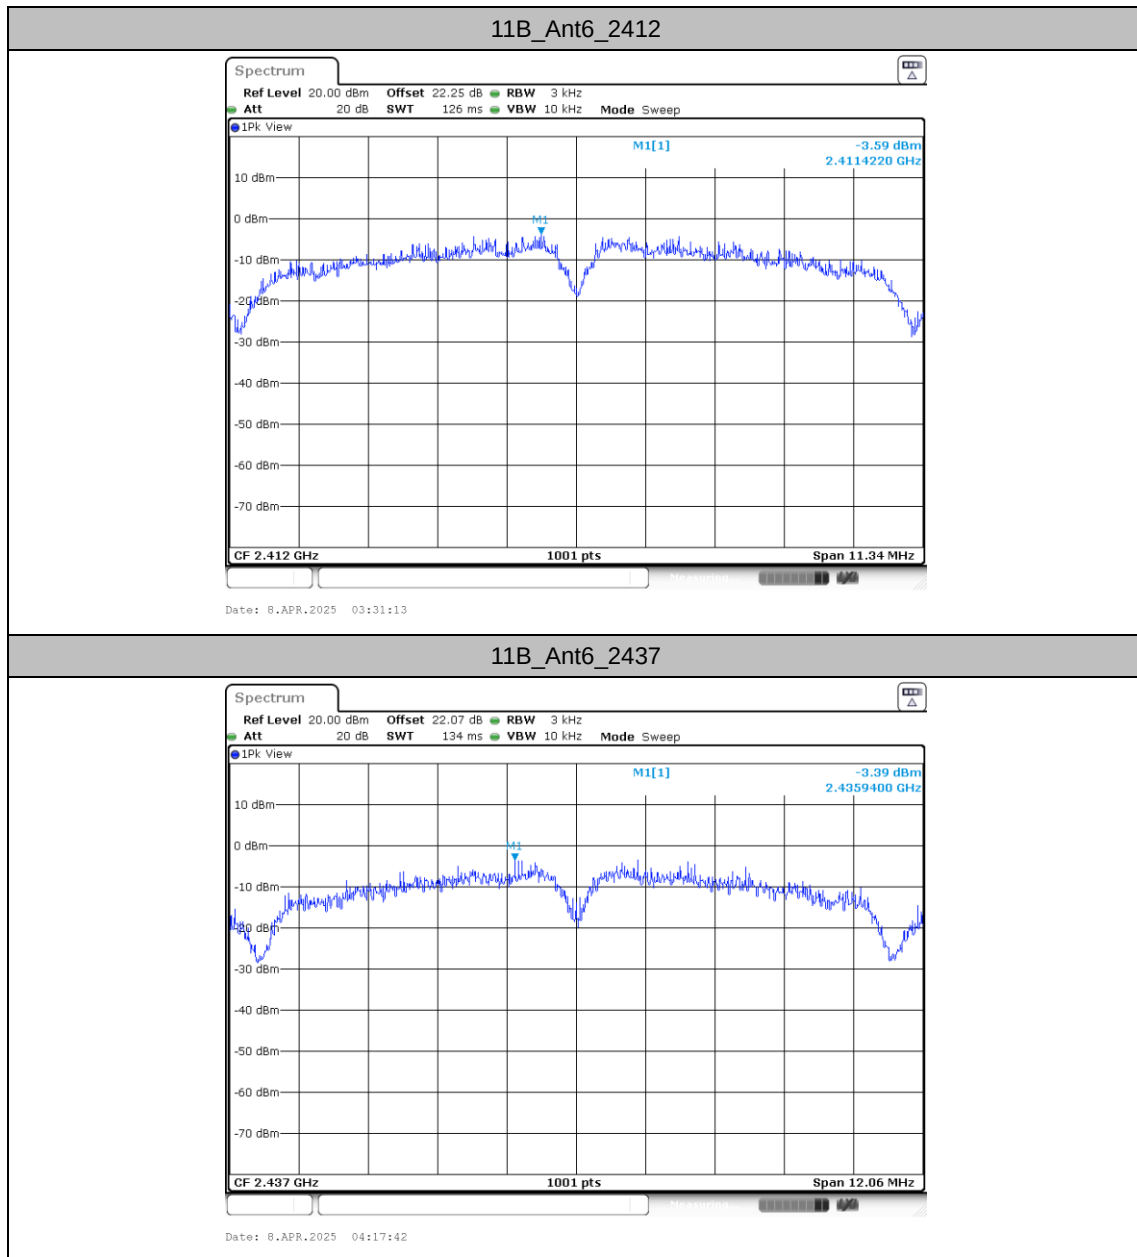

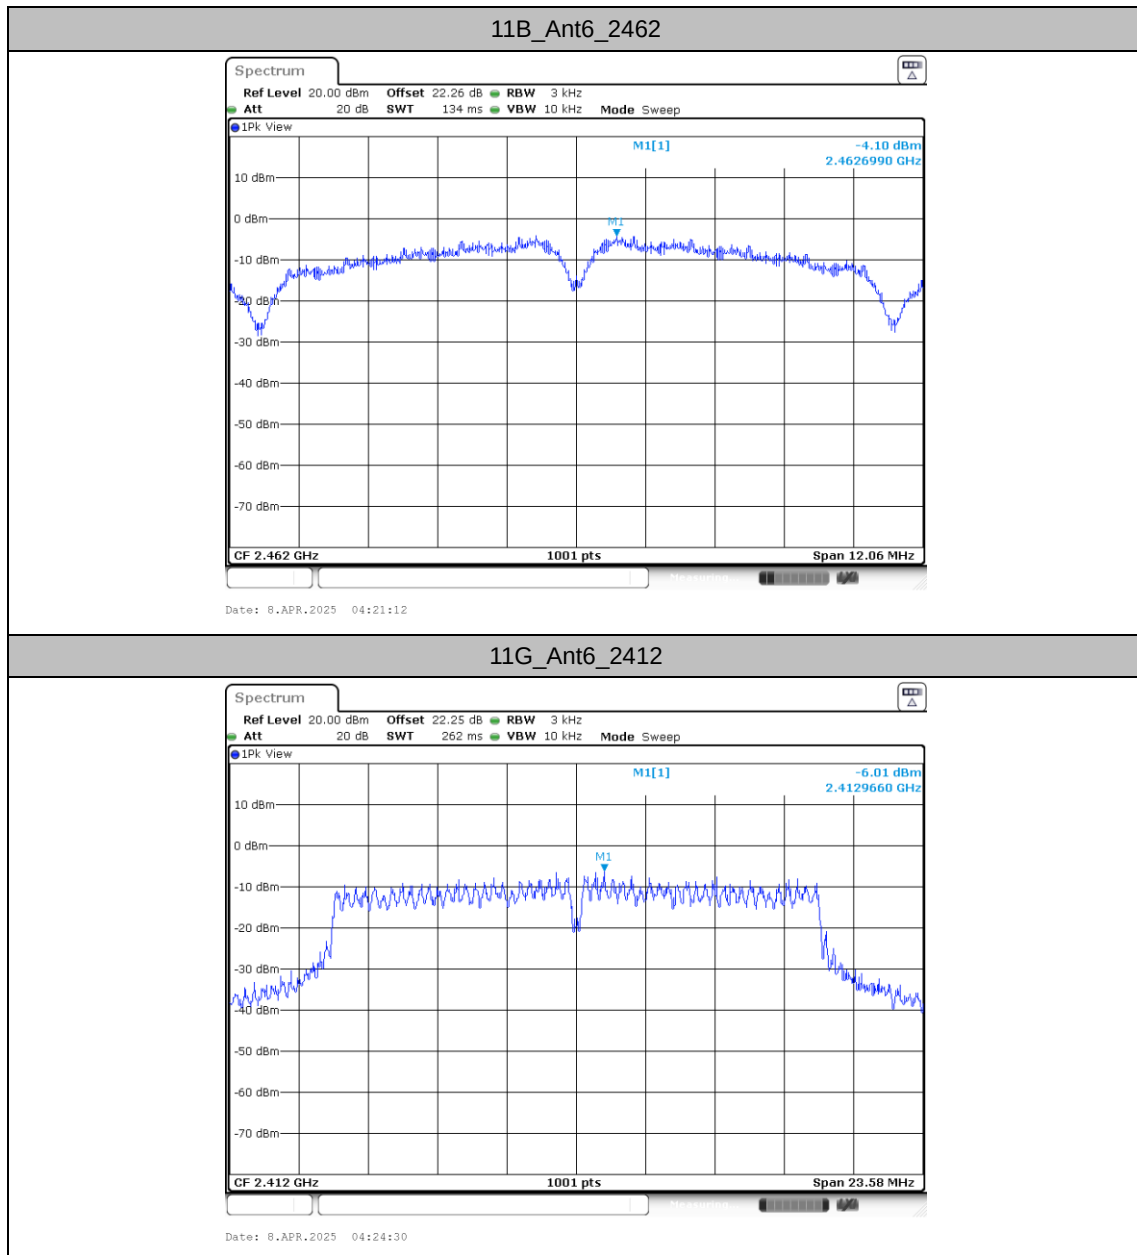

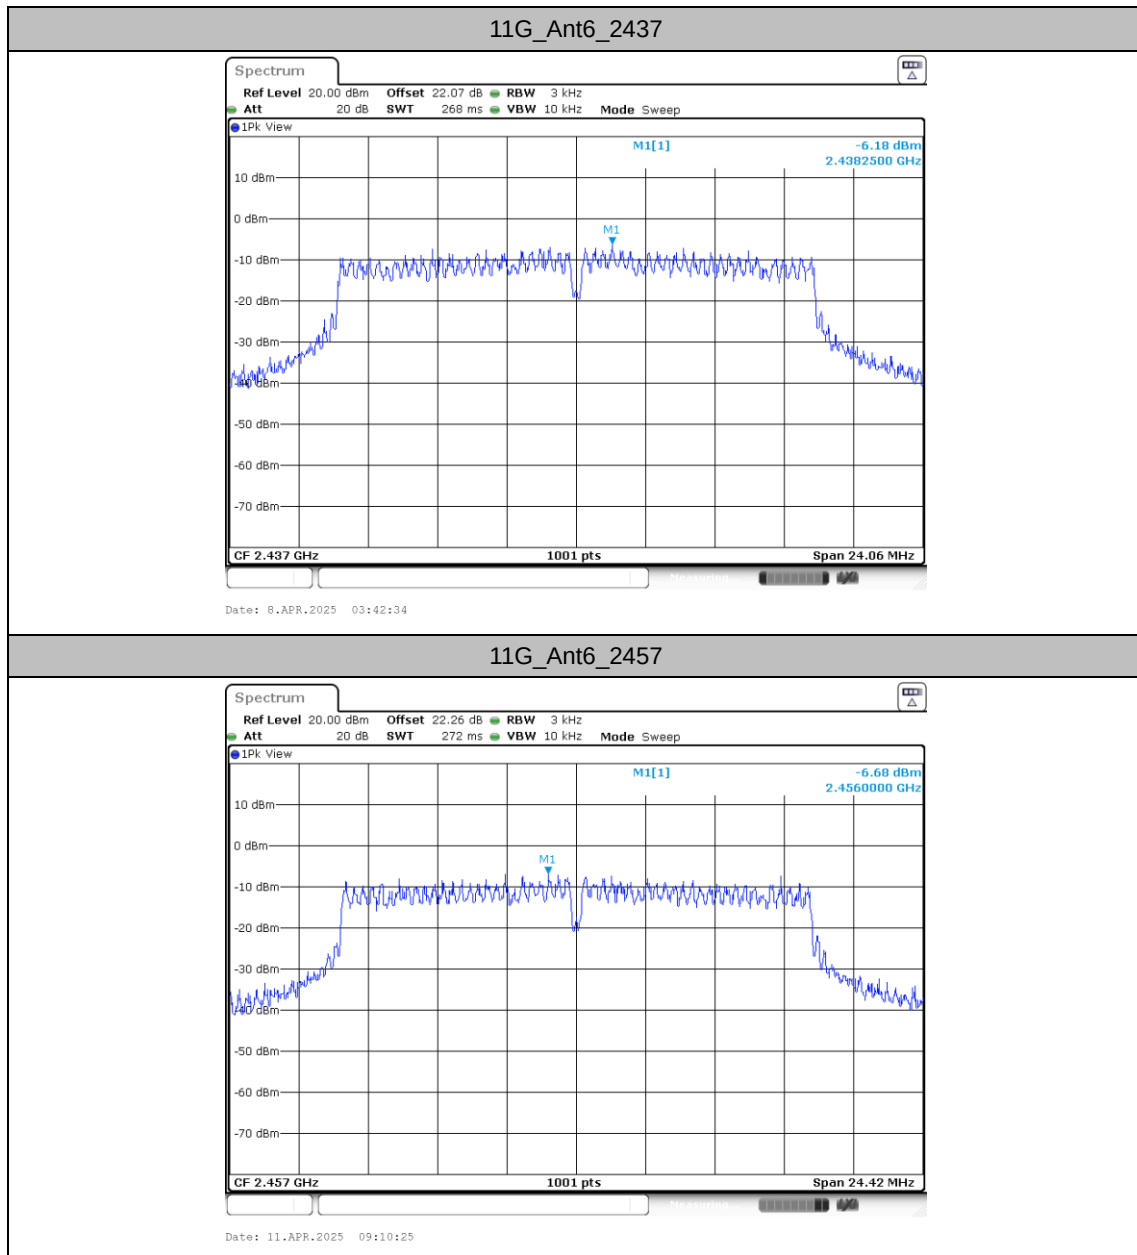


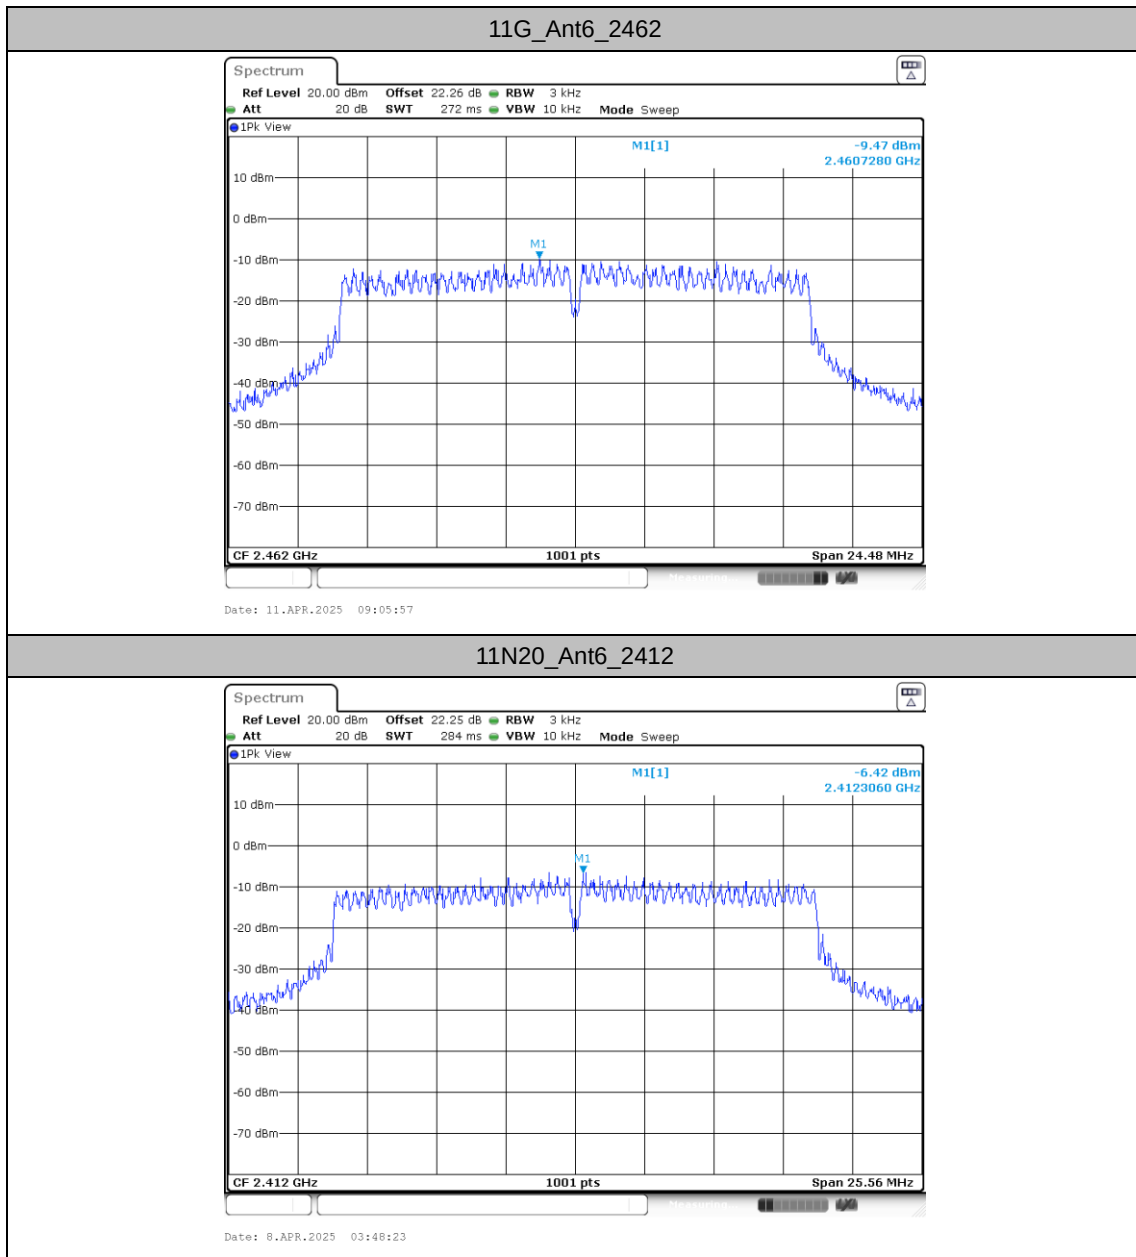

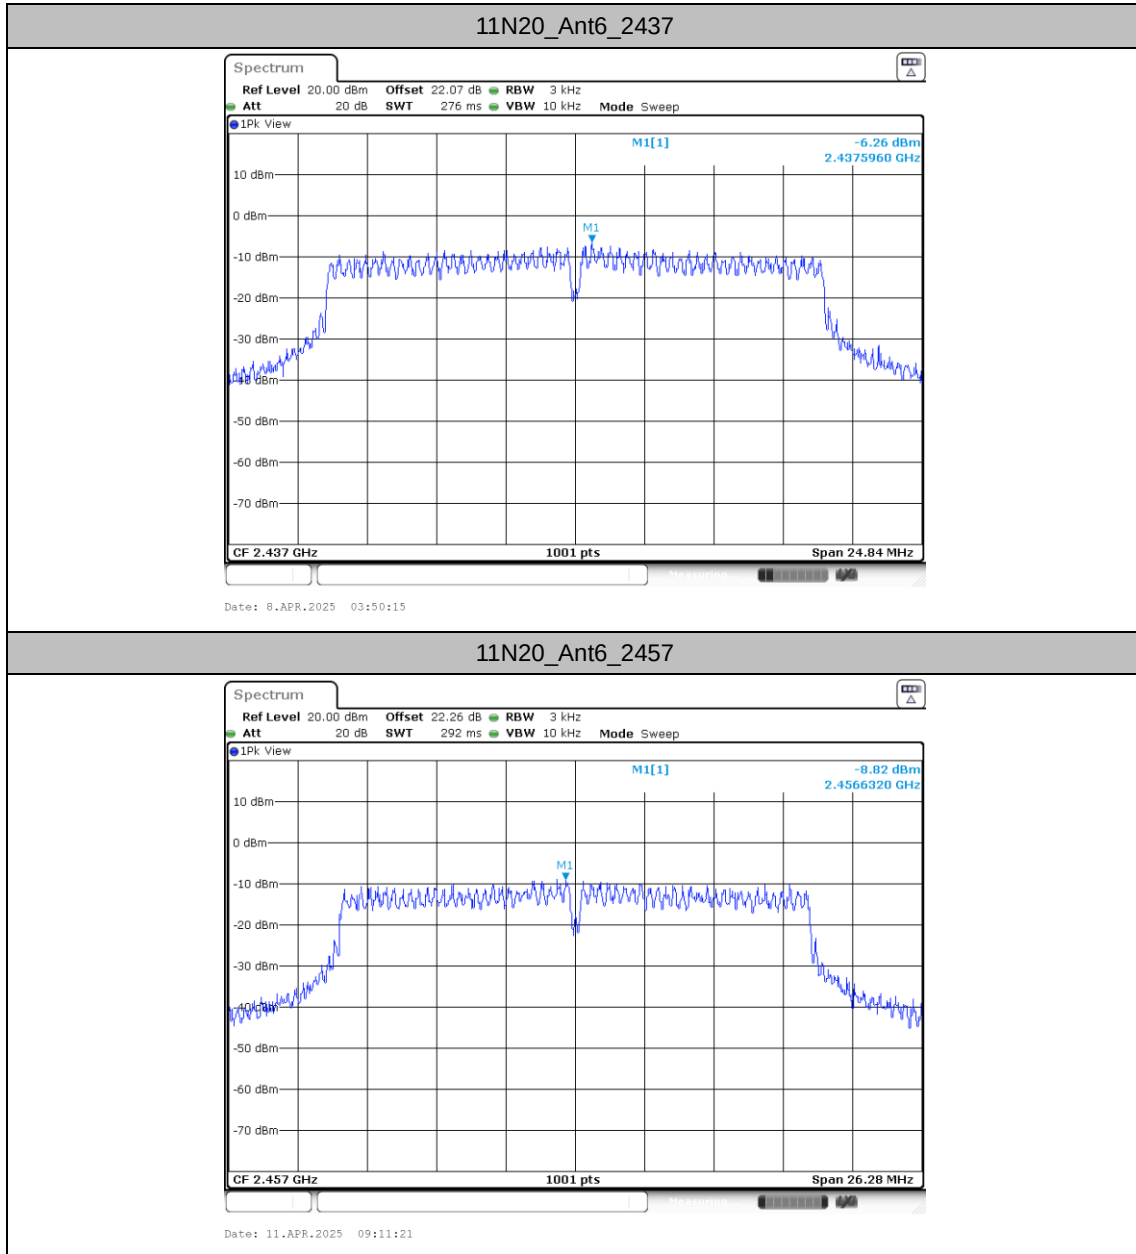






11N20_Ant6_2462

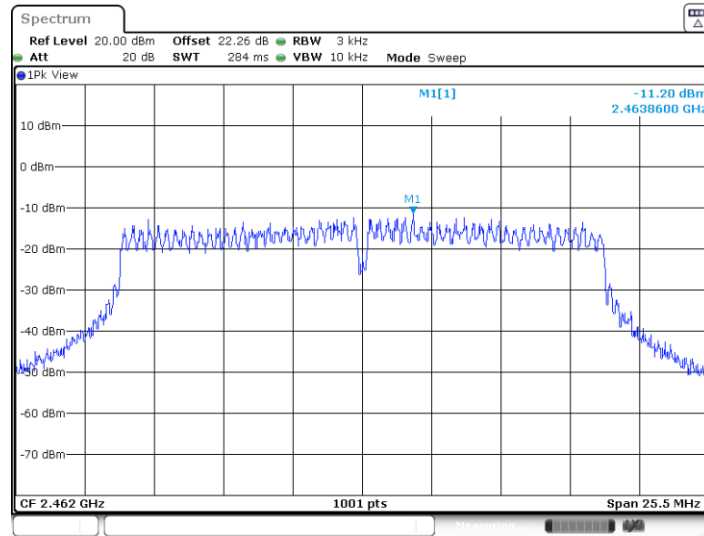

11N40_Ant6_2422

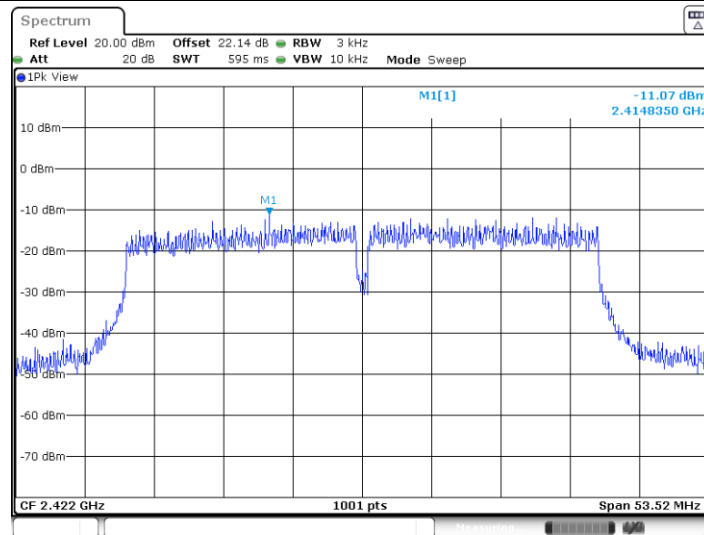


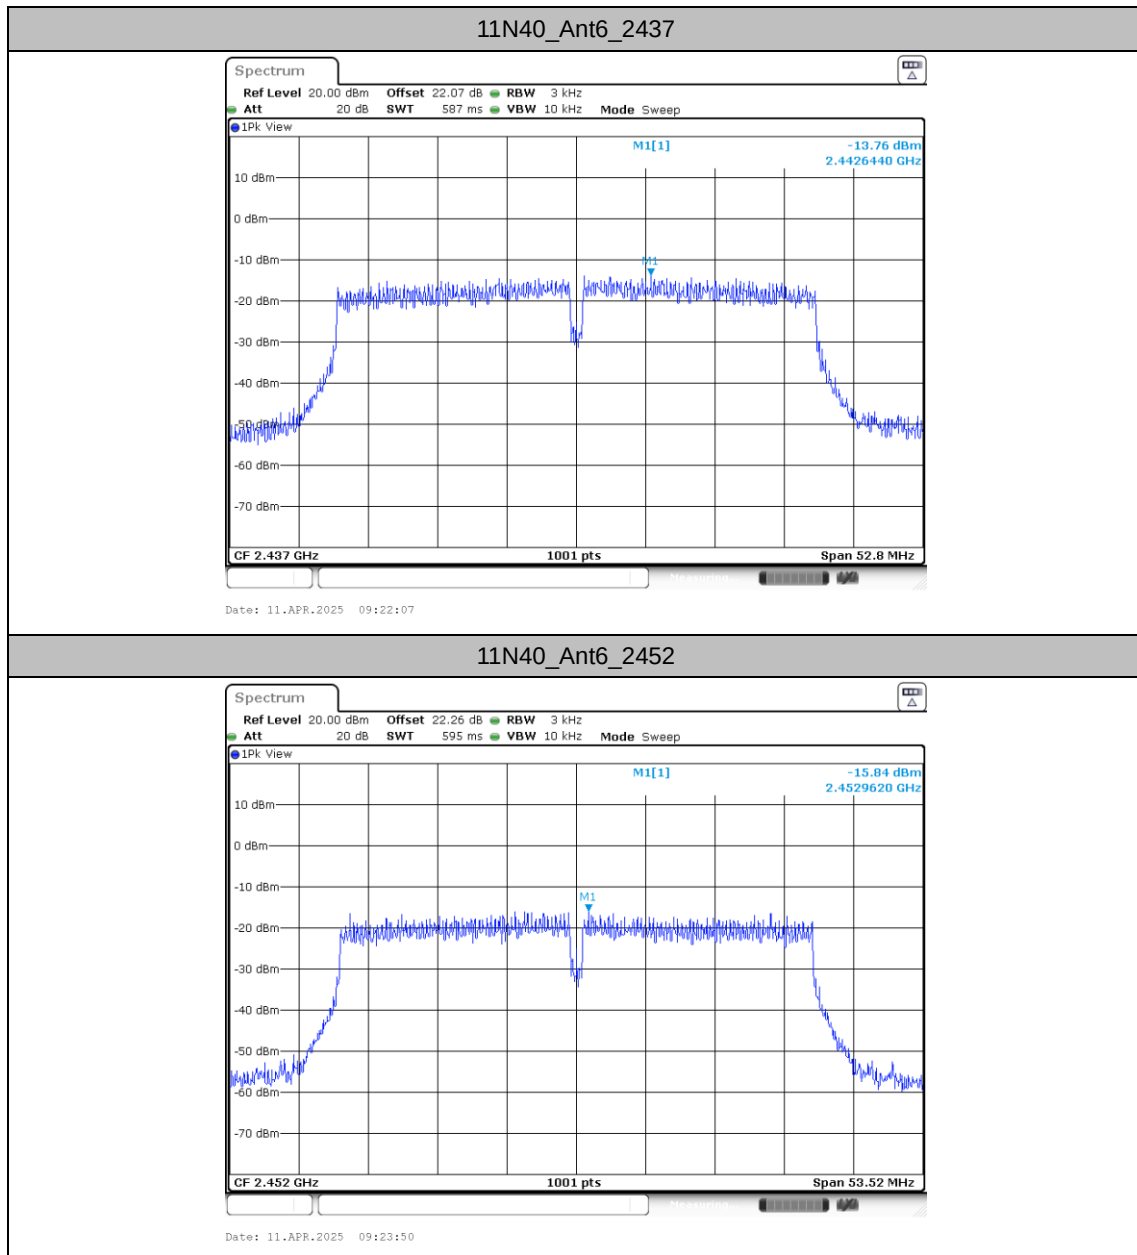

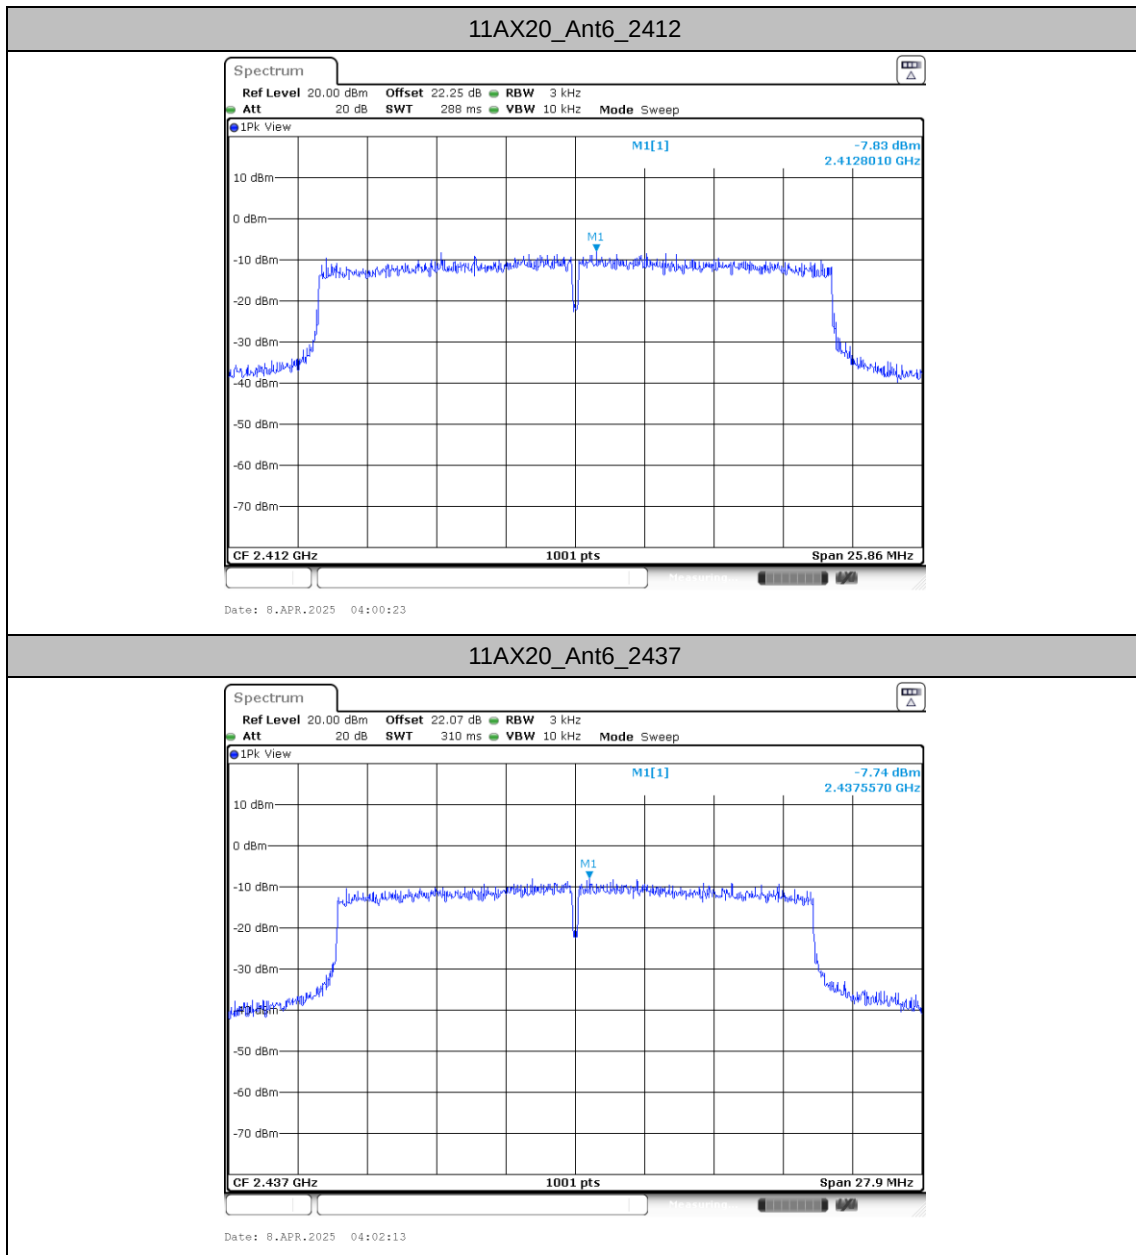




11AX20_Ant6_2457

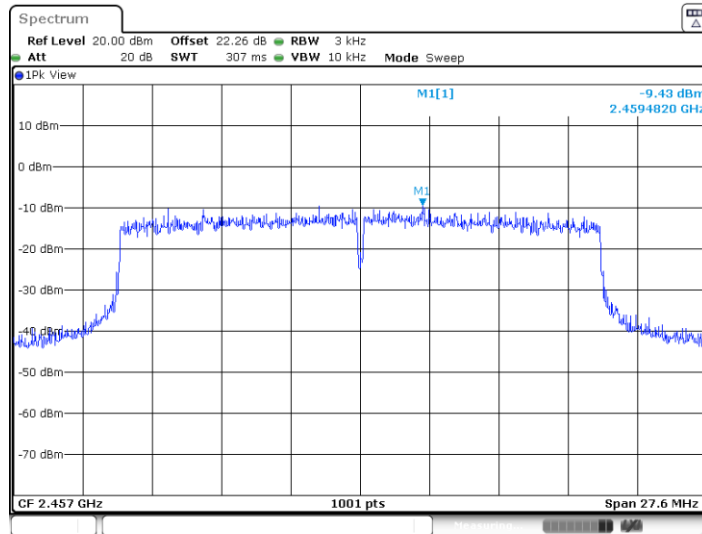

Date: 11.APR.2025 09:27:23

11AX20_Ant6_2462

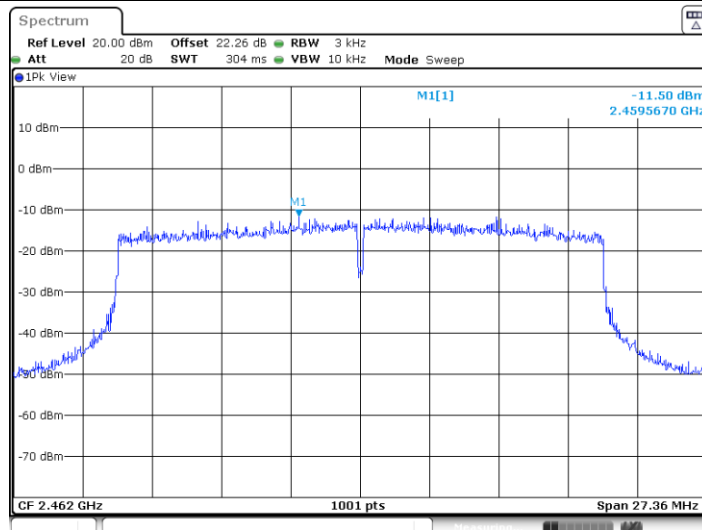

Date: 11.APR.2025 04:04:38

