




Appendix B. AC Conducted Emission Test Results

Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

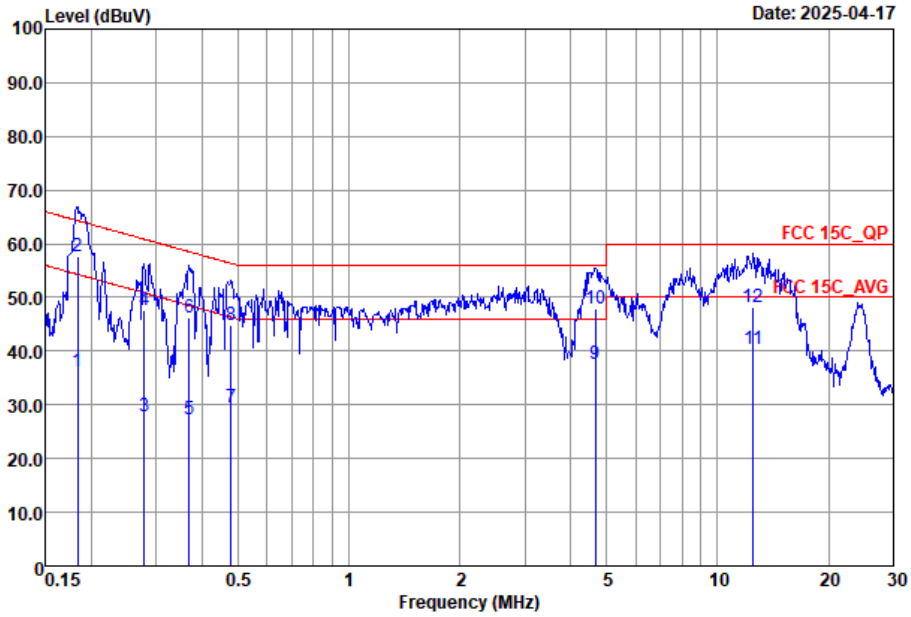


Site : C002-SZ
 Condition : FCC 15C_QP LISN_2025-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	36.28	-18.05	54.33	16.41	9.69	10.18	Average
2 *	0.18	57.58	-6.75	64.33	37.71	9.69	10.18	QP
3	0.28	27.95	-22.90	50.85	8.01	9.74	10.20	Average
4	0.28	47.55	-13.30	60.85	27.61	9.74	10.20	QP
5	0.37	27.24	-21.28	48.52	7.30	9.72	10.22	Average
6	0.37	46.24	-12.28	58.52	26.30	9.72	10.22	QP
7	0.48	29.42	-16.94	46.36	9.49	9.69	10.24	Average
8	0.48	44.92	-11.44	56.36	24.99	9.69	10.24	QP
9	4.67	37.72	-8.28	46.00	17.80	9.65	10.27	Average
10	4.67	48.02	-7.98	56.00	28.10	9.65	10.27	QP
11	12.52	40.37	-9.63	50.00	20.50	9.64	10.23	Average
12	12.52	48.27	-11.73	60.00	28.40	9.64	10.23	QP



Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

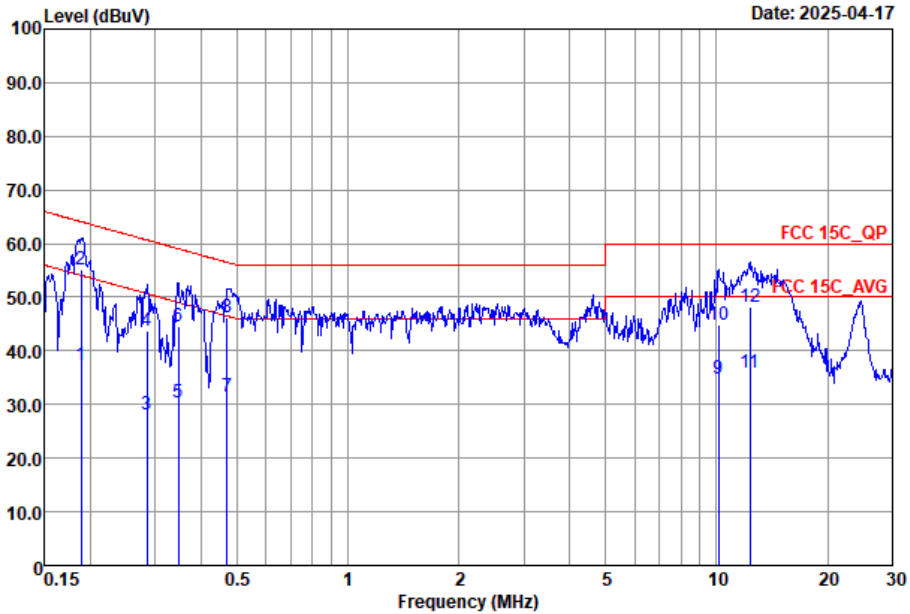

Site : CO02-SZ
 Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.19	37.21	-16.85	54.06	17.20	9.83	10.18	Average
2 *	0.19	55.11	-8.95	64.06	35.10	9.83	10.18	QP
3	0.28	28.10	-22.58	50.68	8.10	9.80	10.20	Average
4	0.28	43.80	-16.88	60.68	23.80	9.80	10.20	QP
5	0.35	30.30	-18.75	49.05	10.49	9.59	10.22	Average
6	0.35	44.60	-14.45	59.05	24.79	9.59	10.22	QP
7	0.47	31.35	-15.14	46.49	11.09	10.02	10.24	Average
8	0.47	46.25	-10.24	56.49	25.99	10.02	10.24	QP
9	10.13	34.80	-15.20	50.00	15.00	9.62	10.18	Average
10	10.13	44.80	-15.20	60.00	25.00	9.62	10.18	QP
11	12.32	35.99	-14.01	50.00	16.09	9.67	10.23	Average
12	12.32	48.29	-11.71	60.00	28.39	9.67	10.23	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Relative Humidity :	50%
		Temperature :	20-24°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	1DH5	-	-
Mode 2	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	1DH5	-	-
Mode 3	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1DH5	-	-
Mode 4	2400-2483.5	6	Bluetooth BR_GFSK_LF	78	2480	1DH5	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2387.46	43.06	74.00	-30.94	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	44.51	74.00	-29.49	H	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	45.29	74.00	-28.71	H	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2484.31	46.35	74.00	-27.65	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	45.17	74.00	-28.83	H	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK_LF	78	141.55	29.03	43.50	-14.47	V	Peak	Pass	LF



Mode	1																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.46</td> <td>43.06</td> <td>74.00</td> <td>-30.94</td> <td>41.55</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>136</td> <td>32</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2387.46</td> <td>18.27</td> <td>54.00</td> <td>-35.73</td> <td>16.76</td> <td>30.43</td> <td>4.79</td> <td>33.71</td> <td>136</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.46	43.06	74.00	-30.94	41.55	30.43	4.79	33.71	136	32	PEAK	2	2387.46	18.27	54.00	-35.73	16.76	30.43	4.79	33.71	136	32	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>101.83</td> <td>-----</td> <td>-----</td> <td>100.26</td> <td>30.44</td> <td>4.81</td> <td>33.68</td> <td>136</td> <td>32</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>77.04</td> <td>54.00</td> <td>23.04</td> <td>75.47</td> <td>30.44</td> <td>4.81</td> <td>33.68</td> <td>136</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.83	-----	-----	100.26	30.44	4.81	33.68	136	32	PEAK	2	2402.00	77.04	54.00	23.04	75.47	30.44	4.81	33.68	136	32	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2387.46	43.06	74.00	-30.94	41.55	30.43	4.79	33.71	136	32	PEAK																																																																																																	
2	2387.46	18.27	54.00	-35.73	16.76	30.43	4.79	33.71	136	32	AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2402.00	101.83	-----	-----	100.26	30.44	4.81	33.68	136	32	PEAK																																																																																																	
2	2402.00	77.04	54.00	23.04	75.47	30.44	4.81	33.68	136	32	AVERAGE																																																																																																	



Mode	1																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2343.30</td> <td>42.82</td> <td>74.00</td> <td>-31.18</td> <td>41.45</td> <td>30.41</td> <td>4.75</td> <td>33.79</td> <td>207</td> <td>203</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2343.30</td> <td>18.03</td> <td>74.00</td> <td>-55.97</td> <td>16.66</td> <td>30.41</td> <td>4.75</td> <td>33.79</td> <td>207</td> <td>203</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2343.30	42.82	74.00	-31.18	41.45	30.41	4.75	33.79	207	203	PEAK	2	2343.30	18.03	74.00	-55.97	16.66	30.41	4.75	33.79	207	203	Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>98.15</td> <td>74.00</td> <td>-0.64</td> <td>96.58</td> <td>30.44</td> <td>4.81</td> <td>33.68</td> <td>207</td> <td>203</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>73.36</td> <td>74.00</td> <td>-0.64</td> <td>71.79</td> <td>30.44</td> <td>4.81</td> <td>33.68</td> <td>207</td> <td>203</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.15	74.00	-0.64	96.58	30.44	4.81	33.68	207	203	PEAK	2	2402.00	73.36	74.00	-0.64	71.79	30.44	4.81	33.68	207	203	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2343.30	42.82	74.00	-31.18	41.45	30.41	4.75	33.79	207	203	PEAK																																																																																																	
2	2343.30	18.03	74.00	-55.97	16.66	30.41	4.75	33.79	207	203	Average																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2402.00	98.15	74.00	-0.64	96.58	30.44	4.81	33.68	207	203	PEAK																																																																																																	
2	2402.00	73.36	74.00	-0.64	71.79	30.44	4.81	33.68	207	203	Average																																																																																																	



Mode	1																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																									
ANT	6																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>44.51</td> <td>74.00</td> <td>-29.49</td> <td>60.42</td> <td>33.82</td> <td>7.74</td> <td>57.47</td> <td>--</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>19.72</td> <td>54.00</td> <td>-34.28</td> <td>35.63</td> <td>33.82</td> <td>7.74</td> <td>57.47</td> <td>--</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg					1	4804.00	44.51	74.00	-29.49	60.42	33.82	7.74	57.47	--	--	--	Peak	2	4804.00	19.72	54.00	-34.28	35.63	33.82	7.74	57.47	--	--	--	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.08</td> <td>74.00</td> <td>-30.92</td> <td>58.99</td> <td>33.82</td> <td>7.74</td> <td>57.47</td> <td>--</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>18.29</td> <td>54.00</td> <td>-35.71</td> <td>34.20</td> <td>33.82</td> <td>7.74</td> <td>57.47</td> <td>--</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg					1	4804.00	43.08	74.00	-30.92	58.99	33.82	7.74	57.47	--	--	--	Peak	2	4804.00	18.29	54.00	-35.71	34.20	33.82	7.74	57.47	--	--	--	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	4804.00	44.51	74.00	-29.49	60.42	33.82	7.74	57.47	--	--	--	Peak																																																																																														
2	4804.00	19.72	54.00	-34.28	35.63	33.82	7.74	57.47	--	--	--	Average																																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	4804.00	43.08	74.00	-30.92	58.99	33.82	7.74	57.47	--	--	--	Peak																																																																																														
2	4804.00	18.29	54.00	-35.71	34.20	33.82	7.74	57.47	--	--	--	Average																																																																																														



Mode	2																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																
ANT	6																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg																																																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>43.10</td> <td>74.00</td> <td>-30.90</td> <td>59.00</td> <td>33.85</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>18.31</td> <td>54.00</td> <td>-35.69</td> <td>34.21</td> <td>33.85</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>45.29</td> <td>74.00</td> <td>-28.71</td> <td>58.95</td> <td>36.30</td> <td>8.97</td> <td>58.93</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>20.50</td> <td>54.00</td> <td>-33.50</td> <td>34.16</td> <td>36.30</td> <td>8.97</td> <td>58.93</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4882.00	43.10	74.00	-30.90	59.00	33.85	7.77	57.52	--	Peak	2	4882.00	18.31	54.00	-35.69	34.21	33.85	7.77	57.52	--	Average	3	7323.00	45.29	74.00	-28.71	58.95	36.30	8.97	58.93	--	Peak	4	7323.00	20.50	54.00	-33.50	34.16	36.30	8.97	58.93	--	Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>42.65</td> <td>74.00</td> <td>-31.35</td> <td>58.55</td> <td>33.85</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>17.86</td> <td>54.00</td> <td>-36.14</td> <td>33.76</td> <td>33.85</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>43.85</td> <td>74.00</td> <td>-30.15</td> <td>57.51</td> <td>36.30</td> <td>8.97</td> <td>58.93</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>19.06</td> <td>54.00</td> <td>-34.94</td> <td>32.72</td> <td>36.30</td> <td>8.97</td> <td>58.93</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4882.00	42.65	74.00	-31.35	58.55	33.85	7.77	57.52	--	Peak	2	4882.00	17.86	54.00	-36.14	33.76	33.85	7.77	57.52	--	Average	3	7323.00	43.85	74.00	-30.15	57.51	36.30	8.97	58.93	--	Peak	4	7323.00	19.06	54.00	-34.94	32.72	36.30	8.97	58.93	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																								
1	4882.00	43.10	74.00	-30.90	59.00	33.85	7.77	57.52	--	Peak																																																																																																																																							
2	4882.00	18.31	54.00	-35.69	34.21	33.85	7.77	57.52	--	Average																																																																																																																																							
3	7323.00	45.29	74.00	-28.71	58.95	36.30	8.97	58.93	--	Peak																																																																																																																																							
4	7323.00	20.50	54.00	-33.50	34.16	36.30	8.97	58.93	--	Average																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																								
1	4882.00	42.65	74.00	-31.35	58.55	33.85	7.77	57.52	--	Peak																																																																																																																																							
2	4882.00	17.86	54.00	-36.14	33.76	33.85	7.77	57.52	--	Average																																																																																																																																							
3	7323.00	43.85	74.00	-30.15	57.51	36.30	8.97	58.93	--	Peak																																																																																																																																							
4	7323.00	19.06	54.00	-34.94	32.72	36.30	8.97	58.93	--	Average																																																																																																																																							



Mode	3																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.31</td> <td>46.35</td> <td>74.00</td> <td>-27.65</td> <td>44.47</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>373</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2484.31</td> <td>21.56</td> <td>54.00</td> <td>-32.44</td> <td>19.68</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>373</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.31	46.35	74.00	-27.65	44.47	30.49	4.92	33.53	373	30	PEAK	2	2484.31	21.56	54.00	-32.44	19.68	30.49	4.92	33.53	373	30	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>105.07</td> <td>-----</td> <td>-----</td> <td>103.20</td> <td>30.49</td> <td>4.92</td> <td>33.54</td> <td>373</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>80.28</td> <td>54.00</td> <td>26.28</td> <td>78.41</td> <td>30.49</td> <td>4.92</td> <td>33.54</td> <td>373</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.07	-----	-----	103.20	30.49	4.92	33.54	373	30	PEAK	2	2480.00	80.28	54.00	26.28	78.41	30.49	4.92	33.54	373	30
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2484.31	46.35	74.00	-27.65	44.47	30.49	4.92	33.53	373	30	PEAK																																																																																																
2	2484.31	21.56	54.00	-32.44	19.68	30.49	4.92	33.53	373	30	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2480.00	105.07	-----	-----	103.20	30.49	4.92	33.54	373	30	PEAK																																																																																																
2	2480.00	80.28	54.00	26.28	78.41	30.49	4.92	33.54	373	30	AVERAGE																																																																																																



Mode	3																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Vertical	Fundamental																																																																																																									
Peak																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.95</td> <td>44.20</td> <td>74.00</td> <td>-29.80</td> <td>42.32</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>207</td> <td>205</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.95</td> <td>19.41</td> <td>54.00</td> <td>-34.59</td> <td>17.53</td> <td>30.49</td> <td>4.92</td> <td>33.53</td> <td>207</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.95	44.20	74.00	-29.80	42.32	30.49	4.92	33.53	207	205	PEAK	2	2483.95	19.41	54.00	-34.59	17.53	30.49	4.92	33.53	207	205	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.51</td> <td>-----</td> <td>-----</td> <td>95.64</td> <td>30.49</td> <td>4.92</td> <td>33.54</td> <td>207</td> <td>205</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>72.72</td> <td>54.00</td> <td>18.72</td> <td>70.85</td> <td>30.49</td> <td>4.92</td> <td>33.54</td> <td>207</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.51	-----	-----	95.64	30.49	4.92	33.54	207	205	PEAK	2	2480.00	72.72	54.00	18.72	70.85	30.49	4.92	33.54	207	205
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.95	44.20	74.00	-29.80	42.32	30.49	4.92	33.53	207	205	PEAK																																																																																																
2	2483.95	19.41	54.00	-34.59	17.53	30.49	4.92	33.53	207	205	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2480.00	97.51	-----	-----	95.64	30.49	4.92	33.54	207	205	PEAK																																																																																																
2	2480.00	72.72	54.00	18.72	70.85	30.49	4.92	33.54	207	205	AVERAGE																																																																																																




Mode	3																																																																																																																																																		
	Harmonic																																																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																		
ANT	6																																																																																																																																																		
Pol.	Horizontal	Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>44.50</td> <td>74.00</td> <td>-29.50</td> <td>60.38</td> <td>33.89</td> <td>7.81</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>19.71</td> <td>54.00</td> <td>-34.29</td> <td>35.59</td> <td>33.89</td> <td>7.81</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>45.17</td> <td>74.00</td> <td>-28.83</td> <td>58.66</td> <td>36.30</td> <td>9.19</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>20.38</td> <td>54.00</td> <td>-33.62</td> <td>33.87</td> <td>36.30</td> <td>9.19</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	44.50	74.00	-29.50	60.38	33.89	7.81	57.58	--	--	Peak	2	4960.00	19.71	54.00	-34.29	35.59	33.89	7.81	57.58	--	--	Average	3	7440.00	45.17	74.00	-28.83	58.66	36.30	9.19	58.98	--	--	Peak	4	7440.00	20.38	54.00	-33.62	33.87	36.30	9.19	58.98	--	--	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>44.17</td> <td>74.00</td> <td>-29.83</td> <td>60.05</td> <td>33.89</td> <td>7.81</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>19.38</td> <td>54.00</td> <td>-34.62</td> <td>35.26</td> <td>33.89</td> <td>7.81</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>44.33</td> <td>74.00</td> <td>-29.67</td> <td>57.82</td> <td>36.30</td> <td>9.19</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>19.54</td> <td>54.00</td> <td>-34.46</td> <td>33.03</td> <td>36.30</td> <td>9.19</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	44.17	74.00	-29.83	60.05	33.89	7.81	57.58	--	--	Peak	2	4960.00	19.38	54.00	-34.62	35.26	33.89	7.81	57.58	--	--	Average	3	7440.00	44.33	74.00	-29.67	57.82	36.30	9.19	58.98	--	--	Peak	4	7440.00	19.54	54.00	-34.46	33.03	36.30	9.19	58.98	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																																															
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	4960.00	44.50	74.00	-29.50	60.38	33.89	7.81	57.58	--	--	Peak																																																																																																																																								
2	4960.00	19.71	54.00	-34.29	35.59	33.89	7.81	57.58	--	--	Average																																																																																																																																								
3	7440.00	45.17	74.00	-28.83	58.66	36.30	9.19	58.98	--	--	Peak																																																																																																																																								
4	7440.00	20.38	54.00	-33.62	33.87	36.30	9.19	58.98	--	--	Average																																																																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																																															
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	4960.00	44.17	74.00	-29.83	60.05	33.89	7.81	57.58	--	--	Peak																																																																																																																																								
2	4960.00	19.38	54.00	-34.62	35.26	33.89	7.81	57.58	--	--	Average																																																																																																																																								
3	7440.00	44.33	74.00	-29.67	57.82	36.30	9.19	58.98	--	--	Peak																																																																																																																																								
4	7440.00	19.54	54.00	-34.46	33.03	36.30	9.19	58.98	--	--	Average																																																																																																																																								




Mode	4																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_LF_CH78_2480MHz																																																																																																																																																																																	
ANT	6																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>38.73</td><td>22.31</td><td>40.00</td><td>-17.69</td><td>37.43</td><td>19.16</td><td>0.62</td><td>34.90</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>142.52</td><td>25.81</td><td>43.50</td><td>-17.69</td><td>40.93</td><td>18.35</td><td>1.25</td><td>34.72</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>287.05</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>42.06</td><td>18.72</td><td>1.76</td><td>34.63</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>353.98</td><td>28.69</td><td>46.00</td><td>-17.31</td><td>41.02</td><td>20.31</td><td>1.95</td><td>34.59</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>695.42</td><td>27.21</td><td>46.00</td><td>-18.79</td><td>31.80</td><td>27.02</td><td>2.80</td><td>34.41</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>848.92</td><td>29.18</td><td>46.00</td><td>-16.82</td><td>31.76</td><td>28.63</td><td>3.09</td><td>34.30</td><td>--</td><td>Peak</td></tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	38.73	22.31	40.00	-17.69	37.43	19.16	0.62	34.90	--	Peak	2	142.52	25.81	43.50	-17.69	40.93	18.35	1.25	34.72	--	Peak	3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	Peak	4	353.98	28.69	46.00	-17.31	41.02	20.31	1.95	34.59	--	Peak	5	695.42	27.21	46.00	-18.79	31.80	27.02	2.80	34.41	--	Peak	6	848.92	29.18	46.00	-16.82	31.76	28.63	3.09	34.30	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>34.85</td><td>24.73</td><td>40.00</td><td>-15.27</td><td>40.37</td><td>18.68</td><td>0.58</td><td>34.90</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>109.54</td><td>27.35</td><td>43.50</td><td>-16.15</td><td>45.34</td><td>15.68</td><td>1.11</td><td>34.78</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>141.55</td><td>29.03</td><td>43.50</td><td>-14.47</td><td>44.23</td><td>18.27</td><td>1.25</td><td>34.72</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>208.48</td><td>26.97</td><td>43.50</td><td>-16.53</td><td>43.90</td><td>16.26</td><td>1.51</td><td>34.70</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>731.31</td><td>27.42</td><td>46.00</td><td>-18.58</td><td>31.51</td><td>27.41</td><td>2.90</td><td>34.40</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>948.59</td><td>31.09</td><td>46.00</td><td>-14.91</td><td>32.39</td><td>29.74</td><td>3.26</td><td>34.30</td><td>--</td><td>Peak</td></tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	34.85	24.73	40.00	-15.27	40.37	18.68	0.58	34.90	--	Peak	2	109.54	27.35	43.50	-16.15	45.34	15.68	1.11	34.78	--	Peak	3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	Peak	4	208.48	26.97	43.50	-16.53	43.90	16.26	1.51	34.70	--	Peak	5	731.31	27.42	46.00	-18.58	31.51	27.41	2.90	34.40	--	Peak	6	948.59	31.09	46.00	-14.91	32.39	29.74	3.26	34.30	--	Peak
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	38.73	22.31	40.00	-17.69	37.43	19.16	0.62	34.90	--	Peak																																																																																																																																																																								
2	142.52	25.81	43.50	-17.69	40.93	18.35	1.25	34.72	--	Peak																																																																																																																																																																								
3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	Peak																																																																																																																																																																								
4	353.98	28.69	46.00	-17.31	41.02	20.31	1.95	34.59	--	Peak																																																																																																																																																																								
5	695.42	27.21	46.00	-18.79	31.80	27.02	2.80	34.41	--	Peak																																																																																																																																																																								
6	848.92	29.18	46.00	-16.82	31.76	28.63	3.09	34.30	--	Peak																																																																																																																																																																								
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	34.85	24.73	40.00	-15.27	40.37	18.68	0.58	34.90	--	Peak																																																																																																																																																																								
2	109.54	27.35	43.50	-16.15	45.34	15.68	1.11	34.78	--	Peak																																																																																																																																																																								
3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	Peak																																																																																																																																																																								
4	208.48	26.97	43.50	-16.53	43.90	16.26	1.51	34.70	--	Peak																																																																																																																																																																								
5	731.31	27.42	46.00	-18.58	31.51	27.41	2.90	34.40	--	Peak																																																																																																																																																																								
6	948.59	31.09	46.00	-14.91	32.39	29.74	3.26	34.30	--	Peak																																																																																																																																																																								

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

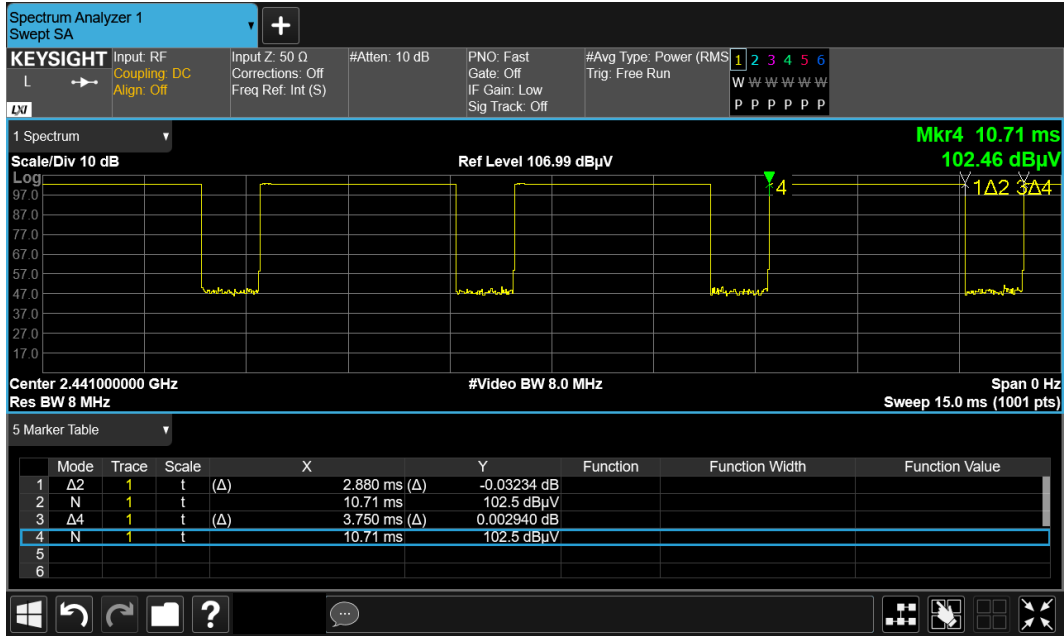

DH5 on time (Count Pulses) Plot on Channel 39

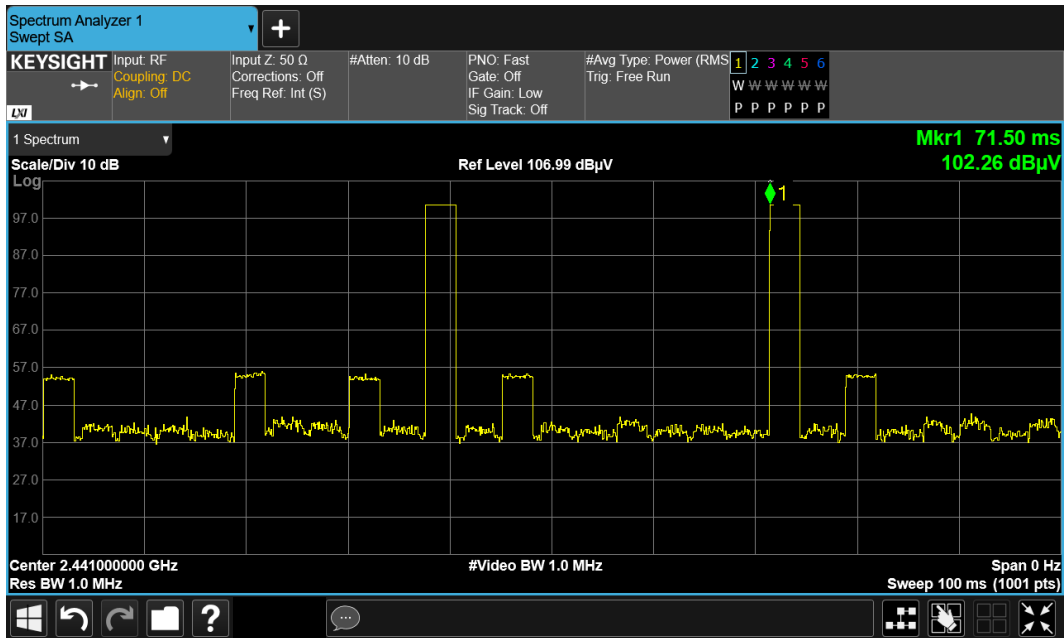

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.