


Power measurement connection diagram:

The power measurement for 2G/3G/LTE/5G FR1/UL and DL CA is to establish a connection between device and call box, and via call box to configure Bands, channel, BWs, RB size, carrier aggregation of CA, frequency channels, SCS and maximum output power. Hereunder is screenshot call box connection information for 2G/3G/LTE/5G FR1/UL and DL CA.


<GSM>

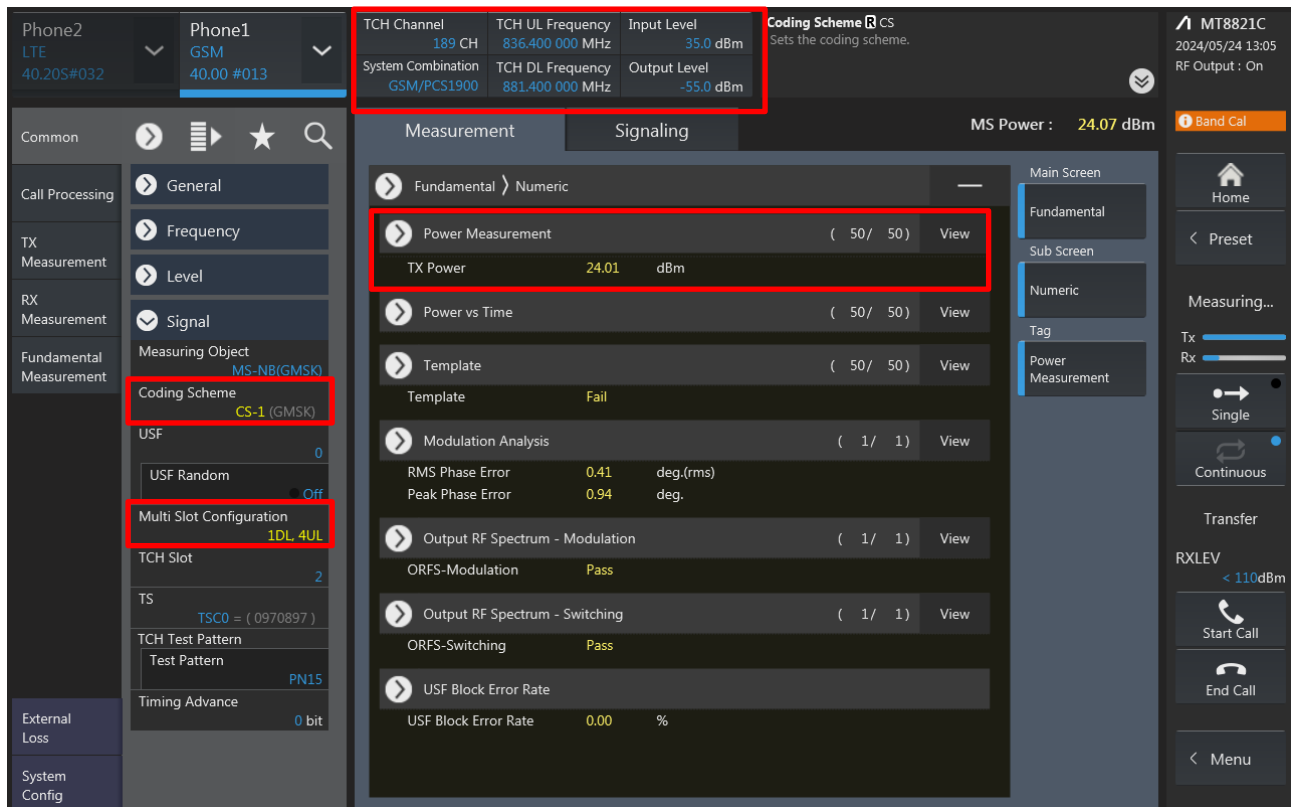

The screenshot displays the SPORTON LAB. software interface for GSM power measurement. The interface is divided into several sections:


- Top Bar:** Shows Phone2 (LTE, 40.205#032) and Phone1 (GSM, 40.00 #013). It also displays TCH Channel (189 CH), TCH UL Frequency (836.400 000 MHz), Input Level (35.0 dBm), TCH DL Frequency (881.400 000 MHz), and Output Level (-55.0 dBm). The Coding Scheme is set to CS.
- Left Sidebar:** Contains navigation options like Common, Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, and External Loss. The 'Fundamental Measurement' section is expanded, showing 'Coding Scheme' (CS-1 (GMSK)) and 'Multi Slot Configuration' (1DL, 4UL).
- Main Area:** Displays 'Measurement' and 'Signaling' tabs. The 'Measurement' tab is active, showing 'Fundamental' and 'Numeric' views. The 'Power Measurement' section is highlighted, showing 'TX Power' (24.01 dBm). Other measurements include 'Power vs Time', 'Template', 'Modulation Analysis', 'Output RF Spectrum - Modulation', 'Output RF Spectrum - Switching', and 'USF Block Error Rate'.
- Right Sidebar:** Shows 'Main Screen' and 'Sub Screen' options. It also displays 'MT8821C' and '2024/05/24 13:05'.

<WCDMA>

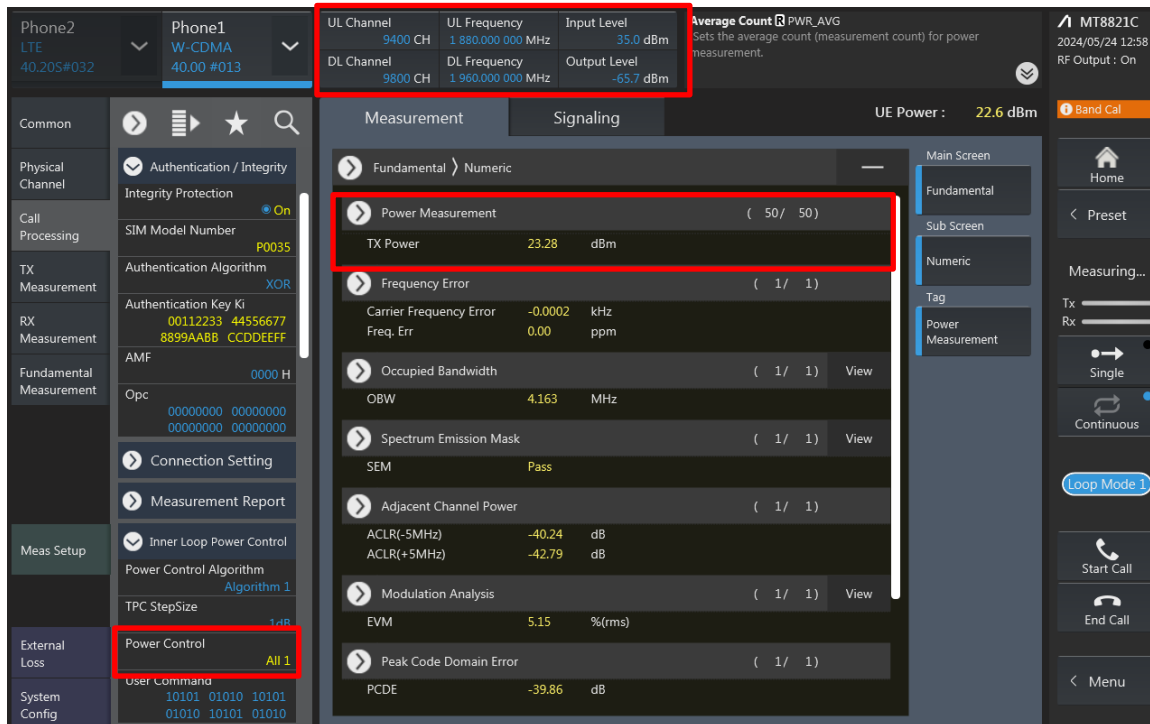


The screenshot shows the WCDMA measurement interface. The top bar displays 'Phone2 LTE 40.20S#032' and 'Phone1 W-CDMA 40.00 #013'. The 'Measurement' tab is active, showing a list of metrics. A red box highlights the 'Power Measurement' section, which includes 'TX Power' at 23.28 dBm. Another red box highlights the 'Power Control' section in the 'Meas Setup' tab, showing 'Power Control' set to 'All 1'. The 'UE Power' is 22.6 dBm. The 'Main Screen' shows 'Fundamental' and 'Sub Screen' options.

<LTE>

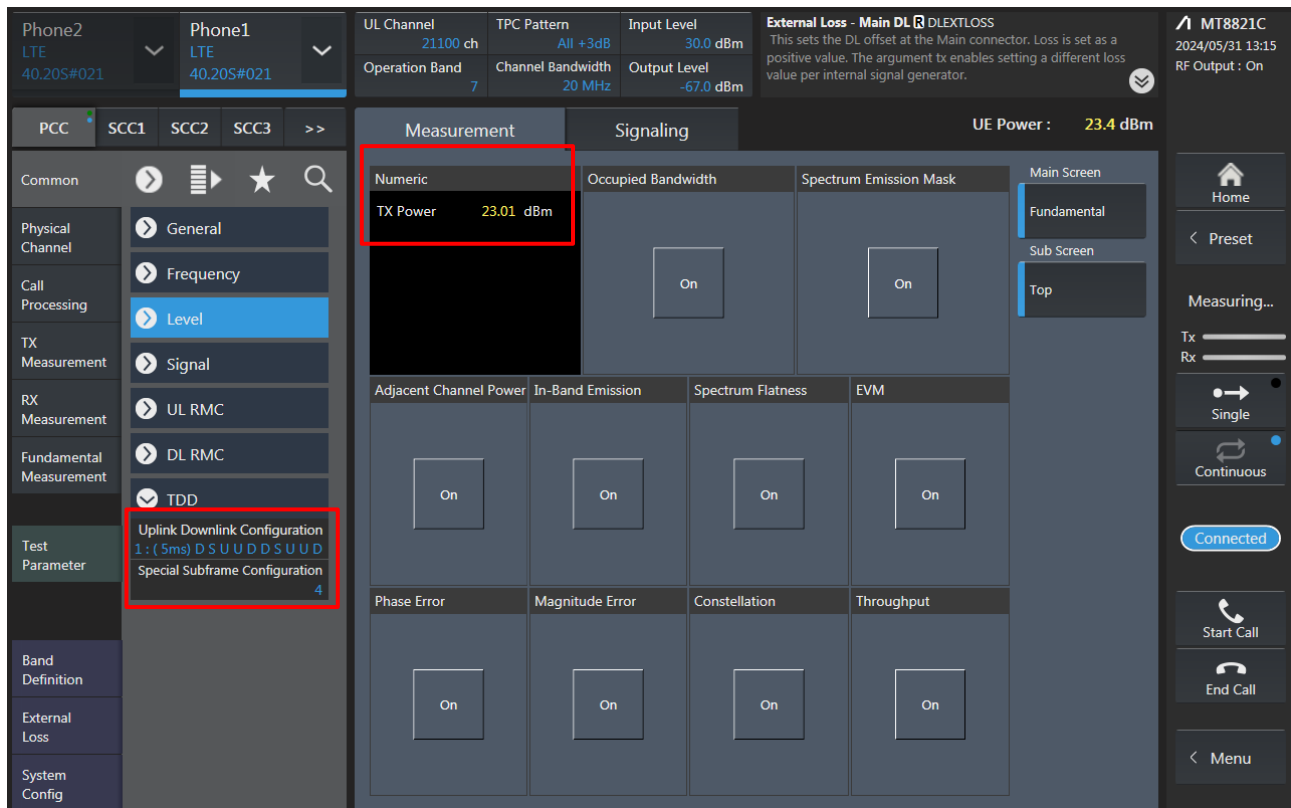

The screenshot shows the LTE measurement interface. The top bar displays 'Phone2 LTE 40.20S#021' and 'Phone1 LTE 40.20S#021'. The 'Measurement' tab is active, showing a list of metrics. A red box highlights the 'Power Measurement' section, which includes 'TX Power' at 23.01 dBm. Another red box highlights the 'Uplink Downlink Configuration' section in the 'Test Parameter' tab, showing 'Uplink Downlink Configuration 1: (5ms) D S U U D D S U U D' and 'Special Subframe Configuration 4'. The 'UE Power' is 23.4 dBm. The 'Main Screen' shows 'Fundamental' and 'Sub Screen' options.


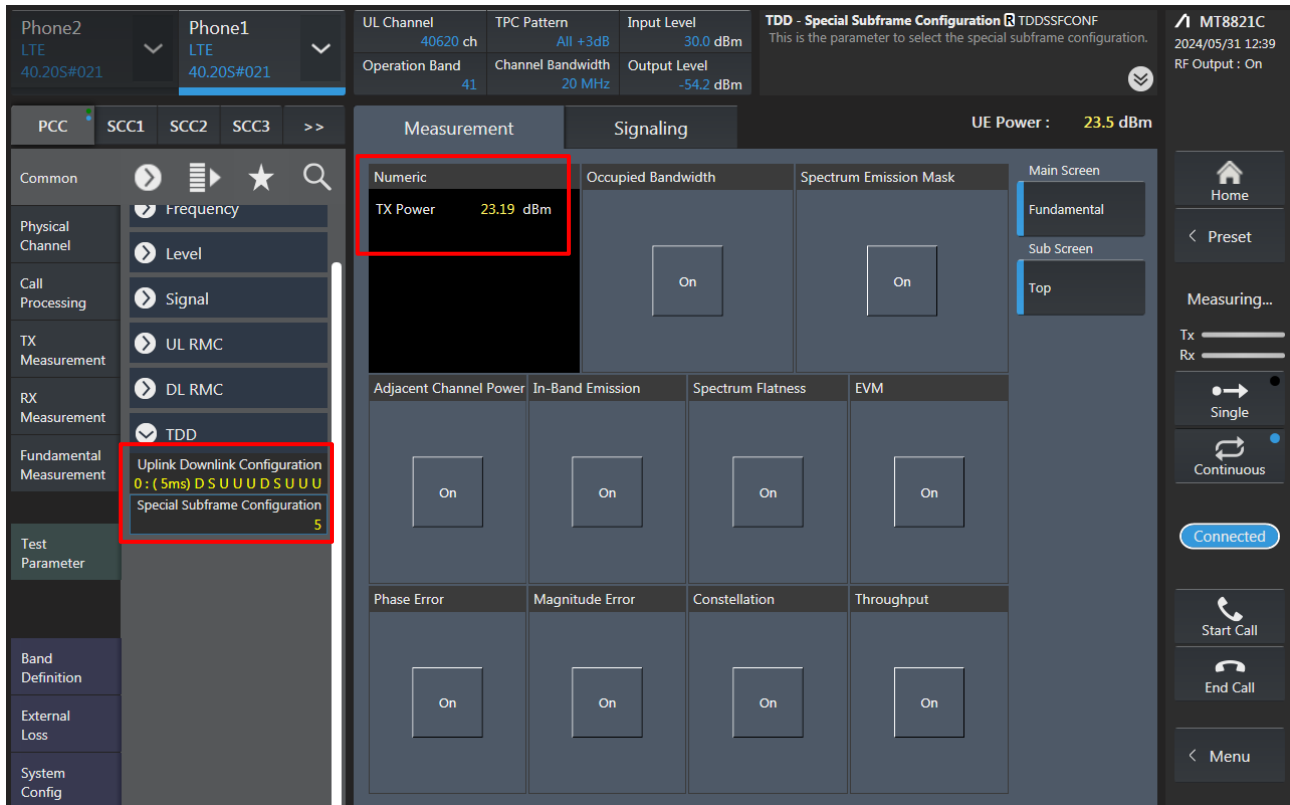
<LTE TDD Power class 3>


The screenshot displays the SPORTON LAB. LTE TDD Power class 3 configuration interface. The interface is divided into several sections:

- Top Bar:** Shows Phone2 (LTE, 40.20S#021) and Phone1 (LTE, 40.20S#021). It also displays UL Channel (40620 ch), TPC Pattern (All +3dB), Input Level (30.0 dBm), and TDD - Special Subframe Configuration (TDDSSFCNF). The UE Power is indicated as 23.5 dBm.
- Left Sidebar:** Contains navigation options such as PCC, SCC1, SCC2, SCC3, and >>. It also lists various measurement and configuration categories like Common, Physical Channel, Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, Test Parameter, Band Definition, External Loss, and System Config.
- Main Area:** Divided into Measurement and Signaling sections. The Measurement section includes a table with columns for Numeric, Occupied Bandwidth, and Spectrum Emission Mask. The Signaling section includes a table with columns for Adjacent Channel Power, In-Band Emission, Spectrum Flatness, and EVM. The TX Power is highlighted with a red box, showing a value of 23.19 dBm.
- Right Sidebar:** Contains a 'Main Screen' section with options for Fundamental, Sub Screen, and Top. It also includes a 'Connected' status indicator and buttons for Start Call and End Call.

The 'Uplink Downlink Configuration' and 'Special Subframe Configuration' settings are highlighted with a red box. The 'Uplink Downlink Configuration' is set to 0 : (5ms) D S U U U D S U U U, and the 'Special Subframe Configuration' is set to 5.


<5G NR FR1>

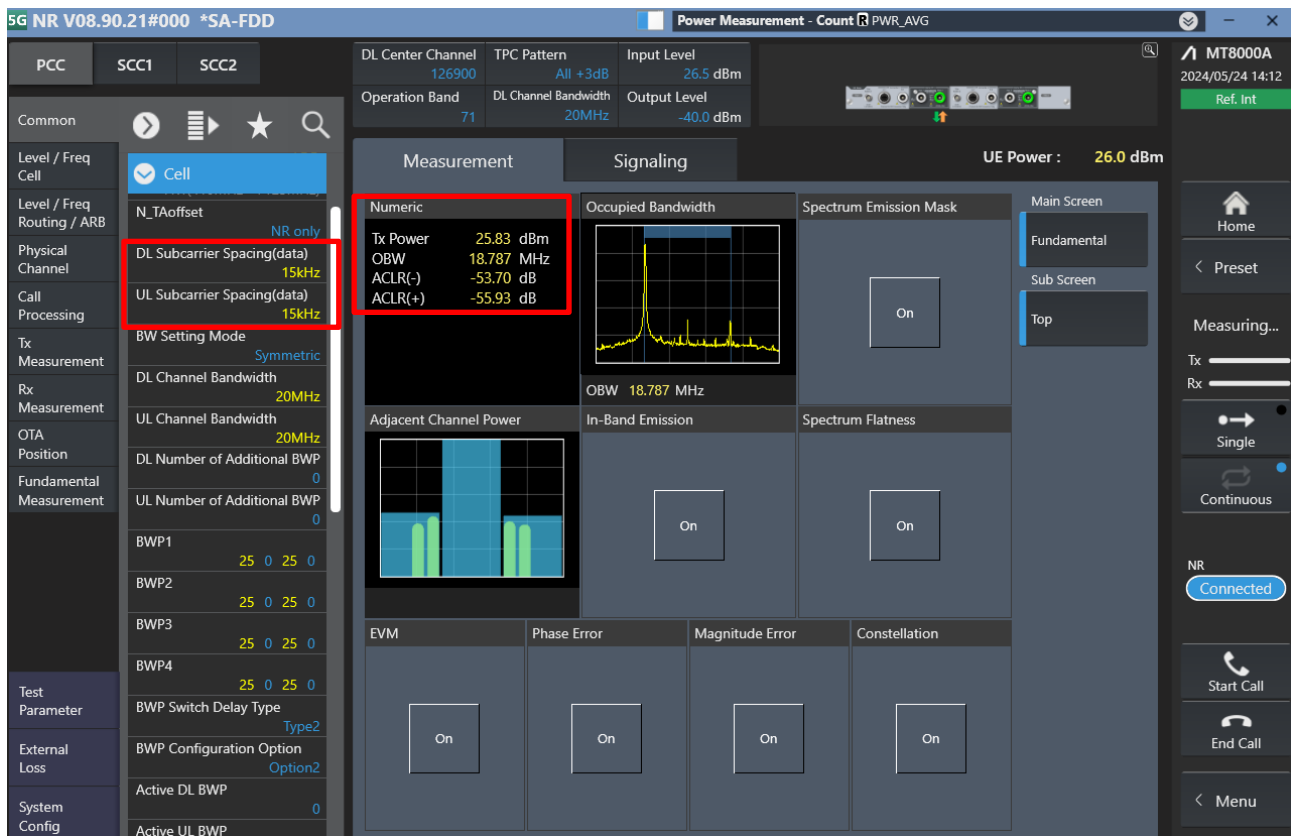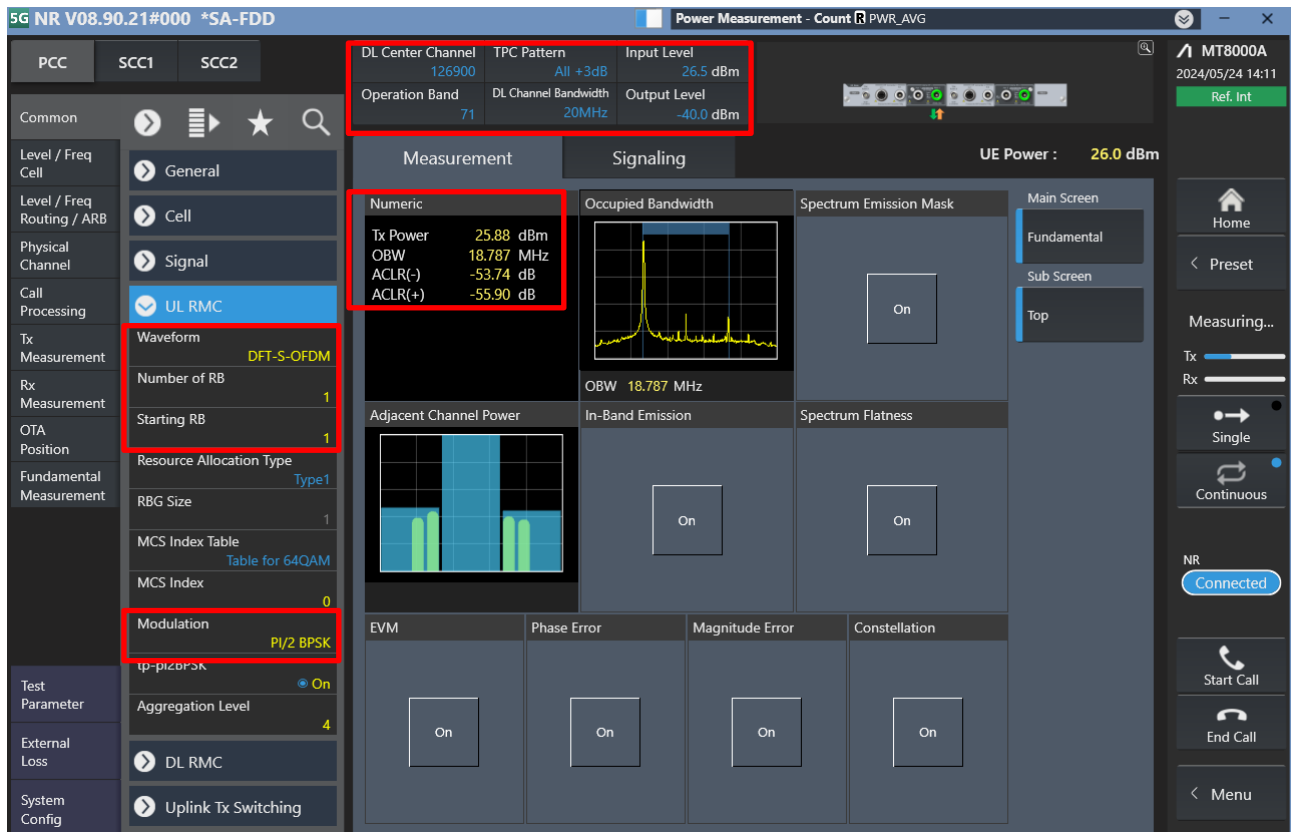

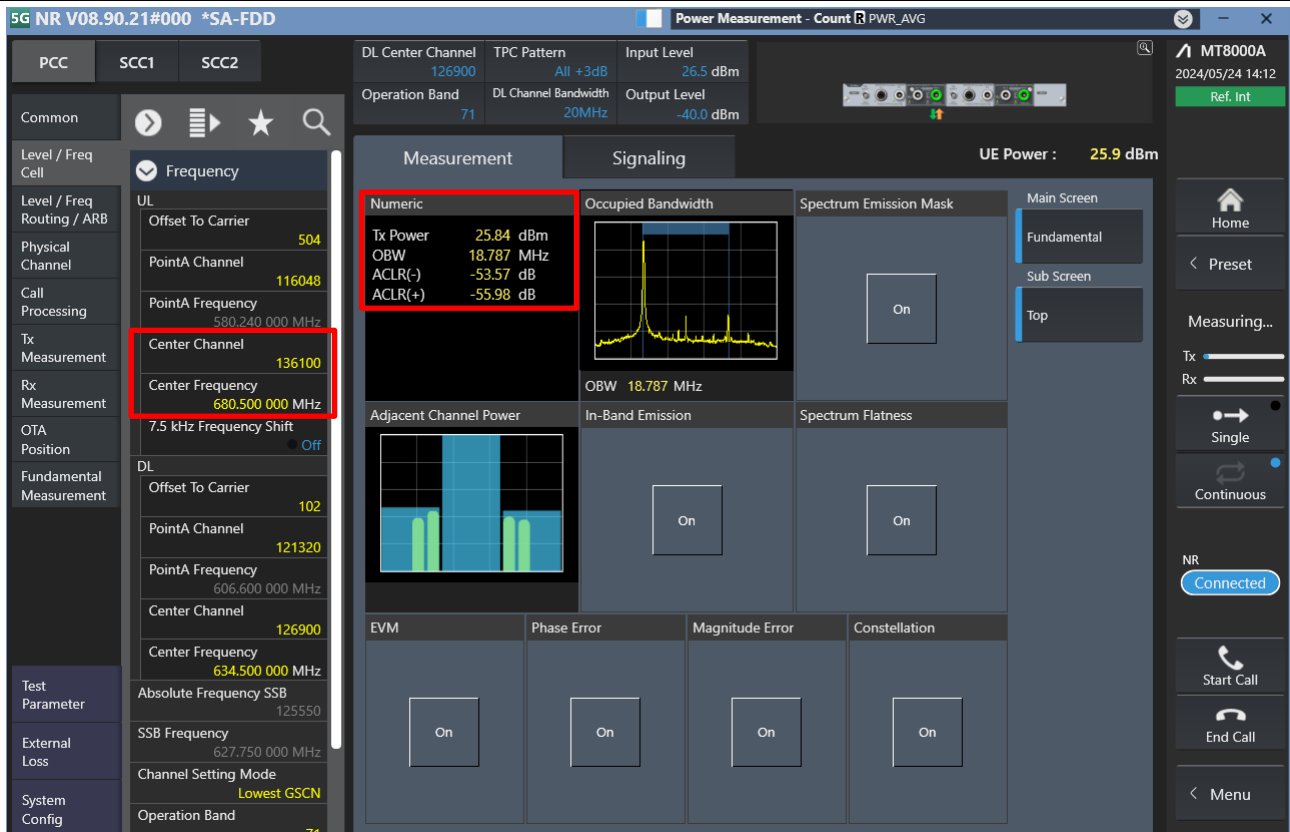

LTE Uplink and Downlink Carrier Aggregation configurations:


1. Change the Scenario in the Configuration of Phone1 LTE Signaling and Preset.

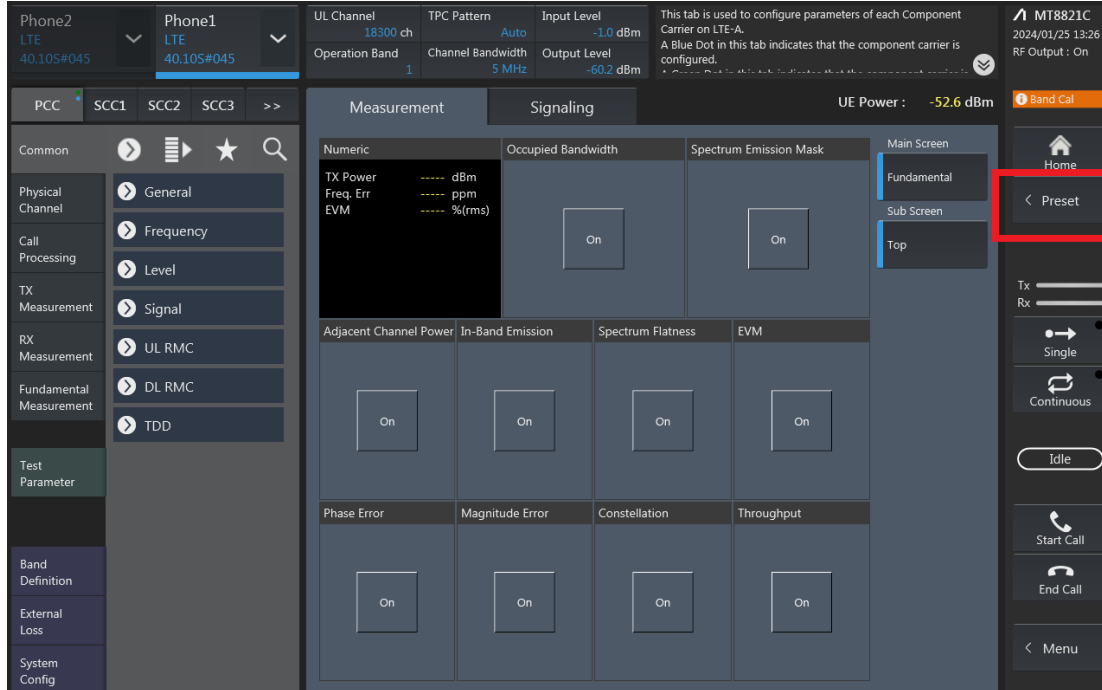


2. If Select "RMC (DL/UL CA)" for Uplink Carrier Aggregation;
If Select "RMC (DL CA)" for Downlink Carrier Aggregation.

For example, Uplink Carrier Aggregation:

Detailed operation: PCC → Common → Signal → Channel Coding → Select 【RMC (DL/UL CA)】

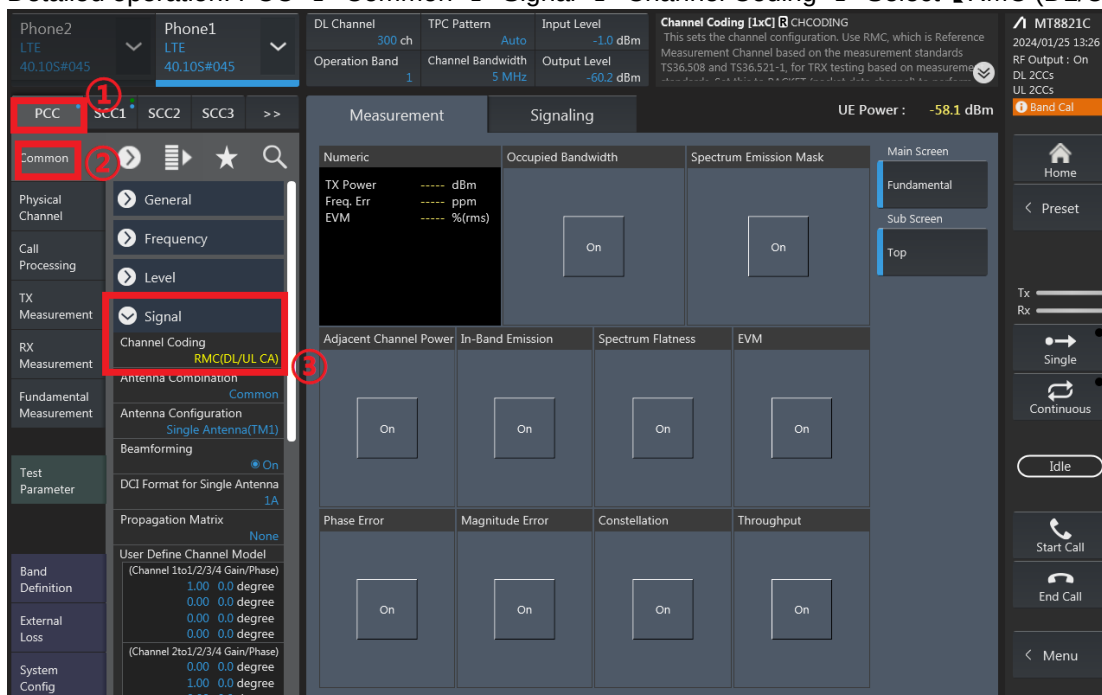

3. PCC parameter Settings: on the screen, and then select the PCC tab and Set operating band, BW, channel and RB configurations for PCC;

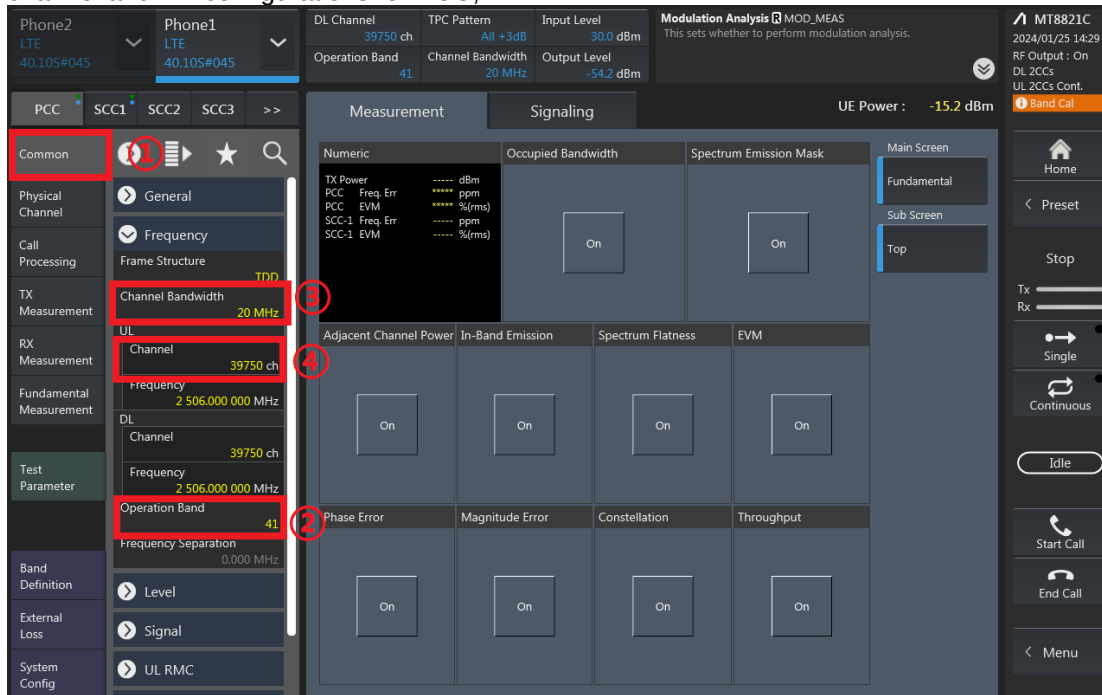

Phone2 LTE 40.10S#045 Phone1 LTE 40.10S#045

DL Channel 39750 ch TPC Pattern All +3dB Input Level 30.0 dBm Modulation Analysis MOD_MEAS This sets whether to perform modulation analysis.

Operation Band 41 Channel Bandwidth 20 MHz Output Level -54.2 dBm

MT8821C 2024/01/25 14:29 RF Output : On DL 2CCs UL 2CCs Cont.

UE Power : -15.2 dBm

Measurement Signaling

Common

Physical Channel General

Call Processing Frequency

TX Measurement Channel Bandwidth 20 MHz

RX Measurement Channel 39750 ch

Fundamental Measurement Frequency 2 506.000 000 MHz

Test Parameter Channel 39750 ch Frequency 2 506.000 000 MHz Operation Band 41 Frequency Separation 0.000 MHz

Band Definition Level

External Loss Signal

System Config UL RMC

Numeric

TX Power PCC Freq. Err. dBm PCC EVM ppm SCC-1 Freq. Err. ppm SCC-1 EVM ppm

Occupied Bandwidth

Spectrum Emission Mask


Main Screen Fundamental Sub Screen Top

Home Preset Stop Tx Rx Single Continuous Idle Start Call End Call Menu

Adjacent Channel Power In-Band Emission Spectrum Flatness EVM

Phase Error Magnitude Error Constellation Throughput

RB configurations (Number of RB / Starting RB) for PCC;

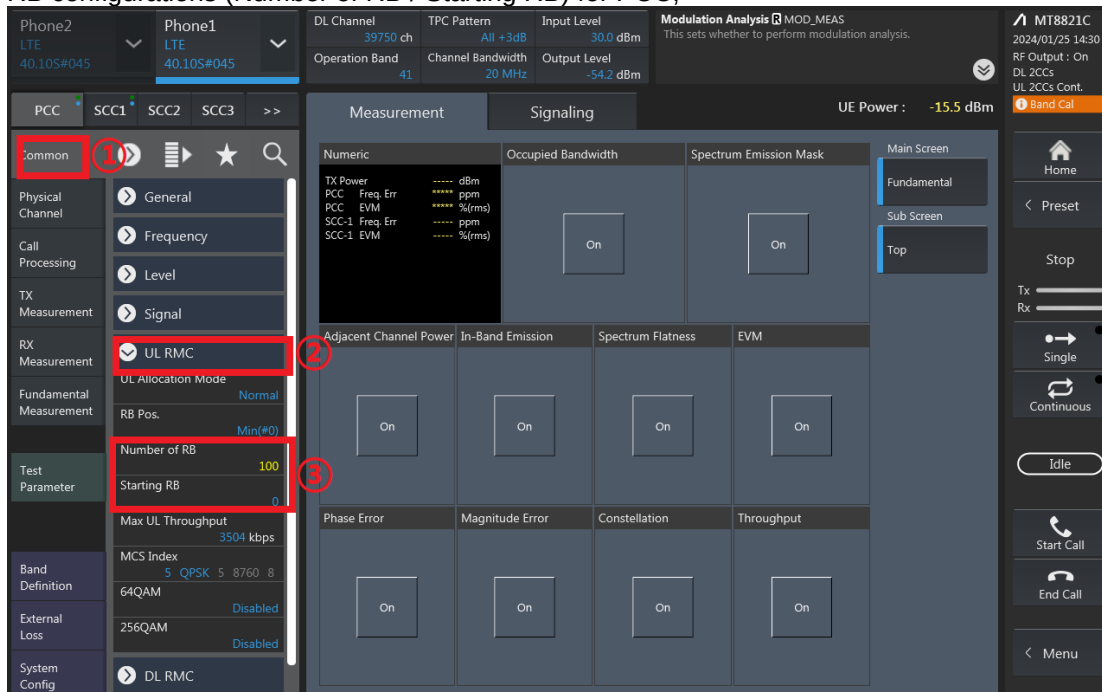

Phone2 LTE 40.10S#045 Phone1 LTE 40.10S#045

DL Channel 39750 ch TPC Pattern All +3dB Input Level 30.0 dBm Modulation Analysis MOD_MEAS This sets whether to perform modulation analysis.

Operation Band 41 Channel Bandwidth 20 MHz Output Level -54.2 dBm

MT8821C 2024/01/25 14:30 RF Output : On DL 2CCs UL 2CCs Cont.

UE Power : -15.5 dBm

Measurement Signaling

Common

Physical Channel General

Call Processing Frequency

TX Measurement Level

RX Measurement Signal

Fundamental Measurement UL RMC

Test Parameter UL Allocation Mode Normal RB Pos. Min(#0) Number of RB 100 Starting RB 0 Max UL Throughput 3504 kbps MCS Index 5 QPSK 5 8760 8 64QAM 256QAM Disabled Disabled

Band Definition DL RMC

Numeric

TX Power PCC Freq. Err. dBm PCC EVM ppm SCC-1 Freq. Err. ppm SCC-1 EVM ppm

Occupied Bandwidth

Spectrum Emission Mask


Main Screen Fundamental Sub Screen Top

Home Preset Stop Tx Rx Single Continuous Idle Start Call End Call Menu


Adjacent Channel Power In-Band Emission Spectrum Flatness EVM

Phase Error Magnitude Error Constellation Throughput


4. SCC parameter Settings: Select the SCC1 tab, Set operating band, BW, channel, and RB configurations for SCC1;

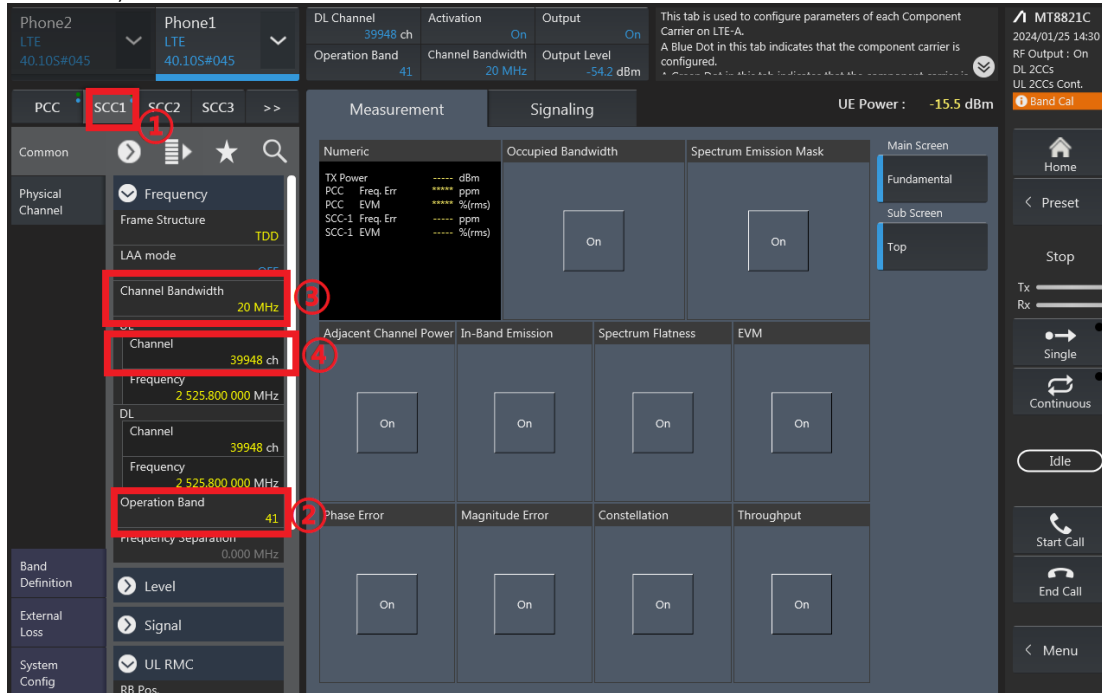


RB configurations (Number of RB / Starting RB) for SCC1;

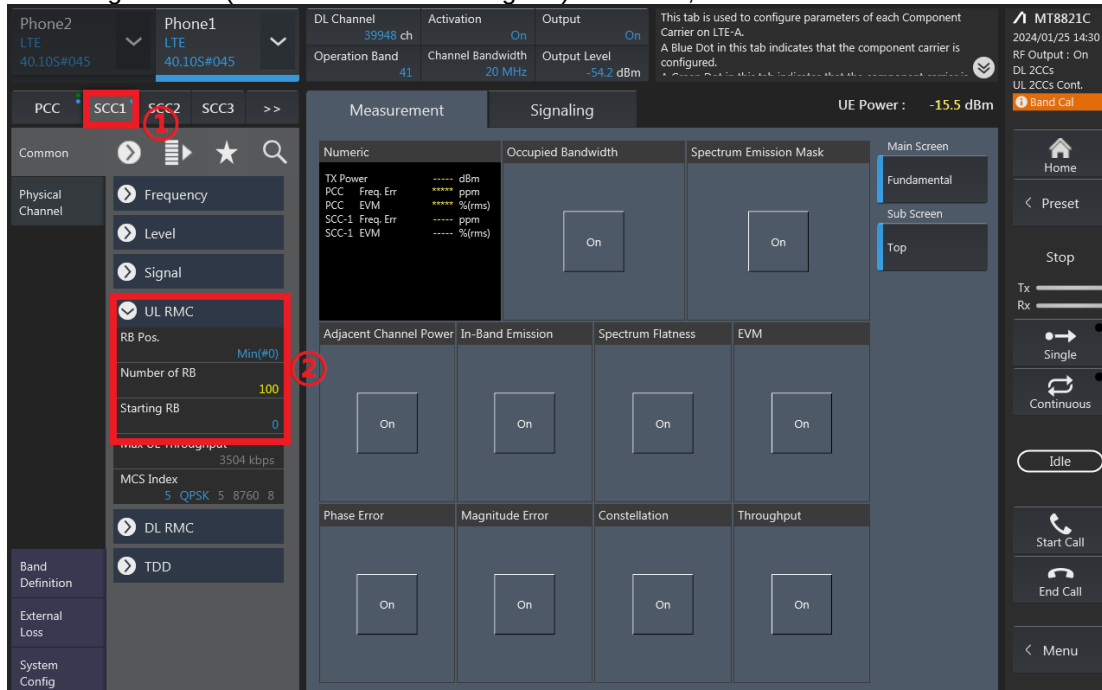

5. Select the PCC tab, then set “SIM Model Number” and select max power;

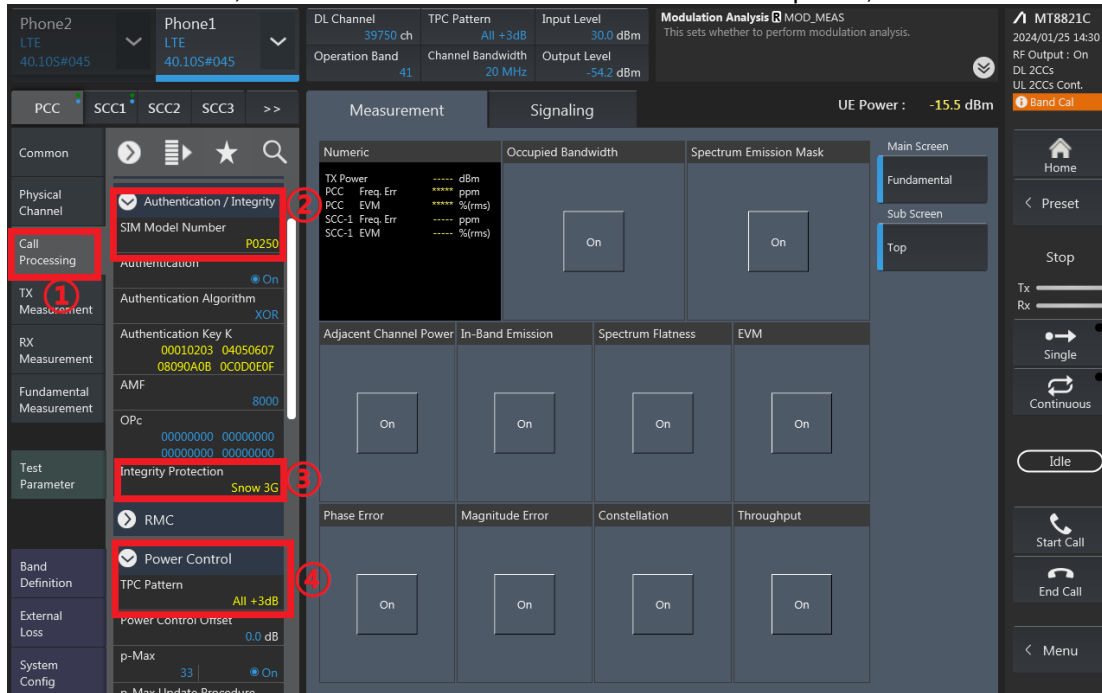

6. Click the “Connect” button at the Right of the screen, if necessary, turn the Airplane mode on/off in the DUT

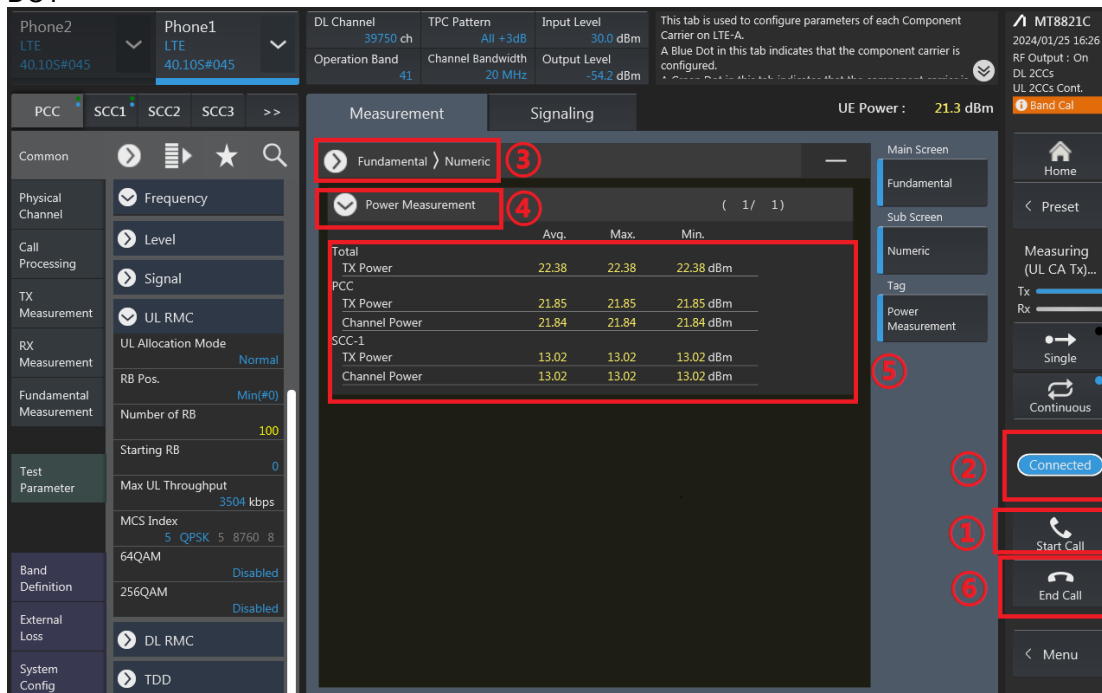

7. The inter-band ULCA test method is similar to intra-band ULCA, and DLCA test method is similar to intra-band ULCA too.

Uplink CA Power

Full Power

CA_7C Ant 1							
Combination 20MHz+20MHz (100RB+100RB)							
PCC Channel	SCC Channel	Modulation	PCC		SCC		Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset	
20850	21048	QPSK	1	99	1	0	22.71
21100	21298	QPSK	1	99	1	0	22.76
21350	21152	QPSK	1	0	1	99	22.69

EC1_2

CA_7C Ant 1							
Combination 20MHz+20MHz (100RB+100RB)							
PCC Channel	SCC Channel	Modulation	PCC		SCC		Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset	
20850	21048	QPSK	1	99	1	0	22.71
21100	21298	QPSK	1	99	1	0	22.76
21350	21152	QPSK	1	0	1	99	22.69

EC1_3

CA_7C Ant 1							
Combination 20MHz+20MHz (100RB+100RB)							
PCC Channel	SCC Channel	Modulation	PCC		SCC		Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset	
20850	21048	QPSK	1	99	1	0	17.99
21100	21298	QPSK	1	99	1	0	18.27
21350	21152	QPSK	1	0	1	99	18.09

EC1_6

CA_7C Ant 1							
Combination 20MHz+20MHz (100RB+100RB)							
PCC Channel	SCC Channel	Modulation	PCC		SCC		Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset	
20850	21048	QPSK	1	99	1	0	20.13
21100	21298	QPSK	1	99	1	0	20.24
21350	21152	QPSK	1	0	1	99	19.91

EC1_7

CA_7C Ant 1							
Combination 20MHz+20MHz (100RB+100RB)							
PCC Channel	SCC Channel	Modulation	PCC		SCC		Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset	
20850	21048	QPSK	1	99	1	0	18.12
21100	21298	QPSK	1	99	1	0	18.33
21350	21152	QPSK	1	0	1	99	18.12