



**MOTOROLA**

**PERSONAL COMMUNICATIONS SECTOR**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 10826-1

**Report Date** – May 21, 2003

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature 

Name: Mark Kien

Title: Electrical Engineer

Date : 05/21/03

This report must not be reproduced, except in full, without written approval from this laboratory.

## **Table of Contents**

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	4
Summary of Testing	5
General and Special Conditions	5
Equipment and Cable Configurations	5
Measuring Equipment and Calibration Information	6
Measurement Procedures and Data	
RF Power Output	7
Occupied Bandwidth	8
CDMA 800 Reference Plot	9
CDMA 800 Mid Band Plot	9
CDMA 800 Lower Band Edge	10
CDMA 800 Upper Band Edge	10
Spurious Emissions at Antenna Terminals	11
CDMA 800 Tabular and Graphical Data	12
Field Strength of Spurious Emissions	13
CDMA 800 Tabular and Graphical Data	14
Frequency Stability	15
CDMA 800 Tabular and Graphical Data	16
Field Strength of Spurious Emissions From Unintentional Radiators	17
CDMA 800 Tabular and Graphical Data	18
Appendix A - Radiated Emissions Test Setup Photos	
Figure A.1 – Radiated Emissions Measurement	19
Figure A.2 – Substitution Measurement	19

**Test Report Details**

Field Strength

Tests Performed By:

Underwriters Laboratory Inc.  
333 Pfingsten Road  
Northbrook, IL 60062-2096  
PH (847) 272-8800 Fax (847) 272-8129  
Test Firm Registration Number: 91044  
Industry Canada Number: IC2180

All Other Tests Performed By:

Motorola Personal Communications Sector  
Product Safety and Compliance Group  
600 North US Hwy 45  
Libertyville, IL 60048  
PH (847) 523-3642 Fax (847) 523-8274  
FCC Registration Number: 0004321311  
Test Firm Registration Number: 316588  
Industry Canada Number: IC3908

Tests Requested By:

Motorola Inc.  
Personal Communications Sector  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type:

Cellular Phone

Signaling Capability:

CDMA 800

Model Number:

Spirit

Serial Numbers:

42FB43A2, 42FB43B5, 42FB34B2

Received Date:

5/13/2003

Testing Start Date:

5/13/2003

Testing Complete Date:

5/19/2003

## **Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart B – Unintentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 98-C, ANSI 63.4 2000, RSS-129

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	Occupied Bandwidth	Pass
3	Spurious Emissions at Antenna Terminal	Pass
4	Field Strength of Spurious Emissions	Pass
5	Frequency Stability	Pass
6	Field Strength of Spurious Emissions from Unintentional Radiators	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	Occupied Bandwidth	See Plots
3	Spurious Emissions at Antenna Terminal	19.4 dB
4	Field Strength of Spurious Emissions	31.3 dB
5	Frequency Stability	275.7 Hz
6	Field Strength of Spurious Emissions from Unintentional Radiators	10.2 dB

The margin with respect to the limit is the minimum margin for all modes and bands. ( ) indicates the margin at which the product exceeds the limit.

**General and Special Conditions**

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

**Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

**Measuring Equipment and Calibration Information**

<b>Manufacturer Name</b>	<b>Item Name Description</b>	<b>Model #</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>
Agilent	EMC Analyzer	E7405A	US53944019	11/6/03
Hewlett Packard	QP Adapter	85650A	2811A01069	1/15/04
Hewlett Packard	S/A Display	8566B	2542A12974	1/15/04
Hewlett Packard	S/A	8566B	2637A03376	1/15/04
Hewlett Packard	RF Preselector	85685A	2810A00692	1/15/04
Rohde & Schwarz	S/A	FSEK20	DE2525315	1/14/04
EMCO	Horn Antenna 1-18GHz	3115	8812-3032	5/23/03
EMCO	Horn Antenna 1-18GHz	3115	2638	7/20/03
Chase	Bi-Con Antenna 30-300MHz	VBA6106A	1246	6/18/03
Chase	Log-Periodic Antenna	UPA6108	1120	6/20/03
Weinschel	Attenuator Kit – 10, 6 dB	AS6	6675	10/9/03
Thermotron	Environmental Chamber	S-4	31580	12/19/03
Hewlett Packard	System DC Power Supply	66311B	US38447252	10/18/03
Agilent	Wireless Communication Test Set	8960 Series 10	GB42360906	9/10/03
Giga-tronics	Universal Power Meter	8651A	8650508	7/2/2003
Giga-tronics	Power Sensor	80701A	1834031	7/2/2003

**Measurement Procedures and Data**

**RF POWER OUTPUT**

**Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of the 8650 series Gigatronics power meter through a specialized RF connector. The power meter is set for Modulated Average Power (MAP) mode. The power output is measured for all channels.

CFR Part 2.1046

**Measurement Results**

\* Data supplied by SAR Lab

**CDMA 800**

Frequency (MHz)	Power (dBm)
824.7	25.0
836.52	25.0
848.37	25.0

## **OCCUPIED BANDWIDTH**

CFR Part 2.1049, 22.917, 24.238

### **Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

### **Measurement Results**


Attached

### Measurement Results – CDMA 800

#### CDMA 800 – Reference Level Plot – Channel 384 (836.52 MHz)

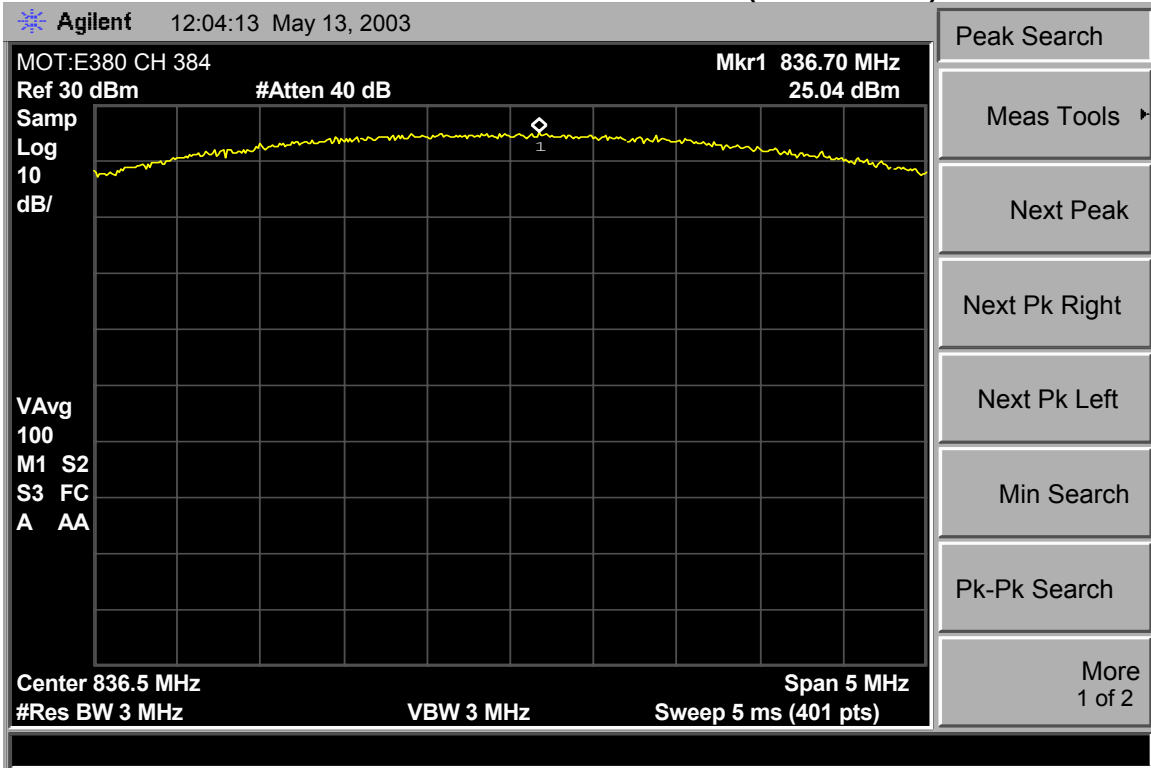


#### CDMA 800 – Channel 384 (836.52 MHz)

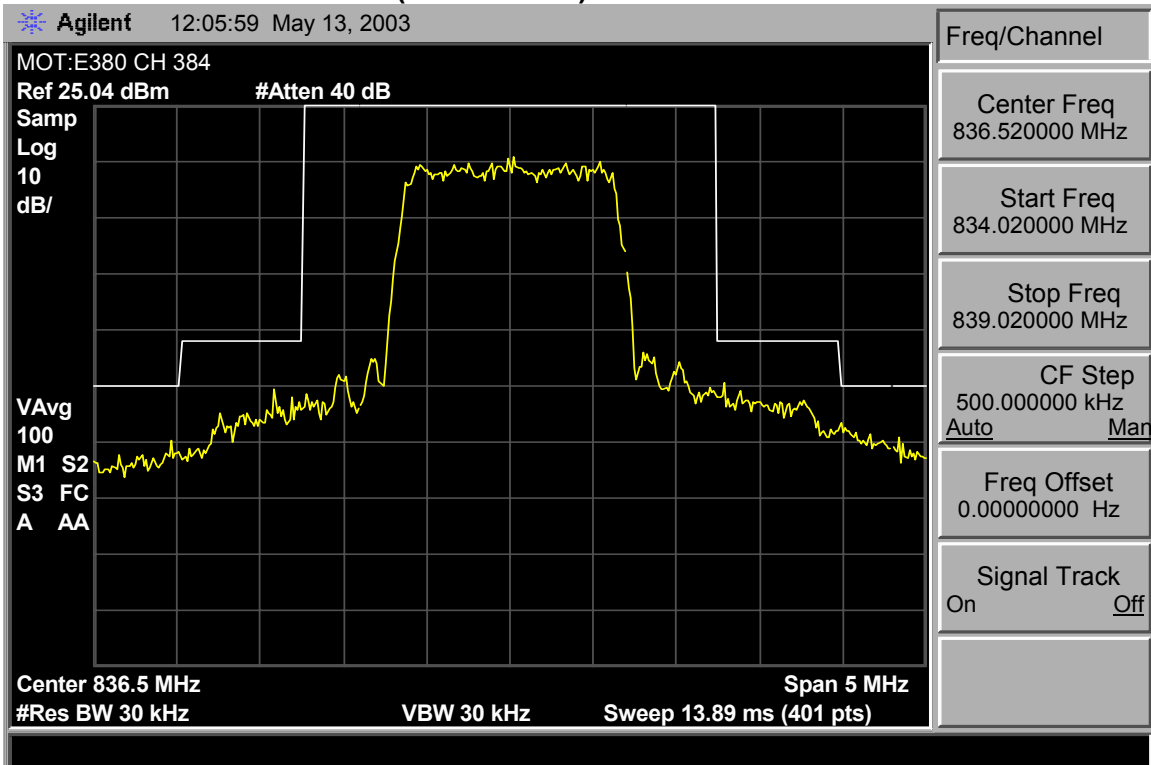

**CDMA 800 – Lower Band Edge – Channel 1013 (824.7 MHz)**



**CDMA 800 – Upper Band Edge – Channel 777 (848.31 MHz)**

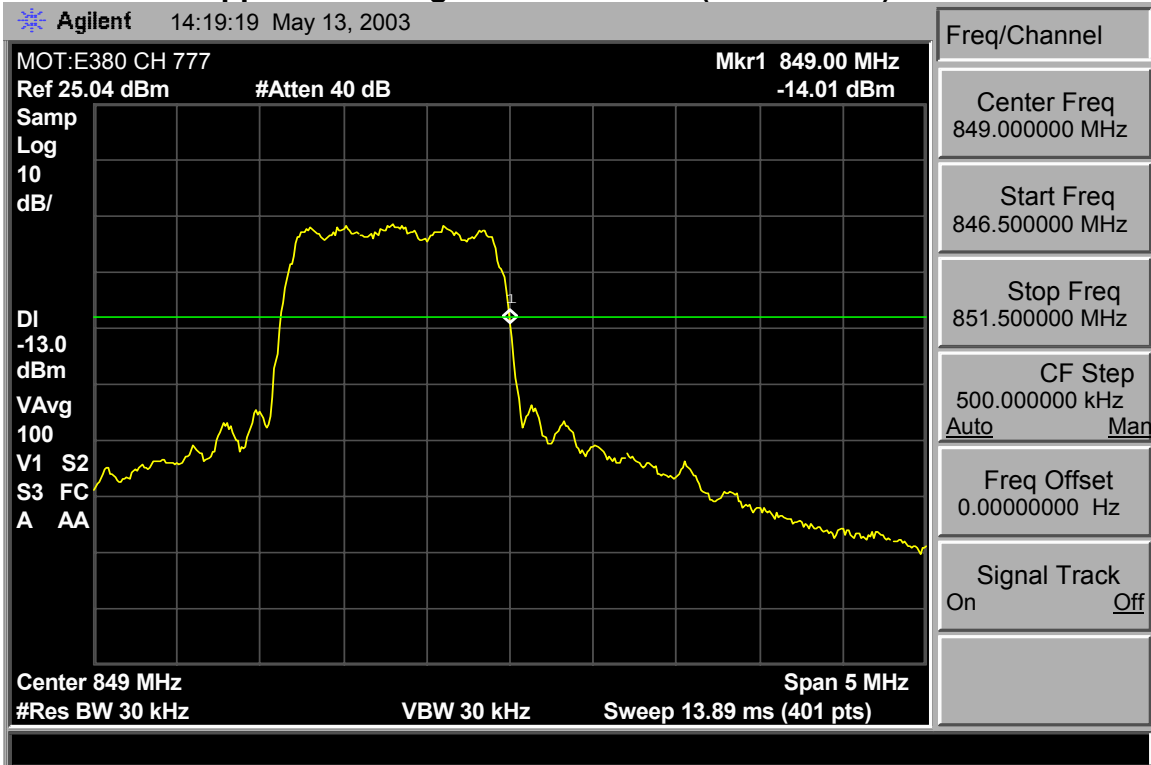

## **SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

CFR Part 2.1051, 22.917, 24.238

### **Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.


Measurements were made with the phone tuned to low, middle and high frequency within the valid mobile transmit frequency band. The worst case emissions of all three frequency configurations can be found below. Measurements for Spurious emission levels were also measured in the cellular base station frequency range (869-894 MHz).

### **Measurement Results**

Attached

**Measurement Results**  
**Modulation: CDMA 800**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-32.4
3rd harmonic	-13	-67.3
4th harmonic	-13	-51.2
5th harmonic	-13	-54.6
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

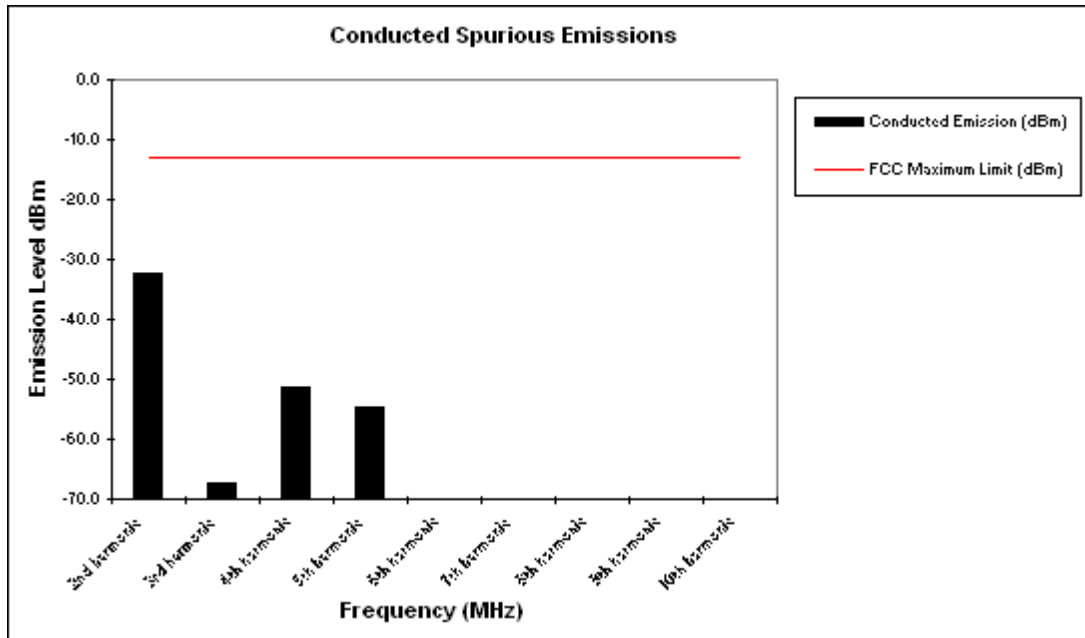

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

CDMA 800 –  
**FIELD STRENGTH OF SPURIOUS EMISSIONS**

CFR Part 2.1053, 22.917, 24.238

**Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

After all the spurious emissions were investigated and reported, the equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.


The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

**Measurement Results**

Attached

**Measurement Results**  
**Modulation: CDMA 800**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-59.2	-61.1
3rd harmonic	-13	-56.2	-56.3
4th harmonic	-13	-53.1	-54.9
5th harmonic	-13	-53.0	-52.9
6th harmonic	-13	-50.6	-50.6
7th harmonic	-13	-46.4	-46.4
8th harmonic	-13	-44.4	-44.5
9th harmonic	-13	-44.3	-44.4
10th harmonic	-13	-44.9	-44.5

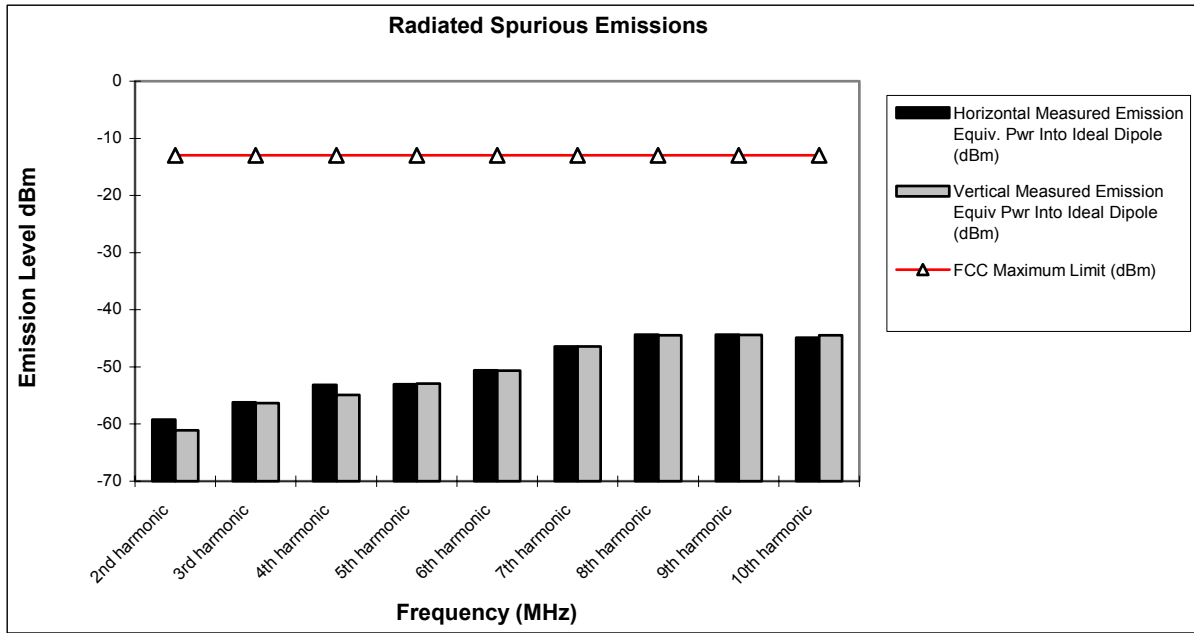

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

## FREQUENCY STABILITY

CFR Part 2.1055, 22.355, 24.235

### **Measurement Procedure**

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured.

### **Measurement Results**


Attached

**Measurement Results**  
**Modulation: CDMA 800**

**Frequency Stability**

**Mode:** CDMA 800      **Operating Frequency:** 836.52 MHz  
**Channel:** 384      **Deviation Limit (PPM):** 0.359ppm (+/-300 Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	17.90	0.021	100%	13.80
-20 C	-11.50	-0.014	100%	13.80
-10 C	12.30	0.015	100%	13.80
0 C	11.40	0.014	100%	13.80
10 C	17.90	0.021	100%	13.80
20 C	24.30	0.029	100%	13.80
30 C	22.60	0.027	100%	13.80
40 C	19.50	0.023	100%	13.80
50 C	21.27	0.025	100%	13.80
60 C	17.60	0.021	100%	13.80
20 C	37.05	0.044	Battery Endpoint	10.00

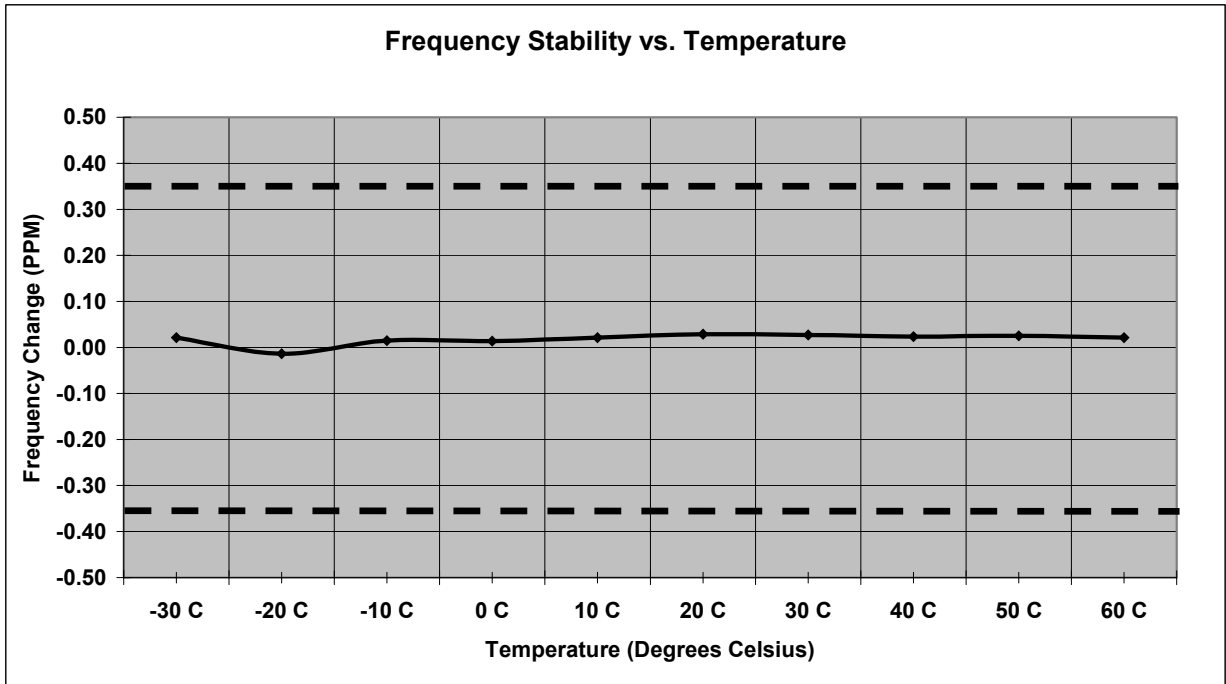

## FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

CFR Part 15.109

### **Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.


Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) -  
Amplifier Gain (dB) + Antenna Correction Factor (1/m)

### **Measurement Results**

Attached

**Measurement Results**  
**Modulation: CDMA 800**

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
932.6300	46	*	29.4
Local Oscillator	54	43.8	38.6
2nd harmonic	54	43.8	37.2
3rd harmonic	54	37.7	35.9
4th harmonic	54	38.0	43.0
5th harmonic	54	40.1	40.1

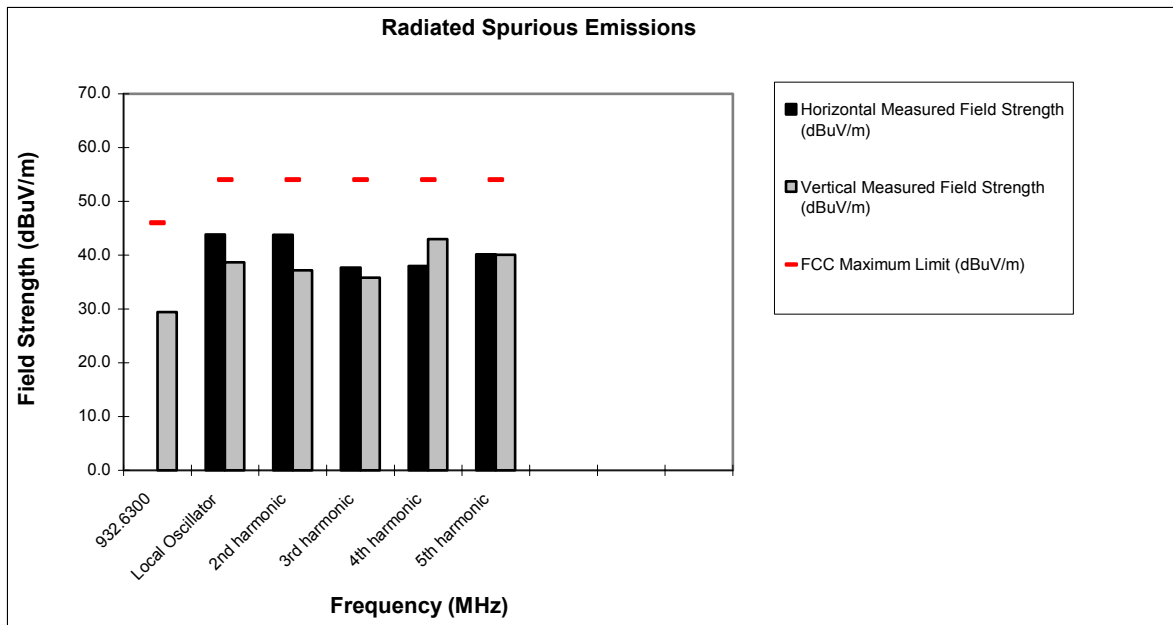


Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low and high channels.

**Appendix A – Radiated Emissions Test Setup Photos**

Note: Photos are representative of the test house setup used.

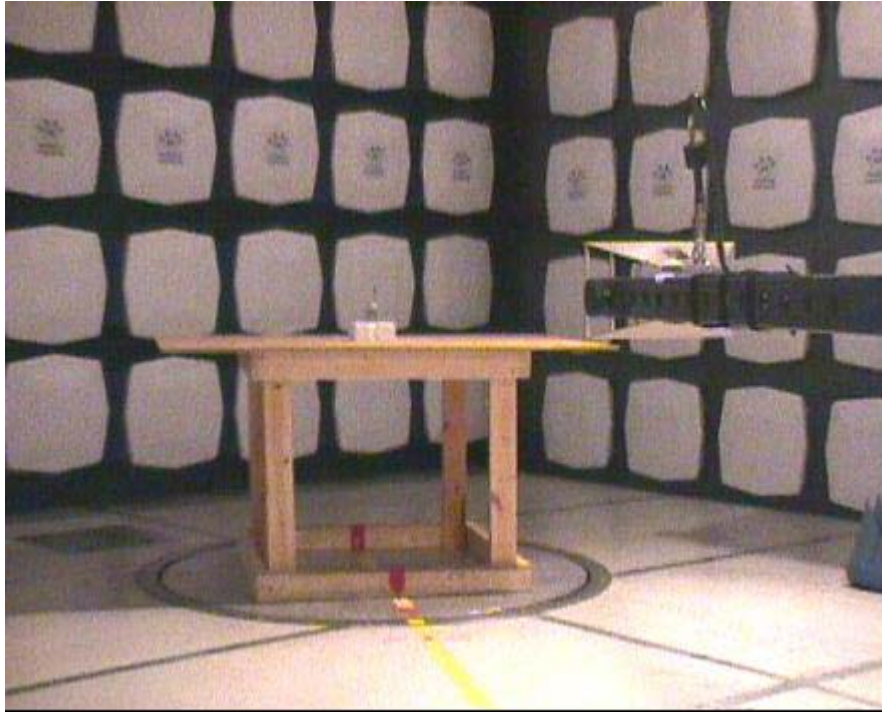

A.1 Radiated Emissions Measurement

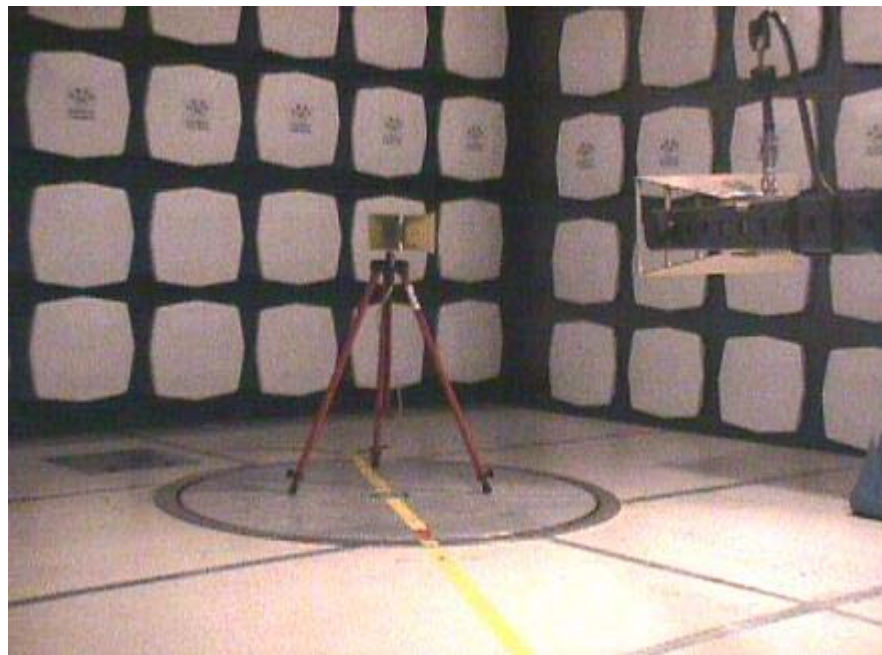

A.2 Substitution Measurement

**End of Test Report**