



MOTOROLA

PERSONAL COMMUNICATIONS SECTOR

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 11242-1

Report Date – June 16, 2003

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Michael E. Hill

Title: Senior Electrical Engineer

Date: 6/16/03

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



Table of Contents

| Description | Page |
|---|------|
| Test Report Details | 3 |
| Applicable Standards | 3 |
| Summary of Testing | 4 |
| General and Special Conditions | 4 |
| Equipment and Cable Configurations | 4 |
| Measuring Equipment and Calibration Information | 5 |
| Measurement Procedures and Data | |
| RF Power Output | 6 |
| Radiated Power (ERP) | 7 |
| Occupied Bandwidth | 8 |
| GSM 850 Mid Band Plot | 9 |
| GSM 850 Lower Band Edge | 9 |
| GSM 850 Upper Band Edge | 10 |
| GSM 1900 Mid Band Plot | 11 |
| GSM 1900 Lower Band Edge | 11 |
| GSM 1900 Upper Band Edge | 12 |
| Spurious Emissions at Antenna Terminals | 13 |
| GSM 850 Tabular and Graphical Data | 14 |
| GSM 850 Cellular Base Station Frequency Range Plot | 15 |
| GSM 1900 Tabular and Graphical Data | 16 |
| Field Strength of Spurious Emissions | 17 |
| GSM 850 Tabular and Graphical Data | 18 |
| GSM 1900 Tabular and Graphical Data | 19 |
| Frequency Stability | 20 |
| GSM 850 Tabular and Graphical Data | 21 |
| GSM 1900 Tabular and Graphical Data | 22 |
| Field Strength of Spurious Emissions From Unintentional Radiators | 23 |
| GSM 850 Tabular and Graphical Data | 24 |
| GSM 1900 Tabular and Graphical Data | 25 |
| Appendix A - Radiated Emissions Test Setup Photos | |
| Figure A.1 – Radiated Emissions Measurement | 26 |
| Figure A.2 – Substitution Measurement | 26 |

Test Report Details

Tests Performed By: Motorola Personal Communications Sector
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (561) 739-2179 Fax (561) 739-2131
 Motorola PCS FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: IC3908

Tests Requested By: Motorola Inc.
 Personal Communications Sector
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 850, GSM 1900

Model Number: SUG3039AA

Serial Numbers: L350120022, L350120064, L350120038,
 L350120033

Received Date: June 1, 2003

Testing Start Date: June 1, 2003

Testing Complete Date: June 15, 2003

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart B – Unintentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS), RSS-132 (800 MHz GSM)

Summary of Testing

| Test # | Test Name | Pass/Fail |
|--------|---|-----------|
| 1 | RF Power Output | NA |
| 2 | ERP (Effective Radiated Power) | NA |
| 3 | Modulation Characteristics | Pass |
| 4 | Occupied Bandwidth | Pass |
| 5 | Spurious Emissions at Antenna Terminal | Pass |
| 6 | Field Strength of Spurious Emissions | Pass |
| 7 | Frequency Stability | Pass |
| 8 | Field Strength of Spurious Emissions from Unintentional Radiators | Pass |

| Test # | Test Name | Margin with respect to the Limit |
|--------|---|----------------------------------|
| 1 | RF Power Output | NA |
| 2 | ERP (Effective Radiated Power) | NA |
| 3 | Modulation Characteristics | NA |
| 4 | Occupied Bandwidth | See Plots |
| 5 | Spurious Emissions at Antenna Terminal | 12 dB |
| 6 | Field Strength of Spurious Emissions | 17.8 dB |
| 7 | Frequency Stability | 48.2 Hz |
| 8 | Field Strength of Spurious Emissions from Unintentional Radiators | Noise Floor |

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

| | <u>Description</u> | | | |
|-------------------|-----------------------|-------------|------------|------------|
| Rohde & Schwarz | EMI Test Receiver | ESI26 | 838386/010 | 4/29/2004 |
| Hewlett Packard | EMC Analyzer | E7405 | US39440219 | 4/4/2004 |
| Hewlett Packard | RF Amplifier | 8347A | 3307A01225 | 9/17/2003 |
| Hewlett Packard | Pre-Amplifier | 8449B | 3008A00535 | 10/11/2003 |
| ETS | DRG Horn Antenna | 3115 | 6222 | 9/30/2003 |
| A.H. Systems Inc. | DRG Horn Antenna | SAS-200/571 | 265 | 4/29/2004 |
| ETS | Log-Periodic Antenna | 3148 | 1189 | 4/29/2004 |
| ETS | Biconical Antenna | 3110B | 3369 | 4/29/2004 |
| ETS | Biconical Antenna | 3110B | 3370 | 10/25/2003 |
| Compliance Design | Biconical Antenna | B100 | 385 | 7/16/2003 |
| Compliance Design | Biconical Antenna | B200 | 312 | 7/22/2003 |
| Compliance Design | Biconical Antenna | B300 | 321 | 7/22/2003 |
| Attenuator | Weinschel | AS-6 | 6675 | 10/3/2003 |
| Attenuator | Weinschel | AS-6 | 6677 | 10/3/2003 |
| Rohde & Schwarz | Mobile Test Set | CMD 80 | DE29008 | N/A |
| Hewlett Packard | Signal Generator | 83623B | 3844A01195 | 5/20/2004 |
| Thermotron | Environmental Chamber | S-4 | 31580 | 12/19/2003 |
| Hewlett Packard | Pre-Amplifier | 8347A | | |
| Hewlett Packard | Pre-Amplifier | 8447F | 2805A03419 | 5/19/2004 |
| Agilent | Power Meter | EE4418B | | 11/26/2003 |
| Agilent | Sensor | E4412B | | 11/23/2004 |

All equipment is on a one-year calibration cycle.

Measurement Procedures and Data

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of a HPE4406A Vector Signal Analyzer through a 10dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR Part 2.1046

Measurement Results

* Data supplied by SAR Lab

GSM 800

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 824.04 | 32.40 |
| 836.52 | 32.40 |
| 848.97 | 32.41 |

GSM 1900

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 1850.04 | 29.56 |
| 1878.98 | 29.55 |
| 1909.92 | 29.51 |

RADIATED (ERP)

Measurement Procedure

The phone was tested in a 16' cubical anechoic chamber with a 2-axis position system that permits taking spherical scans of the EUT's radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for Analog three frequencies (824.04, 836.52, and 848.97), GSM 850 three frequencies (824.04, 836.52, and 848.97 MHz), and GSM 1900 three frequencies (1850.04, 1879.98, and 1909.92 MHz) with antenna stubby.

GSM measurements were made with the phone placed in a call using the HP8922M mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Gigatronics 8542C power meter in "Burst Avg" mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. The max radiated power results for the IHDT56DK1 follows, as EIRP in dBm. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

Measurement Results

GSM 850:

| | |
|-------------|-----------|
| 824.04 MHz: | 31.95 dBm |
| 836.52 MHz: | 32.46 dBm |
| 848.97 MHz: | 32.27 dBm |

GSM 1900

| | |
|-------------|-----------|
| 1850.2 MHz: | 32.99 dBm |
| 1880.0 MHz: | 32.56 dBm |
| 1909.8 MHz: | 32.41 dBm |

For all measurements, calibration was performed via gain substitution with a half-wave dipole.

Max EIRP in GSM 850 is 32.46 dBm (**ERP is 30.36 dBm**)
 Max EIRP in GSM 1900 is **32.99 dBm**

OCCUPIED BANDWIDTH


CFR Part 2.1049, 24.238, 22.917

Measurement Procedure


The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. A fully charged battery was used for the supply voltage.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.


Measurement Results – GSM 850

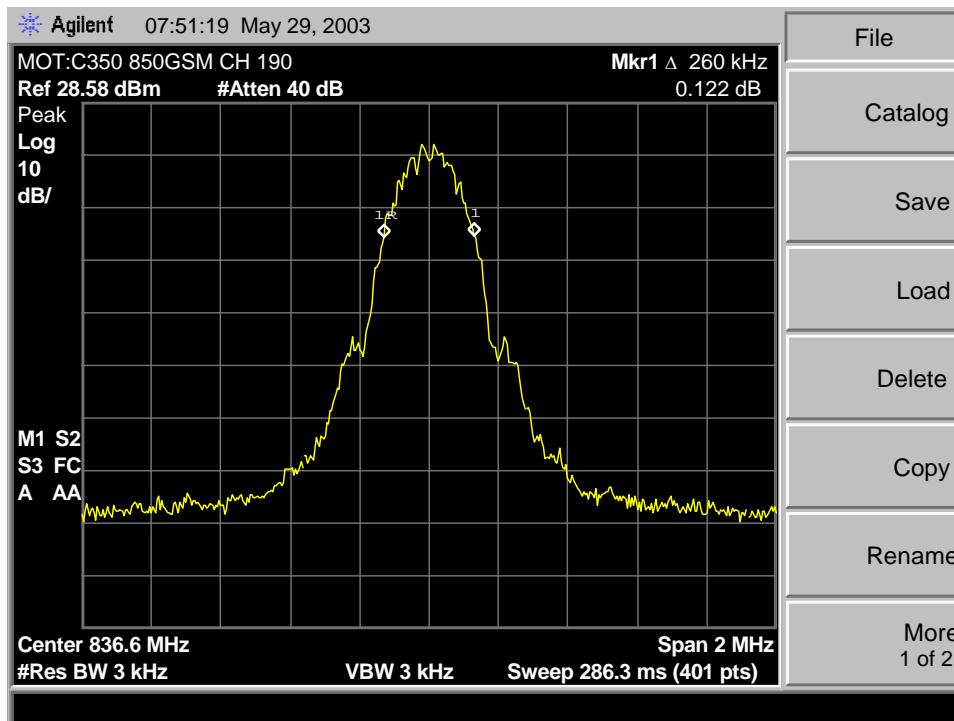


850 GSM Occupied Band

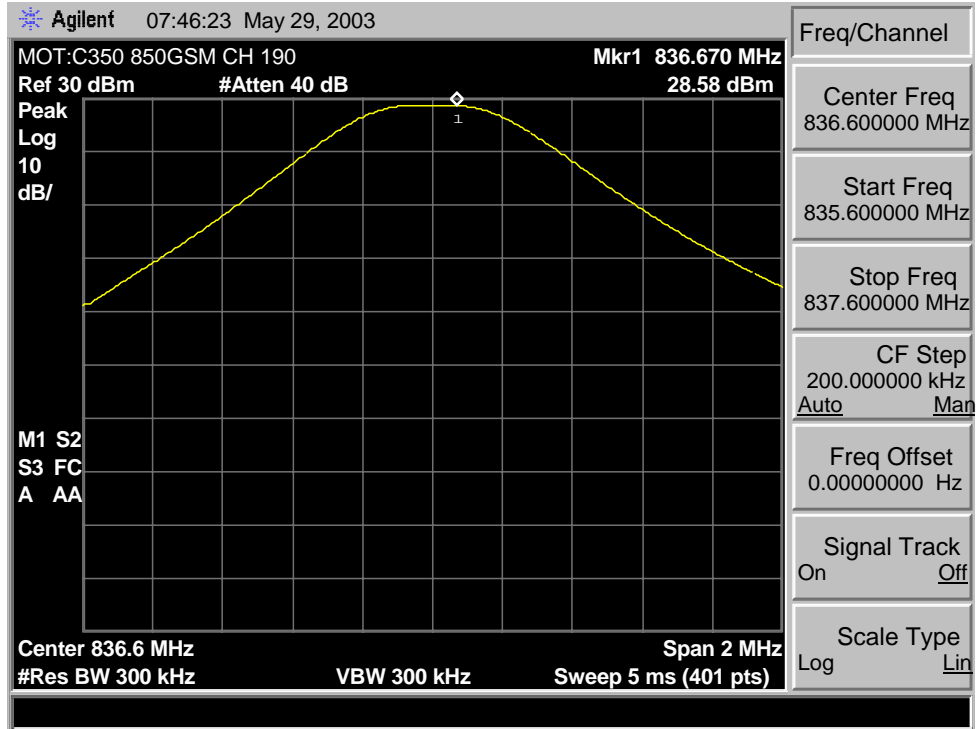

850 GSM Reference Plot

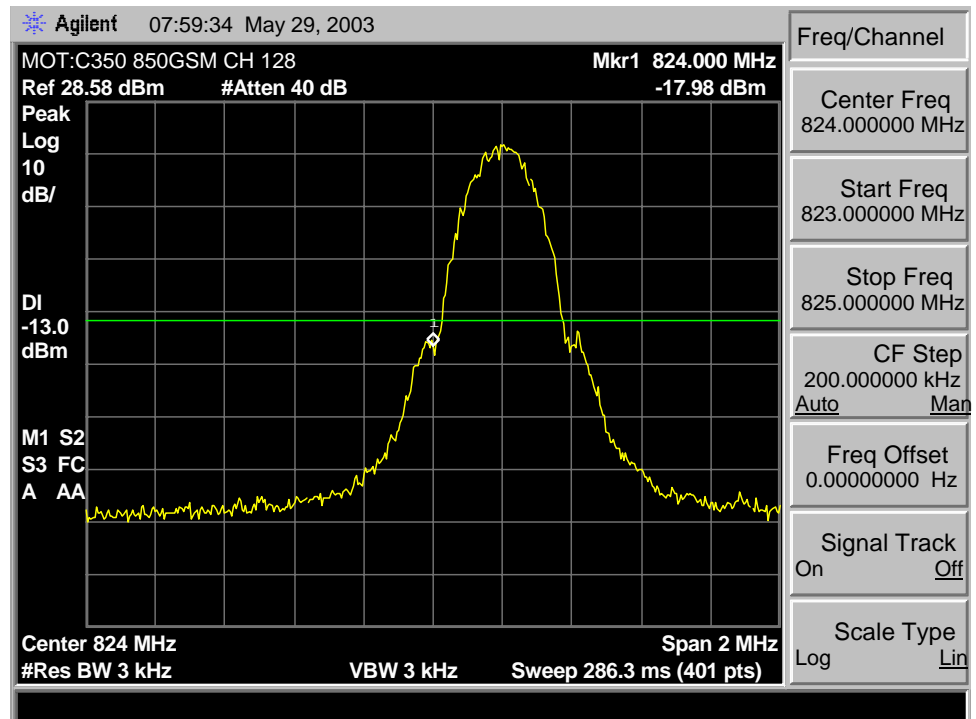


850 GSM Lower Band Edge

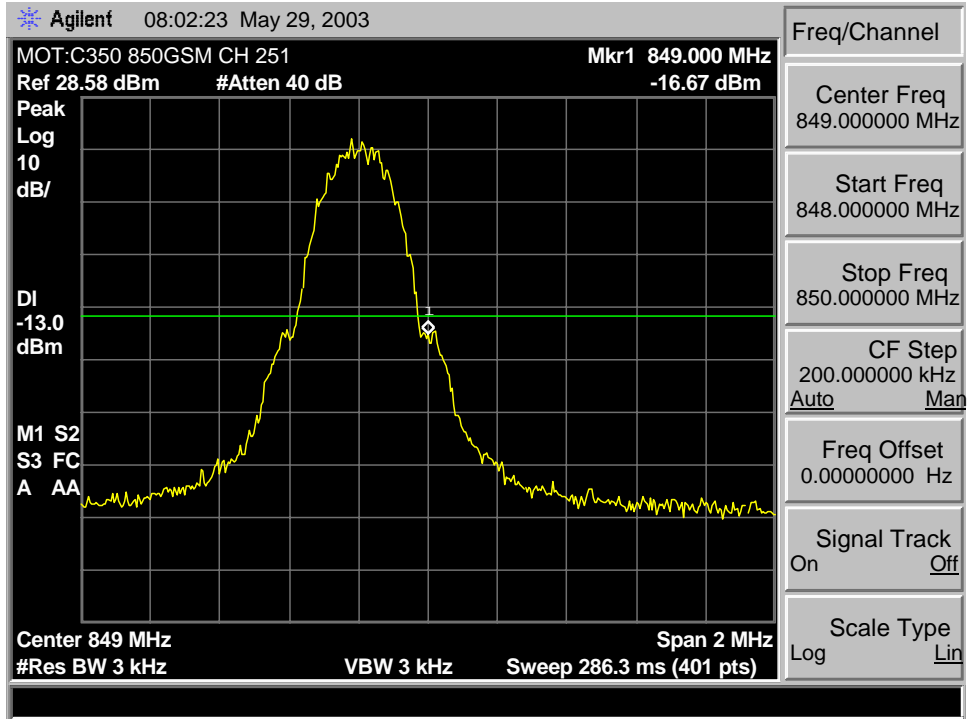


850 GSM Upper Band Edge


Measurement Results – GSM 1900

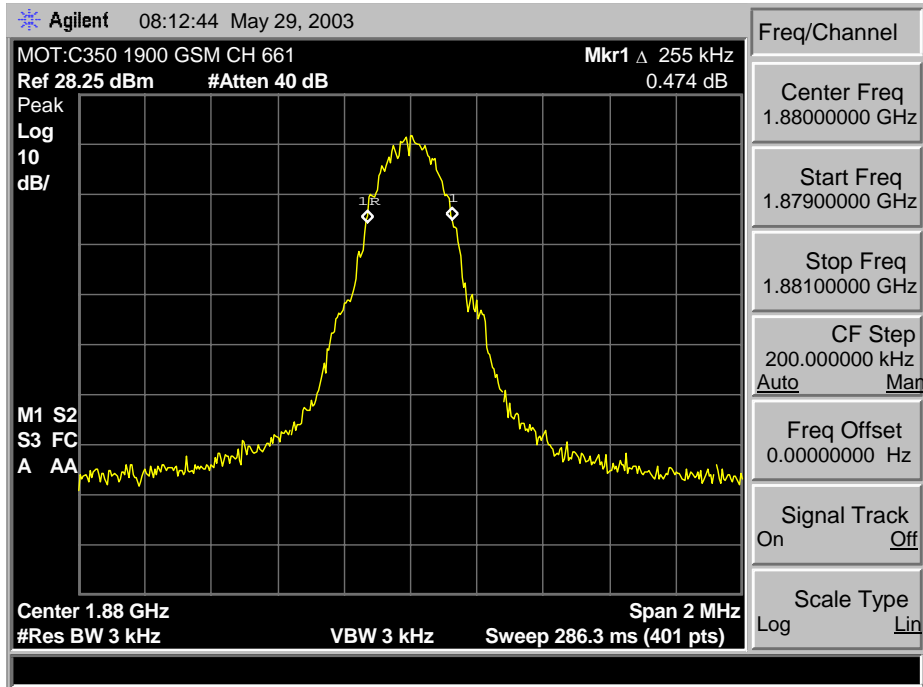


1900 GSM Occupied Band

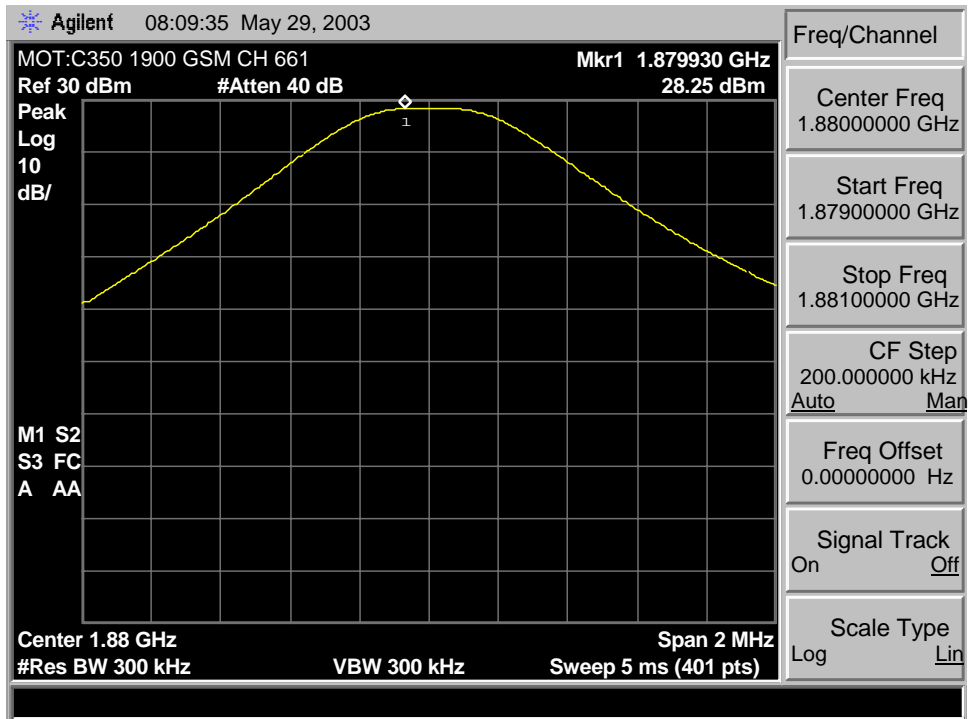

1900 GSM Reference Plot

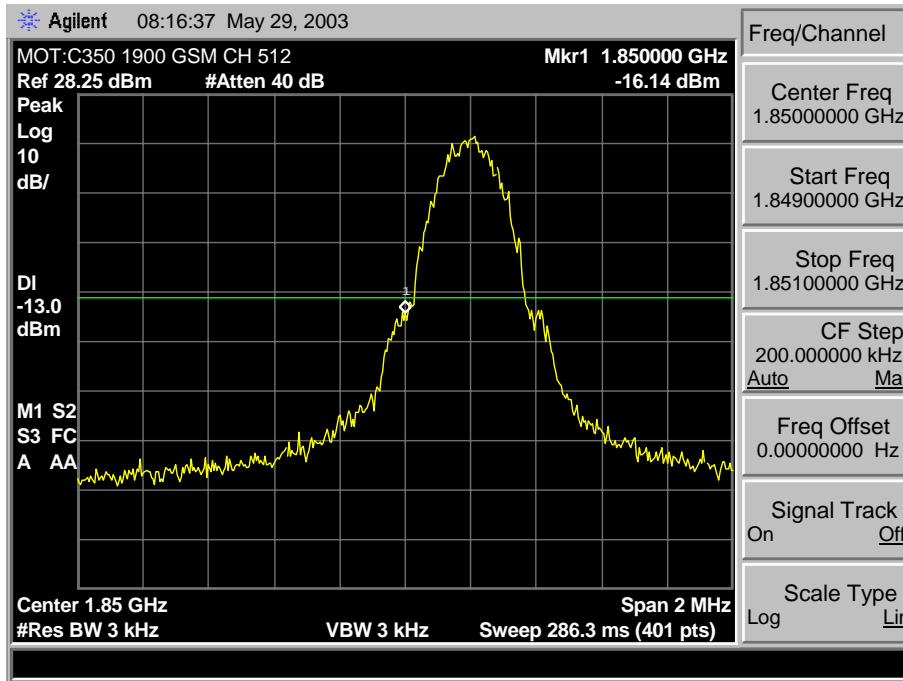

1900 GSM Lower Band Edge

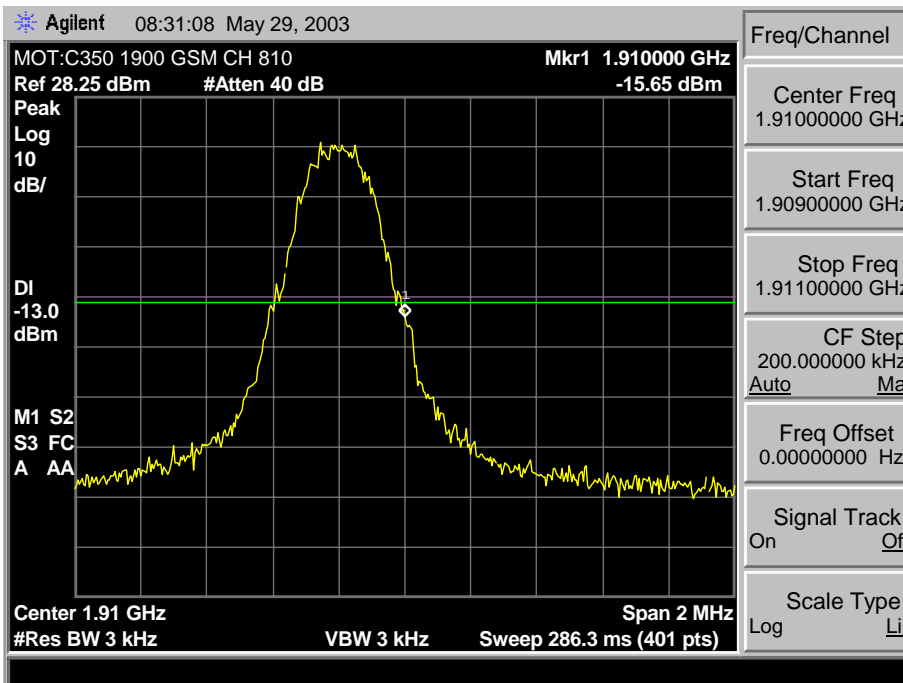

1900 GSM Upper Band Edge

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

CFR Part 2.1051, 22.917, 24.238

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

Measurements were made at the middle channel within the frequency band and within the base station frequency range (869-894 MHz) for cellular.


Measurement Results

Attached

Measurement Results **Modulation: GSM 850**

Conducted Spurious and Harmonic Emissions

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic | -13 | -37.0 |
| 3rd harmonic | -13 | -32.6 |
| 4th harmonic | -13 | -38.9 |
| 5th harmonic | -13 | -39.4 |
| 6th harmonic | -13 | -43.5 |
| 7th harmonic | -13 | -52.6 |
| 8th harmonic | -13 | -49.7 |
| 9th harmonic | -13 | -48.5 |
| 10th harmonic | -13 | -52.4 |

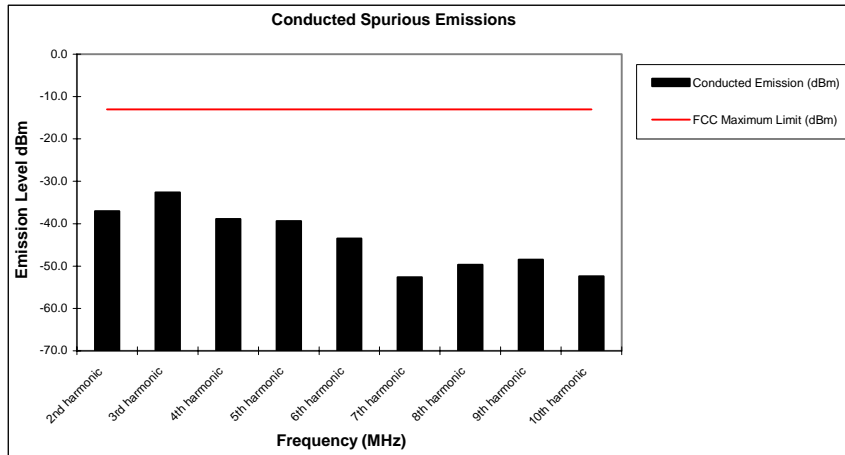


Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

Measurement Results
Modulation: GSM 1900

Conducted Spurious and Harmonic Emissions

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic | -13 | -26.7 |
| 3rd harmonic | -13 | -25.0 |
| 4th harmonic | -13 | -27.4 |
| 5th harmonic | -13 | -34.2 |
| 6th harmonic | -13 | -38.7 |
| 7th harmonic | -13 | -38.6 |
| 8th harmonic | -13 | -45.6 |
| 9th harmonic | -13 | * |
| 10th harmonic | -13 | -52.4 |

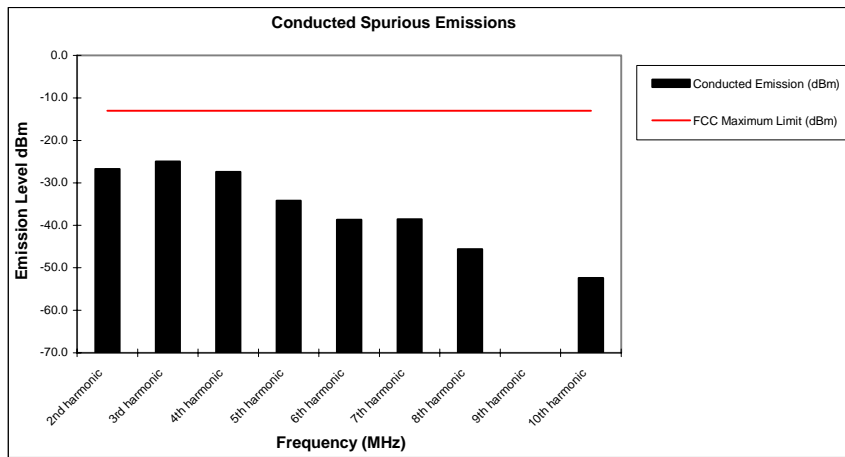

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 22.917, 24.238

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.


Measurement Results

Attached

Measurement Results
Modulation: GSM 850

Receiver Radiated Spurious Emissions

| Frequency (MHz) | FCC Maximum Limit (dBuV/m) | Horizontal Measured Field Strength (dBuV/m) | Vertical Measured Field Strength (dBuV/m) |
|------------------|----------------------------|---|---|
| Local Oscillator | 54 | * | * |
| 2nd harmonic | 54 | * | * |
| 3rd harmonic | 54 | * | * |
| 4th harmonic | 54 | * | * |
| 5th harmonic | 54 | * | * |
| | 54 | * | * |
| | 54 | * | * |
| | 54 | * | * |
| | 54 | * | * |
| | 54 | * | * |

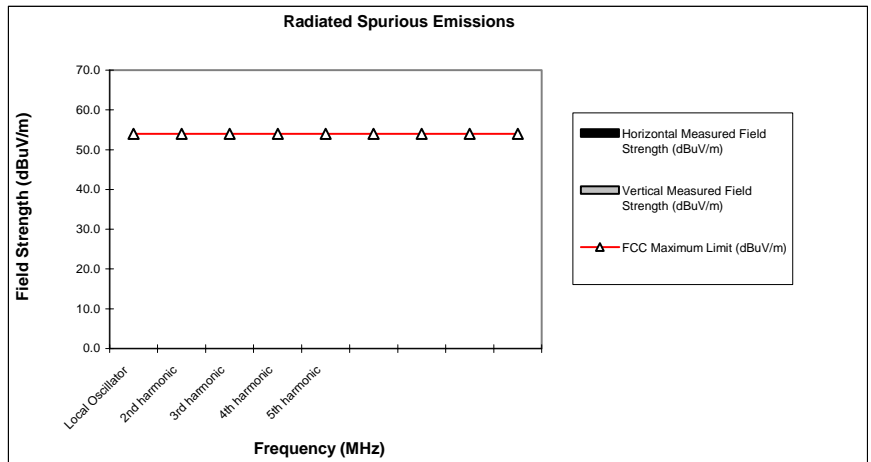


Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

Radiated Spurious and Harmonic Emissions

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|---|--|
| 2nd harmonic | -13 | * | -38.5 |
| 3rd harmonic | -13 | -32.5 | * |
| 4th harmonic | -13 | -36.5 | -34.6 |
| 5th harmonic | -13 | * | -30.8 |
| 6th harmonic | -13 | * | * |
| 7th harmonic | -13 | -38.6 | -46.1 |
| 8th harmonic | -13 | * | -38.5 |
| 9th harmonic | -13 | * | -48.2 |
| 10th harmonic | -13 | * | * |

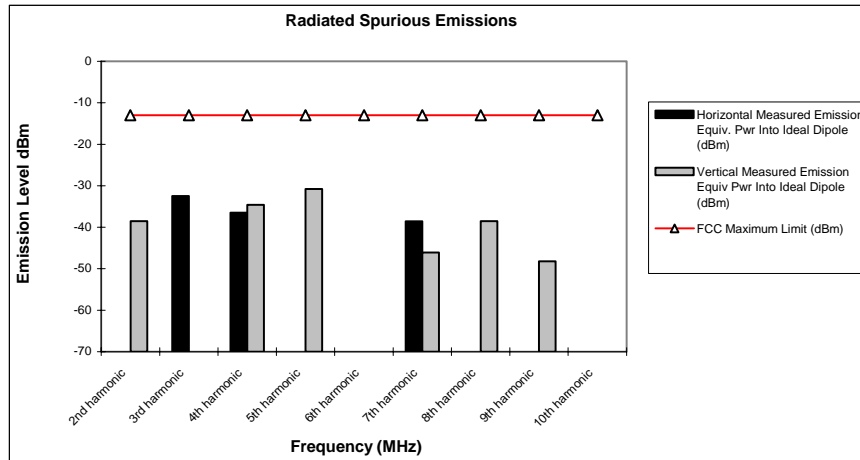

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Measurement Results

Modulation: GSM 1900

Receiver Radiated Spurious Emissions

| Frequency (MHz) | FCC Maximum Limit (dBuV/m) | Horizontal Measured Field Strength (dBuV/m) | Vertical Measured Field Strength (dBuV/m) |
|------------------|----------------------------|---|---|
| Local Oscillator | 54 | * | * |
| 2nd harmonic | 54 | * | * |
| 3rd harmonic | 54 | * | * |
| 4th harmonic | 54 | * | * |
| 5th harmonic | 54 | * | * |
| | | | |
| | | | |
| | | | |
| | | | |

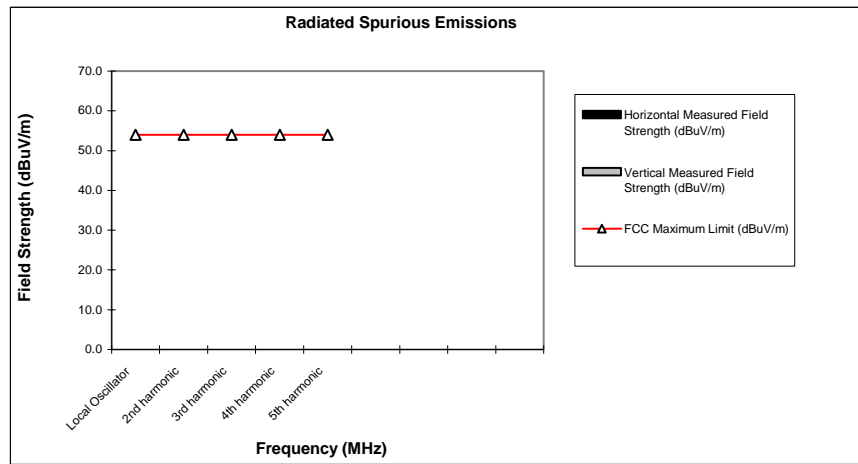


Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

Conducted Spurious and Harmonic Emissions

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic | -13 | -26.7 |
| 3rd harmonic | -13 | -25.0 |
| 4th harmonic | -13 | -27.4 |
| 5th harmonic | -13 | -34.2 |
| 6th harmonic | -13 | -38.7 |
| 7th harmonic | -13 | -38.6 |
| 8th harmonic | -13 | -45.6 |
| 9th harmonic | -13 | * |
| 10th harmonic | -13 | -52.4 |

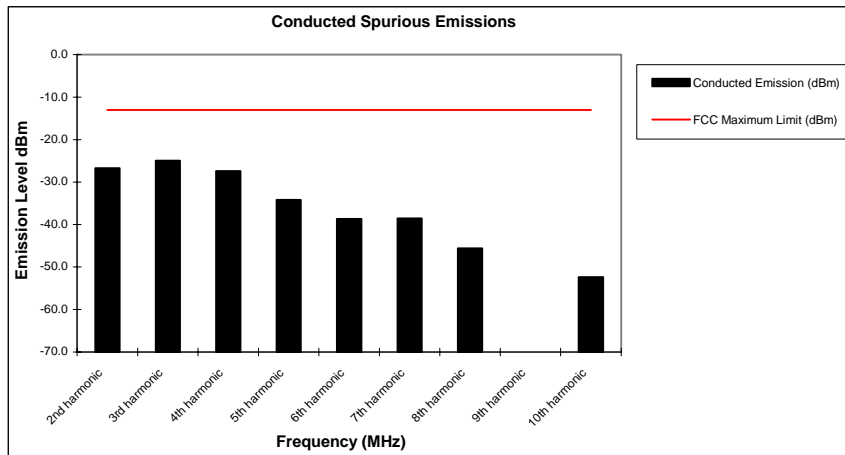

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

FREQUENCY STABILITY

CFR Part 2.1055, 22.355, 24.235

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30°C to $+60^{\circ}\text{C}$ and at intervals of 10°C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results
Modulation: GSM 850

Frequency Stability

Mode: GSM 850 **Operating Frequency:** 836.6 MHz
Channel: 190 **Deviation Limit (PPM):** 0.1 ppm

| Temperature C | Frequency Error HZ | Frequency Error (PPM) | Voltage (%) | Voltage (VDC) |
|------------------|-----------------------|--------------------------|------------------|------------------|
| -30 C | 32.11 | 0.017 | 100% | 3.60 |
| -20 C | 17.24 | 0.009 | 100% | 3.60 |
| -10 C | -34.58 | -0.018 | 100% | 3.60 |
| 0 C | 24.28 | 0.013 | 100% | 3.60 |
| 10 C | 21.87 | 0.012 | 100% | 3.60 |
| 20 C | 22.62 | 0.012 | 100% | 3.60 |
| 30 C | 15.87 | 0.008 | 100% | 3.60 |
| 40 C | 12.65 | 0.007 | 100% | 3.60 |
| 50 C | 31.35 | 0.017 | 100% | 3.60 |
| 60 C | 44.31 | 0.024 | 100% | 3.60 |
| 20 C | 35.49 | 0.019 | Battery Endpoint | 3.30 |

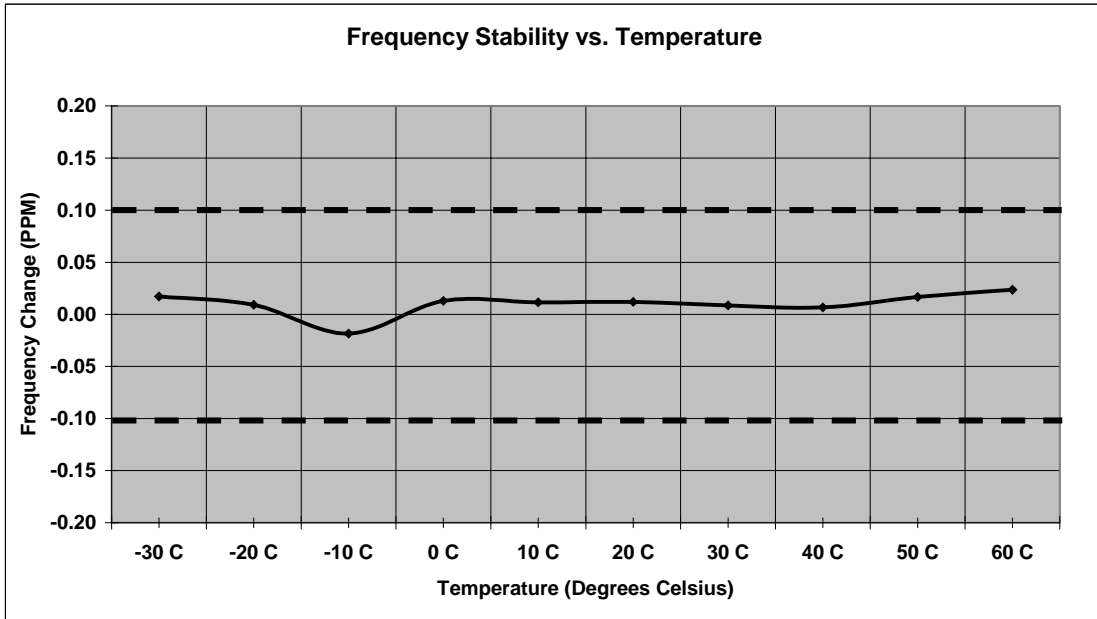


Measurement Results
Modulation: GSM1900

Frequency Stability

Mode: GSM 1900 **Operating Frequency:** 1880.0 MHz
Channel: 661 **Deviation Limit (PPM):** 0.1 ppm

| Temperature C | Frequency Error HZ | Frequency Error (PPM) | Voltage (%) | Voltage (VDC) |
|------------------|-----------------------|--------------------------|------------------|------------------|
| -30 C | 38.80 | 0.021 | 100% | 3.60 |
| -20 C | -23.57 | -0.013 | 100% | 3.60 |
| -10 C | 42.00 | 0.022 | 100% | 3.60 |
| 0 C | 38.52 | 0.020 | 100% | 3.60 |
| 10 C | 35.01 | 0.019 | 100% | 3.60 |
| 20 C | 42.88 | 0.023 | 100% | 3.60 |
| 30 C | 35.23 | 0.019 | 100% | 3.60 |
| 40 C | 48.21 | 0.026 | 100% | 3.60 |
| 50 C | 27.91 | 0.015 | 100% | 3.60 |
| 60 C | 22.54 | 0.012 | 100% | 3.60 |
| 20 C | 35.39 | 0.019 | Battery Endpoint | 3.30 |

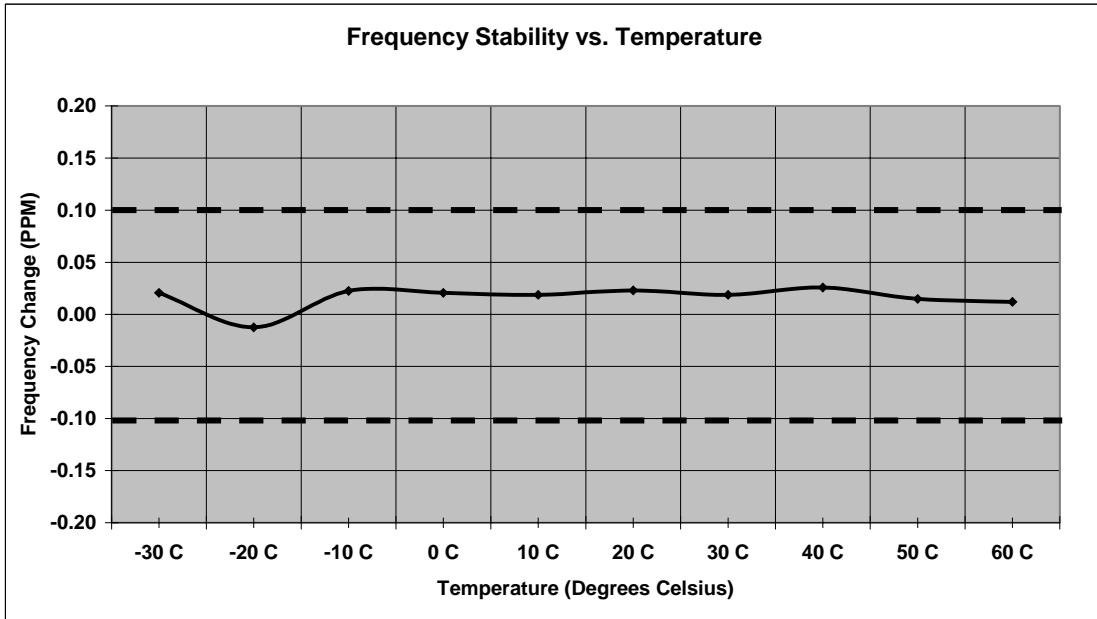

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

CFR Part 15.109

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) -
Amplifier Gain (dB) + Antenna Correction Factor (1/m)

Measurement Results

Attached


Measurement Results **Modulation: GSM 850**

No discernible unintentional emissions above the noise floor.


Measurement Results **Modulation: GSM 1900**

No discernible unintentional emissions above the noise floor.

Appendix A – Radiated Emissions Test Setup Photos

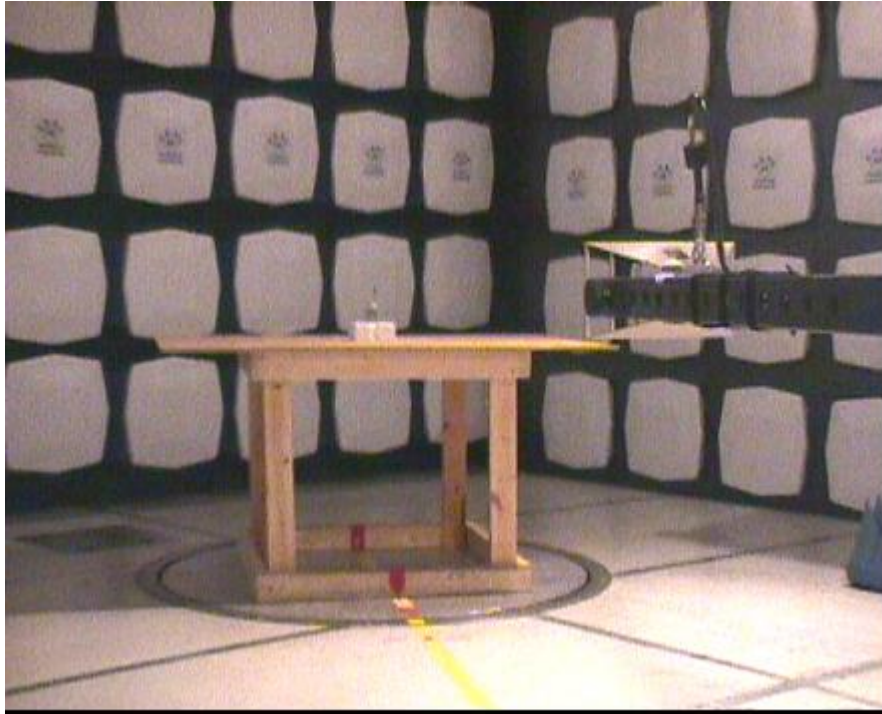

A.1 Radiated Emissions Measurement

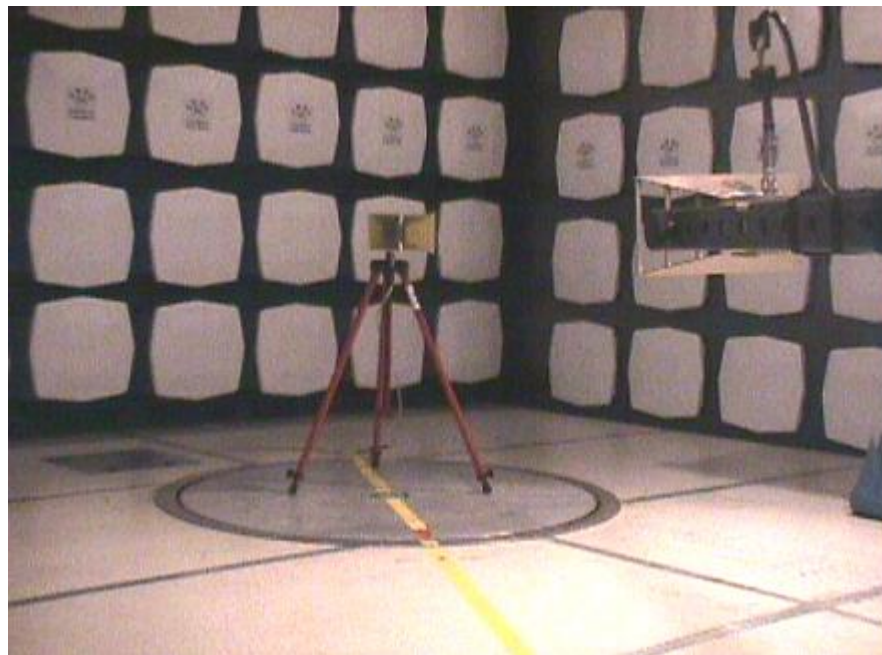

A.2 Substitution Measurement

End of Test Report