



MOTOROLA

PERSONAL COMMUNICATIONS SECTOR

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

Class II Permissive Change EMC Test Report

Test Report Number – 12618-2 Revised

Report Date – February 17, 2004

The following pages update the reported EMC characteristics for FCC ID: IHDT56DW1.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

A handwritten signature in blue ink that reads "Michael E. Hill".

Signature

Name: Michael E. Hill

Title: Senior Electrical Engineer

Date : 2004-02-17

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 22.917, 24.238

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

Instrument Settings

Resolution Bandwidth: 1 MHz (PCS Band), 30 kHz (Cellular Band)
Video Bandwidth: \geq RBW
Detector: Peak
Sweep: Auto – Cal
Trace: Max Hold


Measurement Results

Attached

Measurement Results
Modulation: GSM 850

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-34.7	-32.4
3rd harmonic	-13	-23.7	-28.2
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

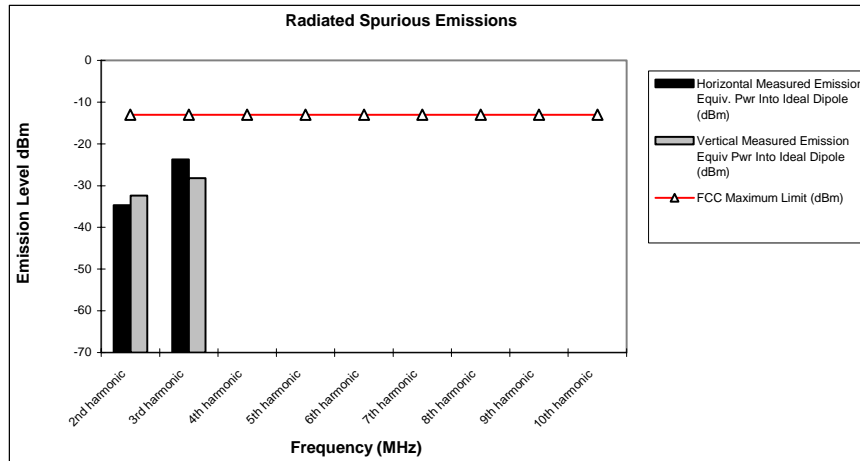


Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Measurement Results
Modulation: GSM 1900

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-34.7	-32.4
3rd harmonic	-13	-23.7	-28.2
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

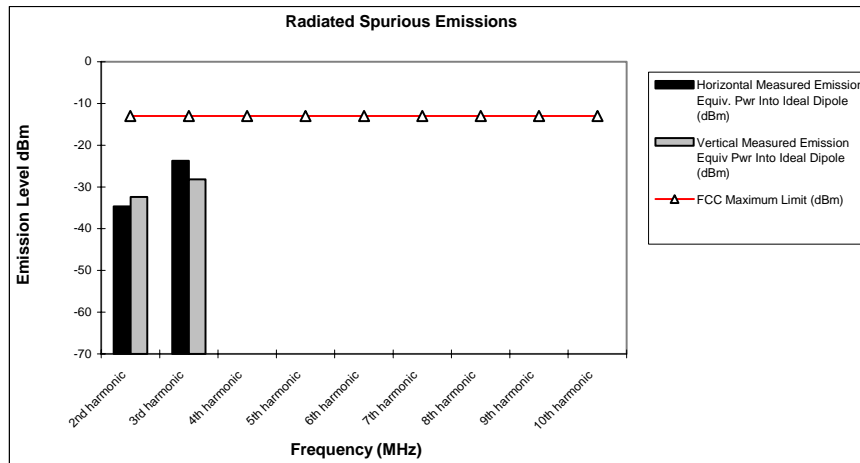

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.