



Exhibit 11: SAR Test Report IHDT56ED1

Date of test: 21 – 30 July, 2004
Date of Report: 24 August, 2004

Laboratory: Motorola Personal Communications Sector Product Safety & Compliance Laboratory
 600 N. US Highway 45
 Room: MW113
 Libertyville, Illinois 60048

Test Responsible: Steven Hauswirth
 Principal Staff Engineer

Accreditation: This laboratory is accredited to ISO/IEC 17025-1999 to perform the following tests:



| | |
|--|---|
| <p><u>Tests:</u> Electromagnetic Specific Absorption Rate</p> <p>Simulated Tissue Preparation RF Power Measurement</p> | <p><u>Procedures:</u> ANSI/IEEE C95.1-1992, 1999 (SAR) IEEE C95.3-1991 IEEE P1528 (<i>DRAFT</i>) FCC OET Bulletin 65 (<i>including Supplements A, B, C</i>) Australian Communications Authority Radio Communications (Electromagnetic Radiation – Human Exposure) Standard 1999 CENELEC EN 50361 (2001) APP-0247 DOI-0876, 0900, 0902, 0904, 0915</p> |
|--|---|

On the following products or types of products:
 Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

A2LA certificate #1651-01

Statement of Compliance: Motorola declares under its sole responsibility that portable cellular telephone FCC ID IHDT56ED1 to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093). It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2004

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. INTRODUCTION..... 3

2. DESCRIPTION OF THE DEVICE UNDER TEST 3

2.1 Antenna description.....3

2.2 Device description.....3

3. TEST EQUIPMENT USED..... 3

3.1 Dosimetric System3

3.2 Additional Equipment.....4

4. ELECTRICAL PARAMETERS OF THE TISSUE SIMULATING LIQUID 4

5. SYSTEM ACCURACY VERIFICATION..... 5

6. TEST RESULTS 6

6.1 Head Adjacent Test Results.....6

6.1.1 Head Adjacent Configuration with Phone Flip Closed.....8

6.1.2 Head Adjacent Configuration with Phone Flip Open9

6.2 Body Worn Test Results10

APPENDIX 1: SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION 12

APPENDIX 2: SAR DISTRIBUTION PLOTS FOR PHANTOM HEAD ADJACENT USE 13

APPENDIX 3: SAR DISTRIBUTION PLOTS FOR BODY WORN CONFIGURATION..... 18

APPENDIX 4: PROBE CALIBRATION CERTIFICATE 20

APPENDIX 5: DIPOLE CHARACTERIZATION CERTIFICATE..... 21

APPENDIX 6: MEASUREMENT UNCERTAINTY BUDGET..... 22

APPENDIX 7: PHOTOGRAPHS OF DEVICE UNDER TEST 25

1 Introduction

The Motorola Personal Communications Sector Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of portable cellular phone (FCC ID IHDT56ED1). The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with FCC OET Bulletin 65 Supplement C 01-01.

2 Description of the Device Under Test

2.1 Antenna description

| | | |
|----------------------|-------------------|------|
| Type | Internal | |
| Location | Top Rear of Phone | |
| Dimensions | Length | 30mm |
| | Width | 15mm |
| Configuration | PIFA | |

2.2 Device description

| | | | | | | | | | |
|---|-----------------------------------|-----------------|-------------------|-----------------------|-----------------|-----------------|-------------------|-----------------------|-------------------|
| FCC ID Number | IHDT56ED1 | | | | | | | | |
| Serial number | 1457601 - 1457602 | | | | | | | | |
| Mode(s) of Operation | GSM 850 | GSM 900 | GSM 1800 | GSM 1900 | GPRS 850 | GPRS 900 | GPRS 1800 | GPRS 1900 | Blue Tooth |
| Modulation Mode(s) | GSM | GSM | GSM | GSM | GSM | GSM | GSM | GSM | Blue Tooth |
| Maximum Output Power Setting | 33.50 dBm | 33.50 dBm | 30.50 dBm | 30.50 dBm | 33.50 dBm | 33.50 dBm | 30.50 dBm | 30.50 dBm | 4.00 dBm |
| Duty Cycle | 1:8 | 1:8 | 1:8 | 1:8 | 2:8 | 2:8 | 2:8 | 2:8 | 1:1 |
| Transmitting Frequency Rang(s) | 824.2-848.8 MHz | 880.2-914.8 MHz | 1710.2-1784.8 MHz | 1850.20 – 1909.80 MHz | 824.2-848.8 MHz | 880.2-914.8 MHz | 1710.2-1784.8 MHz | 1850.20 – 1909.80 MHz | 2400 - 2483.5 MHz |
| Production Unit or Identical Prototype (47 CFR §2.908) | Identical Prototype | | | | | | | | |
| Device Category | Portable | | | | | | | | |
| RF Exposure Limits | General Population / Uncontrolled | | | | | | | | |

3 Test Equipment Used

3.1 Dosimetric System

The Motorola Personal Communications Sector Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy3™ v3.1d) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall RSS uncertainty of the measurement system is ±11.7% (K=1) with an expanded uncertainty of ±23.0% (K=2). The measurement

uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg. The list of calibrated equipment used for the measurements is shown below.

| Description | Serial Number | Cal Due Date |
|---------------------------------|---------------|--------------|
| DASY3 DAE V1 | SN437 | 16-Mar-05 |
| E-Field Probe ET3DV6 | SN1398 | 16-Feb-05 |
| Dipole Validation Kit, D900V2 | SN080 | 2-Apr-05 |
| S.A.M. Phantom used for 800MHz | TP-1153 | |
| Dipole Validation Kit, D1800V2 | SN251TR | 2-Apr-05 |
| S.A.M. Phantom used for 1900MHz | TP-1159 | |

3.2 Additional Equipment

| Description | Serial Number | Cal Due Date |
|-------------------------------|---------------|--------------|
| Signal Generator HP8648C | 3847A04822 | 6-Feb-05 |
| Power Meter E4419B | GB39511087 | 5-Apr-05 |
| Power Sensor #1 - E9301A | US39211009 | 5-Aug-05 |
| Power Sensor #2 - E9301A | US39210915 | 5-Aug-05 |
| Network Analyzer HP8753ES | US39171846 | 29-Oct-04 |
| Dielectric Probe Kit HP85070B | US99360074 | N/A |

4 Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the HP85070 Dielectric Probe Kit. These values, along with the temperature of the tissue simulate are shown in the table below. The recommended limits for maximum permittivity and minimum conductivity are also shown. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. It is seen that the measured parameters are satisfactory for compliance testing.

| f (MHz) | Tissue type | Limits / Measured | Dielectric Parameters | | |
|---------|-------------|----------------------|-----------------------|----------------|-----------|
| | | | ϵ_r | σ (S/m) | Temp (°C) |
| 835 | Head | Measured, 24-Jul-04 | 42.1 | 0.92 | 19.5 |
| | | Measured, 25-Jul-04 | 41.8 | 0.91 | 19.6 |
| | | Recommended Limits | 41.5 ±5% | 0.90 ±5% | 18-25 |
| | Body | Measured, 25-Jul-04 | 54.6 | 0.98 | 19.7 |
| | | Measured, 29-Jul-04 | 54.6 | 0.98 | 20.0 |
| | | Recommended Limits | 55.2 ±5% | 0.97 ±5% | 18-25 |
| 1880 | Head | Measured, 22-Jul-04 | 38.4 | 1.45 | 19.1 |
| | | Measured, 26-Jul-04 | 38.6 | 1.44 | 19.2 |
| | | Recommended Limits | 40.0 ±5% | 1.40 ±5% | 18-25 |
| | Body | Measured, 25-Jul-04 | 52.0 | 1.59 | 19.4 |
| | | Measured, 26-Jul-04 | 52.0 | 1.59 | 19.0 |
| | | Measured, 30--Jul-04 | 52.2 | 1.58 | 19.0 |
| | | Recommended Limits | 53.3 ±5% | 1.52 ±5% | 18-25 |

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

| Ingredient | 800MHz Head | 800MHz Body | 1900MHz Head | 1900MHz Body |
|------------|-------------|-------------|--------------|--------------|
| Sugar | 57.0 | 44.9 | -- | 30.80 |
| DGBE | -- | -- | 47.0 | -- |
| Water | 40.45 | 53.06 | 52.8 | 68.91 |
| Salt | 1.45 | 0.94 | 0.2 | 0.29 |
| HEC | 1.0 | 1.0 | -- | -- |
| Bact. | 0.1 | 0.1 | -- | -- |

5 System Accuracy Verification

A system accuracy verification of the DASY3 was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within center section of the SAM phantom.

A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR indicated on the dipole certification sheet. These tests were done at 900MHz and/or 1800MHz. These frequencies are within 100MHz of the mid-band frequency of the test device. This is within the allowable window given in Supplement C 01-01 *Appendix D System Verification* section item #5. The test was conducted on the same days as the measurement of the DUT. Recommended limits for maximum permittivity, minimum conductivity are shown in the table below. These come from the Federal Communication Commission, OET Bulletin 65 Supplement C 01-01. The obtained results from the system accuracy verification are displayed in the table below. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ±0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1. SAR values are normalized to 1W forward power delivered to the dipole.

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

| Description | Serial Number | f (MHz) | Conversion Factor | Cal Cert pg # |
|----------------------|---------------|---------|-------------------|---------------|
| E-Field Probe ET3DV6 | SN1398 | 900 | 6.29 | 7 of 8 |
| | | 1800 | 5.04 | 7 of 8 |

| f (MHz) | Description | SAR (W/kg), 1gram | Dielectric Parameters | | Ambient Temp (°C) | Tissue Temp (°C) |
|---------|---------------------------|-------------------|-----------------------|-----------------|-------------------|------------------|
| | | | ϵ_r | σ (S/m) | | |
| 900 | Measured, 24-Jul-04 | 11.2 | 41.3 | 0.98 | 20 | 19.6 |
| | Measured, 25-Jul-04 | 11.1 | 41 | 0.97 | 20 | 19.7 |
| | Measured, 29-Jul-04 | 11.2 | 41.1 | 0.97 | 20 | 20.7 |
| | Recommended Limits | 11.4 | 41.5 ±5% | 0.97 ±5% | 18-25 | 18-25 |
| 1800 | Measured, 21-Jul-04 | 41.1 | 39.5 | 1.37 | 20 | 19.3 |
| | Measured, 22-Jul-04 | 40.8 | 38.8 | 1.34 | 20 | 19.1 |
| | Measured, 25-Jul-04 | 39.2 | 39.5 | 1.36 | 20 | 19.5 |
| | Measured, 26-Jul-04 | 40.1 | 39.1 | 1.36 | 20 | 19.2 |
| | Measured, 30-Jul-04 | 40.5 | 38.8 | 1.35 | 21 | 19.4 |
| | Recommended Limits | 40.7 | 40.0 ±5% | 1.4 ±5% | 18-25 | 18-25 |

6 Test Results

The test sample was operated in a test mode that allows control of the transmitter without the need to place actual phone calls. For the purposes of this test the unit is commanded to test mode and manually set to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in OET Bulletin 65 Supplement C 01-01. Motorola also followed the requirements in Supplement. C / Appendix D: SAR Measurement Procedures, section titled "*Devices Operating Next To A Person's Ear*". These directions state "The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s)."

The DASY v3.1d SAR measurement system specified in section 3.1 was utilized within the intended operations as set by the SPEAG™ setup. The phone was positioned into the measurement configurations using the positioner supplied with the DASY 3.1d SAR measurement system. The measured dielectric constant of the material used for the positioner is less than 2.9 and the loss tangent is less than 0.02 ($\pm 30\%$) at 850MHz. The default settings for the "coarse" and "cube" scans were chosen and use for measurements. The grid spacing of the course scan was set to 15cm as shown in the SAR plots included in appendix 2 and 3. Please refer to the DASY manual for additional information on SAR scanning procedures and algorithms used.


The Cellular Phone (FCC ID IHDT56ED1) has the SNN5669A as the only available battery option. This battery was used to do all of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery.

6.1 Head Adjacent Test Results

To aid in positioning repeatability, the ear reference line of the device and the axis reference line of the device have been physically added using a non-metallic marker.

- Per Figure 1, the "Ear Reference Line" is centered vertically through the center of the listening area (as defined by the speaker holes in the housing).
- The "Axis Reference Line" bisects the front surface of the device at its top and bottom edges.
- The intersection of these two lines defines the location of the "Ear Reference Point".

The lines drawn on the device extended to the outside edges, as shown in blue in the figure below, & wrap around the sides of the device.

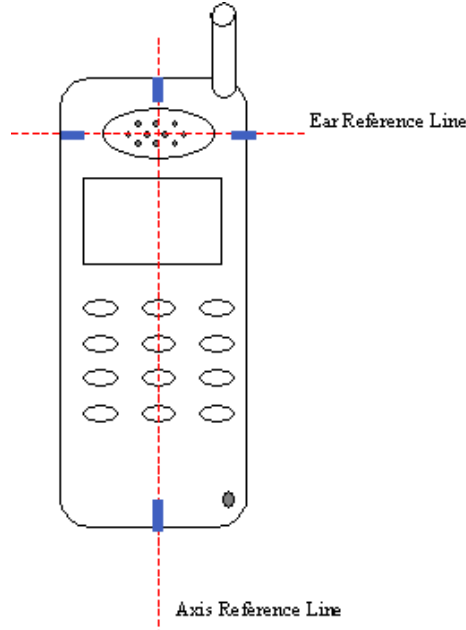

The SAR results shown in tables 1 through 4 are maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. The test conditions indicated as bold numbers in the following table are included in Appendix 2

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since same phantoms and tissue simulate are used for the system accuracy verification as the device SAR measurements, the Z-axis scans included in within Appendix 1 are applicable for verification of tissue simulate depth to be 15.0cm ±0.5cm. All other test conditions measured lower SAR values than those included in Appendix 2.

The Cellular Phone (FCC ID IHDT56ED1) has the ability to be used to make a phone call with the flip closed (using the keypad on the outside of the front flip) or with the flip open (using the touch screen). Both of these configurations were SAR tested.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

| Description | Serial Number | F (MHz) | Conversion Factor | Cal Cert pg # |
|-------------------------|---------------|---------|-------------------|---------------|
| E-Field Probe ET3DV6 | SN1398 | 835 | 6.29 | 7 of 8 |
| | | 1900 | 5.04 | 7 of 8 |

6.1.1 Head Adjacent Configuration with Phone Flip Closed

| f (MHz) | Description | Conducted Output Power (dBm) | Cheek / Touch Position – Flip Closed | | | | | | | |
|--------------------|-------------|---------------------------------------|--------------------------------------|---------------|------------------------|--------------------------|--------------------|---------------|------------------------|--------------------------|
| | | | Left Head | | | | Right Head | | | |
| | | | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz | Channel 128 | 33.48 | | | | | | | | |
| | Channel 190 | 33.47 | 0.443 | 0.02 | 0.43 | 19.6 | 0.432 | 0.04 | 0.43 | 19.6 |
| | Channel 251 | 33.48 | | | | | | | | |
| Digital 1900MHz | Channel 512 | 30.43 | | | | | | | | |
| | Channel 661 | 30.41 | 0.225 | 0.07 | 0.23 | 19.1 | 0.273 | 0.09 | 0.27 | 19.2 |
| | Channel 810 | 30.40 | | | | | | | | |


Table 1: SAR measurement results for the portable cellular telephone FCC ID IHDT56ED1 at highest possible output power. Measured against the left head in the Cheek/Touch Position.

| f (MHz) | Description | Conducted Output Power (dBm) | 15° Tilt Position – Flip Closed | | | | | | | |
|--------------------|-------------|---------------------------------------|---------------------------------|---------------|------------------------|--------------------------|--------------------|---------------|------------------------|--------------------------|
| | | | Left Head | | | | Right Head | | | |
| | | | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz | Channel 128 | 33.48 | | | | | | | | |
| | Channel 190 | 33.47 | 0.264 | -0.24 | 0.28 | 19.5 | 0.285 | -0.16 | 0.30 | 19.6 |
| | Channel 251 | 33.48 | | | | | | | | |
| Digital 1900MHz | Channel 512 | 30.43 | | | | | | | | |
| | Channel 661 | 30.41 | 0.174 | -0.13 | 0.18 | 19.1 | 0.186 | 0.36 | 0.19 | 19.2 |
| | Channel 810 | 30.40 | | | | | | | | |

Table 2: SAR measurement results for the portable cellular telephone FCC ID IHDT56ED1 at highest possible output power. Measured against the left head in the 15° Tilt Position.

6.1.2 Head Adjacent Configuration with Phone Flip Open

During the Cheek Touch SAR measurements in the 850MHz band it was noted that the location of maximum SAR was near the bottom of the phone, near the mouth & jaw area of the phantom (as can be seen in the contour plot below). In this region, the angle of the probe with respect to the line normal to the surface is relatively large, e.g., greater than 20° . This could increase the boundary effect error to a larger level than accounted for in the uncertainty budget. To compensate for this, scans were performed with the probe tilted 20° back from vertical along the MB line. This orientation results in an angle less than 20° between the closest point on the probe-tip housing to the phantom surface in the area of maximum SAR. This probe alignment is recommended in IEEE 1528 Section 6.5.2 "Zoom Scan Recommendations". The SAR Plots included in Appendix 2 for the "850MHz Flip Open" configuration will utilize a shorter coarse scan centered in the area of the maximum SAR.

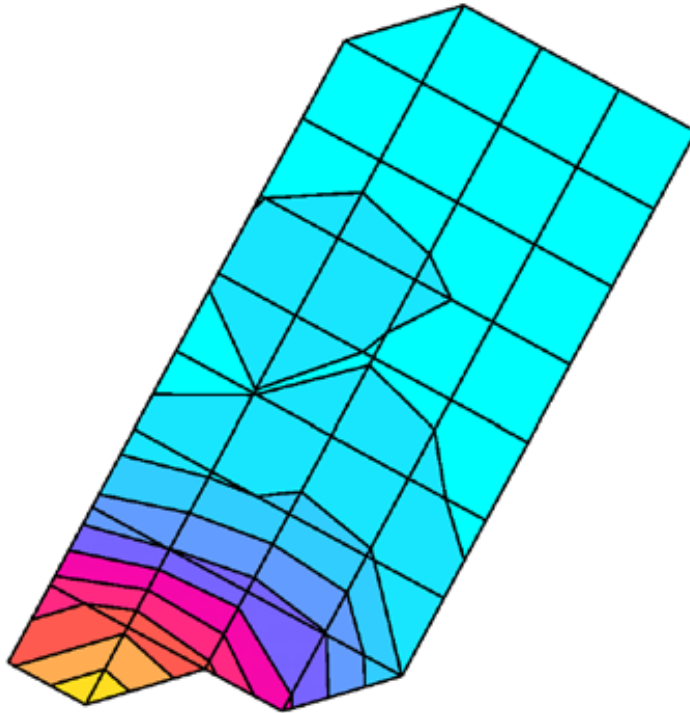

| f (MHz) | Description | Conducted Output Power (dBm) | Cheek / Touch Position – Flip Open | | | | | | | |
|-----------------|-------------|------------------------------|------------------------------------|--------------|---------------------|--------------------|-----------------|------------|---------------------|--------------------|
| | | | Left Head | | | | Right Head | | | |
| | | | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz | Channel 128 | 33.48 | | | | | | | | |
| | Channel 190 | 33.47 | 0.288 | 0.04 | 0.29 | 19.5 | 0.277 | -0.13 | 0.29 | 19.5 |
| | Channel 251 | 33.48 | | | | | | | | |
| Digital 1900MHz | Channel 512 | 30.43 | | | | | | | | |
| | Channel 661 | 30.41 | 0.223 | -0.37 | 0.24 | 19.1 | 0.221 | 0.64 | 0.22 | 19.1 |
| | Channel 810 | 30.40 | | | | | | | | |

Table 3: SAR measurement results for the portable cellular telephone FCC ID IHDT56ED1 at highest possible output power. Measured against the right head in the Cheek/Touch Position.

| f (MHz) | Description | Conducted Output Power (dBm) | 15° Tilt Position – Flip Open | | | | | | | |
|-----------------|-------------|------------------------------|-------------------------------|--------------|---------------------|--------------------|-----------------|--------------|---------------------|--------------------|
| | | | Left Head | | | | Right Head | | | |
| | | | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) |
| Digital 800MHz | Channel 128 | 33.48 | | | | | | | | |
| | Channel 190 | 33.47 | 0.0584 | 0.19 | 0.06 | 19.5 | 0.0611 | -0.10 | 0.06 | 19.5 |
| | Channel 251 | 33.48 | | | | | | | | |
| Digital 1900MHz | Channel 512 | 30.43 | | | | | | | | |
| | Channel 661 | 30.41 | 0.107 | -0.16 | 0.11 | 19.0 | 0.0876 | 0.38 | 0.09 | 19.1 |
| | Channel 810 | 30.40 | | | | | | | | |

Table 4: SAR measurement results for the portable cellular telephone FCC ID IHDT56ED1 at highest possible output power. Measured against the right head in the 15° Tilt Position.

6.2 Body Worn Test Results

The SAR results shown in table 5 are the maximum SAR values averaged over 1 gram of phantom tissue. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test. The test conditions indicated as bold numbers in the following table are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories’, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component

accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

The CHYN4632A is the only Body-Worn Accessories available for this phone. This accessory covers the headset jack and the data port connections on the phone. So connecting external devices to this phone is prohibited. Therefore, this accessory will only be SAR tested for GSM & Bluetooth co-located transmission. GSM by itself and GPRS will SAR tested using standard separation distances and no accessory.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

| Description | Serial Number | f (MHz) | Conversion Factor | Cal Cert pg # |
|----------------------|---------------|---------|-------------------|---------------|
| E-Field Probe ET3DV6 | SN1398 | 835 | 5.88 | 7 of 8 |
| | | 1900 | 4.50 | 7 of 8 |

| f (MHz) | Description | Conducted Output Power (dBm) | Body Worn | | | | | | | | |
|-----------------|-------------|------------------------------|----------------------------------|------------|---------------------|--------------------|---------------------------------|--------------|---------------------|--------------------|--|
| | | | Front of Phone 15mm from Phantom | | | | Back of Phone 15mm from Phantom | | | | |
| | | | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | |
| Digital 800MHz | Channel 128 | 33.48 | | | | | | | | | |
| | Channel 190 | 33.47 | 0.0905 | 0.08 | 0.09 | 19.7 | 0.414 | 0.03 | 0.41 | 19.7 | |
| | Channel 251 | 33.48 | | | | | | | | | |
| Digital 1900MHz | Channel 512 | 30.43 | | | | | | | | | |
| | Channel 661 | 30.41 | 0.11 | -0.11 | 0.11 | 19.0 | 0.450 | -0.14 | 0.46 | 19.0 | |
| | Channel 810 | 30.40 | | | | | | | | | |

Table 5: SAR measurement results for the portable cellular telephone FCC ID IHDT56ED1 at highest possible output power. Measured against the body.

| f (MHz) | Description | Conducted Output Power (dBm) | Body Worn | | | | | | | | |
|-----------------|-------------|------------------------------|--|--------------|---------------------|--------------------|--|--------------|---------------------|--------------------|--|
| | | | GPRS Class 10 Back of Phone 25mm from Phantom | | | | Bluetooth co-transmitting with GSM with CHYN4632A Pouch | | | | |
| | | | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | Measured (W/kg) | Drift (dB) | Extrapolated (W/kg) | Simulate Temp (°C) | |
| Digital 800MHz | Channel 128 | 33.48 | | | | | | | | | |
| | Channel 190 | 33.47 | 0.547 | -0.19 | 0.57 | 20.0 | 0.671 | -0.40 | 0.74 | 20.0 | |
| | Channel 251 | 33.48 | | | | | | | | | |
| Digital 1900MHz | Channel 512 | 30.43 | | | | | | | | | |
| | Channel 661 | 30.41 | 0.234 | -0.01 | 0.23 | 19.0 | 0.554 | -0.05 | 0.56 | 19.4 | |
| | Channel 810 | 30.40 | | | | | | | | | |

Table 6: SAR measurement results for the portable cellular telephone FCC ID IHDT56ED1 at highest possible output power. Measured against the body.

Appendix 1

SAR distribution comparison for the system accuracy verification

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 204mW Refl.Pwr PM3= -26.90dB

Sim.Temp@SPC = 19.3C Room Temp @ SPC = 20C


R3: Amy Twin Phantom Rev.4 (22Aug02); section 1

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.37$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 15.3 mW/g ± 0.06 dB, SAR (1g): 8.39 mW/g ± 0.04 dB, SAR (10g): 4.41 mW/g ± 0.02 dB, (Worst-case extrapolation)

Penetration depth: 8.4 (8.0, 9.3) [mm]

Powerdrift: -0.04 dB

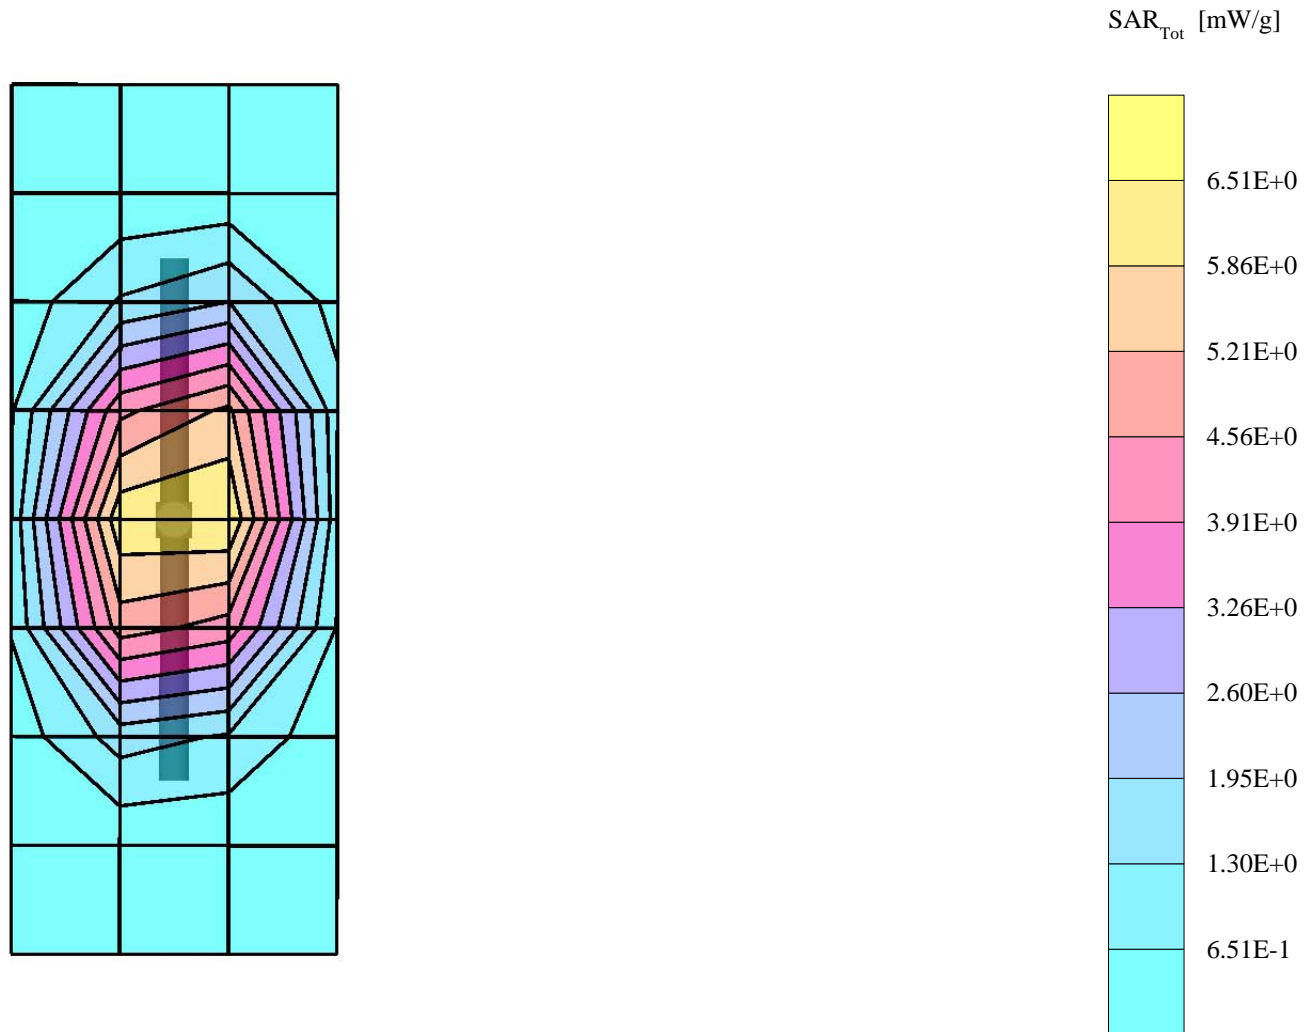

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 204mW Refl.Pwr PM3= -26.90dB

Sim.Temp@SPC = 19.3C Room Temp @ SPC = 20C


R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; Section; Position: ; Frequency: 1800 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.37$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 8.4 (8.0, 9.2) [mm]

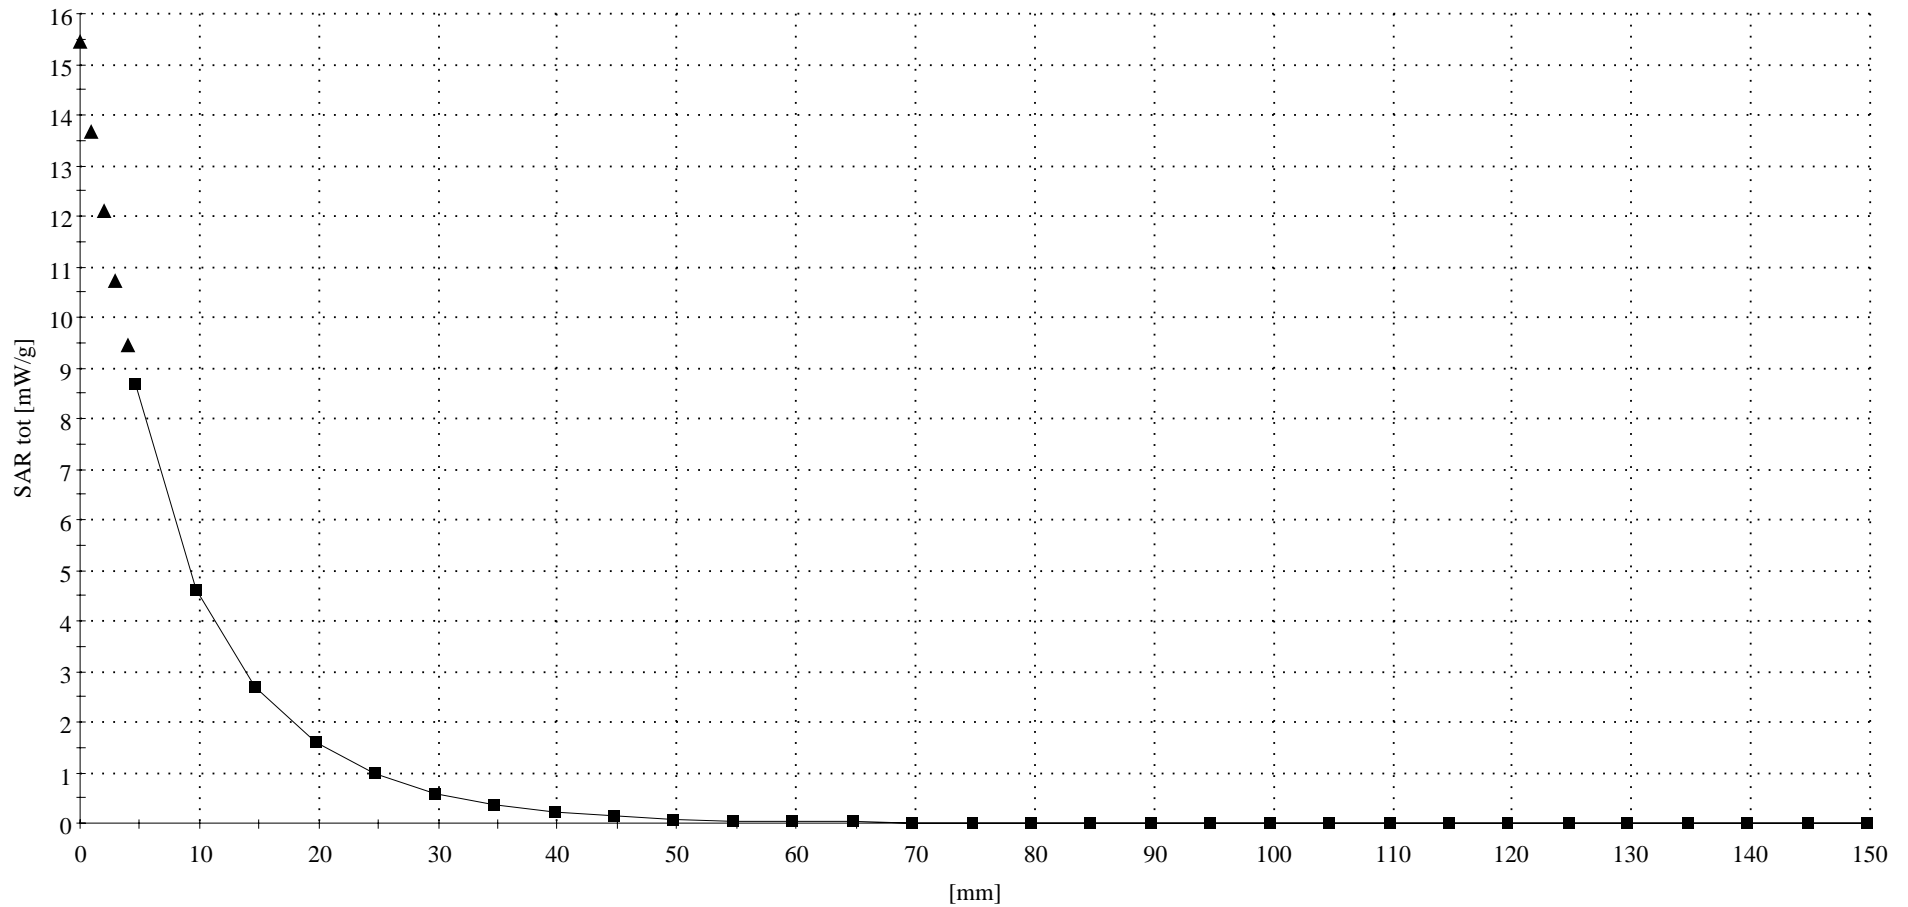

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251TR

PM2 Power = 204mW Refl.Pwr PM3= -25.11dB

Sim.Temp@SPC = 19.1C Room Temp @ SPC = 20C


R3: Amy Twin Phantom Rev.4 (22Aug02); section 1

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.34$ mho/m $\epsilon_r = 38.8$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 15.2 mW/g ± 0.06 dB, SAR (1g): 8.33 mW/g ± 0.03 dB, SAR (10g): 4.41 mW/g ± 0.01 dB, (Worst-case extrapolation)

Penetration depth: 8.7 (8.3, 9.5) [mm]

Powerdrift: -0.02 dB

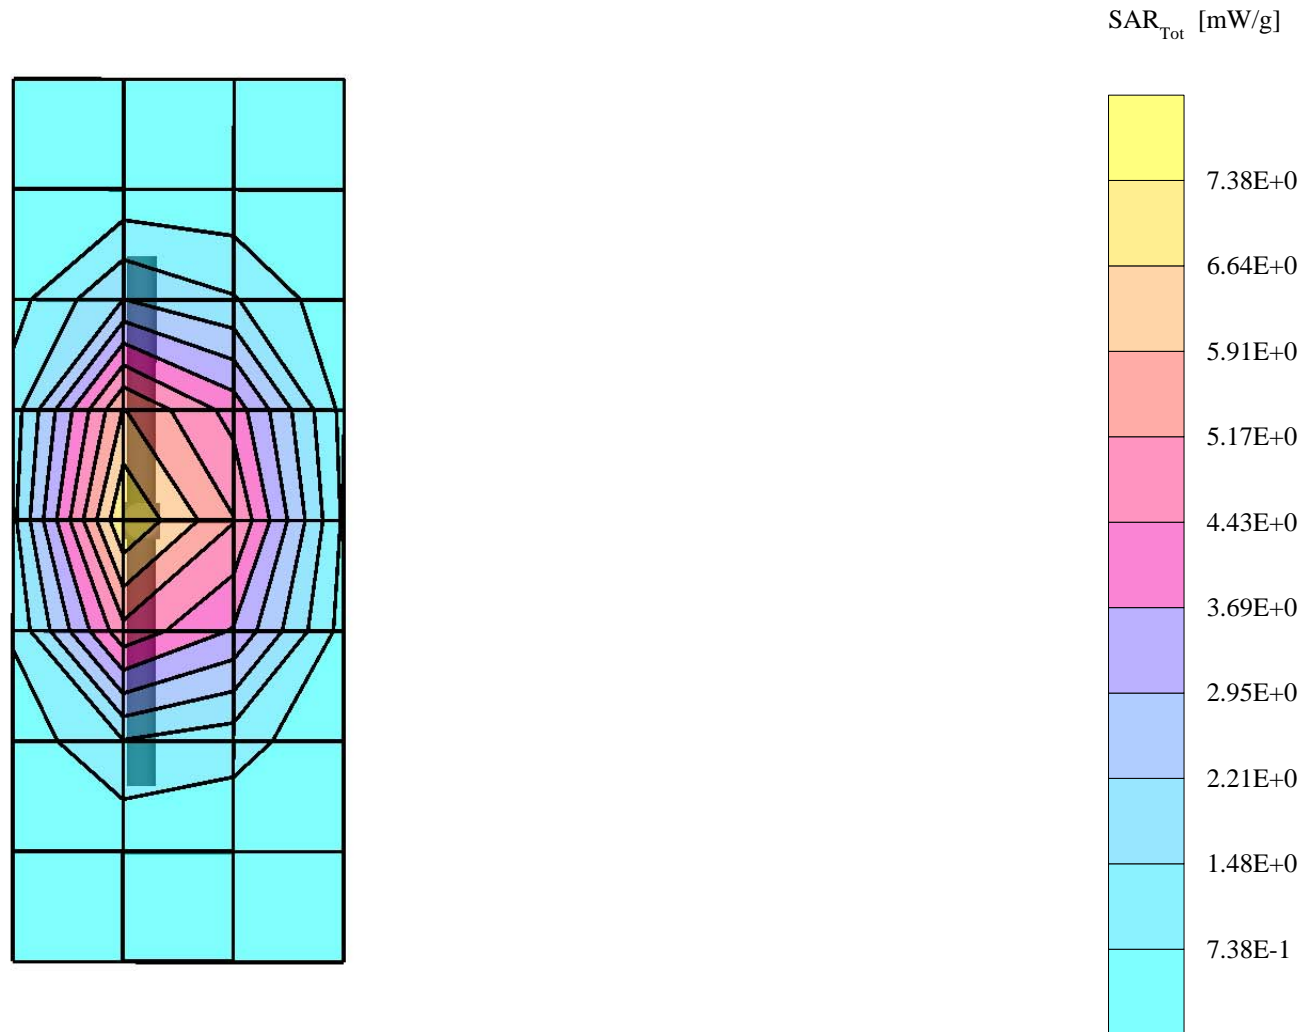

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251TR

PM2 Power = 204mW Refl.Pwr PM3= -25.11dB

Sim.Temp@SPC = 19.1C Room Temp @ SPC = 20C


R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; Section; Position: ; Frequency: 1800 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.34$ mho/m $\epsilon_r = 38.8$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 8.4 (8.0, 9.2) [mm]

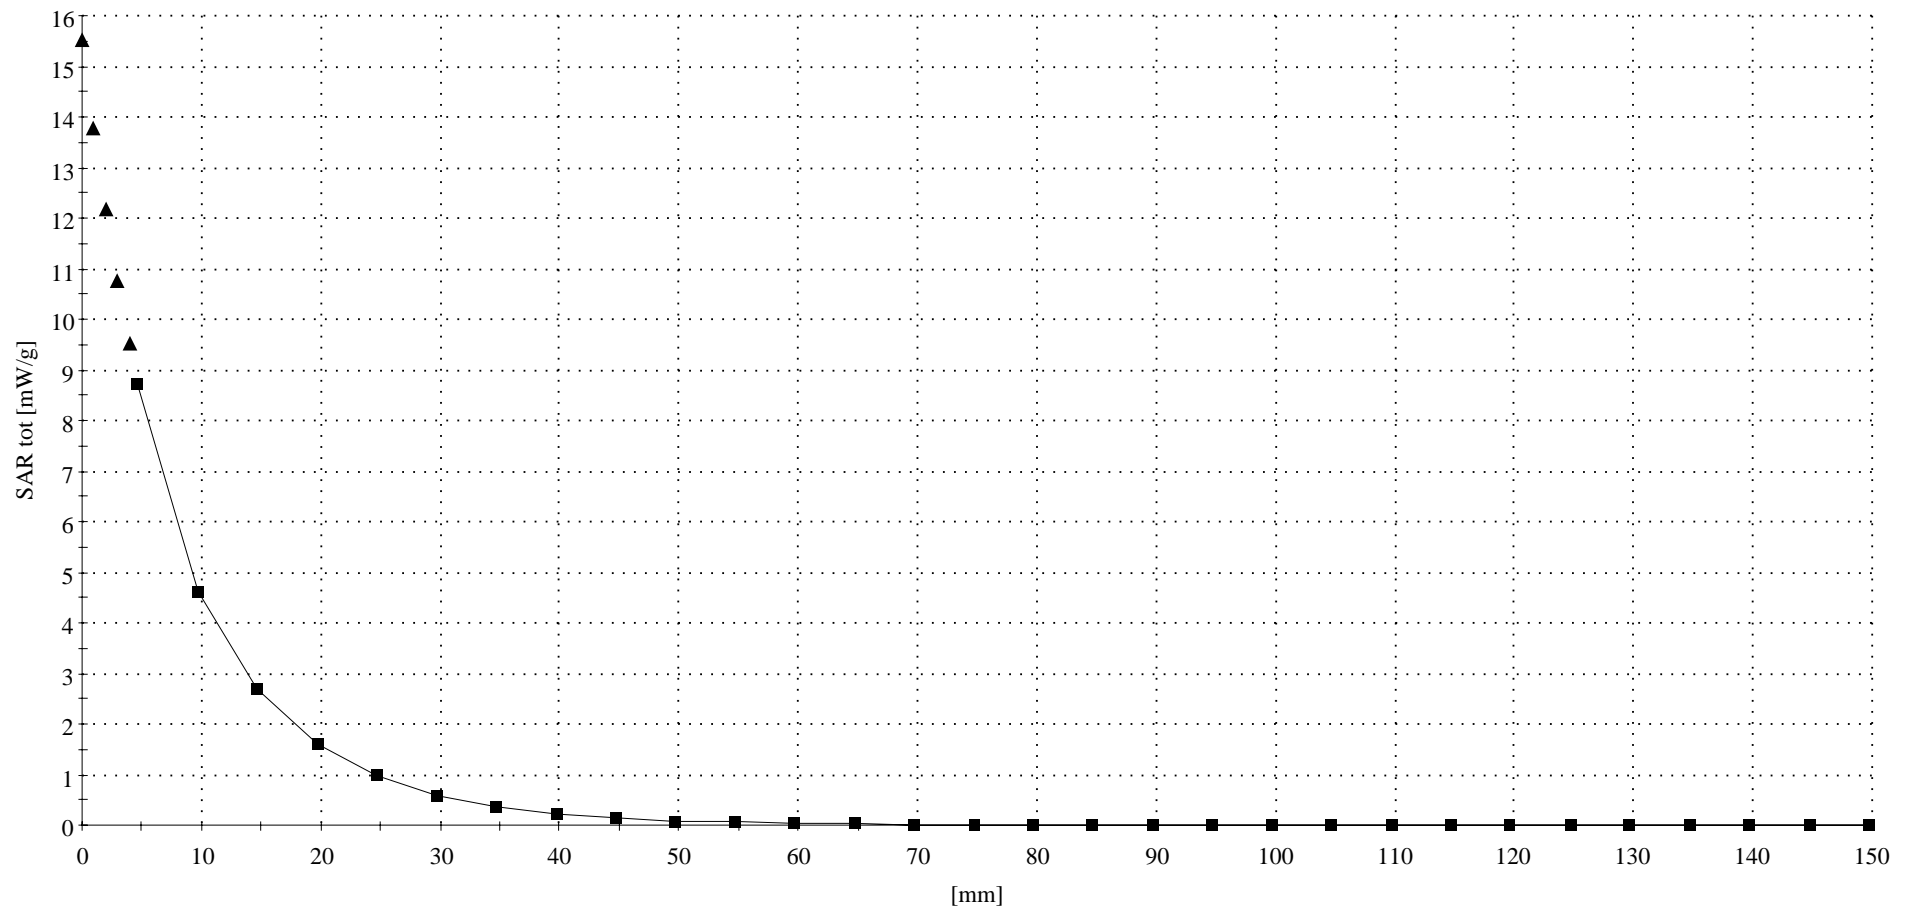

Dipole 900 MHz

900 MHz System Performance Check / Dipole Sn# 080

PM2 Power = 201mW Refl.Pwr PM3= -21.58dB

Sim.Temp@SPC = 19.6C Room Temp @ SPC = 20C


R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03; Flat

Probe: ET3DV6 - SN1398 - Validation4; ConvF(6.29,6.29,6.29); Crest factor: 1.0; 900 MHz VALIDATION: $\sigma = 0.98$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 3.57 mW/g ± 0.02 dB, SAR (1g): 2.26 mW/g ± 0.01 dB, SAR (10g): 1.43 mW/g ± 0.01 dB, (Worst-case extrapolation)

Penetration depth: 11.5 (10.8, 12.6) [mm]

Powerdrift: -0.02 dB

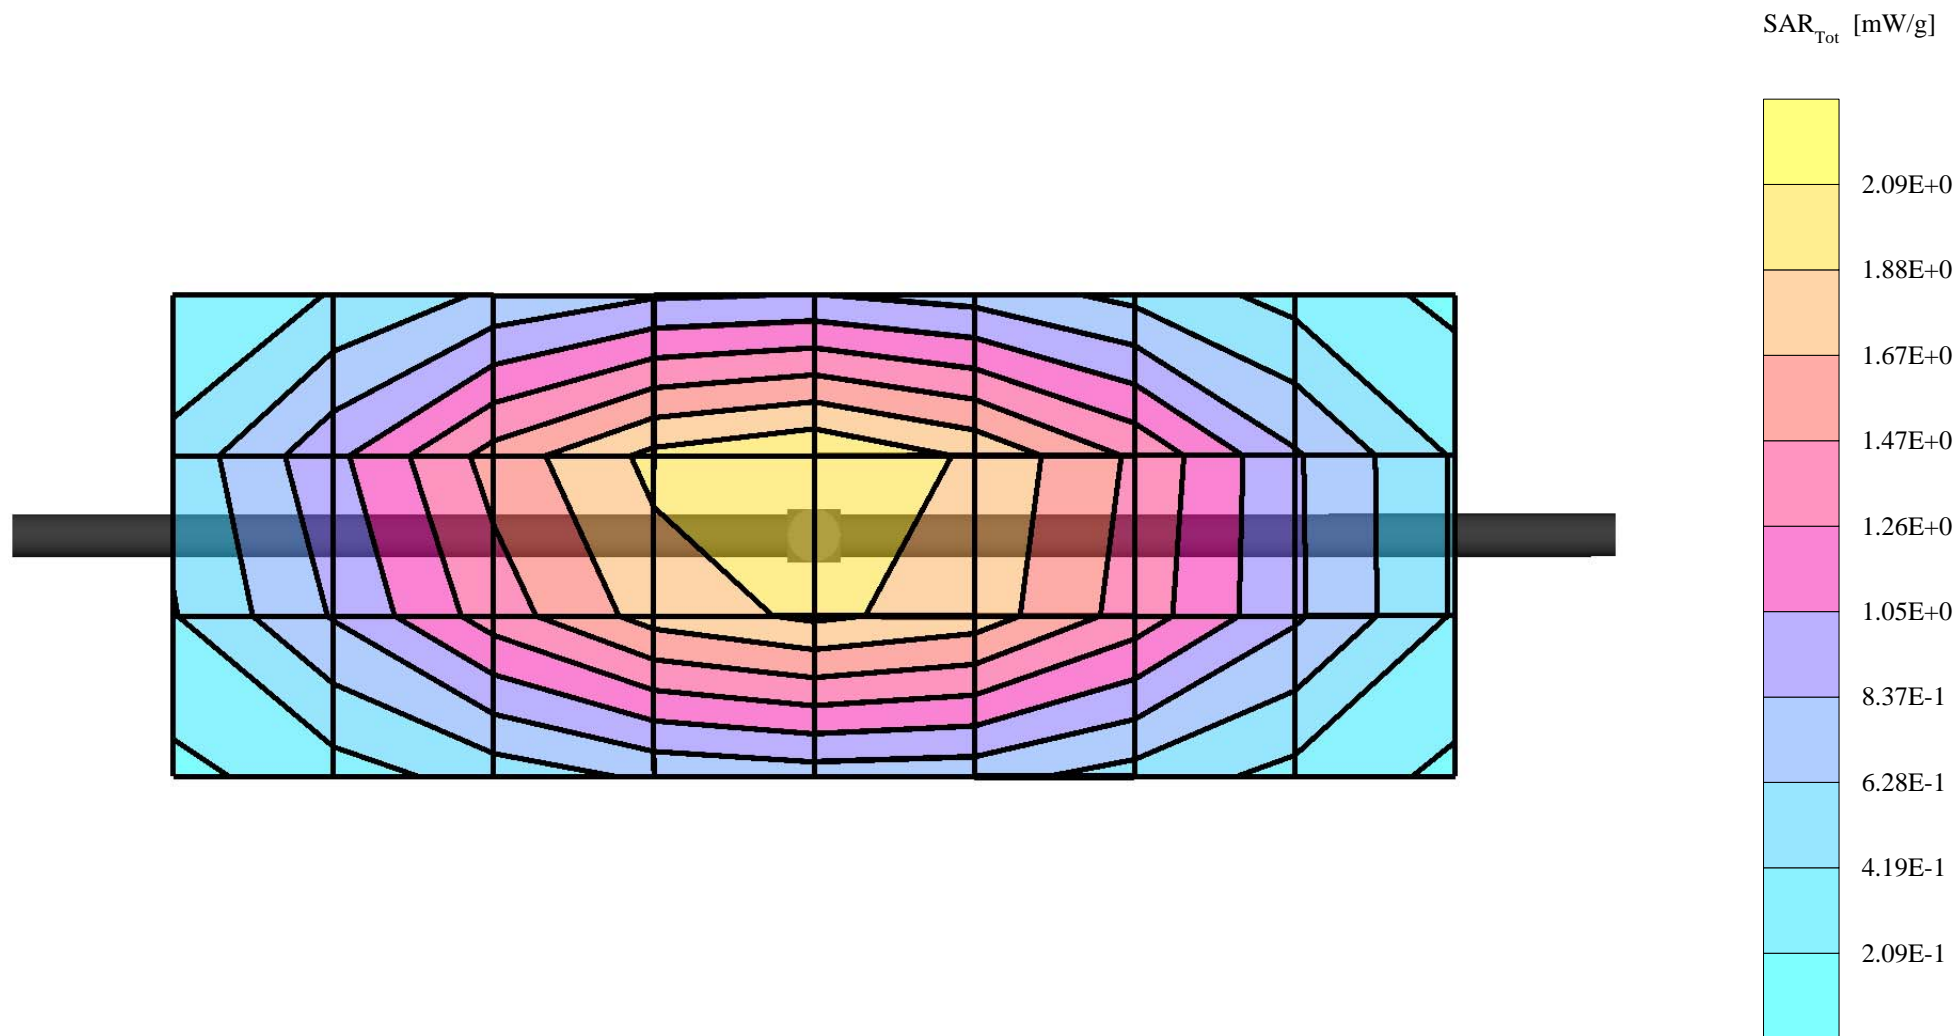

Dipole 900 MHz

900 MHz System Performance Check / Dipole Sn# 080

PM2 Power = 201mW Refl.Pwr PM3= -21.58dB

Sim.Temp@SPC = 19.6C Room Temp @ SPC = 20C


R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; Section; Position: ; Frequency: 900 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(6.29,6.29,6.29); Crest factor: 1.0; 900 MHz VALIDATION: $\sigma = 0.98$ mho/m $\epsilon_r = 41.3$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 11.5 (10.7, 12.6) [mm]

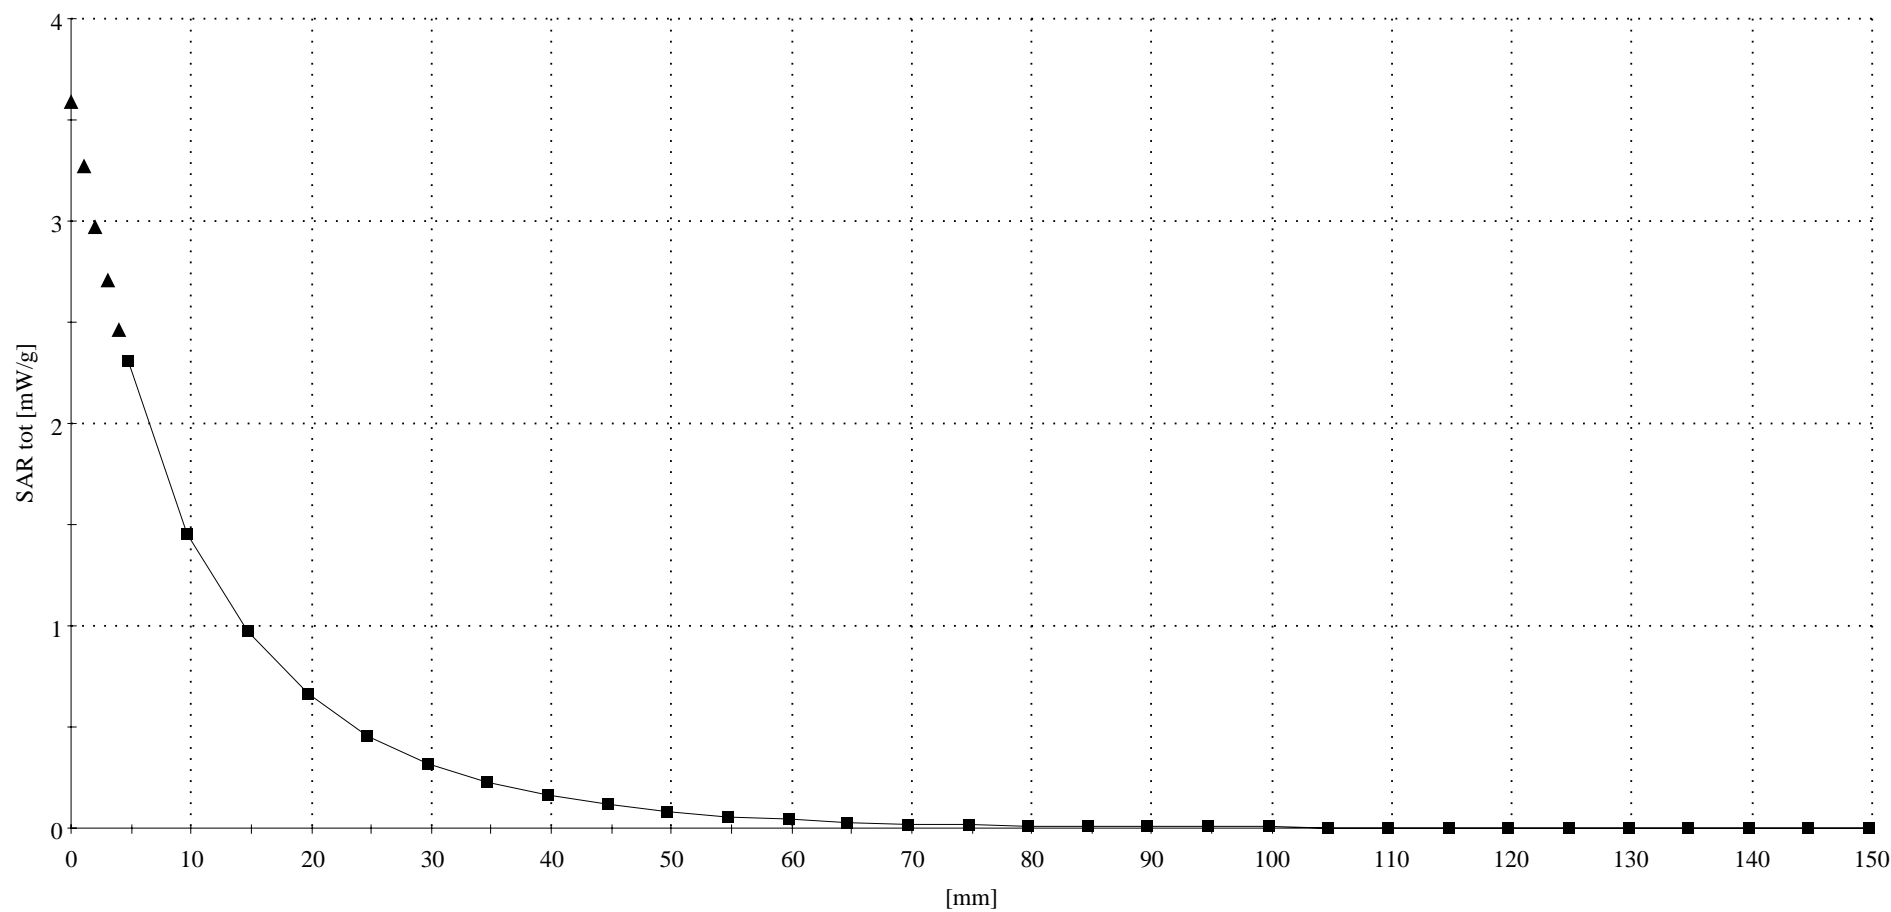

Dipole 900 MHz

900 MHz System Performance Check / Dipole Sn# 080

PM2 Power = 201mW Refl.Pwr PM3= -20.98dB

Sim.Temp@SPC = 19.7 Room Temp @ SPC = 20C


R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03; Flat

Probe: ET3DV6 - SN1398 - Validation4; ConvF(6.29,6.29,6.29); Crest factor: 1.0; 900 MHz VALIDATION: $\sigma = 0.97$ mho/m $\epsilon_r = 41.0$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 3.53 mW/g ± 0.01 dB, SAR (1g): 2.24 mW/g ± 0.01 dB, SAR (10g): 1.41 mW/g ± 0.01 dB, (Worst-case extrapolation)

Penetration depth: 11.7 (10.9, 12.7) [mm]

Powerdrift: -0.03 dB

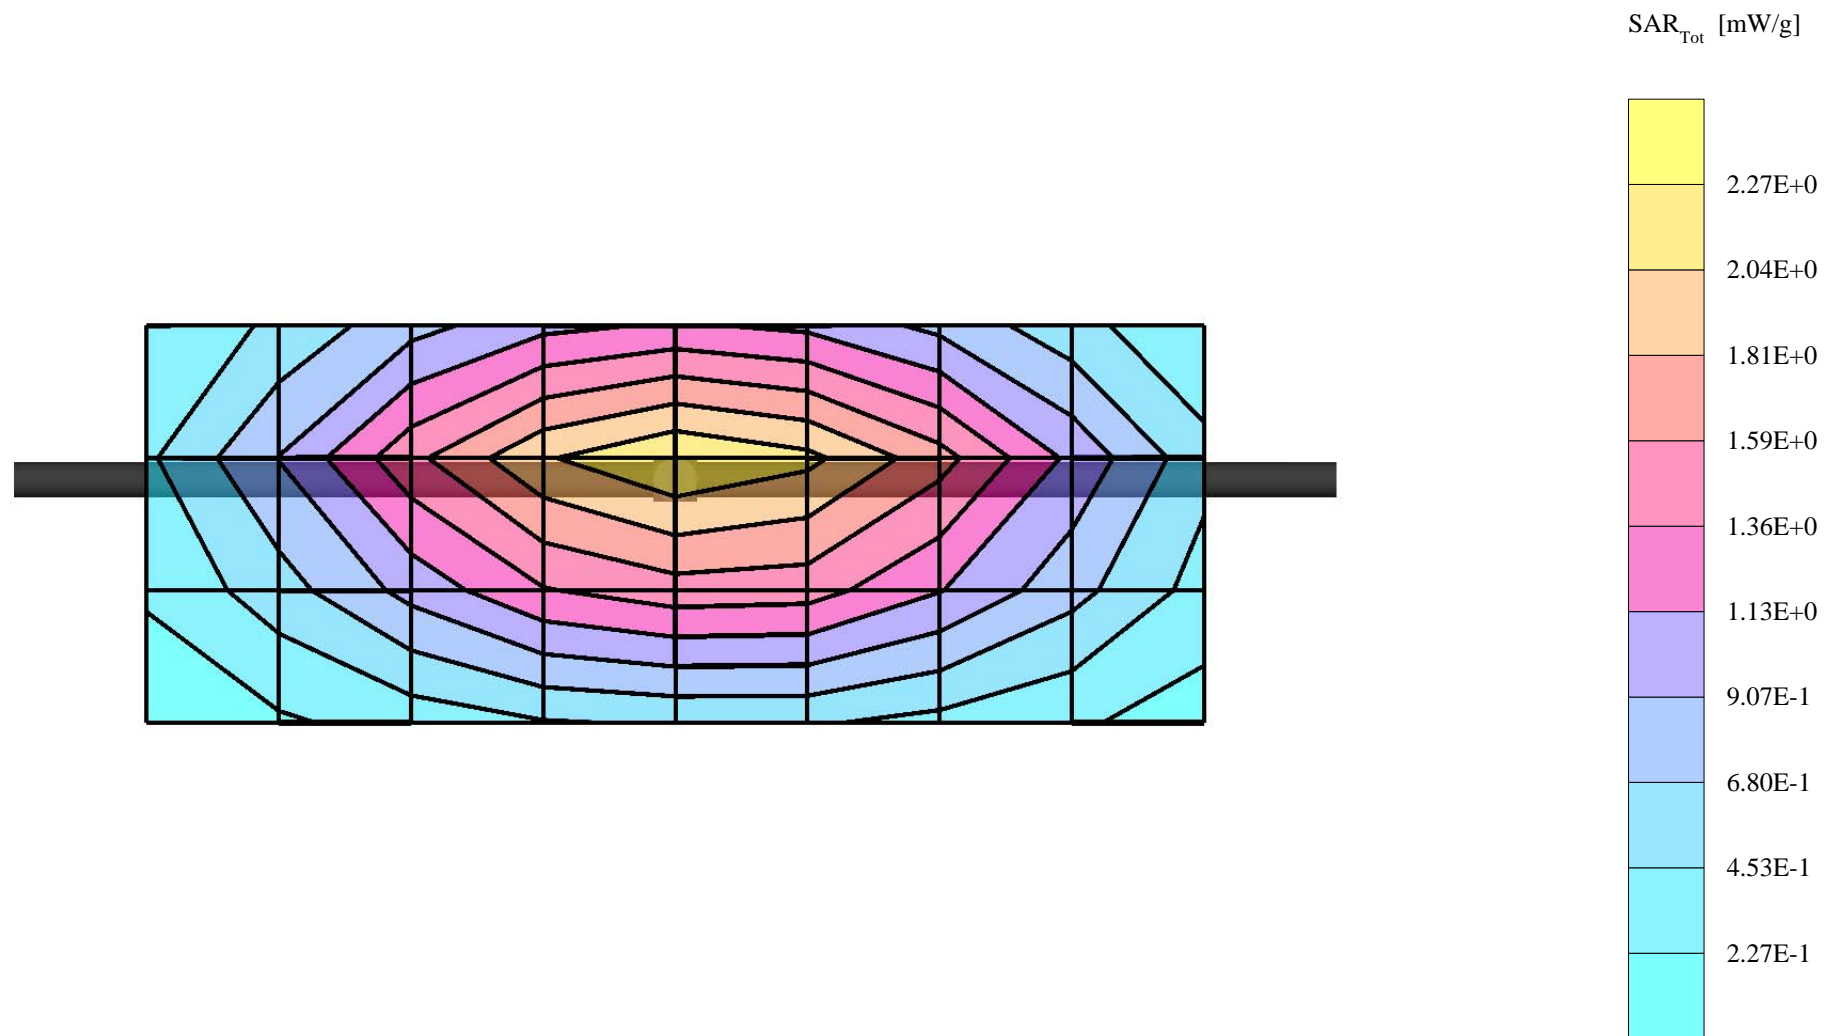

Dipole 900 MHz

900 MHz System Performance Check / Dipole Sn# 080

PM2 Power = 201mW Refl.Pwr PM3= -20.98dB

Sim.Temp@SPC = 19.7 Room Temp @ SPC = 20C


R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; Section; Position: ; Frequency: 900 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(6.29,6.29,6.29); Crest factor: 1.0; 900 MHz VALIDATION: $\sigma = 0.97$ mho/m $\epsilon_r = 41.0$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 11.5 (10.7, 12.6) [mm]

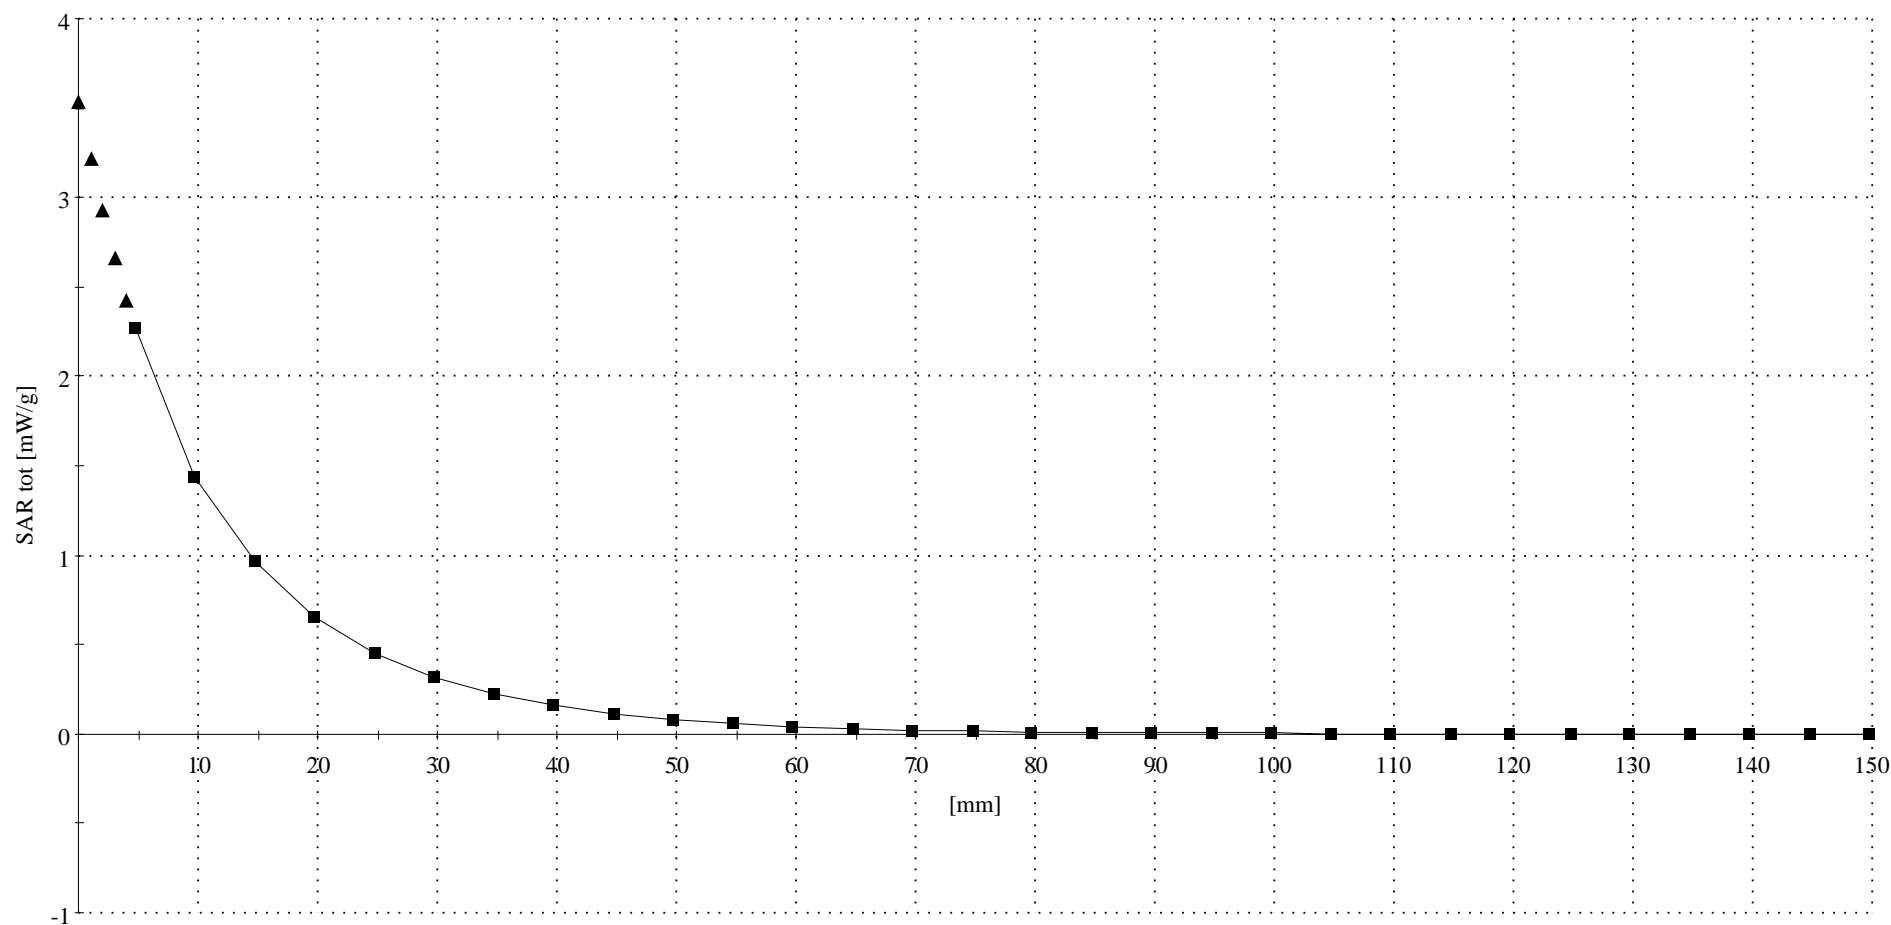

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 203mW Refl.Pwr PM3= -26.76dB

Sim.Temp@SPC = 19.5 Room Temp @ SPC = 20C

R3 TP1159 SAM Expanded (Rev. 2)-9Jan03; Flat



Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.36$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 14.5 mW/g ± 0.01 dB, SAR (1g): 7.96 mW/g ± 0.03 dB, SAR (10g): 4.22 mW/g ± 0.04 dB, (Worst-case extrapolation)

Penetration depth: 8.6 (8.3, 9.4) [mm]

Powerdrift: -0.06 dB

SAR_{Tot} [mW/g]

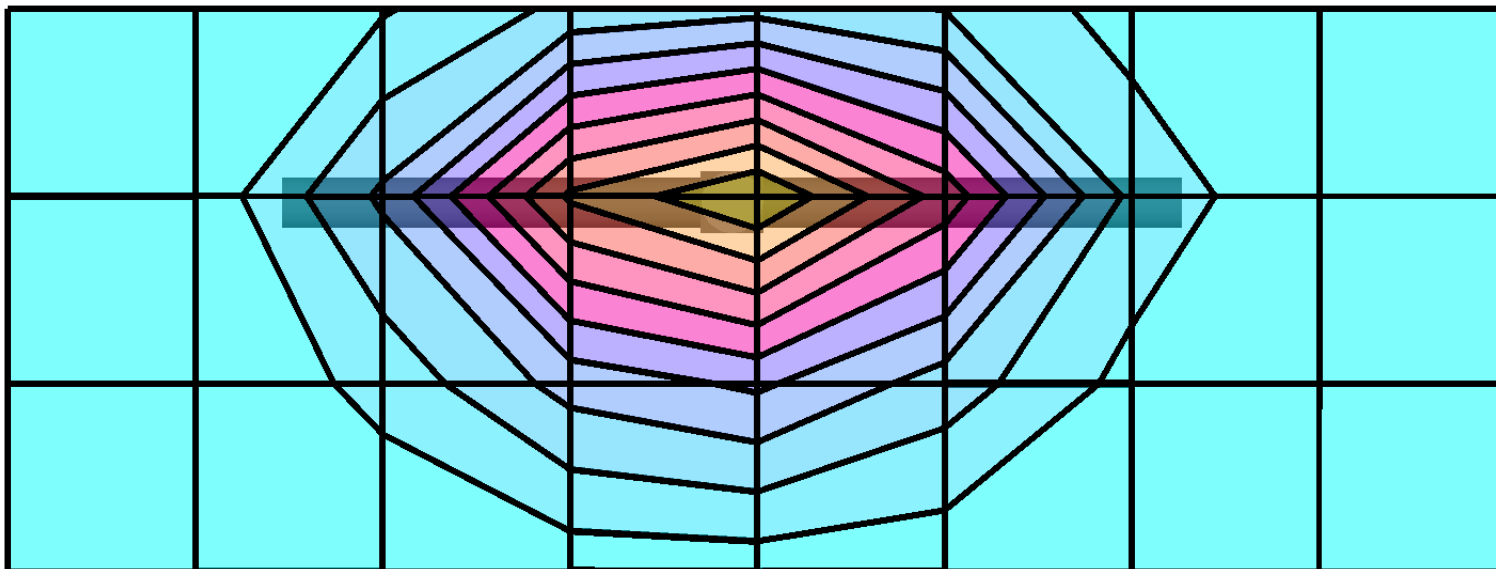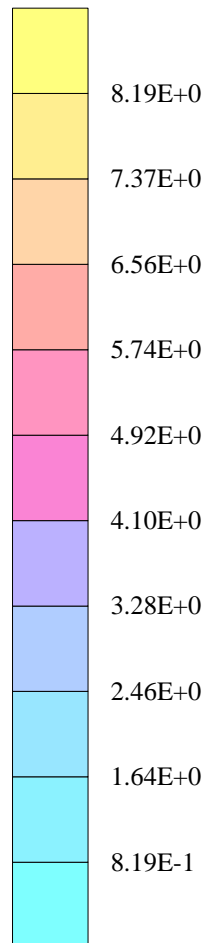

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 203mW Refl.Pwr PM3= -26.76dB

Sim.Temp@SPC = 19.5 Room Temp @ SPC = 20C


R3 TP1159 SAM Expanded (Rev. 2)-9Jan03 Phantom; Section; Position: ; Frequency: 1800 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.36$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 8.4 (8.0, 9.3) [mm]

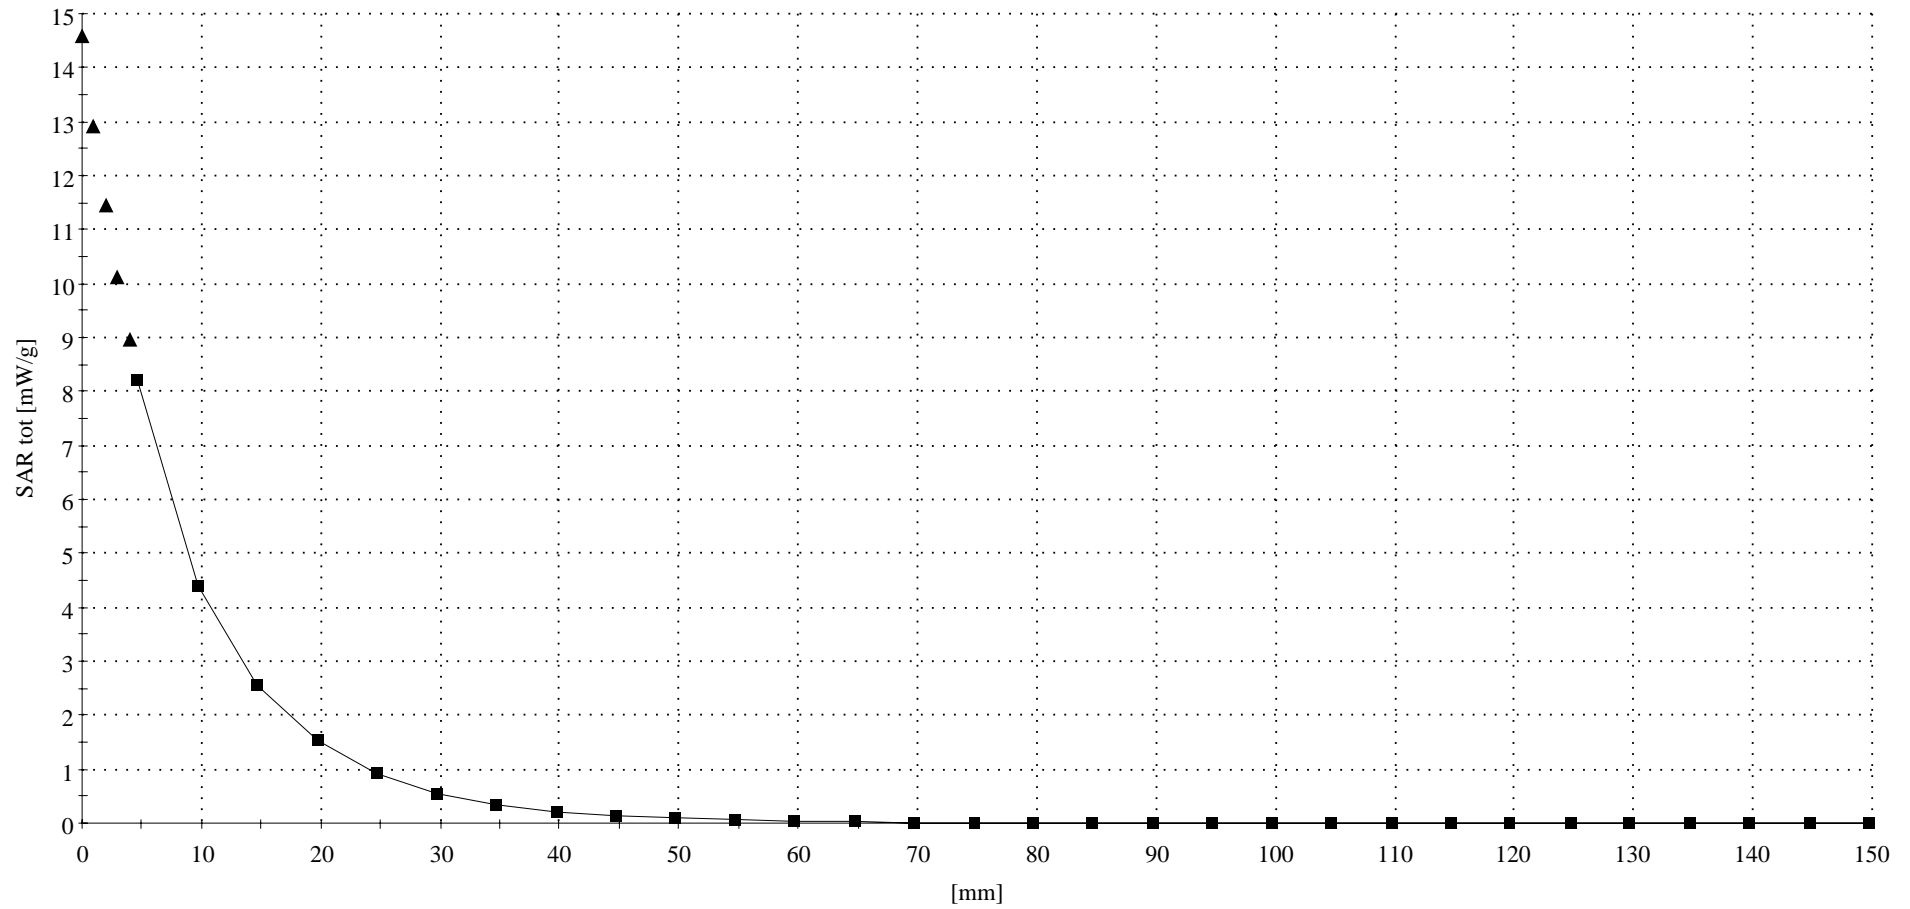

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 205mW Refl.Pwr PM3= -22.90dB

Sim.Temp@SPC = 19.2C Room Temp @ SPC = 20C


R3: Amy Twin Phantom Rev.4 (22Aug02); section 1

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.36$ mho/m $\epsilon_r = 39.1$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 14.9 mW/g ± 0.04 dB, SAR (1g): 8.22 mW/g ± 0.02 dB, SAR (10g): 4.37 mW/g ± 0.00 dB, (Worst-case extrapolation)

Penetration depth: 8.5 (8.1, 9.4) [mm]

Powerdrift: -0.06 dB

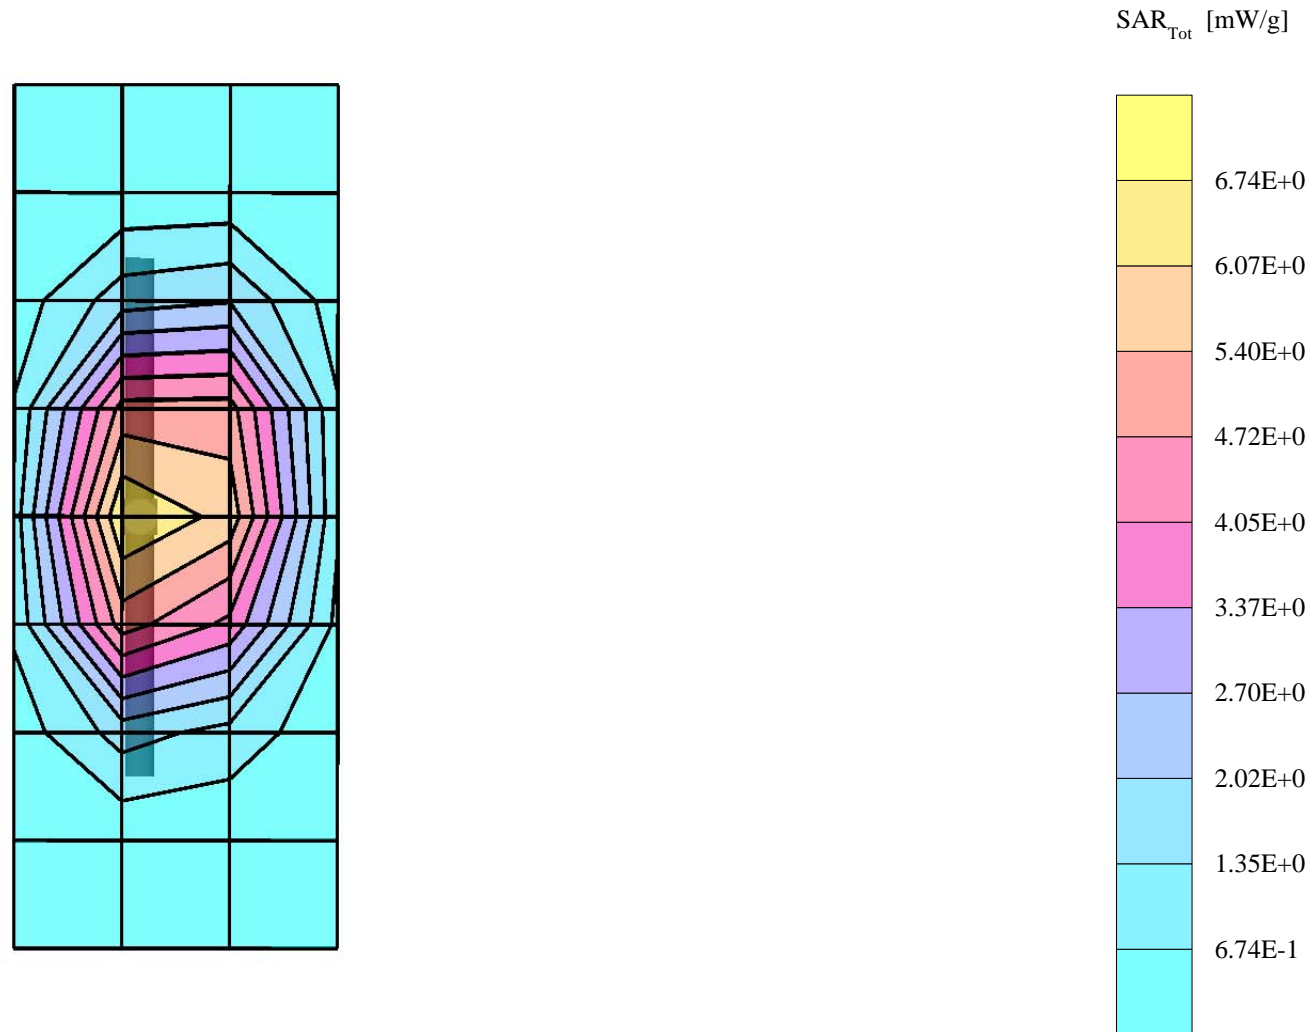

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 205mW Refl.Pwr PM3= -22.90dB

Sim.Temp@SPC = 19.2C Room Temp @ SPC = 20C


R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; Section; Position: ; Frequency: 1800 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.36$ mho/m $\epsilon_r = 39.1$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 8.4 (8.0, 9.2) [mm]

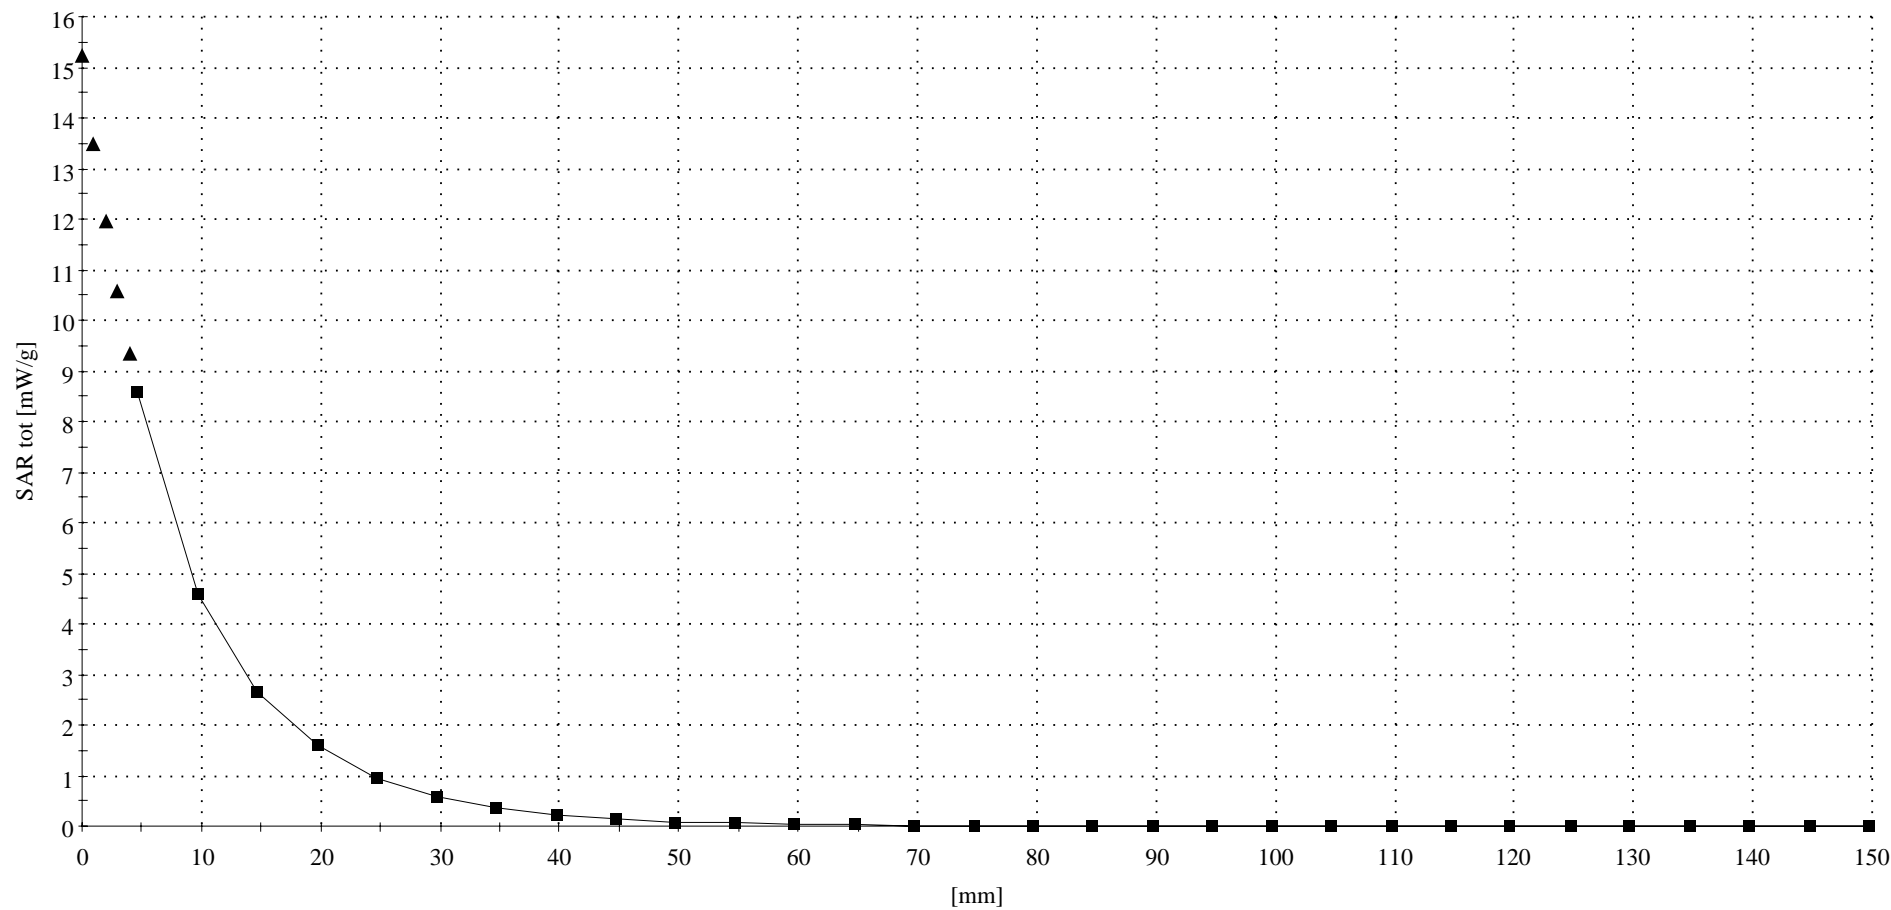

Dipole 900 MHz

900 MHz System Performance Check / Dipole Sn# 80

PM2 Power = 201mW Refl.Pwr PM3= -21.50dB

Sim.Temp@SPC = 20.7°C Room Temp @ SPC = 20°C


R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03; Flat

Probe: ET3DV6 - SN1398 - Validation4; ConvF(6.29,6.29,6.29); Crest factor: 1.0; 900 MHz VALIDATION: $\sigma = 0.97$ mho/m $\epsilon_r = 41.1$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 3.56 mW/g ± 0.01 dB, SAR (1g): 2.25 mW/g ± 0.00 dB, SAR (10g): 1.42 mW/g ± 0.00 dB, (Worst-case extrapolation)

Penetration depth: 11.5 (10.7, 12.6) [mm]

Powerdrift: 0.01 dB

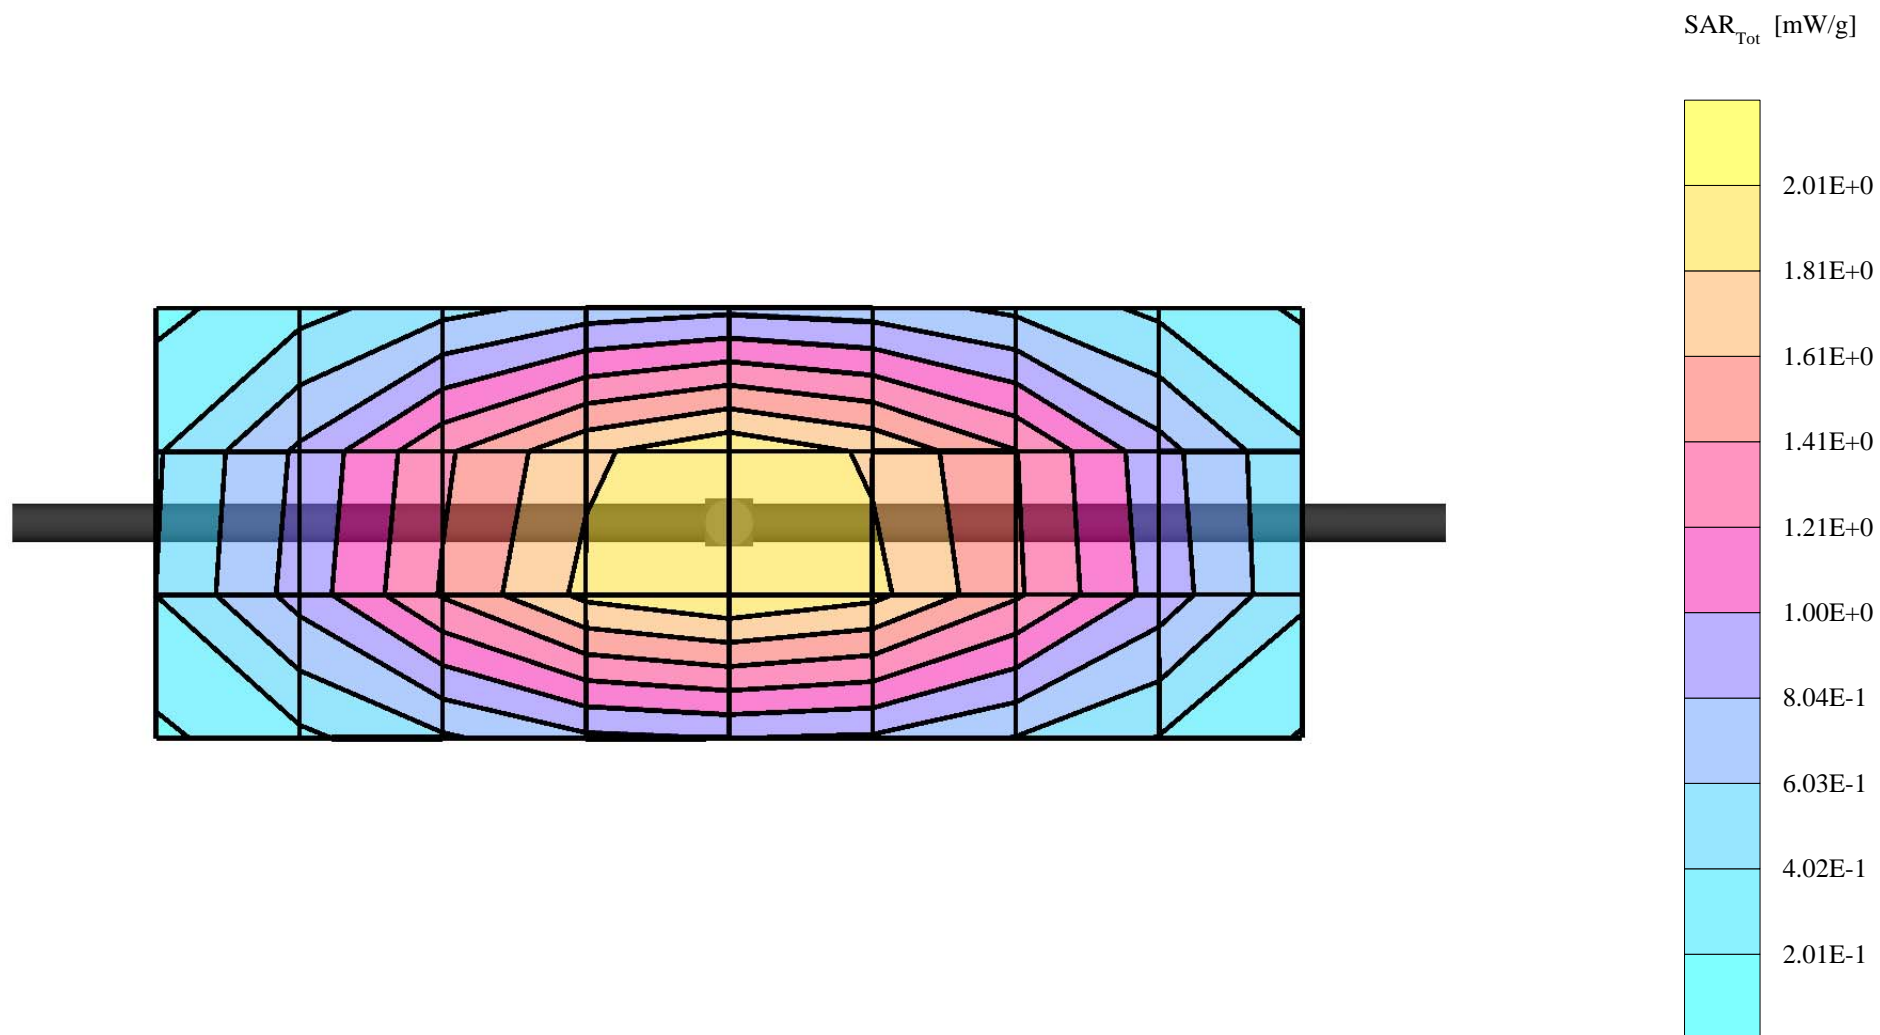

Dipole 900 MHz

900 MHz System Performance Check / Dipole Sn# 80

PM2 Power = 201mW Refl.Pwr PM3= -21.50dB

Sim.Temp@SPC = 20.7°C Room Temp @ SPC = 20°C


R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; Section; Position: ; Frequency: 900 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(6.29,6.29,6.29); Crest factor: 1.0; 900 MHz VALIDATION: $\sigma = 0.97$ mho/m $\epsilon_r = 41.1$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 11.5 (10.8, 12.6) [mm]

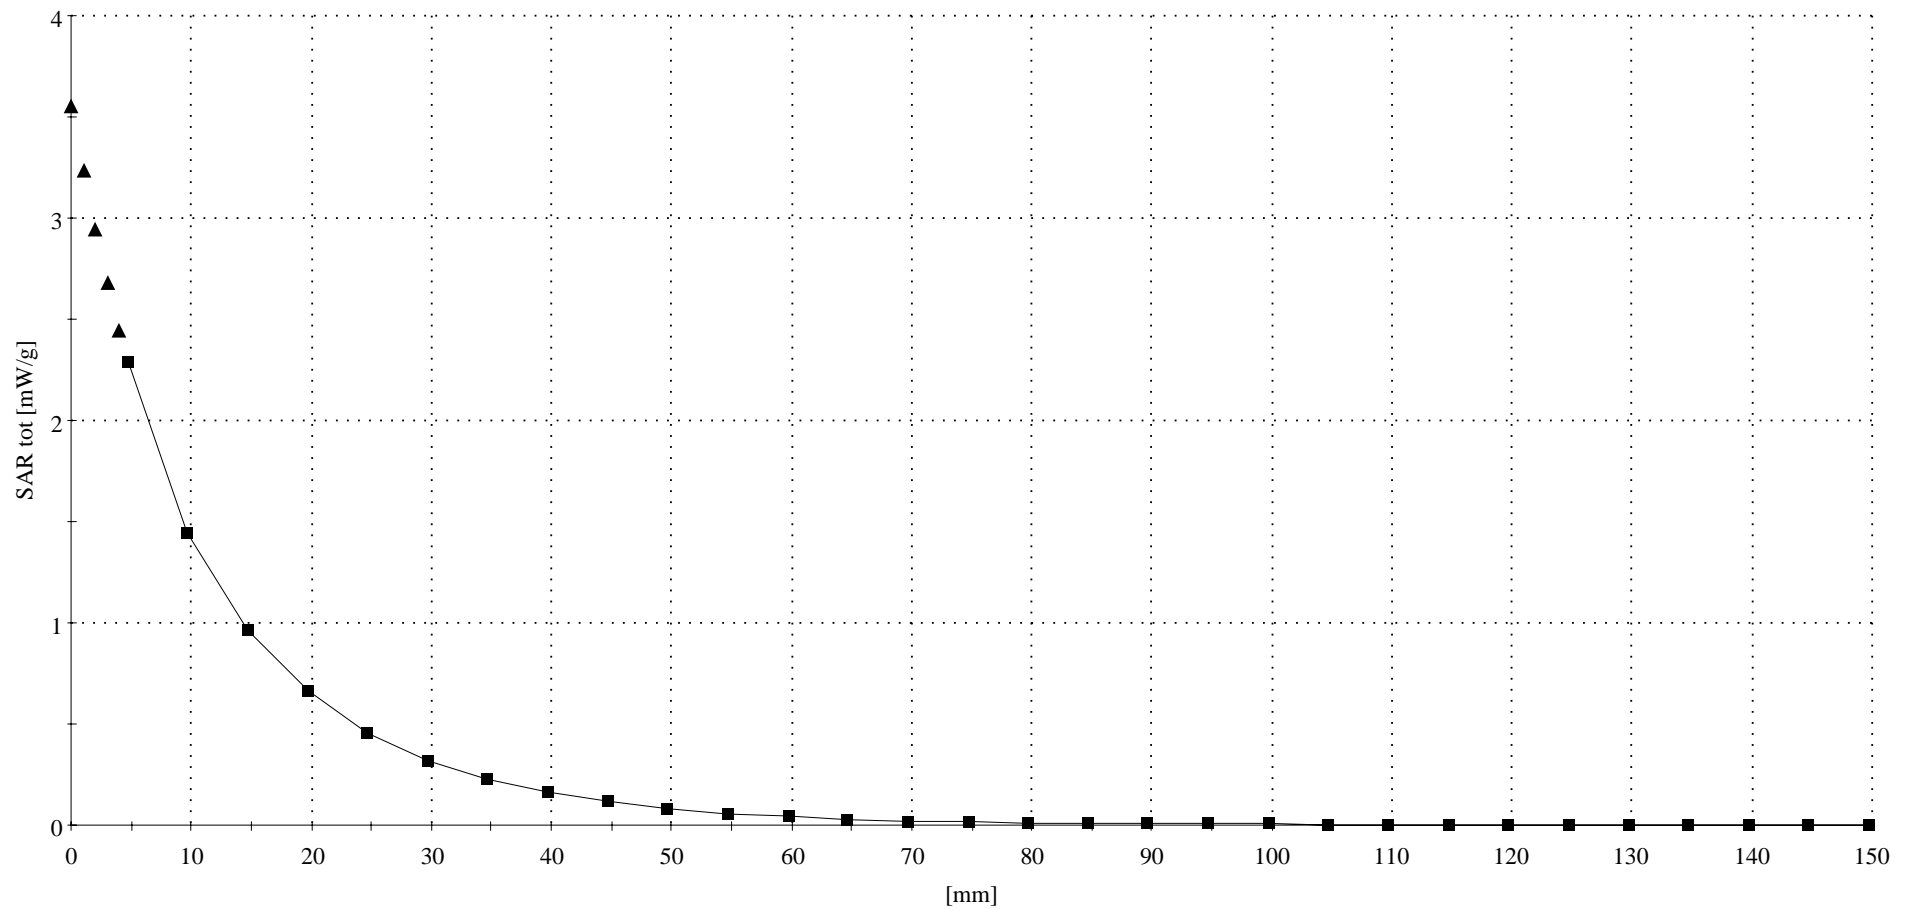

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 204mW Refl.Pwr PM3= -22.15dB

Sim.Temp@SPC = 19.4C Room Temp @ SPC = 21C


R3: Amy Twin Phantom Rev.4 (22Aug02); section 1

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.35$ mho/m $\epsilon_r = 38.8$ $\rho = 1.00$ g/cm³

Cubes (2): Peak: 15.0 mW/g ± 0.04 dB, SAR (1g): 8.26 mW/g ± 0.03 dB, SAR (10g): 4.37 mW/g ± 0.00 dB, (Worst-case extrapolation)

Penetration depth: 8.6 (8.2, 9.4) [mm]

Powerdrift: -0.04 dB

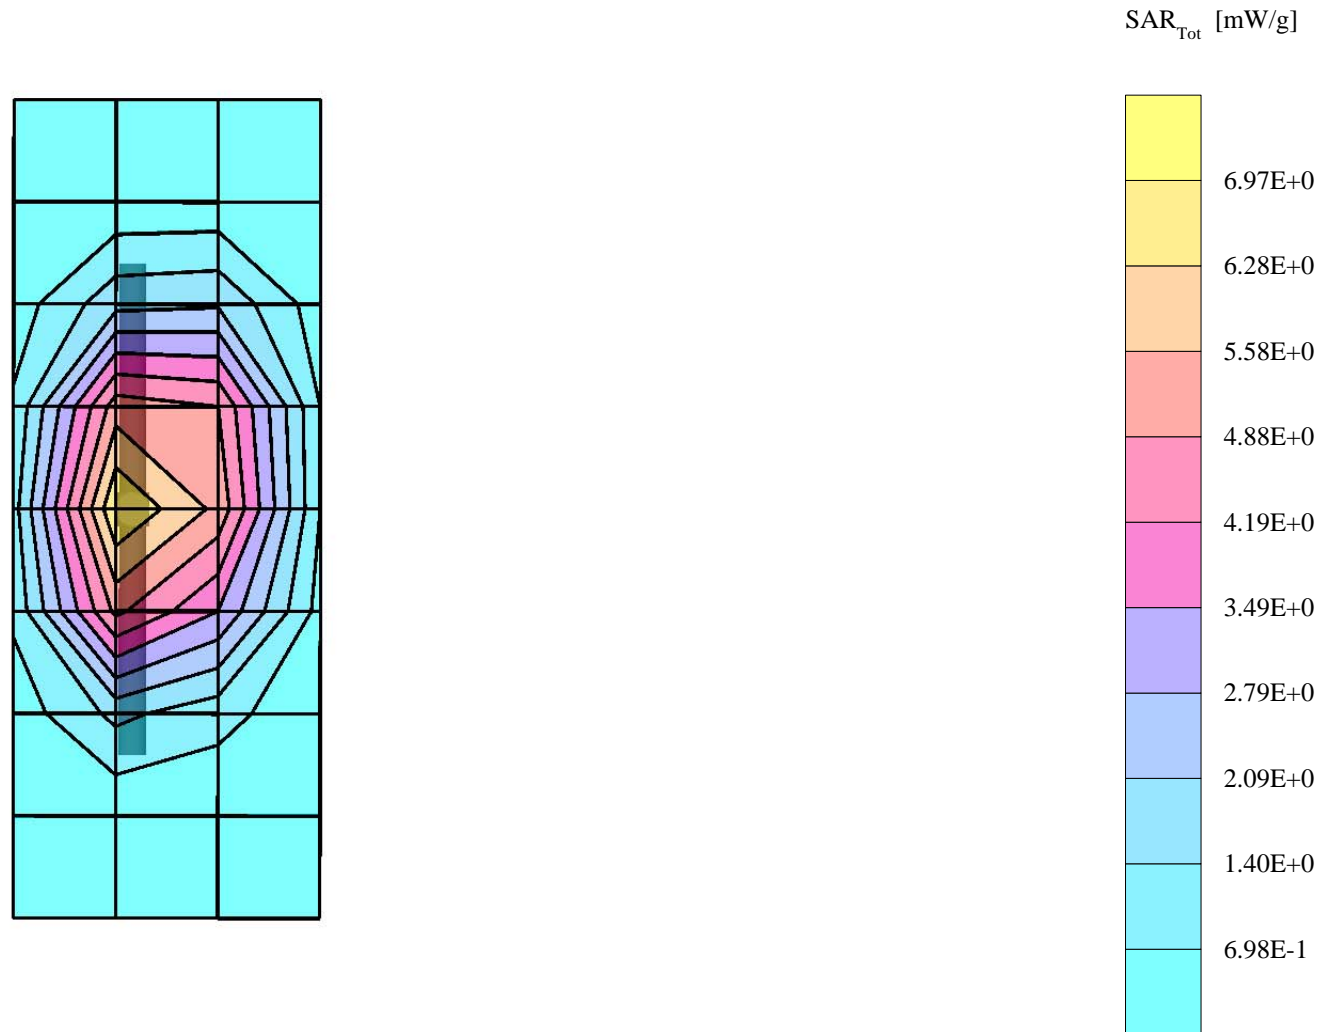

Dipole 1800 MHz

1800 MHz System Performance Check / Dipole Sn# 251tr

PM2 Power = 204mW Refl.Pwr PM3= -22.15dB

Sim.Temp@SPC = 19.4C Room Temp @ SPC = 21C


R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; Section; Position: ; Frequency: 1800 MHz

Probe: ET3DV6 - SN1398 - Validation4; ConvF(5.04,5.04,5.04); Crest factor: 1.0; 1800 MHz VALIDATION: $\sigma = 1.35$ mho/m $\epsilon_r = 38.8$ $\rho = 1.00$ g/cm³

: , ()

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 5.0

Penetration depth: 8.4 (8.0, 9.2) [mm]

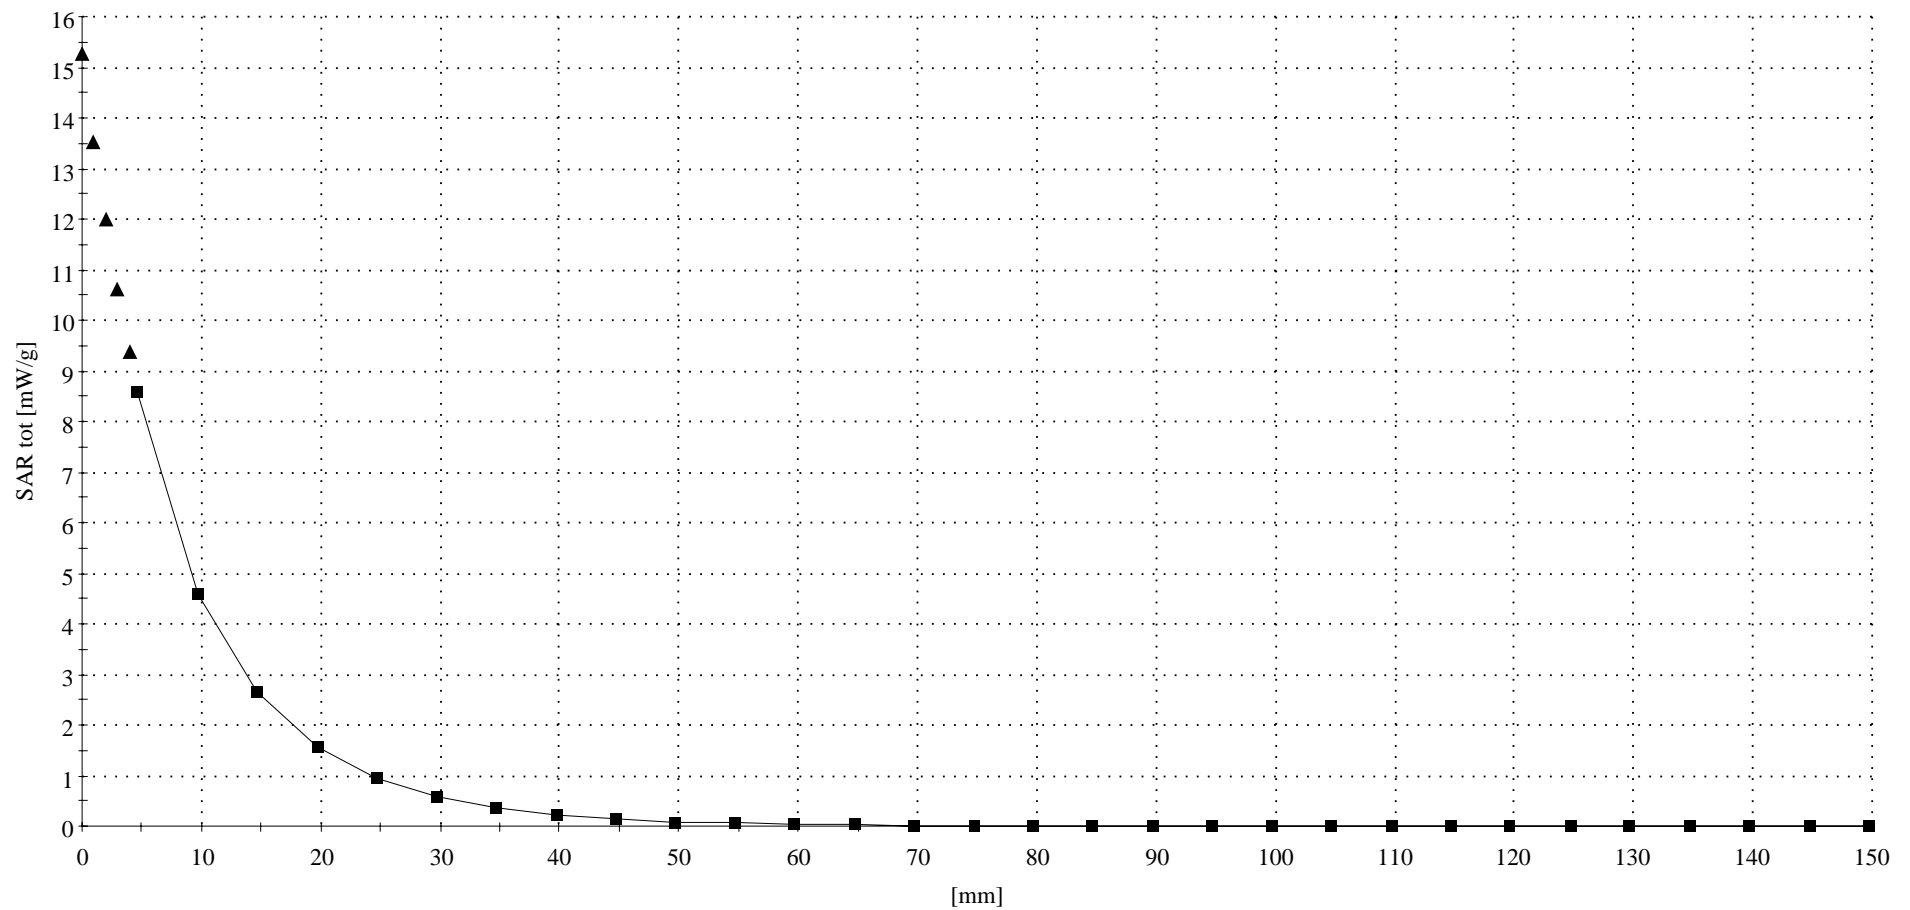

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

s/n: 1457602

Ch# 190 / Pwr Step: 5

Type of Modulation: GSM 850

DEVICE POSITION (cheek or rotated): Flip Open - Cheek Touch

R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; Left Hand Section; Position: (90°,180°); Frequency: 837 MHz

Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(6.29,6.29,6.29); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.92$ mho/m $\epsilon_r = 42.1$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.285 mW/g, , (Worst-case extrapolation)


Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 22.0 (19.4, 25.5) [mm]

Powerdrift: 0.03 dB

Antenna Position: Internal

Battery Model #: SNN5669A

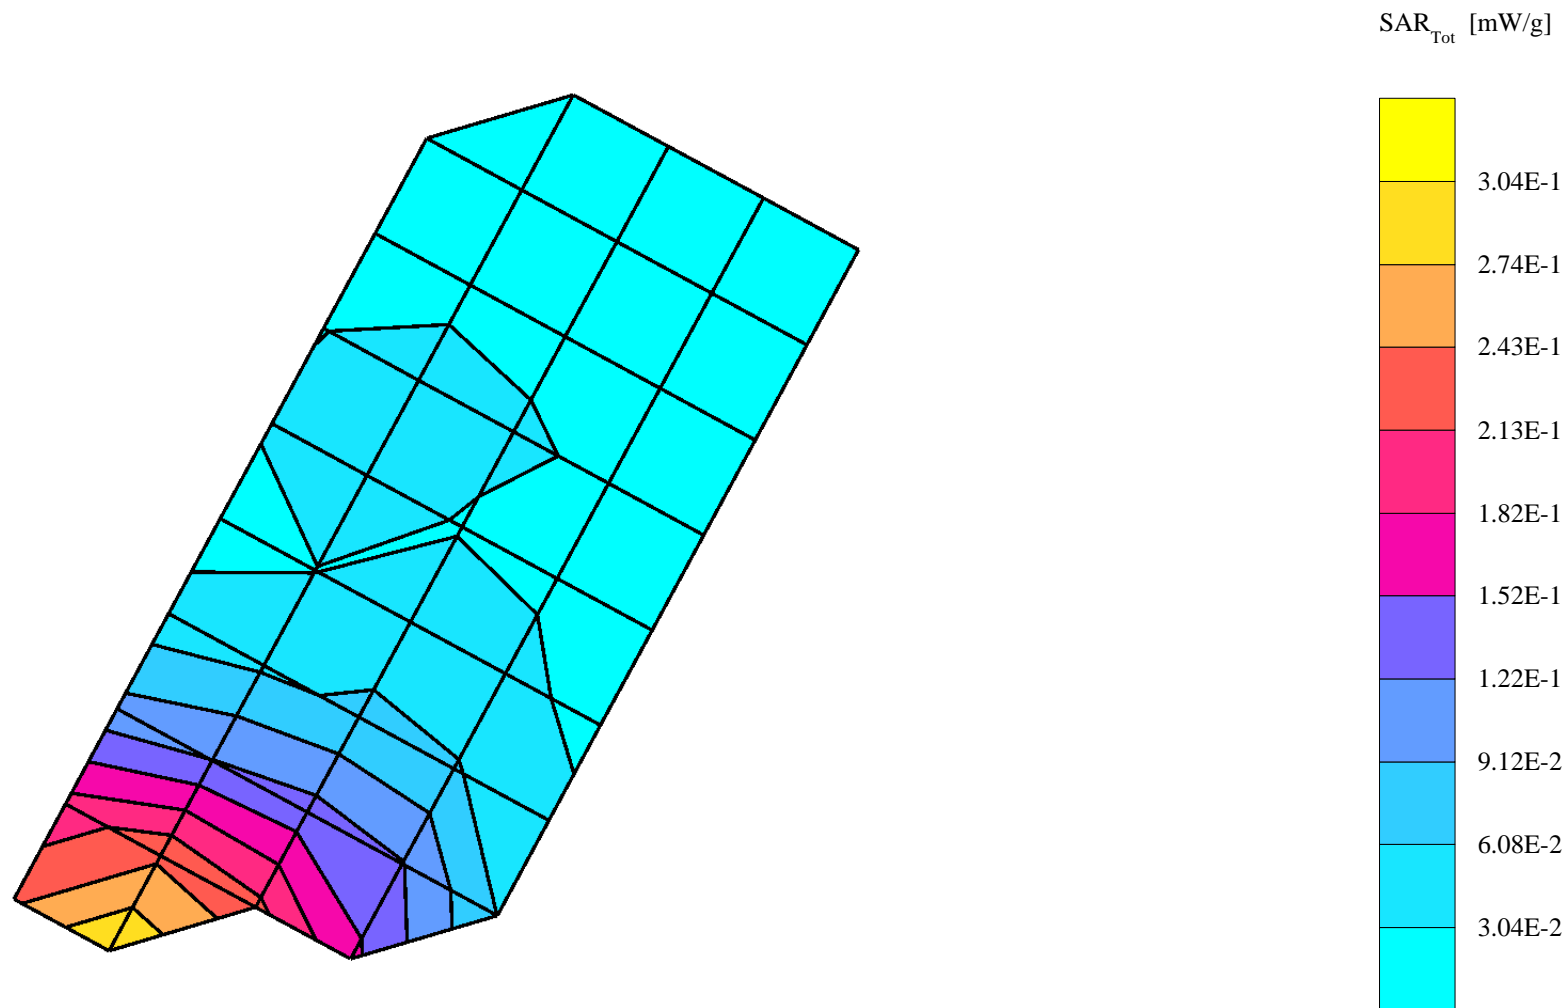

s/n: 1457602

Ch# 190 / Pwr Step: 5

Type of Modulation: GSM 850

DEVICE POSITION (cheek or rotated): Flip Open - Cheek Touch

R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; LH Front Tilt 20 Section; Position: (80°,180°); Frequency: 837 MHz

Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(6.29,6.29,6.29); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.92$ mho/m $\epsilon_r = 42.1$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.288 mW/g, SAR (10g): 0.196 mW/g, (Worst-case extrapolation)


Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 15.2 (13.3, 17.2) [mm]

Powerdrift: 0.04 dB

Antenna Position: Internal

Battery Model #: SNN5669A

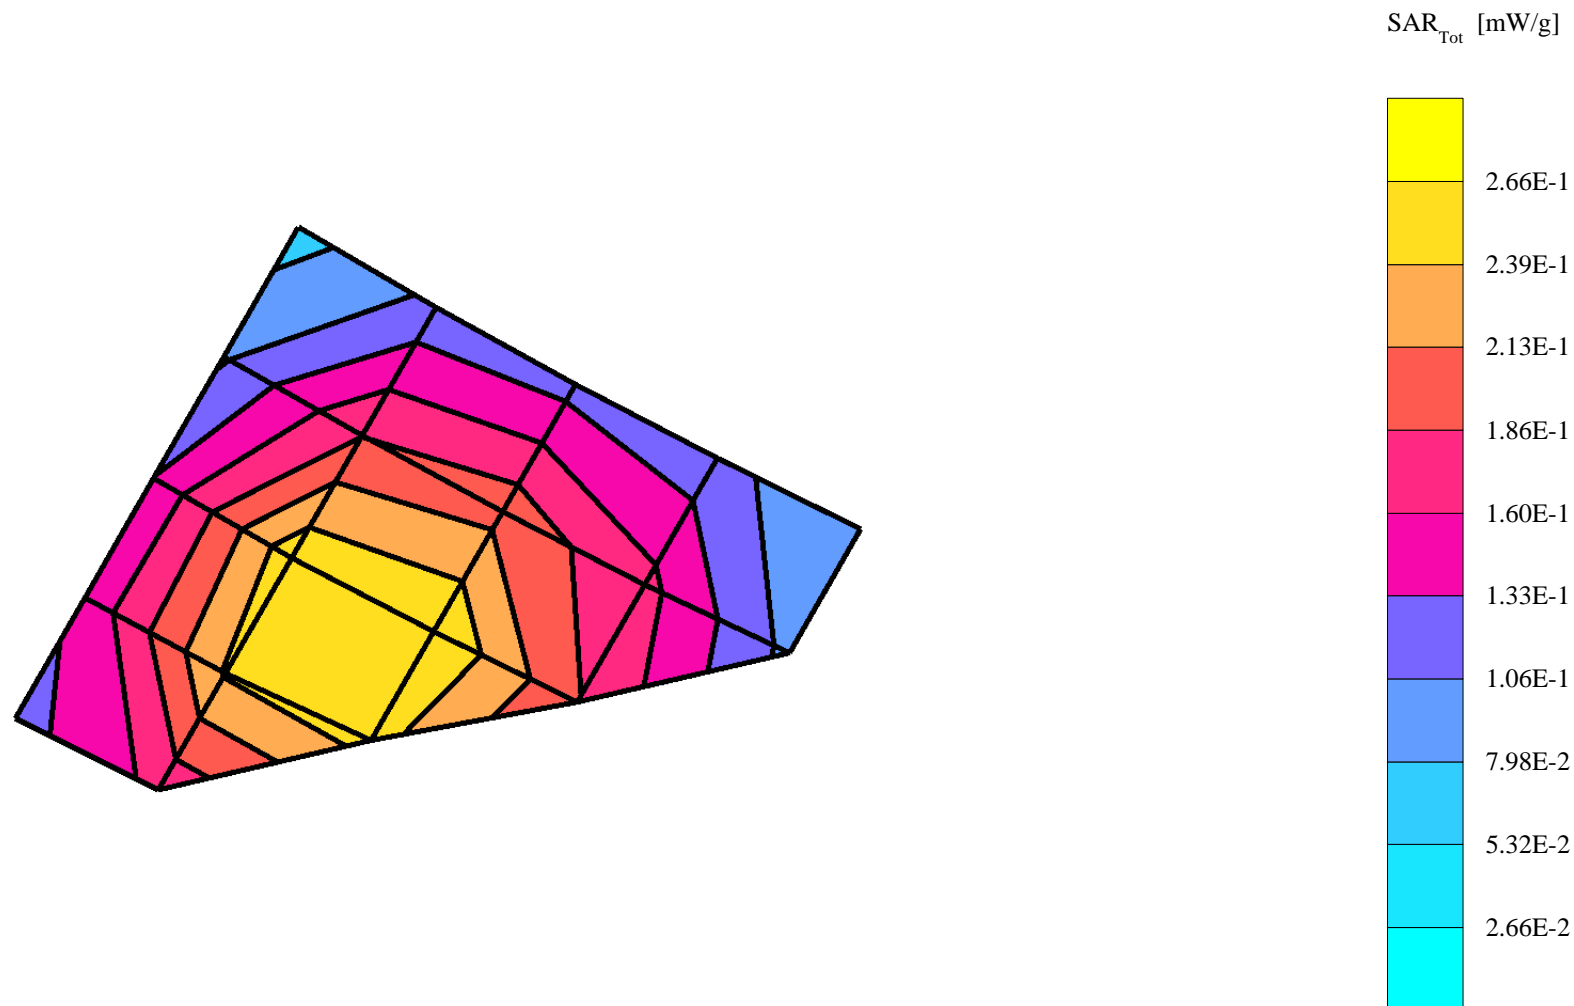

s/n: 1457601

Ch# 661 / Pwr Step: 0

Type of Modulation: GSM 1900

DEVICE POSITION (cheek or rotated): Flip Open - Cheek Touch

Antenna Position: Internal

Battery Model #: SNN5669A

R3 TP1159 SAM Expanded (Rev. 2)-9Jan03 Phantom; Left Hand Section; Position: (90°,180°); Frequency: 1880 MHz


Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(5.04,5.04,5.04); Crest factor: 8.0; 1880 MHz Head & Body: $\sigma = 1.45$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.223 mW/g, SAR (10g): 0.126 mW/g, (Worst-case extrapolation)

Coarse: Dx = 10.0, Dy = 10.0, Dz = 10.0

Penetration depth: 10.2 (9.0, 11.8) [mm]

Powerdrift: -0.37 dB

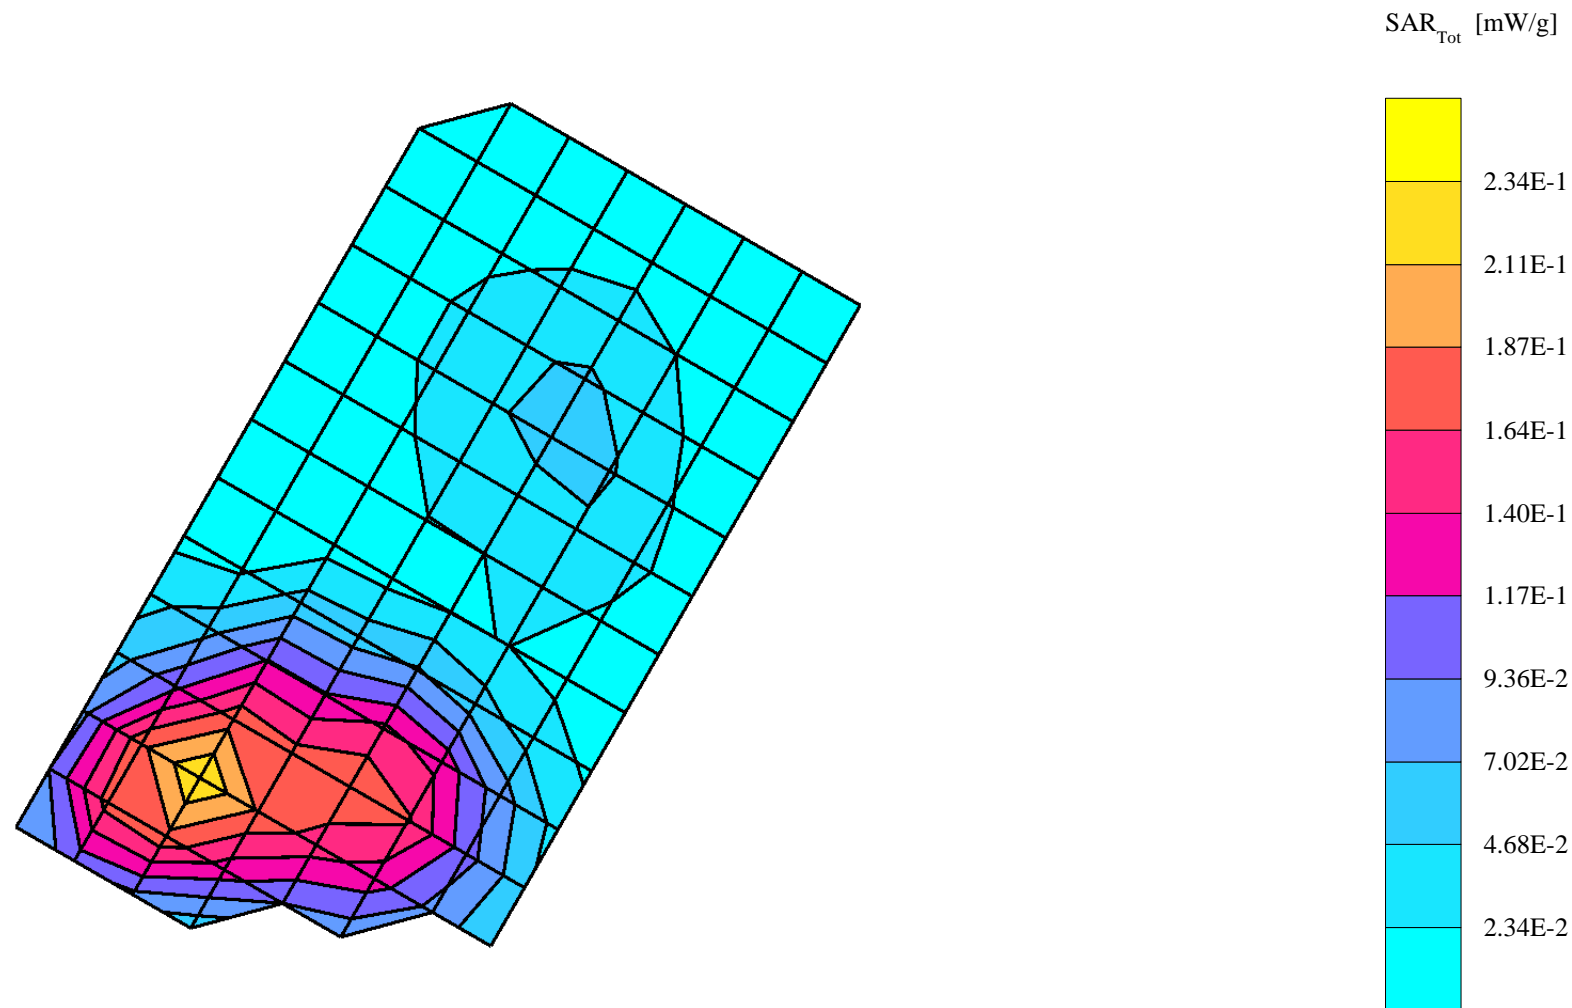

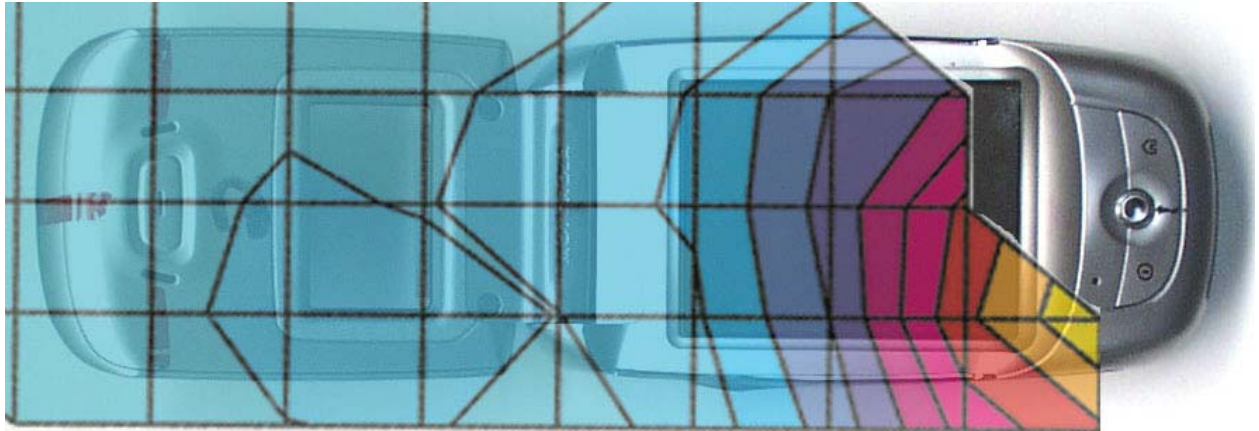


Figure 1. Typical 800MHz Head Adjacent Contour Overlaid on Phone with Flip Open (Cheek Touch)

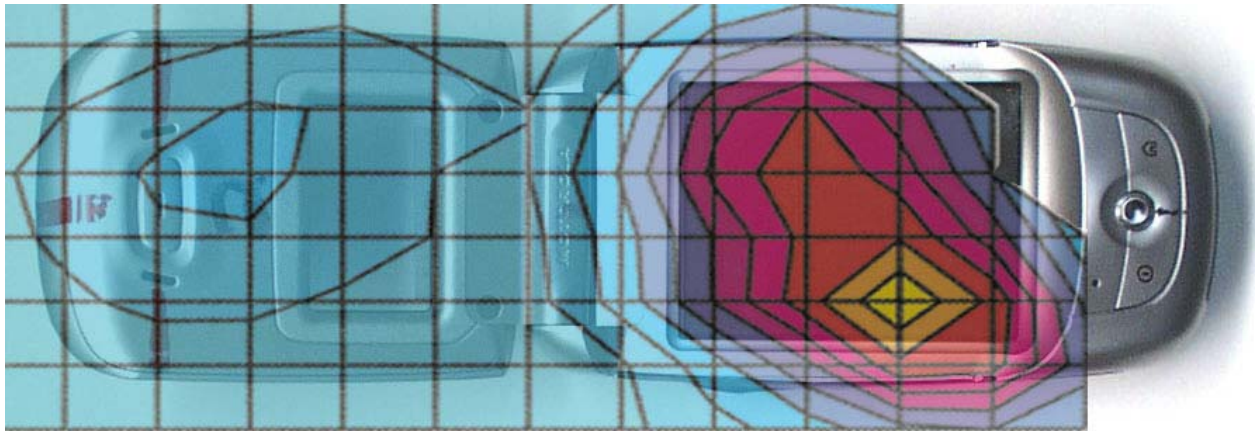


Figure 2. Typical 1900MHz Head Adjacent Contour Overlaid on Phone with Flip Open (Cheek Touch)

s/n: 1457602

Ch#190 / Pwr Step: 5

Type of Modulation: GSM 850

Antenna Position: Internal

Battery Model #: SNN5669A

DEVICE POSITION (cheek or rotated): Flip Open - Phone Rotated

R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; RH Front Tilt 20 Section; Position: (80°,180°); Frequency: 837 MHz


Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(6.29,6.29,6.29); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.92$ mho/m $\epsilon_r = 42.1$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.0611 mW/g, SAR (10g): 0.0421 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 13.4 (10.7, 17.1) [mm]

Powerdrift: -0.10 dB

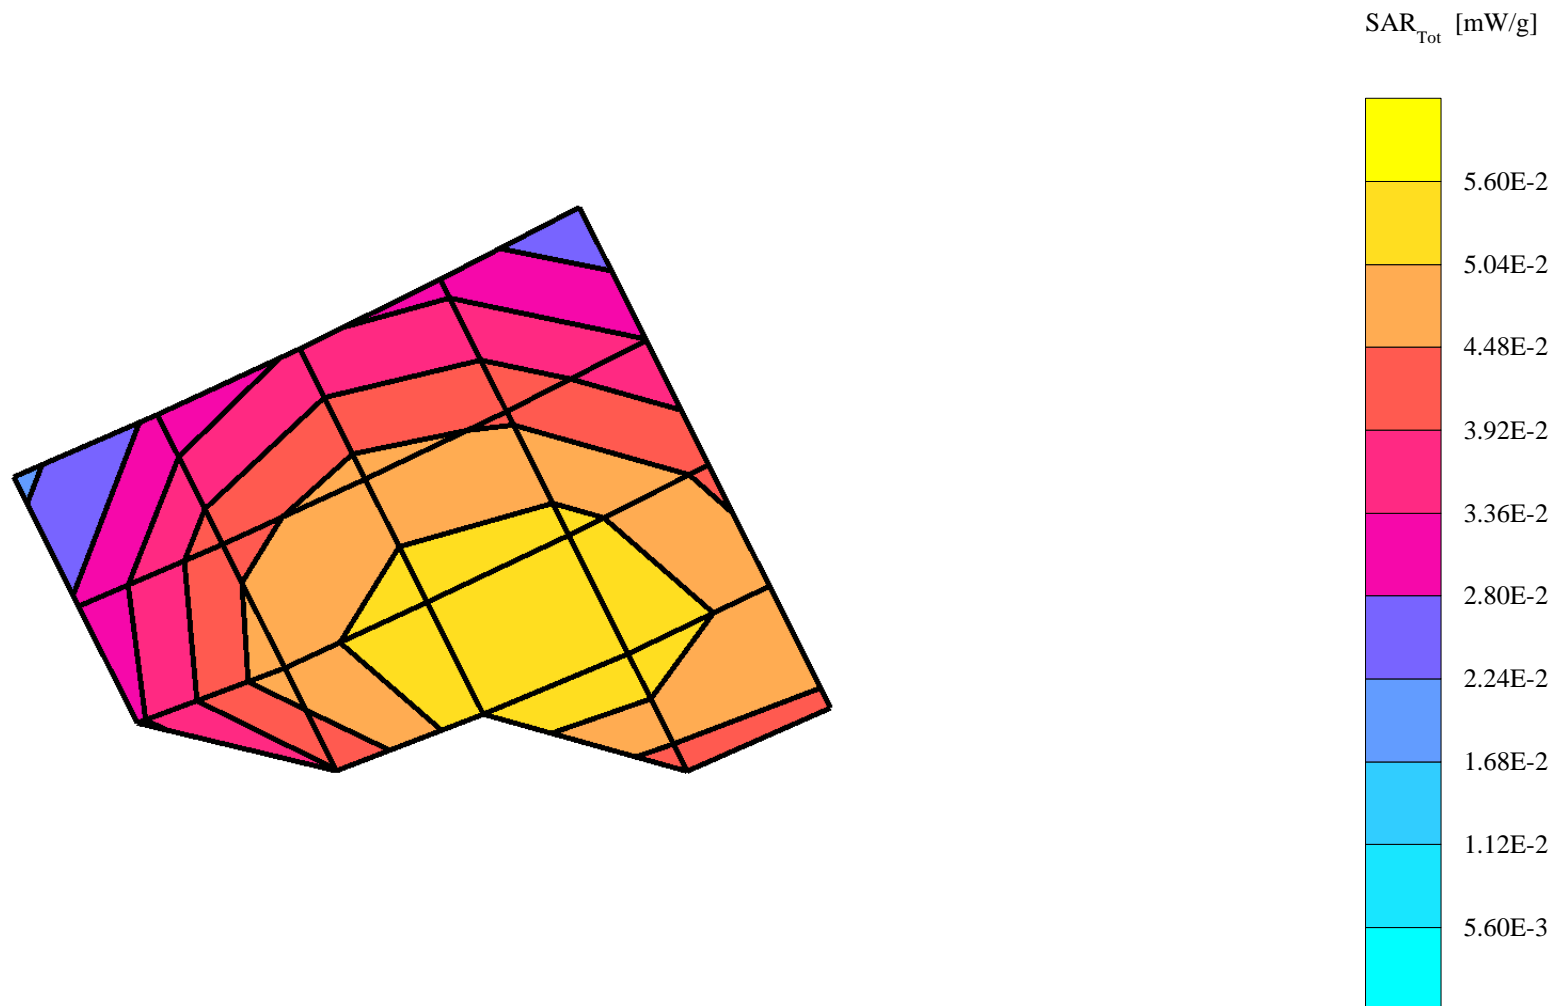

s/n: 1457601

Ch# 661 / Pwr Step: 0

Type of Modulation: GSM 1900

DEVICE POSITION (cheek or rotated): Flip Open - Phone Rotated

R3 TP1159 SAM Expanded (Rev. 2)-9Jan03 Phantom; Left Hand Section; Position: (90°,180°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(5.04,5.04,5.04); Crest factor: 8.0; 1880 MHz Head & Body: $\sigma = 1.45$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.107 mW/g, SAR (10g): 0.0621 mW/g, (Worst-case extrapolation)


Coarse: Dx = 10.0, Dy = 10.0, Dz = 10.0

Penetration depth: 10.5 (10.3, 10.9) [mm]

Powerdrift: -0.16 dB

Antenna Position: Internal

Battery Model #: SNN5669A

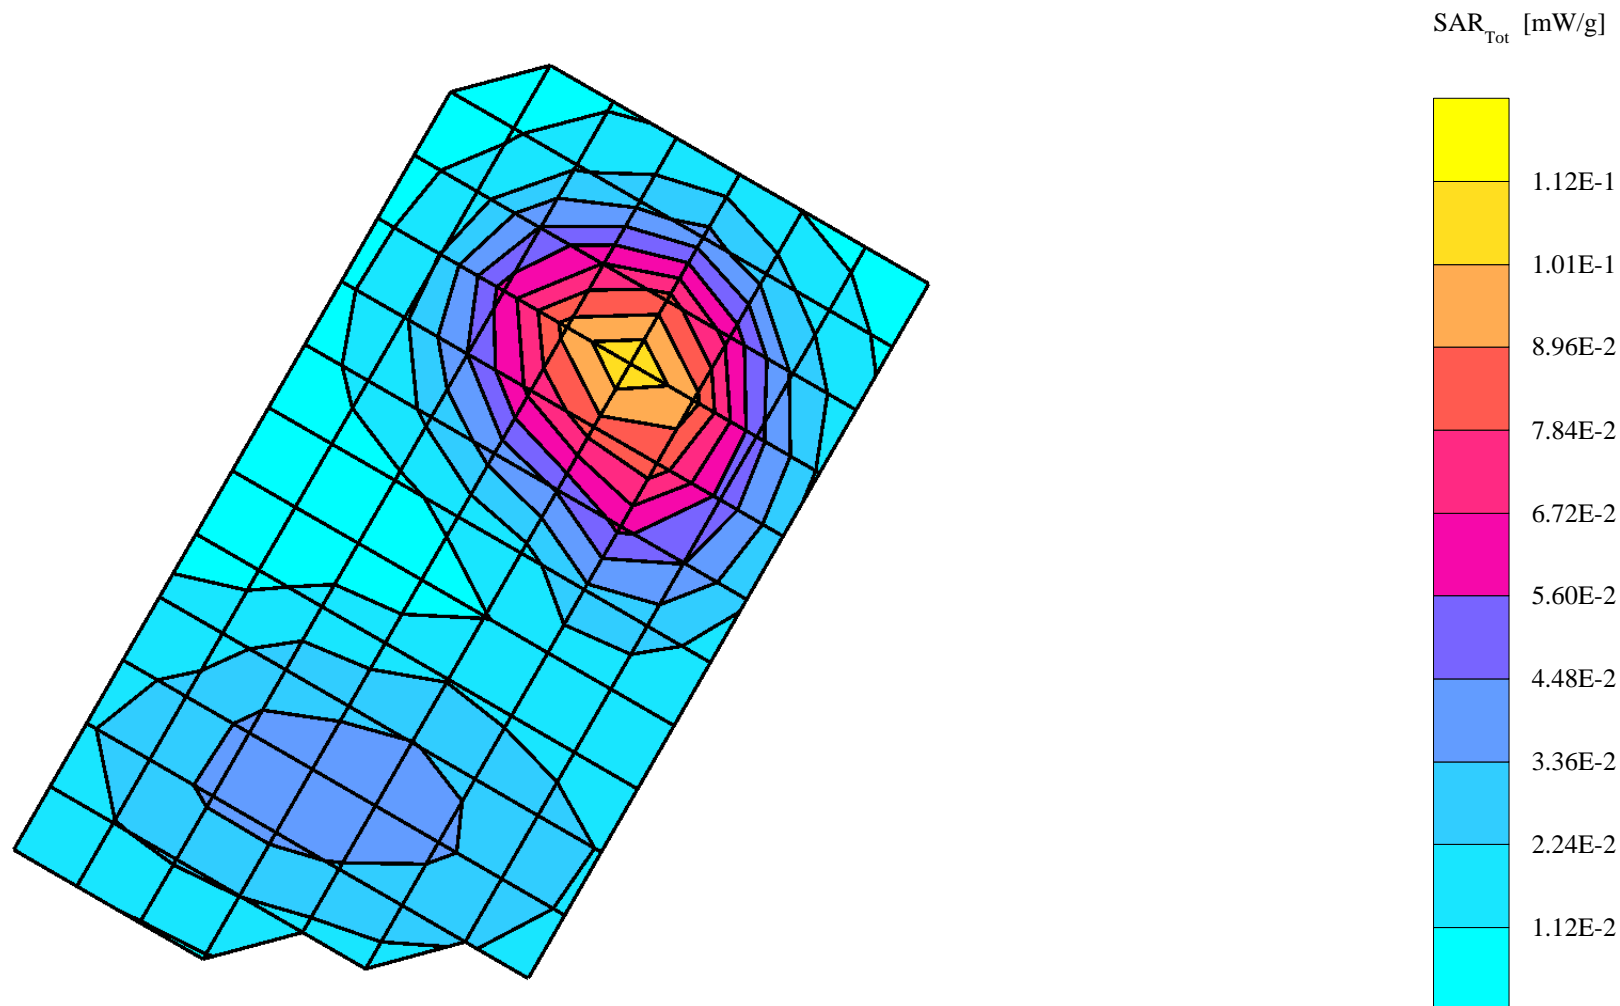

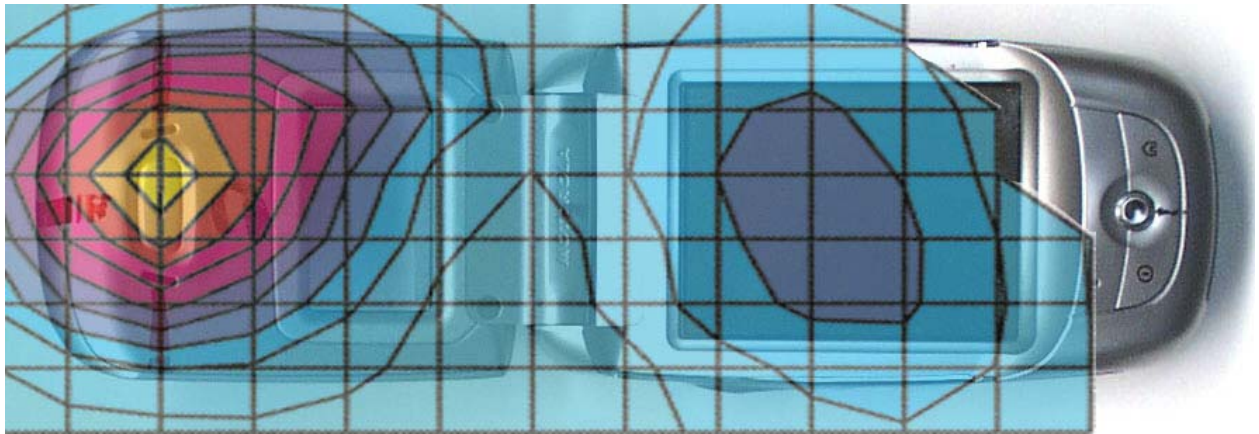


Figure 3. Typical 1900MHz Head Adjacent Contour Overlaid on Phone with Flip Open (15 ° Tilt)

s/n: 1457602

Ch# 190 / Pwr Step: 5

Type of Modulation: GSM 850

DEVICE POSITION (cheek or rotated): Flip Closed - Cheek Touch

R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; Left Hand Section; Position: (90°,180°); Frequency: 837 MHz


Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(6.29,6.29,6.29); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.92$ mho/m $\epsilon_r = 42.1$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.443 mW/g, SAR (10g): 0.325 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 20.5 (19.9, 20.8) [mm]

Powerdrift: 0.02 dB

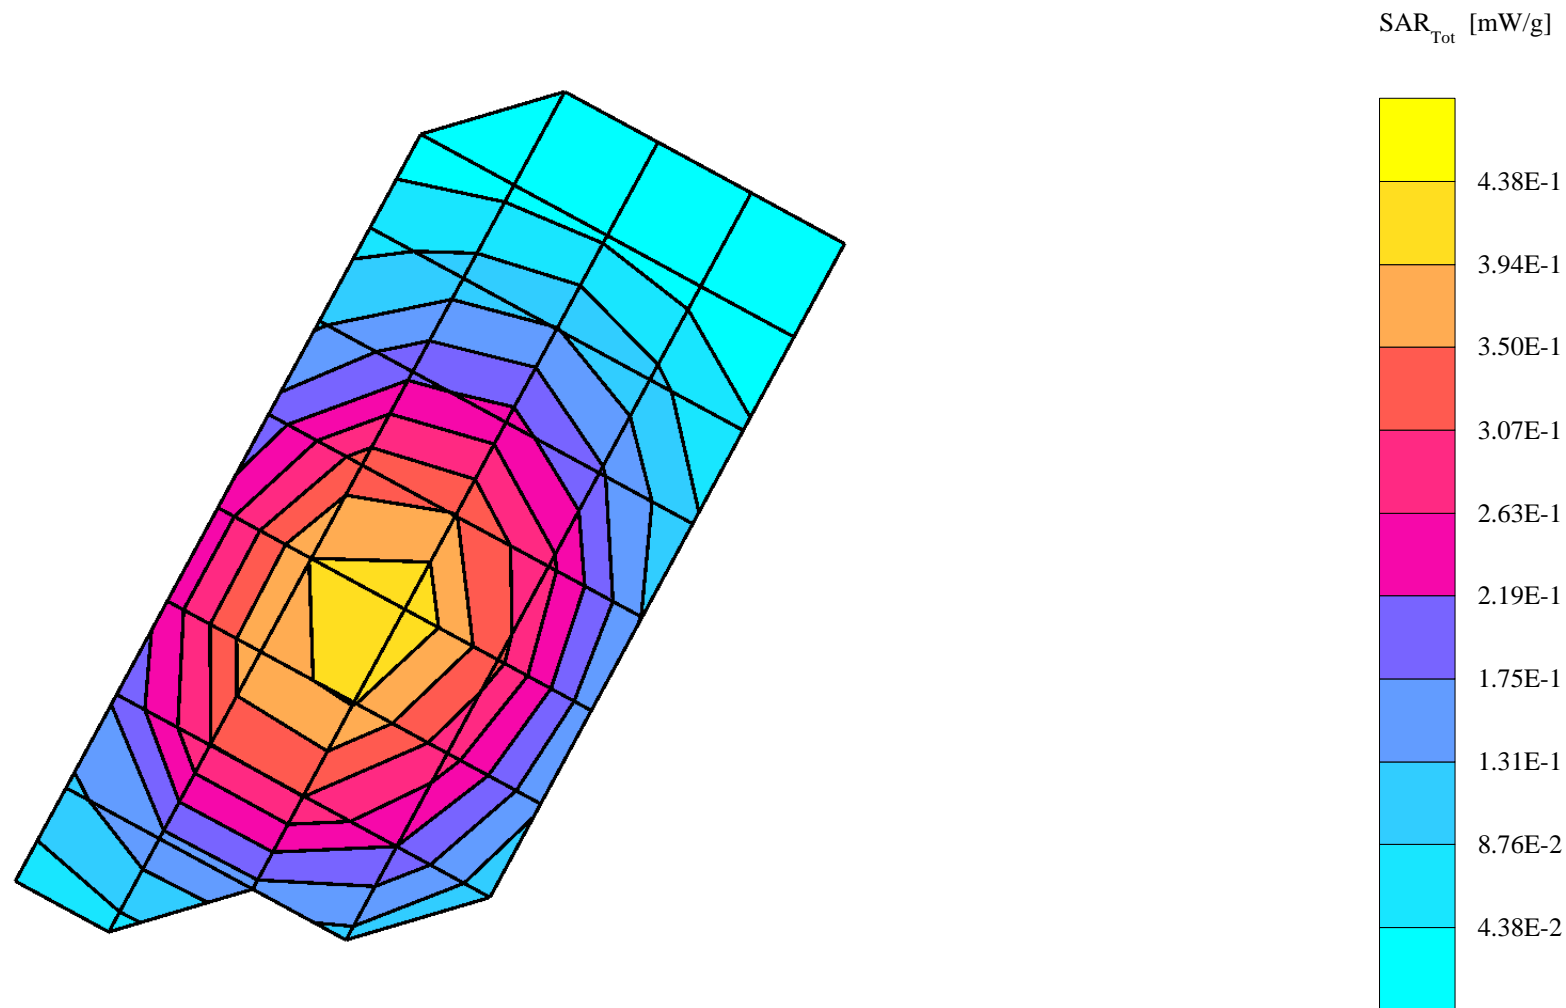

s/n: 1457601

Ch# 661 / Pwr Step: 0 (OTA)

Type of Modulation: GSM 1900

DEVICE POSITION (cheek or rotated): Flip Closed - Cheek Touch

R3 TP1159 SAM Expanded (Rev. 2)-9Jan03 Phantom; Right Hand Section; Position: (90°,180°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(5.04,5.04,5.04); Crest factor: 8.0; 1880 MHz Head & Body: $\sigma = 1.44$ mho/m $\epsilon_r = 38.6$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.273 mW/g, SAR (10g): 0.165 mW/g, (Worst-case extrapolation)


Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 10.8 (10.4, 11.4) [mm]

Powerdrift: 0.09 dB

Antenna Position: INTERNAL

Battery Model #: SNN5669A

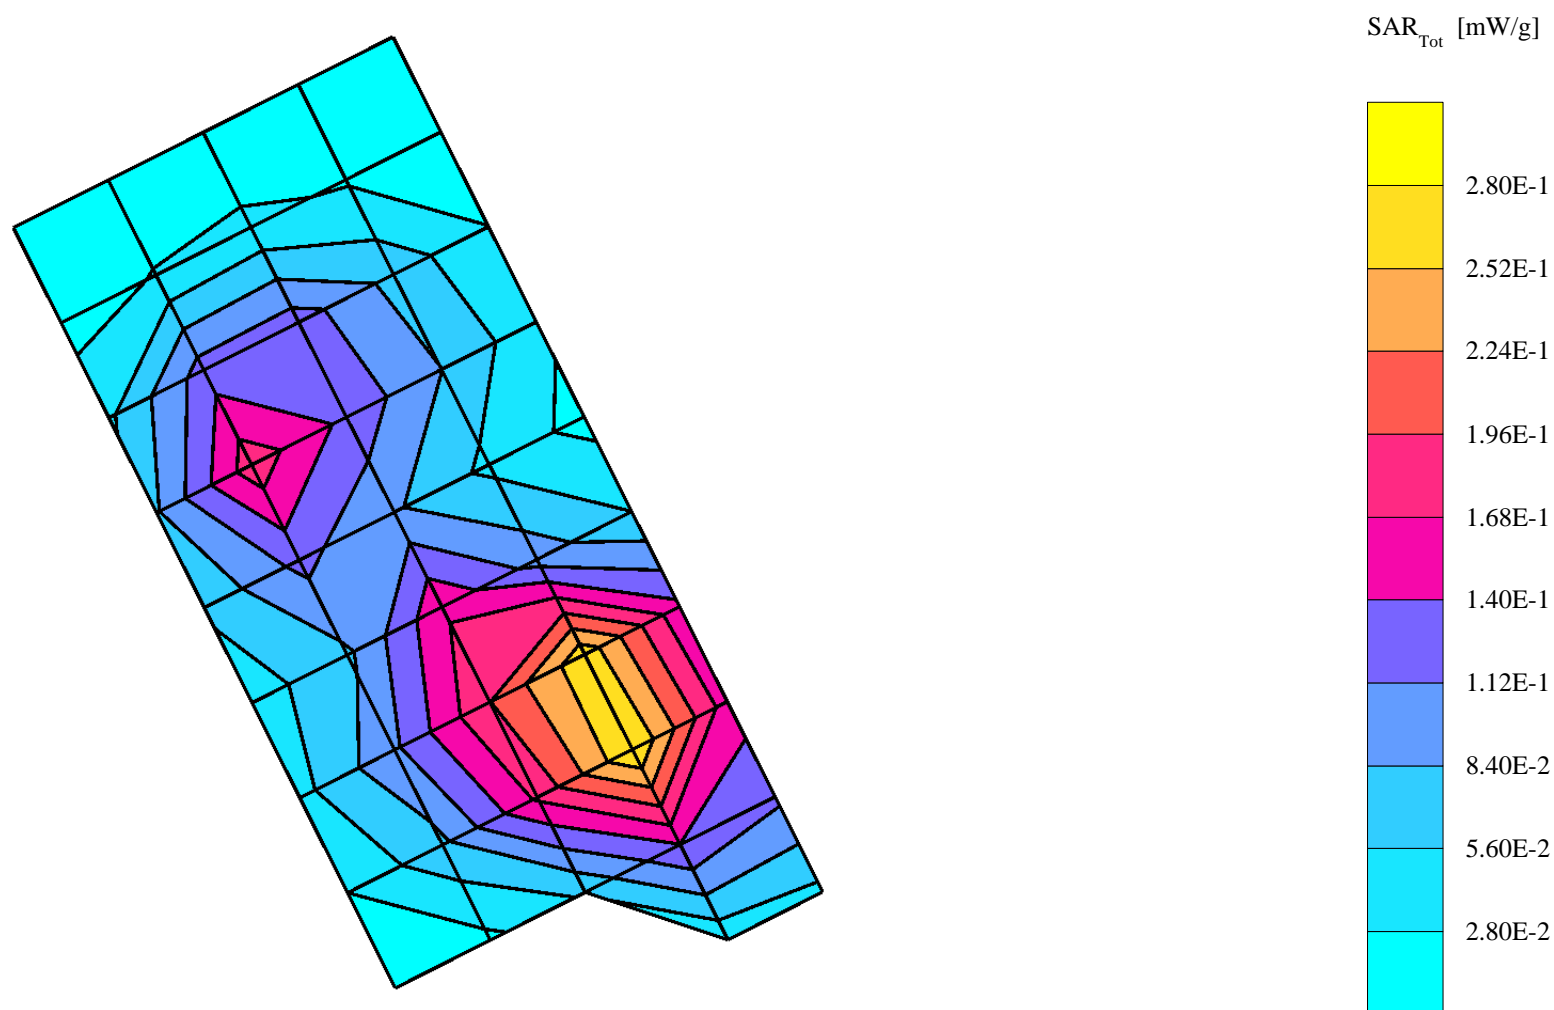

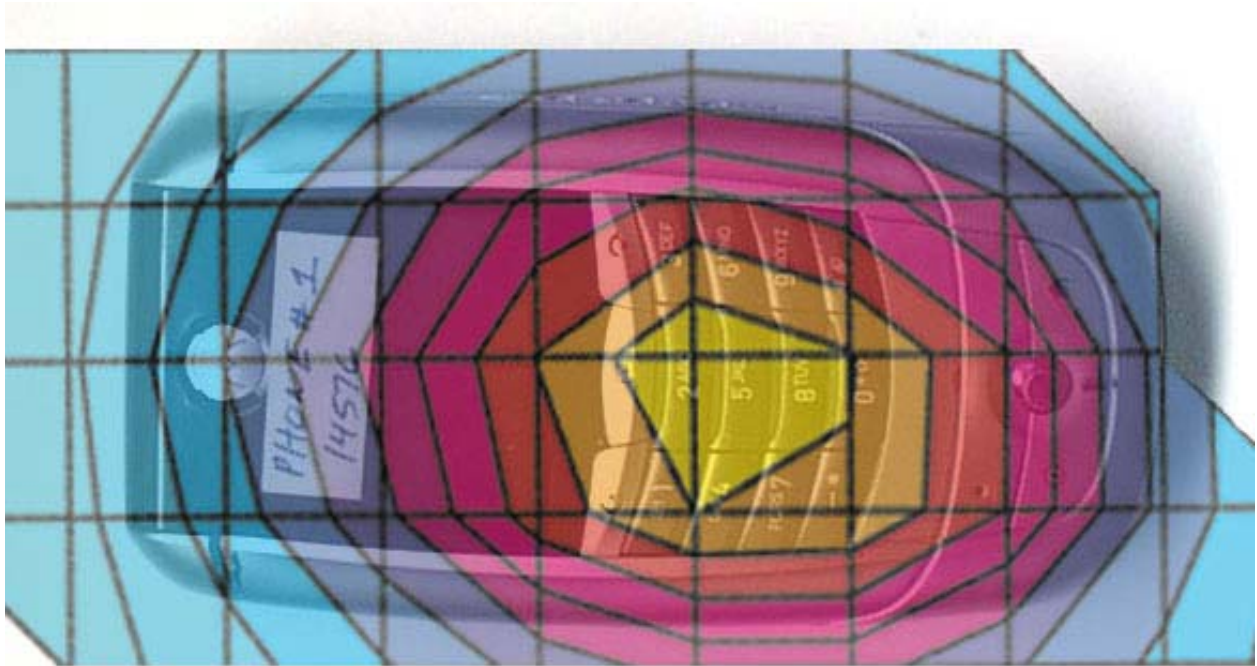


Figure 4. Typical 800MHz Head Adjacent Contour Overlaid on Phone with Flip Closed (Cheek Touch)

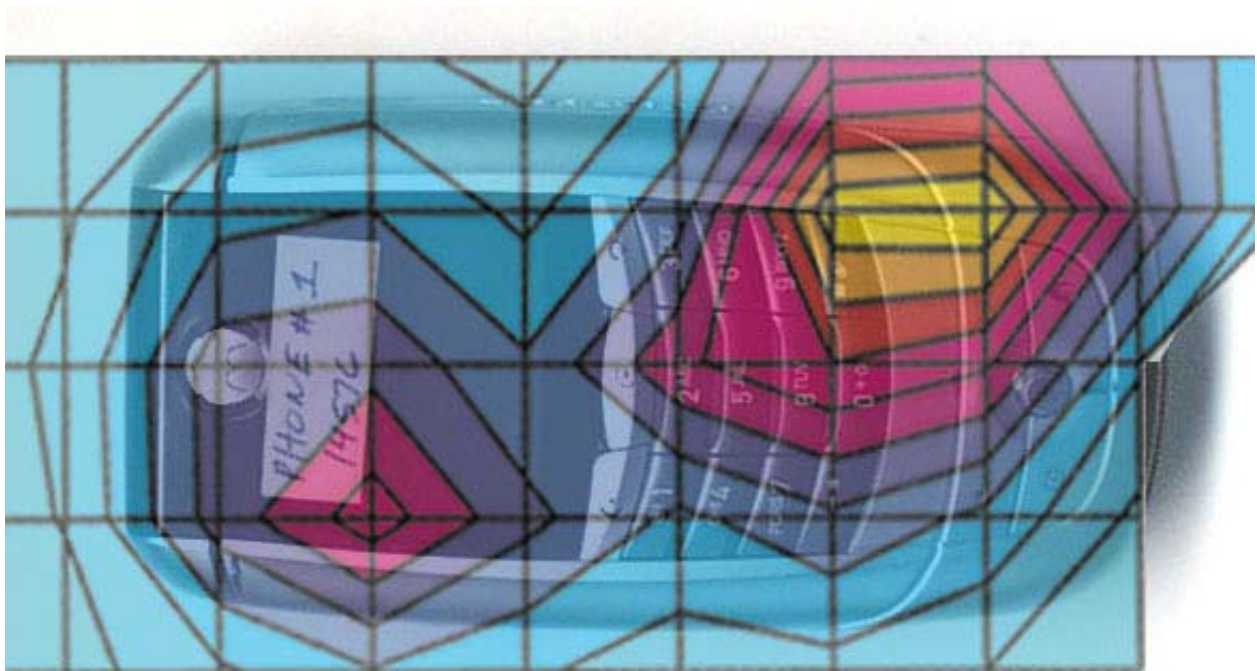


Figure 5. Typical 1900MHz Head Adjacent Contour Overlaid on Phone with Flip Closed (Cheek Touch)

s/n: 1457602

Ch# 190 / Pwr Step: 5

Type of Modulation: GSM 850

DEVICE POSITION (cheek or rotated): Flip Closed - Phone Rotated

Antenna Position: Internal

Battery Model #: SNN5669A

R3 TP-1153 SAM SUGAR Expanded (Rev. 2)-9Jan03 Phantom; Right Hand Section; Position: (90°,180°); Frequency: 837 MHz


Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(6.29,6.29,6.29); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.91$ mho/m $\epsilon_r = 41.8$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.285 mW/g, SAR (10g): 0.207 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 17.3 (15.9, 18.7) [mm]

Powerdrift: -0.16 dB

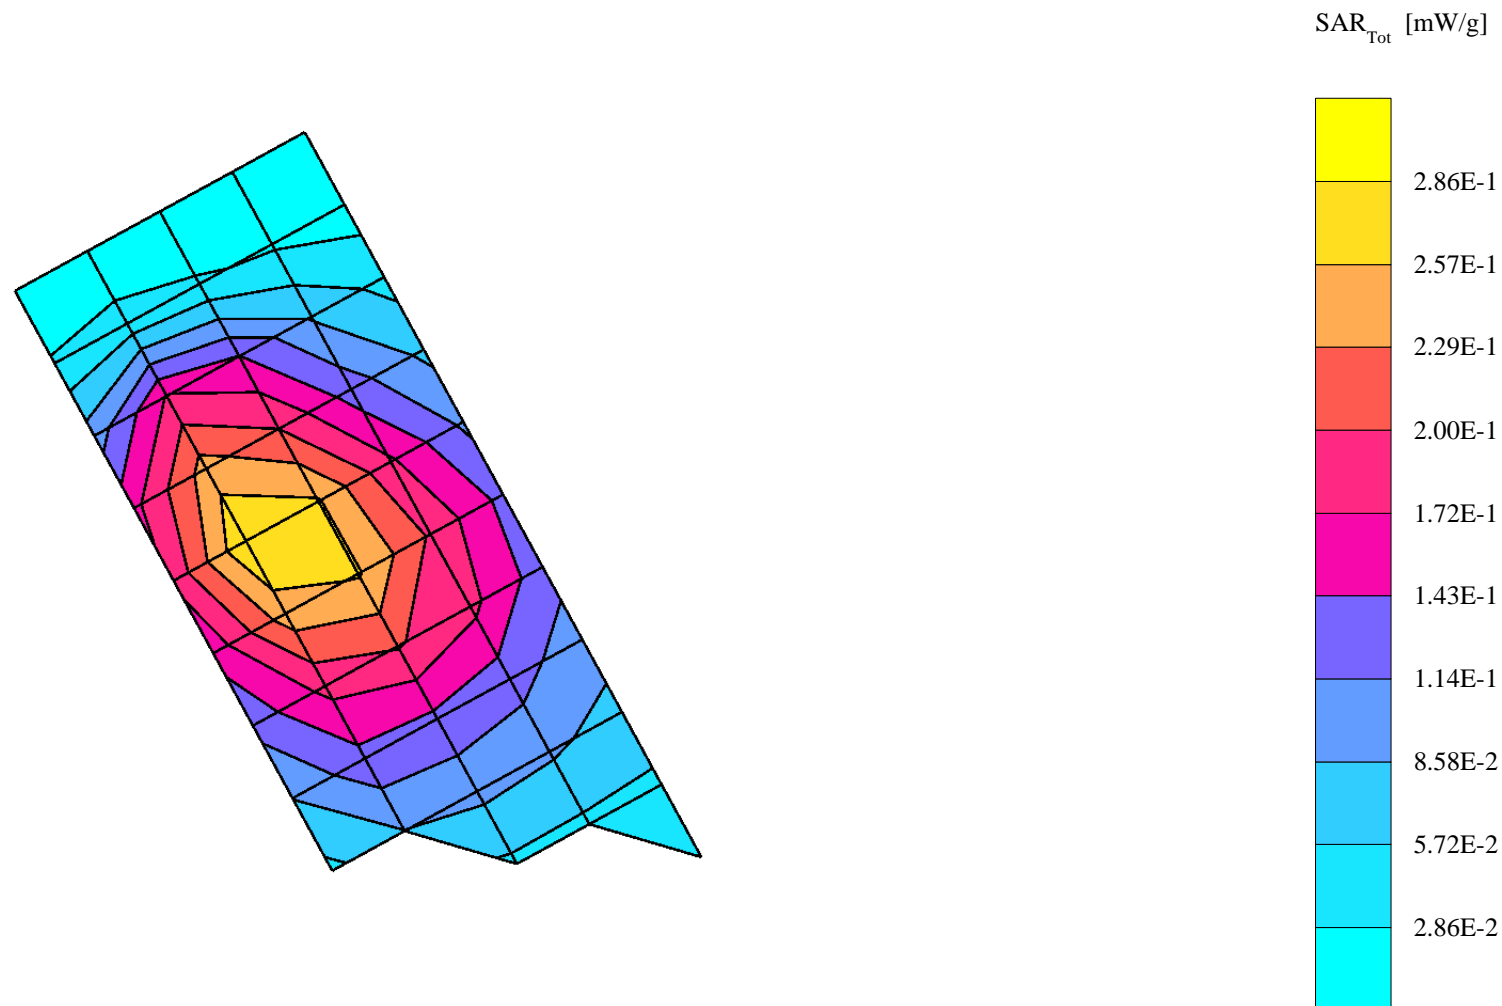

s/n: 1457601

Ch# 661 / Pwr Step: 0 (OTA)

Type of Modulation: GSM 1900

DEVICE POSITION (cheek or rotated): Flip Closed - Phone Rotated

R3 TP1159 SAM Expanded (Rev. 2)-9Jan03 Phantom; Right Hand Section; Position: (90°,180°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1398 - IEEE Head2; ConvF(5.04,5.04,5.04); Crest factor: 8.0; 1880 MHz Head & Body: $\sigma = 1.44$ mho/m $\epsilon_r = 38.6$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.186 mW/g, SAR (10g): 0.107 mW/g, (Worst-case extrapolation)


Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Penetration depth: 10.1 (9.6, 10.8) [mm]

Powerdrift: 0.36 dB

Antenna Position: INTERNAL

Battery Model #: SNN5669A

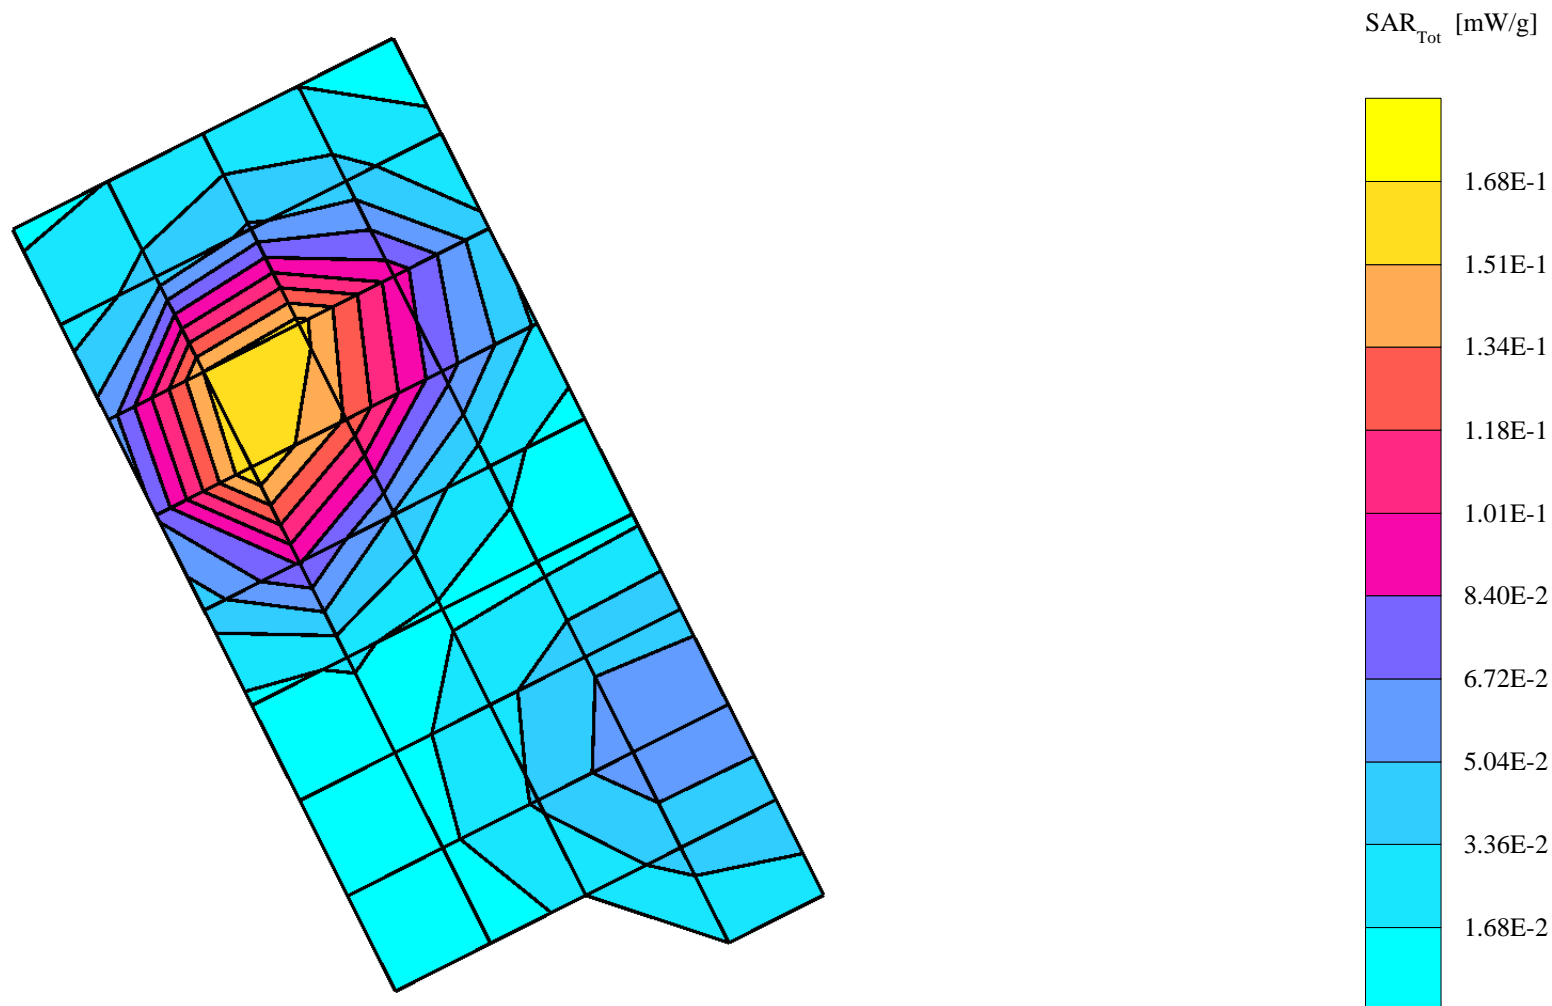

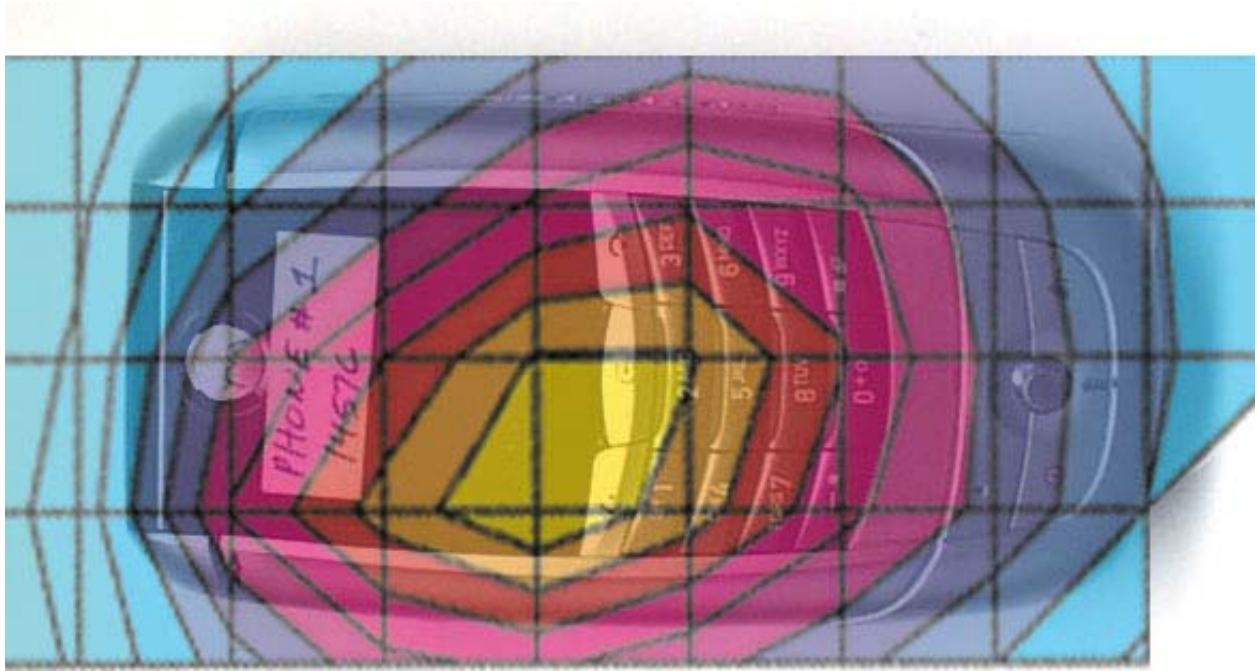


Figure 6. Typical 800MHz Head Adjacent Contour Overlaid on Phone with Flip Closed (15 ° Tilt)

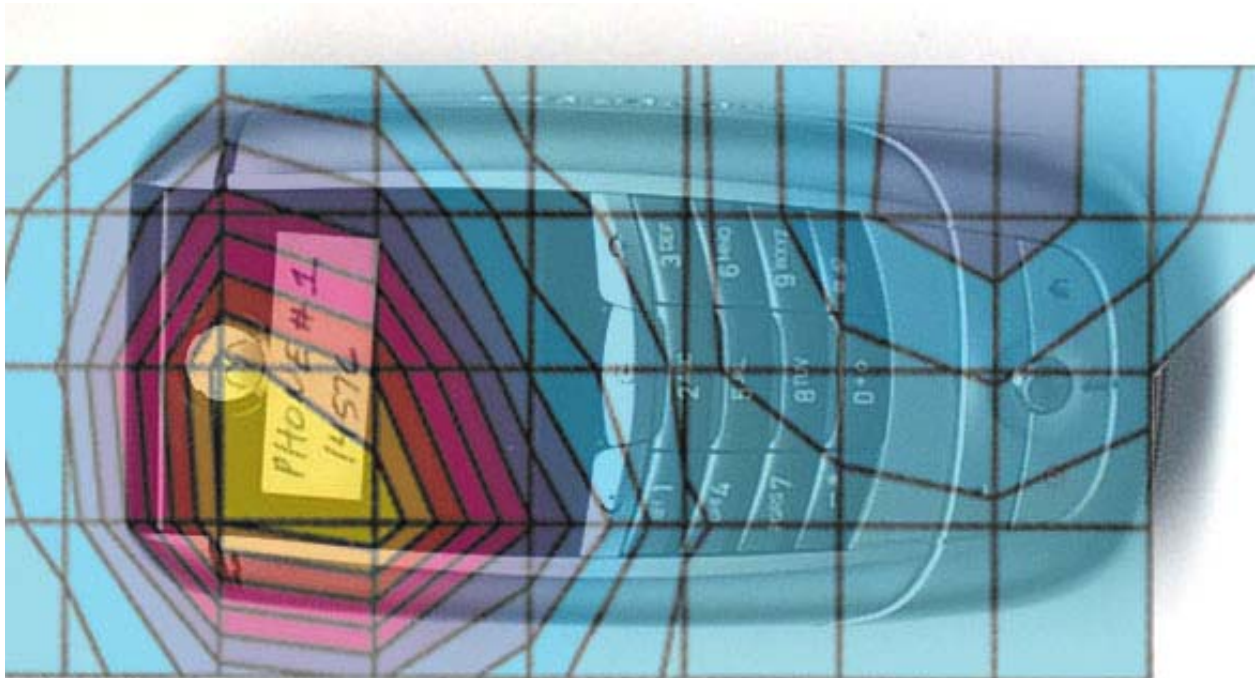


Figure 7. Typical 1900MHz Head Adjacent Contour Overlaid on Phone with Flip Closed (15 ° Tilt)

Appendix 3

SAR distribution plots for Body Worn Configuration

s/n: 1457602

Ch# 190 / Pwr Step: 5

Type of Modulation: GSM 850

Accessory Model #: Back of Phone 15mm from Flat Phantom

Antenna Position: Internal

Battery Model #: SNN5669A

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 2 Section; Position: (0°,0°); Frequency: 837 MHz


Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(5.88,5.88,5.88); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.414 mW/g, SAR (10g): 0.299 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 17.2 (16.0, 18.4) [mm]

Powerdrift: 0.03 dB

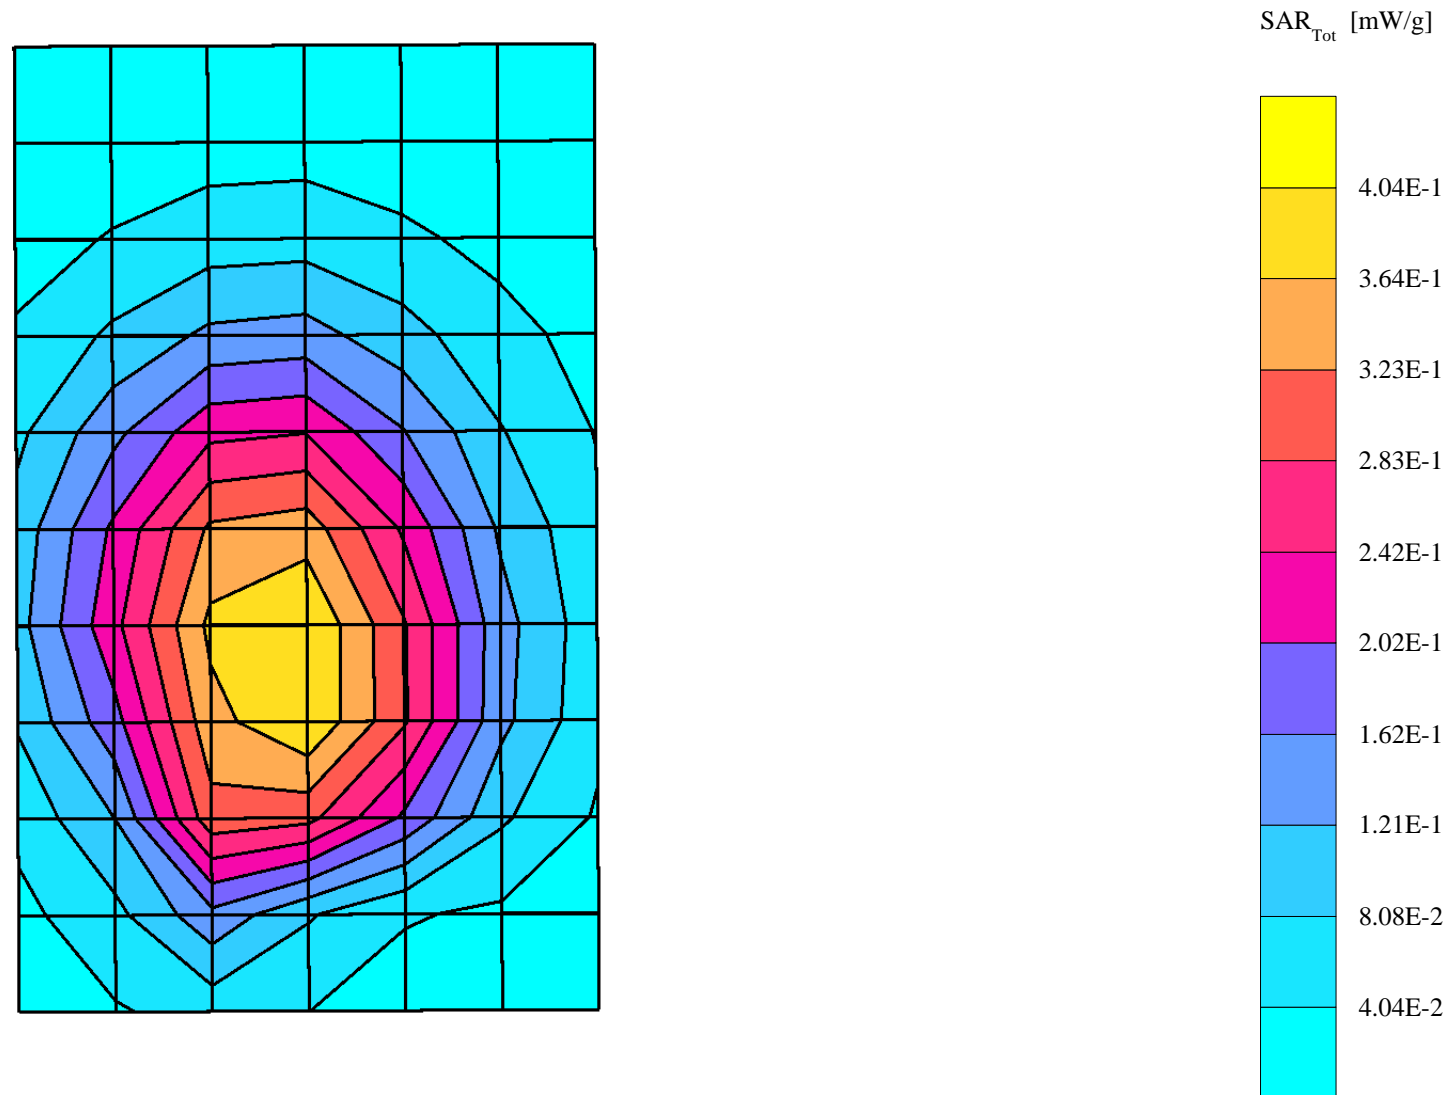

s/n: 1457602

Ch# 190 / Pwr Step: 5

Antenna Position: Internal

Type of Modulation: GSM 850

Battery Model #: SNN5669A

Accessory Model #: Back of Phone 25mm from Flat Phantom

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 2 Section; Position: (0°,0°); Frequency: 836 MHz


Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(5.88,5.88,5.88); Crest factor: 4.0; 835 MHz Head & Body: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.547 mW/g, SAR (10g): 0.396 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 17.3 (16.3, 18.2) [mm]

Powerdrift: -0.19 dB

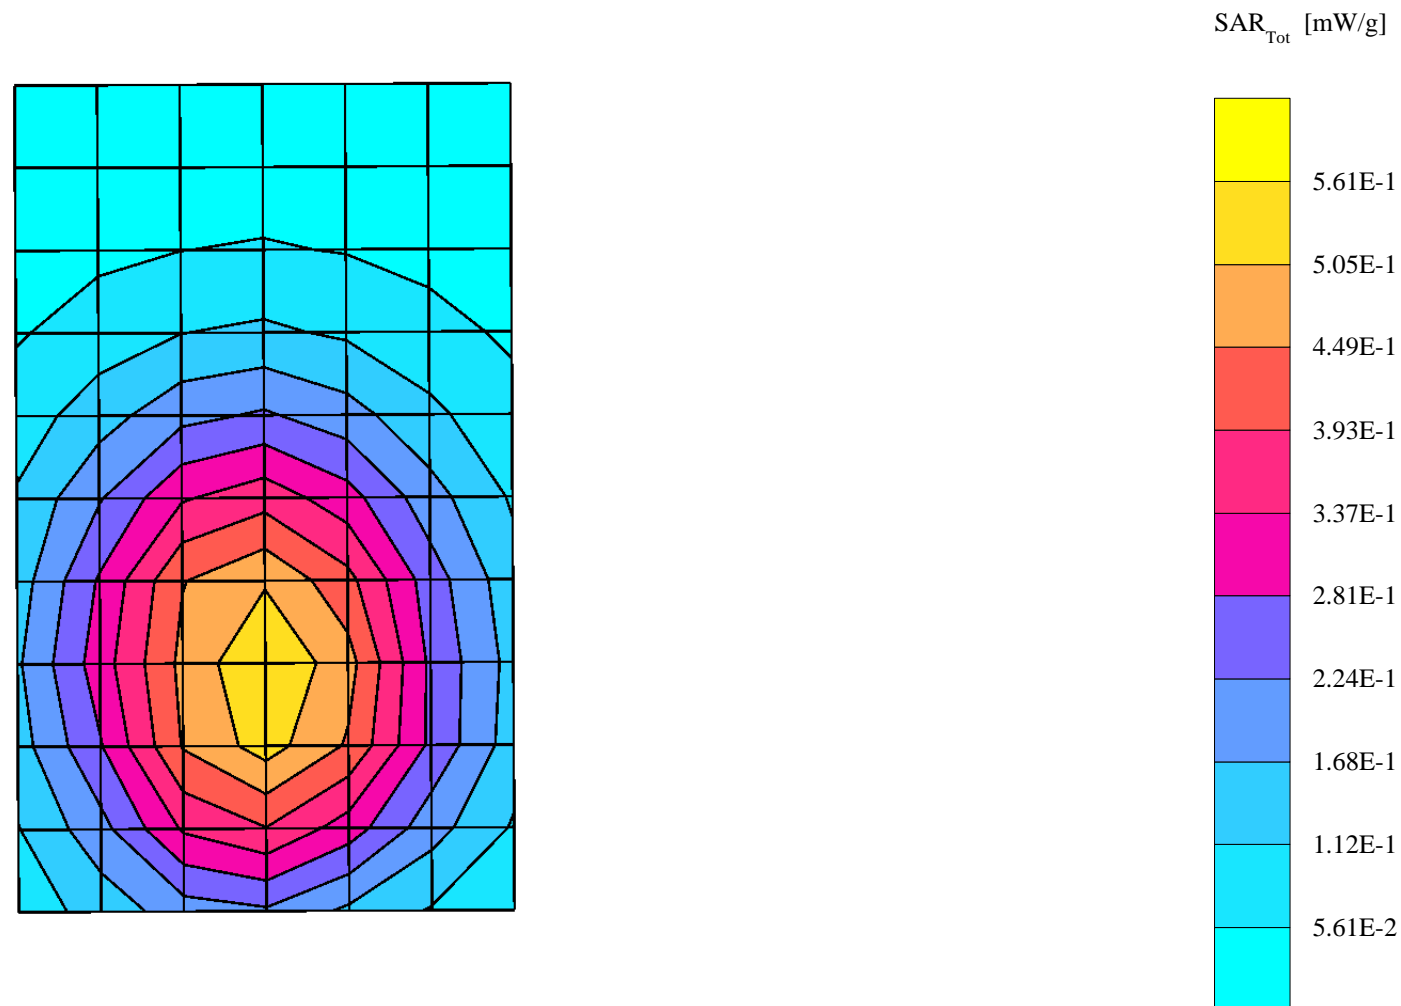

s/n: 1457602

Ch# 190 / Pwr Step: 5

Type of Modulation: GSM 850

Accessory Model #: Bluetooth transmitting - CHYN4632A POUCH

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 2 Section; Position: (0°,0°); Frequency: 836 MHz

Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(5.88,5.88,5.88); Crest factor: 8.0; 835 MHz Head & Body: $\sigma = 0.98$ mho/m $\epsilon_r = 54.6$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.671 mW/g, SAR (10g): 0.473 mW/g, (Worst-case extrapolation)



Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 15.5 (15.0, 16.1) [mm]

Powerdrift: -0.40 dB

Antenna Position: Internal

Battery Model #: SNN5669A

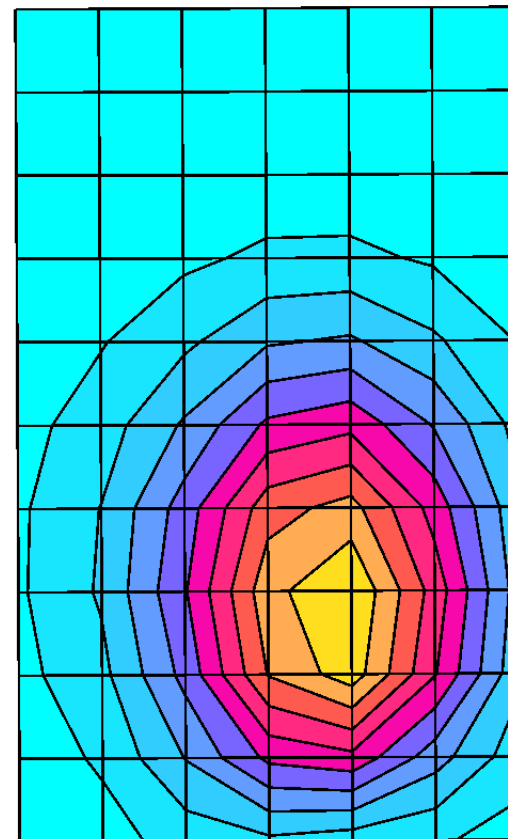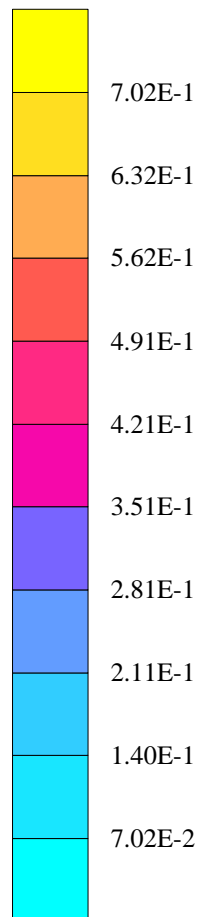SAR_{Tot} [mW/g]

s/n1457601

Ch# 661 / Pwr Step: 0

Antenna Position: Internal

Type of Modulation: GSM1900

Battery Model #:SNN5669a

Accessory Model #: BAcK of Phone 15mm from Flat Phantom

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 1 Section; Position: (0°,0°); Frequency: 1880 MHz


Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(4.50,4.50,4.50); Crest factor: 8.0; 1880 MHz Head & Body: $\sigma = 1.59$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.450 mW/g, SAR (10g): 0.255 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 8.9 (8.4, 9.8) [mm]

Powerdrift: -0.14 dB

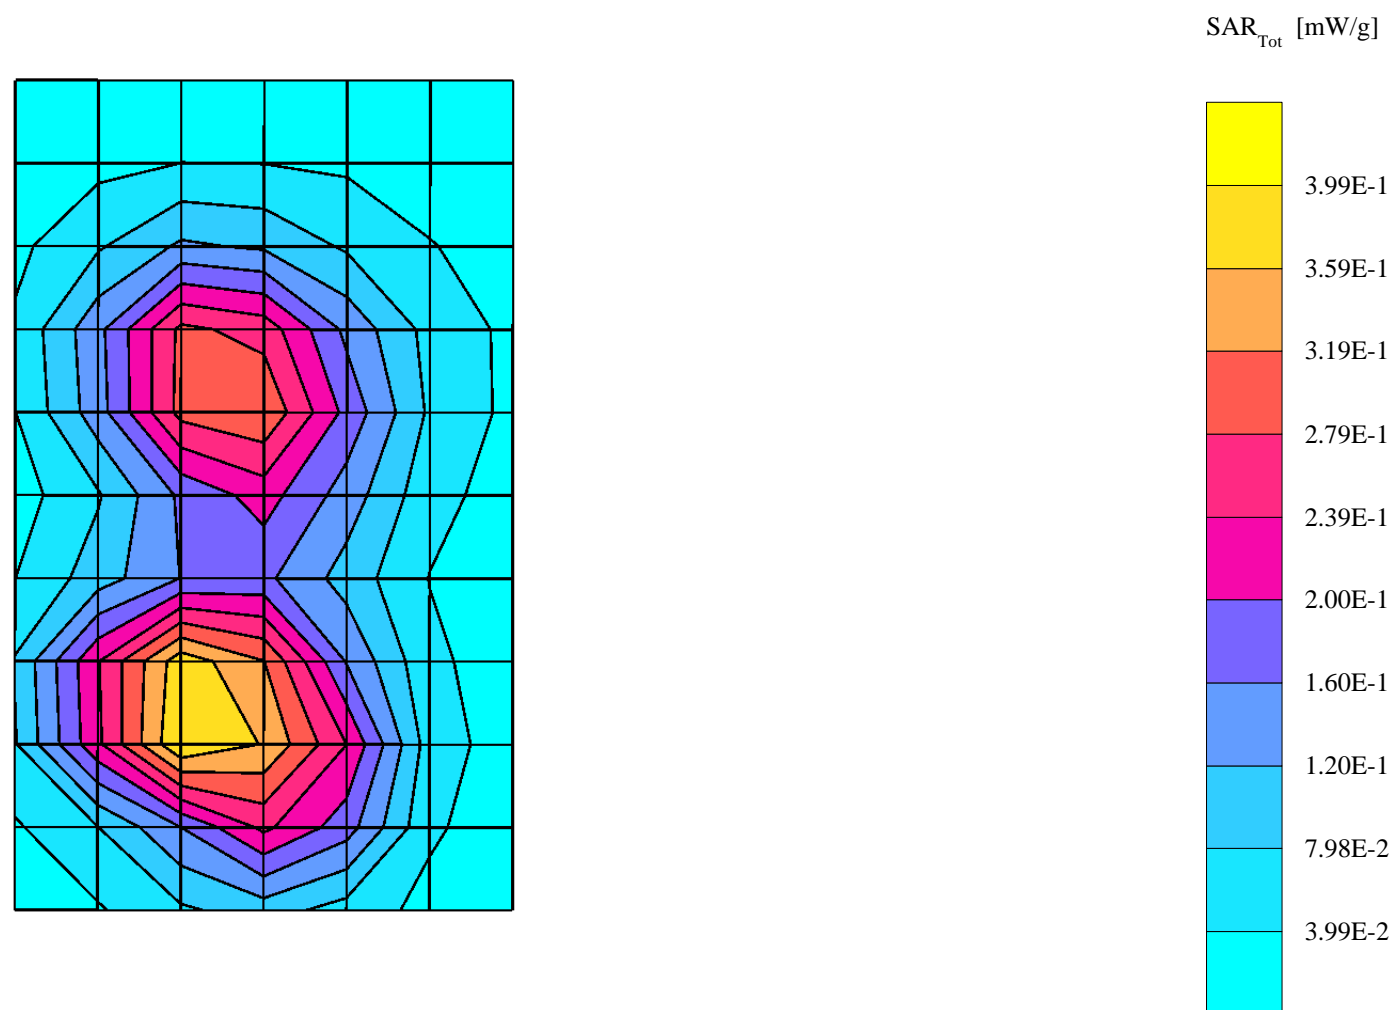

s/n1457601

Ch# 661 / Pwr Step: 0

Antenna Position: Internal

Type of Modulation: GPRS1900

Battery Model #:SNN5669a

Accessory Model #: BAcK of Phone 25mm from Flat Phantom

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 1 Section; Position: (0°,0°); Frequency: 1880 MHz


Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(4.50,4.50,4.50); Crest factor: 4.0; 1880 MHz Head & Body: $\sigma = 1.59$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.234 mW/g, SAR (10g): 0.146 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 10.5 (9.4, 12.0) [mm]

Powerdrift: -0.01 dB

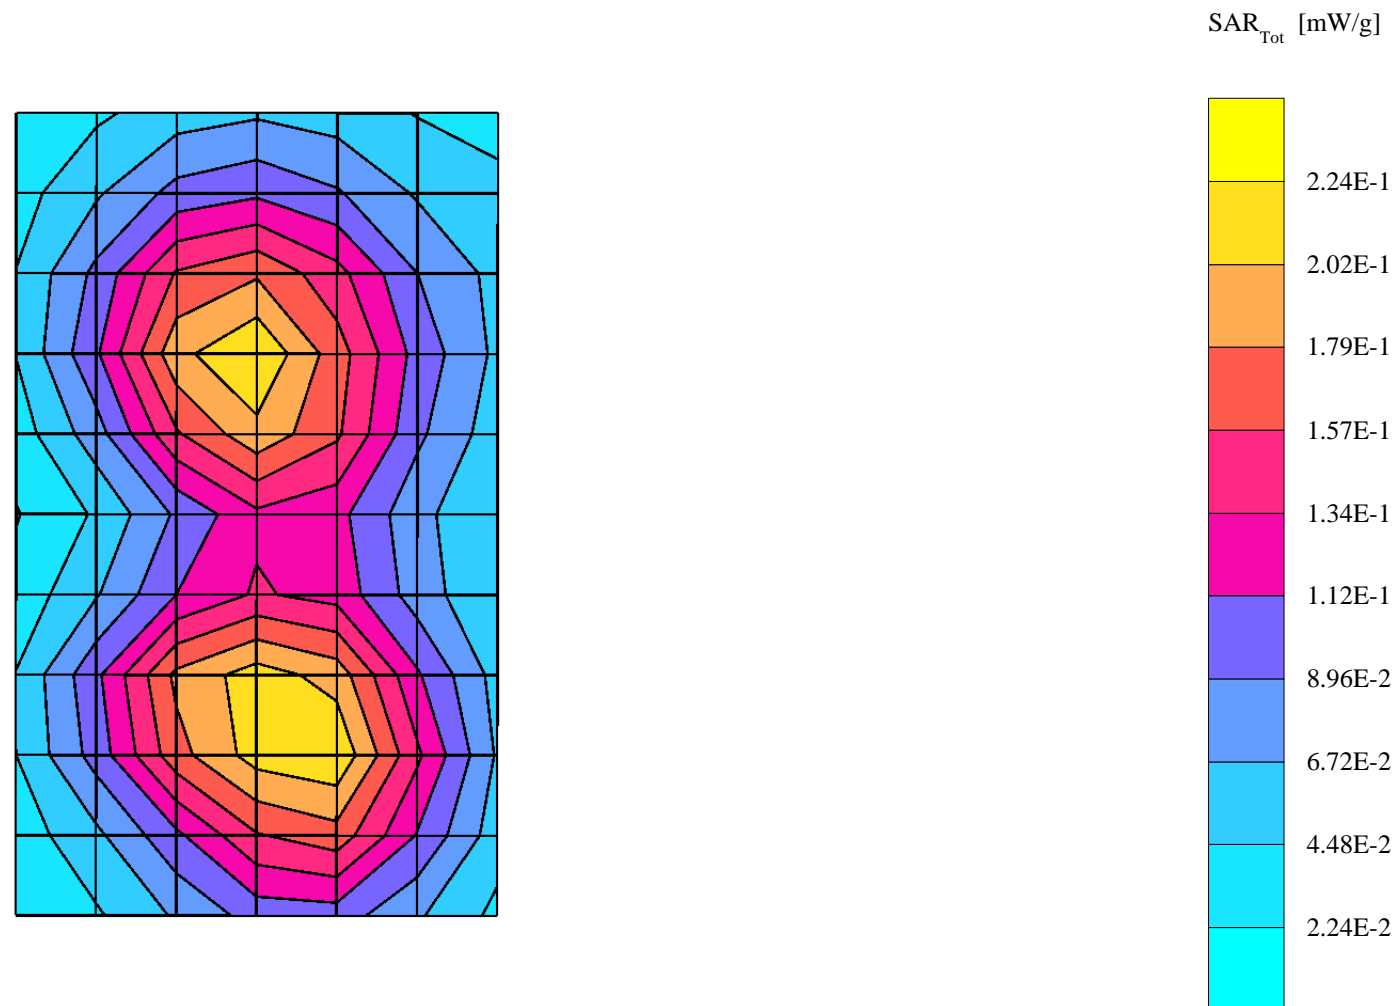

s/n1457601

Ch# 661 / Pwr Step: 0

Antenna Position: Internal

Type of Modulation: GPRS1900

Battery Model #:SNN5669a

Accessory Model #: BAcK of Phone 25mm from Flat Phantom

2nd HOT SPOT

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 1 Section; Position: (90°,180°); Frequency: 1880 MHz


Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(4.50,4.50,4.50); Crest factor: 4.0; 1880 MHz Head & Body: $\sigma = 1.59$ mho/m $\epsilon_r = 52.0$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.227 mW/g, SAR (10g): 0.143 mW/g, (Worst-case extrapolation)

Cube 7x7x7: Dx = 5.0, Dy = 5.0, Dz = 5.0

Penetration depth: 10.2 (9.2, 11.6) [mm]

Powerdrift: -0.13 dB

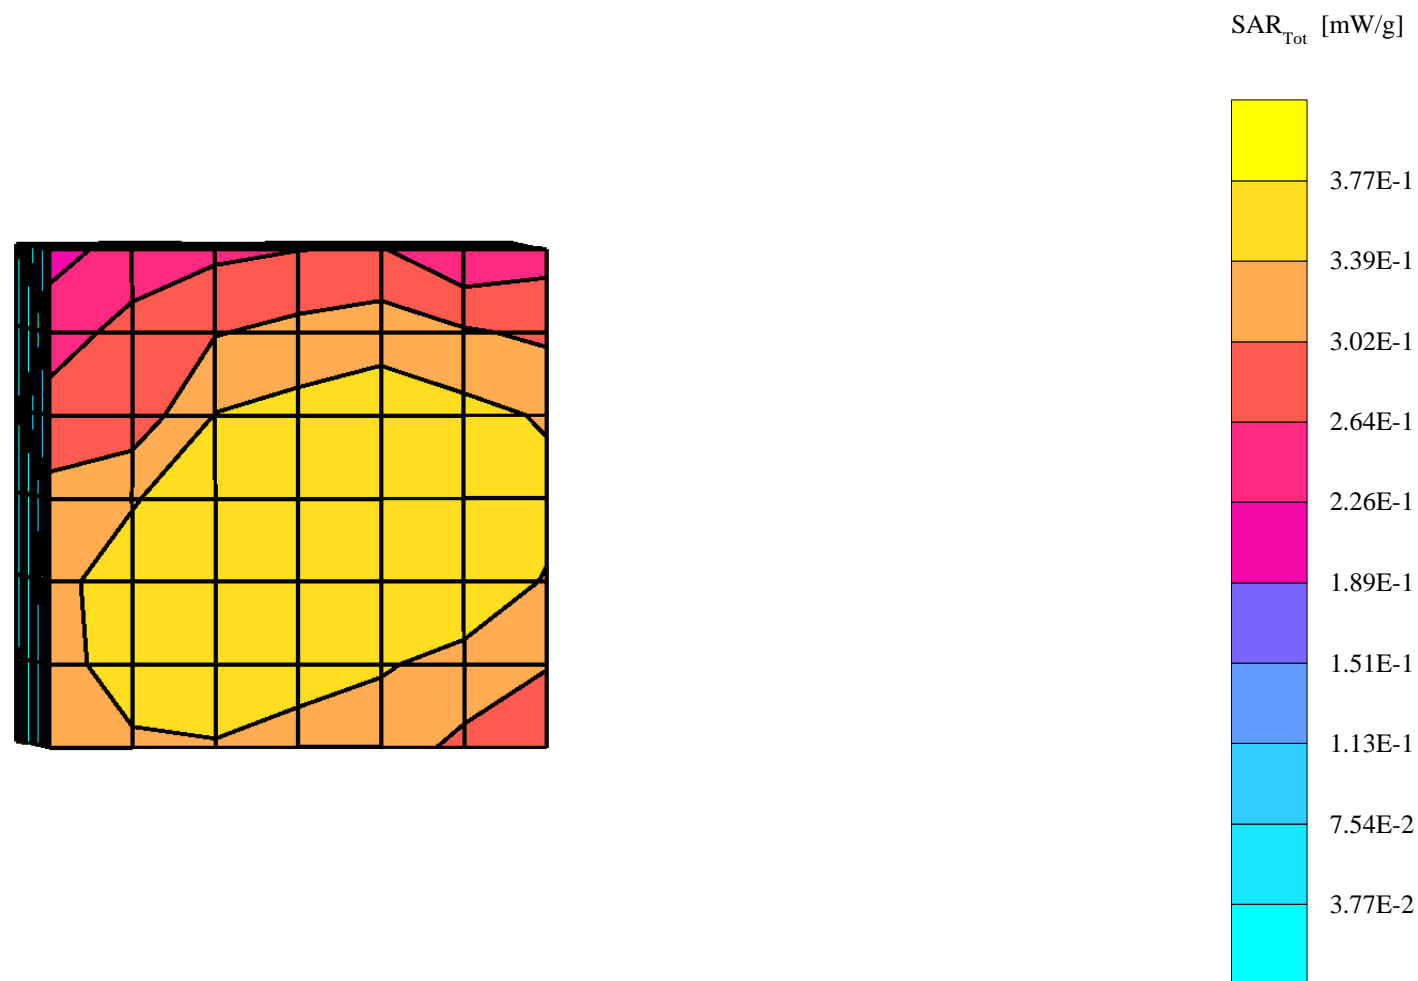

s/n1457601

Ch# 661 / Pwr Step: 0 (OTA)

Type of Modulation: GSM 1900

Accessory Model #: Bluetooth transmitting - CHYN4632A POUCH

R3: Amy Twin Phantom Rev.4 (22Aug02) Phantom; section 1 Section; Position: (0°,0°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1398 - FCC Body2; ConvF(4.50,4.50,4.50); Crest factor: 8.0; 1880 MHz Head & Body: $\sigma = 1.58$ mho/m $\epsilon_r = 52.2$ $\rho = 1.00$ g/cm³

Cube 7x7x7: SAR (1g): 0.554 mW/g, SAR (10g): 0.330 mW/g, (Worst-case extrapolation)



Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Penetration depth: 10.2 (9.3, 11.5) [mm]

Powerdrift: -0.05 dB

Antenna Position: INTERNAL

Battery Model #: SNN5669A

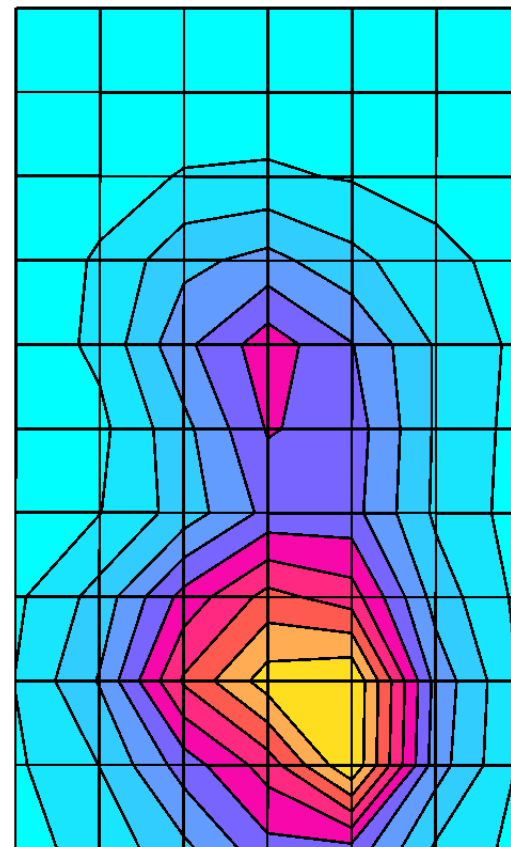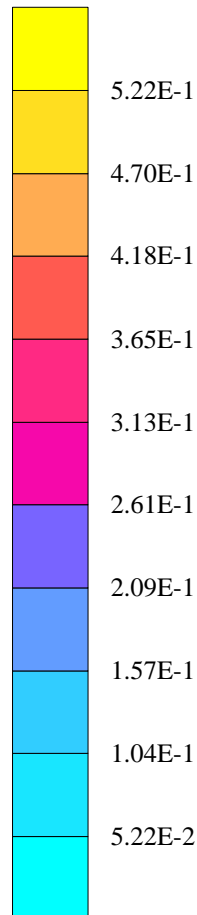SAR_{Tot} [mW/g]

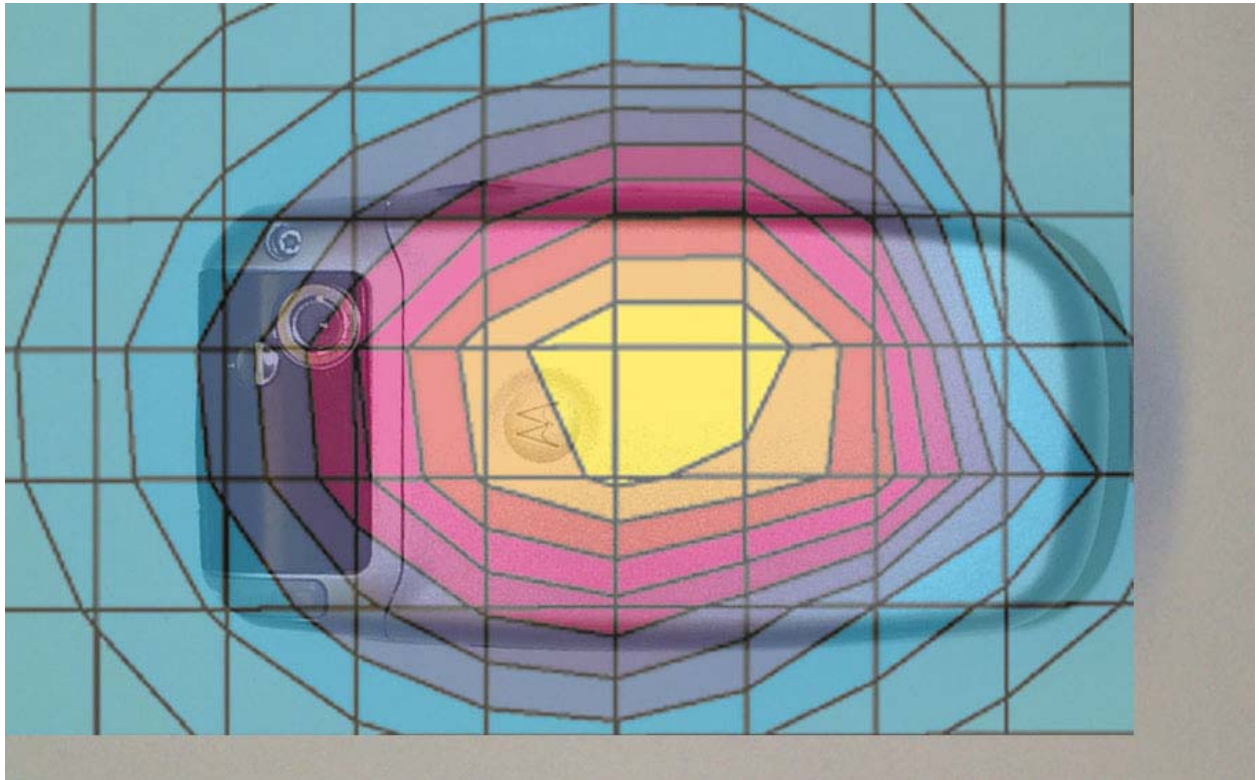


Figure 9. Typical 800 MHz Body-Worn Contour Overlaid on Phone

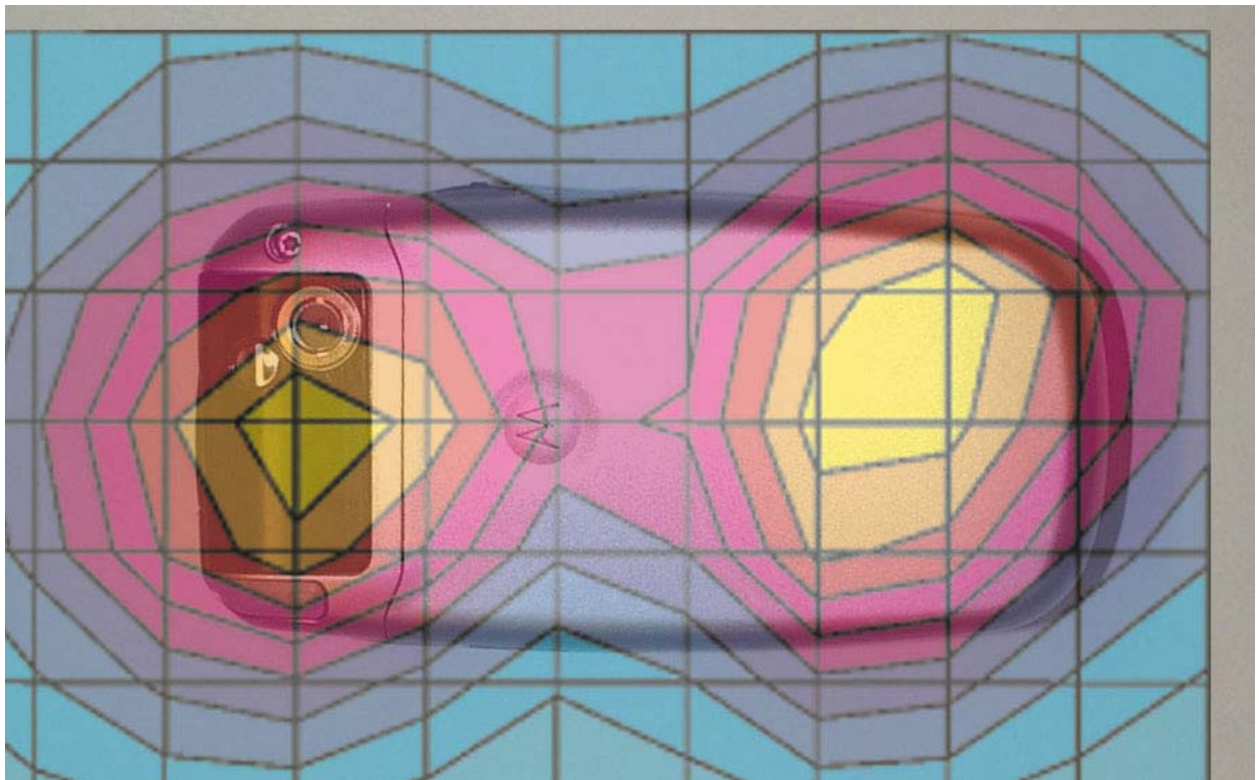


Figure 10. Typical 1900 MHz Body-Worn Contour Overlaid on Phone

Appendix 4
Probe Calibration Certificate

Client **Motorola Korea (PCS)**

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN.1398**

Calibration procedure(s) **QA CAL-01 v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **February 16, 2004**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

| Model Type | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|-----------------------------------|----------------|---|------------------------|
| Power meter EPM E4419B | GB41293874 | 2-Apr-03 (METAS, No 252-0250) | Apr-04 |
| Power sensor E4412A | MY41495277 | 2-Apr-03 (METAS, No 252-0250) | Apr-04 |
| Reference 20 dB Attenuator | SN: 5086 (20b) | 3-Apr-03 (METAS, No. 251-0340) | Apr-04 |
| Fluke Process Calibrator Type 702 | SN: 6295803 | 8-Sep-03 (Sintrel SCS No. E-030020) | Sep-04 |
| Power sensor HP 8481A | MY41092180 | 18-Sep-02 (SPEAG, in house check Oct-03) | In house check: Oct 05 |
| RF generator HP 8684C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Aug-02) | In house check: Aug-05 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-03) | In house check: Oct 05 |
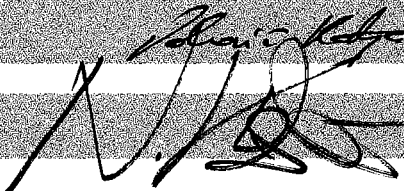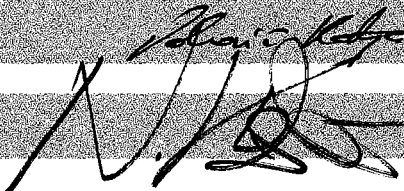
| | | | |
|----------------|---------------|---------------------|---|
| | Name | Function | Signature |
| Calibrated by: | Katja Pokovic | Laboratory Director |  |
| Approved by: | Niels Kuster | Quality Manager |  |

Date issued: February 16, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Probe ET3DV6

SN:1398

| | |
|-------------------------|--------------------------|
| Manufactured: | October 24, 1999 |
| Last calibrated: | February 28, 2003 |
| Recalibrated: | February 16, 2004 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1398

Sensitivity in Free Space

| | |
|-------|--|
| NormX | 1.49 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormY | 1.63 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormZ | 1.57 $\mu\text{V}/(\text{V}/\text{m})^2$ |

Diode Compression^A

| | | |
|-------|----|----|
| DCP X | 92 | mV |
| DCP Y | 92 | mV |
| DCP Z | 92 | mV |

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

| | | | |
|--|------------------------------|--------|--------|
| Sensor Cener to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 7.6 | 3.7 |
| SAR _{be} [%] | With Correction Algorithm | 0.0 | 0.1 |

Head 1800 MHz Typical SAR gradient: 10 % per mm

| | | | |
|----------------------------|------------------------------|--------|--------|
| Sensor to Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 12.6 | 8.4 |
| SAR _{be} [%] | With Correction Algorithm | 0.1 | 0.2 |

Sensor Offset


| | |
|----------------------------|--------------|
| Probe Tip to Sensor Center | 2.7 mm |
| Optical Surface Detection | in tolerance |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.




^A numerical linearization parameter: uncertainty not required

Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)


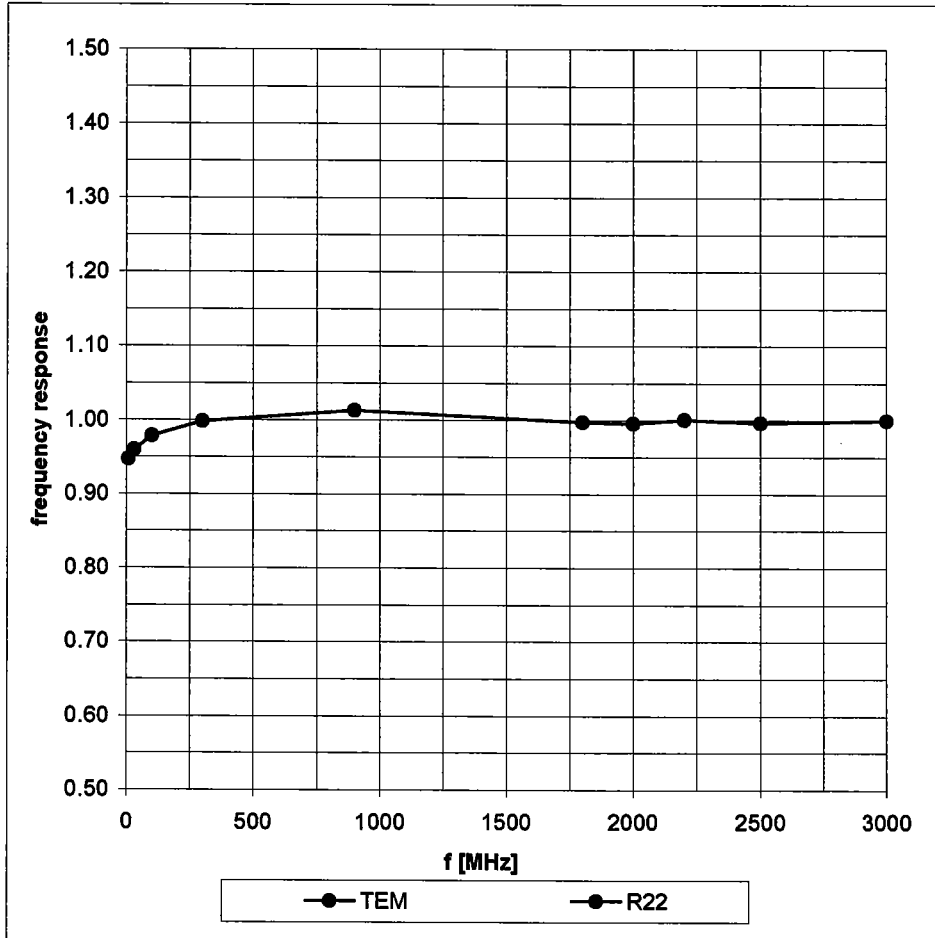


Receiving Pattern (ϕ) , $\theta = 0^\circ$

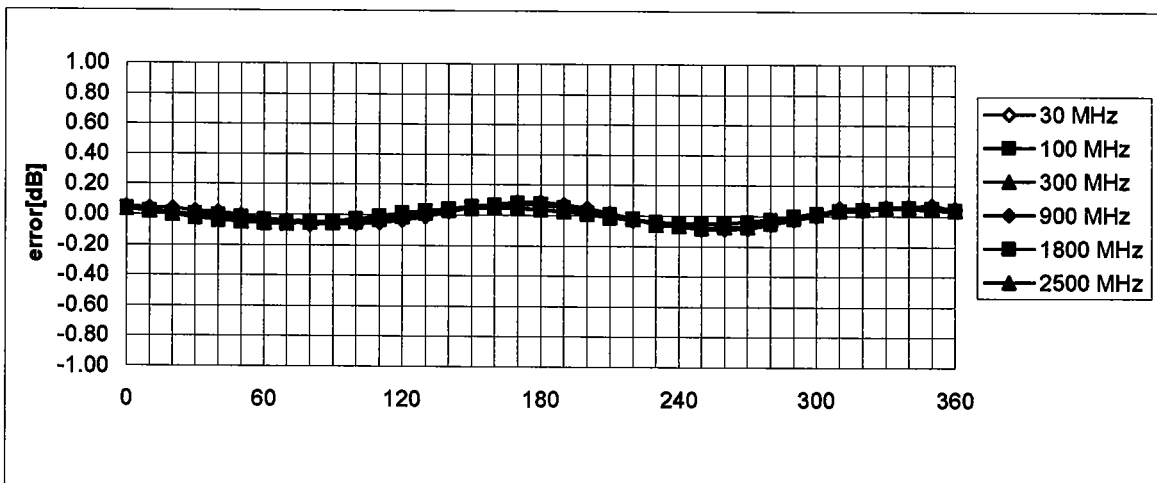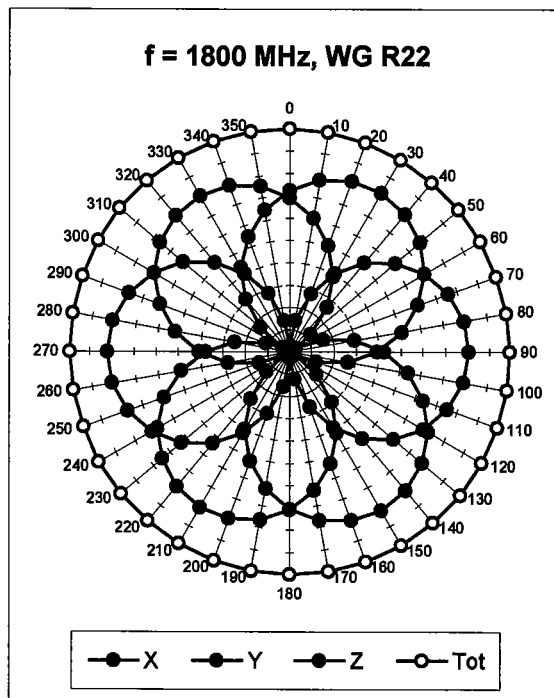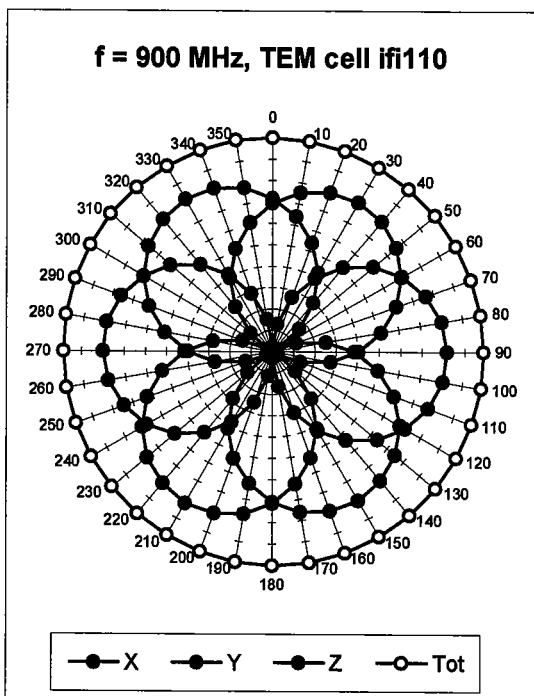



Axial Isotropy Error $\lt; \pm 0.2 \text{ dB}$

Dynamic Range f(SAR_{head}) (Waveguide R22)

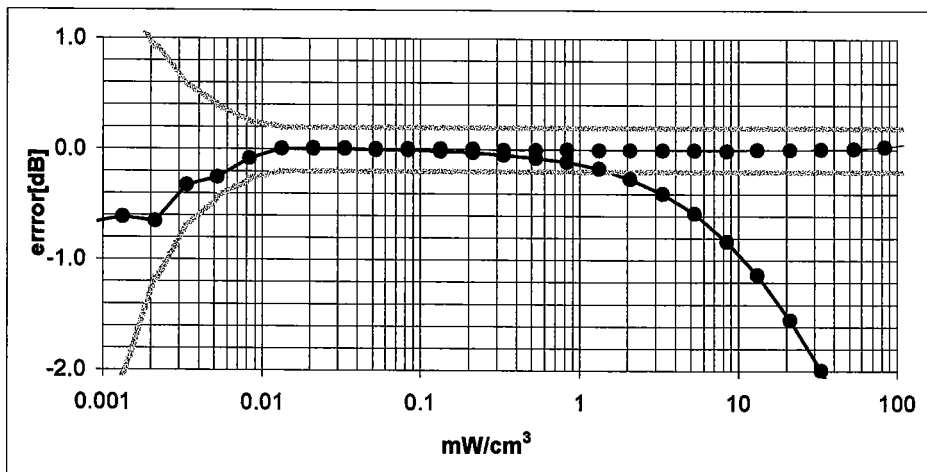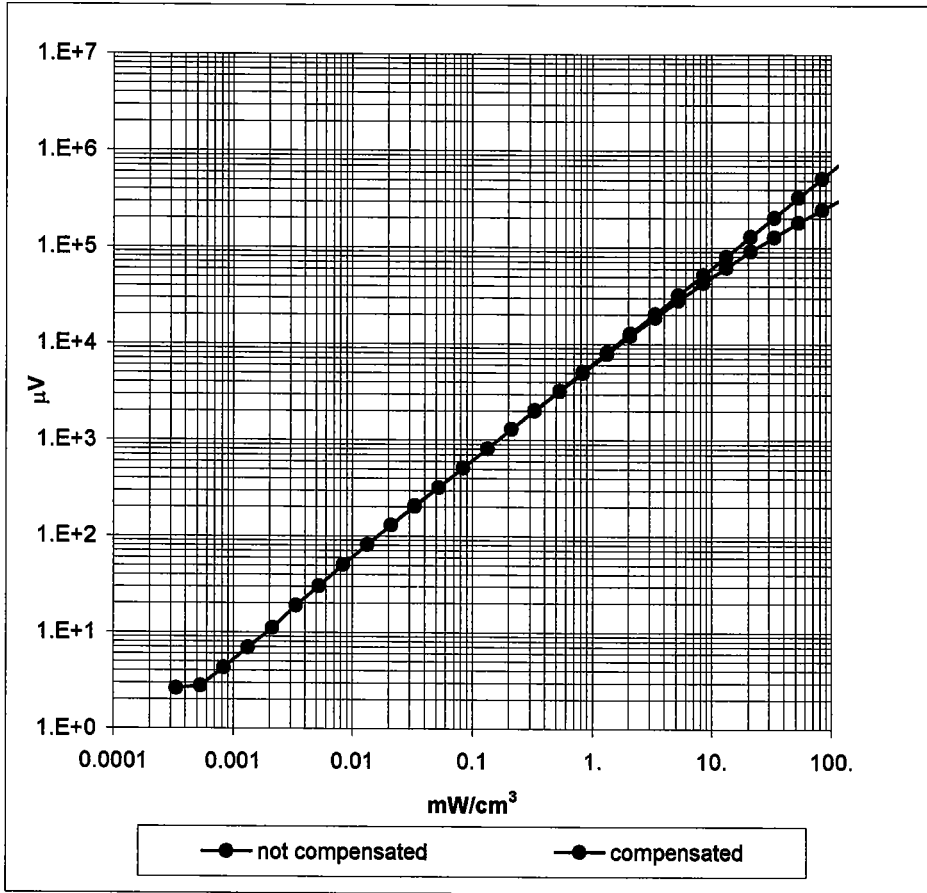

Probe Linearity < ± 0.2 dB

Conversion Factor Assessment

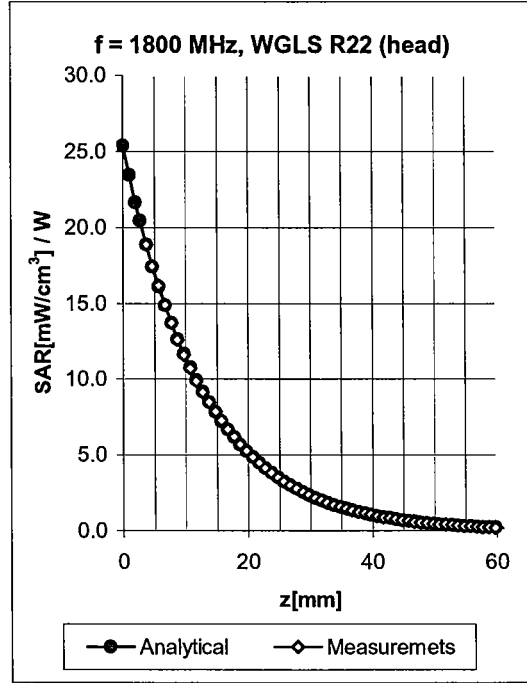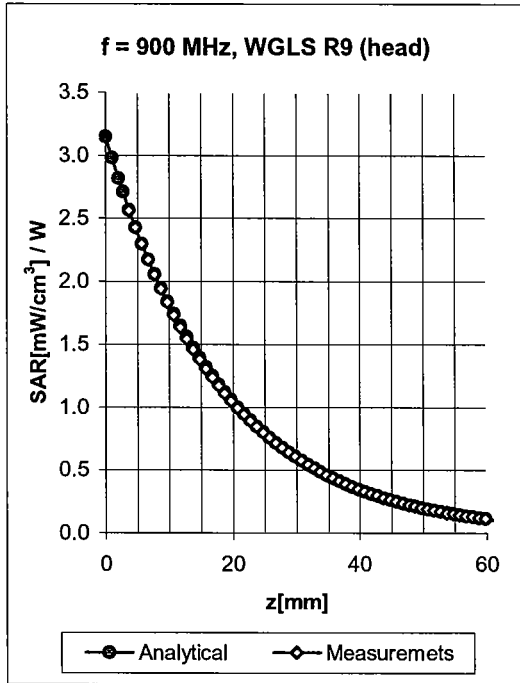


| f [MHz] | Validity [MHz] ^B | Tissue | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty |
|---------|-----------------------------|--------|--------------|--------------|-------|-------|-------------------|
| 900 | 800-1000 | Head | 41.5 ± 5% | 0.97 ± 5% | 1.00 | 1.39 | 6.29 ± 9.5% (k=2) |
| 1800 | 1710-1910 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.50 | 2.48 | 5.04 ± 9.5% (k=2) |
| 1950 | 1900-2000 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.47 | 2.71 | 4.82 ± 9.5% (k=2) |
| 900 | 800-1000 | Body | 55.0 ± 5% | 1.05 ± 5% | 0.43 | 2.31 | 5.88 ± 9.5% (k=2) |
| 1800 | 1710-1910 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.58 | 2.67 | 4.50 ± 9.5% (k=2) |
| 1950 | 1900-2000 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.68 | 2.39 | 4.29 ± 9.5% (k=2) |

^B The stated uncertainty of calibration was assessed according to P1528.

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

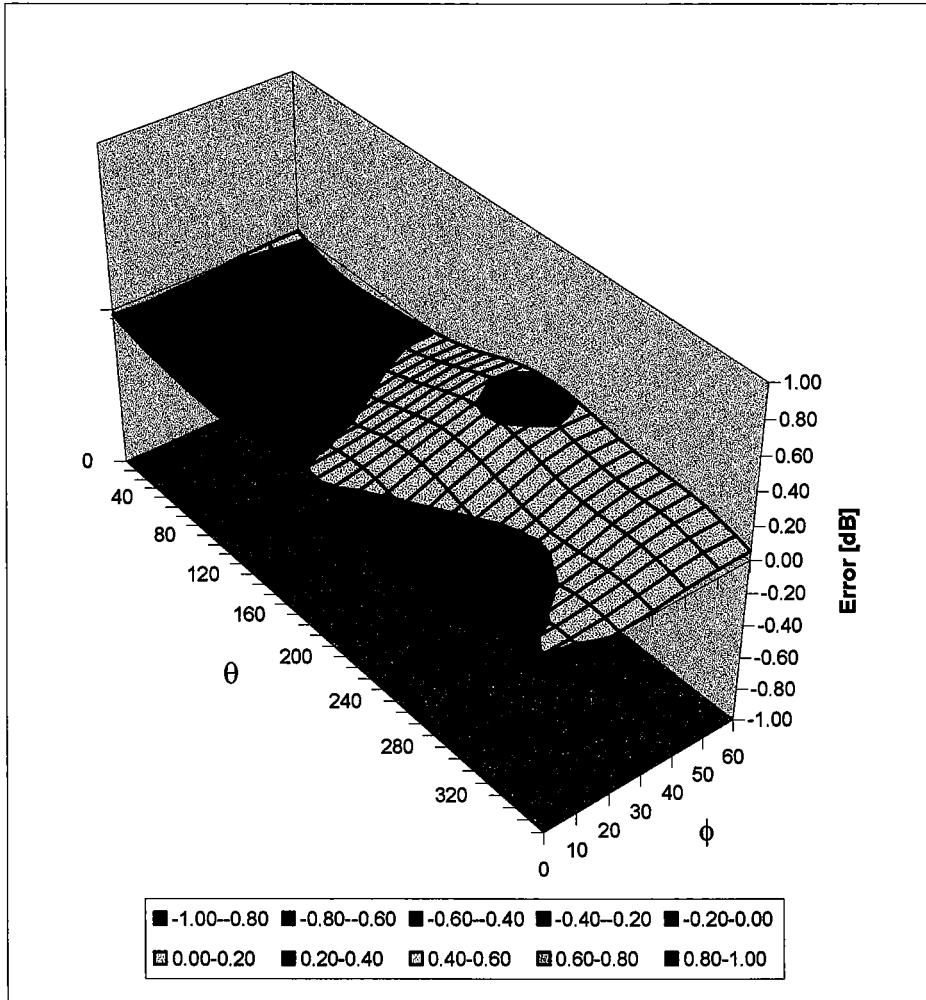

Spherical Isotropy Error < ± 0.4 dB

Appendix 5
Dipole Characterization Certificate

Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-

| | 835MHz | 900MHz | 1800MHz | 1900MHz | |
|---|--|--|---|---|--------|
| IEEE1528 Target: Advanced Extrapolation | 9.5 | 10.8 | 38.1 | 39.7 | (W/kg) |
| Measurement Uncertainty (k=1): | 9.0% | 9.0% | 9.0% | 9.0% | |
| Measurement Period: | 1-July-03 to 1-Apr-04 | 1-July-03 to 1-Apr-04 | 1-July-03 to 1-Apr-04 | 1-July-03 to 1-Apr-04 | |
| # of tests performed: | 214 | 1148 | 1135 | 62 | |
| Grand Average: Worst Case Extrapolation | 10.0 | 11.4 | 40.7 | 42.0 | (W/kg) |
| % Delta (Average - IEEE1528 Target) | 5.3% | 5.6% | 6.8% | 5.8% | |
| Is % Delta <= Measurement Uncertainty? | Yes | Yes | Yes | Yes | |
| Accept/Reject <u>Average</u> as new system performance check target? | ACCEPT | ACCEPT | ACCEPT | ACCEPT | |
| | Applicable 835MHz Dipole Serial Numbers: | Applicable 900MHz Dipole Serial Numbers: | Applicable 1800MHz Dipole Serial Numbers: | Applicable 1900MHz Dipole Serial Numbers: | |
| | 420(TR), 421(TR) | 77, 78 | 246(TR), 250(TR) | 514(TR), 518(TR) | |
| | 422(TR), 423(TR) | 79, 80 | 251(TR), 258(TR) | 519(TR), 520(TR) | |
| | 424(TR), 425(TR) | 91, 92 | 259(TR), 262(TR) | 523(TR), 524(TR) | |
| | 431(TR), 432(TR) | 93, 94 | 263(TR), 271(TR) | 526(TR), 527(TR) | |
| | 433(TR), 434(TR) | 95, 96 | 272(TR), 273(TR) | 528(TR), 529(TR) | |
| | 436(TR) | 97, 55 | 276(TR), 277(TR) | 530(TR), 533(TR) | |
| | | | 279(TR), 280(TR) | | |
| | | | 281(TR), 282(TR) | | |
| | | | 283(TR), 284(TR) | | |


-New System Performance Check Targets- per APP-0396

(based on analysis of historical data)

| Frequency | SAR Target (W/kg) | Permittivity | Conductivity (S/m) |
|-----------|-------------------|--------------|--------------------|
| 835MHz | 10.0 | 41.5 ± 5% | 0.90 ± 5% |
| 900MHz | 11.4 | 41.5 ± 5% | 0.97 ± 5% |
| 1800MHz | 40.7 | 40.0 ± 5% | 1.40 ± 5% |
| 1900MHz | 42.0 | 40.0 ± 5% | 1.40 ± 5% |

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Appendix 6
Measurement Uncertainty Budget

| Uncertainty Budget for Device Under Test | | | | | | | | | |
|---|----------|---------------|----------------|-------------------|-------------------------------|--------------------------------|-------------------------------------|--------------------------------------|----------------------|
| <i>a</i> | <i>b</i> | <i>c</i> | <i>d</i> | <i>e = f(d,k)</i> | <i>f</i> | <i>g</i> | <i>h = c x f / e</i> | <i>i = c x g / e</i> | <i>k</i> |
| Uncertainty Component | Sec. | Tol. (± %) | Prob. Dist. | Div. | <i>c_i</i> (1 g) | <i>c_i</i> (10 g) | 1 g <i>u_i</i> (±%) | 10 g <i>u_i</i> (±%) | <i>v_i</i> |
| Measurement System | | | | | | | | | |
| Probe Calibration | E.2.1 | 9.5 | N | 2.00 | 1 | 1 | 4.8 | 4.8 | ∞ |
| Axial Isotropy | E.2.2 | 4.7 | R | 1.73 | 0.707 | 0.707 | 1.9 | 1.9 | ∞ |
| Spherical Isotropy | E.2.2 | 9.6 | R | 1.73 | 0.707 | 0.707 | 3.9 | 3.9 | ∞ |
| Boundary Effect | E.2.3 | 5.8 | R | 1.73 | 1 | 1 | 3.3 | 3.3 | ∞ |
| Linearity | E.2.4 | 4.7 | R | 1.73 | 1 | 1 | 2.7 | 2.7 | ∞ |
| System Detection Limits | E.2.5 | 1.0 | R | 1.73 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Readout Electronics | E.2.6 | 1.0 | N | 1.00 | 1 | 1 | 1.0 | 1.0 | ∞ |
| Response Time | E.2.7 | 0.8 | R | 1.73 | 1 | 1 | 0.5 | 0.5 | ∞ |
| Integration Time | E.2.8 | 1.3 | R | 1.73 | 1 | 1 | 0.8 | 0.8 | ∞ |
| RF Ambient Conditions | E.6.1 | 3.0 | R | 1.73 | 1 | 1 | 1.7 | 1.7 | ∞ |
| Probe Positioner Mechanical Tolerance | E.6.2 | 0.3 | R | 1.73 | 1 | 1 | 0.2 | 0.2 | ∞ |
| Probe Positioning with respect to Phantom Shell | E.6.3 | 1.1 | R | 1.73 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | E.5 | 3.9 | R | 1.73 | 1 | 1 | 2.3 | 2.3 | ∞ |
| Test sample Related | | | | | | | | | |
| Test Sample Positioning | E.4.2 | 3.6 | N | 1.00 | 1 | 1 | 3.6 | 3.6 | 29 |
| Device Holder Uncertainty | E.4.1 | 2.8 | N | 1.00 | 1 | 1 | 2.8 | 2.8 | 8 |
| Output Power Variation - SAR drift measurement | 6.6.2 | 5.0 | R | 1.73 | 1 | 1 | 2.9 | 2.9 | ∞ |
| Phantom and Tissue Parameters | | | | | | | | | |
| Phantom Uncertainty (shape and thickness tolerances) | E.3.1 | 4.0 | R | 1.73 | 1 | 1 | 2.3 | 2.3 | ∞ |
| Liquid Conductivity - deviation from target values | E.3.2 | 5.0 | R | 1.73 | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| Liquid Conductivity - measurement uncertainty | E.3.3 | 10.0 | R | 1.73 | 0.64 | 0.43 | 3.7 | 2.5 | ∞ |
| Liquid Permittivity - deviation from target values | E.3.2 | 10.0 | R | 1.73 | 0.6 | 0.49 | 3.5 | 2.8 | ∞ |
| Liquid Permittivity - measurement uncertainty | E.3.3 | 5.0 | R | 1.73 | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| Combined Standard Uncertainty | | | RSS | | | | 11.72 | 11.09 | 1363 |
| Expanded Uncertainty (95% CONFIDENCE LEVEL) | | | <i>k</i> =2 | | | | 22.98 | 21.75 | |

Uncertainty Budget for System Performance Check (dipole & flat phantom)

| <i>a</i> | <i>b</i> | <i>c</i> | <i>d</i> | $e = f(d,k)$ | <i>f</i> | <i>g</i> | $h = c \times f / e$ | $i = c \times g / e$ | <i>k</i> |
|---|----------|------------|-------------|--------------|----------------------------|-----------------------------|-------------------------------|--------------------------------|----------------------|
| Uncertainty Component | Sec. | Tol. (± %) | Prob. Dist. | Div. | <i>c_i</i> (1 g) | <i>c_i</i> (10 g) | 1 g <i>u_i</i> (±%) | 10 g <i>u_i</i> (±%) | <i>v_i</i> |
| Measurement System | | | | | | | | | |
| Probe Calibration | E.2.1 | 9.5 | N | 2.00 | 1 | 1 | 4.8 | 4.8 | ∞ |
| Axial Isotropy | E.2.2 | 4.7 | R | 1.73 | 1 | 1 | 2.7 | 2.7 | ∞ |
| Spherical Isotropy | E.2.2 | 9.6 | R | 1.73 | 0 | 0 | 0.0 | 0.0 | ∞ |
| Boundary Effect | E.2.3 | 5.8 | R | 1.73 | 1 | 1 | 3.3 | 3.3 | ∞ |
| Linearity | E.2.4 | 4.7 | R | 1.73 | 1 | 1 | 2.7 | 2.7 | ∞ |
| System Detection Limits | E.2.5 | 1.0 | R | 1.73 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Readout Electronics | E.2.6 | 1.0 | N | 1.00 | 1 | 1 | 1.0 | 1.0 | ∞ |
| Response Time | E.2.7 | 0.0 | R | 1.73 | 1 | 1 | 0.0 | 0.0 | ∞ |
| Integration Time | E.2.8 | 0.0 | R | 1.73 | 1 | 1 | 0.0 | 0.0 | ∞ |
| RF Ambient Conditions | E.6.1 | 3.0 | R | 1.73 | 1 | 1 | 1.7 | 1.7 | ∞ |
| Probe Positioner Mechanical Tolerance | E.6.2 | 0.3 | R | 1.73 | 1 | 1 | 0.2 | 0.2 | ∞ |
| Probe Positioning with respect to Phantom Shell | E.6.3 | 1.1 | R | 1.73 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | E.5 | 3.9 | R | 1.73 | 1 | 1 | 2.3 | 2.3 | ∞ |
| Dipole | | | | | | | | | |
| Dipole Axis to Liquid Distance | 8, E.4.2 | 1.0 | R | 1.73 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Input Power and SAR Drift Measurement | 8, 6.6.2 | 4.7 | R | 1.73 | 1 | 1 | 2.7 | 2.7 | ∞ |
| Phantom and Tissue Parameters | | | | | | | | | |
| Phantom Uncertainty (shape and thickness tolerances) | E.3.1 | 4.0 | R | 1.73 | 1 | 1 | 2.3 | 2.3 | ∞ |
| Liquid Conductivity - deviation from target values | E.3.2 | 5.0 | R | 1.73 | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| Liquid Conductivity - measurement uncertainty | E.3.3 | 10.0 | R | 1.73 | 0.64 | 0.43 | 3.7 | 2.5 | ∞ |
| Liquid Permittivity - deviation from target values | E.3.2 | 10.0 | R | 1.73 | 0.6 | 0.49 | 3.5 | 2.8 | ∞ |
| Liquid Permittivity - measurement uncertainty | E.3.3 | 5.0 | R | 1.73 | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| Combined Standard Uncertainty | | | RSS | | | | 10.16 | 9.43 | 99999 |
| Expanded Uncertainty (95% CONFIDENCE LEVEL) | | | <i>k</i> =2 | | | | 19.92 | 18.48 | |

Appendix 7

Photographs of the device under test



