



**MOTOROLA**

## HAC Test Report for T-coil IHDT56EL1

**Date of test:** June 2, 2006; June 6, 2006  
**Date of Report:** June 19, 2006

**Laboratory:** Motorola Mobile Devices Business Product Safety & Compliance Laboratory  
600 N. US Highway 45  
Room: MW113  
Libertyville, Illinois 60048

**Test Responsible:** Katerina Royzen  
Engineer

**Statement of Compliance:** Motorola declares under its sole responsibility that portable cellular telephone FCC IHDT56EL1 to which this declaration relates, complies with recommendations and guidelines FCC 47 CFR §20.19. The measurements were performed to ensure compliance to the ANSI PC63.19-2001 rd 3.12 standard, which is the same as the ANSI C63.19-2006 per the FCC public notice DA 06-1215. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

**Results Summary:** T Category = T4

©Motorola, Inc. 2006

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

**Table of Contents**

**1. INTRODUCTION .....3**

**2. DESCRIPTION OF THE DEVICE UNDER TEST.....3**

**3. TEST EQUIPMENT USED.....3**

**4. SIGNAL VERIFICATION.....6**

**5. TEST RESULTS.....7**

**5.1 T-coil SNR Results .....7**

**5.2 T-coil Environment Results.....11**

**5.3 T-Rating Results.....14**

**APPENDIX 1: CONTOUR PLOTS.....15**

**APPENDIX 2: AMBIENT NOISE SPECTRUM PLOTS .....16**

**APPENDIX 3: PICTURES OF TEST SETUP .....19**

**APPENDIX 4: MOTOROLA UNCERTAINTY BUDGET .....22**

**APPENDIX 5: AUDIO MAGNETIC PROBE CERTIFICATE .....24**

**APPENDIX 6: AMCC CERTIFICATE (HELMHOLZ COIL).....25**

**1. Introduction**

The Motorola Mobile Devices Business Product Safety Laboratory has performed Hearing Aid Compatibility (HAC) measurements for the portable cellular phone (FCC ID IHDT56EL1). The portable cellular phone was tested in accordance with ANSI PC63.19-2001 rd 3.12 standard. The test results presented herein clearly demonstrate compliance FCC 47 CFR § 20.19. This report demonstrates compliance for T-coil performance only and not for near field emissions.

**2. Description of the Device Under Test**

**Table 1: Information for the Device Under Test**

<b>FCC ID Number</b>	IHDT56EL1		
<b>Serial number</b>	1E4E2774		
<b>Mode(s) of Operation</b>	800 CDMA	1900 CDMA	BlueTooth
<b>Modulation Mode(s)</b>	QPSK	QPSK	GFSK
<b>Maximum Output Power Setting</b>	25.0 dBm	25.0 dBm	4.00dBm
<b>Duty Cycle</b>	1:1	1:1	1:1
<b>Transmitting Frequency Range(s)</b>	824-849MHz	1851-1909MHz	2400-2483.5MHz
<b>Production Unit or Identical Prototype (47 CFR §2.908)</b>	Identical Prototype		
<b>Device Category</b>	Portable		


**3. Test Equipment Used**

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. All T-coil measurements are taken within a shielded enclosure. The measurement uncertainty budget is given in Appendix 4. The list of calibrated equipment used for the measurements is shown in Table 2.

**Table 2: Test Equipment**

	<b>Description</b>	<b>Serial Number</b>	<b>Cal Due Date</b>
<b>Dosimetric System Equipment</b>	DAE3	437	Nov/28/2006
	Audio Magnetic 1D Field Probe AM1DV2	1003	
	AMMI SE UMS 010 AA	1005	
	AMCC SD HAC P02 AB	1005	
	Test Arch SD HAC D01 BA	1036	
<b>Additional Test Equipment</b>	Rohde & Schwarz CMU 200	108475	Feb/06/2007
	Brüel & Kjaer Frequency Analyzer 2144	2102787	Mar/06/2007

Figure 1: T-coil setup and cabling (pictures from DASY manual)

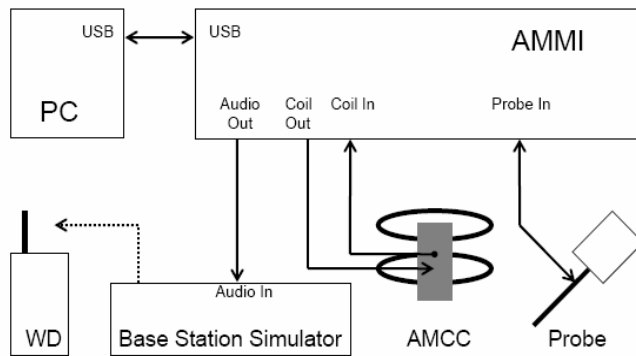


AMMI (Audio Magnetic Measurement Instrument) is a desktop unit containing a sampling unit, a waveform generator for test, calibration signals and a USB interface. Front connectors include: Audio Out - predefined or user definable audio signals for injection into the WD; Probe In - the probe signal is evaluated by AMMI; Coil Out - test and calibration signal to the AMCC; Coil In - monitor signal from the AMCC.

Audio Magnetic Probe (AM1DV2) is an active probe with a single sensor. The same probe coil is used to measure three orthogonal field components (axial, radial 1, radial 2). The probe is rotated to properly orient the coil for each field component. Probe's frequency response, linearity and other characteristics are given in the certificate in Appendix 5.

AMCC (Audio Magnetic Calibration Coil) is a Helmholtz coil for calibration of the AM1D probe. The two horizontal coils create a homogeneous magnetic field in the z direction. Refer to Appendix 6 for more details on AMCC coil.

The probe is calibrated in AMCC coil. The frequency response and sensitivity are measured and stored. Sensitivity includes both probe sensitivity and pre-amplifier sensitivity.

**Graph 1: Frequency Response measured in AMCC**

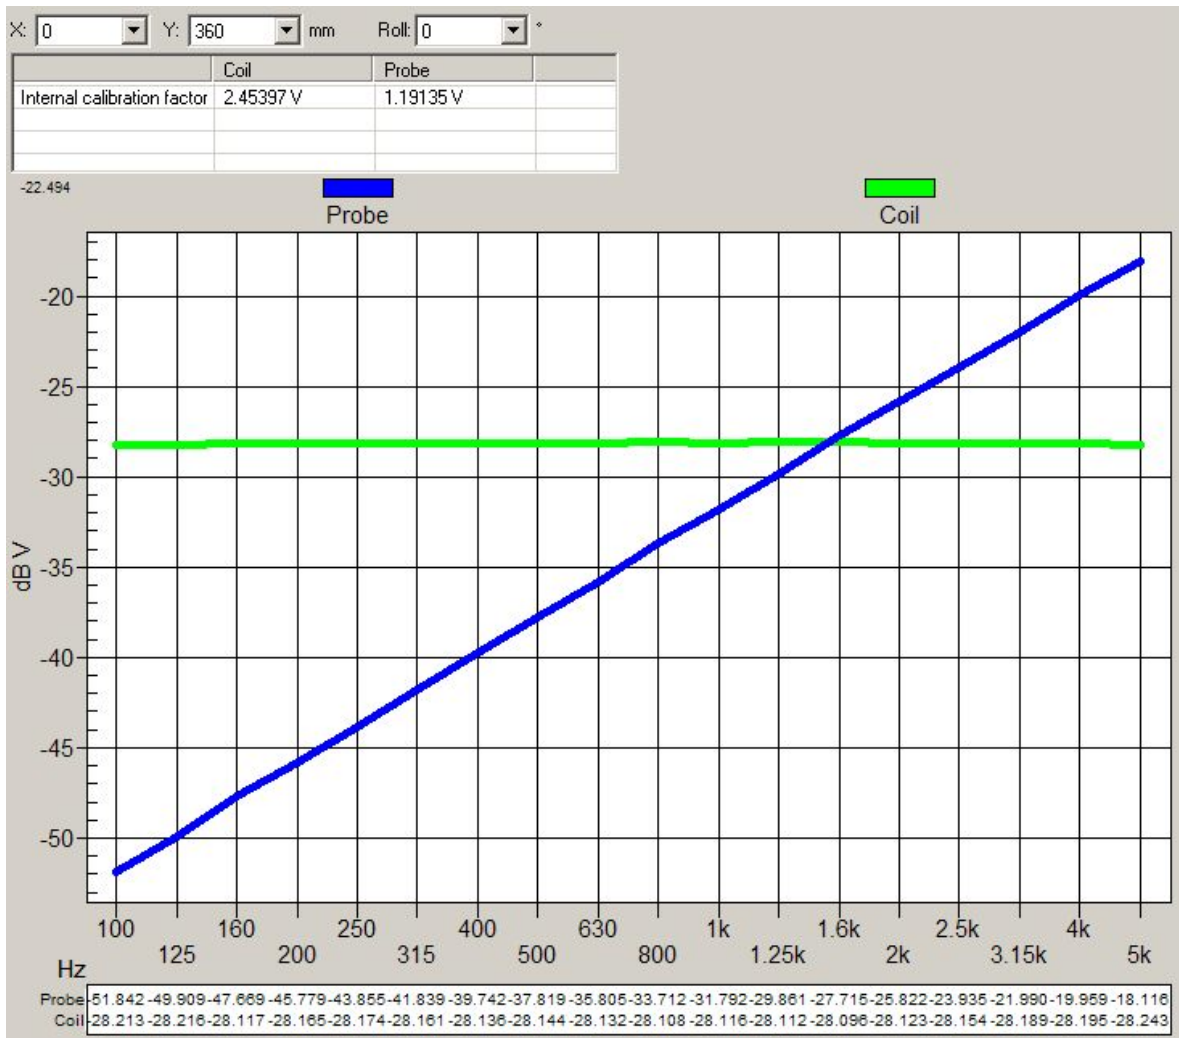


Sensitivity measured in AMCC (includes both probe sensitivity and pre-amplifier sensitivity):  
 -26.28 V / (A/m)

#### 4. Signal Verification

An Input Level is measured to verify that it is within +/-0.1dB from the Reference Input Level in section 6.3.2.1 of ANSI PC63.19-2001 rd 3.12.

**Figure 2: Signal Verification Setup**

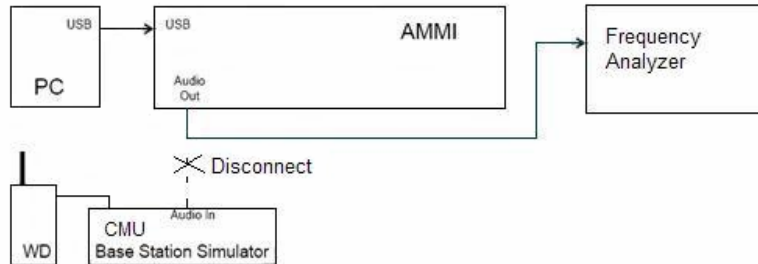

“Audio Out” of the AMMI is connected to the Bruel & Kjaar 2144 analyzer. On the analyzer, the “Input User Ref” is set to the “0dBm0 Input Reference” value to account for CMU’s inherent offset values (refer to Note 1 at the bottom of this page). A signal from AMMI is initiated by running the appropriate DASY template. The template includes both broadband and narrowband signals. The signal is captured on the analyzer. The value from the analyzer is compared to the target given in 6.3.2.1 of ANSI PC63.19-2001 rd 3.12. If it is not within +/-0.1dB, the gain settings in the DASY template are adjusted.

Signal Verification has been conducted on the same days as DUT measurements. The obtained results are displayed in Table 3.

**Table 3: Measured Input Level**

Modulation	Measured date	Signal	Measured Input Level (dBm0)	Reference Input Level from ANSI PC63.19 (dBm0)
CDMA	June 2, 2006	Narrowband	-17.9	-18
		Broadband	-18.0	
	June 6, 2006	Narrowband	-17.9	-18
		Broadband	-18.0	

**Note 1:**

Each CMU has a slightly different “0dBm0 Input Reference” value that must be measured. When the CMU box is replaced or externally re-calibrated, an internal calibration procedure must be completed in each transmission mode. On the CMU 200 (SN 108475), the 0dBm0 Input Reference value is 0.74 V for CDMA.

## 5. Test Results

### 5.1 T-coil SNR Results

The DASY4 v4.7 measurement system specified in section 3.1 was utilized within the intended operations as set by the SPEAG™ setup. The Test Arch provided by SPEAG is used to position the DUT. This phone has one configuration for the ear use – flip open. This configuration is tested at the middle frequency channel of each applicable frequency band. All tests are done via conducted setup with CMU 200. The volume on the phone is adjusted to maximum.

The Cellular Phone model covered by this report has the following battery options:

Battery #1 – SNN5760A is 1030 mAH Battery

Battery #2 – SNN5615A is 1425 mAH Battery

The sequence of the measurement is listed in steps below.

- 1) Geometry & signal check. Probe phantom alignment and check of accuracy.
- 2) Background noise measurement in the area of the WD
- 3) Perform coarse resolution axial scan with narrow band signal. For the three orientation positions, using the optimal ABM1 point from the coarse resolution axial scan, perform fine resolution scans in the area of interest with narrow band signal.
- 4) For the three orientation positions, using the optimal SNR point from corresponding fine resolution area scans, perform point measurement with a narrowband signal - determine ABM1 and SNR. For Axial position, perform point measurement with a broadband signal - determine Frequency Response.

The ABM1, SNR and T-coil Rating results are shown in Table 4. Also shown are the measured conducted output power, location of the measured point, noise and ABM2. The delta between Ambient Noise measurement and ABM2 measurement should be greater than 10 dB. However, in cases where ABM2 is very low, it is suitable for the delta to be less than 10 dB. For the three probe positions, contour plots for the lowest SNR, indicated in **bold numbers**, are given in Appendix 1. For the three probe positions, noise spectrum plots for the highest ambient noise, indicated with **bold numbers**, are given in Appendix 2. These noise spectrum plots are half band integrated with an A-weight filter applied.

T-coil SNR Limits for AWF=0		
ABM 1	Greater or equal to -13 dB A/m (axial) Greater or equal to -18 dB A/m (radial)	
SNR	T3	Greater than 0 dB
	T4	Greater than 10 dB

**Table 4: T-coil SNR measurement results  
for the portable cellular telephone at highest possible output power**

Probe Position	Frequency Band (MHz)	Channel	Conducted Output Power (dBm)	Measured Point Location (x mm, y mm)	Ambient Noise (dB A/m)	ABM2 (dB A/m)	ABM2 – Ambient Noise (dB)	ABM1 (dB A/m)	SNR (dB)	T-coil SNR Rating
Axial	CDMA 800	384	24.89	(-2.3, 0.2)	<b>-58.44</b>	-51.65	6.79	-1.401	50.25	T4
		w/ Battery 2		(-4.3, -0.6)	-58.50	-53.20	5.30	-4.719	48.48	T4
	CDMA 1900	600	25.09	(-2.0, -0.2)	-58.46	-49.95	8.51	-2.097	<b>47.85</b>	T4
		w/ Battery 2		(-2.5, 1.4)	-58.65	-50.83	7.82	-1.799	49.03	T4
Radial 1	CDMA 800	384	24.89	(7.7, 0.2)	-58.12	-49.63	8.49	-10.53	39.10	T4
		w/ Battery 2		(7.7, -2.6)	-58.28	-49.64	8.64	-12.32	37.31	T4
	CDMA 1900	600	25.09	(-6.0, -0.2)	<b>-57.80</b>	-48.36	9.44	-10.78	37.58	T4
		w/ Battery 2		(7.5, -2.6)	-58.30	-47.39	10.91	-10.47	<b>36.92</b>	T4
Radial 2	CDMA 800	384	24.89	(-4.3, -5.8)	-58.55	-57.14	1.41	-13.02	<b>44.13</b>	T4
		w/ Battery 2		(-0.3, -6.6)	-58.41	-55.86	2.55	-11.24	44.62	T4
	CDMA 1900	600	25.09	(2.0, -8.2)	-58.44	-55.74	2.70	-10.05	45.69	T4
		w/ Battery 2		(1.5, -8.6)	<b>-58.40</b>	-55.76	2.64	-11.46	44.30	T4

**Graph 2: CDMA 800 Frequency Response**



**Graph 3: CDMA 800 Frequency Response with Battery 2**



**Graph 3: CDMA 1900 Frequency Response**



**Graph 4: CDMA 1900 Frequency Response with Battery 2**



## **5.2 T-coil Environment Results**

T-coil Environment is determined by analysis of both E-Field scan and H-Field scans in the area of the T-coil location. The T-coil location is the earpiece speaker area. The 5cm x 5cm measurement grid is centered on the acoustic output of the device. The probe is raised 10mm from the highest point of the phone's contour to the nearest point of the probe element. The phone was tested in all normal configurations for the ear use. When applicable, each configuration is tested with the antenna in its fully extended and fully retracted positions. These configurations are tested at the high, middle and low frequency channels of each applicable frequency band. For more information on the near field measurements, refer to "HAC Test Report for Near Field Emissions IHDT56EL1" from June 9, 2006.

**Table 5: T-coil Environment measurement results for the portable cellular telephone at highest possible output power.**

CMDA 800 Emissions Limits		
Rating	E-Field	H-Field
T3	199.5 – 354.8 V/m	0.60 – 1.07 A/m
T4	< 199.5 V/m	< 0.60 A/m

Full rate

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777
Axial, Grid 5 (-2.3, 0.2)	74.7	74.7	67.7	57.5	57.1	53.0	0.080	0.083	0.081	0.080	0.082	0.082
Radial 1, Grid 5 (7.7, 0.2)	74.7	74.7	67.7	57.5	57.1	53.0	0.080	0.083	0.081	0.080	0.082	0.082
Radial 2, Grid 5 (-4.3, -5.8)	74.7	74.7	67.7	57.5	57.1	53.0	0.080	0.083	0.081	0.080	0.082	0.082

Full Rate (Battery 2)

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777
Axial, Grid 5 (-4.3, -0.6)		76.1		60.9				0.088			0.085	
Radial 1, Grid 5 (7.7, -2.6)		76.1		60.9				0.088			0.085	
Radial 2, Grid 5 (-0.3, -6.6)		76.1		60.9				0.088			0.085	

1/8 rate

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777
Axial, Grid 5 (-2.3, 0.2)	73.5	86.2	67.2	57.4	56.3	52.1	0.079	0.087	0.084	0.080	0.079	0.080
Radial 1, Grid 5 (7.7, 0.2)	73.5	86.2	67.2	57.4	56.3	52.1	0.079	0.087	0.084	0.080	0.079	0.080
Radial 2, Grid 5 (-4.3, -5.8)	73.5	86.2	67.2	57.4	56.3	52.1	0.079	0.087	0.084	0.080	0.079	0.080

1/8 Rate (Battery 2)

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777	Ch 1013	Ch 384	Ch 777
Axial, Grid 5 (-4.3, -0.6)		74.7		60.6				0.089				0.085
Radial 1, Grid 5 (7.7, -2.6)		74.7		60.6				0.089				0.085
Radial 2, Grid 5 (-0.3, -6.6)		74.7		60.6				0.089				0.085

CDMA 1900 Emissions Limits		
Rating	E-Field	H-Field
T3	63.1 – 112.2 V/m	0.19 – 0.34 A/m
T4	< 63.1 V/m	< 0.19 A/m

Full rate

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175
Axial, Grid 5 (-2.0, -0.2)	35.6	39.8	35.1	39.5	35.1	32.1	0.058	0.067	0.066	0.096	0.096	0.098
Radial 1, Grid 5 (-6.0, -0.2)	35.6	39.8	35.1	39.5	35.1	32.1	0.058	0.067	0.066	0.096	0.096	0.098
Radial 2, Grid 5 (2.0, -8.2)	35.6	39.8	35.1	39.5	35.1	32.1	0.058	0.067	0.066	0.096	0.096	0.098

Full Rate (Battery 2)

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175
Axial, Grid 5 (-2.5, 1.4)		43.0		37.0				0.071				0.098
Radial 1, Grid 5 (7.5, -2.6)		43.0		37.0				0.071				0.098
Radial 2, Grid 2 (1.5, -8.6)		36.9		37.7				0.053				0.084

1/8 rate

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175
Axial, Grid 5 (-2.0, -0.2)	36.2	39.8	38.1	40.0	36.7	36.0	0.048	0.056	0.056	0.084	0.083	0.089
Radial 1, Grid 5 (-6.0, -0.2)	36.2	39.8	38.1	40.0	36.7	36.0	0.048	0.056	0.056	0.084	0.083	0.089
Radial 2, Grid 5 (2.0, -8.2)	36.2	39.8	38.1	40.0	36.7	36.0	0.048	0.056	0.056	0.084	0.083	0.089

1/8 Rate (Battery 2)

Location	E-Field (V/m)						H-Field (A/m)					
	Antenna retracted			Antenna Extended			Antenna retracted			Antenna Extended		
	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175	Ch 25	Ch 600	Ch 1175
Axial, Grid 5 (-2.5, 1.4)		45.4		36.3				0.058				0.086
Radial 1, Grid 5 (7.5, -2.6)		45.4		36.3				0.058				0.086
Radial 2, Grid 5 (1.5, -8.6)		39.0		36.4				0.043				0.074

**5.3 T-Rating Results**

Both T-coil SNR (Table 4) and T-coil Environment (Table 5) determine the T-rating. Table 6 summarizes the T-coil SNR rating and the T-coil Environment rating. For each probe position and frequency band, the T-rating is determined from lower of T-coil SNR and T-coil Environment.

**Table 6: T-Rating results**


Probe Position	Frequency Band (MHz)	ABM1	Frequency Response	T-coil SNR Rating (from section 5.1)	T-coil Env Rating (from section 5.2)	T-rating
Axial	CDMA 800	pass	pass	T4	T4	T4
	CDMA 1900	pass	pass	T4	T4	T4
Radial 1	CDMA 800	pass		T4	T4	T4
	CDMA 1900	pass		T4	T4	T4
Radial 2	CDMA 800	pass		T4	T4	T4
	CDMA 1900	pass		T4	T4	T4

The final T-rating for the portable cellular phone (FCC ID IHDT56EL1) is the lowest T-rating from Table 6 (last column). This rating is the lowest category across probe positions and frequency bands.


T-rating for DUT (lowest rating from Table 6, last column)	T4
--	----

**Appendix 1**  
**Contour Plots**


Axial – ABM1

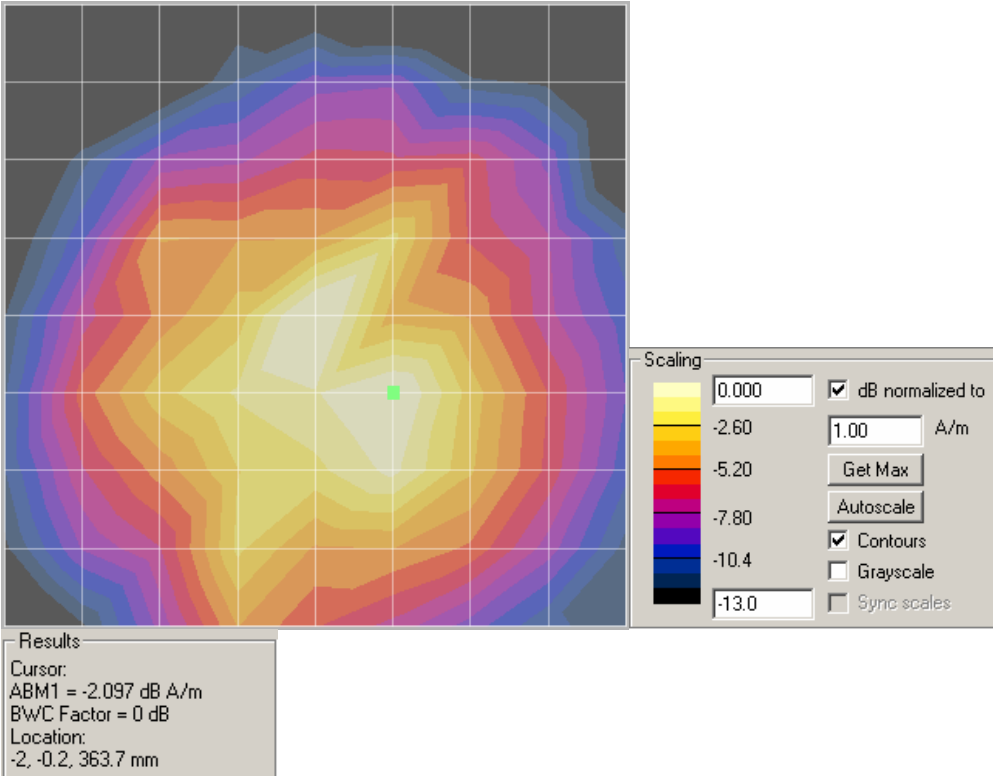


Axial - SNR

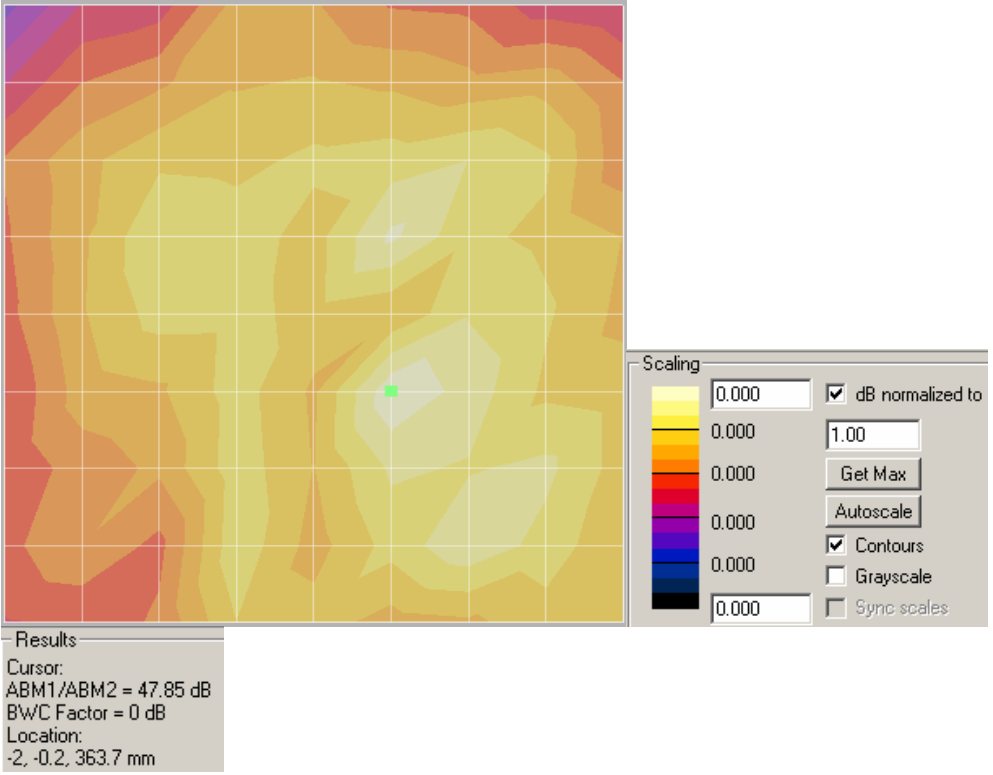


Radial 1 – ABM1

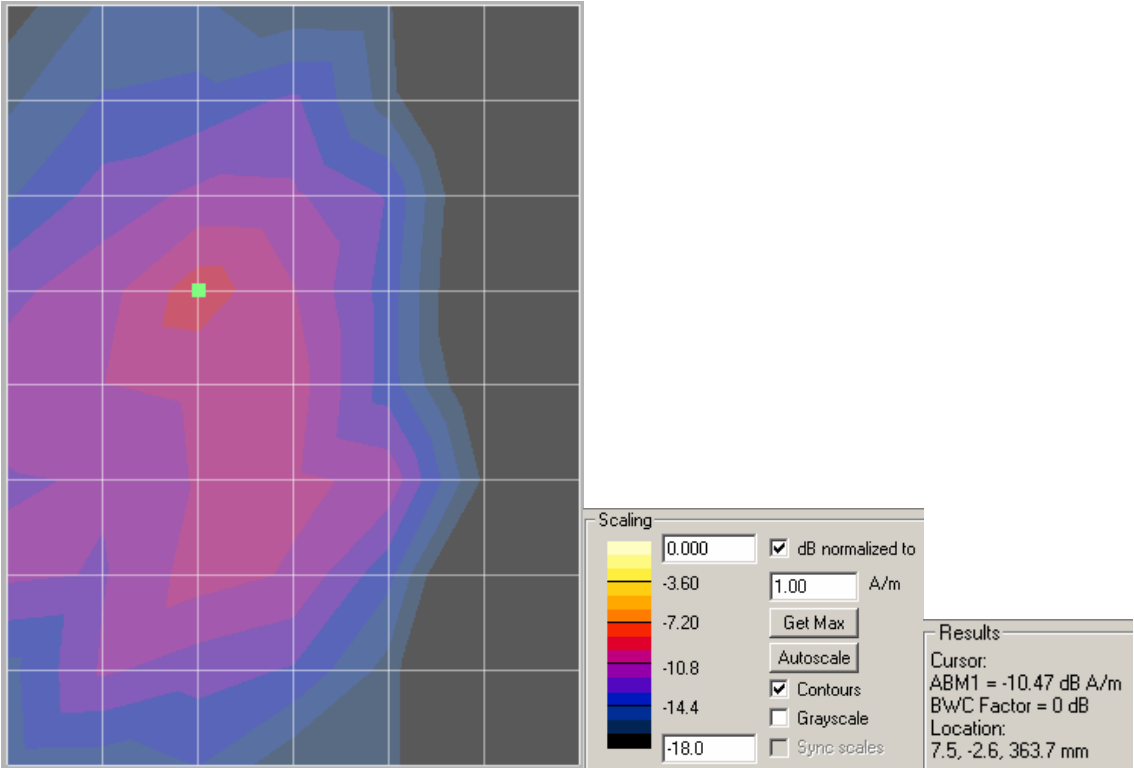

Radial 1 - SNR

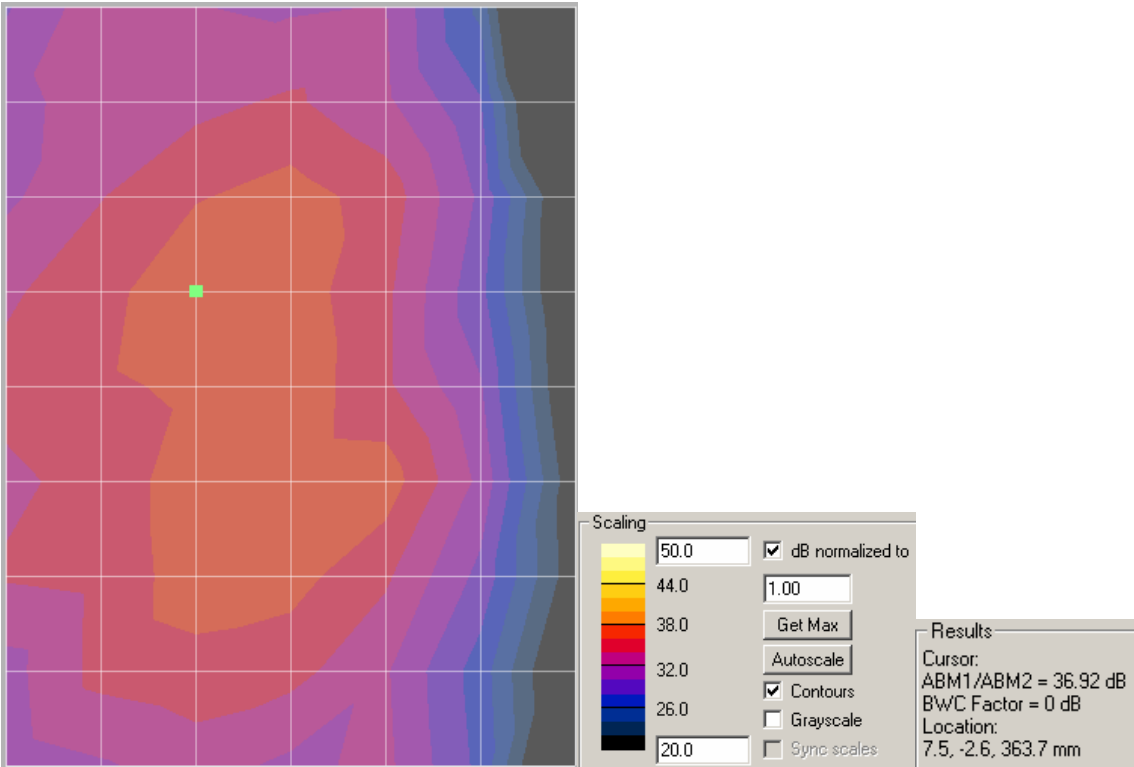


Radial 2 - ABM1

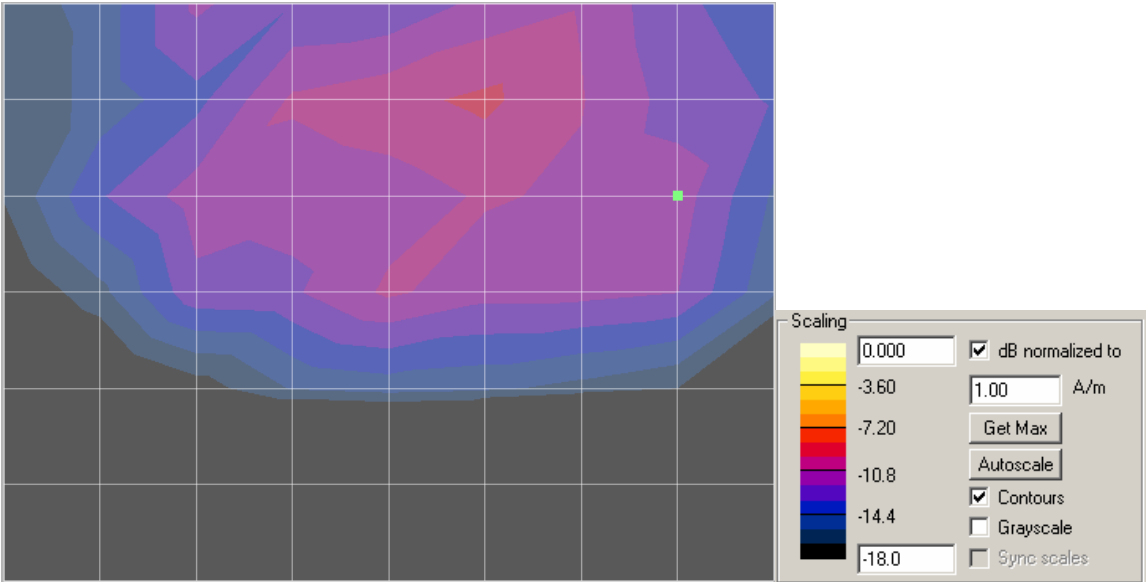

Results  
Cursor:  
ABM1 = -13.02 dB A/m  
B/WC Factor = 0 dB  
Location:  
-4.3, -5.8, 363.7 mm

Radial 2 - SNR

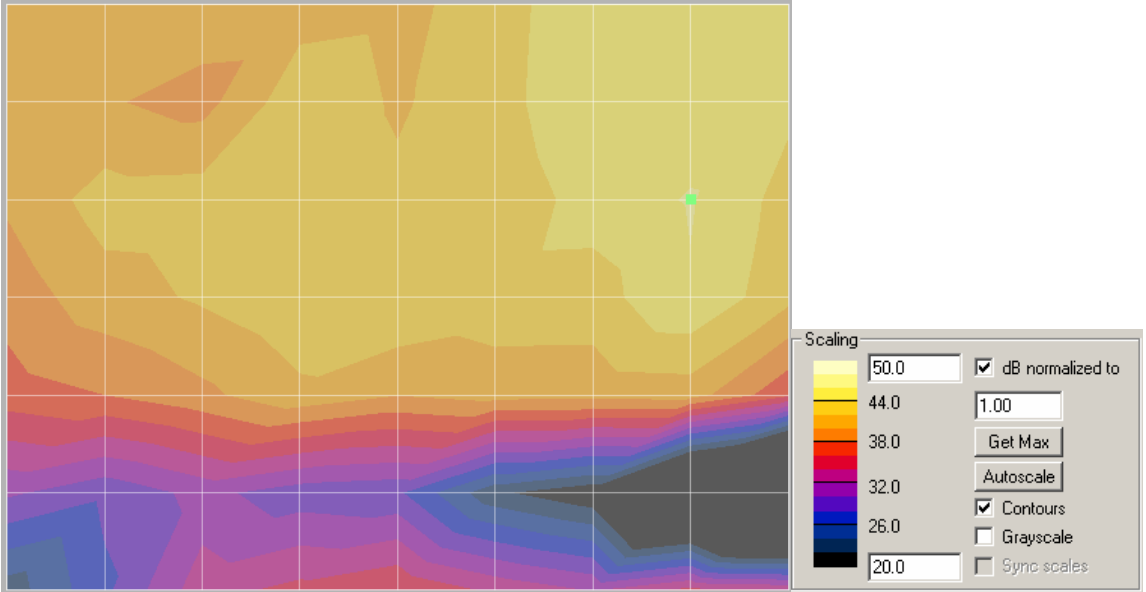

Results  
Cursor:  
ABM1/ABM2 = 44.13 dB  
B/WC Factor = 0 dB  
Location:  
-4.3, -5.8, 363.7 mm

**Appendix 2**

**Ambient Noise Spectrum Plots**

**Graph A2-1. Axial Position Ambient Noise Spectrum Plot**



**Graph A2-2. Radial 1 Position Ambient Noise Spectrum Plot**



**Graph A2-3. Radial 2 Position Ambient Noise Spectrum Plot**



**Appendix 3**

**Pictures of Test Setup**



**Figure A3-1. Phone Closed**



**Figure A3-2. View from the front**



**Figure A3-3. View from the side**



Figure A3-4. Phone Open – Coordinate Axis for T-coil Measurements

- Axial at ( - 2.0, - 0.2 )
- Radial 1 at ( 7.5, - 2.6 )
- Radial 2 at ( - 4.3, - 5.8 )



Figure A3-5. Phone Open – Location of Measured Points



Figure A3-6. Phone Open – 5cm x 5cm grid for Near Field Measurements

**Appendix 4**

**Motorola Uncertainty Budget**

**Table A4-1: Draft T-Coil Uncertainty Budget, provided by SPEAG 7-June-06**

Error Description	Uncertainty value [%]	Prob. Dist.	Div.	c ABM1	c ABM2	Std. Unc. ABM1	Std. Unc. ABM2
<b>PROBE SENSITIVITY</b>							
Reference level	3.0	N	1.0	1	1	3.0	3.0
AMCC geometry	0.4	R	1.7	1	1	0.2	0.2
AMCC current	0.6	R	1.7	1	1	0.4	0.4
Probe positioning during calibration	1.0	R	1.7	1	1	0.6	0.6
Noise contribution	0.7	R	1.7	0.014	1	0.0	0.4
Frequency slope	5.9	R	1.7	0.1	1.0	0.3	3.5
<b>PROBE SYSTEM</b>							
Repeatability / Drift	1.0	R	1.7	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	1.7	1	1	0.4	0.4
Acoustic noise	1.0	R	1.7	0.1	1	0.1	0.6
Probe angle	2.3	R	1.7	1	1	1.4	1.4
Spectral processing	0.9	R	1.7	1	1	0.5	0.5
Integration time	0.6	N	1.0	1	5	0.6	3.0
Field disturbance	0.2	R	1.7	1	1	0.1	0.1
<b>TEST SIGNAL</b>							
Reference signal spectral response	0.6	R	1.7	0	1	0.0	0.4
<b>POSITIONING</b>							
Probe positioning	1.9	R	1.7	1	1	1.1	1.1
Phantom thickness	0.9	R	1.7	1	1	0.5	0.5
DUT positioning	1.9	R	1.7	1	1	1.1	1.1
<b>EXTERNAL CONTRIBUTIONS</b>							
RF interference	0.0	R	1.7	1	1	0.0	0.0
Test signal variation	2.0	R	1.7	1	1	1.2	1.2
<b>COMBINED UNCERTAINTY</b>							
Combined Std. uncertainty (ABM field)						4.1	6.2
Expanded Std. uncertainty [%]						8.2	12.3

**Appendix 5**

**Audio Magnetic Probe Certificate**

**Certificate of conformity**

Item	Audio Magnetic 1D Field Probe AM1DV2
Type No	SP AM1 001 A
Series No	1001 fr.
Manufacturer / Origin	Schmid & Partner Engineering AG Zurich, Switzerland

**Description of the item**

The Audio Magnetic Field Probe AM1DV2 is a fully RF shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The signal from the pickup coil is amplified in a symmetric 40dB low noise amplifier and fed to a 3 pin connector at the side. Power is supplied via the same and monitored via the LED near the connector. The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components by rotating the probe around its axis.

**Handling of the item**

The probe is manufactured and designed for operation in air and shall not be exposed to humidity or liquids. In order to keep the performance and alignment, the probe must not be disassembled. The full performance can only be achieved using the SPEAG provided accessories and following the corresponding manual.

**Tests**

Test	Requirement	Details	Units tested
Sensor angle	Probe configuration data for alignment with field	see corresponding probe certificate	all
Dimensions	according to corresponding probe certificate	verified at delivery / light beam alignment prior to measurement usage	all / in setup by user
Frequency response	within +/- 0.5 dB of ideal differentiator from 100 Hz to 10 kHz	Coil current of AMCC measured with R&S UPL, probe including amplifier and AMMI ADC input	First article
Dynamic range	max. + 21 dB A/m @ 1 kHz Noise level typ. -70 dB A/m @ 1 kHz ABM2 typ. -60 dB A/m	with AMMI	Samples / all
Linearity	within < 0.1 dB from 5 dB below limitation to 16 dB above noise level	tested between +15 dB A/m @ 1 kHz, to -70 dB A/m @ 10 kHz	Samples
Sensitivity	typ. -24 dBV / A/m @ 1 kHz at probe output	verified at delivery / calibrated in setup prior to measurement usage	all / in setup by user
RF shielding	immunity to AM modulated RF signal	1 kHz 80 % AM	all

**Standards**

[1] ANSI PC63.19-2006 Draft 3.12

**Conformity**

Based on the tests above, we certify that this item is in compliance with the requirements of [1].

Date 22.5.2006

Stamp / Signature

**s p e a g**  
Schmid & Partner Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, http://www.speag.com

## Certificate of test and configuration

Item	Audio Magnetic 1D Field Probe <b>AM1DV2</b>
Type No	SP AM1 001 A
Series No	<b>1003</b>
Manufacturer / Origin	Schmid & Partner Engineering AG Zurich, Switzerland

### Description of the item

The Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1]. The probe includes a symmetric 40dB low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface. The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted 35.3° above the measurement plane, using the connector rotation below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1] without additional shielding.

### Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in the DASY4 system, the probe must be operated with the special probe cup provided (larger diameter).

### Functional test

The probe configuration data were evaluated after a functional test including amplification, dynamic range and RF immunity.

### DASY4 configuration data for the probe

Configuration item	Condition	Configuration Data	Dimension
Overall length	mounted on DAE in DASY4 system	<b>296</b>	mm
Tip diameter	at the cylindrical part	6	mm
Sensor offset	center of sensor, from tip	3	
Connector rotation	Evaluated in homogeneous 1 kHz magnetic field generated with AMCC Helmholtz Calibration Coil	<b>92</b>	°

### Standards

[1] ANSI PC63.19-2006 Draft 3.12

Date

22.2.2006

Signature



**Appendix 6**

**AMCC Certificate (Helmholz Coil)**

**Certificate of conformity**

Item	Audio Magnetic Calibration Coil AMCC
Type No	SD HAC P02 A
Series No	1001 ff.
Manufacturer / Origin	Schmid & Partner Engineering AG Zurich, Switzerland

**Description of the item**

The Audio Magnetic Calibration coil (AMCC) is a Helmholtz Coil designed according to standard [1], section D.9 for calibration of the AM1D probe. Two horizontal coils are positioned above a non-metallic base plate and generate a homogeneous magnetic field in the z direction (normal to it).

**Configuration**

The AMCC consists of two parallel coils of 20 turns with radius 143 mm connected in parallel in a distance of 143 mm. With this design, a current of 10 mA produces a field of 1 A/m. The DC input resistance at the input BNC socket is adjusted by a series resistor to a DC resistance of approximately 50 Ohm. The voltage required to produce a field of 1 A/m is consequently approx. 500 mV.

The current through the coil is monitored via a shunt resistor of 10 Ohm +/- 1%. The voltage is available on a BNO socket with 100 mV corresponding to 1 A/m.

**Handling of the item**

The coil shall be positioned in a non-metallic environment to avoid distortion of the magnetic field.

**Tests**

Test	Requirement	Details	Units tested
Number of turns	N = 20 per coil	Resistance measurement	all
Orientation of coils	parallel coils with same direction of windings	Magnetic field variation in the AMCC axis	all
Coil radius	r = 143 mm	mechanical dimension	First article
Coil distance	d = 143 mm distance between coil centers	mechanical dimension	First article
Input resistance	51.7 +/- 2 Ohm	DC resistance at BNC input connector	all
Shunt resistance	R = 10.0 Ohm +/- 1 %	DC resistance at BNO output connector	all
Shunt sensitivity	Hc = 1 A/m per 100 mV according to formula $H_c = (U / R) * N / r / (1.25^{*1.5})$	Field measurement compared with Narda ELT400 + BN2300/90.10	First article

**Standards**

[1] ANSI PC63.19-2006 Draft 3.12

**Conformity**

Based on the tests above, we certify that this item is in compliance with the requirements of [1].

Date

22.5.2006

Stamp / Signature

**s p e a g**

Schmid & Partner Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 1 245 9700, Fax +41 1 245 9779  
info@speag.com, http://www.speag.com