



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 17234-2

Report Date – November 21, 2005

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

A handwritten signature in blue ink that reads "Michael E. Hill".

Signature

Name: Michael E. Hill

Title: Senior Staff Electrical Engineer

Date: November 21, 2005

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	4
Applicable Standards	4
Summary of Testing	5
General and Special Conditions	5
Equipment and Cable Configurations	6
Measuring Equipment and Calibration Information	6
Measurement Procedures and Data	
RF Power Output	7
Radiated Power (ERP)	8
Occupied Bandwidth	9
CDMA 800 Reference Plot	10
CDMA 800 Occupied Bandwidth Plot	10
CDMA 800 Ch128 Lower Band Edge	11
CDMA 800 Ch251 Upper Band Edge	11
CDMA 1900 Reference Plot	12
CDMA 1900 Occupied Bandwidth Plot	12
CDMA 1900 Ch512 Lower Band Edge	13
CDMA 1900 Ch810 Upper Band Edge	13
Spurious Emissions at Antenna Terminals	14
CDMA 800 Tabular and Graphical Data	15
CDMA 1900 Tabular and Graphical Data	16
Field Strength of Spurious Emissions	17
CDMA 800 Tabular and Graphical Data	18
CDMA 1900 Tabular and Graphical Data	19
Frequency Stability	20
CDMA 800 Tabular and Graphical Data	21
CDMA 1900 Tabular and Graphical Data	22
Field Strength of Spurious Emissions from Unintentional Radiators	23
CDMA 800 Tabular and Graphical Data	24
CDMA 1900 Tabular and Graphical Data	26
Appendix A - Radiated Emissions Test Setup Photos	
Figure A.1 – Radiated Emissions Measurement	27
Figure A.2 – Substitution Measurement	27

Test Report Details

Tests Performed By: Motorola Mobile Devices business
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola MDB FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Tests Requested By: Motorola Inc.
Mobile Devices business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: CDMA 800
Model Number: Q

Version: SJUG1134CC

Serial Numbers: LFC0480086, LFC0440004, LFC0480085,
LFC0490021, LFC0490056

Testing Complete Date: November 21, 2005

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart B – Unintentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

Summary of Testing

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	Modulation Characteristics	NA
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass
8	Field Strength of Spurious Emissions from Unintentional Radiators	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	9.30
3	Modulation Characteristics	NA
4	Occupied Bandwidth	See Plots
5	Spurious Emissions at Antenna Terminal	11.2 dB
6	Field Strength of Spurious Emissions	below noise floor
7	Frequency Stability	74.0 Hz
8	Field Strength of Spurious Emissions from Unintentional Radiators	below noise floor

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Cal. Due Date
Rohde & Schwarz	Receiver	ESI26	838786/010	2/7/2006
Hewlett-Packard	EMC Analyzer	7405	US39440191	1/27/2006
ETS	DRG Horn Antenna	3115	6222	2/9/2006
A.H. Systems Inc.	DRG Horn Antenna	SAS-2--/571	365	5/25/2006
ETS	Log-Periodic Antenna	3148	1188	6/14/2006
ETS	Biconical Antenna	3110B	3370	2/16/2006
Attenuator	Weinschel	AS-6	6675	12/27/2005
Attenuator	Weinschel	AS-6	6677	11/14/2006
Hewlett-Packard	Signal Generator	83623B	3844A01195	6/20/2006
Thermotron	Environmental Chamber	S-4	31580	1/17/2006
Agilent	Power Meter	EE4418B	GB40206388	12/5/2005
Agilent	Power Sensor	E4412B	US38486321	12/5/2005
Hewlett-Packard	Pre-Amplifier	8447F	2805A03419	3/24/2006

All equipment is on a one-year calibration cycle.

Measurement Procedures and Data

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of a HPE4406A Vector Signal Analyzer through a 10dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR47 Part 2.1046

Measurement Results

CDMA 800

Frequency (MHz)	Power (dBm)
824.7	26.05
836.52	26.00
848.31	26.02

CDMA 1900

Frequency (MHz)	Power (dBm)
1851.25	24.93
1880.00	25.10
1908.75	24.80

RADIATED (ERP)

Measurement Procedure

The phone was tested in a 16' anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT's radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for CDMA 800 three frequencies (824.7, 836.52 and 848.31 MHz) and CDMA 1900 three frequencies (1851.25, 1880.00, and 1908.75 MHz) with antenna stubby.

CDMA measurements were made with the phone placed in a call using the HP E8285A mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Gigatronics 8542C power meter in "Mod Avg" mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. The max radiated power results for the IHDT56FQ1 follows, as EIRP in dBm. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

Measurement Results

Data not supplied by EMC Lab

CDMA 800:

824.7 MHz	25.52 dBm
836.52 MHz	25.80 dBm
848.31 MHz	25.46 dBm

CDMA 1900:

1851.25 MHz:	23.47 dBm
1880.0 MHz:	25.14 dBm
1908.75 MHz:	25.67 dBm

For all measurements, calibration was performed via gain substitution with a half-wave dipole.

The max EIRP in CDMA 800 mode is 25.80 dBm (**max ERP is 23.70 dBm**)
The max EIRP in CDMA 1900 mode is 25.67 dBm (max ERP is 23.57 dBm)

OCCUPIED BANDWIDTH

CFR Part 2.1049, 22.917, 24.238

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Equipment Settings

Equipment Settings						
Plot	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - CDMA 800	3000	Auto	2001	Max Hold	Peak	100
OCBW - CDMA 800	30	Auto	1601	Max Hold	Peak	100
Lower Band Edge - CDMA 800	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - CDMA 800	1	Auto	2004	Max Hold	Peak	30
Reference Plot - CDMA 1900	3000	Auto	1001	Max Hold	Peak	30
OCBW - CDMA 1900	30	Auto	1001	Max Hold	Peak	30
Lower Band Edge - CDMA 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - CDMA 1900	1	Auto	2004	Max Hold	Peak	30


- Notes: 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for ³ the resolution bandwidth.
 2) The plotted data shown for the band edge measurements is representative of data taken with a true 13 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 13 kHz resolution bandwidth filter.

Measurement Results


Attached

Measurement Results – CDMA 800


CDMA 800 Reference Level

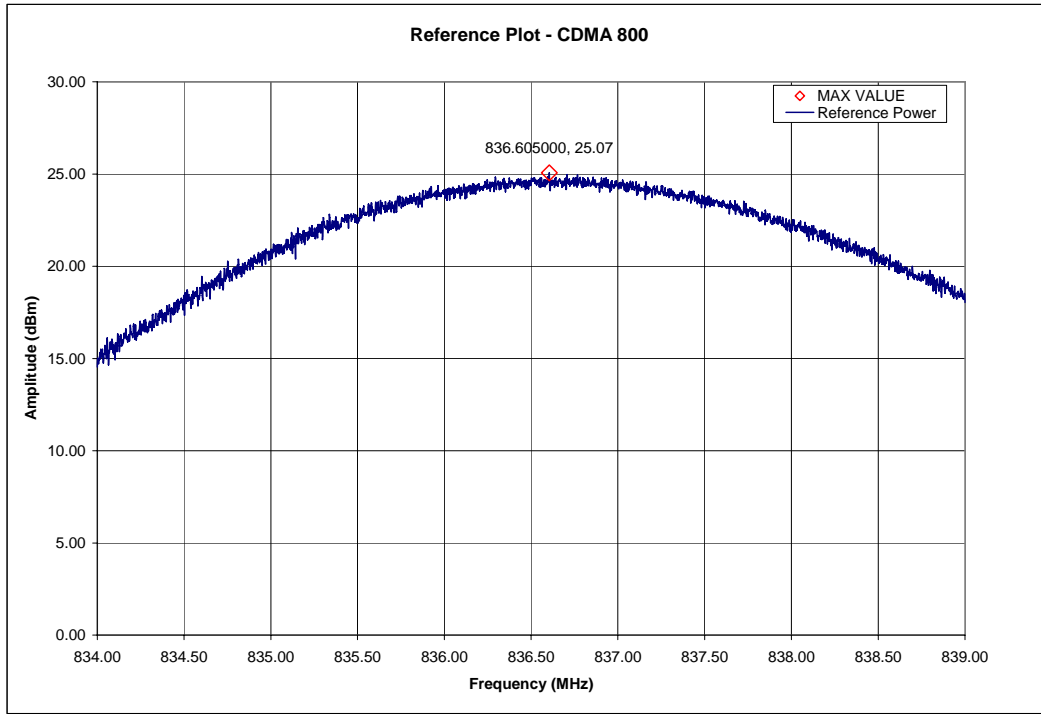


CDMA 850 Occupied Bandwidth

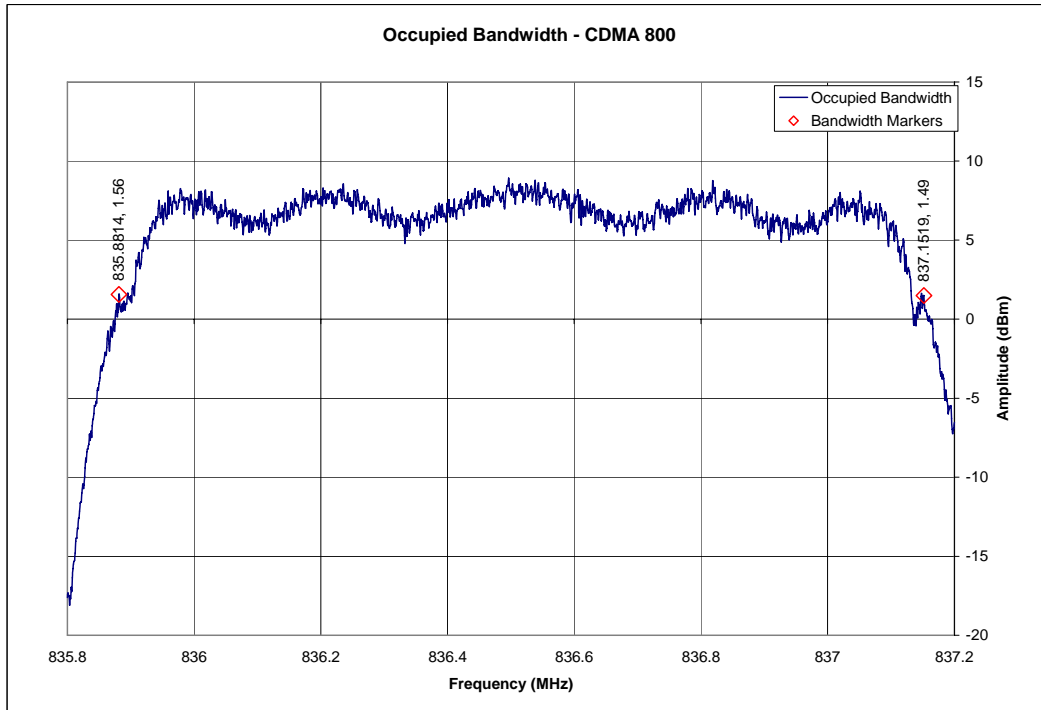

CDMA 800 Ch128 Lower Band Edge

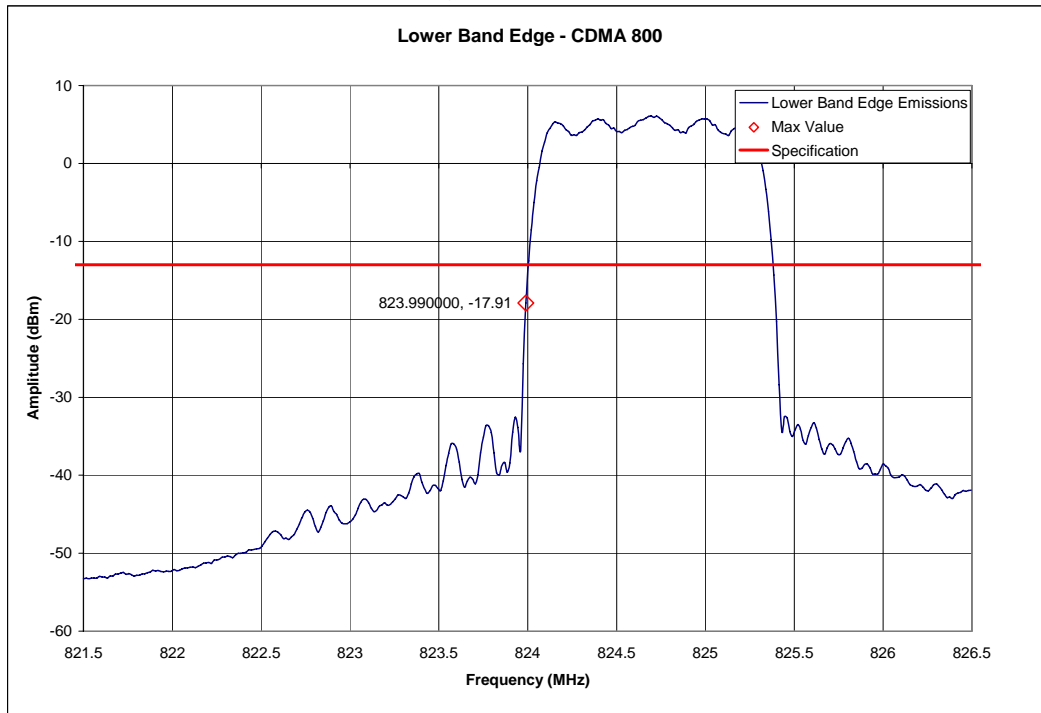


CDMA 800 Ch251 Upper Band Edge

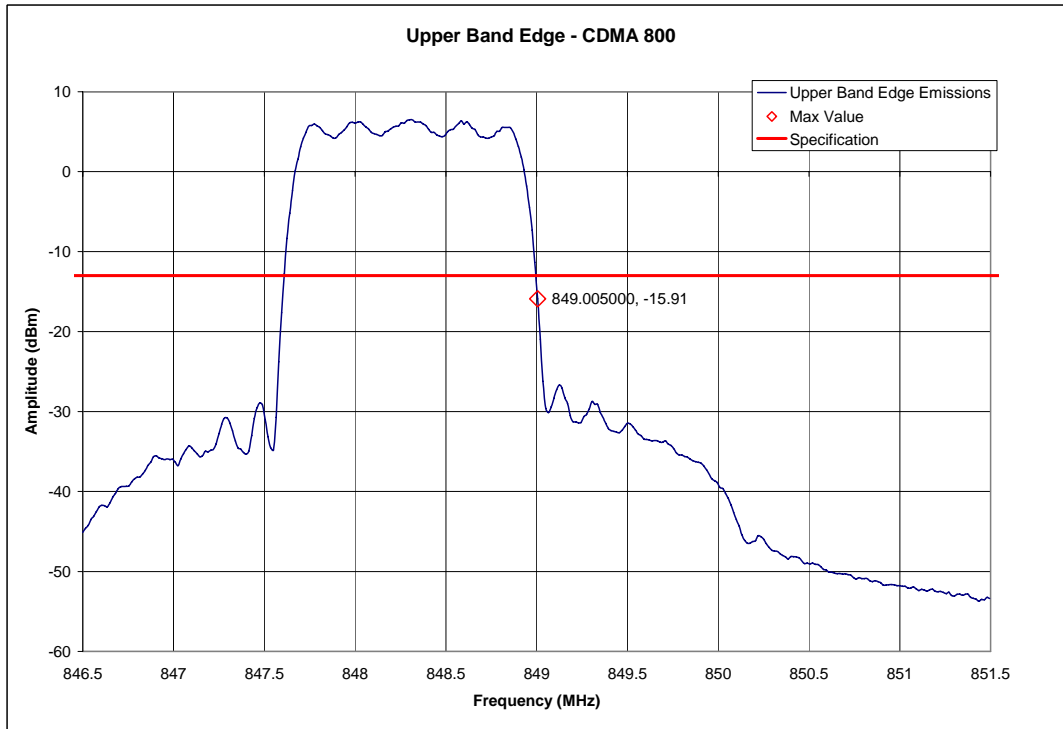


Measurement Results – CDMA 1900


CDMA/PCS 1900 Reference Level

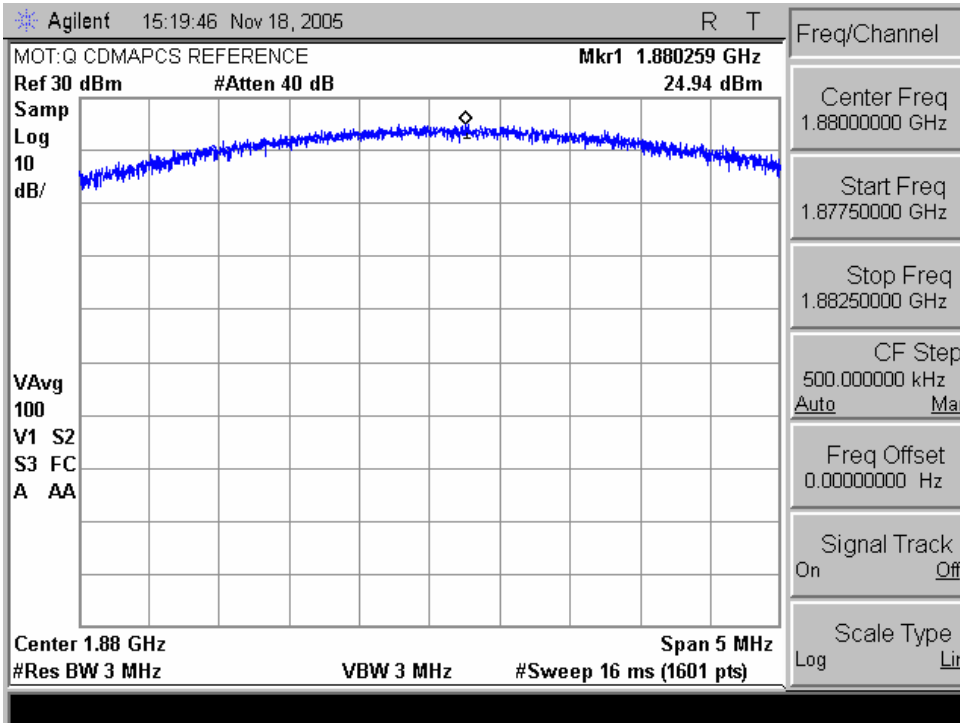


CDMA/PCS 1900 Occupied Bandwidth

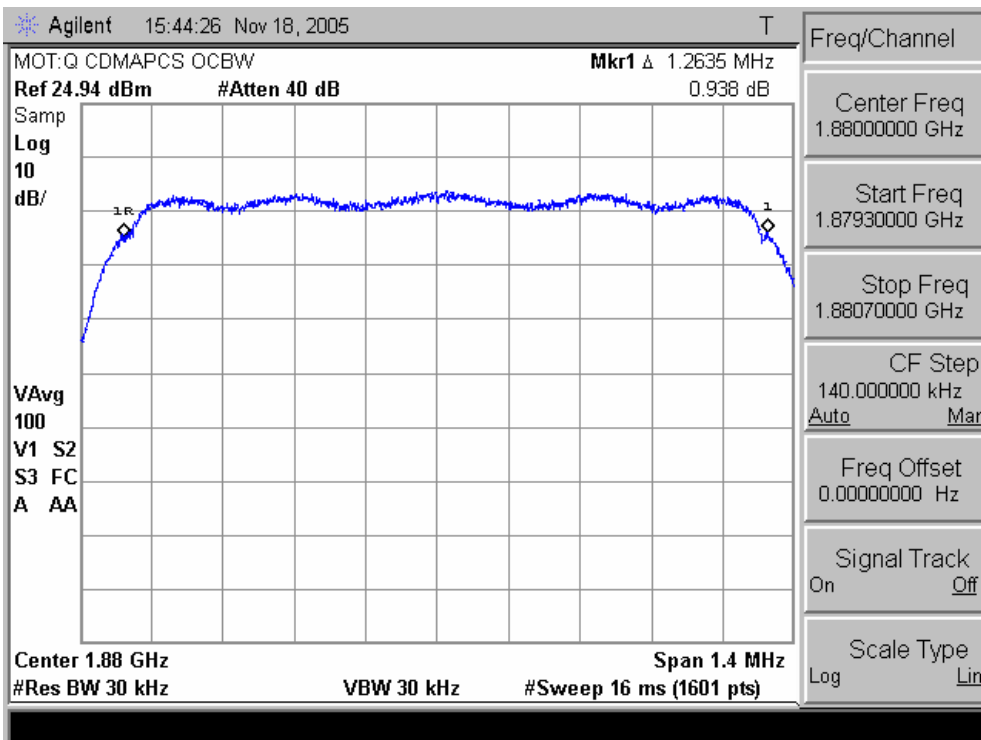

CDMA/PCS 1900 Ch512 Lower Band Edge

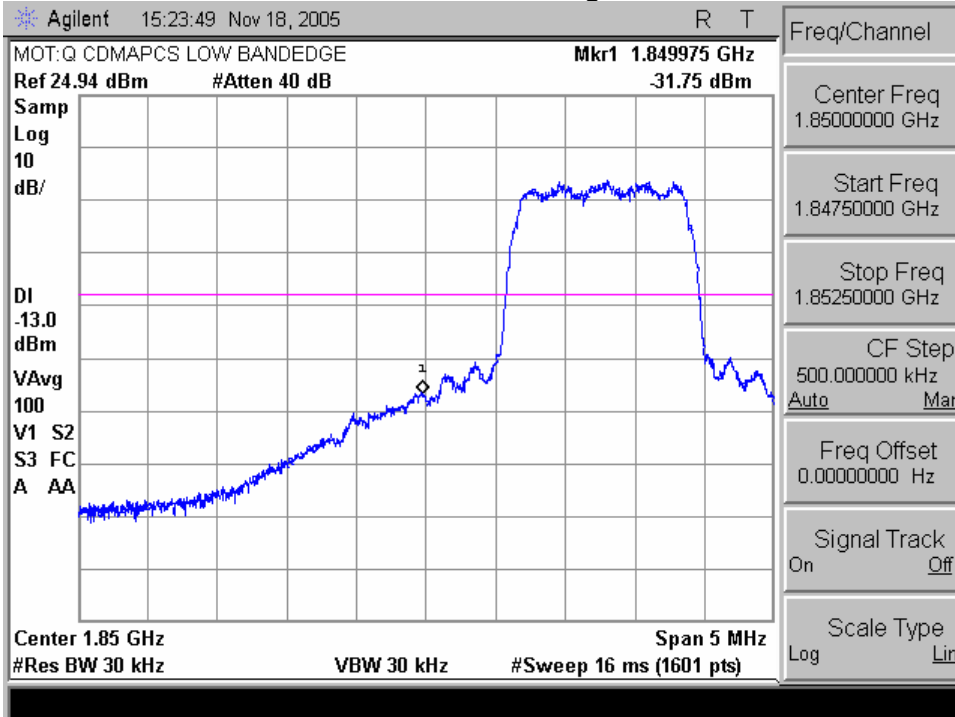

CDMA/PCS 1900 Ch810 Upper Band Edge

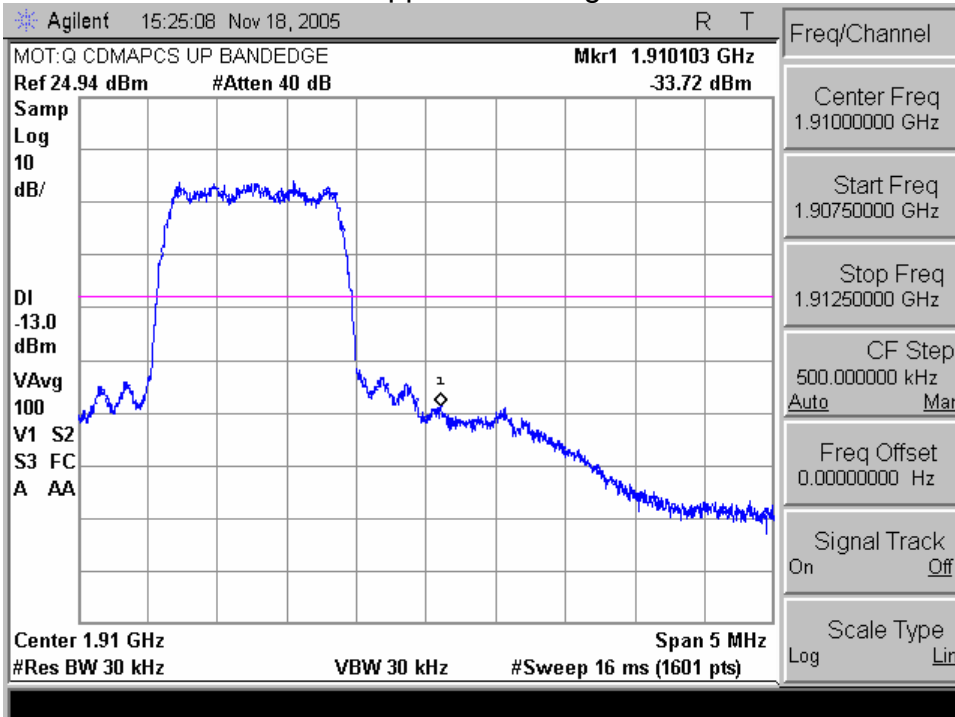

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

CFR47 Part 2.1051, 24.238

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

Measurements were made at the middle channel within the frequency band and within the base station frequency range (869-894 MHz) for cellular.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

Measurement Results


Attached

Measurement Results

Modulation: CDMA 800

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-30.0
3rd harmonic	-13	-47.9
4th harmonic	-13	-46.0
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

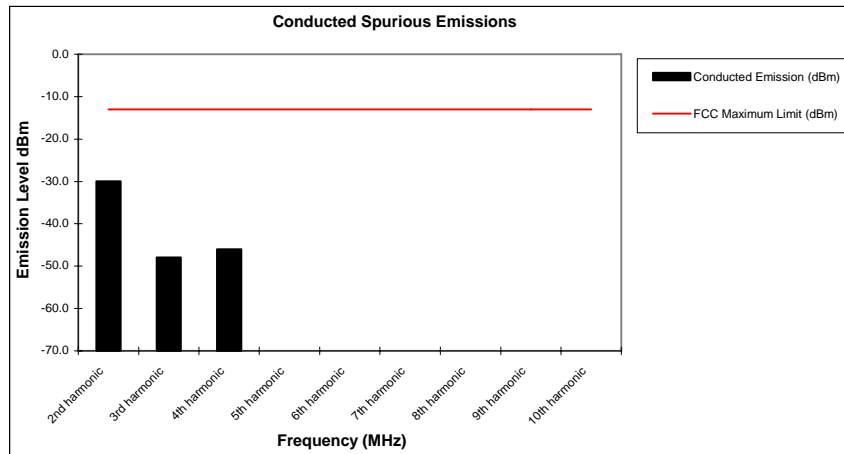

Notes:


- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

Measurement Results

Modulation: CDMA 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-24.2
3rd harmonic	-13	-49.2
4th harmonic	-13	*
5th harmonic	-13	-47.1
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

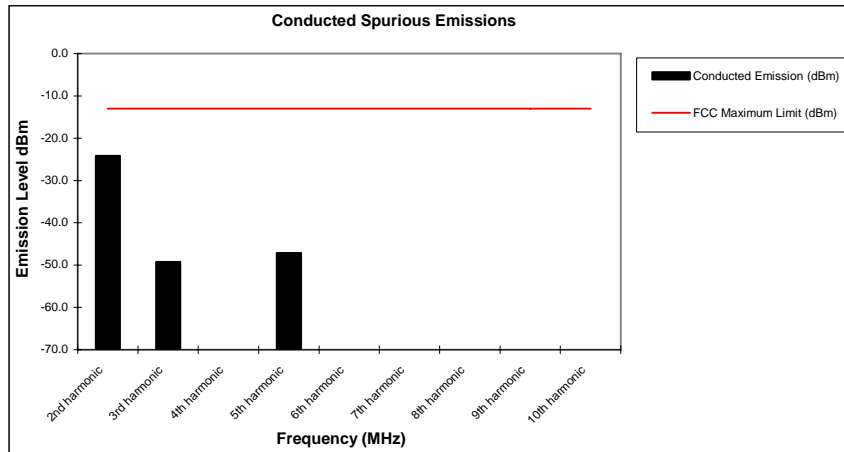

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR47 Part 2.1053, 22.917, 24.238

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results
Modulation: CDMA 800

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

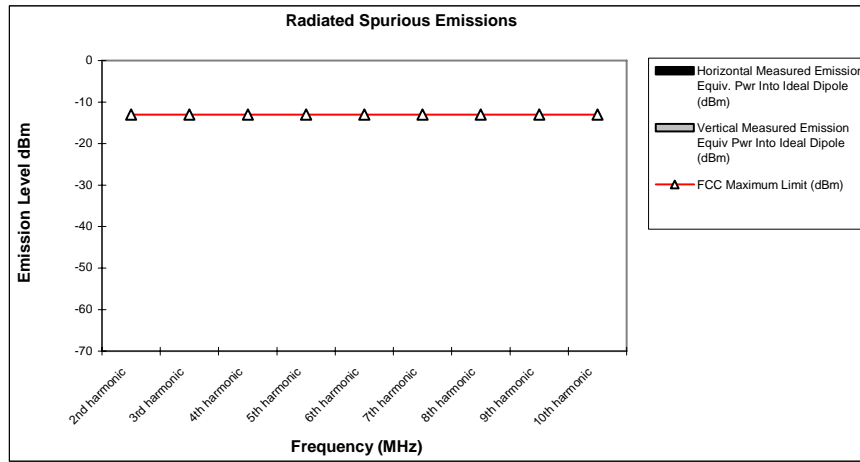


Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

Measurement Results
Modulation: CDMA 1900

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

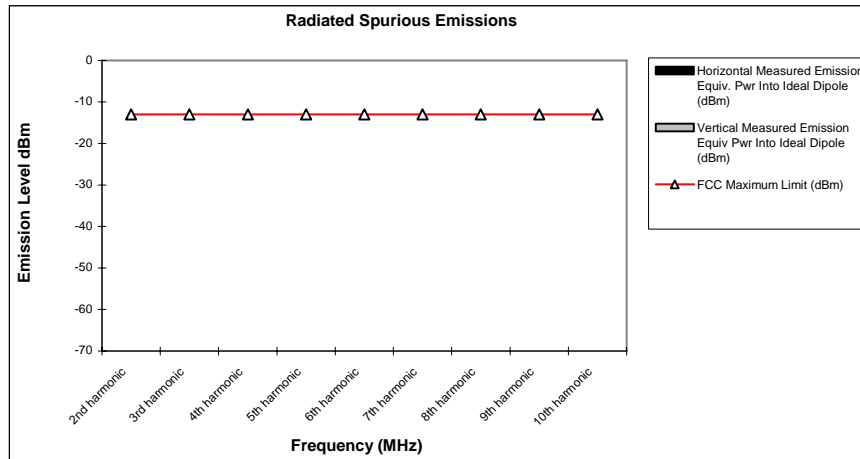

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

FREQUENCY STABILITY

CFR47 Part 2.1055, 24.235

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30° C to +60° C and at intervals of 10° C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results
Modulation: CDMA 800

Frequency Stability

Mode: CDMA 800 **Operating Frequency:** 836.52 MHz
Channel: 384 **Deviation Limit (PPM):** 0.359ppm (+/-300 Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-9.00	-0.011	100%	3.70
-20 C	9.00	0.011	100%	3.70
-10 C	-7.00	-0.008	100%	3.70
0 C	-8.00	-0.010	100%	3.70
10 C	9.00	0.011	100%	3.70
20 C	10.00	0.012	100%	3.70
30 C	54.00	0.065	100%	3.70
40 C	-7.00	-0.008	100%	3.70
50 C	-7.00	-0.008	100%	3.70
60 C	7.00	0.008	100%	3.70
20 C	10.00	0.012	Battery Endpoint	3.20

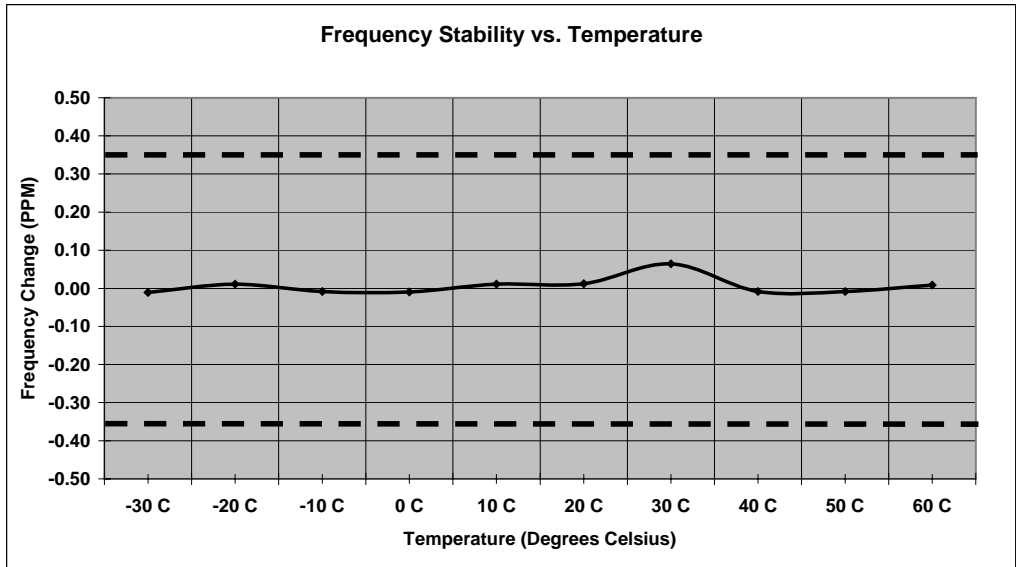


Measurement Results

Modulation: CDMA1900

Frequency Stability

Mode: CDMA 1900 **Operating Frequency:** 1880.0 MHz
Channel: 600 **Deviation Limit (PPM):** 0.08ppm (+/-150Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-23.00	-0.012	100%	3.70
-20 C	-20.00	-0.011	100%	3.70
-10 C	10.00	0.005	100%	3.70
0 C	10.00	0.005	100%	3.70
10 C	47.00	0.025	100%	3.70
20 C	32.00	0.017	100%	3.70
30 C	-23.00	-0.012	100%	3.70
40 C	20.00	0.011	100%	3.70
50 C	-35.00	-0.019	100%	3.70
60 C	-74.00	-0.039	100%	3.70
20 C	35.00	0.019	Battery Endpoint	3.20

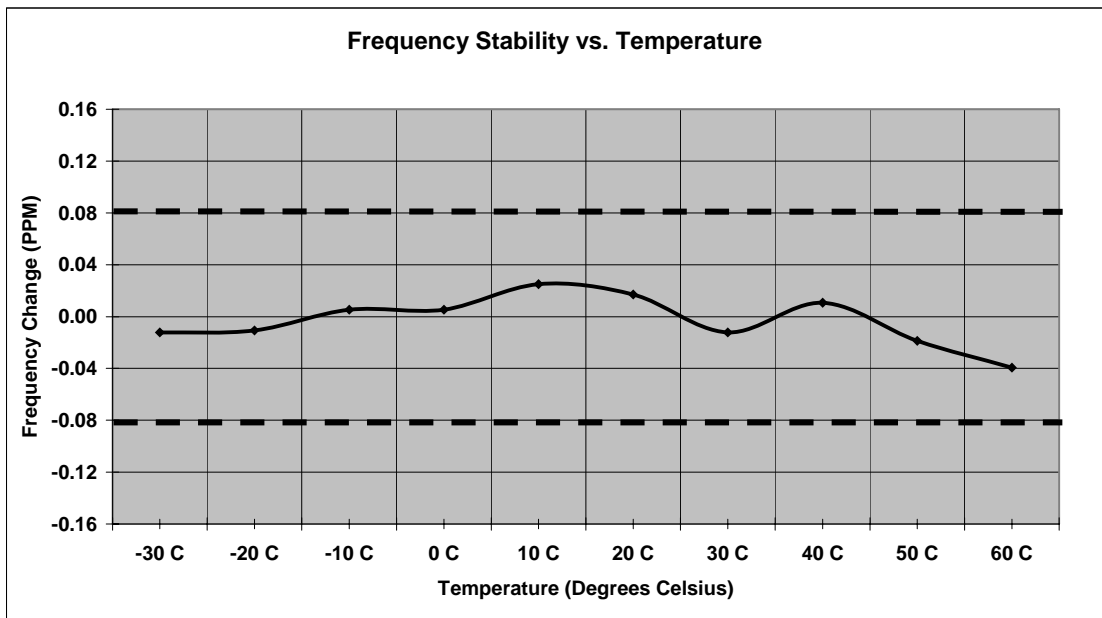

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

CFR Part 15.109

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

The receiver settings were as follows:


Units	dBuV
Resolution Bandwidth	30 kHz
Video Bandwidth (AVG)	Auto
Sweep Time	auto
Attenuation	10 dB
Detector	Peak

Measurement Results

The data represents the worst case results for channel and orientation.

Attached


Measurement Results
Modulation: CDMA 800

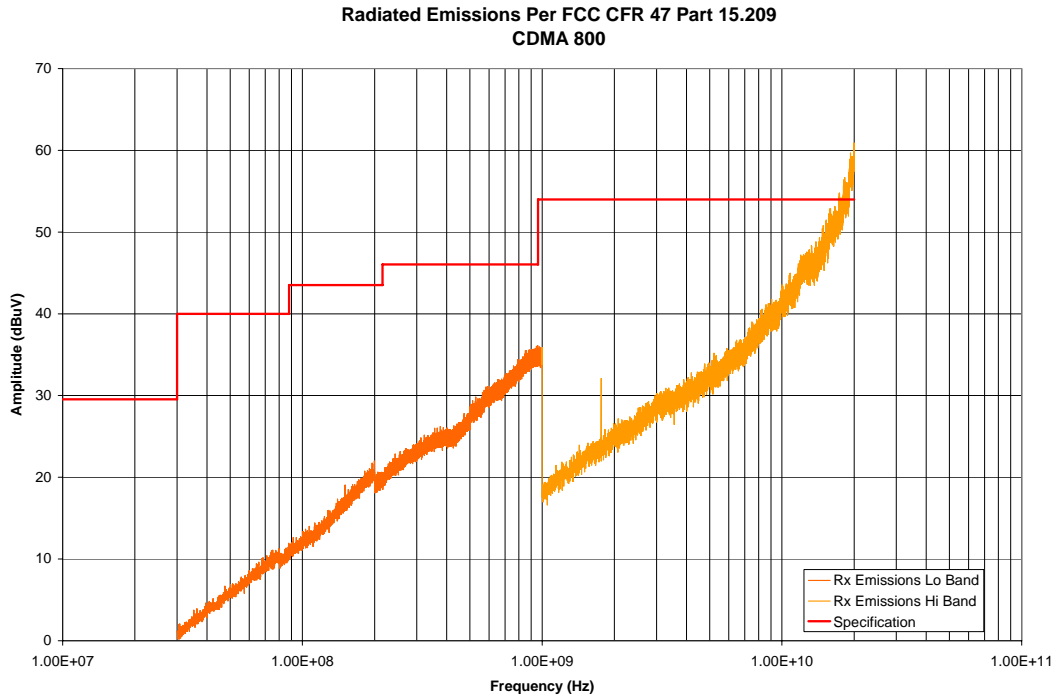


Measurement Results

Modulation: CDMA 1900


Radiated Emissions Per FCC CFR 47 Part 15.209
PCS Channel 661 - Rx Mode

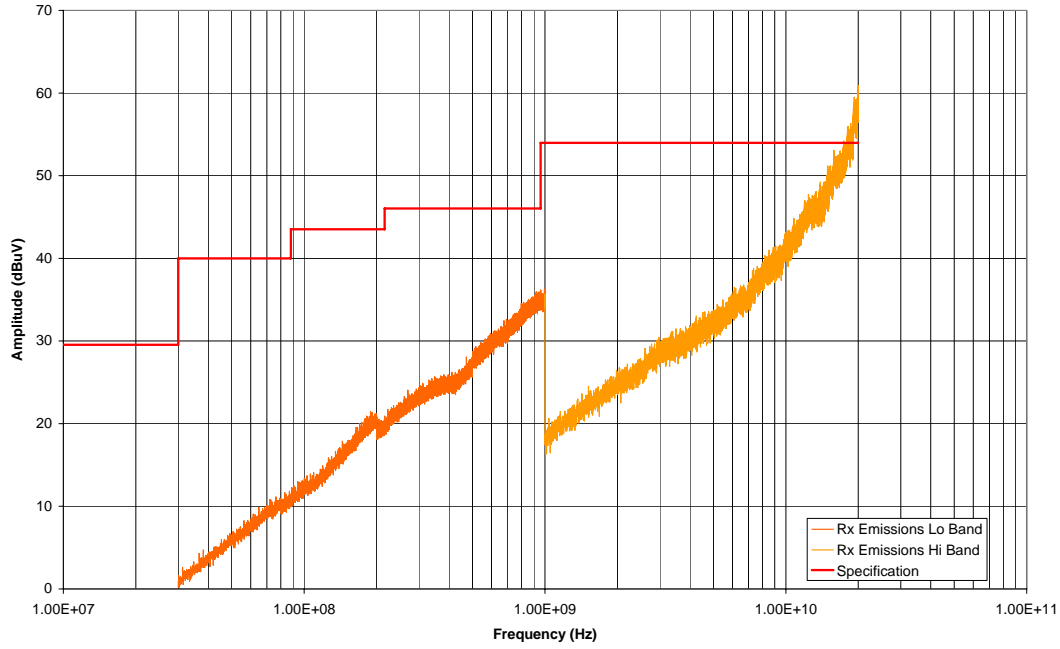

Appendix A – Radiated Emissions Test Setup Photos

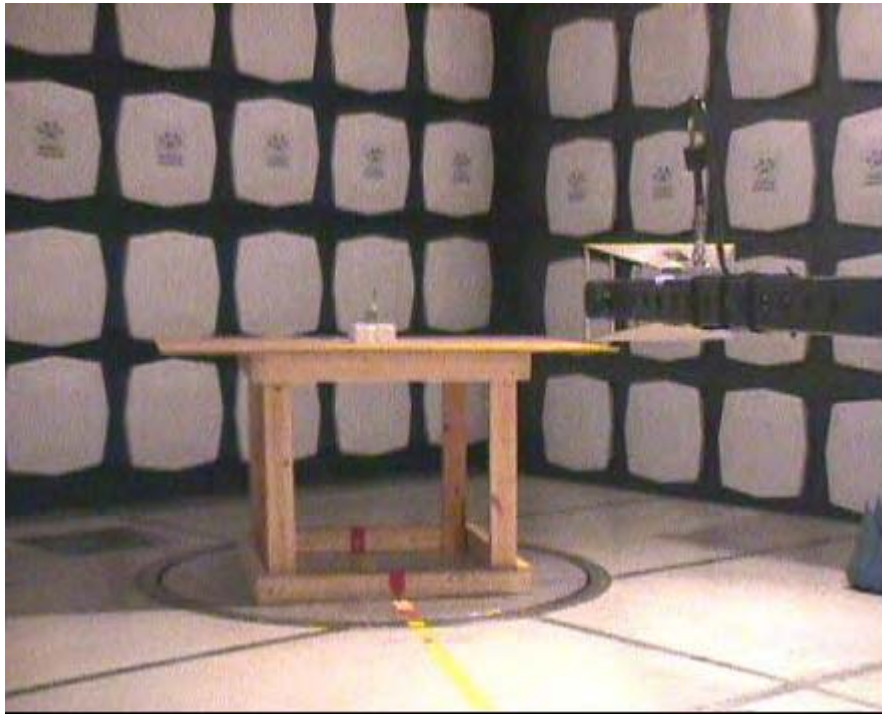

A.1 Radiated Emissions Measurement

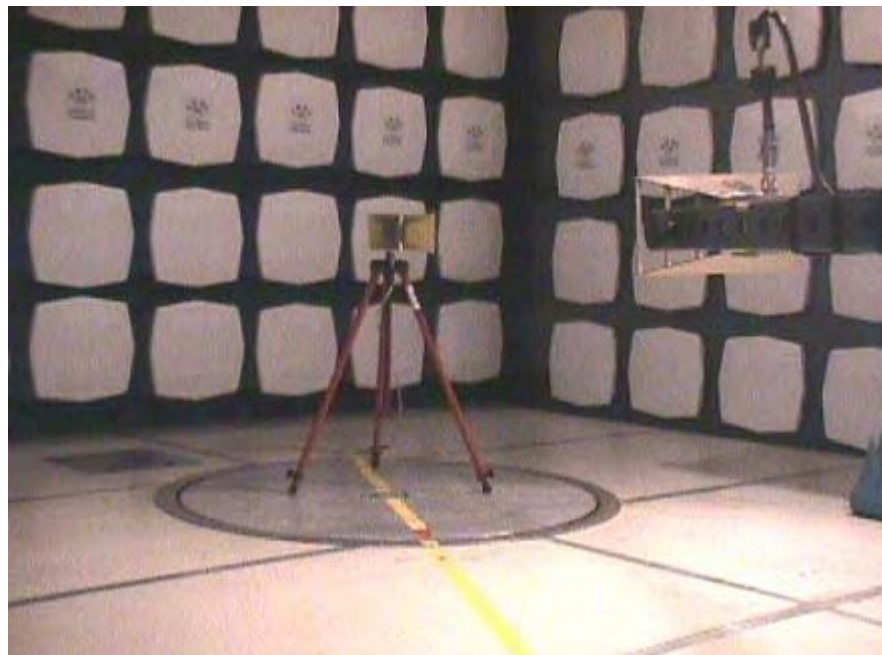

A.2 Substitution Measurement

End of Test Report