



MOTOROLA

Portable Cellular Phone SAR Test Report

Test Report #: 18157-1F
Date of Report: April 06, 2006
Date of Test: March 21, 2006 – March 26, 2006
FCC ID #: **IHDT56GL1**
Generic Name: **MQ4-4411G12**
 Motorola Mobile Devices Business Product Safety & Compliance Laboratory
Laboratory: 600 N. US Highway 45
 Libertyville, Illinois 60048

Report Author: Katerina Royzen
 Engineer

This laboratory is accredited to ISO/IEC 17025-1999 to perform the following tests:

Tests:
 Electromagnetic Specific Absorption Rate

Procedures:
 ANSI / IEEE C95.1-1992, 1999
 (SAR) IEEE C95.3-1991
 IEEE 1528, IEC 62209-1
 FCC OET Bulletin 65 (including Supplements A, B, C)
 Australian Communications Authority Radio
 Communications (Electromagnetic Radiation – Human
 Exposure) Standard 2003
 CENELEC EN 50361 (2001)
 APP-0247
 DOI-0876, 0900, 0902, 0904, 0915

Accreditation:



Simulated Tissue Preparation
 RF Power Measurement

On the following products or types of products:

Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

A2LA certificate #1651-01

Statement of Compliance:

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with CENELEC en50361:2001, IEEE 1528, as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2006

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. Introduction	2
2. Description of the Device Under Test	2
<i>2.1 Antenna description</i>	2
<i>2.2 Device description</i>	2
3. Test Equipment Used	3
<i>3.1 Dosimetric System</i>	3
<i>3.2 Additional Equipment</i>	3
4. Electrical parameters of the tissue simulating liquid	4
5. System Accuracy Verification	5
6. Test Results	6
<i>6.1 Head Adjacent Test Results</i>	6
<i>6.2 Body Worn Test Results</i>	9
References	13
Appendix 1: SAR distribution comparison for system accuracy verification	14
Appendix 2: SAR distribution plots for Phantom Head Adjacent Use	15
Appendix 3: SAR distribution plots for Body Worn Configuration	16
Appendix 4: Probe Calibration Certificate	17
Appendix 5: Measurement Uncertainty Budget	18
Appendix 6: Photographs of the device under test	20
Appendix 7: Dipole Characterization Certificate	25

1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4] and [5]. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1g average set in [3] and 2.0W/kg in a 10g average set in [2].

2. Description of the Device Under Test

2.1 Antenna description

Type	Internal Antenna	
Location	Bottom of the transceiver	
Dimensions	Length	40 mm
	Width	10 mm
Configuration	FJA	

2.2 Device description

Serial number	40270												
Mode(s) of Operation	GSM 850	GSM 900	GSM 1800	GSM 1900	GPRS 850	GPRS 900	GPRS 1800	GPRS 1900	EDGE 850	EDGE 900	EDGE 1800	EDGE 1900	Blue Tooth
Modulation Mode(s)	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	GSMK	8PSK	8PSK	8PSK	8PSK	GFSK
Maximum Output Power Setting	33.00 dBm	33.00 dBm	30.00 dBm	30.00 dBm	33.00 dBm	33.00 dBm	30.00 dBm	30.00 dBm	26.00 dBm	26.00 dBm	25.00 dBm	25.00 dBm	19.00 dBm
Duty Cycle	1:8	1:8	1:8	1:8	2:8	2:8	2:8	2:8	1:8	1:8	1:8	1:8	1:1
Transmitting Frequency Rang(s)	824.2-848.8 MHz	880.2-914.8 MHz	1710.2-1784.8 MHz	1850.20 – 1909.80 MHz	824.2-848.8 MHz	880.2-914.8 MHz	1710.2-1784.8 MHz	1850.20 – 1909.80 MHz	824.2-848.8 MHz	880.2-914.8 MHz	1710.2-1784.8 MHz	1850.20 – 1909.80 MHz	2400 - 2483.5 MHz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype												
Device Category	Portable												
RF Exposure Limits	General Population / Uncontrolled												

3. Test Equipment Used

3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.6) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall 10g RSS uncertainty of the measurement system is ±10.8% (K=1) with an expanded uncertainty of ±21.6% (K=2). The overall 1g RSS uncertainty of the measurement system is ±11.1% (K=1) with an expanded uncertainty of ±22.2% (K=2). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4W/kg to 10W/kg.

The list of calibrated equipment used for the measurements is shown in the following table.

Description	Serial Number	Cal Due Date
DASY4™ DAE V1	SN 376	9/5/2006
E-Field Probe ES3DV3	SN 3037	11/17/2006
Dipole Validation Kit, DV900V2	96	2/6/2006
S.A.M. Phantom used for 800/900MHz	TP-1131	
Dipole Validation Kit, DV1800V2	272	
S.A.M. Phantom used for 1800/1900/2450MHz	TP-1250	
Dipole Validation Kit, DV2450V2	740	1/6/2006

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04632	9/20/2006
Power Meter E4419B	GB39511084	8/19/2006
Power Sensor #1 - E9301A	US39210918	9/21/2006
Power Sensor #2 - E9301A	US39210934	9/21/2006
Network Analyzer HP8753ES	US39171846	8/22/2006
Dielectric Probe Kit HP85070C	US99360070	

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with a HP85070 Dielectric Probe Kit. These values, along with the temperature of the simulated tissue are shown in the table below. The recommended limits for permittivity and conductivity are also shown. A mass density of $\rho=1\text{g/cm}^3$ was entered into the system in all the cases. It can be seen that the measured parameters are within tolerance of the recommended limits specified in [1] and [5].

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (°C)
835	Head	Measured, 3/22/2006	41.4	0.90	20
		Recommended Limits	41.5 ±5%	0.90 ±5%	18-25
	Body	Measured, 3/26/2006	52.9	0.96	19.7
		Recommended Limits	55.2 ±5%	0.97 ±5%	18-25
900	Head	Measured, 3/21/2006	40.2	0.96	20
		Recommended Limits	42.3 ±5%	0.99 ±5%	18-25
	Body	Measured, 3/24/2006	52.4	1.02	20.6
		Recommended Limits	55.0 ±5%	1.05 ±5%	18-25
1750	Head	Measured, 3/21/2006	39.2	1.31	20
		Recommended Limits	40.1 ±5%	1.35 ±5%	18-25
	Body	Measured, 3/23/2006	51.4	1.43	20.2
		Recommended Limits	53.4 ±5%	1.49 ±5%	18-25
1880	Head	Measured, 3/21/2006	38.7	1.45	20
		Recommended Limits	40.0 ±5%	1.40 ±5%	18-25
	Body	Measured, 3/25/2006	50.8	1.57	20.3
		Recommended Limits	53.3 ±5%	1.52 ±5%	18-25
2450	Head	Measured, 3/23/2006	37.4	1.87	20.6
		Recommended Limits	39.2±5%	1.80±5%	18-25
	Body	Measured, 3/23/2006	54.2	2.02	20
		Recommended Limits	52.7±5%	1.95±5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	835MHz / 900 MHz Head	835MHz / 900 MHz Body	1800MHz / 1900 MHz Head	1800 MHz / 1900 MHz Body	2450MHz Head	2450 MHz Body
Sugar	57	44.9	--	--	--	--
DGBE	--	--	47	30.8	--	30
Diacetin	--	--	--	--	51	--
Water	40.45	53.06	52.62	68.8	48.75	70
Salt	1.45	0.94	0.38	0.4	0.15	--
HEC	1	1	--	--	--	--
Bact.	0.1	0.1	--	--	0.1	--

5. System Accuracy Verification

A system accuracy verification of the DASY4™ was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within ±10% from the target SAR indicated in Section 8.3.7 Reference SAR Values in [5] or Appendix 7 for the 900Mhz and/or 2450Mhz target reference SAR value. These tests were done at 900MHz, 1800MHz and 2450Mhz. These frequencies are within ±10% of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted on the same days as the measurement of the DUT. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0cm ±0.5cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

f (MHz)	Description	SAR (W/kg), 1gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ε _r	σ (S/m)		
900	Measured, 3/21/2006	11.15	40.2	0.96	21.1	19.9
	Measured, 3/22/2006	11.43	40.6	0.97	21.1	19.9
	Measured, 3/24/2006	11.05	40.7	0.96	20.8	20.5
	Measured, 3/26/2006	11.58	42.5	0.99	20.8	20.1
	Recommended Limits	11.3	41.5 ±5%	0.97 ±5%	18-25	18-25
1800	Measured, 3/21/2006	39.20	39.4	1.36	21.1	19.6
	Measured, 3/23/2006	39.85	38.6	1.37	21.1	19.7
	Measured, 3/25/2006	38.23	40.0	1.34	20.8	20.1
	Recommended Limits	38.1	40.0 ±5%	1.4 ±5%	18-25	18-25
2450	Measured, 3/23/2006	61.25	37.4	1.87	21.1	20.6
	Recommended Limits	57.6	39.2 ±5%	1.80 ±5%	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	SN 3037	900	6.07	8 of 9
		1810	5.01	8 of 9
		2450	4.31	8 of 9

6. Test Results

The test sample was operated using an actual transmission through a base station simulator. The base station simulator was setup to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in [1], [4] and [5]. The phone was positioned into these configurations using the device holder supplied with the DASY4™ SAR measurement system. The measured dielectric constant of the material used for the device holder is less than 2.9 and the loss tangent is less than 0.02 (± 30%) at 850MHz. The default settings for the “coarse” and “cube” scans were chosen and used for measurements. The grid spacing of the course scan was set to 15cm as shown in the SAR plots included in Appendix 2 and 3. Please refer to the DASY manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone model covered by this report has the following battery options:
 Model #1 – SNN5696B – 710 mAH Battery

This battery was used to do all of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery.

6.1 Head Adjacent Test Results

The SAR results shown in tables 1 through 4 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output powers, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0cm ±0.5cm.

The following probe conversion factors were used on the E-Field probe(s) used for the head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	SN 3037	900	6.07	8 of 9
		1810	5.01	8 of 9
		2450	4.31	8 of 9

Left Head Cheek Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	20	-0.034	0.342	0.34	0.583	0.59
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	20	-0.027	0.162	0.16	0.305	0.31
	Channel 810	29.97						
2450MHz	N/A	19.00	20.6	-0.063	0.011	0.01	0.024	0.02

Table 1: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	20	0.057	0.24	0.24	0.401	0.40
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	20	0.053	0.137	0.14	0.226	0.23
	Channel 810	29.97						
2450MHz	N/A	19.00	20.6	0.393	0.00501	0.01	0.011	0.01

Table 2: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Left Head 15° Tilt Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	20	0.055	0.201	0.20	0.265	0.27
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	20	0.064	0.0427	0.04	0.0732	0.07
	Channel 810	29.97						
2450MHz	N/A	19.00	20	-0.020	0.00293	0.00	0.00774	0.01

Table 3: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

Right Head 15° Tilt Position								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	20	0.023	0.230	0.23	0.305	0.31
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	20	0.042	0.071	0.07	0.117	0.12
	Channel 810	29.97						
2450MHz	N/A	19.00	20	0.229	0.00449	0.00	0.00993	0.01

Table 4: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

6.2 Body Worn Test Results

The SAR results shown in tables 5 through 9 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output powers, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0mm. It measures 52.7cm(long) x 26.7cm(wide) x 21.2cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184GHz.

The tissue stimulant depth was verified to be 15.0cm ±0.5cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories’, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. In addition to accessory testing, the cellular phone was tested with the front and back of the phone facing the phantom. For voice mode operation, the phone was placed as a distance of 15mm from the phantom. For data mode operation, the phone was placed as a distance of 25mm from the phantom. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There is one Body-Worn Accessories available for this phone:
Black Leather Case model #CHYN4647A

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6	SN1102	900	5.93	8 of 9
		1810	4.65	8 of 9
		2450	4.30	8 of 9

Body-Worn; Front of Phone 15mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	19.7	-0.256	0.173	0.18	0.248	0.26
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	20	0.003	0.094	0.09	0.157	0.16
	Channel 810	29.97						
2400MHz	N/A	19.00	20	0.619	0.001	0.00	0.005	0.01
850MHz + 2400MHz	N/A	N/A	summation of the maximum GSM and Bluetooth extrapolated SAR values in each band			0.18		0.27
1900MHz + 2400MHz	N/A	N/A				0.09		0.17

Table 5: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Back of Phone 15mm from Phantom								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	19.7	-0.035	0.243	0.24	0.351	0.35
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	20	-0.056	0.093	0.09	0.15	0.15
	Channel 810	29.97						
2400MHz	N/A	19.00	20	-0.420	0.00352	0.00	0.00967	0.01
850MHz + 2400MHz	N/A	N/A	summation of the maximum GSM and Bluetooth extrapolated SAR values in each band			0.24		0.36
1900MHz + 2400MHz	N/A	N/A				0.09		0.16

Table 6: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Highest Body 25mm from Phantom (GPRS Class 10)								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
GPRS 850MHz	Channel 128	32.87						
	Channel 190	32.92	19.7	-0.020	0.141	0.14	0.195	0.20
	Channel 251	32.91						
GPRS 1900MHz	Channel 512	29.99						
	Channel 661	29.90	20.1	0.101	0.071	0.07	0.114	0.11
	Channel 810	29.97						
Bluetooth 2400MHz	N/A	19.00	20	0.580	0.000	0.00	0.000	0.00
850MHz + 2400MHz	N/A	N/A	summation of the maximum GPRS and Bluetooth extrapolated SAR values in each band			0.14		0.20
1900MHz + 2400MHz	N/A	N/A				0.07		0.11

Table 7: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Highest Body 25mm from Phantom (EDGE Class 10)								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10g SAR value		1g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
EDGE 850MHz	Channel 128	25.99						
	Channel 190	26.09	19.7	0.391	0.129	0.13	0.178	0.18
	Channel 251	26.06						
EDGE 1900MHz	Channel 512	25.05						
	Channel 661	25.04	20.1	-0.021	0.033	0.03	0.053	0.05
	Channel 810	24.99						
Bluetooth 2400MHz	N/A	19.00	20	0.580	0.000	0.00	0.000	0.00
850MHz + 2400MHz	N/A	N/A	summation of the maximum EDGE and Bluetooth extrapolated SAR values in each band			0.13		0.18
1900MHz + 2400MHz	N/A	N/A				0.03		0.05

Table 8: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Highest Body with CHYN4647A Accessory								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10g SAR value</i>		<i>1g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850MHz	Channel 128	32.87						
	Channel 190	32.92	19.1	0.019	0.288	0.29	0.434	0.43
	Channel 251	32.91						
1900MHz	Channel 512	29.99						
	Channel 661	29.90	19.9	-0.032	0.205	0.21	0.350	0.35
	Channel 810	29.97						
2400MHz	N/A	19.00	19.9	-0.294	0.000	0.00	0.000	0.00
850MHz + 2400MHz	N/A	N/A	summation of the maximum GSM and Bluetooth extrapolated SAR values in each band			0.29		0.43
1900MHz + 2400MHz	N/A	N/A				0.21		0.35

Table 9: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

References

- [1] CENELEC, en50361:2001 “Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz – 3GHz)”
- [2] CENELEC, en50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300MHz – 3GHz)”.
- [3] ANSI / IEEE, C95.1 1999 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 3/21/2006 8:31:55 AM

Test Laboratory: Motorola

032106 900MHz good -1.3%

DUT: Dipole 900 MHz; Type: D900V2; Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 096; PM1 Power = 200mW; Sim.Temp@ meas = 19.9°C; Sim.Temp@ SPC = 19.9°C; Room Temp@ SPC = 21.1°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(6.07, 6.07, 6.07); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Sugar Water SAM; Type: SAM; Serial: TP-1131;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.13 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 50.9 V/m; Power Drift = 0.000 dB
Peak SAR (extrapolated) = 3.37 W/kg
SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.42 mW/g
Maximum value of SAR (measured) = 2.40 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 50.9 V/m; Power Drift = 0.000 dB
Peak SAR (extrapolated) = 3.41 W/kg
SAR(1 g) = 2.24 mW/g; SAR(10 g) = 1.43 mW/g
Maximum value of SAR (measured) = 2.43 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

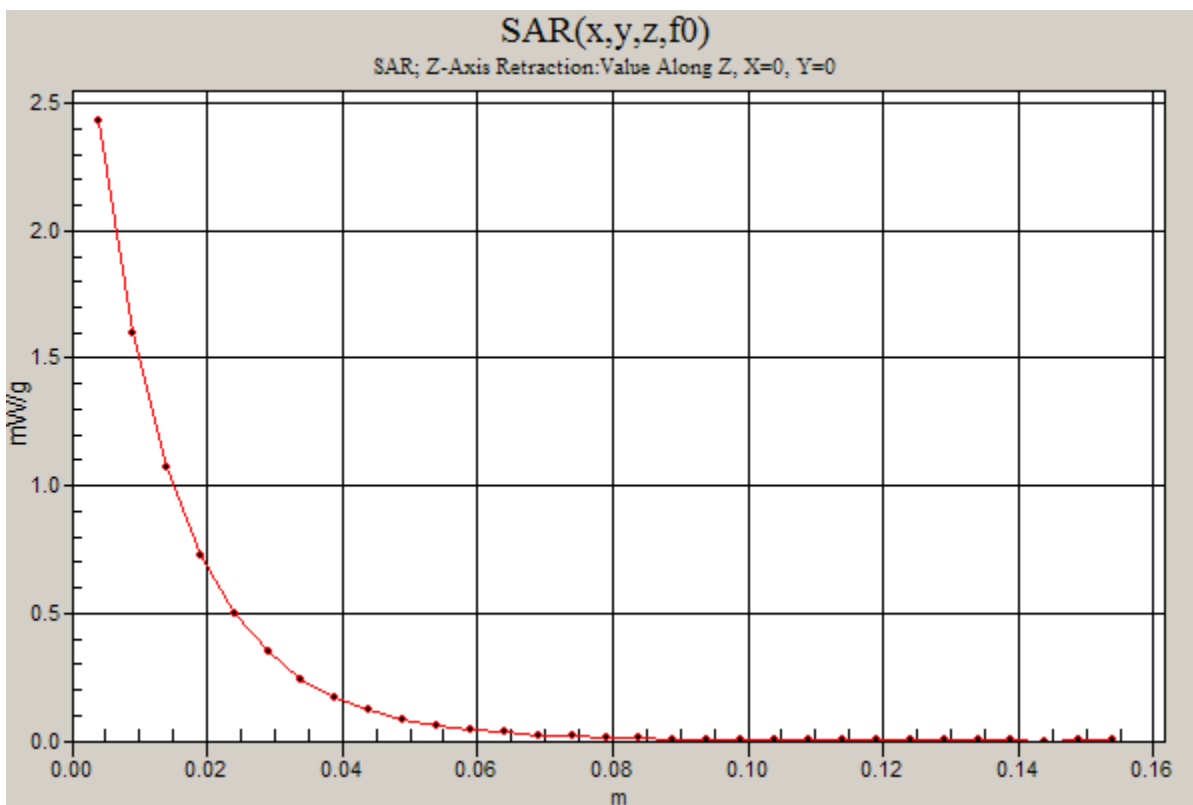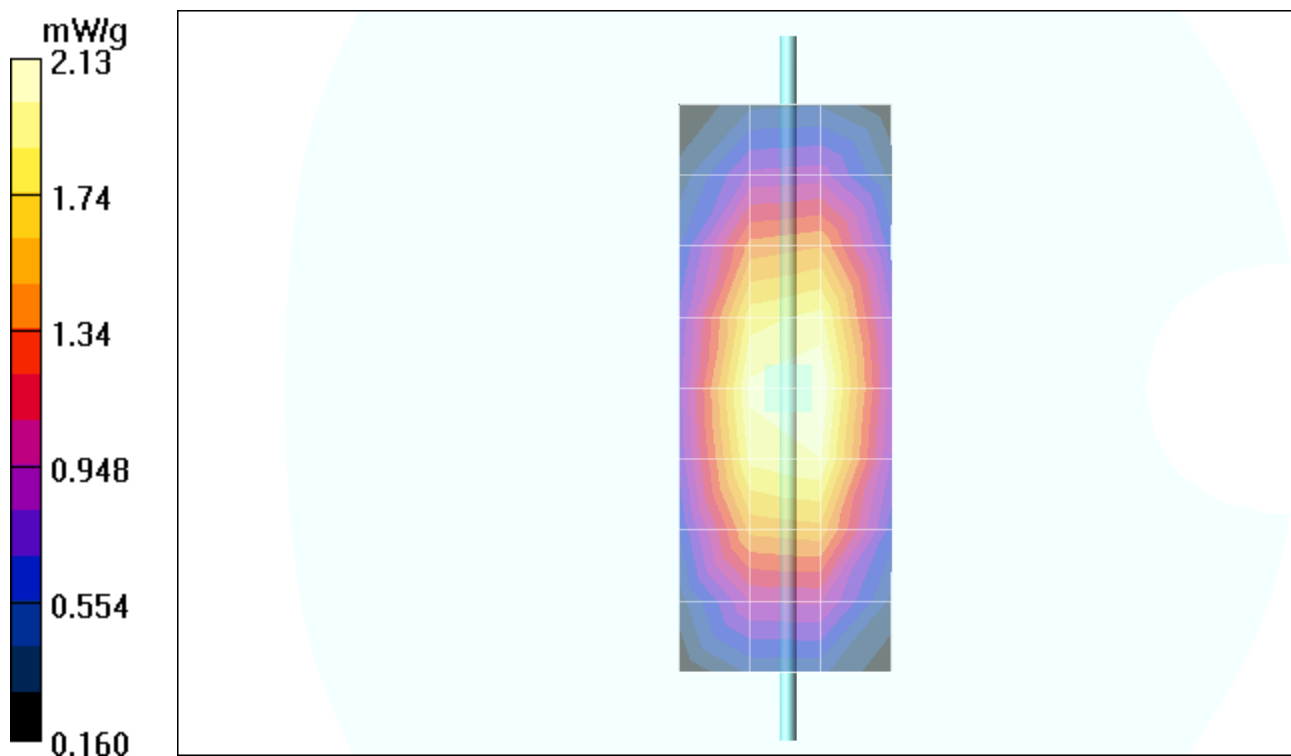

Date/Time: 3/21/2006 8:04:32 AM

Test Laboratory: Motorola

032106 1800 MHz good +2.9%

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272TR; PM1 Power = 200mW; Sim.Temp@ meas = 20.1*C; Sim.Temp@ SPC = 19.6*C; Room Temp@ SPC = 21.1*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(5.01, 5.01, 5.01); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 7.70 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 79.8 V/m; Power Drift = 0.066 dB
Peak SAR (extrapolated) = 13.8 W/kg
SAR(1 g) = 7.87 mW/g; SAR(10 g) = 4.18 mW/g
Maximum value of SAR (measured) = 8.76 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 79.8 V/m; Power Drift = 0.066 dB
Peak SAR (extrapolated) = 13.8 W/kg
SAR(1 g) = 7.81 mW/g; SAR(10 g) = 4.12 mW/g
Maximum value of SAR (measured) = 8.80 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 9.03 mW/g

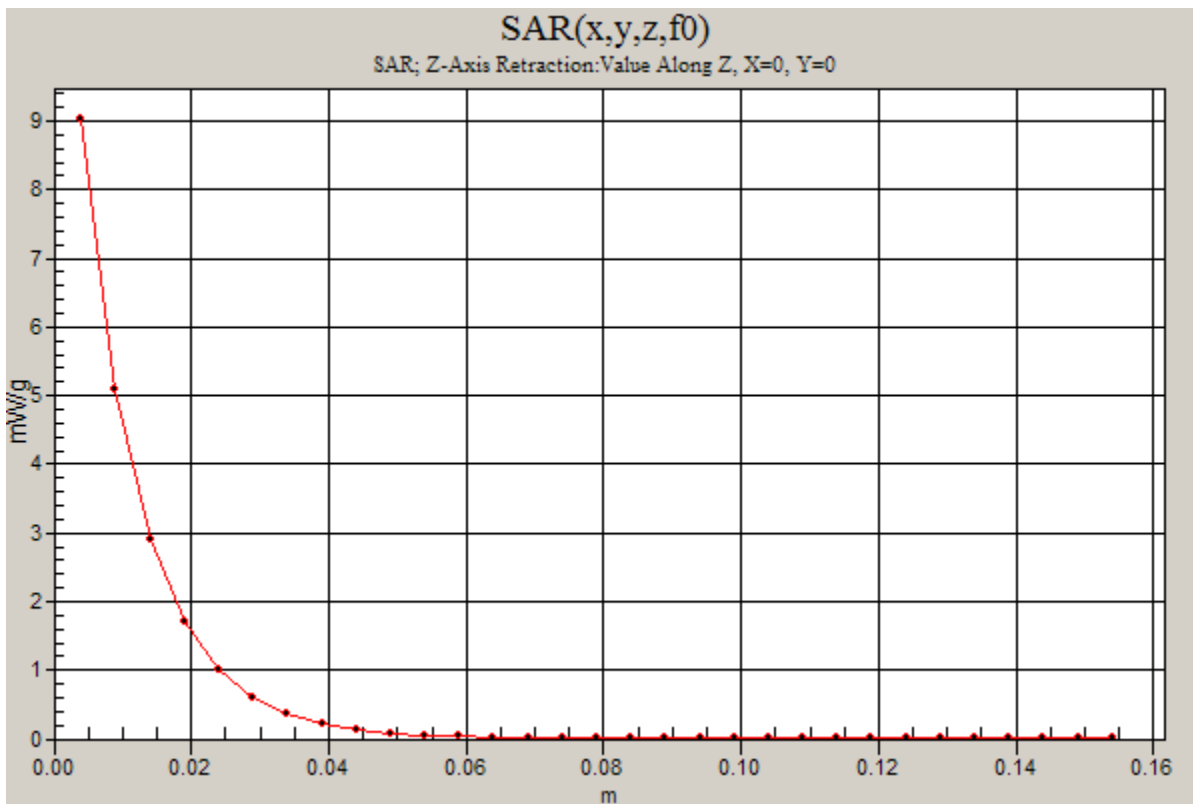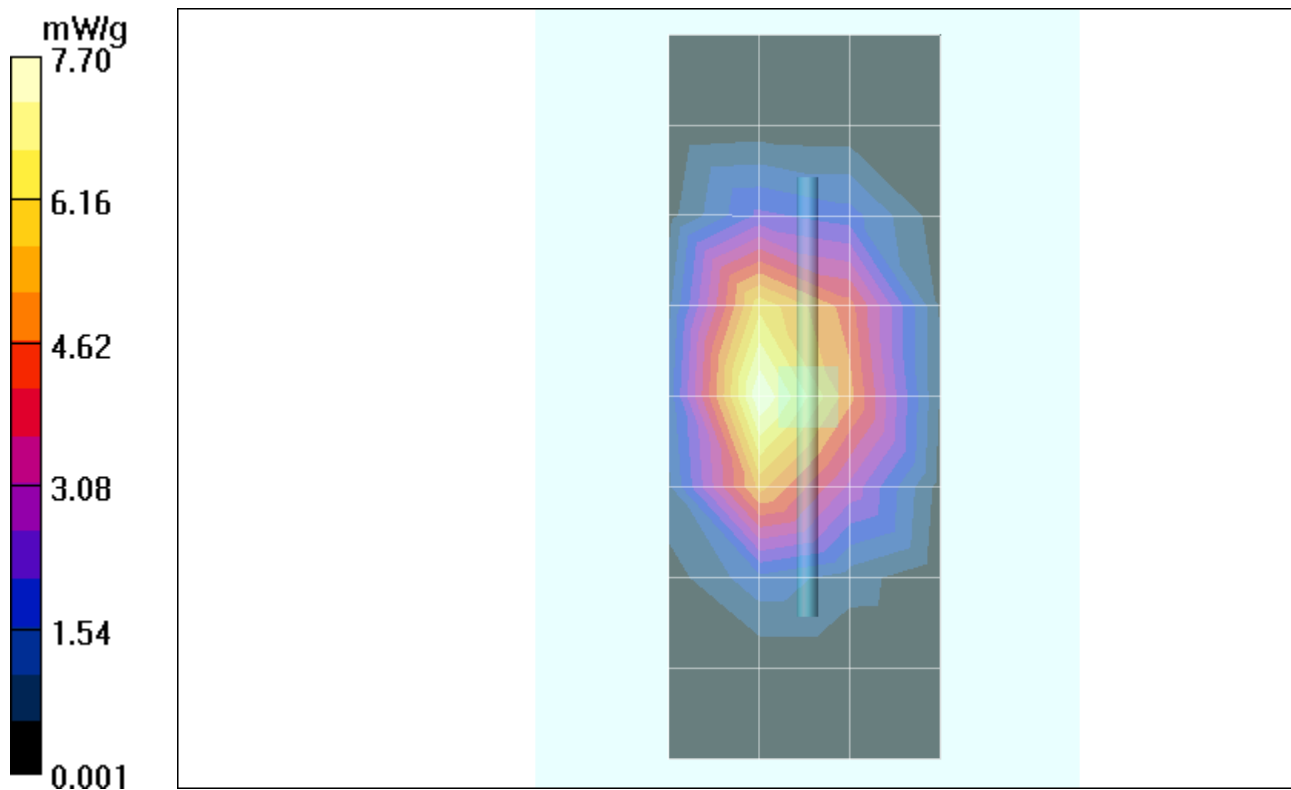

Date/Time: 3/22/2006 8:47:16 AM

Test Laboratory: Motorola

032206 900MHz good +1.1%

DUT: Dipole 900 MHz; Type: D900V2; Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 096; PM1 Power = 200mW; Sim.Temp@ meas = 19.9°C; Sim.Temp@ SPC = 19.9°C; Room Temp@ SPC = 21.1°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 900$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(6.07, 6.07, 6.07); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Sugar Water SAM; Type: SAM; Serial: TP-1131;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.18 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.2 V/m; Power Drift = -0.031 dB
Peak SAR (extrapolated) = 3.47 W/kg
SAR(1 g) = 2.28 mW/g; SAR(10 g) = 1.46 mW/g
Maximum value of SAR (measured) = 2.47 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.2 V/m; Power Drift = -0.031 dB
Peak SAR (extrapolated) = 3.47 W/kg
SAR(1 g) = 2.29 mW/g; SAR(10 g) = 1.47 mW/g
Maximum value of SAR (measured) = 2.46 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

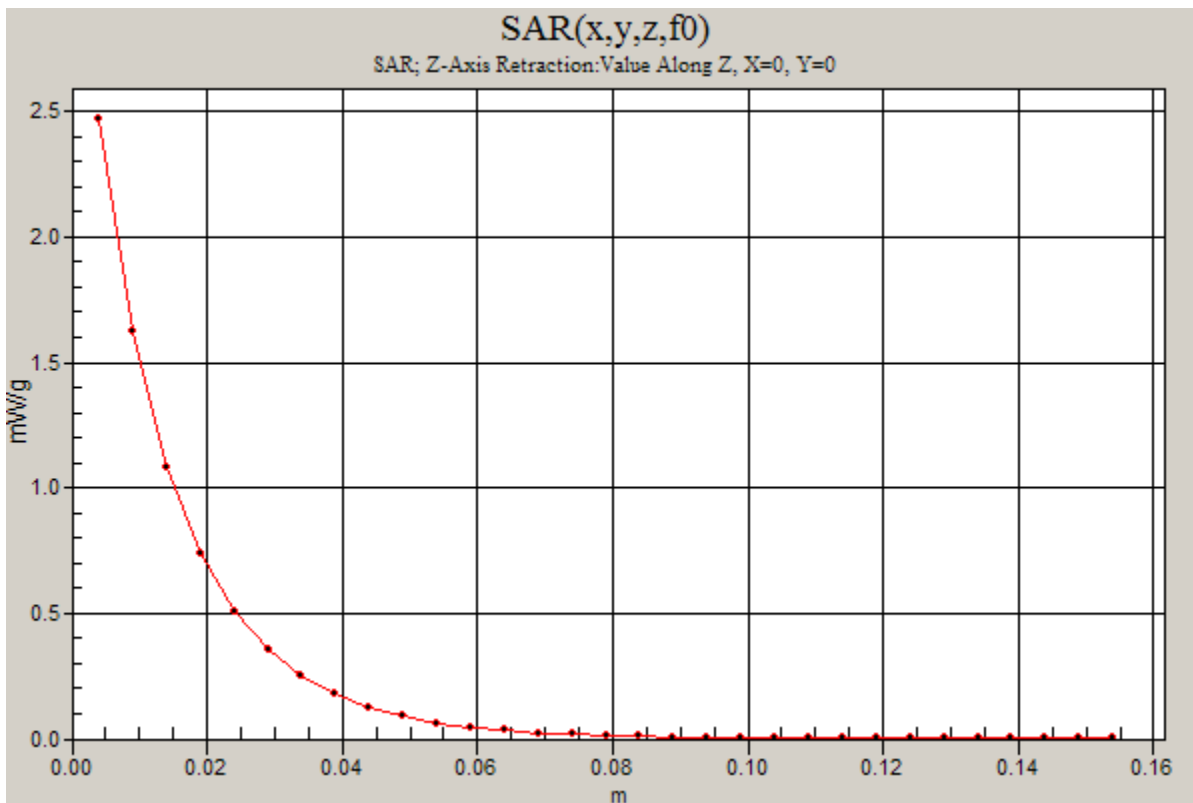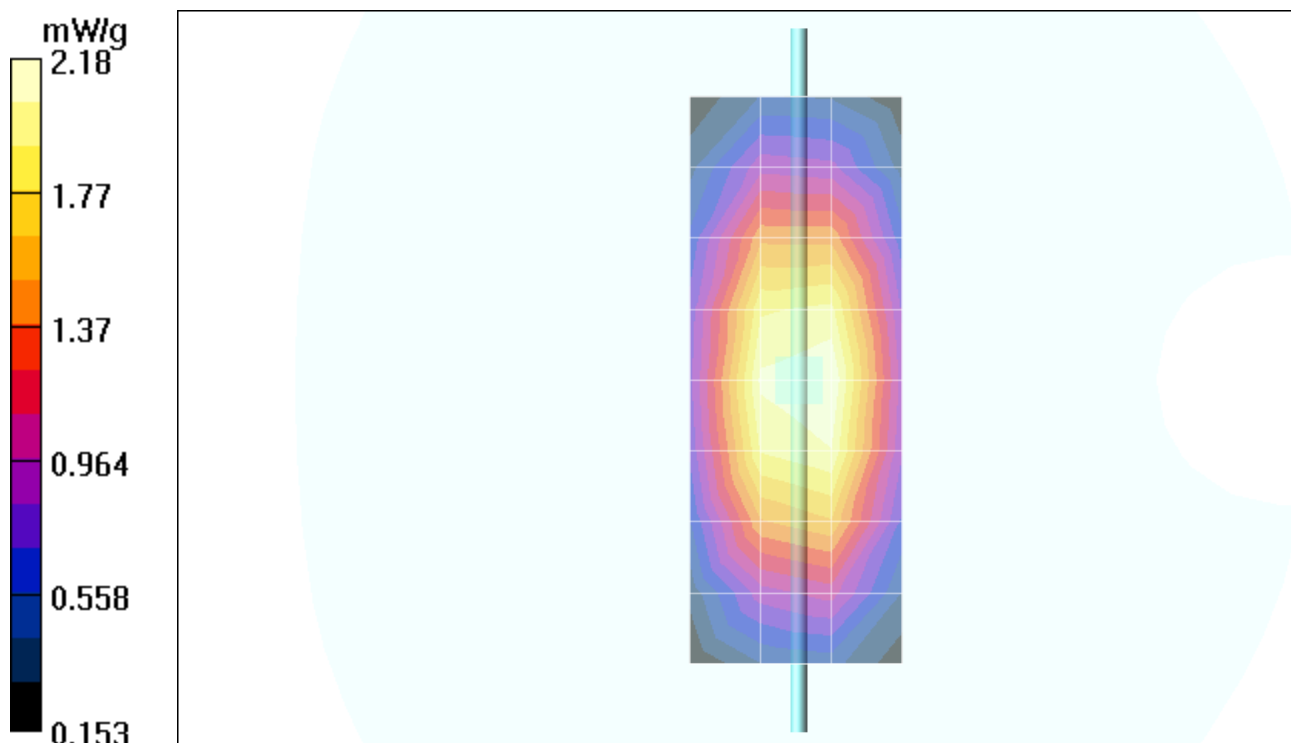

Date/Time: 3/23/2006 8:24:58 AM

Test Laboratory: Motorola

032306 1800 MHz good +4.6%

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272TR; PM1 Power = 200mW; Sim.Temp@ meas = 19.9°C; Sim.Temp@ SPC = 19.7°C; Room Temp@ SPC = 21.1°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(5.01, 5.01, 5.01); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 8.15 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 78.7 V/m; Power Drift = -0.050 dB
Peak SAR (extrapolated) = 14.0 W/kg
SAR(1 g) = 7.95 mW/g; SAR(10 g) = 4.21 mW/g
Maximum value of SAR (measured) = 8.91 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 78.7 V/m; Power Drift = -0.050 dB
Peak SAR (extrapolated) = 14.1 W/kg
SAR(1 g) = 7.99 mW/g; SAR(10 g) = 4.23 mW/g
Maximum value of SAR (measured) = 8.99 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.89 mW/g

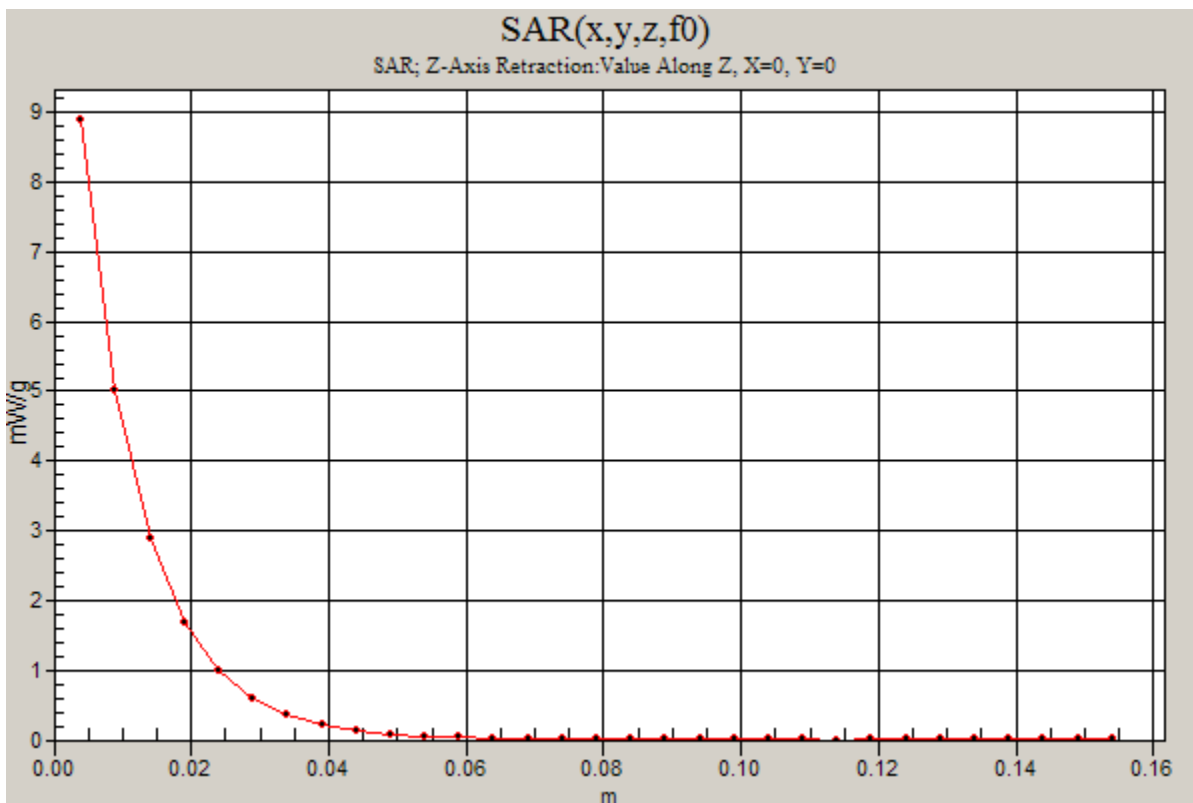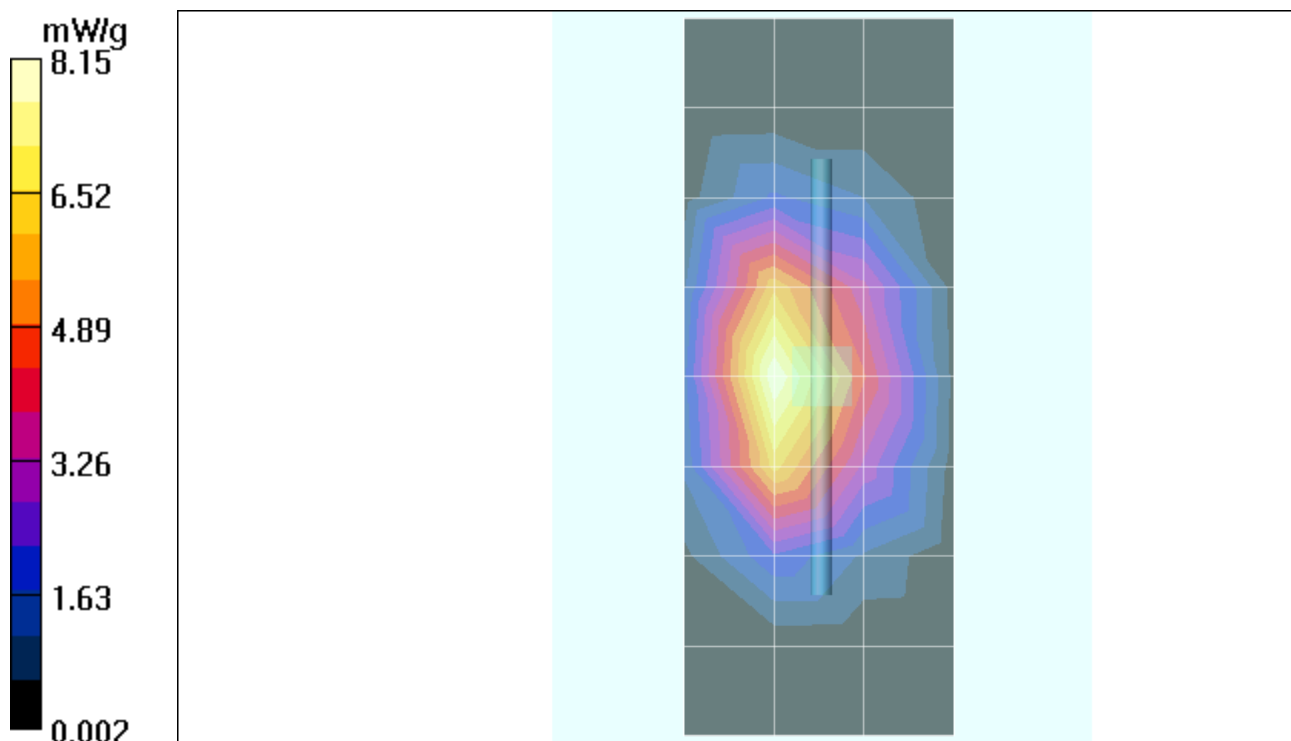

Date/Time: 3/23/2006 1:17:16 PM

Test Laboratory: Motorola

032306 2450 MHz good +7.8 open%

DUT: Dipole 2450 MHz; Type: D2450V2;

Procedure Notes: 2450 MHz System Performance Check / Dipole Sn# 740; PM1 Power = 200mW
Sim.Temp@ meas = 20.6°C; Sim.Temp@ SPC = 20.6°C; Room Temp@ SPC = 21.1°C

Communication System: CW - Dipole; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(4.31, 4.31, 4.31); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 10.5 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 85.0 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 26.3 W/kg; SAR(1 g) = 12.2 mW/g; SAR(10 g) = 5.56 mW/g

Maximum value of SAR (measured) = 13.7 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm; Reference Value = 85.0 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 26.4 W/kg; SAR(1 g) = 12.3 mW/g; SAR(10 g) = 5.61 mW/g

Maximum value of SAR (measured) = 13.9 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

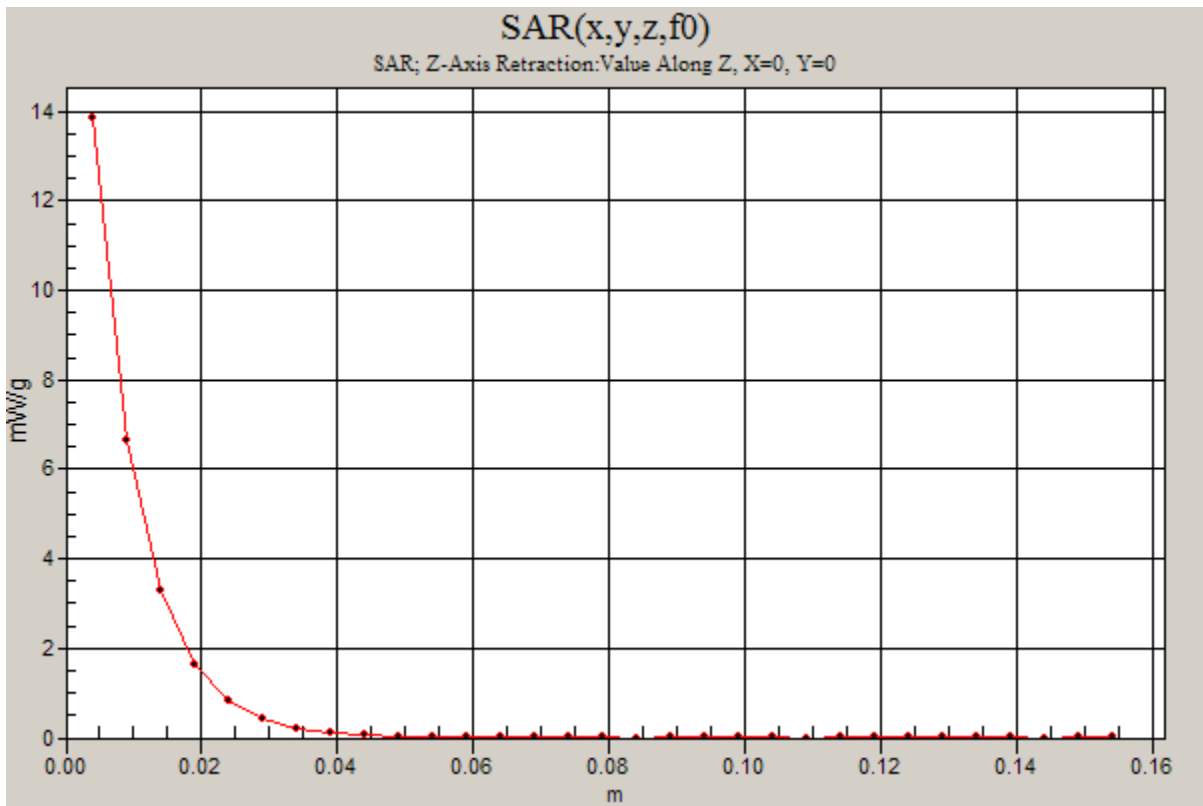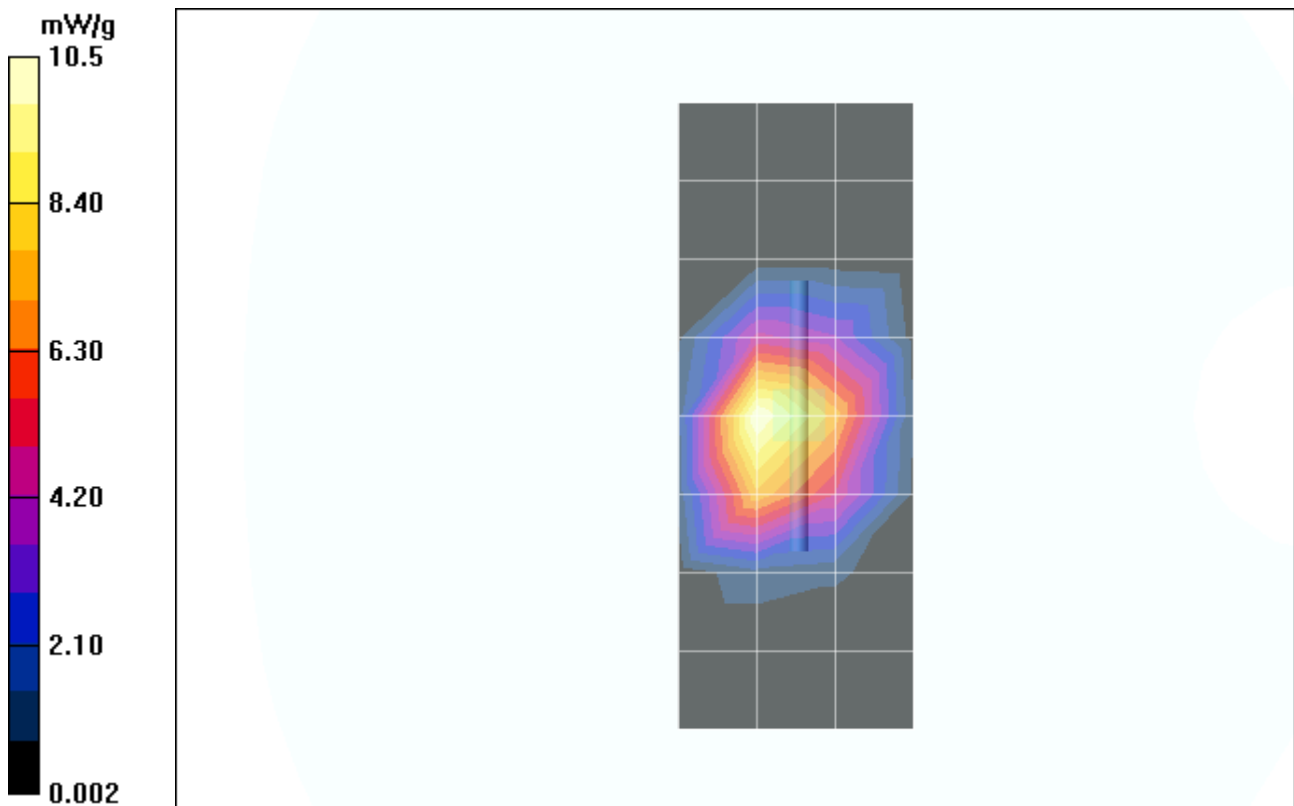

Date/Time: 3/24/2006 8:58:29 AM

Test Laboratory: Motorola

032406 900MHz good -2.2%

DUT: Dipole 900 MHz; Type: D900V2; Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 096; PM1 Power = 200mW; Sim.Temp@ meas = 20.5°C; Sim.Temp@ SPC = 20.5°C; Room Temp@ SPC = 20.8°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(6.07, 6.07, 6.07); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Sugar Water SAM; Type: SAM; Serial: TP-1131;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.10 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 50.6 V/m; Power Drift = 0.070 dB
Peak SAR (extrapolated) = 3.31 W/kg
SAR(1 g) = 2.2 mW/g; SAR(10 g) = 1.41 mW/g
Maximum value of SAR (measured) = 2.39 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 50.6 V/m; Power Drift = 0.070 dB
Peak SAR (extrapolated) = 3.35 W/kg
SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.42 mW/g
Maximum value of SAR (measured) = 2.36 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 2.41 mW/g

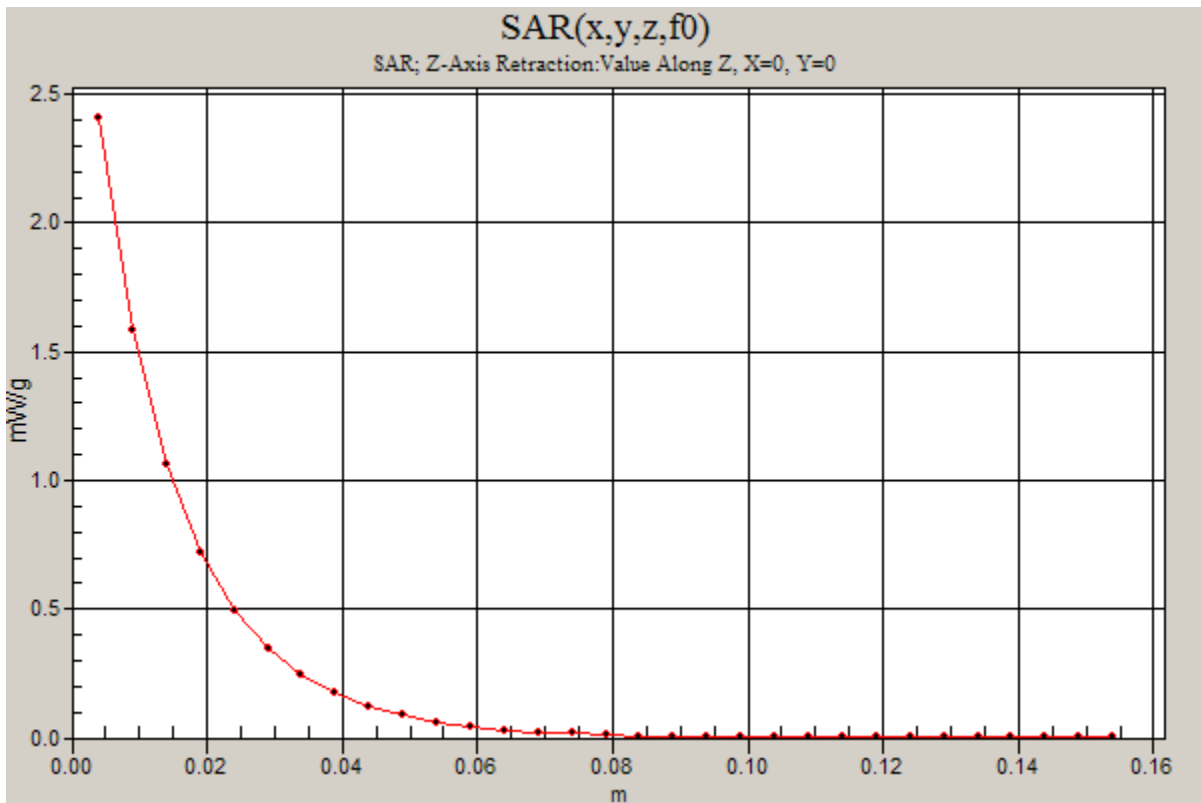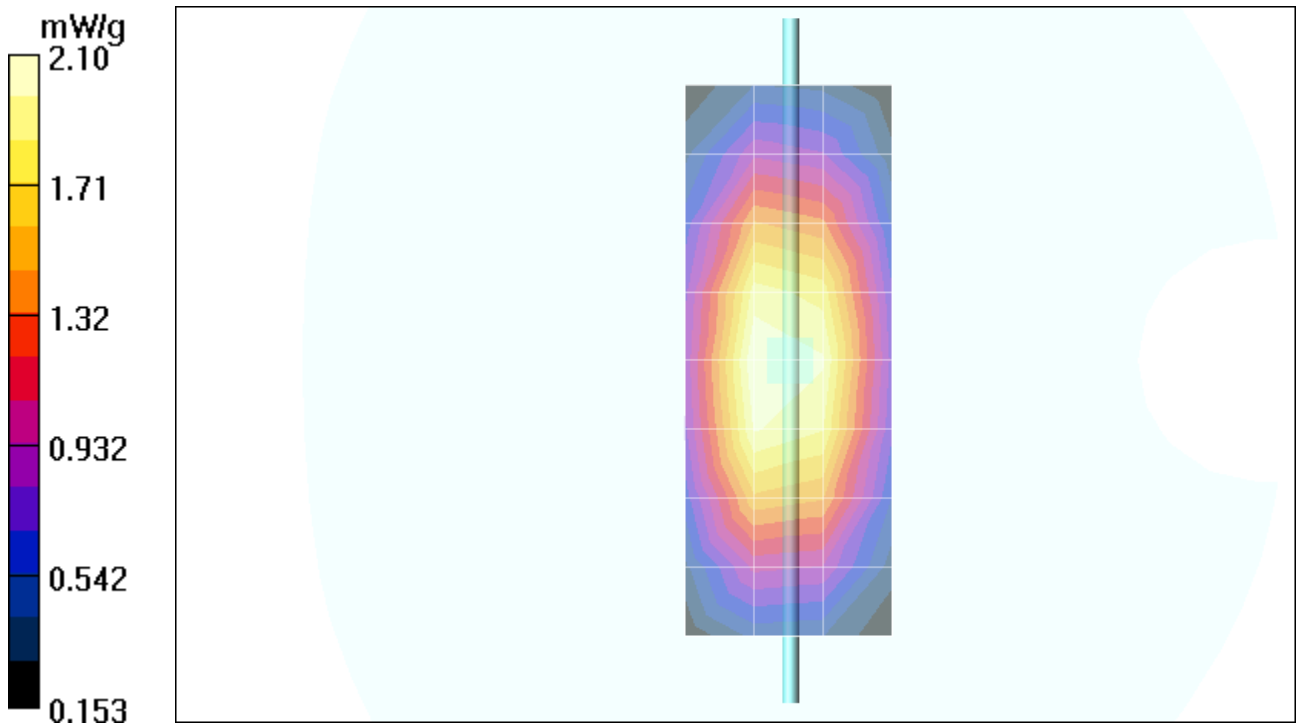

Date/Time: 3/25/2006 7:46:32 AM

Test Laboratory: Motorola

032506 1800 MHz good +0.3%

DUT: Dipole 1800 MHz; Type: D1800V2; Procedure Notes: 1800 MHz System Performance Check / Dipole Sn# 272TR; PM1 Power = 200mW; Sim.Temp@ meas = 20.1*C; Sim.Temp@ SPC = 20.1*C; Room Temp@ SPC = 20.8*C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(5.01, 5.01, 5.01); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 7.66 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 77.7 V/m; Power Drift = -0.009 dB
Peak SAR (extrapolated) = 13.4 W/kg
SAR(1 g) = 7.61 mW/g; SAR(10 g) = 4.05 mW/g
Maximum value of SAR (measured) = 8.44 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 77.7 V/m; Power Drift = -0.009 dB
Peak SAR (extrapolated) = 13.5 W/kg
SAR(1 g) = 7.68 mW/g; SAR(10 g) = 4.09 mW/g
Maximum value of SAR (measured) = 8.40 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.64 mW/g

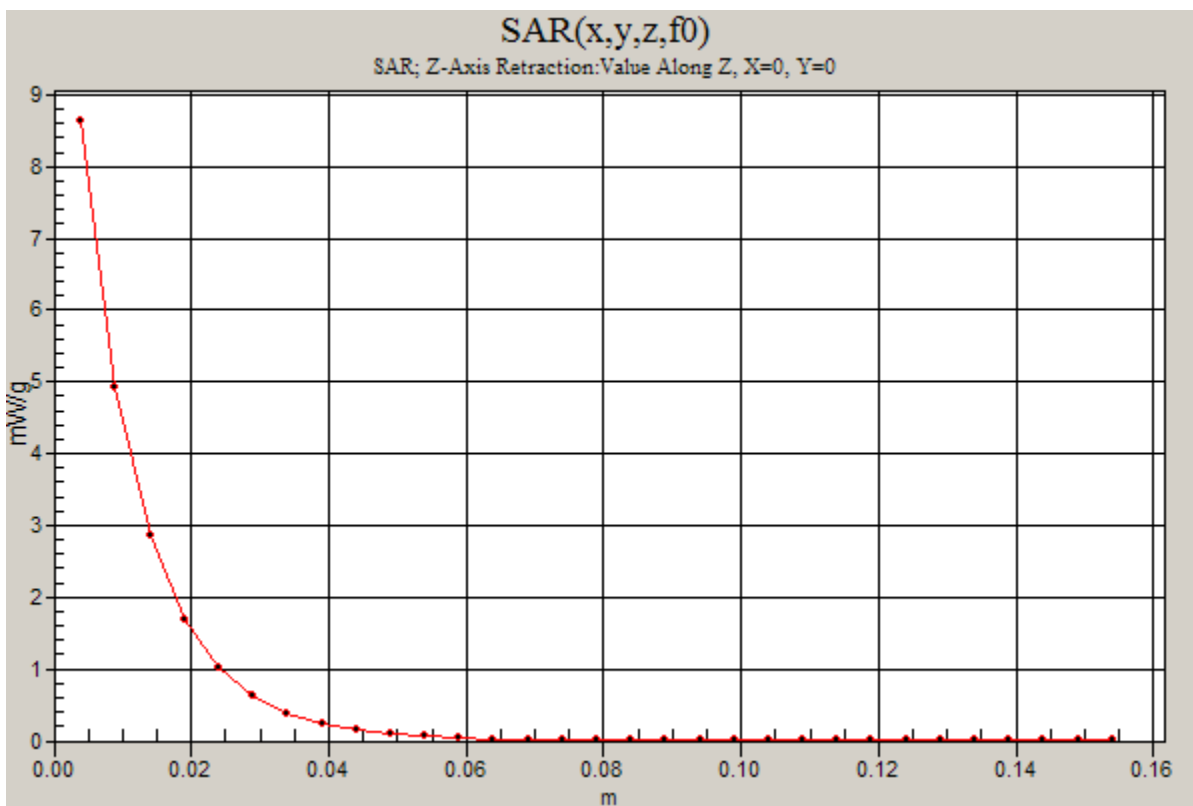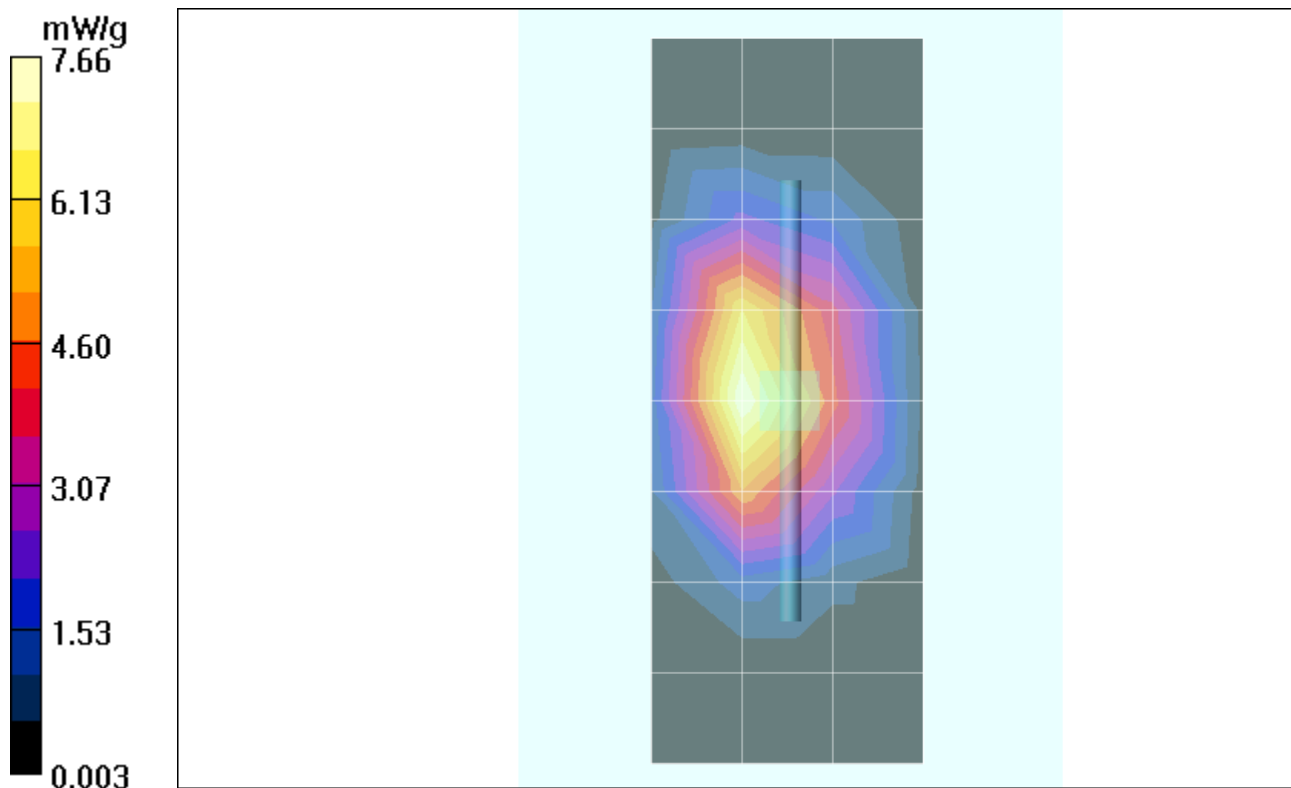

Date/Time: 3/26/2006 11:31:48 AM

Test Laboratory: Motorola

032606 900MHz good +2.4%

DUT: Dipole 900 MHz; Type: D900V2; Procedure Notes: 900 MHz System Performance Check / Dipole Sn# 096; PM1 Power = 200mW; Sim.Temp@ meas = 20°C; Sim.Temp@ SPC = 20.1°C; Room Temp@ SPC = 20.8°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1
Medium: VALIDATION Only; Medium parameters used: $f = 900$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(6.07, 6.07, 6.07); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Sugar Water SAM; Type: SAM; Serial: TP-1131;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.19 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.0 V/m; Power Drift = -0.010 dB
Peak SAR (extrapolated) = 3.52 W/kg
SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.48 mW/g
Maximum value of SAR (measured) = 2.51 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 51.0 V/m; Power Drift = -0.010 dB
Peak SAR (extrapolated) = 3.53 W/kg
SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.49 mW/g
Maximum value of SAR (measured) = 2.50 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

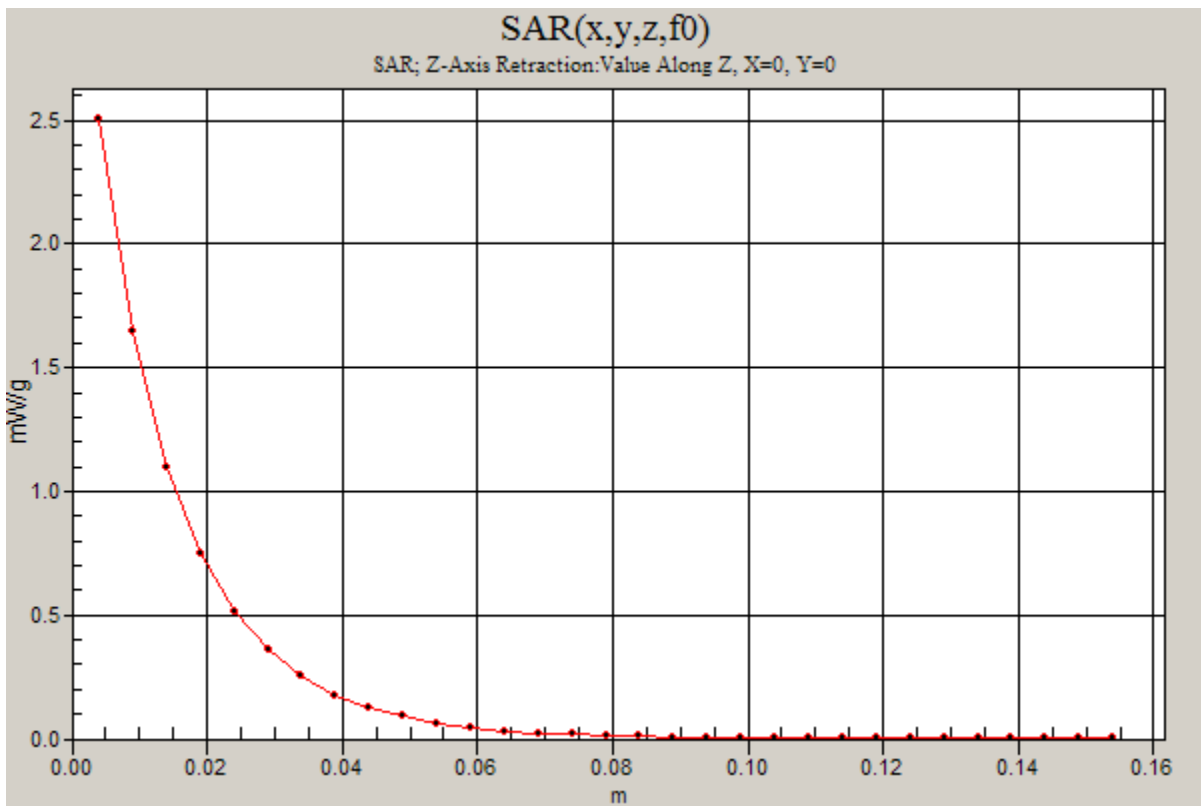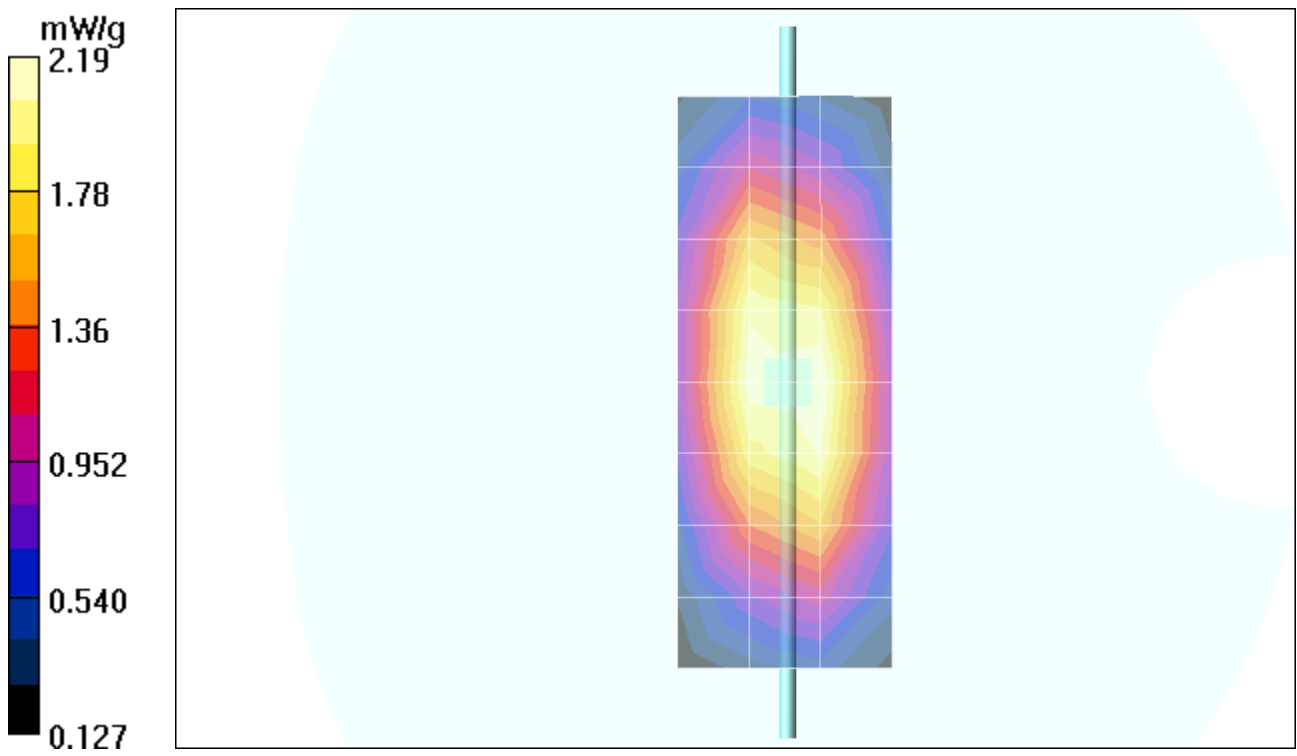

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 3/22/2006 9:34:31 AM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: 5; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5696B; DEVICE POSITION: CHEEK; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³ ; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(6.07, 6.07, 6.07); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Sugar Water SAM; Type: SAM; Serial: TP-1131;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.627 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 23.8 V/m; Power Drift = -0.034 dB; Peak SAR (extrapolated) = 1.26 W/kg; **SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.342 mW/g;** Maximum value of SAR (measured) = 0.665 mW/g

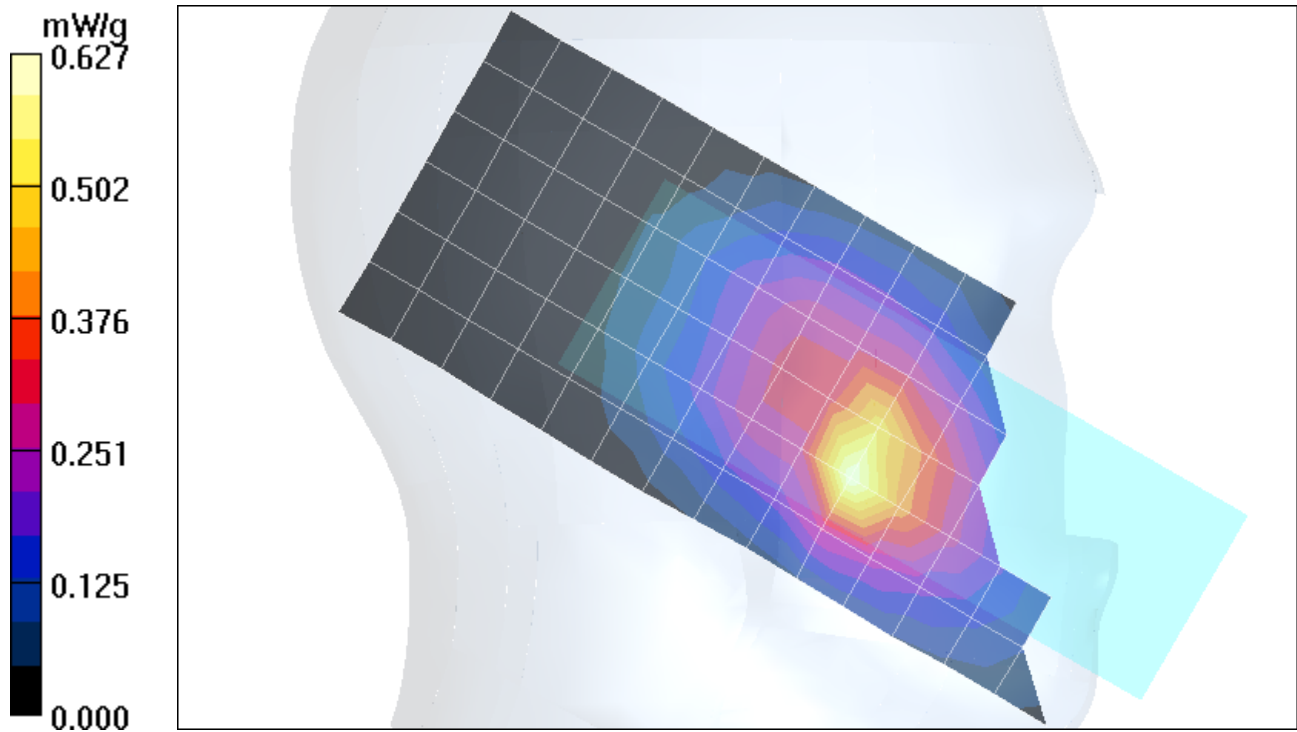

Date/Time: 3/22/2006 11:07:34 AM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: 5; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5696B; DEVICE POSITION: TILT; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Head; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(6.07, 6.07, 6.07); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Sugar Water SAM; Type: SAM; Serial: TP-1131;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.306 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 18.9 V/m; Power Drift = 0.023 dB; Peak SAR (extrapolated) = 0.388 W/kg; **SAR(1 g) = 0.305 mW/g**; **SAR(10 g) = 0.230 mW/g**; Maximum value of SAR (measured) = 0.320 mW/g

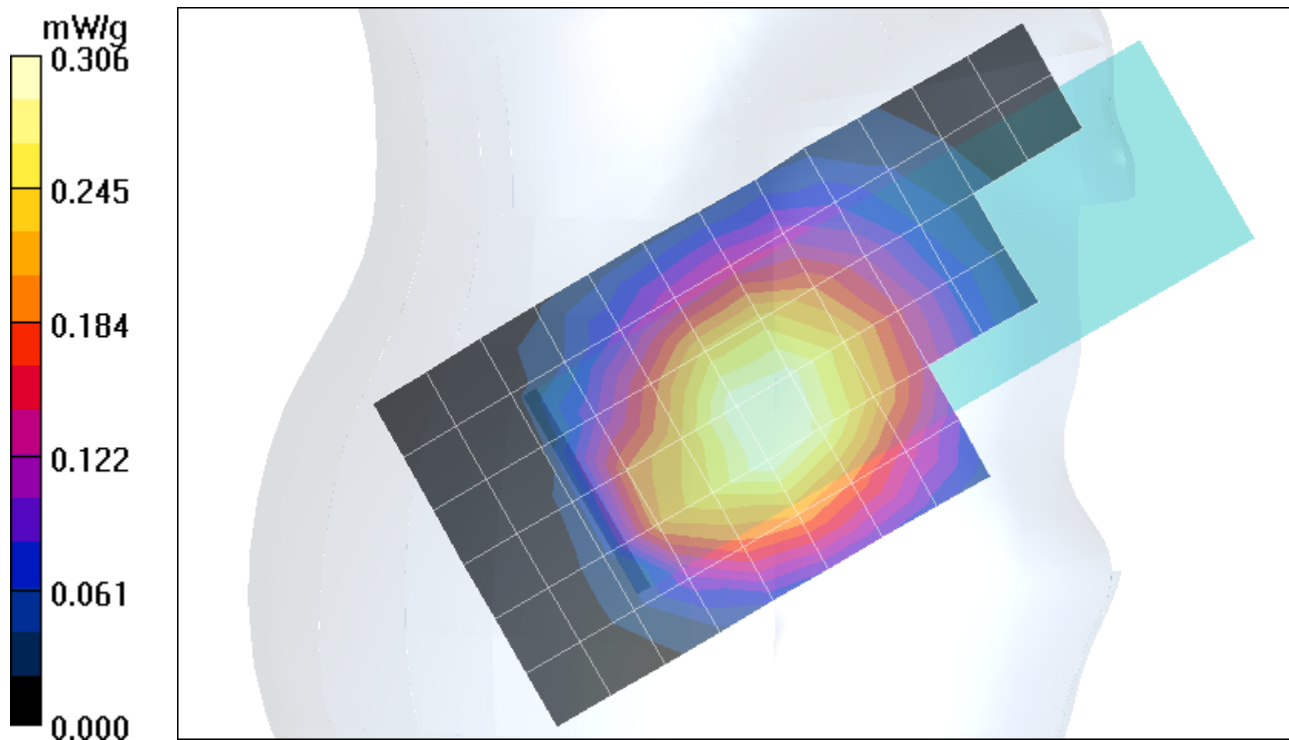

Date/Time: 3/21/2006 10:44:30 AM

Test Laboratory: Motorola


Serial: 40270; Procedure Notes: Pwr Step: 0; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5696B; DEVICE POSITION: CHEEK; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Back-Up Glycol Head; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(5.01, 5.01, 5.01); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.270 mW/g

Left Head Template/Zoom Scan - to correct max outside (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 11.7 V/m; Power Drift = -0.027 dB; Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.162 mW/g; Maximum value of SAR (measured) = 0.343 mW/g

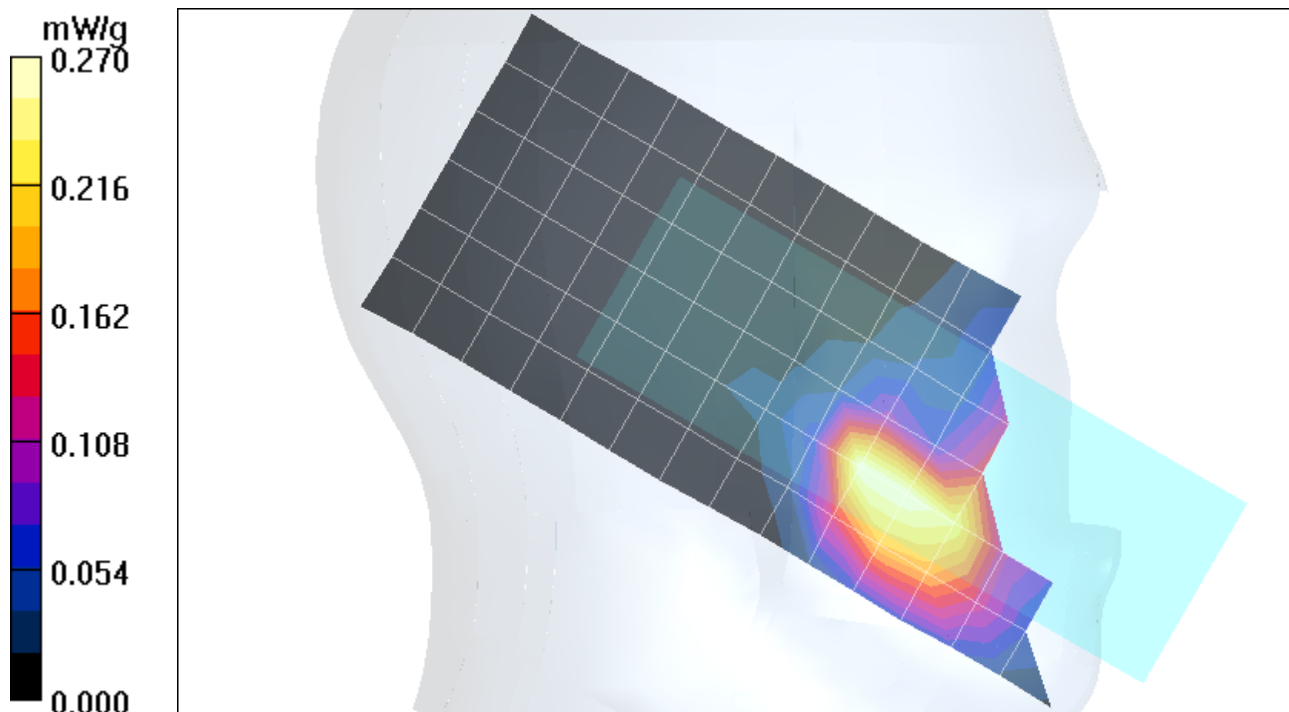

Date/Time: 3/21/2006 2:56:55 PM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: 0; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5696B; DEVICE POSITION: TILT; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Back-Up Glycol Head; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(5.01, 5.01, 5.01); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.116 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 9.09 V/m; Power Drift = 0.042 dB; Peak SAR (extrapolated) = 0.188 W/kg; **SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.071 mW/g**
Maximum value of SAR (measured) = 0.131 mW/g

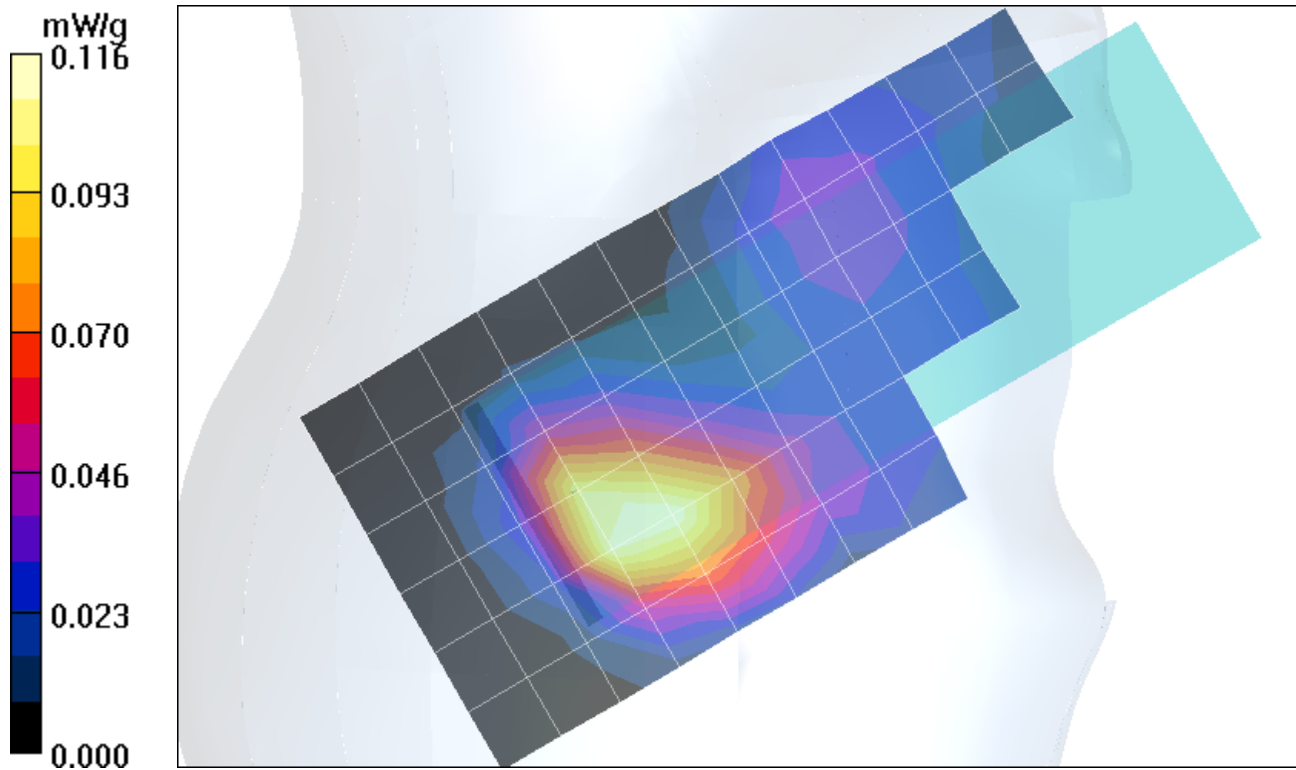

Date/Time: 3/23/2006 1:57:54 PM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: hopping; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5696B; DEVICE POSITION: CHEEK; Communication System: Bluetooth; Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1; Medium: 2450 Glycol Head; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³ ; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(4.31, 4.31, 4.31); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.026 mW/g

Left Head Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 3.12 V/m; Power Drift = -0.063 dB; Peak SAR (extrapolated) = 0.047 W/kg; **SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.011 mW/g**
Maximum value of SAR (measured) = 0.028 mW/g

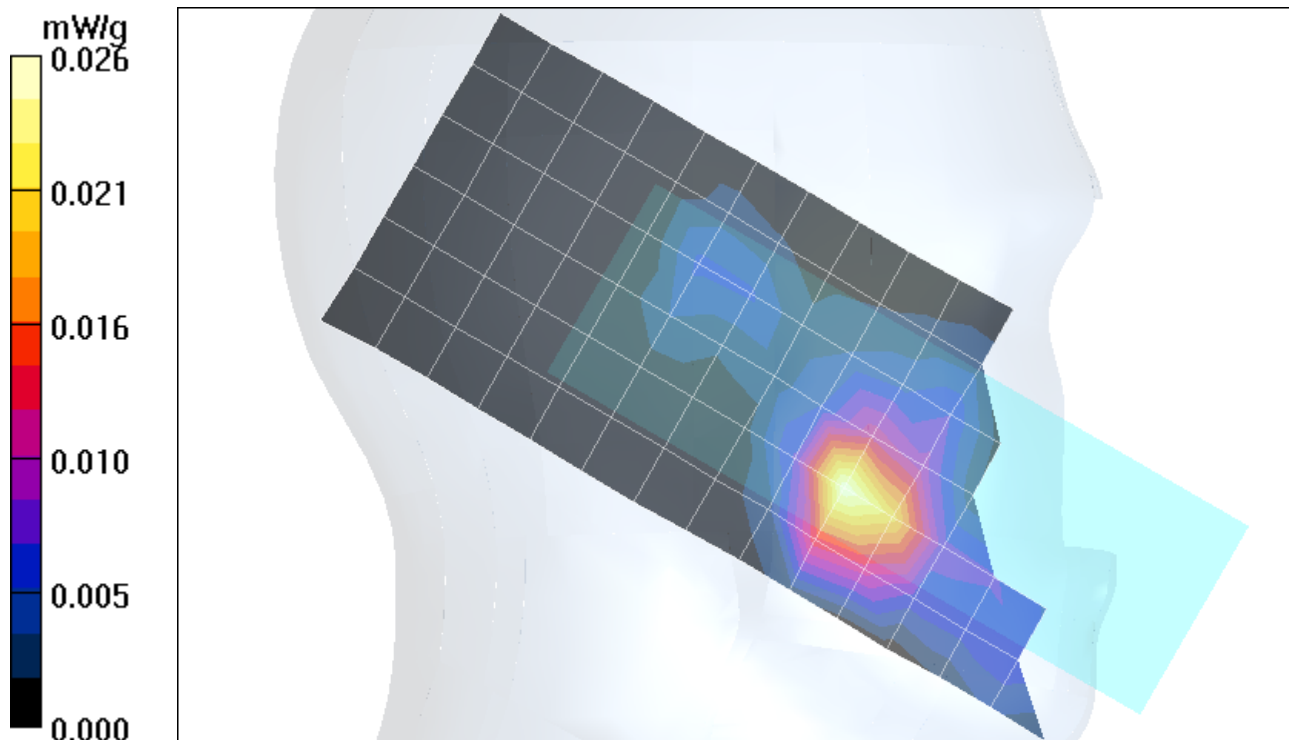

Date/Time: 3/23/2006 3:32:02 PM

Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: hopping; Antenna Position: INTERNAL; Accessory Model #: none; Battery Model #: SNN5696B DEVICE POSITION: TILT; Communication System: Bluetooth; Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1; Medium: 2450 Glycol Head; Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 37.4$; $\rho = 1000 \text{ kg/m}^3$; DASY4 Configuration:


- Probe: ES3DV3 - SN3037; ConvF(4.31, 4.31, 4.31); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4: Glycol SAM; Type: SAM; Serial: TP-1250;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Head Template/Area Scan - Normal (15mm) (7x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.010 mW/g

Right Head Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.19 V/m; Power Drift = 0.229 dB; Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.00993 mW/g; SAR(10 g) = 0.00449 mW/g; Maximum value of SAR (measured) = 0.018 mW/g

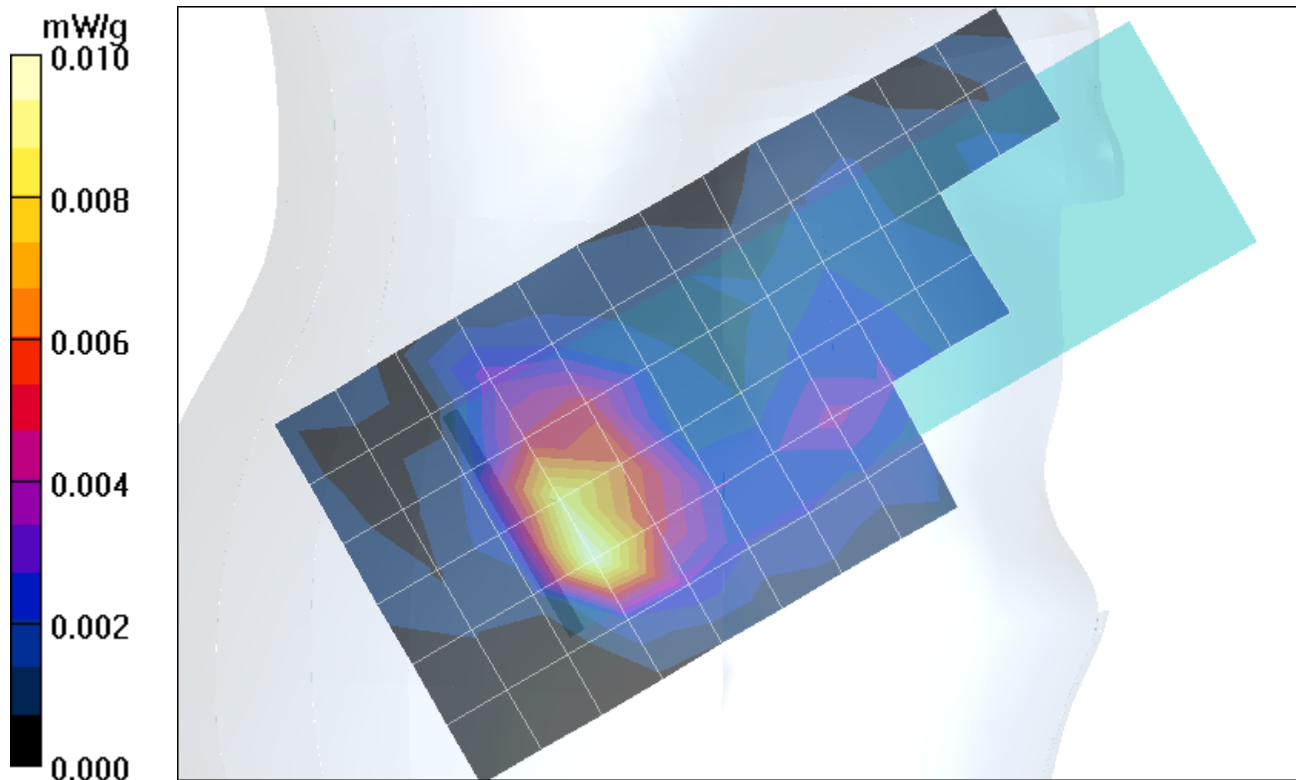

Appendix 3

SAR distribution plots for Body Worn Configuration

Date/Time: 3/26/2006 8:06:04 PM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: 5; Antenna Position: internal; Battery Model #: SNN5696B; Accessory Model #: CHYN4647A; DEVICE POSITION: Body; Communication System: GSM 850; Frequency: 836.6 MHz; Communication System Channel Number: 190; Duty Cycle: 1:8; Medium: Low Freq Body; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(5.93, 5.93, 5.93); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.1, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.446 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 18.7 V/m; Power Drift = 0.019 dB; Peak SAR (extrapolated) = 0.643 W/kg; **SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.288 mW/g**
Maximum value of SAR (measured) = 0.470 mW/g

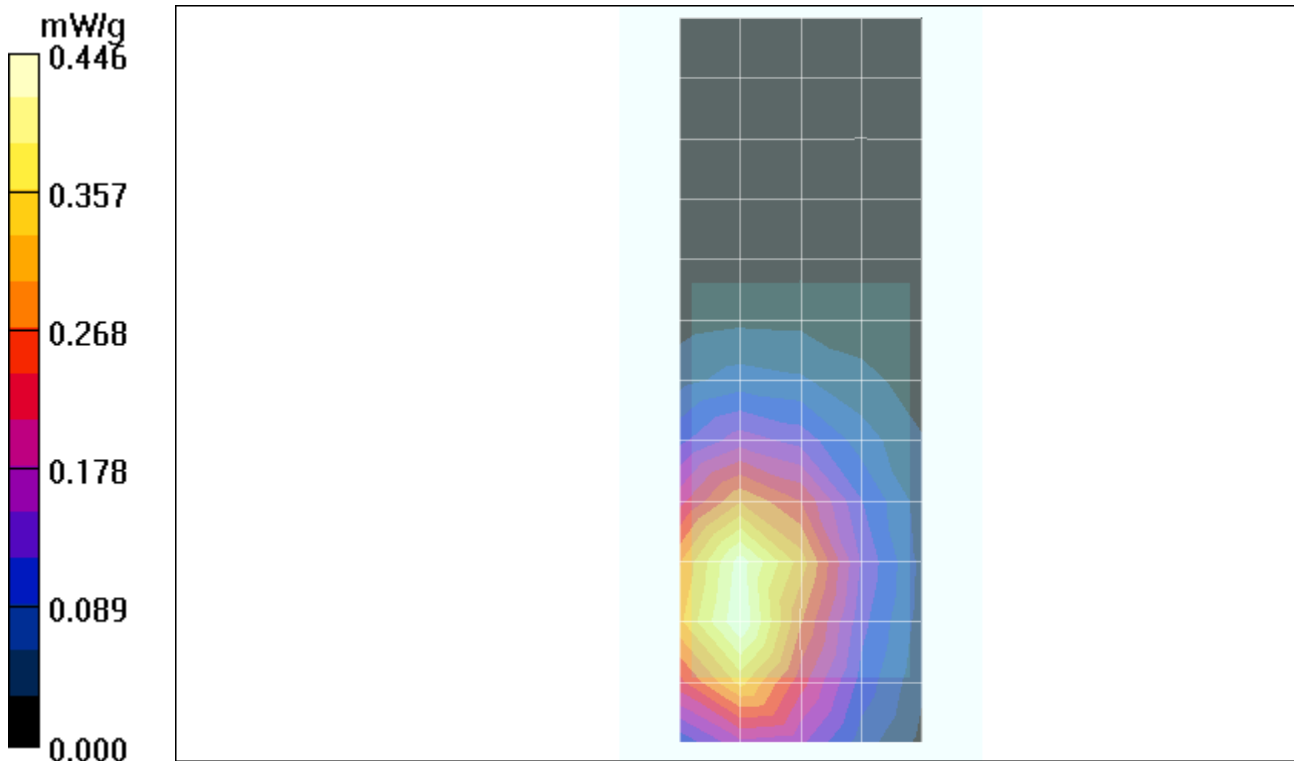

Date/Time: 3/26/2006 12:20:29 AM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: 0; Antenna Position: INTERNAL; Battery Model #: SNN5696B; Accessory Model: CHYN4647A; DEVICE POSITION: Body; Communication System: GSM 1900; Frequency: 1880 MHz; Communication System Channel Number: 661; Duty Cycle: 1:8; Medium: Regular Glycol Body; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(4.65, 4.65, 4.65); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Amy Twin Phone Template/Area Scan - Normal Body (10mm) (19x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 0.378 mW/g

Amy Twin Phone Template/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 12.0 V/m; Power Drift = -0.032 dB; Peak SAR (extrapolated) = 0.567 W/kg; **SAR(1 g) = 0.350 mW/g**; **SAR(10 g) = 0.205 mW/g**
Maximum value of SAR (measured) = 0.386 mW/g

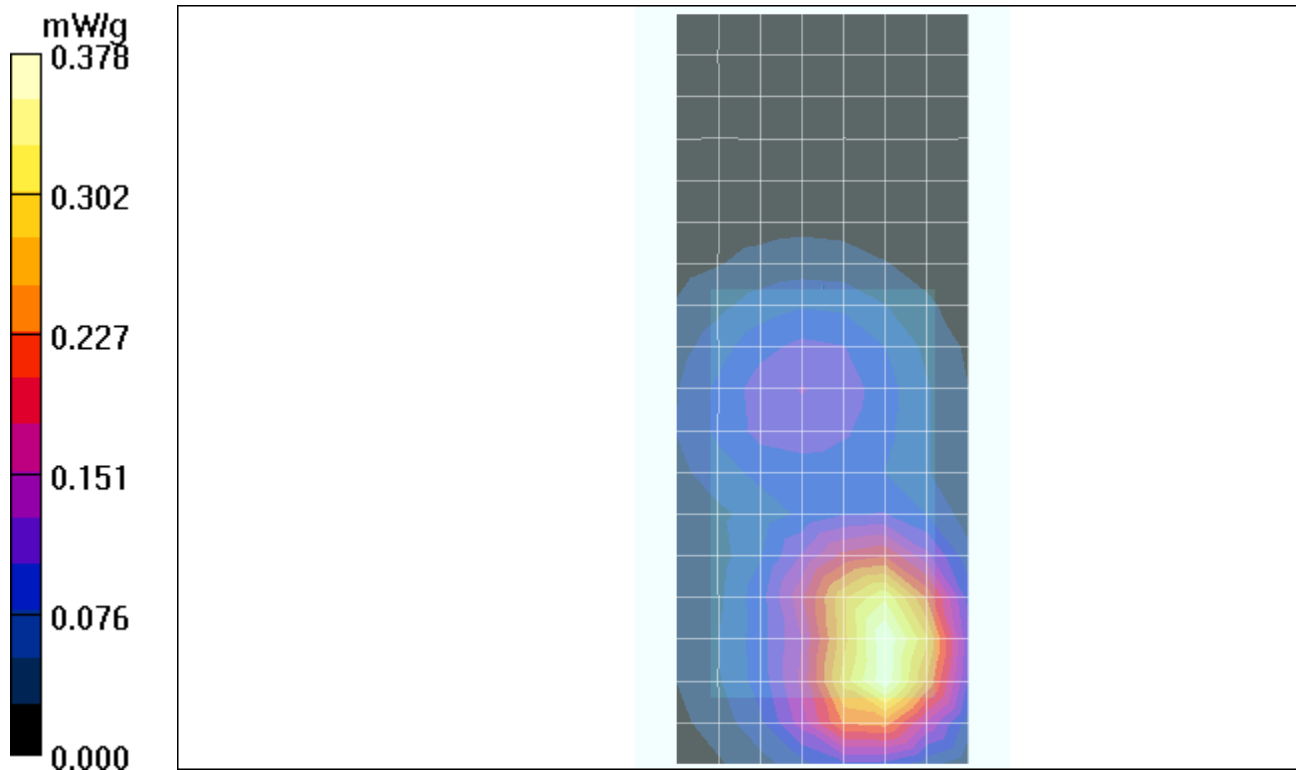

Date/Time: 3/23/2006 6:53:57 PM


Test Laboratory: Motorola

Serial: 40270; Procedure Notes: Pwr Step: hopping; Antenna Position: Internal; Battery Model #: SNN5696B; Accessory Model # = none; DEVICE POSITION: Back of Phone 15mm from Flat Phantom; Communication System: Bluetooth; Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1; Medium: 2450 Glycol Body; Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ; DASY4 Configuration:

- Probe: ES3DV3 - SN3037; ConvF(4.3, 4.3, 4.3); Calibrated: 11/17/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 9/5/2005
- Phantom: R4 : Sect.2, Amy Twin; Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Amy Twin Phone Template/Area Scan - Normal Extended Body (10mm) (24x10x1):
 Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 0.009 mW/g

Amy Twin Phone Template/Zoom Scan - to correct max out (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 1.93 V/m; Power Drift = -0.420 dB; Peak SAR (extrapolated) = 0.047 W/kg
SAR(1 g) = 0.00967 mW/g; SAR(10 g) = 0.00352 mW/g

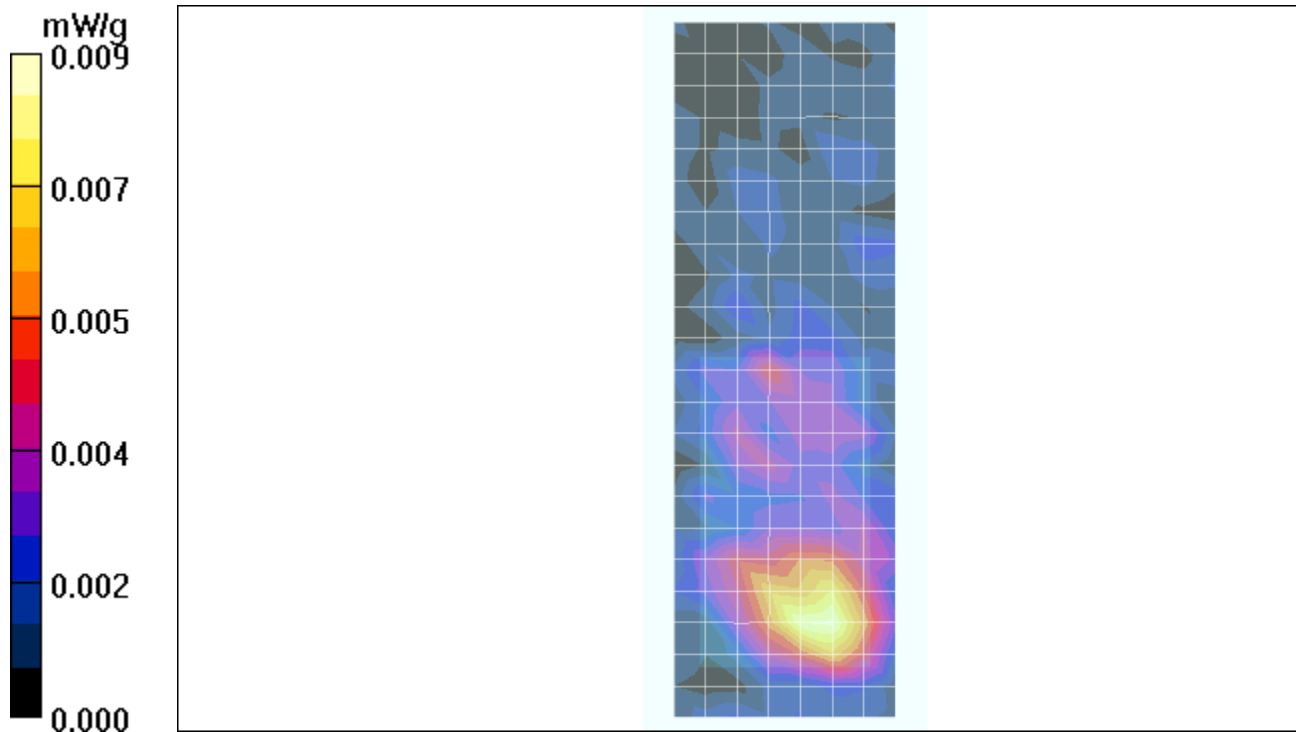

Appendix 4

Probe Calibration Certificate



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Motorola MDb**

Certificate No: **ES3-3037_Nov05**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3037**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 17, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 654	27-Oct-05 (SPEAG, No. DAE4-654_Oct05)	Oct-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by:	Name Nico Vetterli	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: November 17, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to **NORM_{x,y,z} * ConvF** whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV3

SN:3037

Manufactured:	August 21, 2003
Last calibrated:	November 25, 2005
Recalibrated:	November 17, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ES3DV3 SN:3037**Sensitivity in Free Space^A**

NormX	1.15 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	0.84 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	0.95 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	97 mV
DCP Y	97 mV
DCP Z	97 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect**TSL 900 MHz Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	5.1	2.3
SAR _{be} [%]	With Correction Algorithm	0.0	0.1

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{be} [%]	Without Correction Algorithm	8.4	5.2
SAR _{be} [%]	With Correction Algorithm	0.0	0.1


Sensor OffsetProbe Tip to Sensor Center **2.0 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

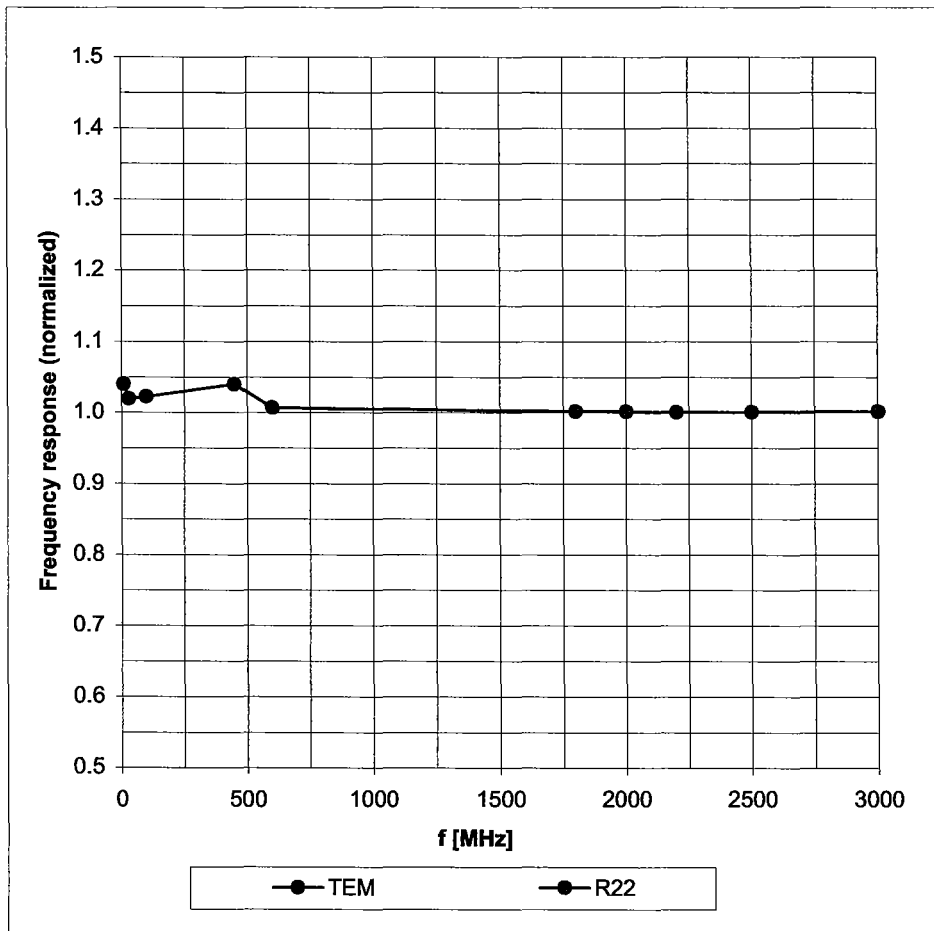

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



Receiving Pattern (ϕ), $\vartheta = 0^\circ$

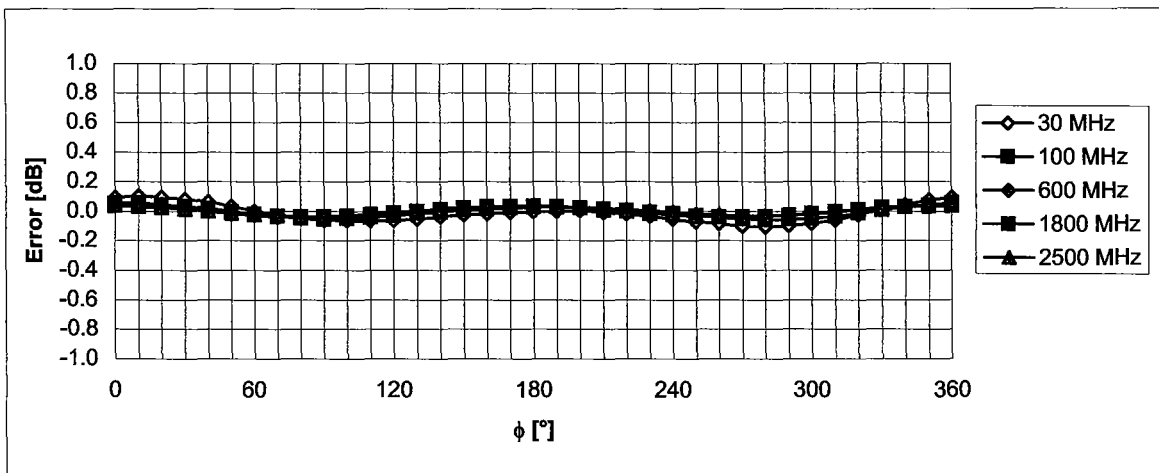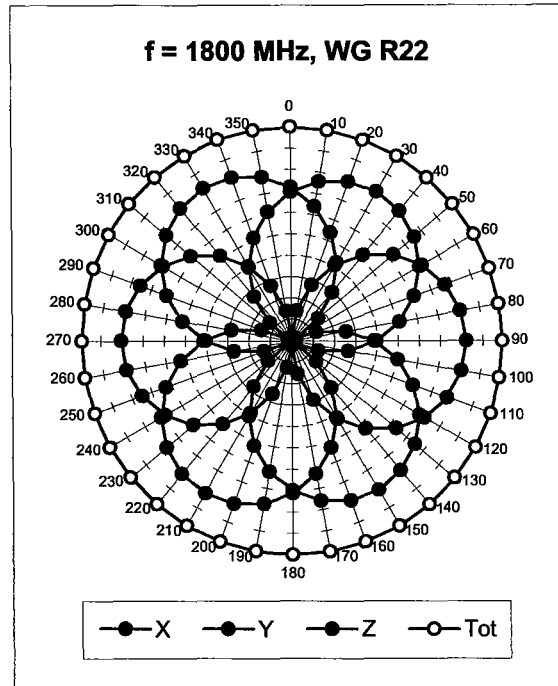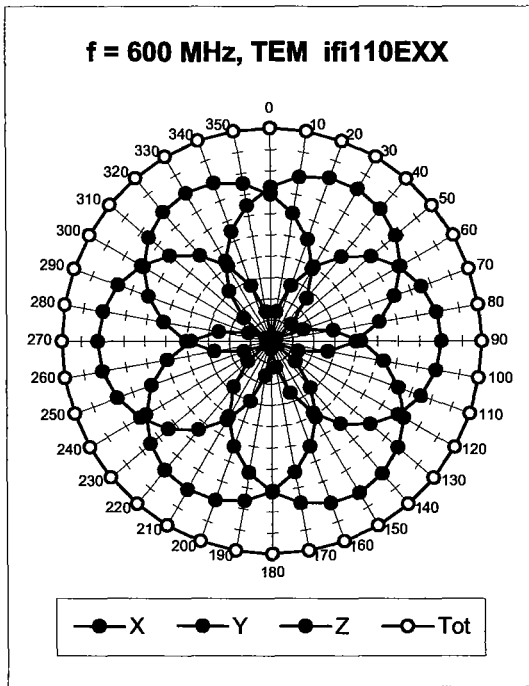

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)



Dynamic Range $f(\text{SAR}_{\text{head}})$

(Waveguide R22, $f = 1800 \text{ MHz}$)

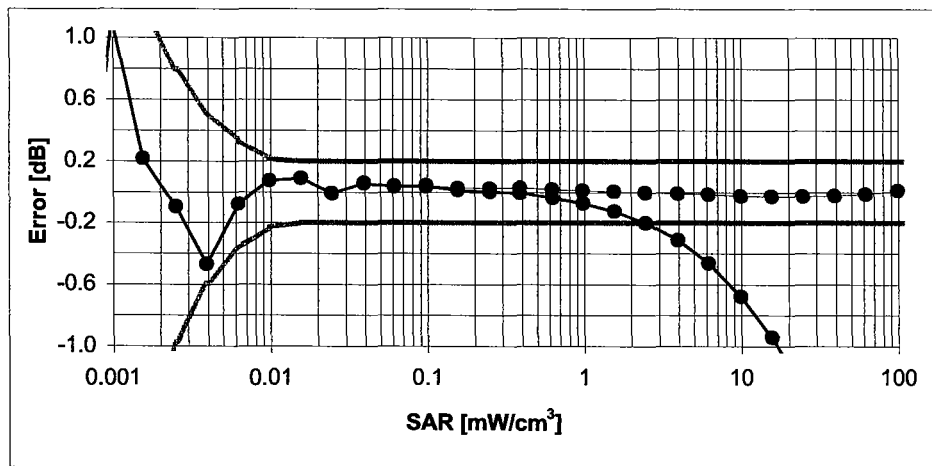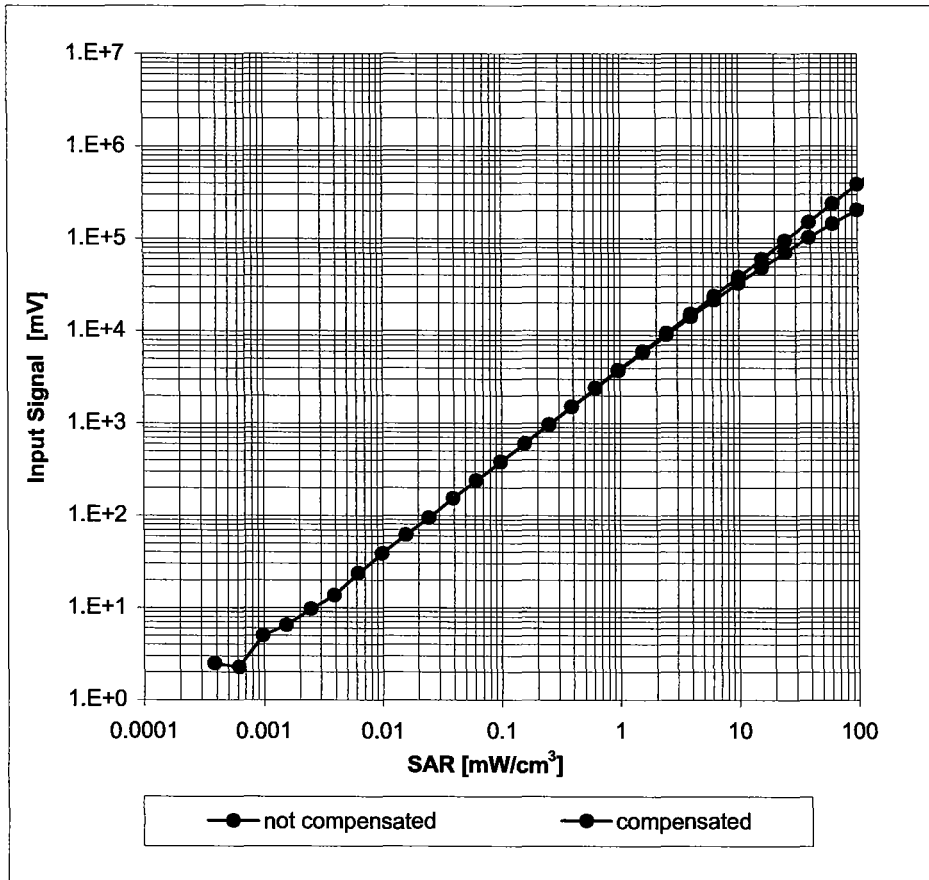

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

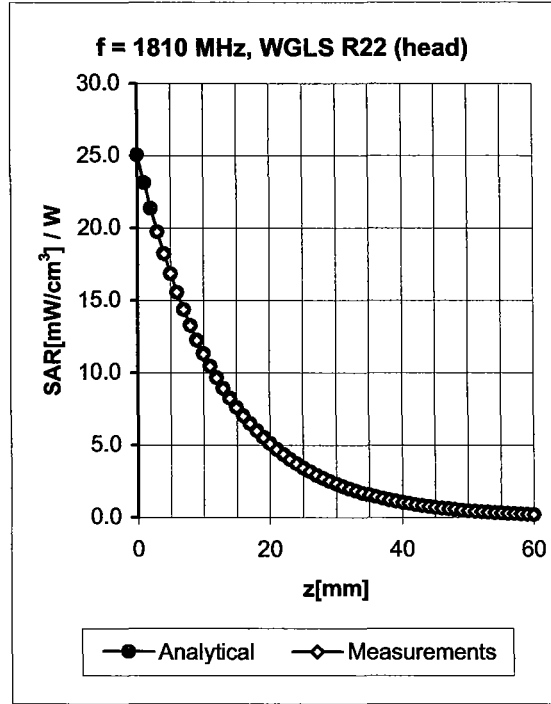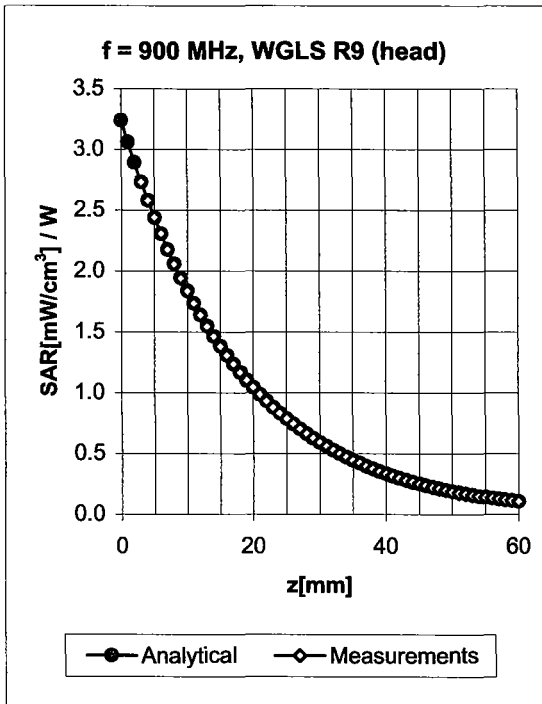


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.44	1.35	6.07 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.27	2.38	5.01 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.28	2.21	4.66 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.48	1.52	4.31 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.52	1.27	5.93 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.27	2.51	4.65 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.33	2.04	4.44 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.49	1.53	4.30 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ, ϑ), $f = 900$ MHz

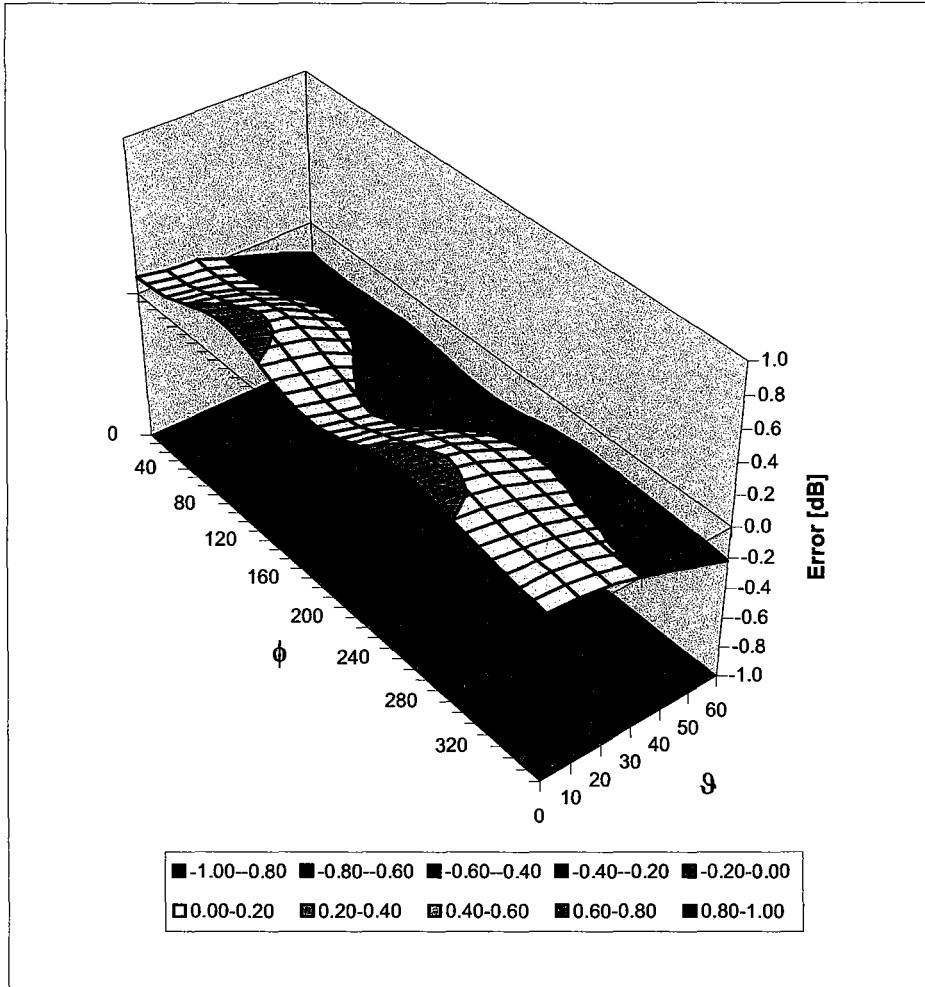

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Appendix 5

Measurement Uncertainty Budget

MOTOROLA, INC. Portable Cellular Phone SAR Test Report Number: **18157-1**

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f /e</i>	<i>i = c x g /e</i>	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (± %)	Prob Dist	Div.	<i>c_i (1 g)</i>	<i>c_i (10 g)</i>	1 g u_i (±%)	10 g u_i (±%)	<i>v_i</i>
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty									
			RSS				11.1	10.8	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)									
			k=2				22.2	21.6	

Appendix 6

Photographs of the device under test

(THIS APPENDIX WAS MOVED TO FCC EXHIBIT 7)

Appendix 7

Dipole Characterization Certificate

Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-


900MHz	
IEEE1528 Target:	10.8 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	9-Nov-04 to 2-June-05
# of tests performed:	813
Grand Average:	11.3 (W/kg)
% Delta (Average - IEEE1528 Target)	4.4%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
Historic data included the following 900MHz Dipoles:	
69, 77	
79, 80	
91, 94	
96, 97	

-New System Performance Check Targets- per APP-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
900MHz	11.3	41.5 ± 5%	0.97 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-


2450MHz	
IEEE1528 Target:	52.4 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	18-Nov-04 to 20-May-05
# of tests performed:	52
Grand Average:	56.8 (W/kg)
% Delta (Average - IEEE1528 Target)	8.4%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
Historic data included the following 2450MHz Dipoles:	
740	
766	
767	

-New System Performance Check Targets- per APP-0396
(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
2450MHz	56.8	39.2 ± 5%	1.80 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments: