



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**


EMC TEST REPORT - Addendum

Test Report Number – 18158-1BT

Report Date – April 27, 2006

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: April 27, 2006

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1651-01



Table of Contents

Test Report Details 3

Applicable Standards 4

Summary of Testing..... 5

General and Special Conditions..... 5

Equipment and Cable Configurations..... 6

Measuring Equipment and Calibration Information 6

Description of Bluetooth Transmitter 7

Measurement Procedures and Data..... 8

 CARRIER FREQUENCY SEPARATION 8

 Measurement Procedure..... 8

 Measurement Results 8

 NUMBER OF HOPPING FREQUENCIES 10

 Measurement Procedure..... 10

 Measurement Results 10

 TIME OF OCCUPANCY (DWELL TIME)..... 12

 Measurement Procedure..... 12

 Measurement Results 12

 20dB BANDWIDTH 14

 Measurement Procedure..... 14

 Measurement Results 14

 FIELD STRENGTH OF SPURIOUS EMISSIONS..... 16

 Measurement Procedure..... 16

 Measurement Results 16

 PEAK OUTPUT POWER 44

 Measurement Procedure..... 44

 Measurement Results 44

 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS 45

 Measurement Procedure..... 45

 Measurement Results 45

 SPURIOUS RF CONDUCTED EMISSIONS 48

 Measurement Procedure..... 48

 Measurement Results 48

 AC LINE CONDUCTED EMISSIONS 55

 Measurement Procedure..... 55

 Measurement Results 55

Test Report Details

Tests Performed By: Motorola Mobile Devices Business
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
Phone: 847- 523-6167
Fax: 847- 523-4538
Motorola MDB FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Tests Requested By: Motorola Inc.
Mobile Devices Business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 850, 1900, EDGE and Bluetooth

Model Number: SJUGG0812DA

Serial Numbers: 004400013814692, 004400013814767,
004400013814684, 004400013814718

Testing Complete Date: August 08, 2005

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart C – Intentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

DA 00-705, “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” published by the Federal Communications Commission was also used in the testing of this product.

Summary of Testing

| Test | Test Name | Pass/Fail |
|------|--------------------------------------|-----------|
| 1 | Carrier Frequency Separation | Pass |
| 2 | Number of Hopping Frequencies | Pass |
| 3 | Time of Occupancy (Dwell Time) | Pass |
| 4 | 20 dB Bandwidth | Pass |
| 5 | Spurious RF Conducted Emissions | Pass |
| 6 | Field Strength of Spurious Emissions | Pass |
| 7 | Max Power | N/A |
| 8 | Band Edges | Pass |
| 9 | Conducted Spurious Emissions | Pass |

| Test | Test Name | Results |
|------|--------------------------------------|-----------|
| 1 | Carrier Frequency Separation | 1 MHz |
| 2 | Number of Hopping | 79 |
| 3 | Time of Occupancy (Dwell Time) | 2.96 ms |
| 4 | 20 dB Bandwidth | 1 MHz |
| 5 | Spurious RF Conducted Emissions | See plots |
| 6 | Field Strength of Spurious Emissions | See plots |
| 7 | Max Power | 14.78 dBm |
| 8 | Band Edges | See plots |
| 9 | Conducted Spurious Emissions | See plots |

General and Special Conditions

The Cellular Phone with the Model Number SJUG0812DA hereinafter referred to as the Equipment Under Test or EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

| Manufacturer | Equipment Type | Model No. | Serial Number | Cal. Due Date |
|---------------------|-----------------------|------------------|----------------------|----------------------|
| Rohde & Schwarz | Receiver | ESI26 | 838786/010 | 6/17/2006 |
| Hewlett-Packard | EMC Analyzer | E7405A | US40240219 | 6/8/2006 |
| AH Systems Inc | DRG Horn Antenna | SAS-200/571 | 265 | 5/25/2006 |
| ETS | Log-Periodic Antenna | 3148 | 1188 | 6/14/2006 |
| ETS | Biconical Antenna | 3110B | 3370 | 2/16/2006 |
| Attenuator | Weinschel | AS-6 | 6675 | 10/14/2005 |
| Attenuator | Weinschel | AS-6 | 6677 | 11/4/2005 |

All equipment is on a one-year calibration cycle.

Description of Bluetooth Transmitter

The EUT offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483.5 MHz. The Bluetooth antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by industrial standard. In this application, the device is battery-operated.

The Bluetooth antenna gain is -2 dBi.

Measurement Procedures and Data

CARRIER FREQUENCY SEPARATION

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth transmitter of the EUT had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Measurement Results

See attached.

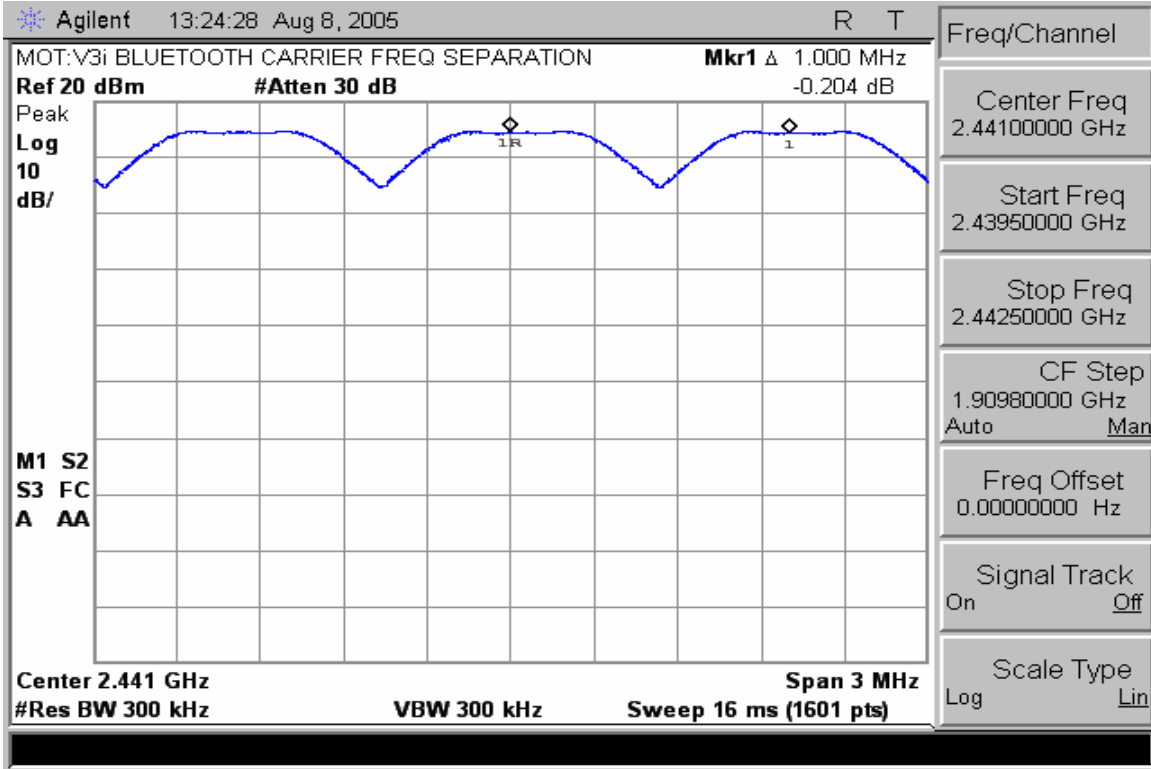

Carrier Frequency Separation

NUMBER OF HOPPING FREQUENCIES

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

Measurement Results

See attached.

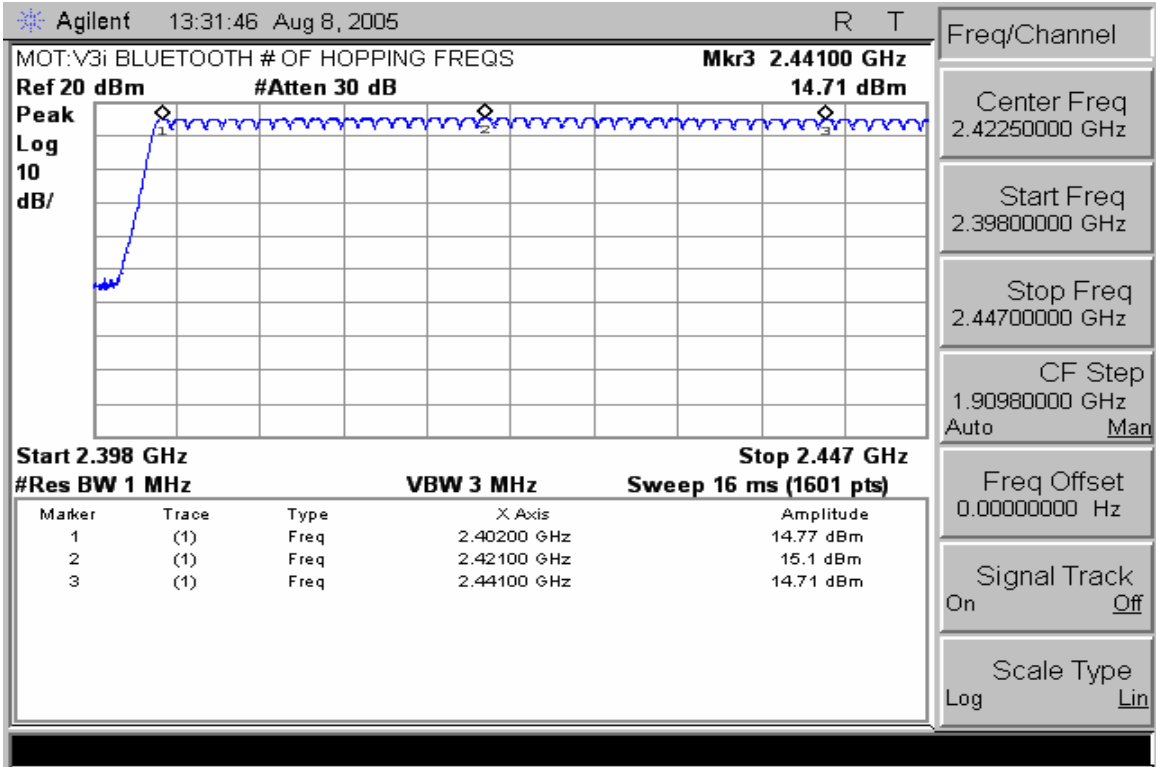

Number of Hopping Frequencies (Channels 0 – 39)

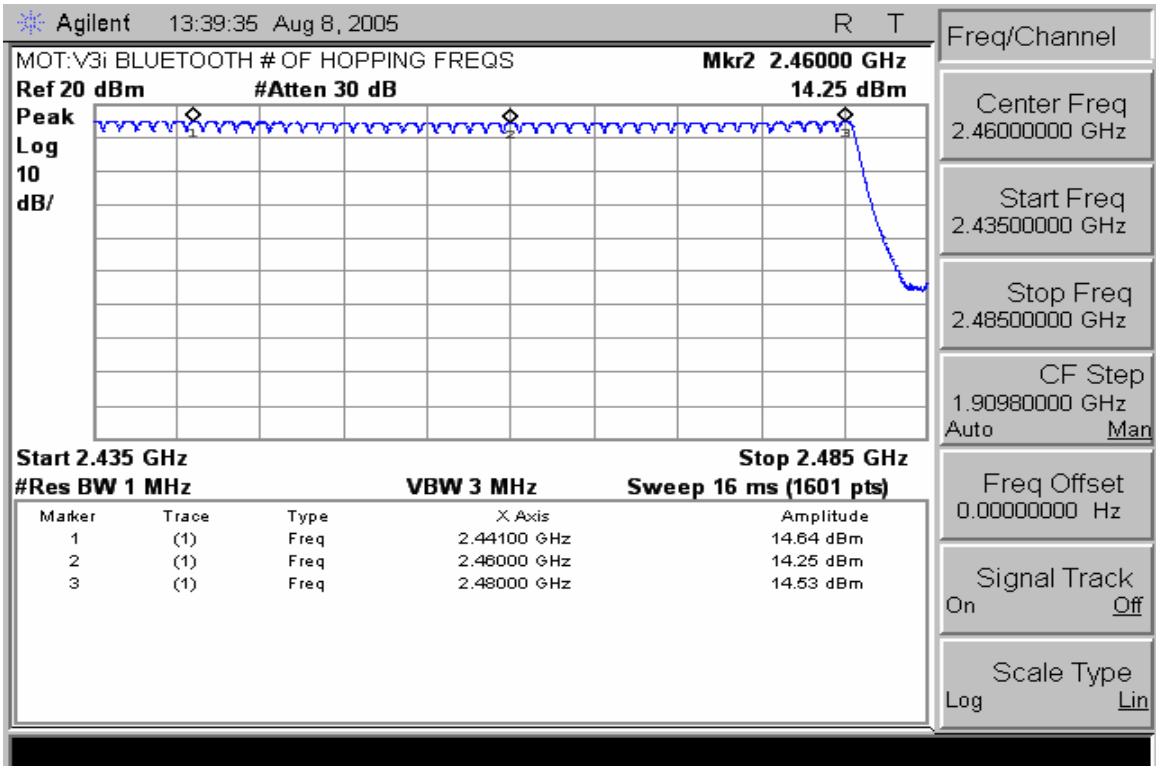

Number of Hopping Frequencies (Channels 39 – 78)

TIME OF OCCUPANCY (DWELL TIME)

CFR47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Measurement Results

See attached

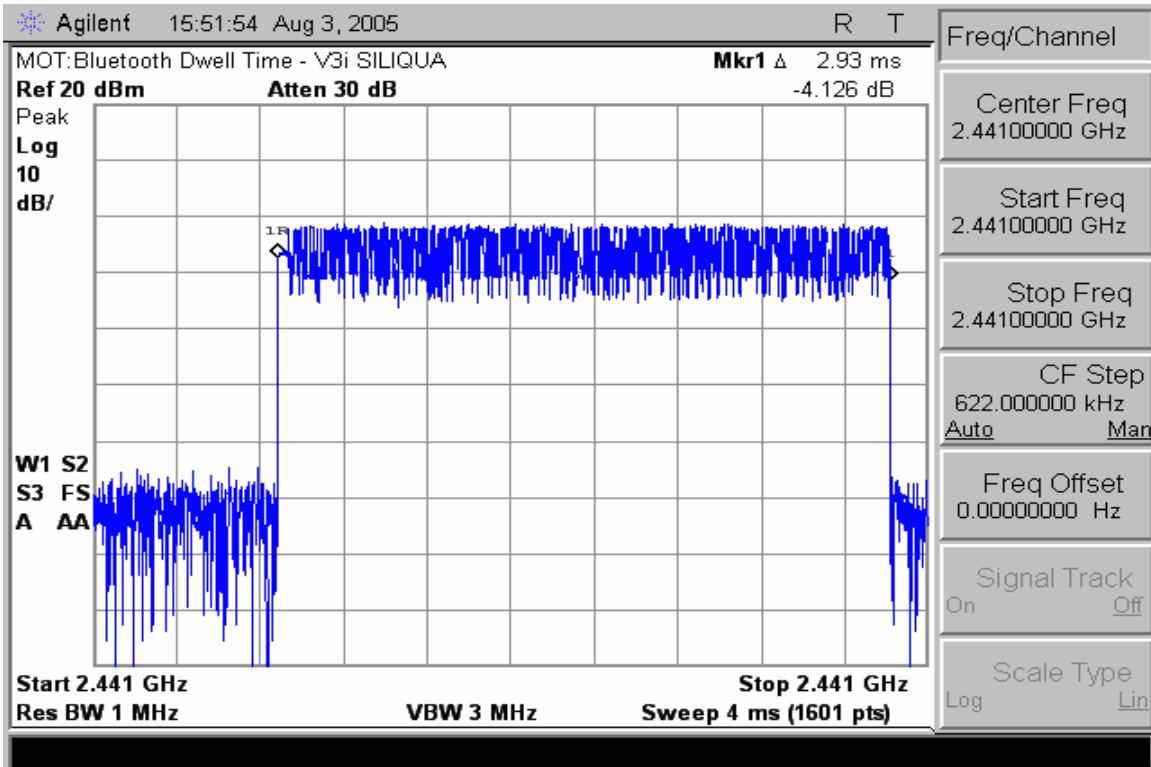

Dwell Time

20dB Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Measurement Results

See attached

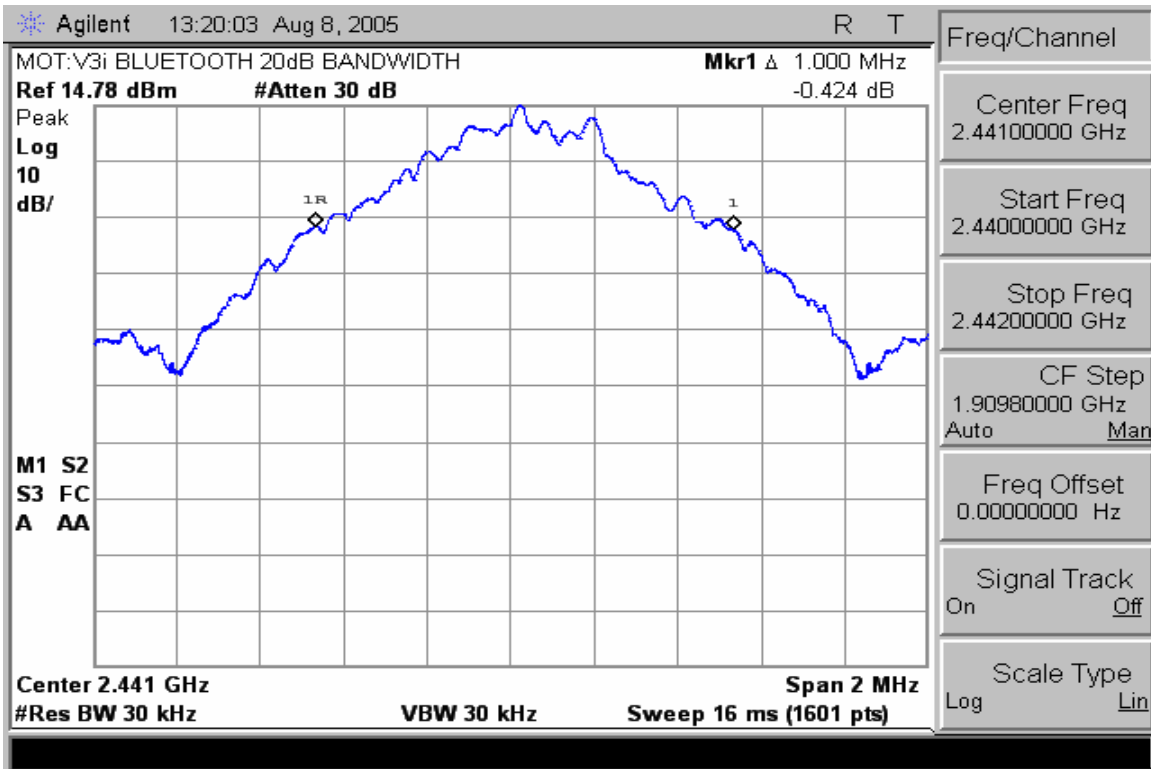

20dB Bandwidth

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 15.247

Measurement Procedure

The Equipment-Under-Test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.


$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

A fully charged battery was used for the supply voltage.


Measurement Results

See attached


**Radiated Emissions
CH 0 2402 MHz X-Axis
GREEN HORIZONTAL AND VERTICAL**

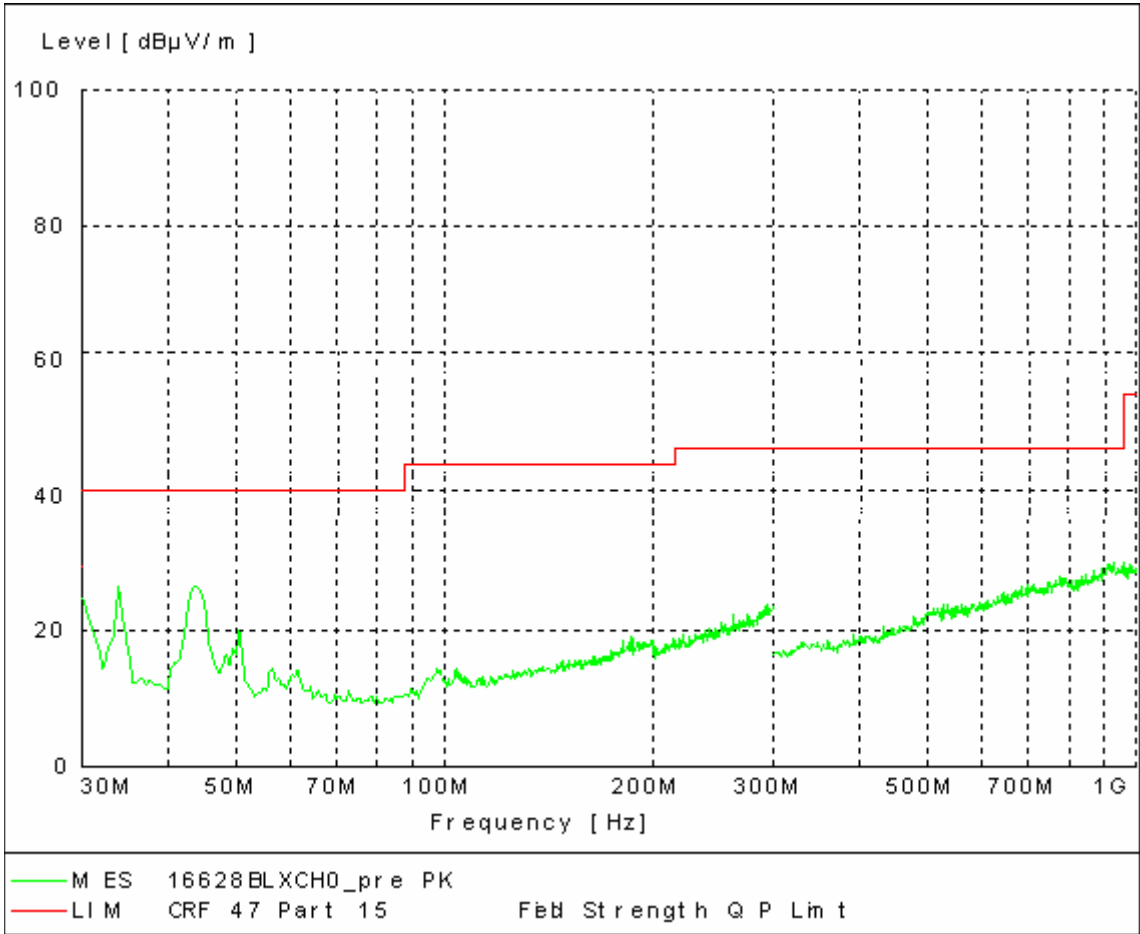


**Radiated Emissions
CH 0 2402 MHz Y-Axis
GREEN HORIZONTAL AND VERTICAL**

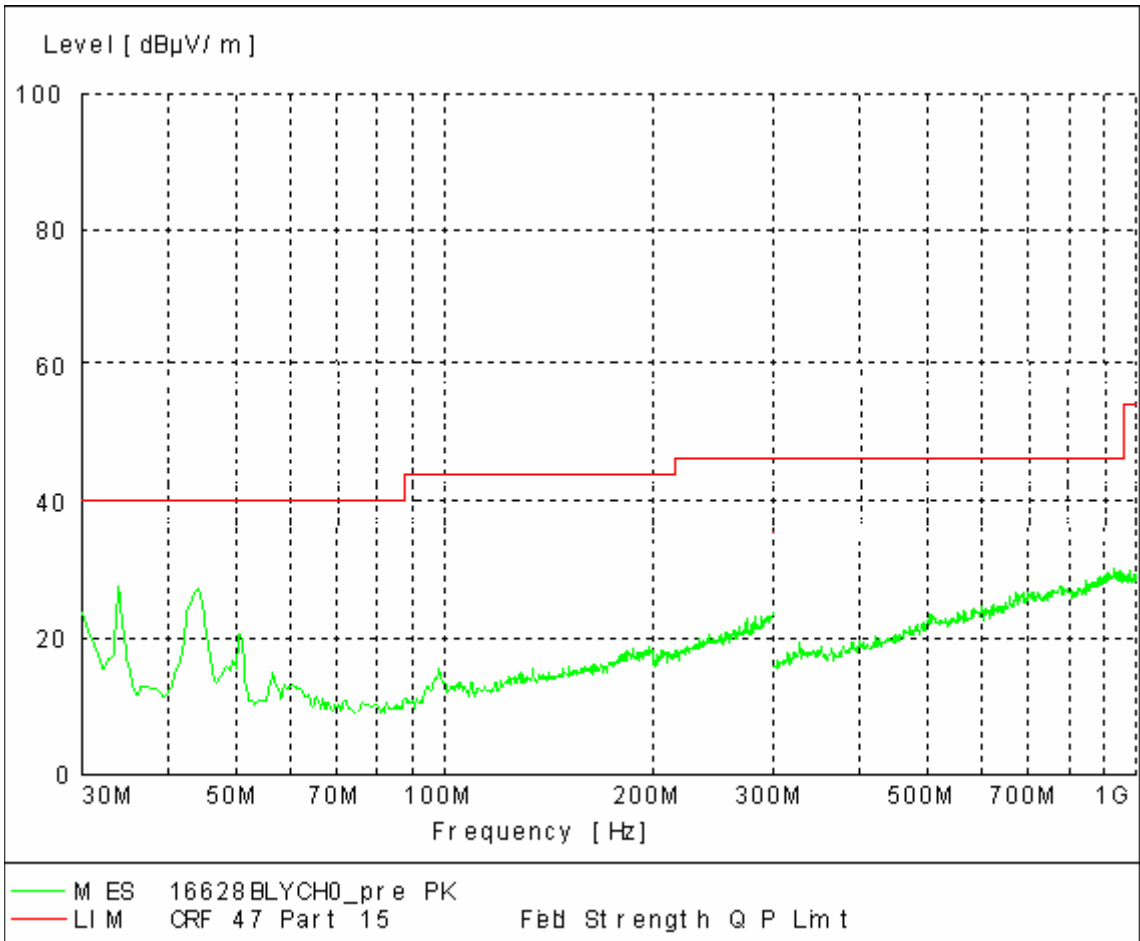


**Radiated Emissions
CH 0 2402 MHz Z-Axis
GREEN HORIZONTAL AND VERTICAL**

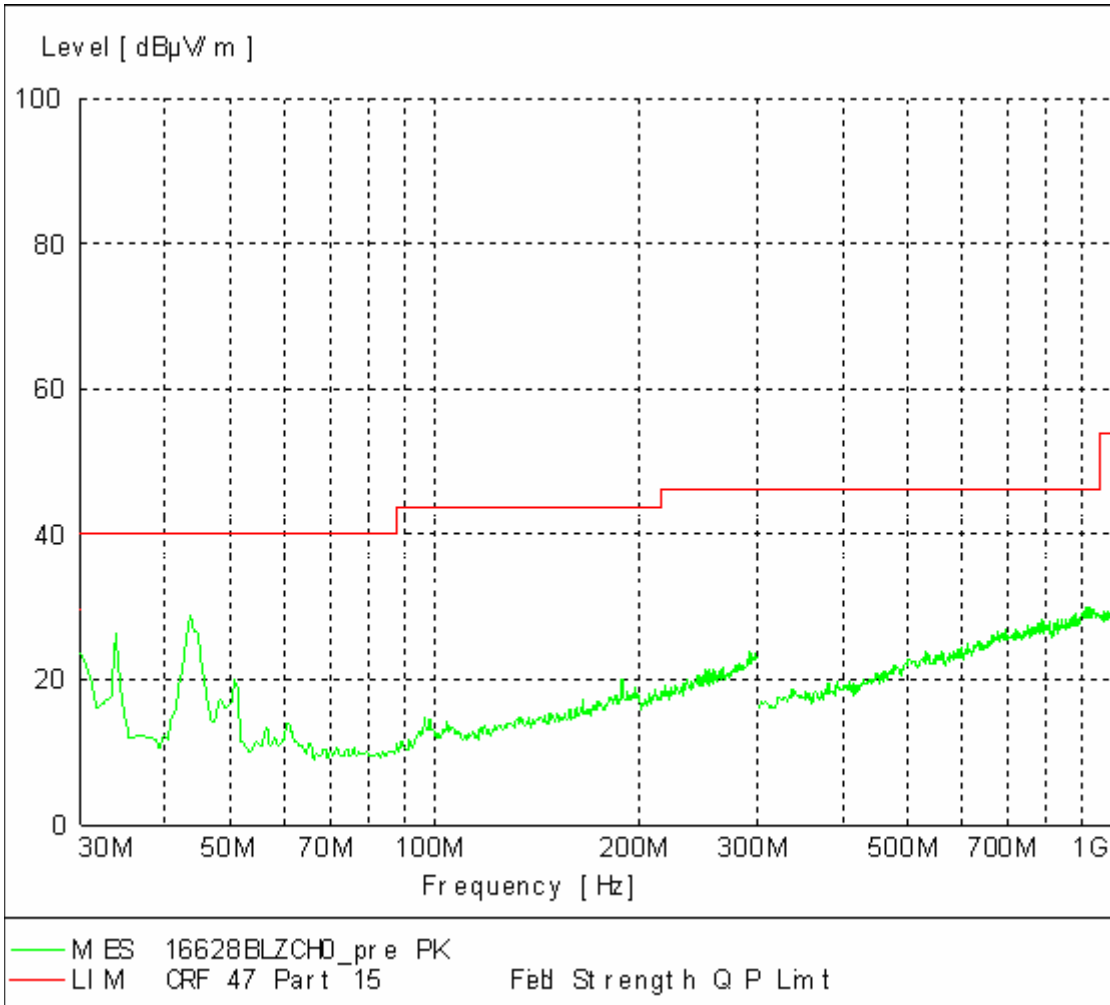


**Radiated Emissions
CH 39 2442 MHz X-Axis
GREEN HORIZONTAL AND VERTICAL**

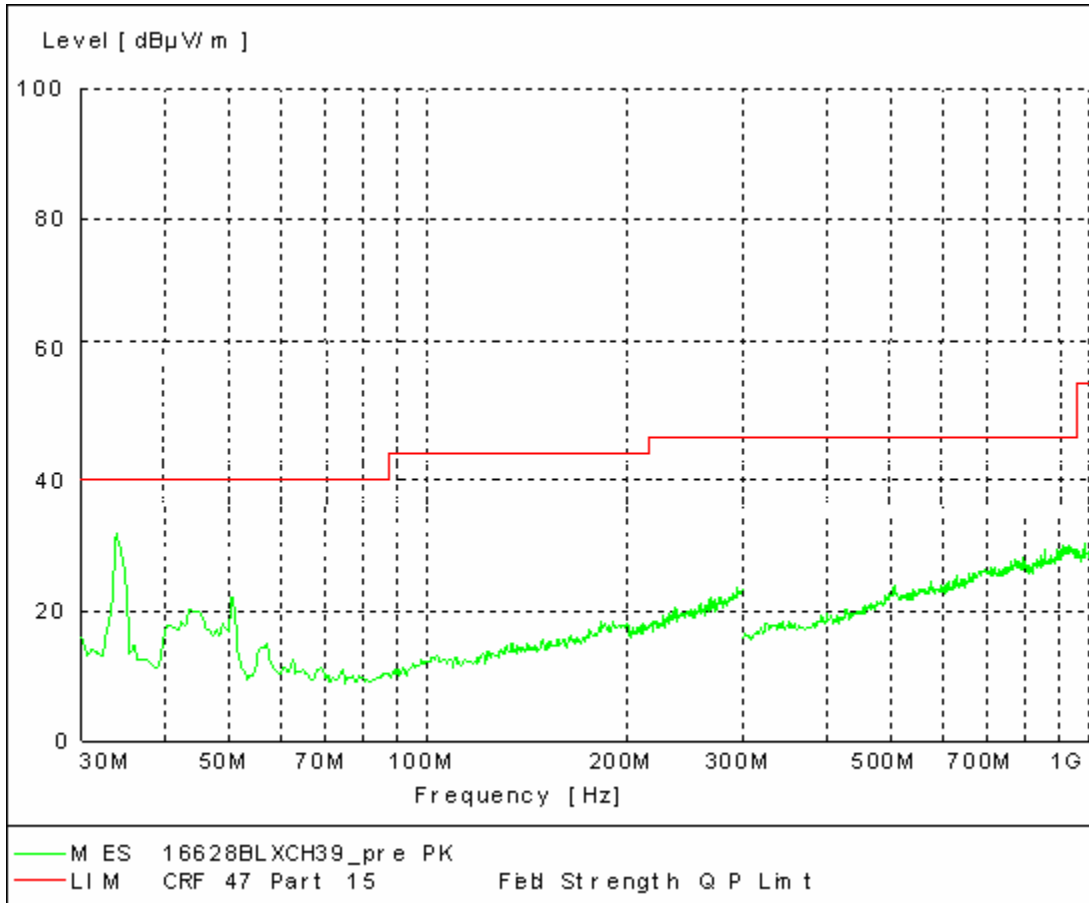


**Radiated Emissions
CH 39 2442 MHz Y-Axis
GREEN HORIZONTAL AND VERTICAL**

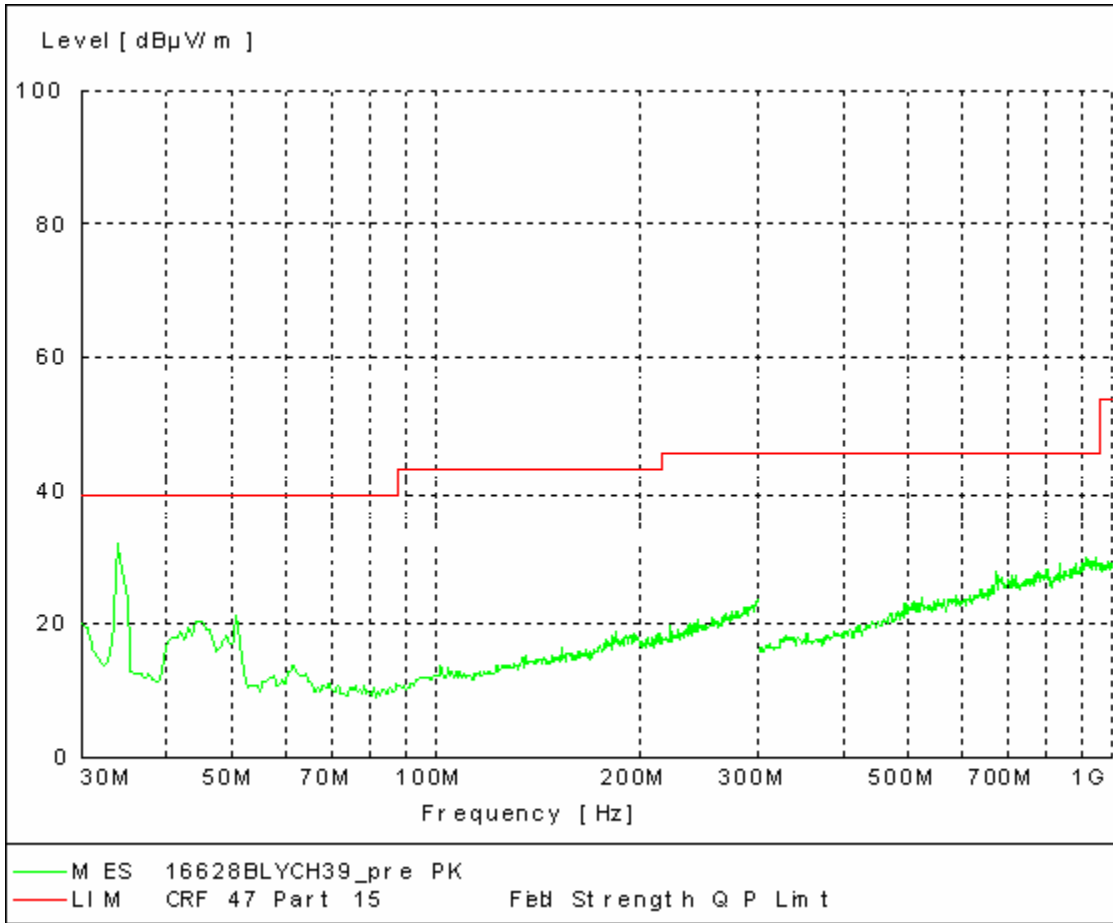


**Radiated Emissions
CH 39 2442 MHz Z-Axis
GREEN HORIZONTAL AND VERTICAL**

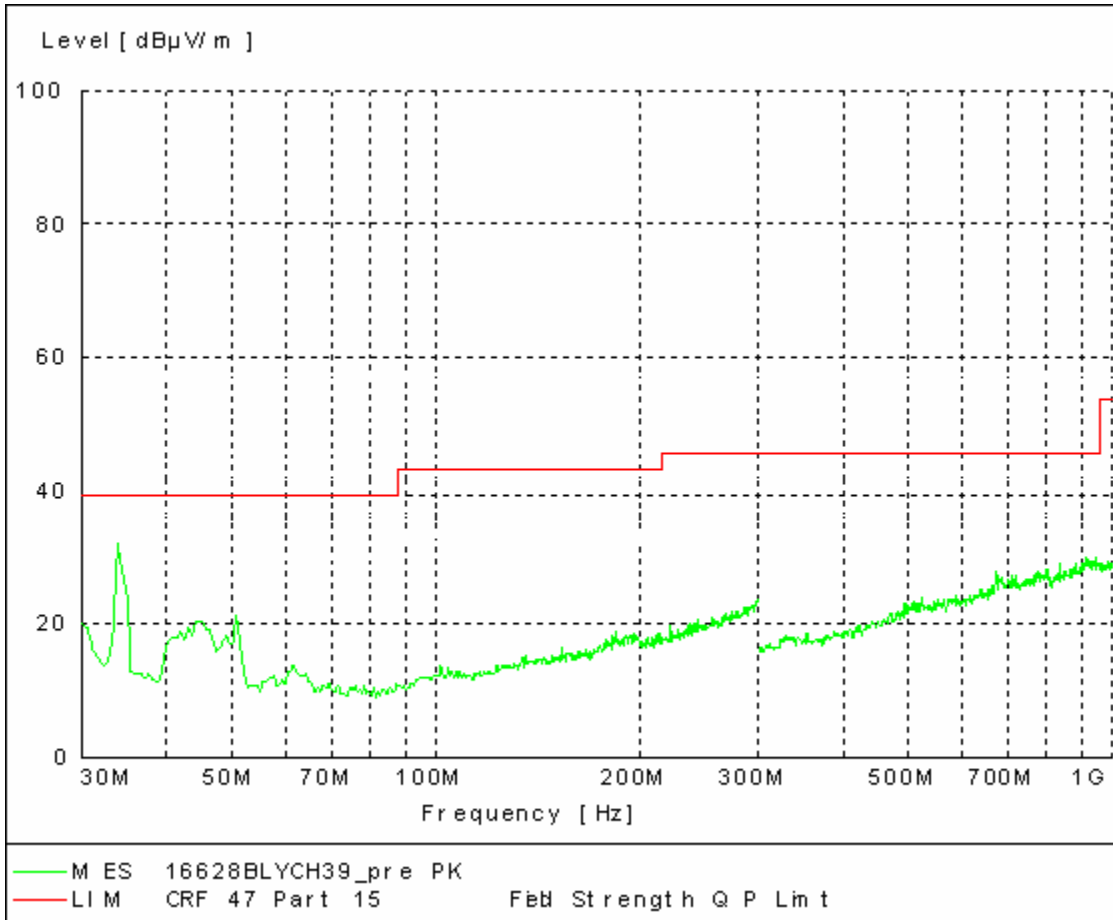


**Radiated Emissions
CH 78 2480 MHz X-Axis
GREEN HORIZONTAL AND VERTICAL**

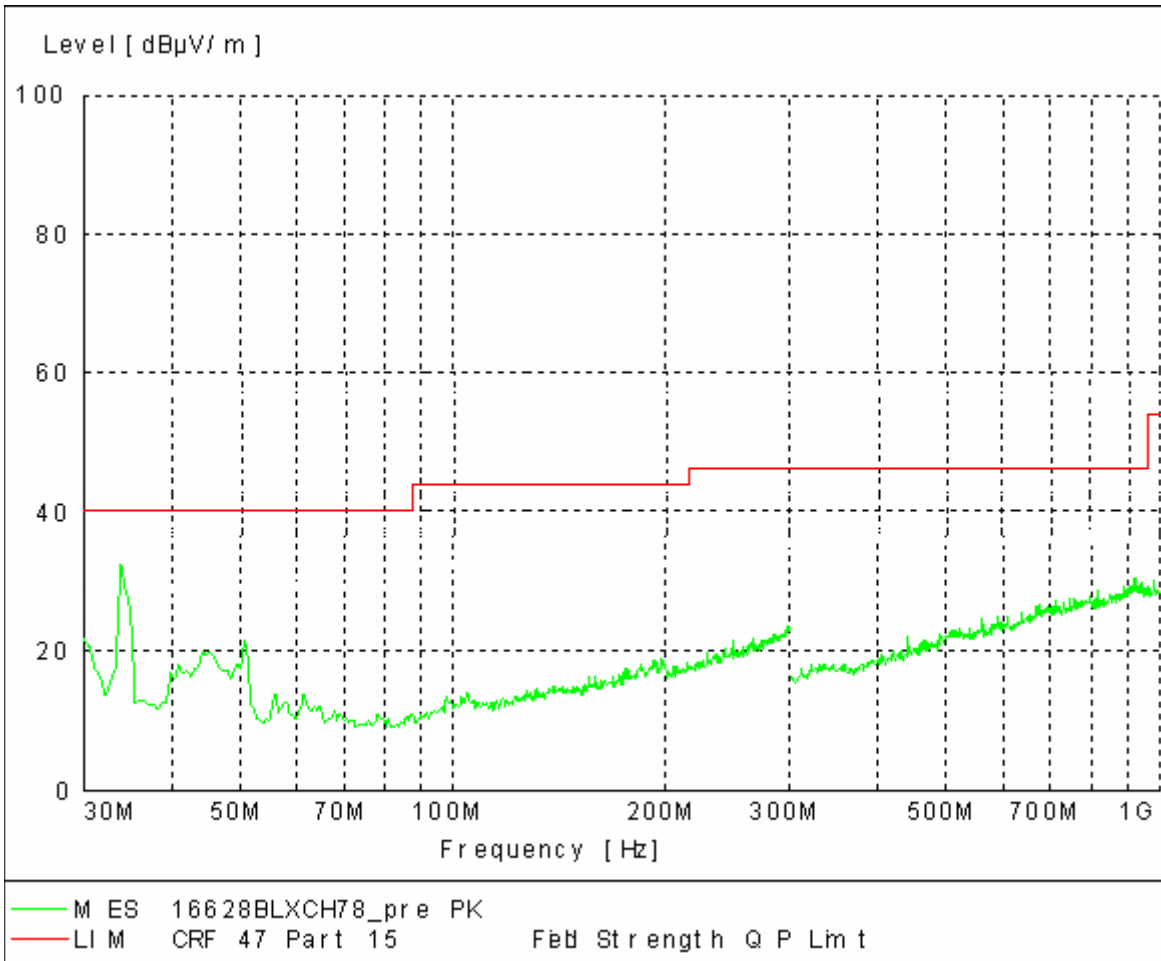


**Radiated Emissions
CH 78 2480 MHz Y-Axis
GREEN HORIZONTAL AND VERTICAL**

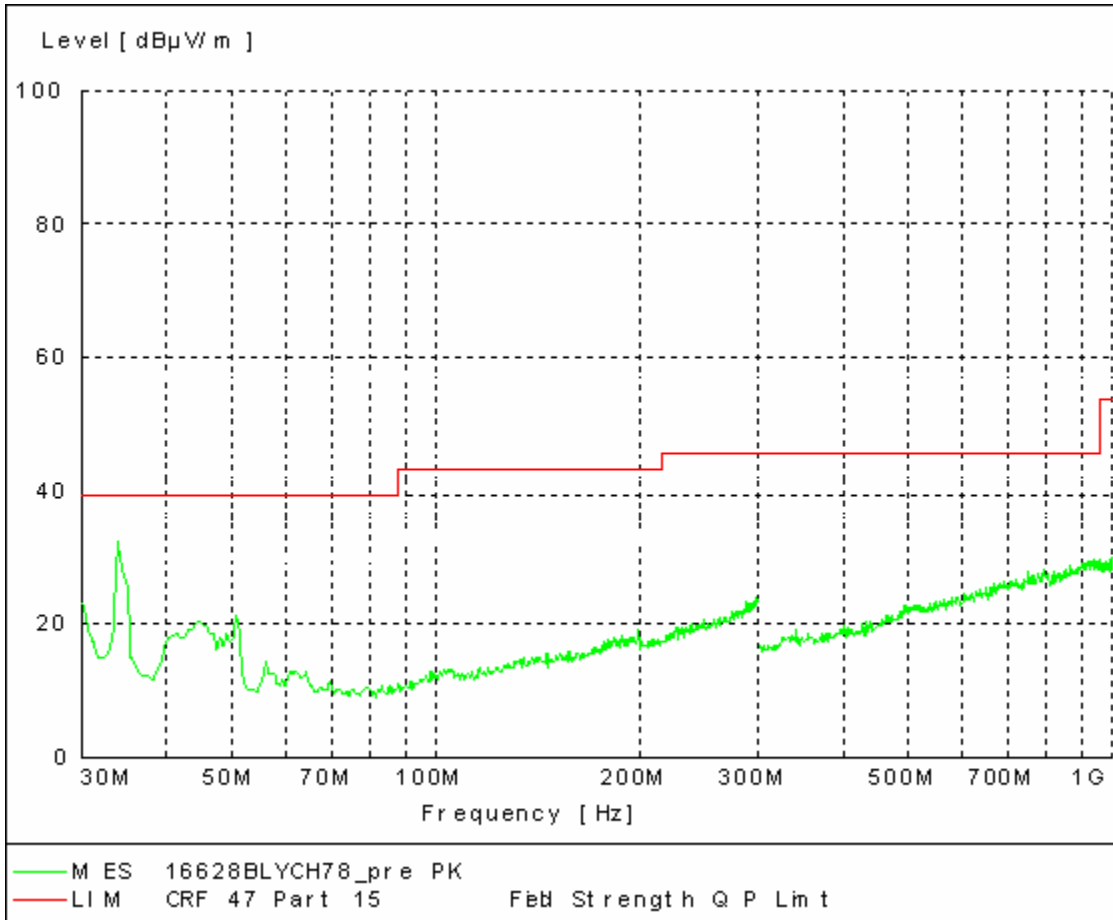

**Radiated Emissions
CH 78 2480 MHz Z-Axis
GREEN HORIZONTAL AND VERTICAL**

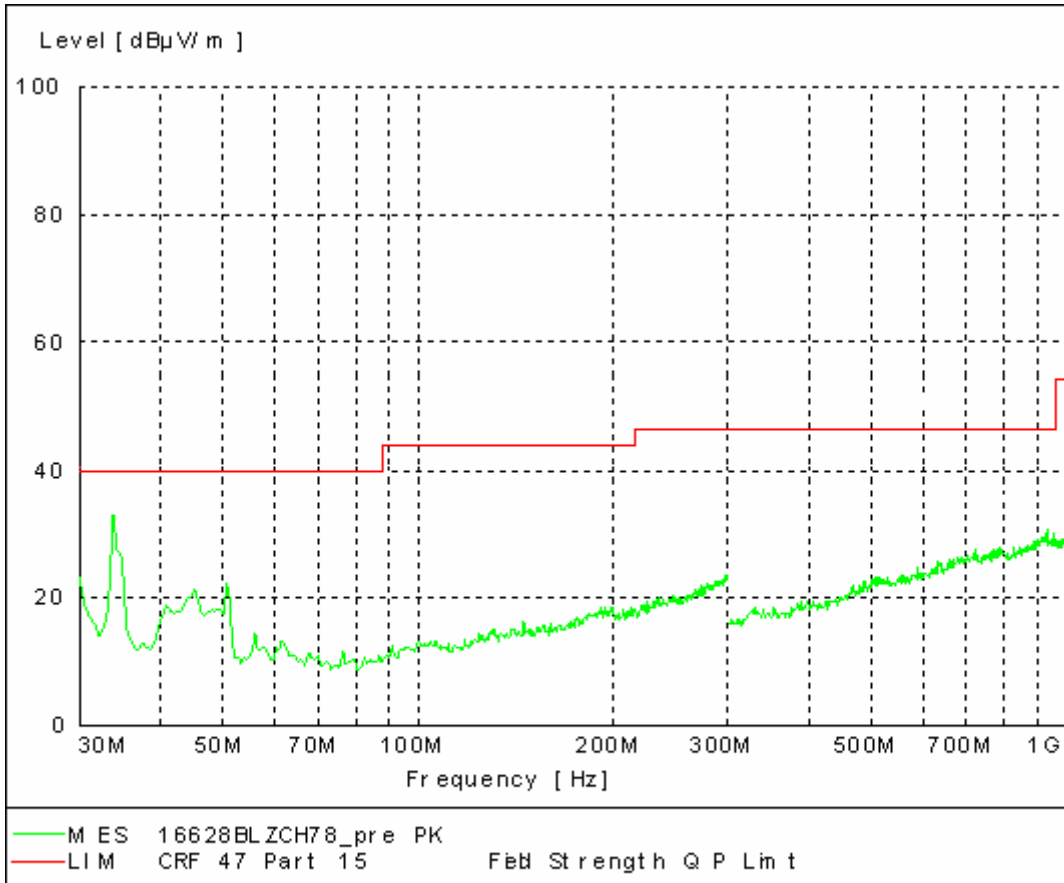


**Radiated Emissions
CH 0 2402 MHz X-Axis
GREEN HORIZONTAL AND VERTICAL**

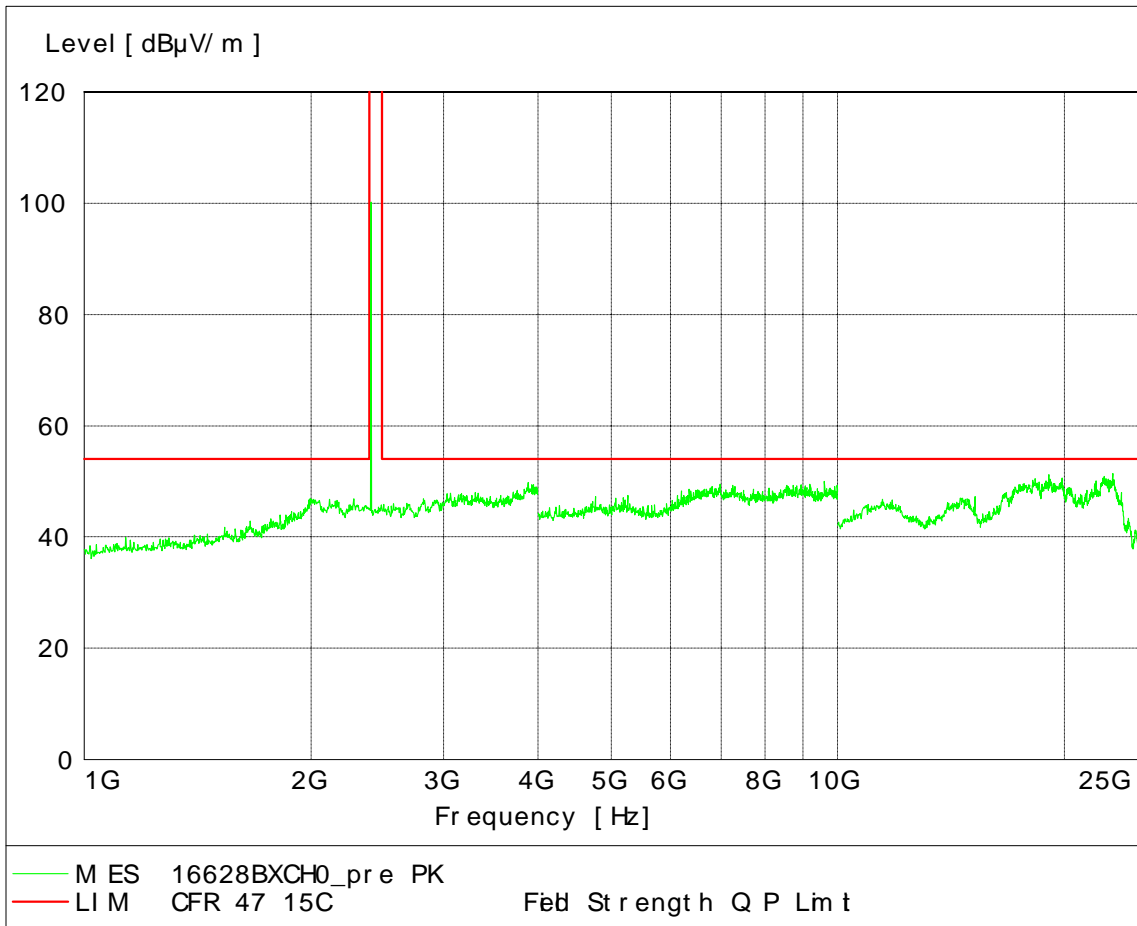


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2400 | 100.18 | Peak | 99 |

**Radiated Emissions
CH 0 2402MHz Y-Axis
GREEN HORIZONTAL AND VERTICAL**

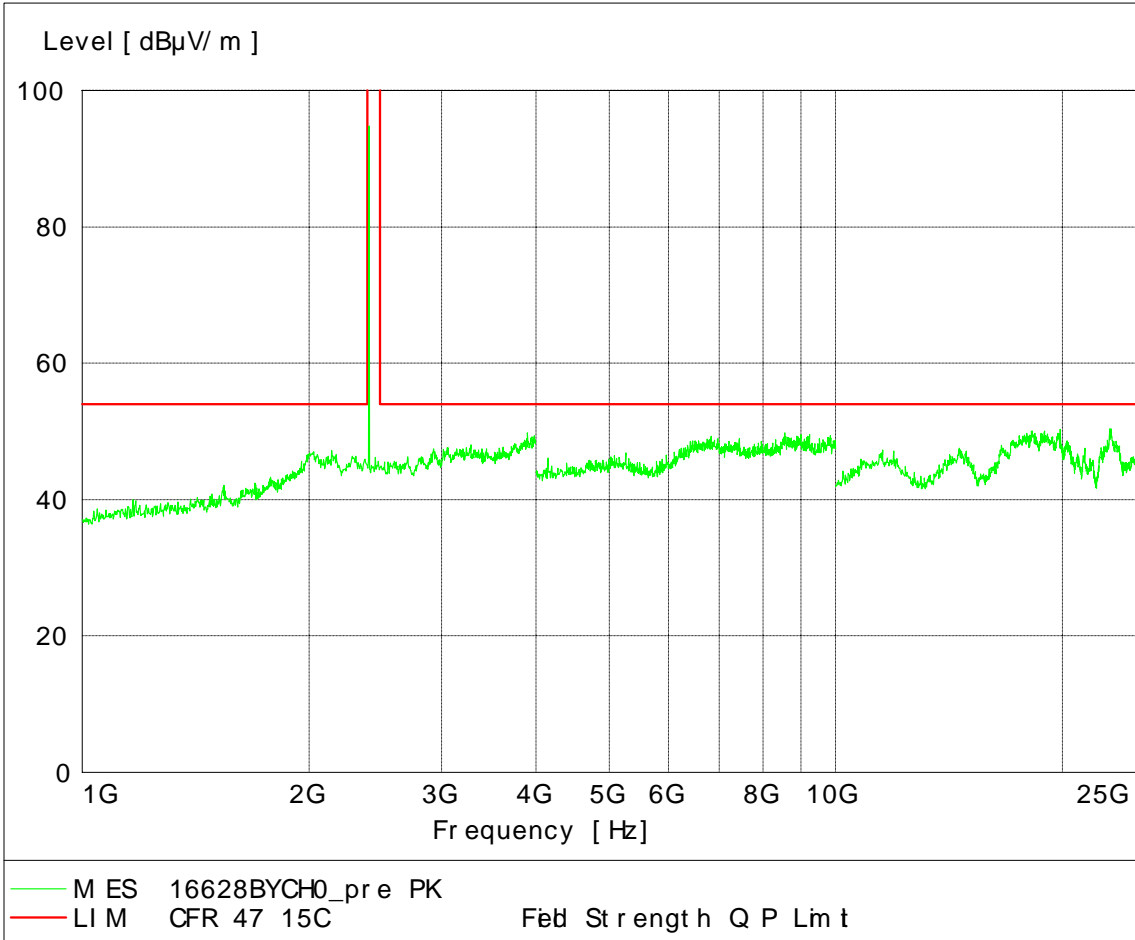


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2400 | 94.84 | Peak | 99.9 |

**Radiated Emissions
CH 0 2402 MHz Z-Axis
GREEN HORIZONTAL AND VERTICAL**

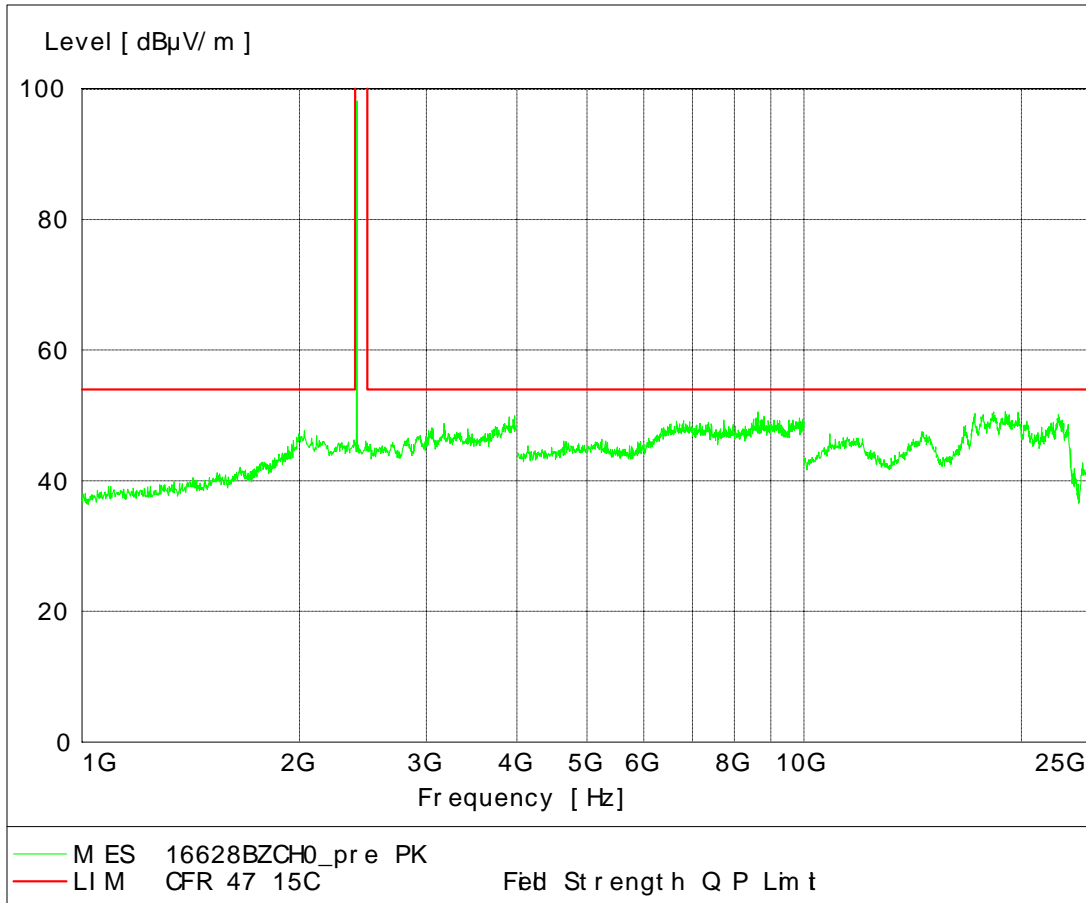


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2400 | 98.14 | Peak | 99.9 |

**Radiated Emissions
CH 39 2441 MHz X-Axis
GREEN HORIZONTAL AND VERTICAL**

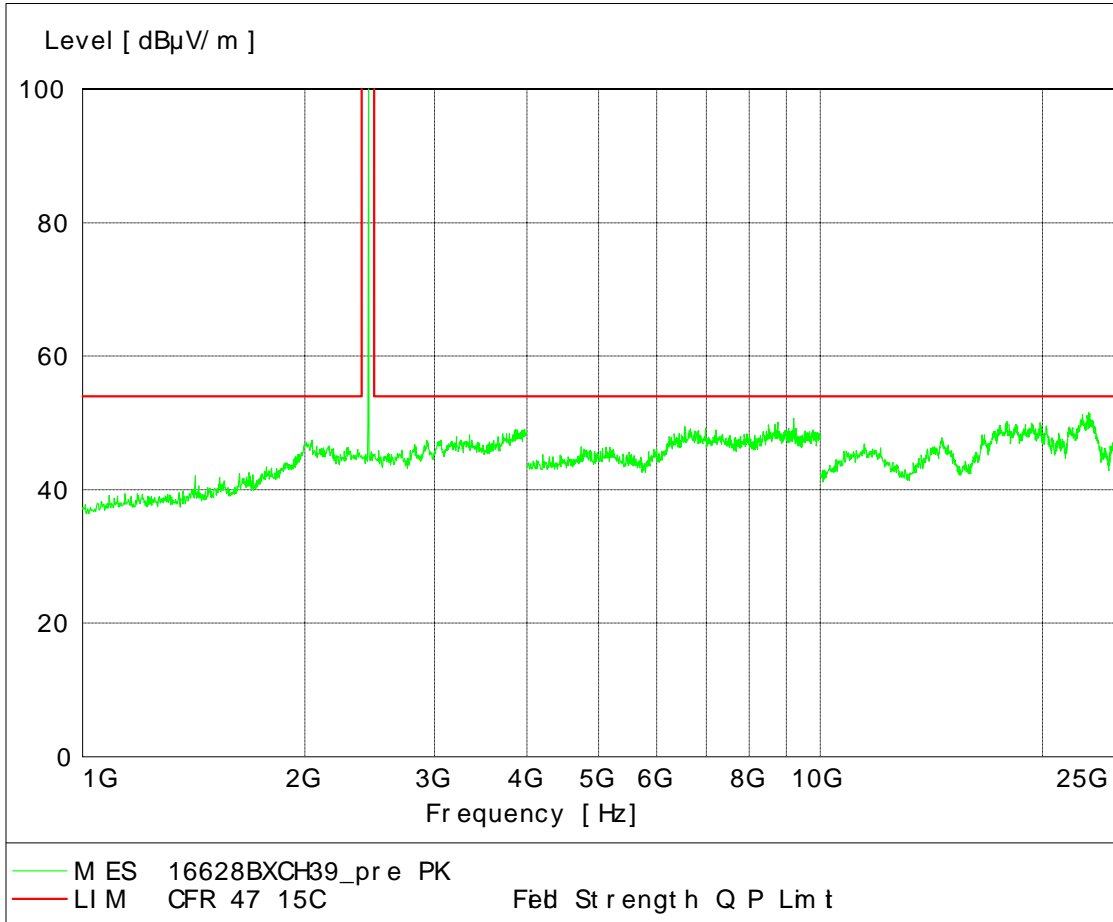


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 24408 | 101.86 | Peak | 99 |

**Radiated Emissions
CH 39 2441 MHz Y-Axis
GREEN HORIZONTAL AND VERTICAL**

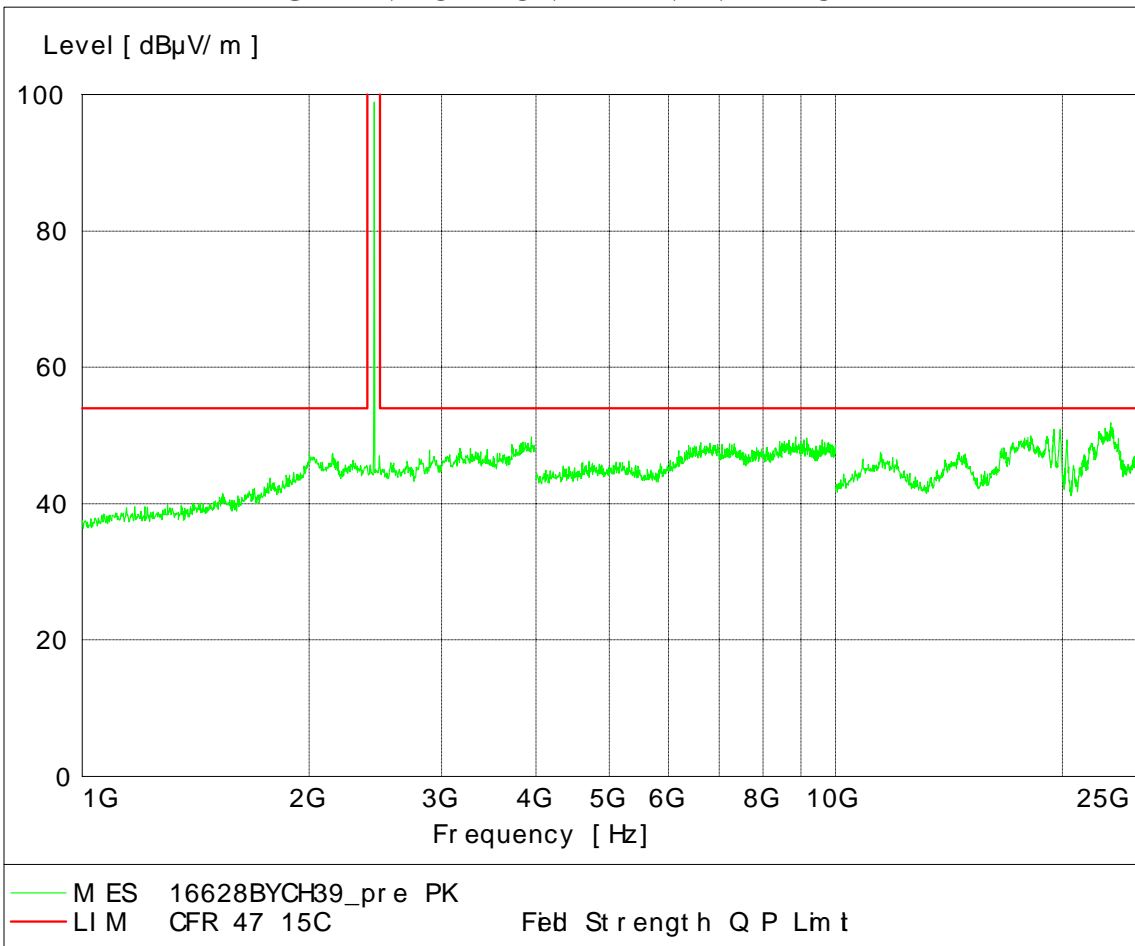


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2440 | 98.93 | Peak | 99 |

**Radiated Emissions
CH 39 2441 MHz Z-Axis
GREEN HORIZONTAL AND VERTICAL**

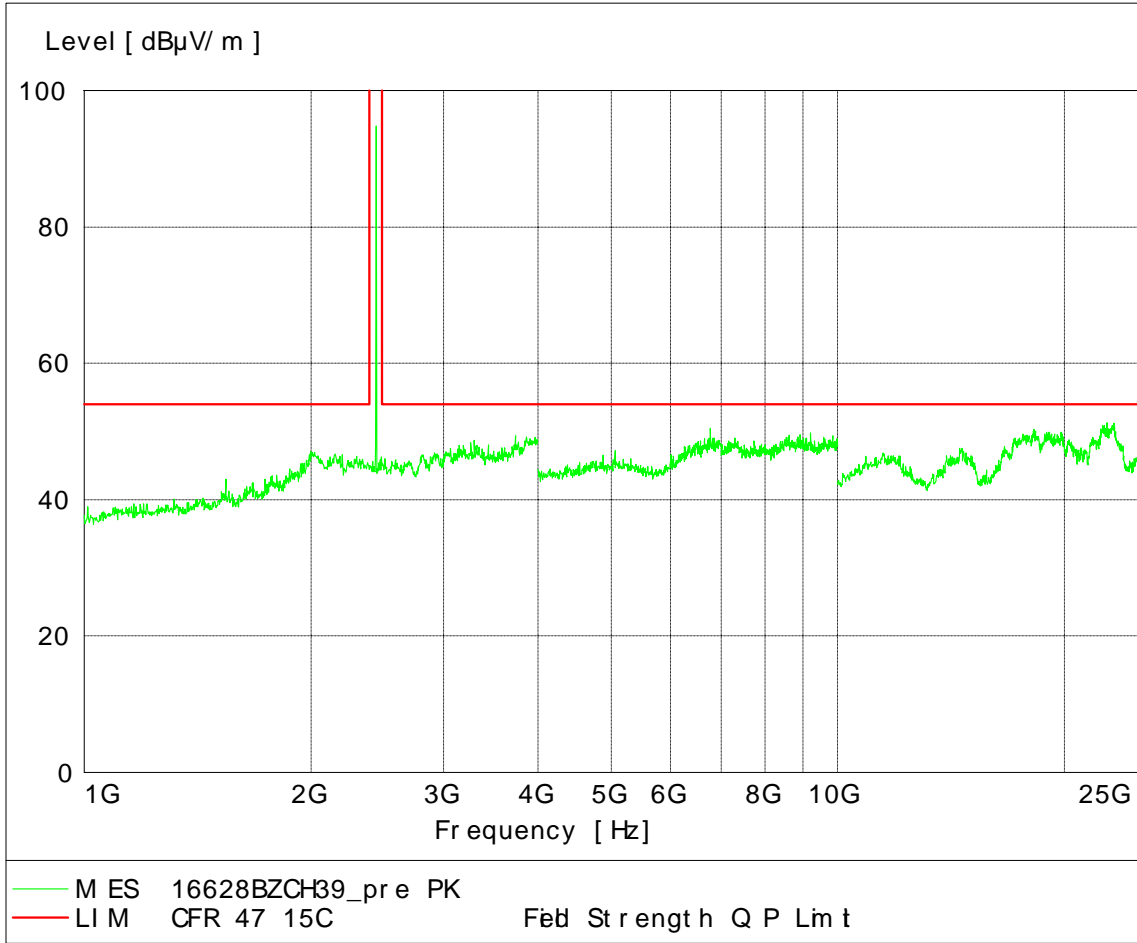


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2441 | 94.76 | Peak | 99.9 |

**Radiated Emissions
CH 78 2480 MHz X-Axis
GREEN HORIZONTAL AND VERTICAL**

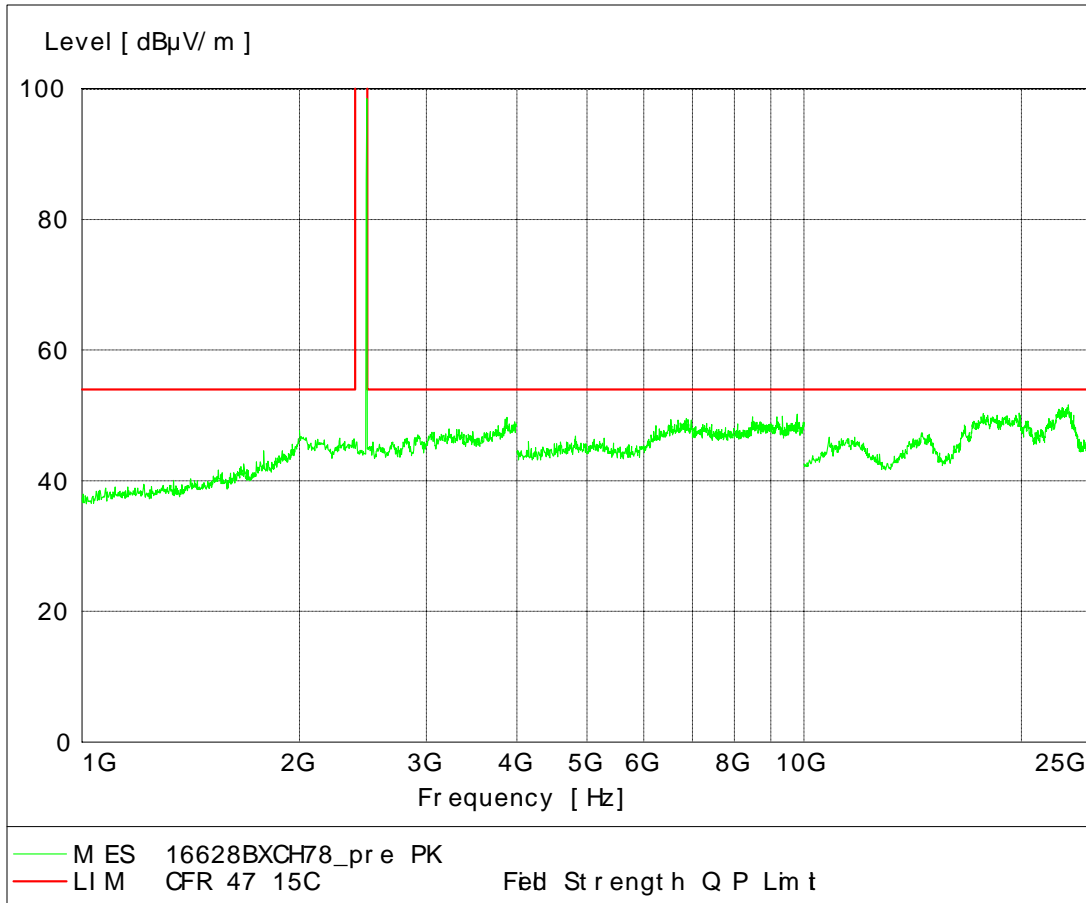


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2477 | 85.99 | Peak | 99 |

**Radiated Emissions
CH 78 2480 MHz Y-Axis
GREEN HORIZONTAL AND VERTICAL**

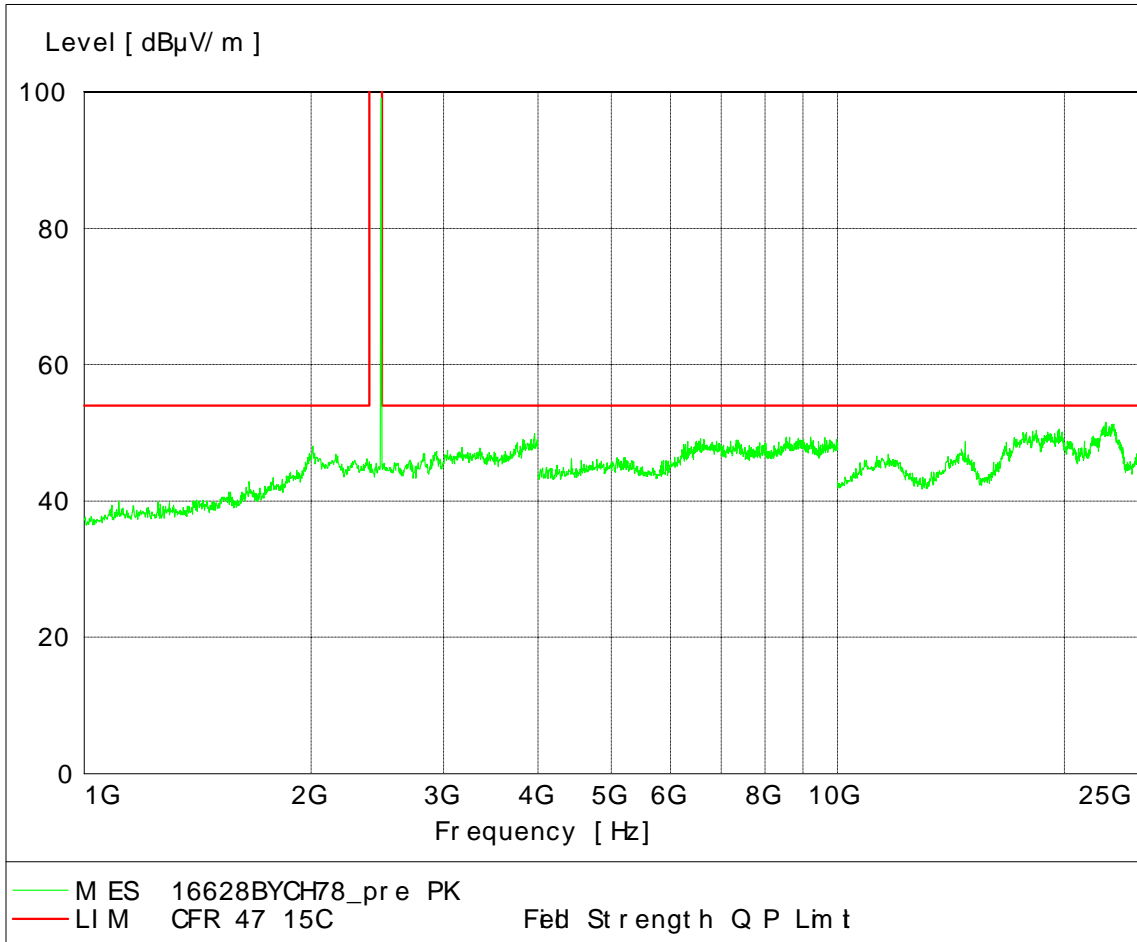


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2477 | 89.41 | Peak | 99 |

**Radiated Emissions
CH 78 2480 MHz Z-Axis
GREEN HORIZONTAL AND VERTICAL**

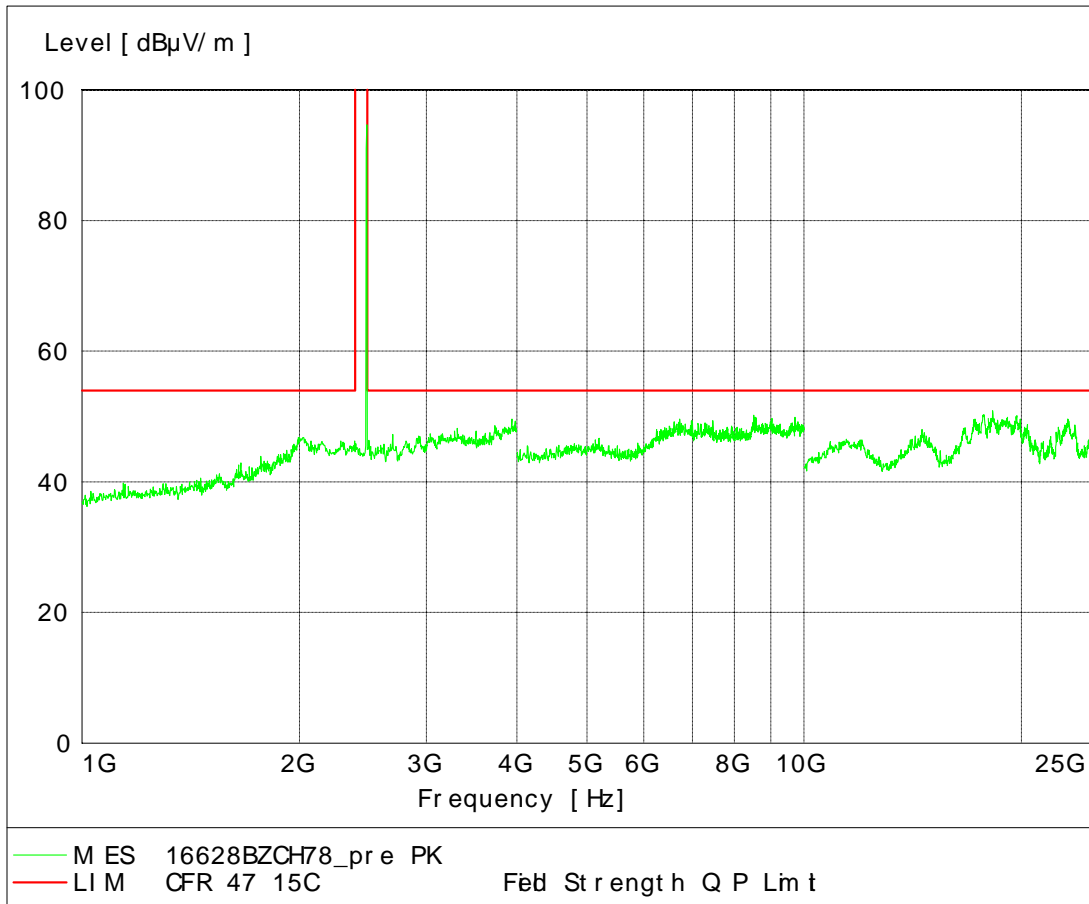


| Frequency MHz | Measured dBµV/m | Detector Type | Limit dBµV/m |
|------------------|--------------------|------------------|-----------------|
| 2477 | 91.00 | Peak | 99 |


Radiated Emissions Band Edge CH 0 2402 MHz X-Axis

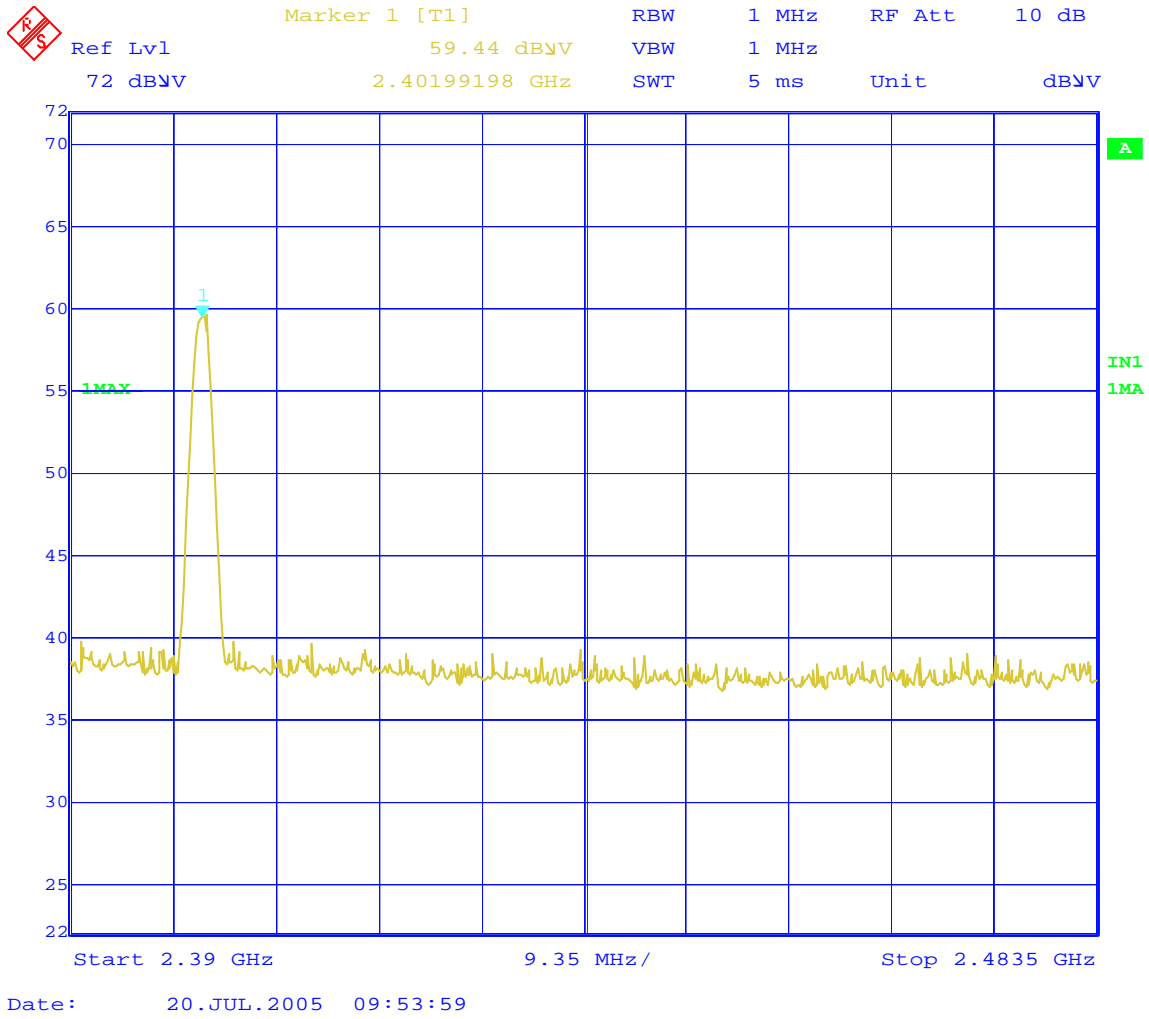


Radiated Emissions Band Edge CH 0 2402 MHz Y-Axis

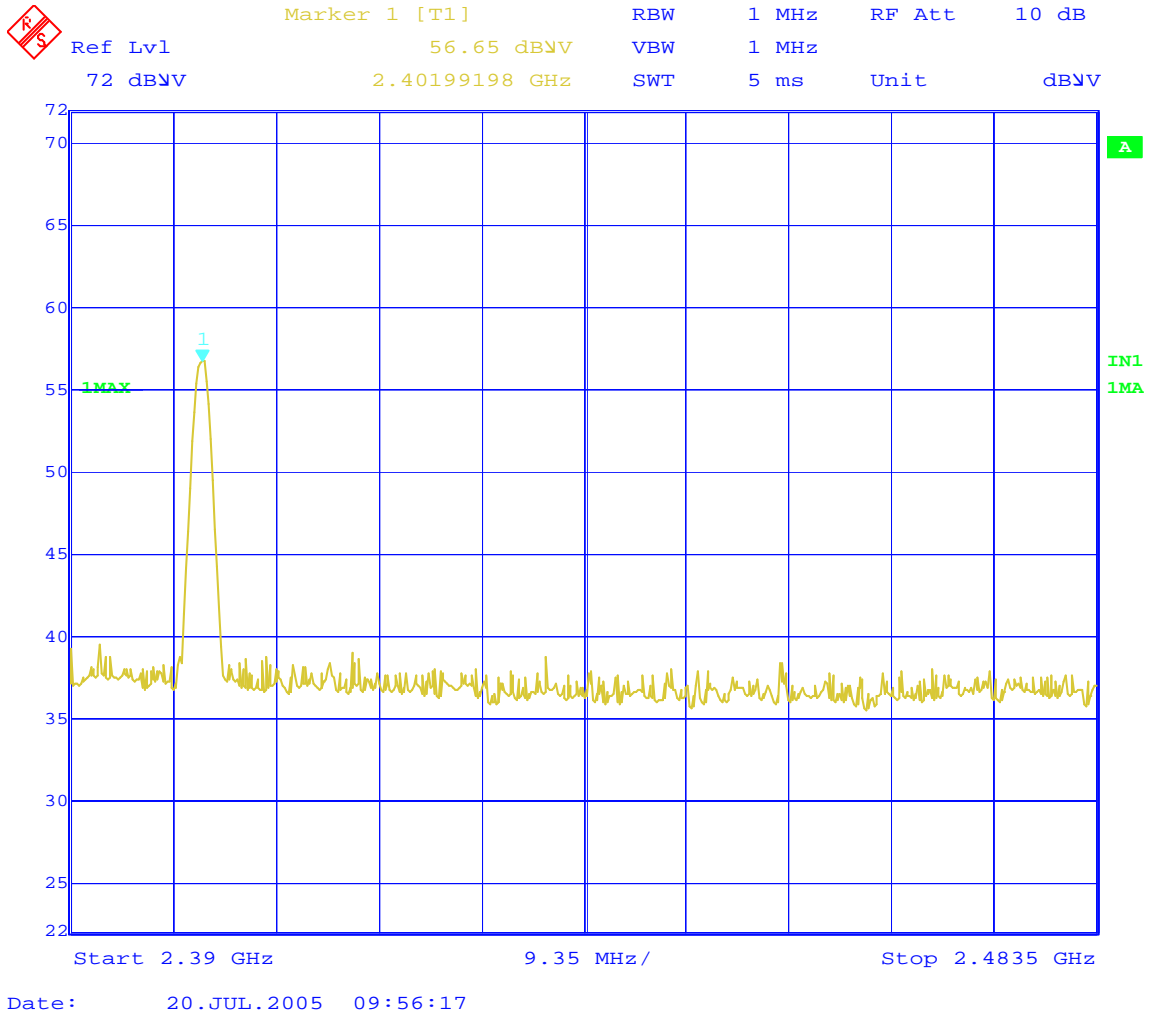


Radiated Emissions Band Edge CH 0 2402 MHz Z-Axis

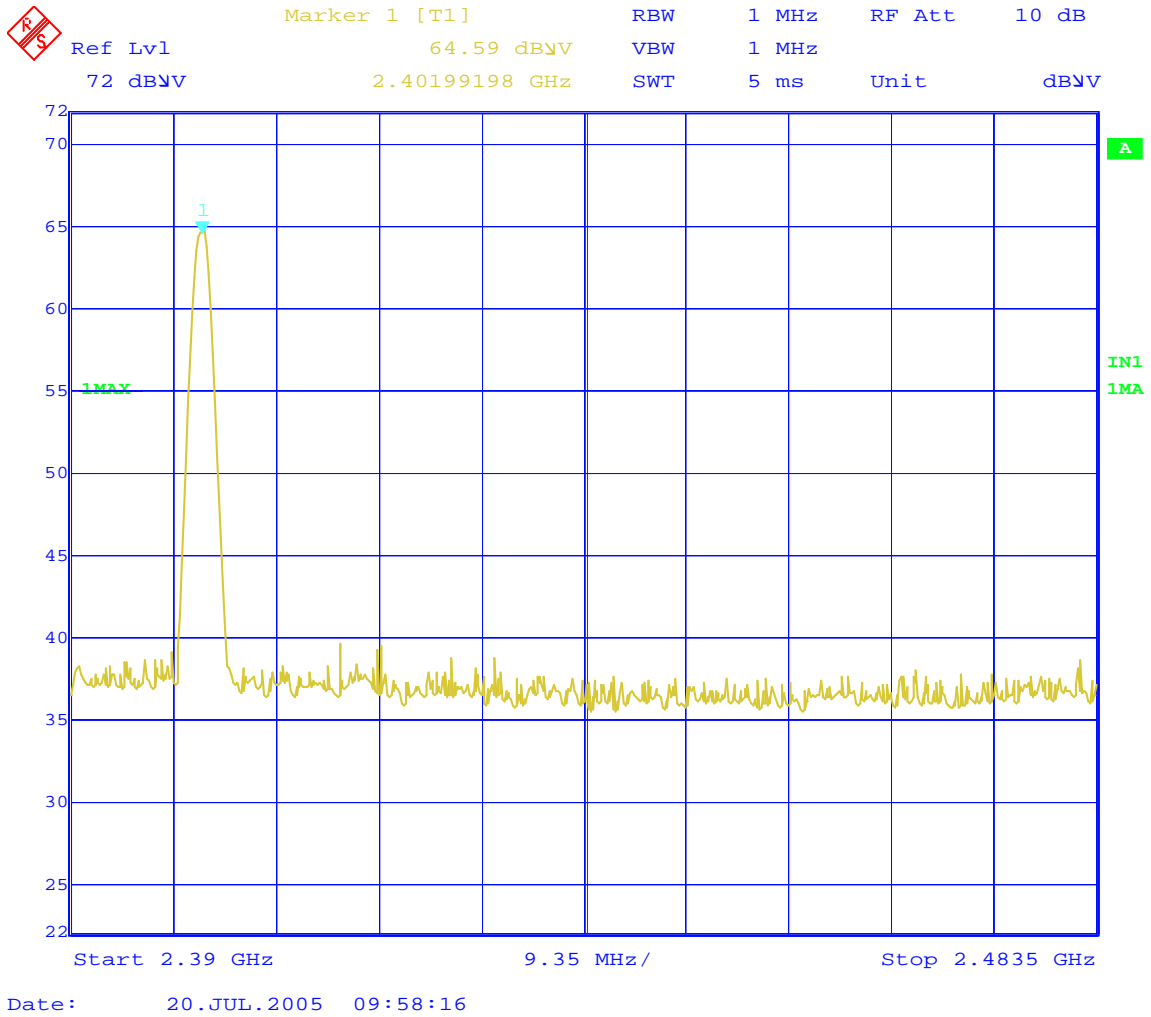


Radiated Emissions Band Edge CH 39 2442 MHz X-Axis

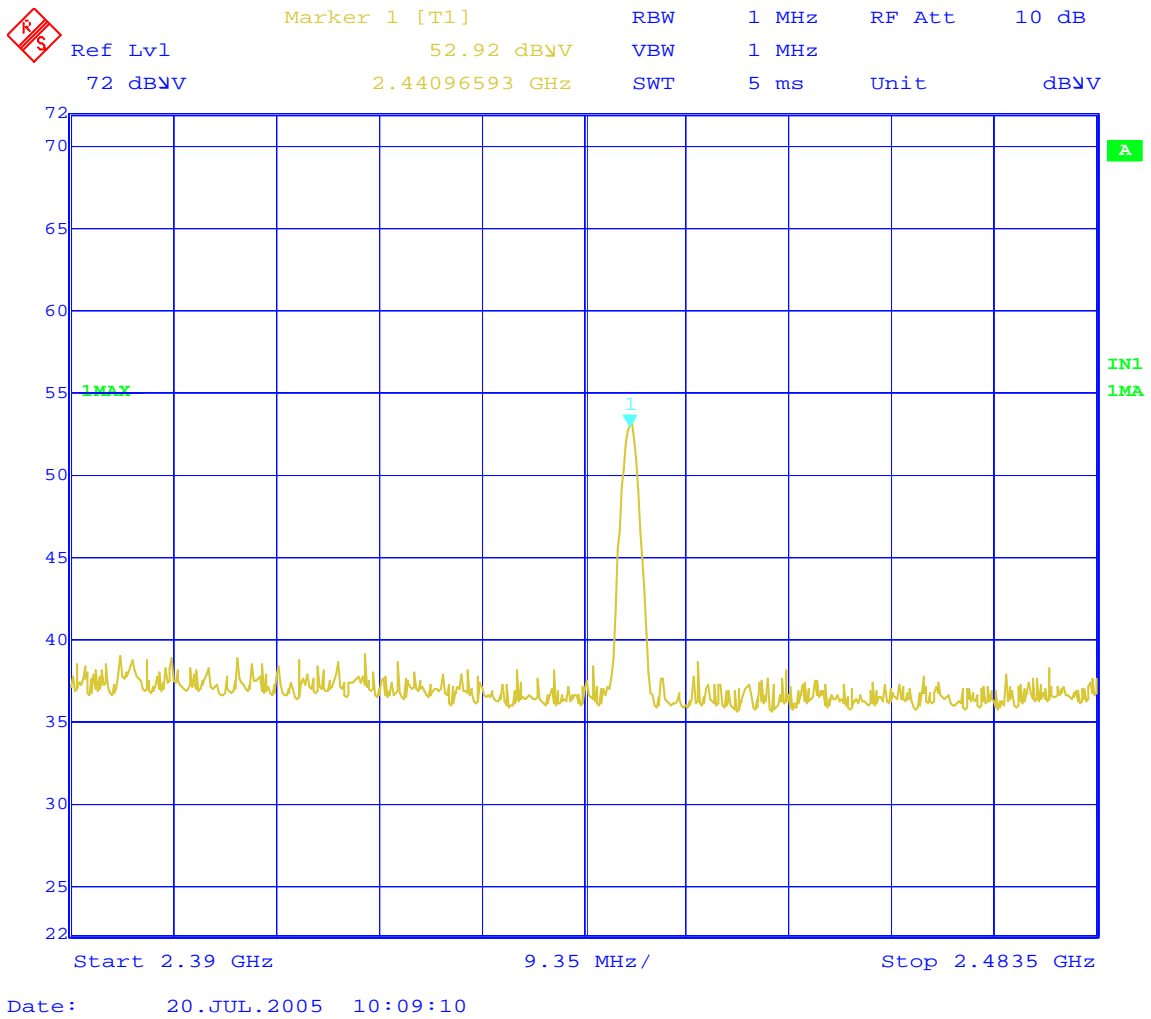


Radiated Emissions Band Edge CH 39 2442 MHz Y-Axis

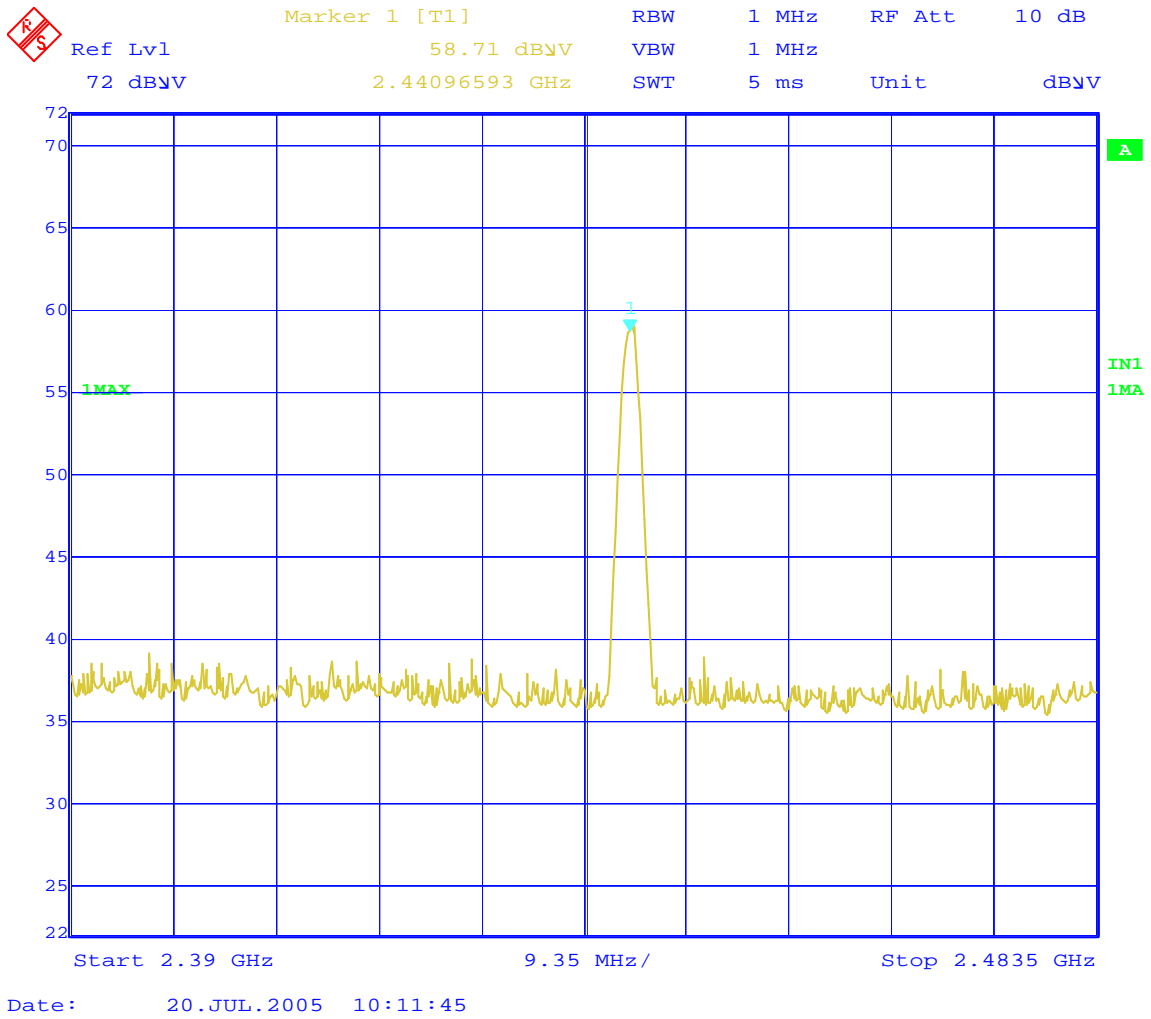


Radiated Emissions Band Edge CH 39 2442 MHz Z-Axis

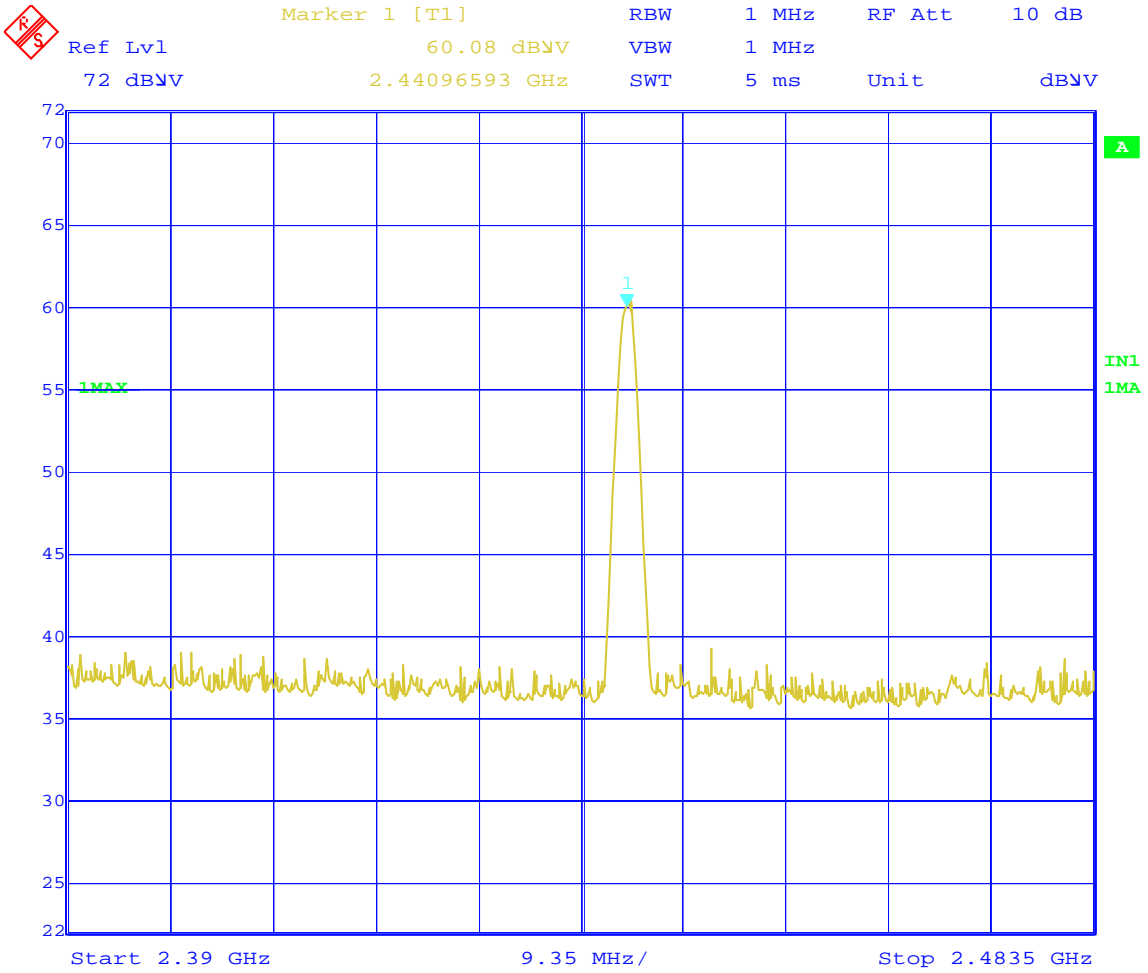


Radiated Emissions Band Edge CH 78 2480 MHz X-Axis

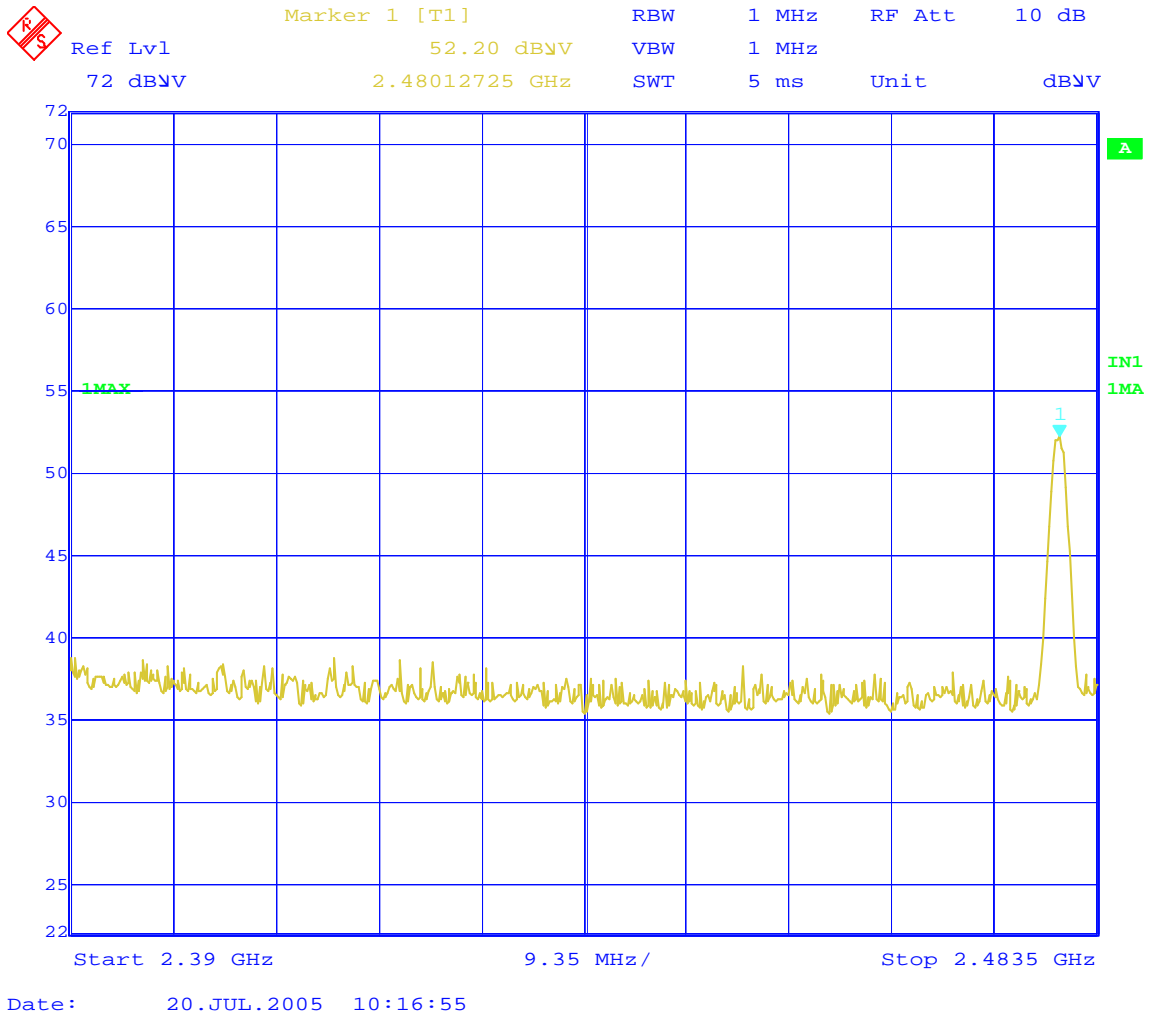

Radiated Emissions Band Edge CH 78 2480MHz Y-Axis

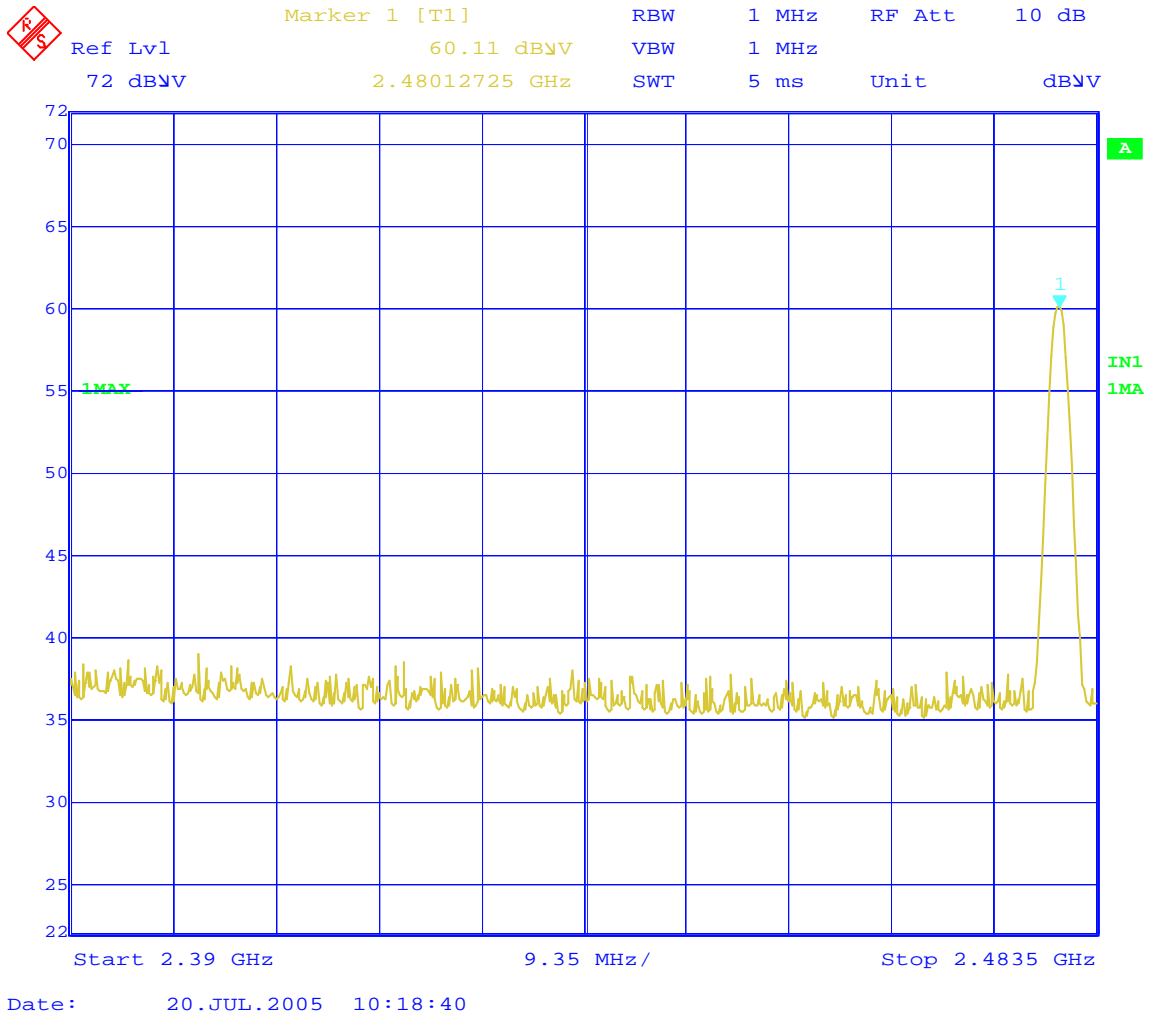

Radiated Emissions Band Edge CH 78 2480 MHz Z-Axis

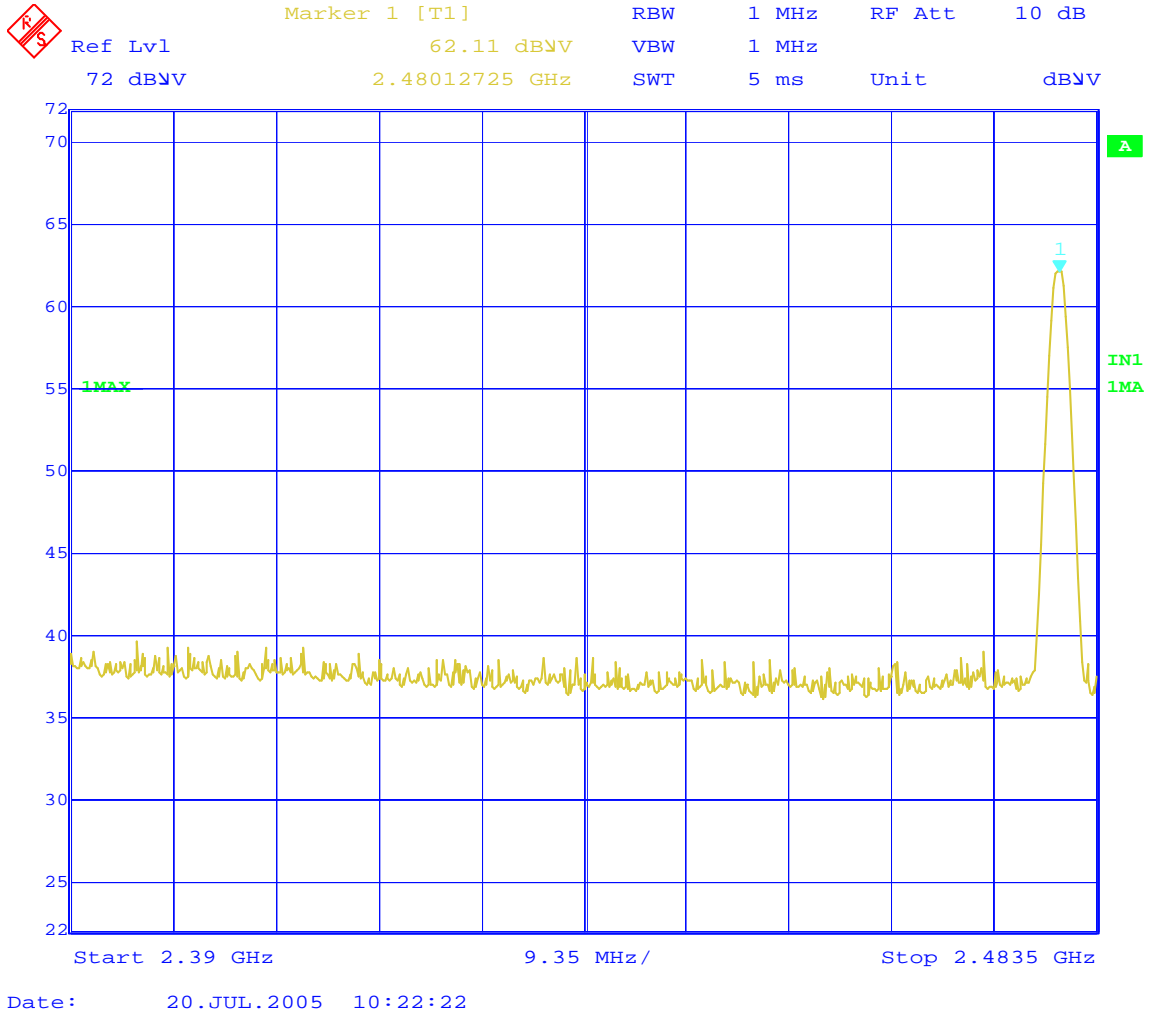

PEAK OUTPUT POWER


CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results

See Attached

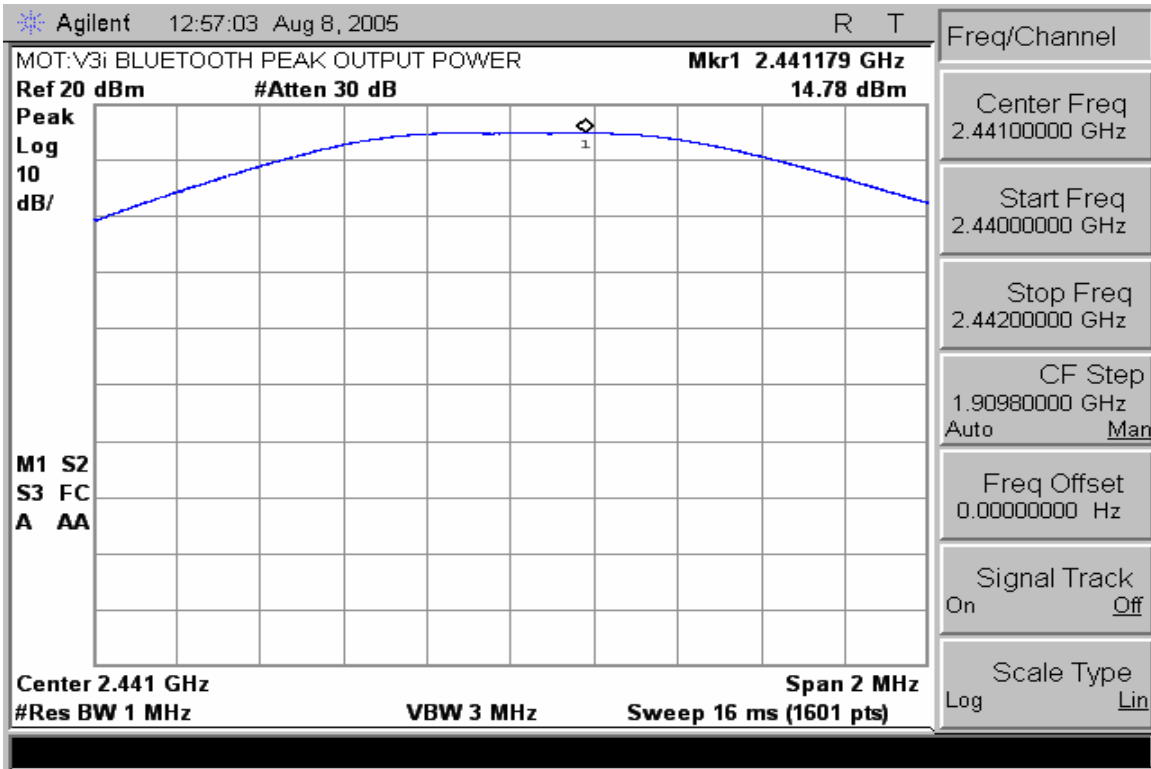

Peak Output Power

BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See Attached:

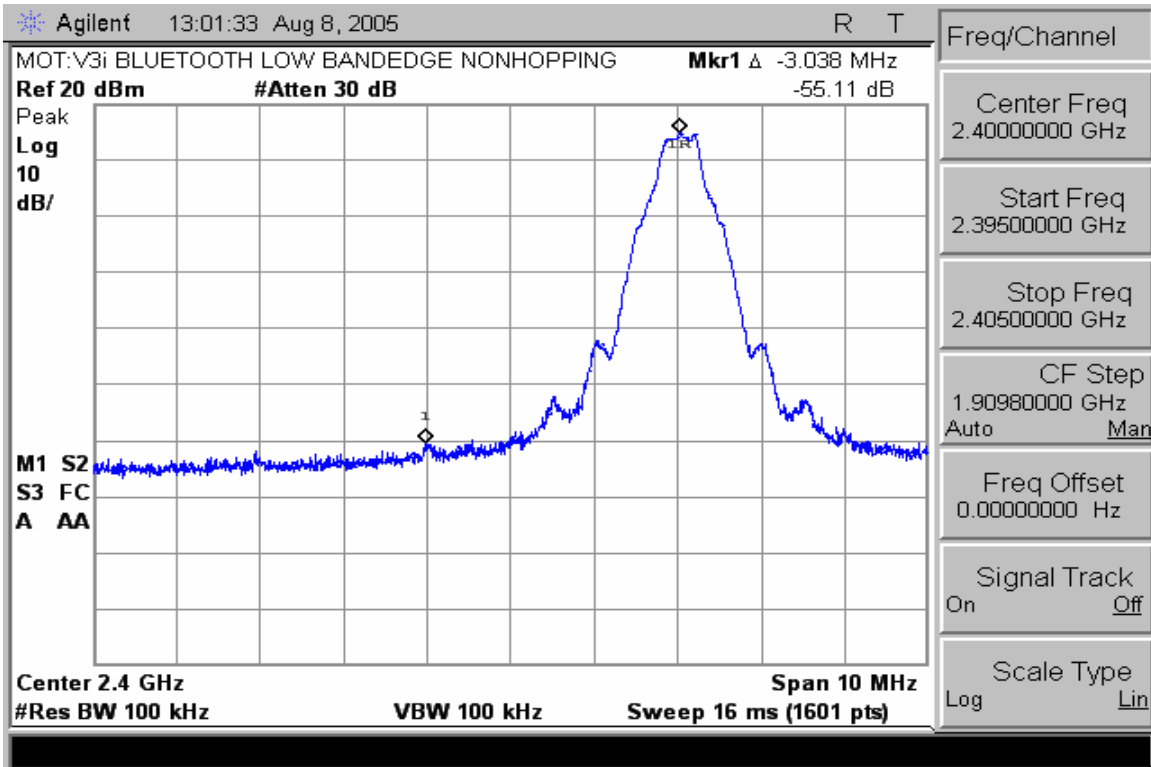


Low Band Edge with Hopping Disabled

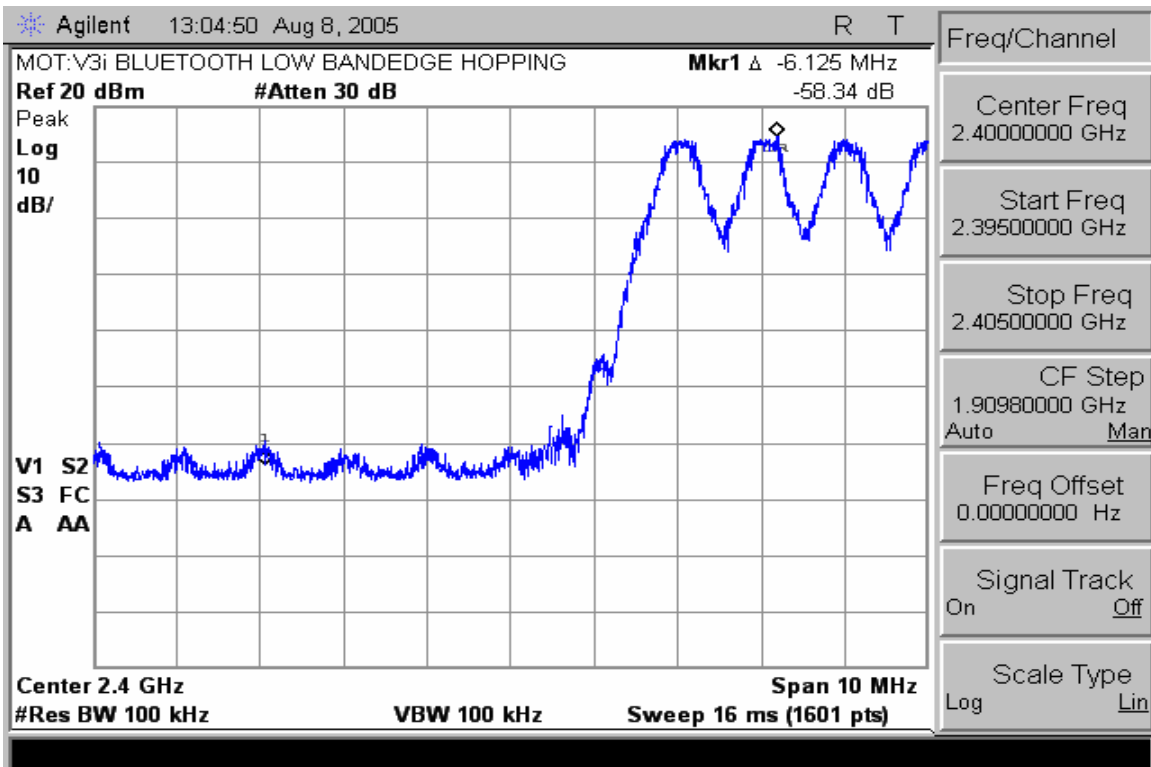

Low Band Edge with Hopping Enabled

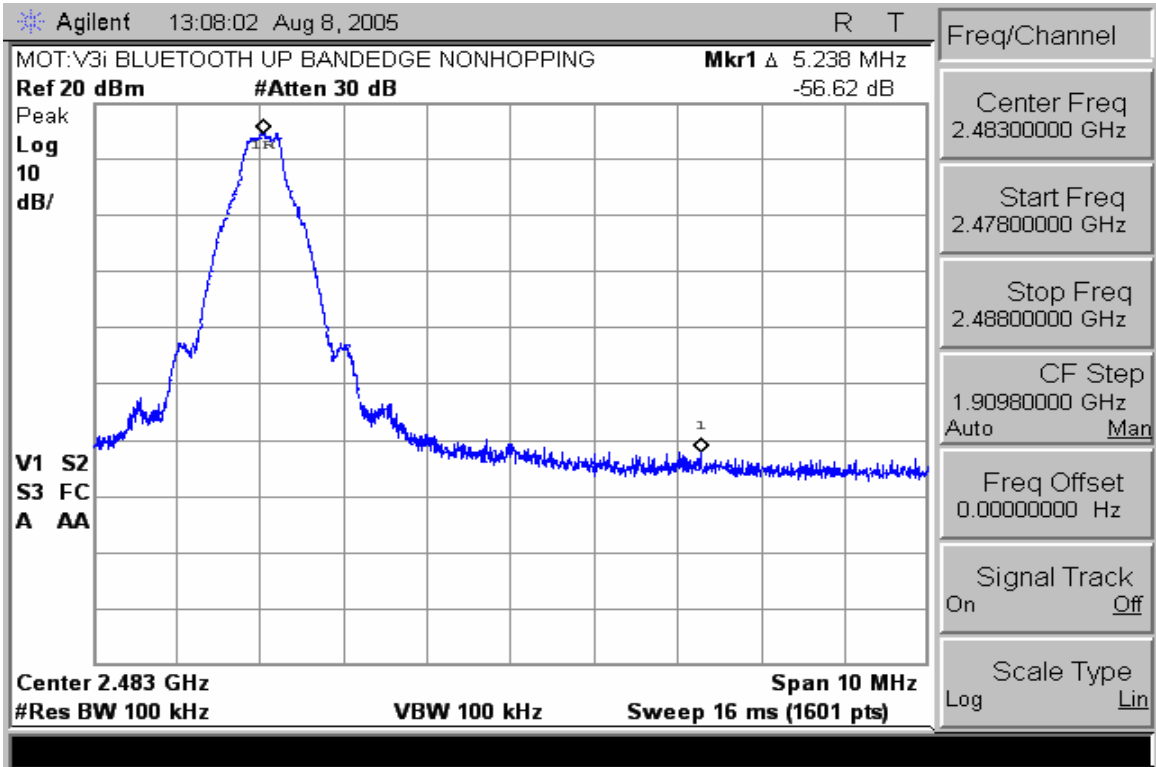

High Band Edge with Hopping Disabled

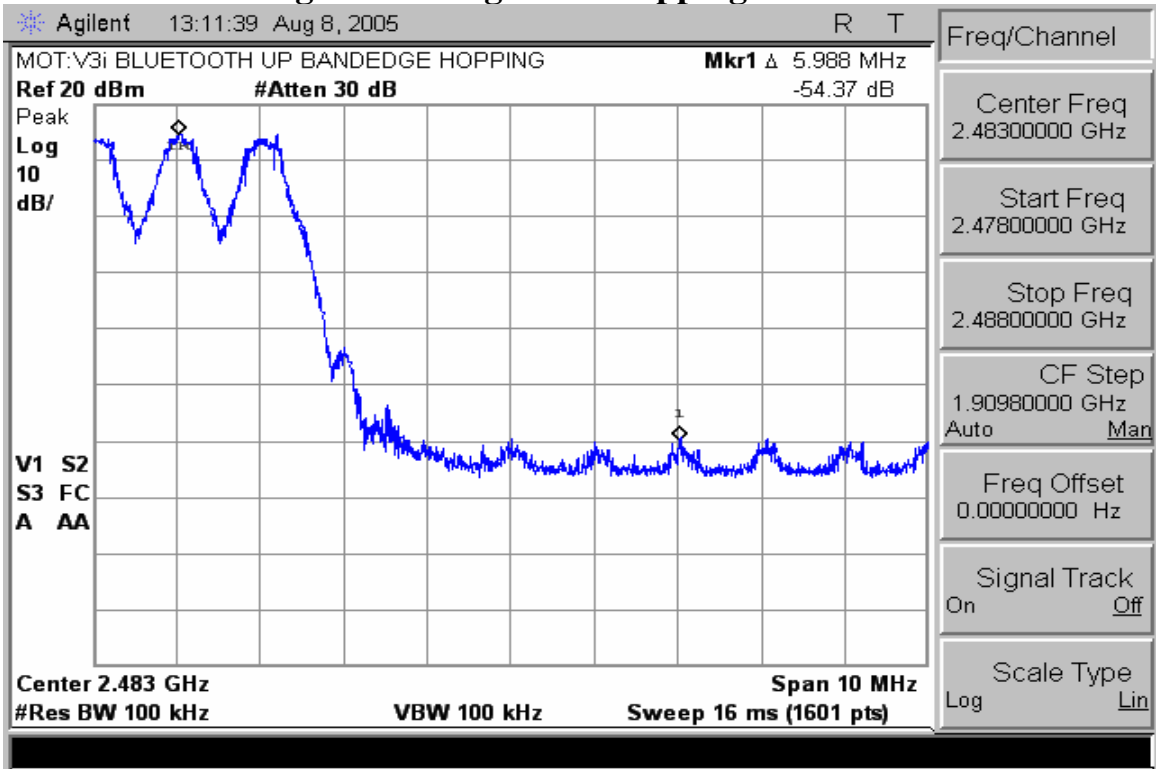

High Band Edge with Hopping Enabled

SPURIOUS RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

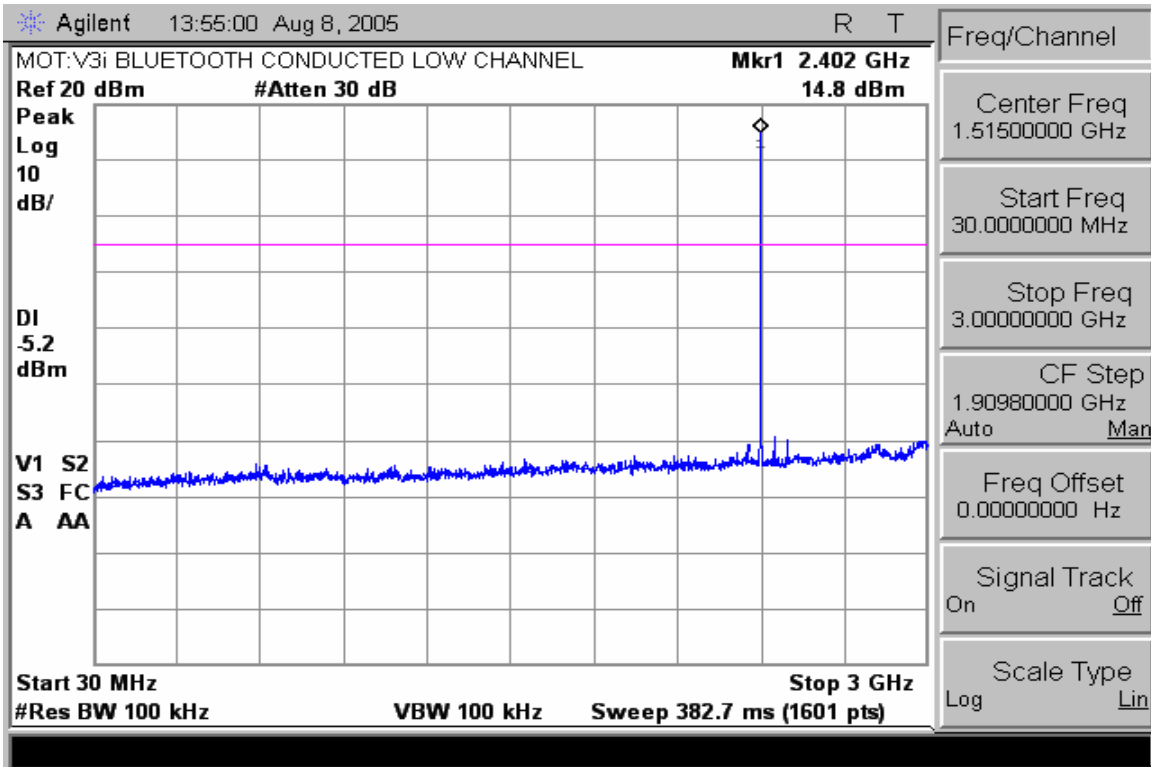


Conducted Spurious Emissions 30-3000MHz (Low Channel)

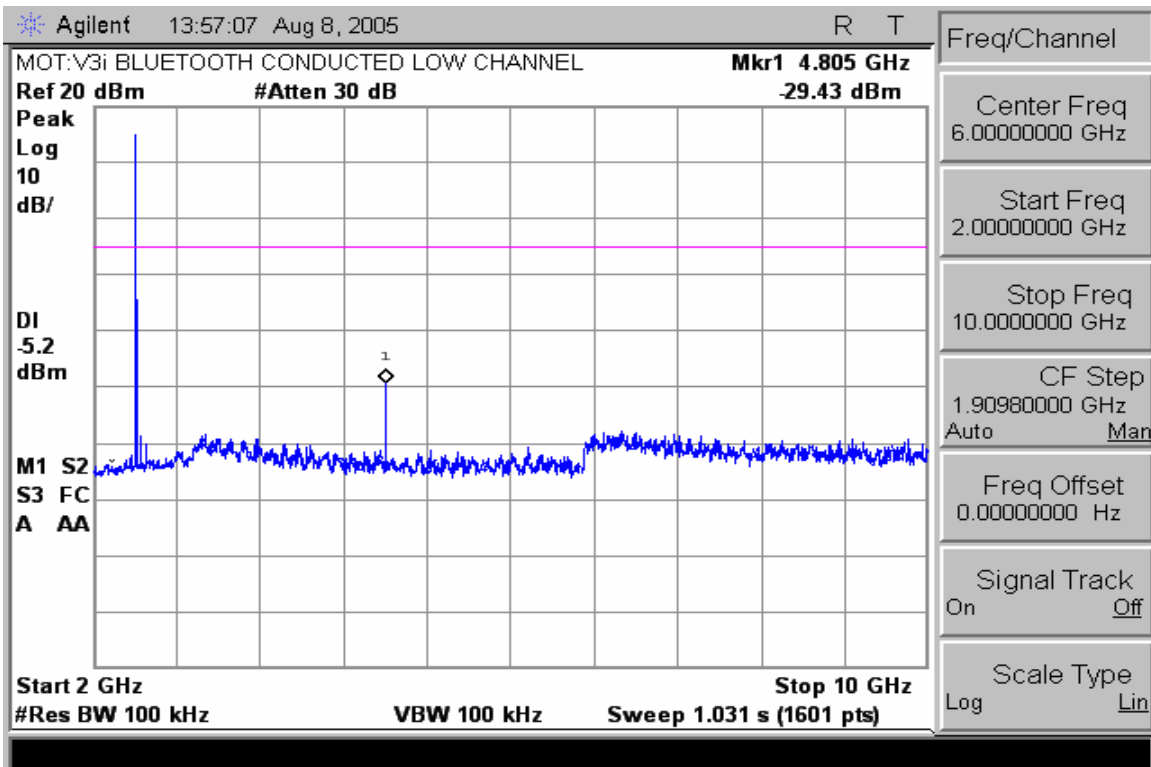


Conducted Spurious Emissions 2-10GHz (Low Channel)

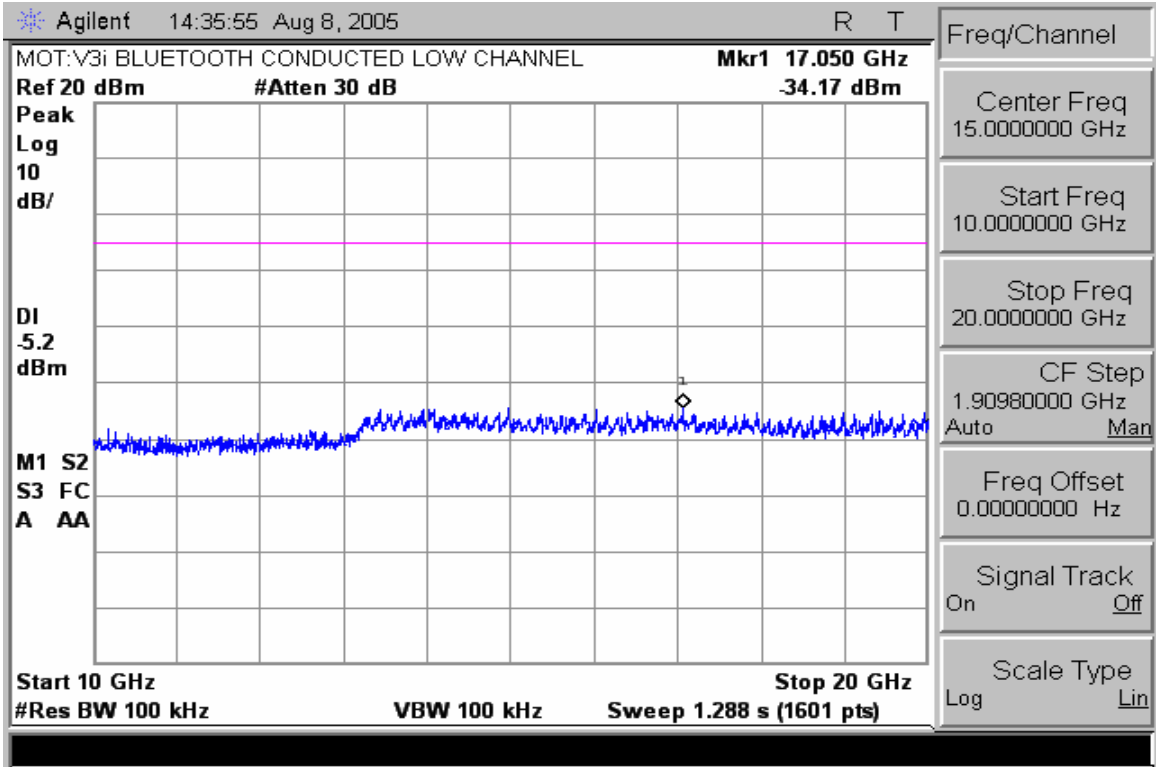


Conducted Spurious Emissions 10-20GHz (Low Channel)

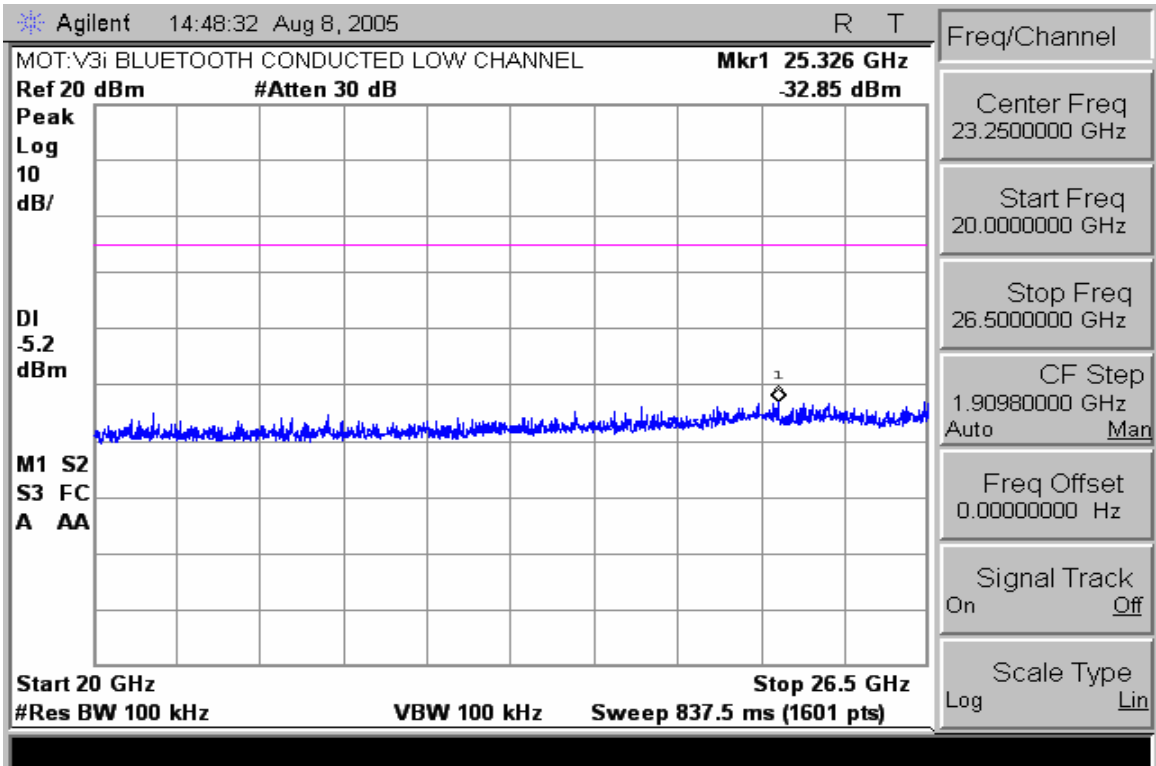


Conducted Spurious Emissions 20-26.5GHz (Low Channel)

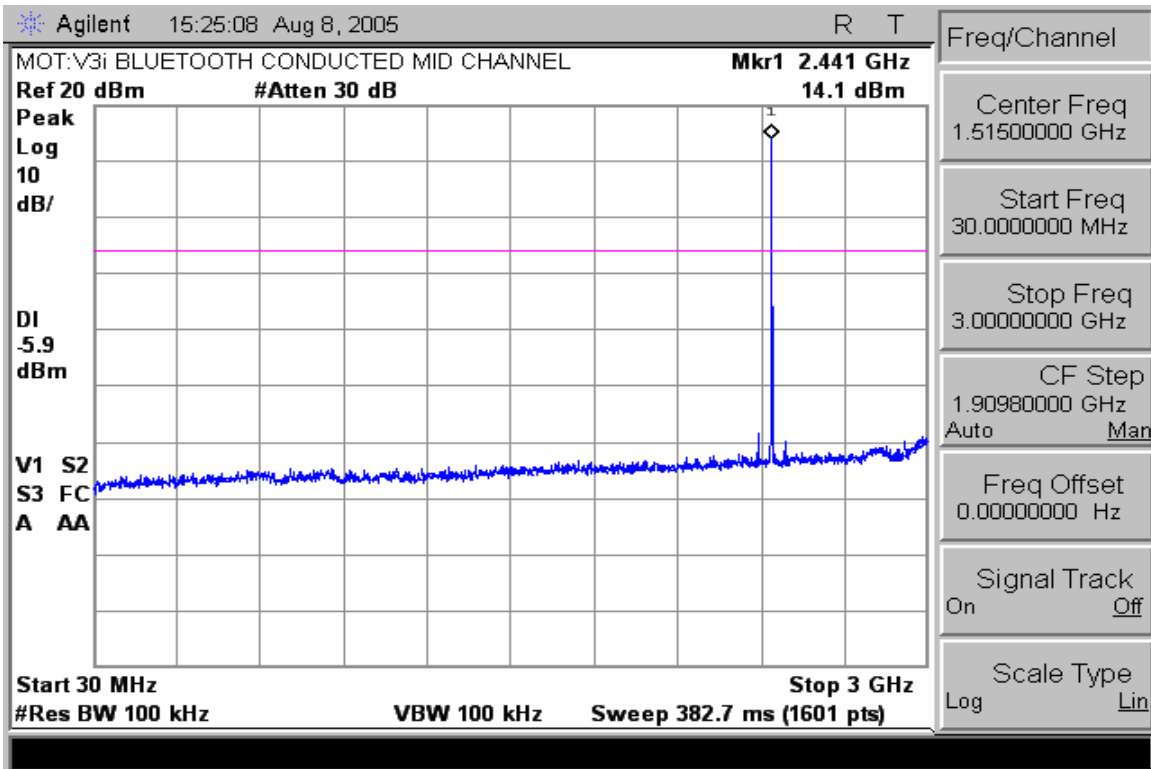


Conducted Spurious Emissions 30-3000MHz (Mid Channel)

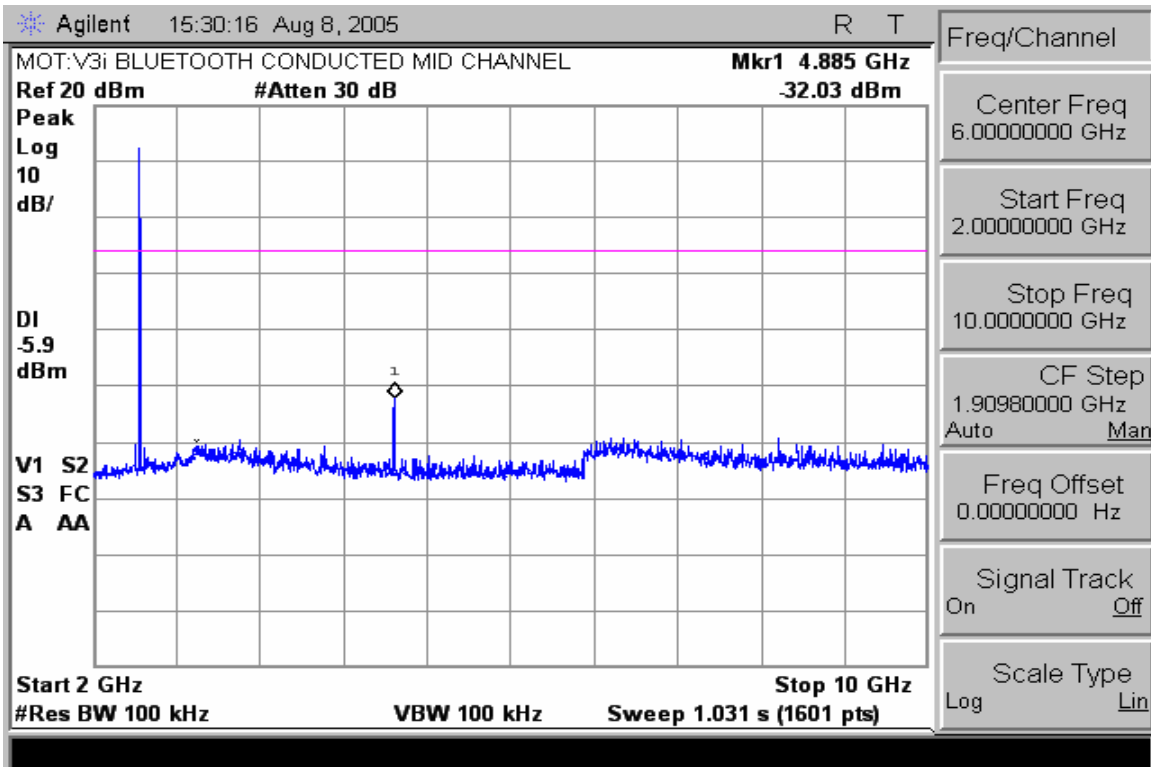


Conducted Spurious Emissions 2-10GHz (Mid Channel)

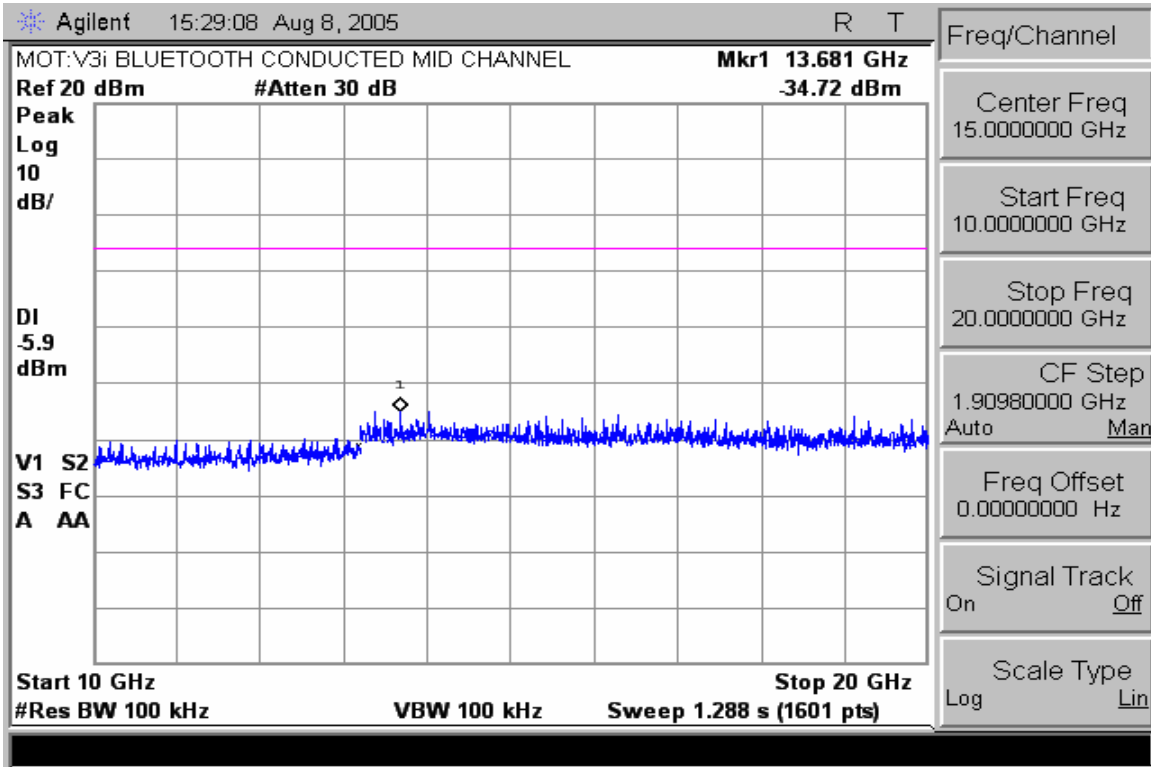


Conducted Spurious Emissions 10-20GHz (Mid Channel)

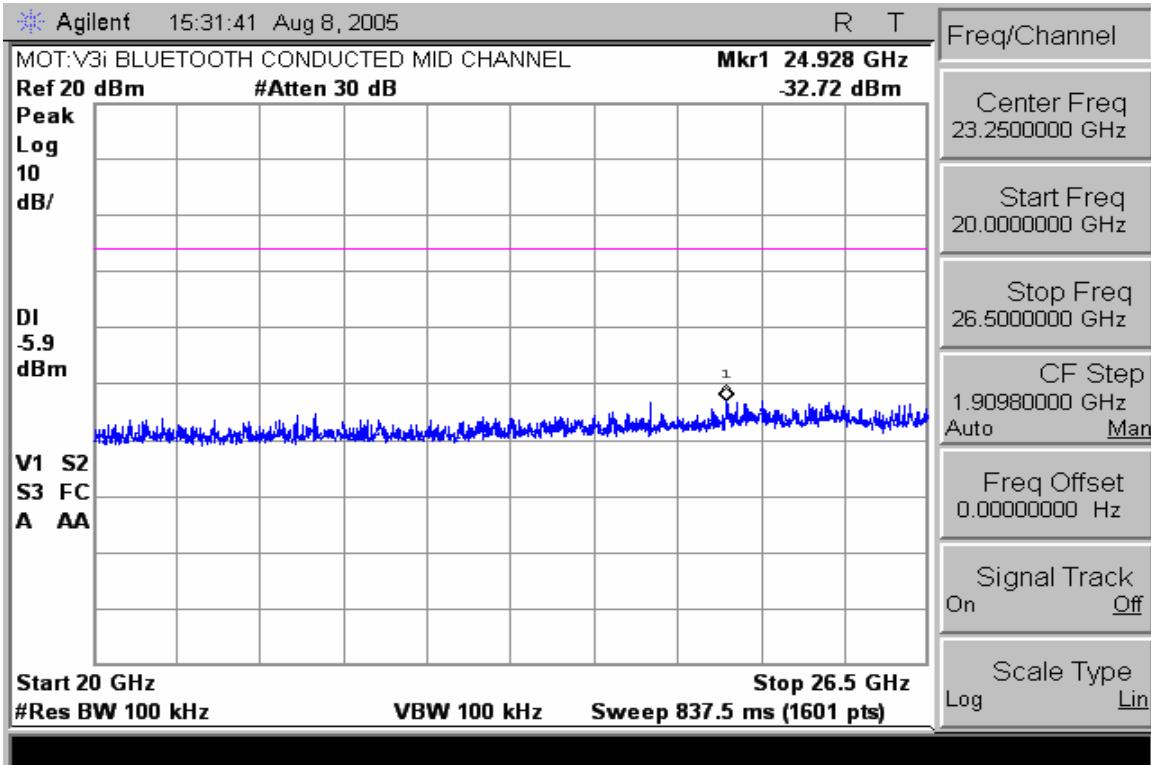


Conducted Spurious Emissions 20-26.5GHz (Mid Channel)

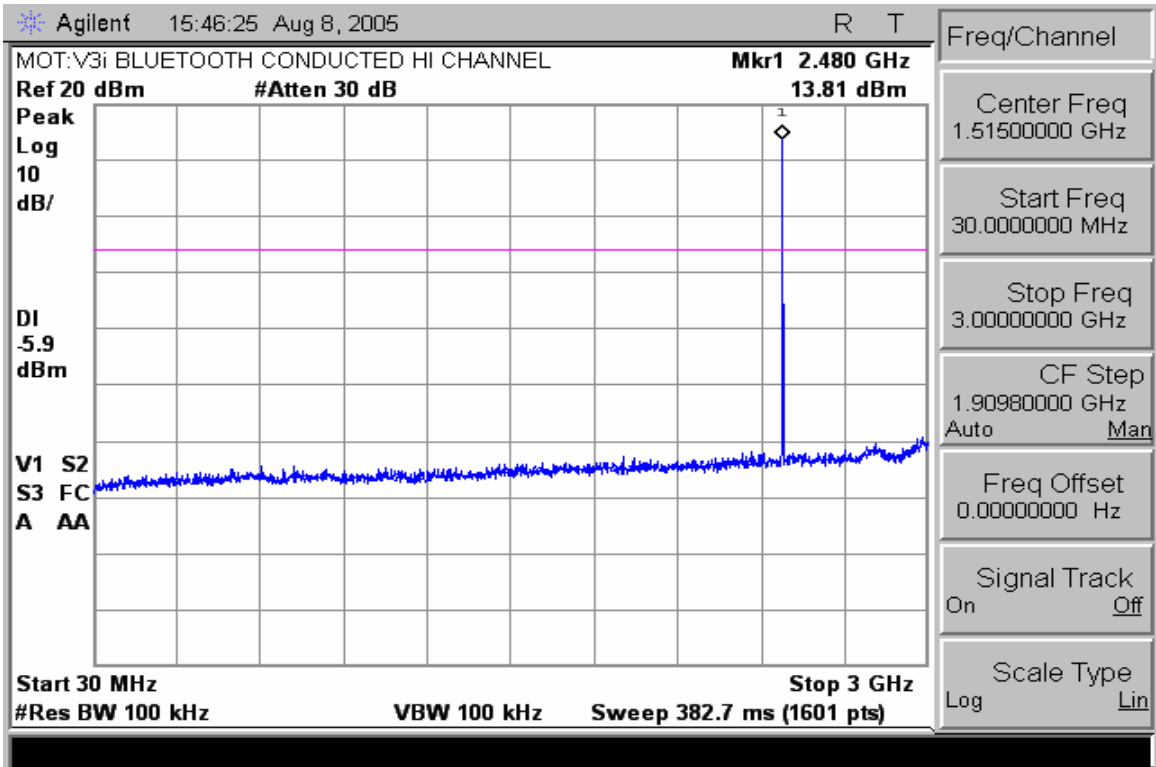


Conducted Spurious Emissions 30-3000MHz (High Channel)

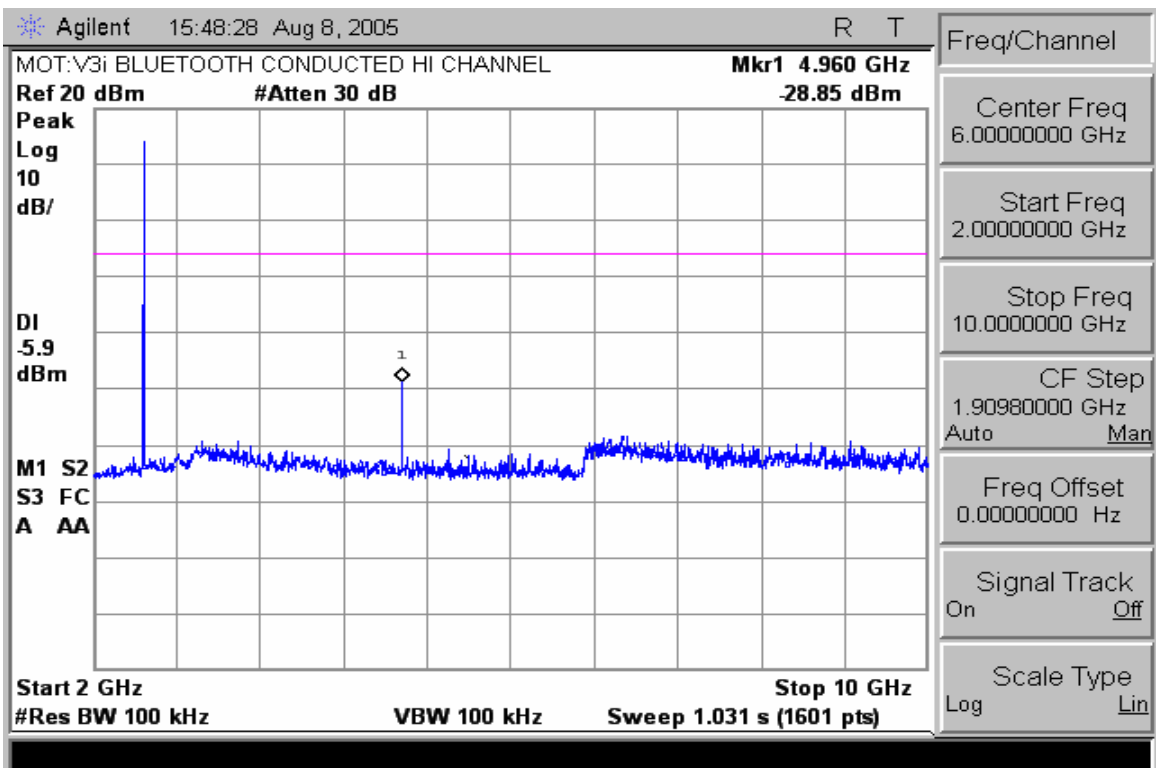

Conducted Spurious Emissions 2-10GHz (High Channel)

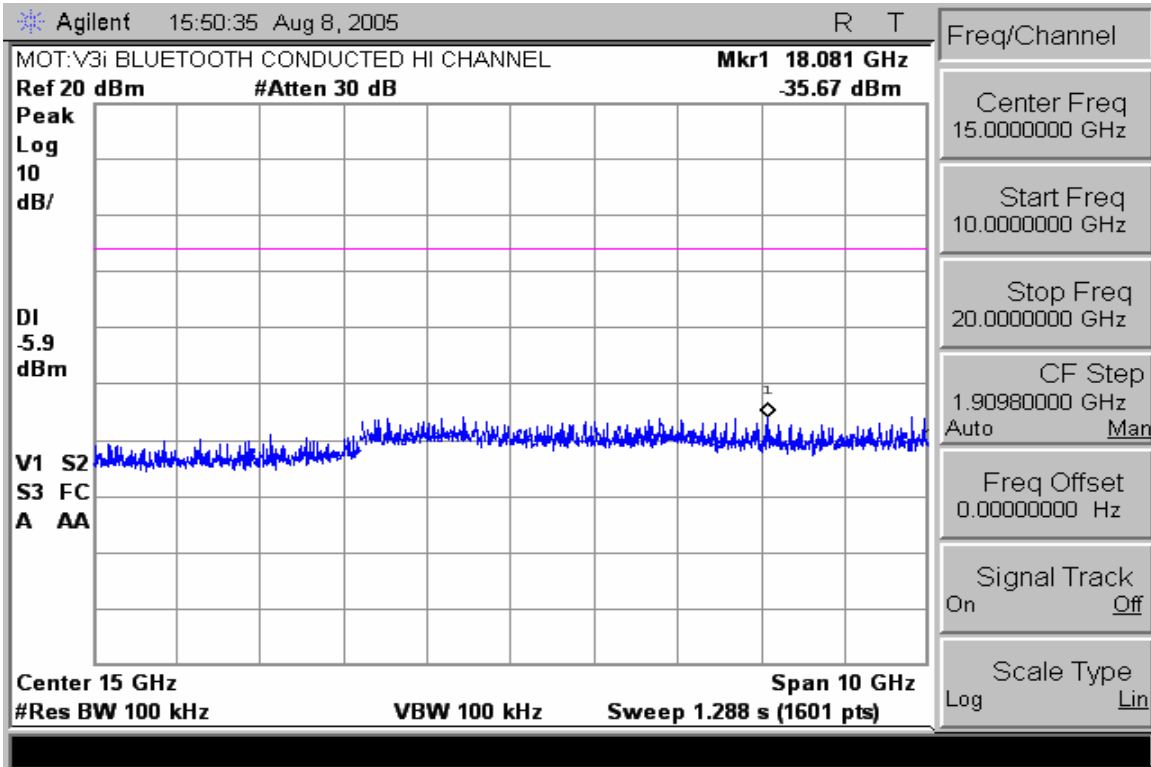

Conducted Spurious Emissions 10-20GHz (High Channel)

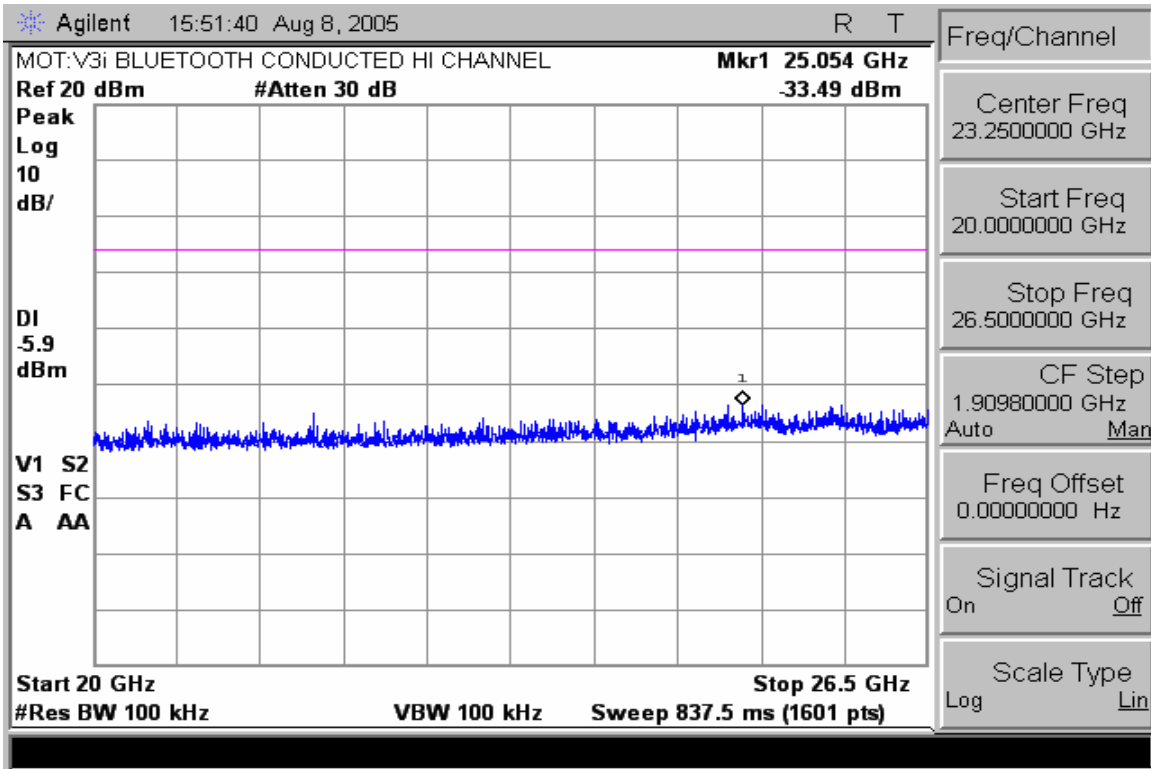

Conducted Spurious Emissions 20-26.5GHz (High Channel)

AC LINE CONDUCTED

CFR 47 Part 15.207


Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Measurement Results


See attached:

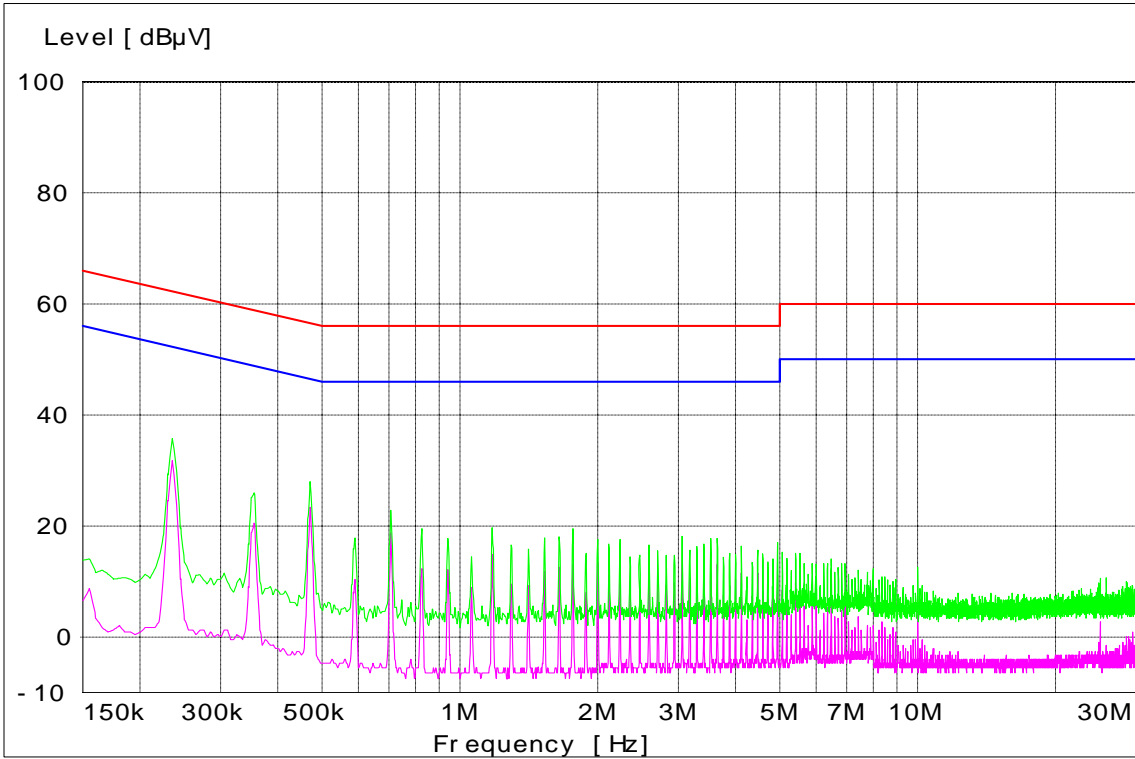


Channel 0 – 2402 MHz - Tx Mode - Neutral Coupling Hopping

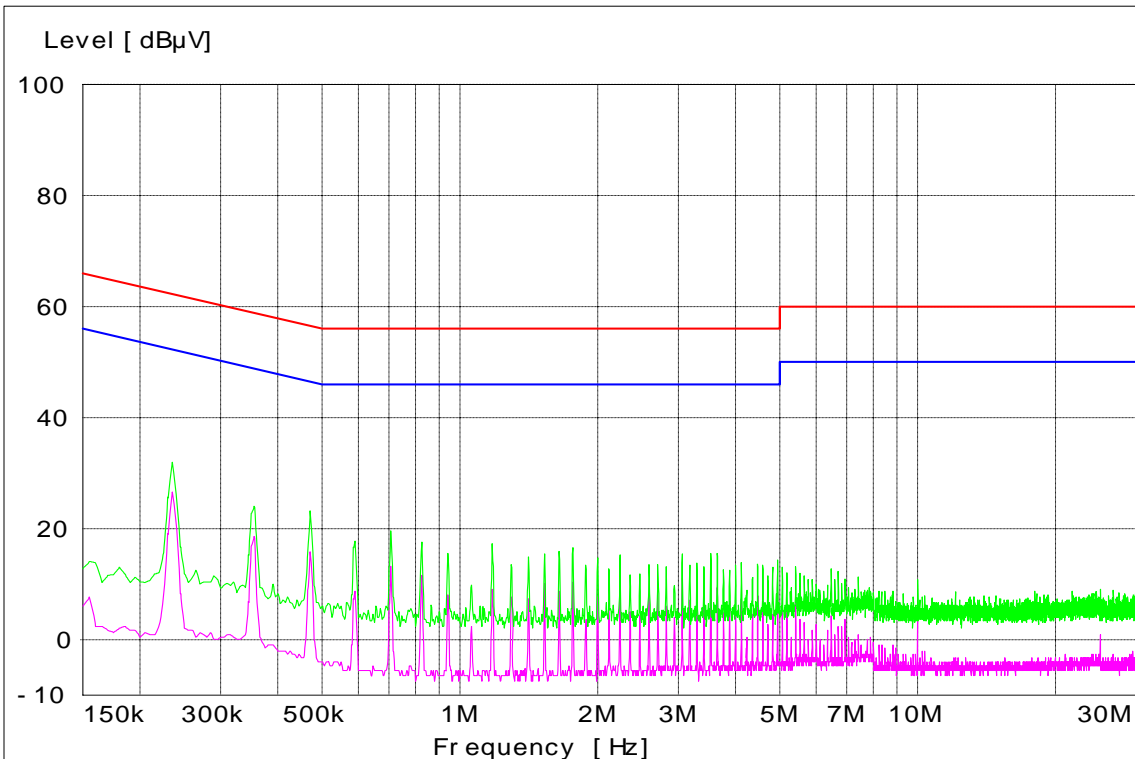


Channel 0 – 2402 MHz - Tx Mode - Line Coupling Nonhopping

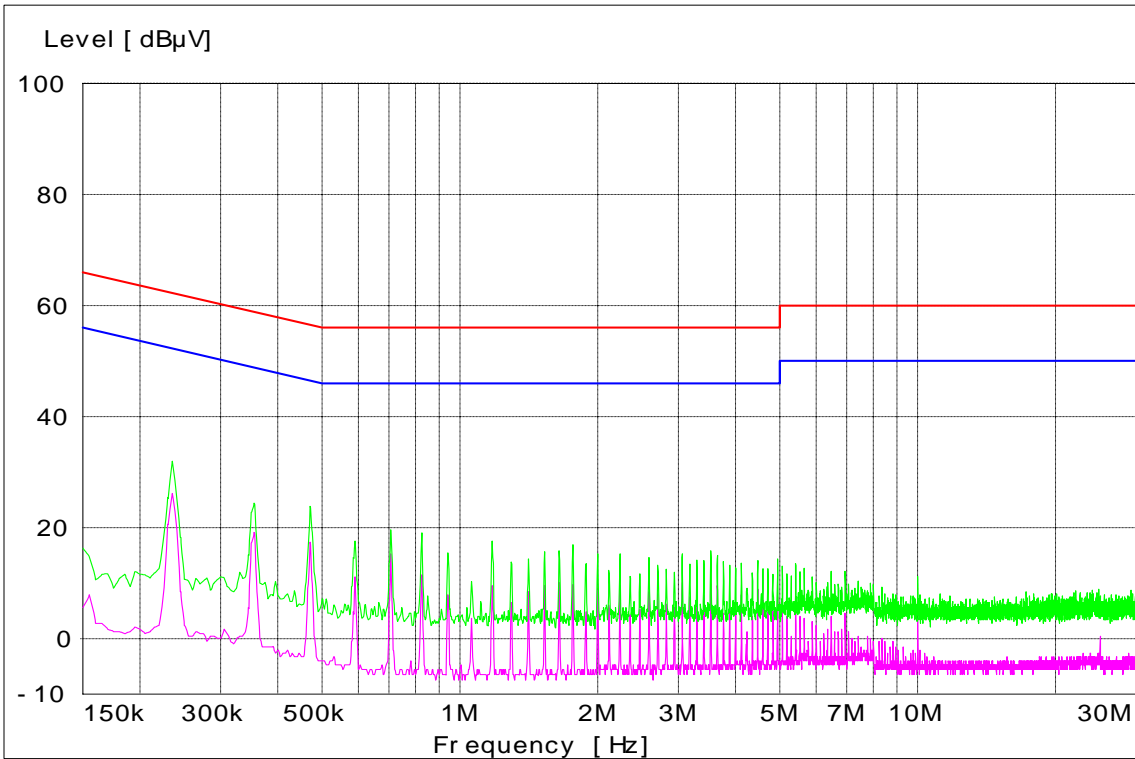


Channel 39 – 2441 MHz - Tx Mode - Line Coupling Nonhopping

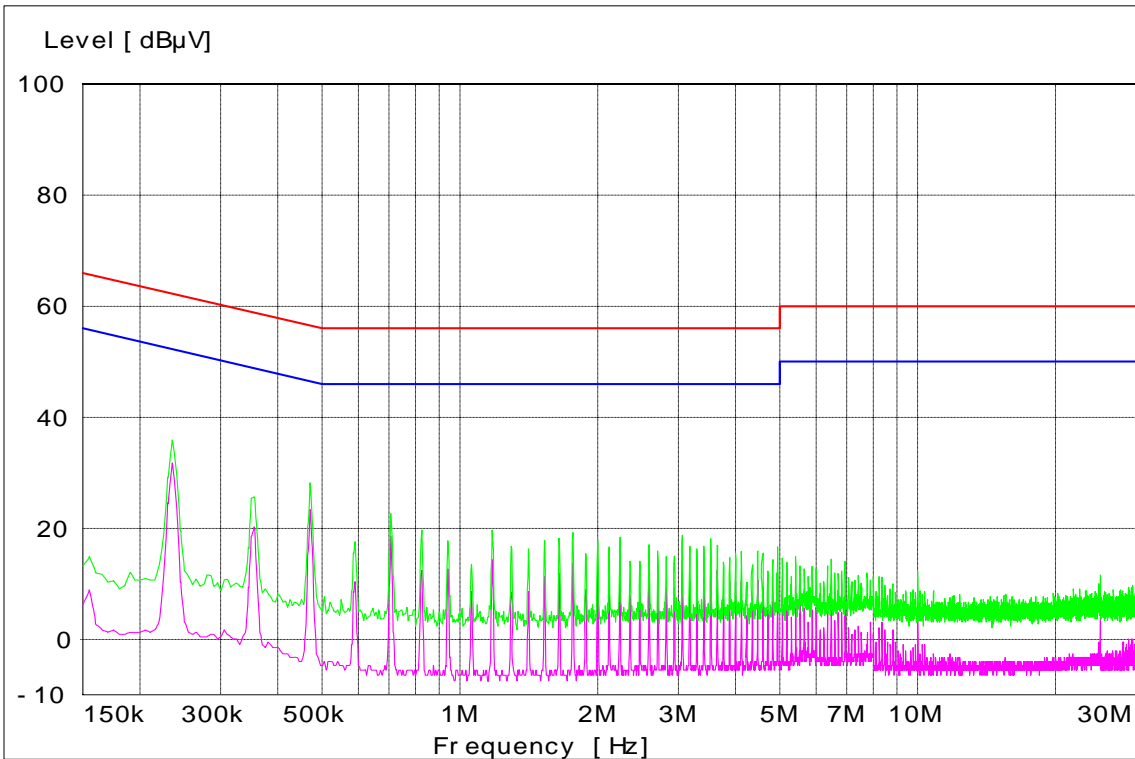


Channel 39 – 2441 MHz - Tx Mode - Neutral Coupling Hopping

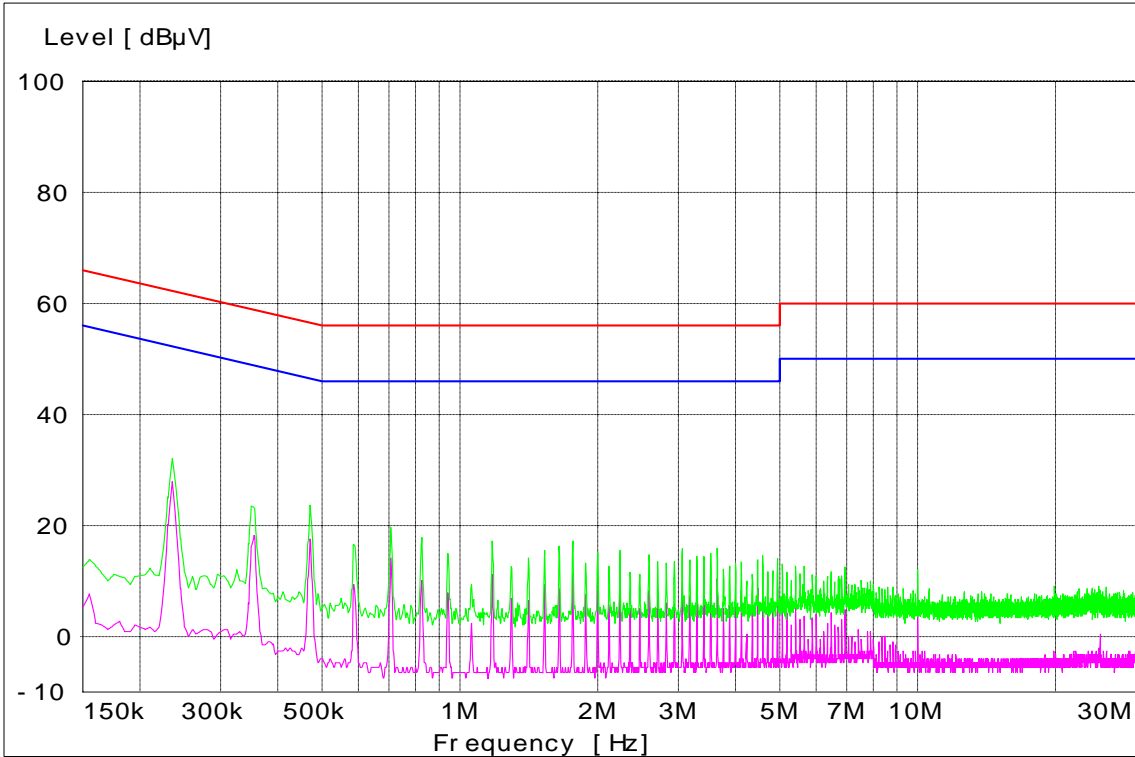


Channel 78 – 2480 MHz - Tx Mode - Line Coupling Hopping

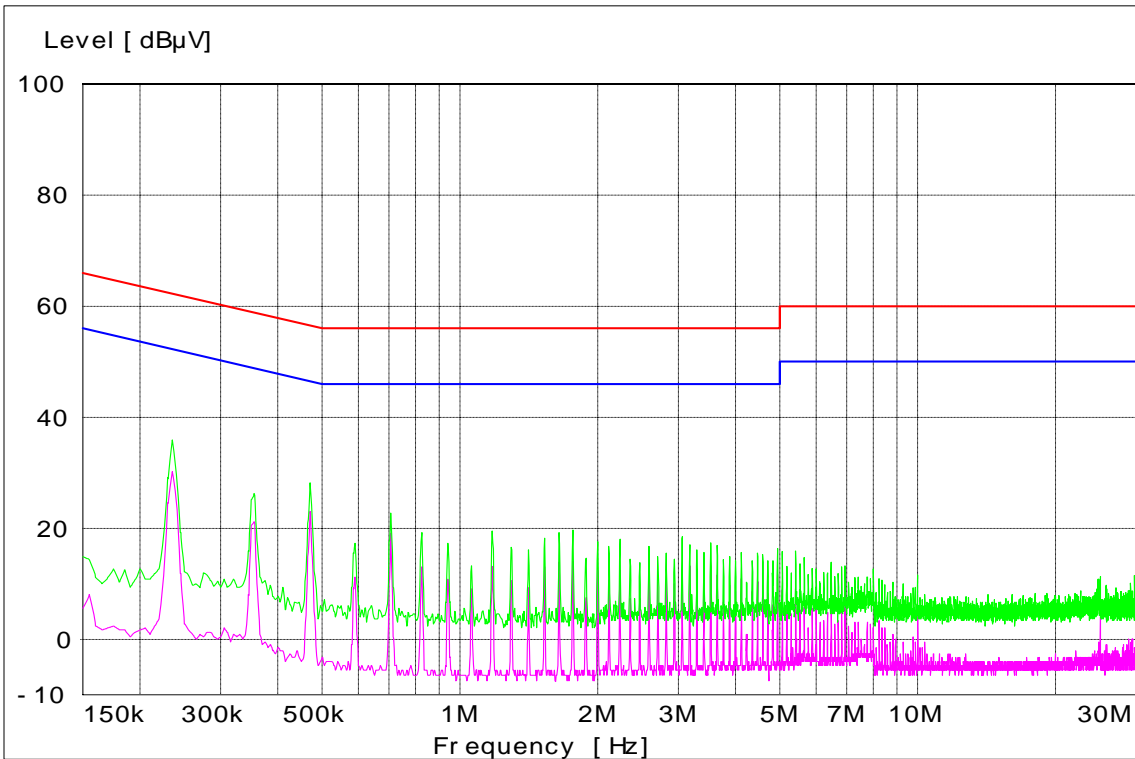


Channel 78 – 2480 MHz - Tx Mode - Neutral Coupling Hopping

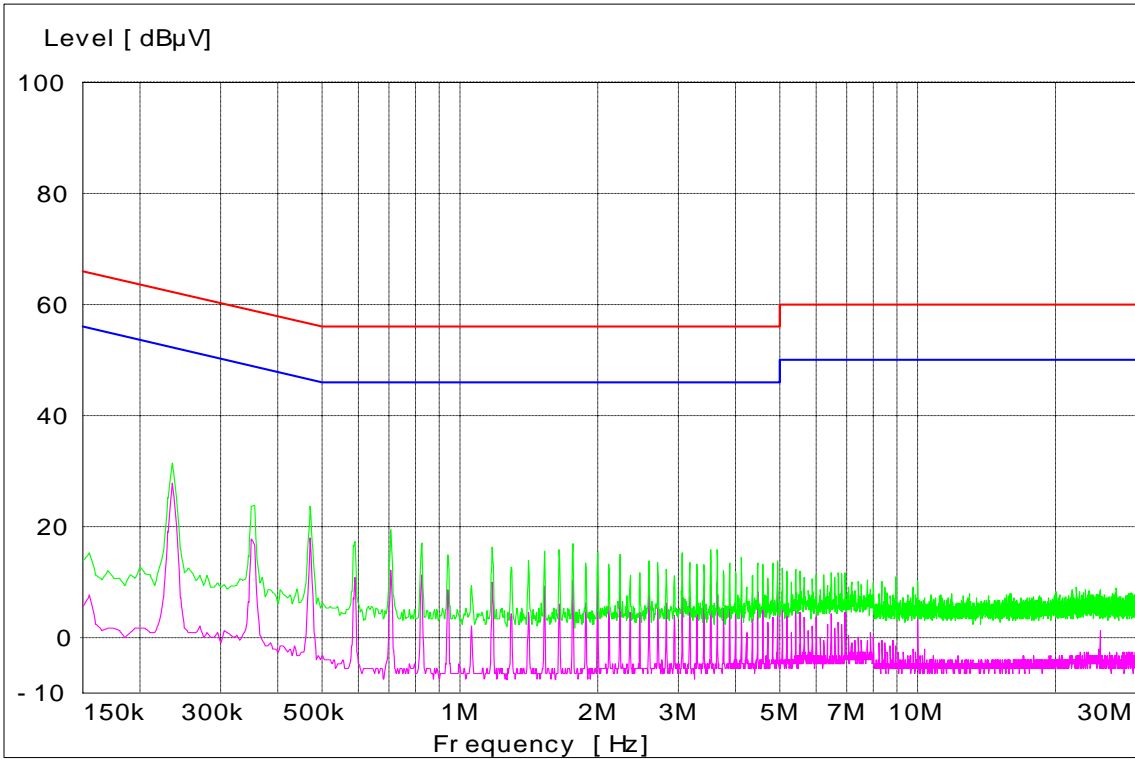


Channel 0 – 2402 MHz - Tx Mode - Line Coupling Hopping

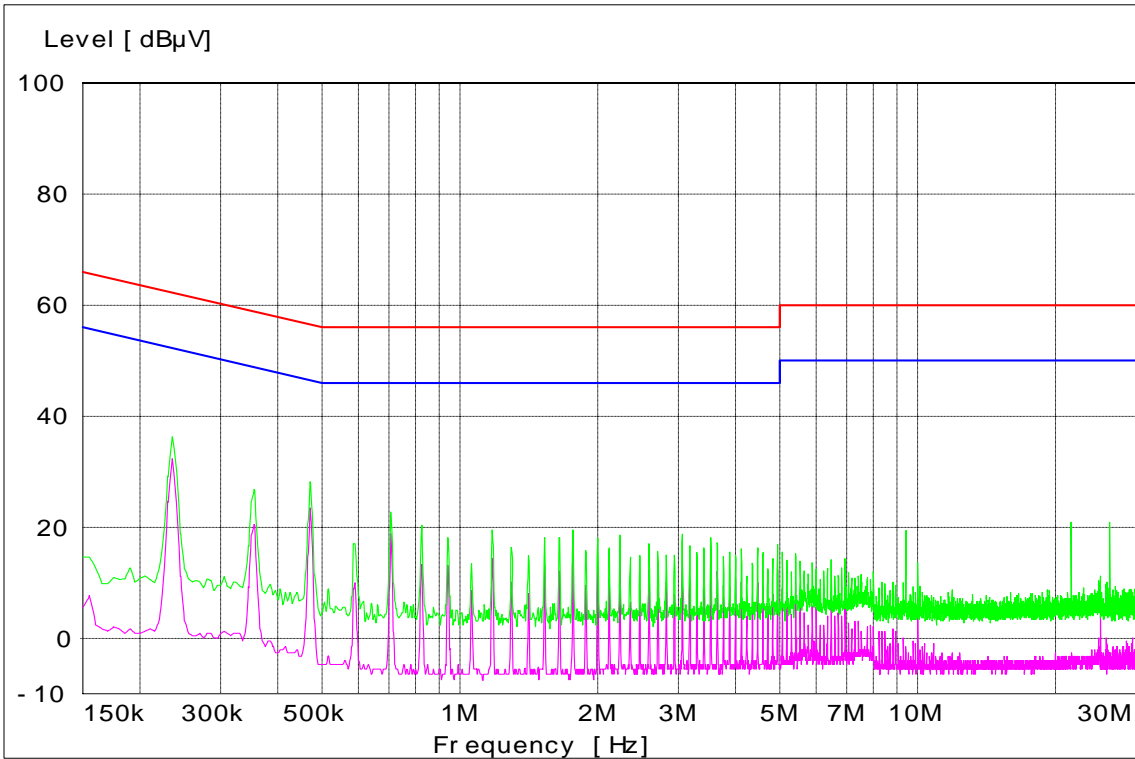


Channel 0 – 2402 MHz - Tx Mode - Neutral Coupling Nonhopping

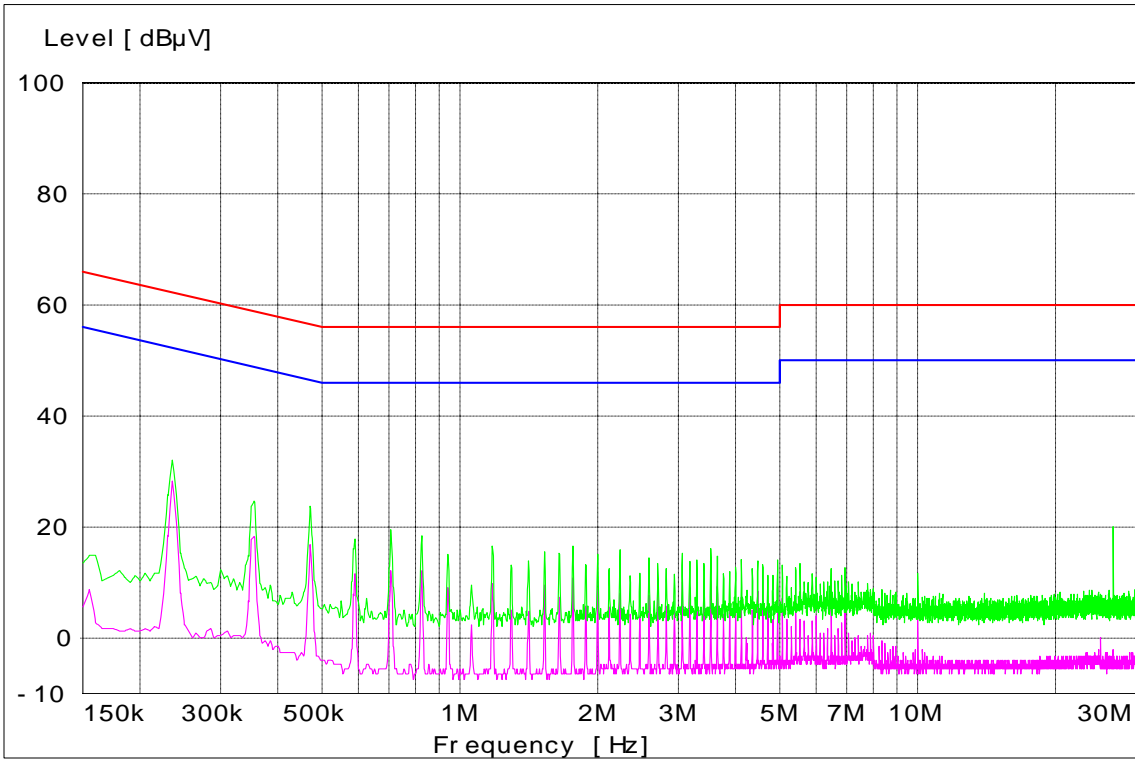


Channel 39 – 2441 MHz - Tx Mode - Line Coupling Hopping

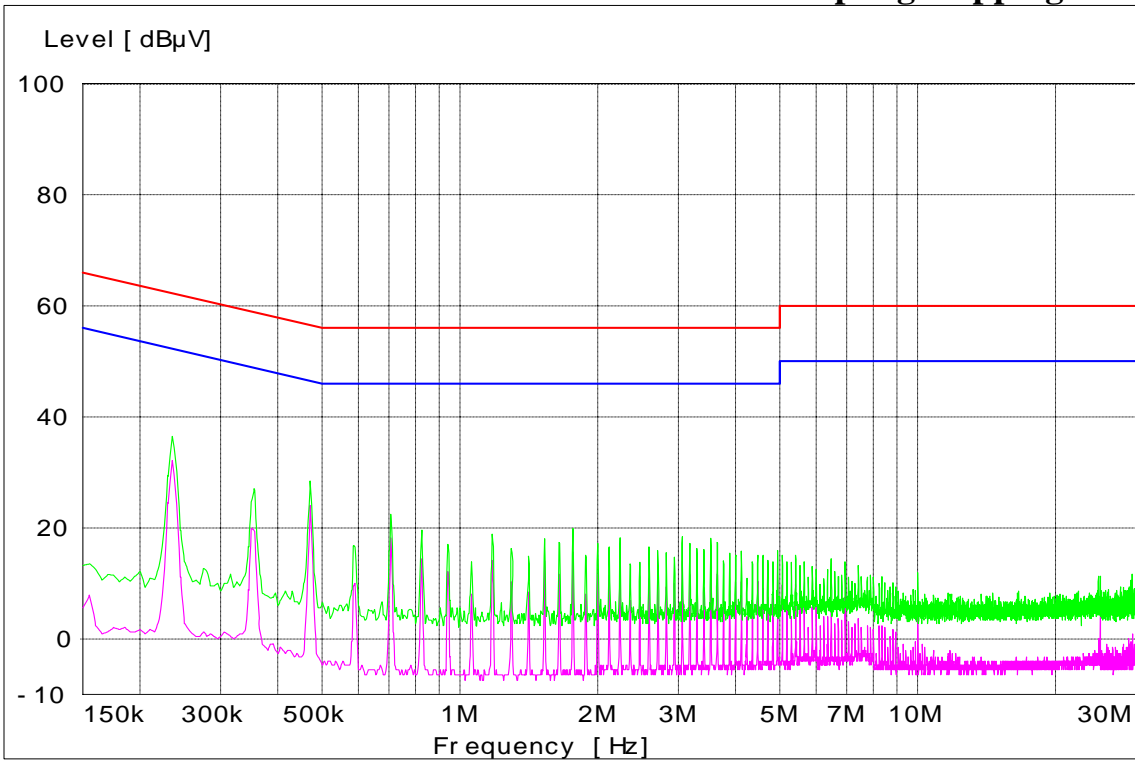

Channel 39 – 2441 MHz - Tx Mode - Neutral Coupling Nonhopping

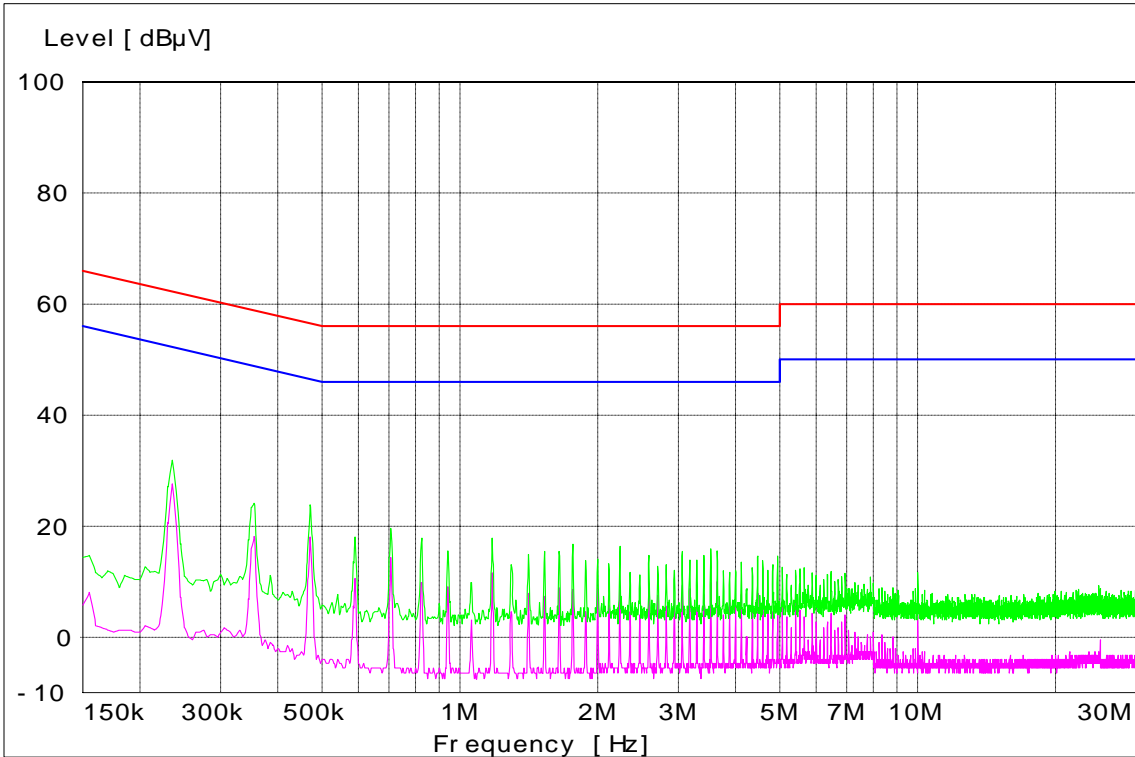

Channel 78 – 2480 MHz - Tx Mode - Line Coupling Nonhopping

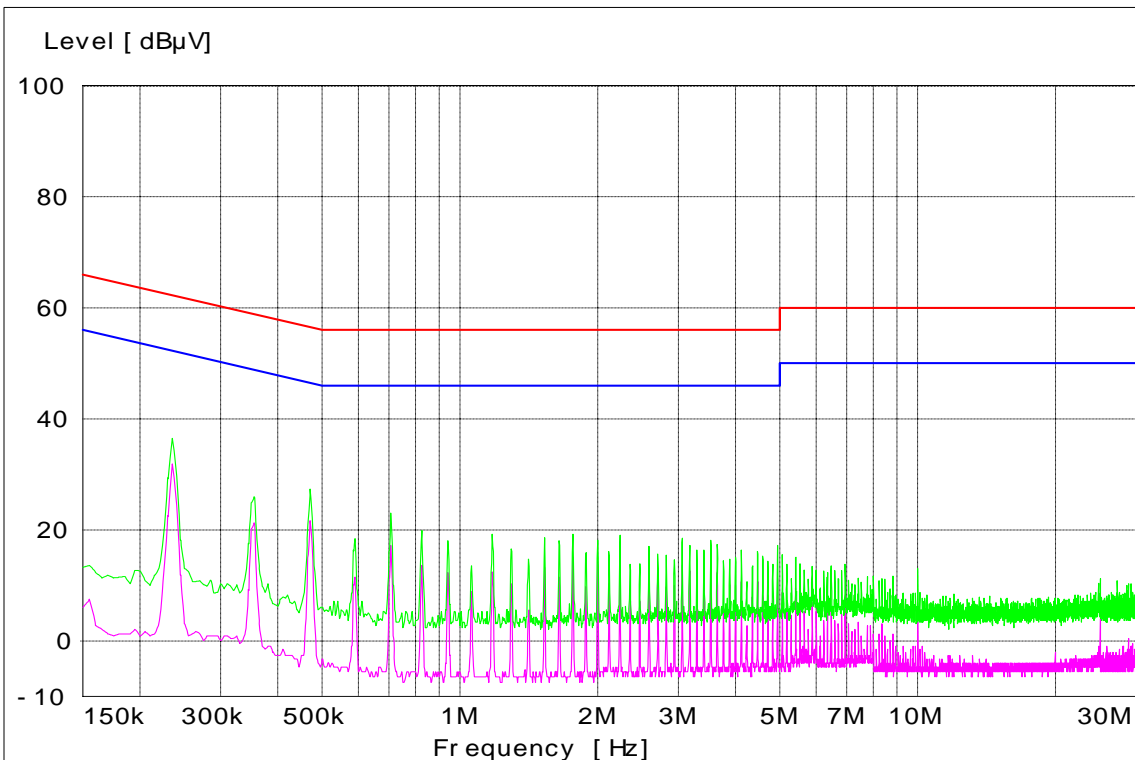

Channel 78 – 2480 MHz - Tx Mode - Neutral Coupling Nonhopping

End of Test Report