



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 18537-2

Report Date – September 5, 2006

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: September 5, 2006

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1651-01

Table of Contents

Description	Page
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
RF Power Output	6
Measurement results	6
Radiated Power	7
Measurement results	7
Occupied Bandwidth	8
Measurement results	9
Spurious Emissions at Antenna Terminals	12
Measurement results	13
Field Strength of Spurious Emissions	14
Measurement results	15
Frequency Stability	16
Measurement results	17
Field Strength of Spurious Emissions -Unintentional Radiators	18
Measurement results	19
AC Line Conducted Emissions	20
Measurement results	21
Appendix A - Radiated Emissions Test Setup Photos	24
Figure A.1 – Radiated Emissions Measurement	24
Figure A.2 – Substitution Measurement	24

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: IC3908-1

Tests Requested By: Motorola Inc.
 Mobile Devices Business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 850, Bluetooth

FCC ID : IHDT56GX1

Serial Numbers: 004401021174137, 004401021174152,
 004401021174145, 004401021172719,
 004401021852708

Testing Complete Date: August 31, 2006

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X Part 15 Subpart B – Unintentional Radiators
 - X Part 22 Subpart H - Public Mobile Services
- Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2003, RSS-129 (CDMA).

Summary of Testing

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	Occupied Bandwidth	Pass
4	Spurious Emissions at Antenna Terminal	Pass
5	Field Strength of Spurious Emissions	Pass
6	Frequency Stability	Pass
7	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
8	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	Occupied Bandwidth	See Plots
4	Spurious Emissions at Antenna Terminal	47.1 dB
5	Field Strength of Spurious Emissions	See Table
6	Frequency Stability	75 Hz
7	Field Strength of Spurious Emissions from Unintentional Radiators	Below noise floor
8	AC Line Conducted Emissions	See Plots

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	100001	3/08/07
Rohde Schwarz	Receiver	ESI40	100226	6/05/07
Hewlett Packard	EMC Analyzer	E7405	US39440191	1/05/07
Hewlett Packard	Signal Generator	83712A	3429A00286	6/6/07
A.H. Systems	DRG Horn Antenna	SAS 200/571	365	5/12/07
ETS.	Horn Antenna	3115	6222	3/03/07
ETS	Log-Periodic Antenna	3148	1188	6/05/07
ETS	Biconical Antenna	3110B	3370	3/03/07
Attenuator	Weinschel	2	AS-6 6675	6/6/07
Attenuator	Weinschel	2	AS-6 6677	11/10/06
Attenuator	Weinschel	2	AS-6 7075	1/31/07
Attenuator	Weinschel	2	AS-6 6675	6/06/07
Thermotron	Environmental Chamber	S-4	31580	1/31/07
Agilent	Power Meter	E4416A	GB41293246	02/03/07
Agilent	Power Sensor	E4412B	US38486321	02/03/07
ETS	LISN	3810/2NM	00062907	5/10/07
ETS	LISN	3810/2NM	00062912	5/10/07

All equipment is on a one-year calibration cycle.

Measurement Procedures and Data**RF POWER OUTPUT****Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of a Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR47 Part 2.1046

Measurement Results**WCDMA 850**

Frequency (MHz)	Power (dBm)
826.4	23.87
836.0	23.88
846.6	24.05

RADIATED POWER (EIRP AND ERP)

Measurement Procedure

The phone was tested in a 16’ anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT’s radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for WCDMA 850 three frequencies (826.4, 836.0 and 846.6 MHz) .

WCDMA measurements were made with the phone placed in a call using the CMU 200 mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Gigatronics 8542C power meter in “Mod Avg” mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

Measurement Results

WCDMA 850:

<u>Frequency</u>	<u>ERP</u>
826.4 MHz	20.52 dBm
836.0 MHz	20.14 dBm
846.6 MHz	20.67 dBm

For all measurements, calibration was performed via gain substitution with a half-wave dipole.

BAND/TECHNOLOGY	MAXIMUM EIRP(dBm)	MAXIMUM ERP (dBm)
WCDMA 850	22.77	20.67

OCCUPIED BANDWIDTH

CFR Part 2.1049, 22.917, 24.238

Measurement Procedure


The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.

Measurement Results


Attached

Measurement Results – WCDMA 850


WCDMA 850 – Reference Level Plot – Channel 4180 (836.0 MHz)

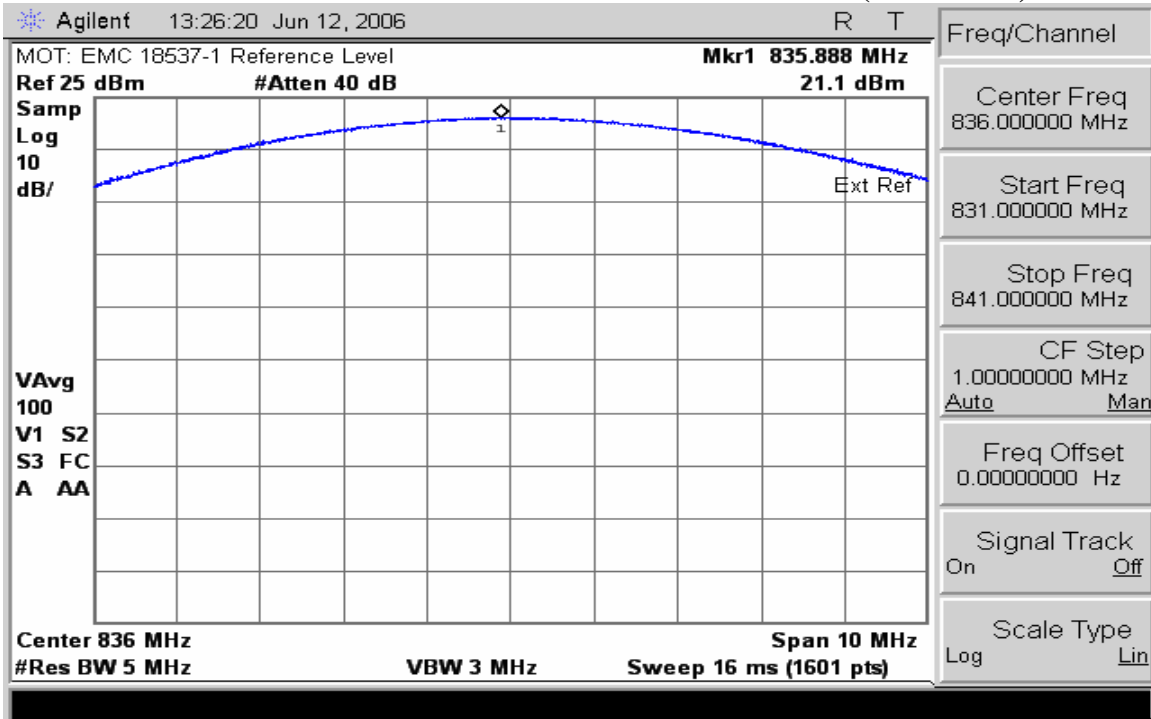


WCDMA 850 – Channel 4180 (836.0 MHz) – Occupied Bandwidth

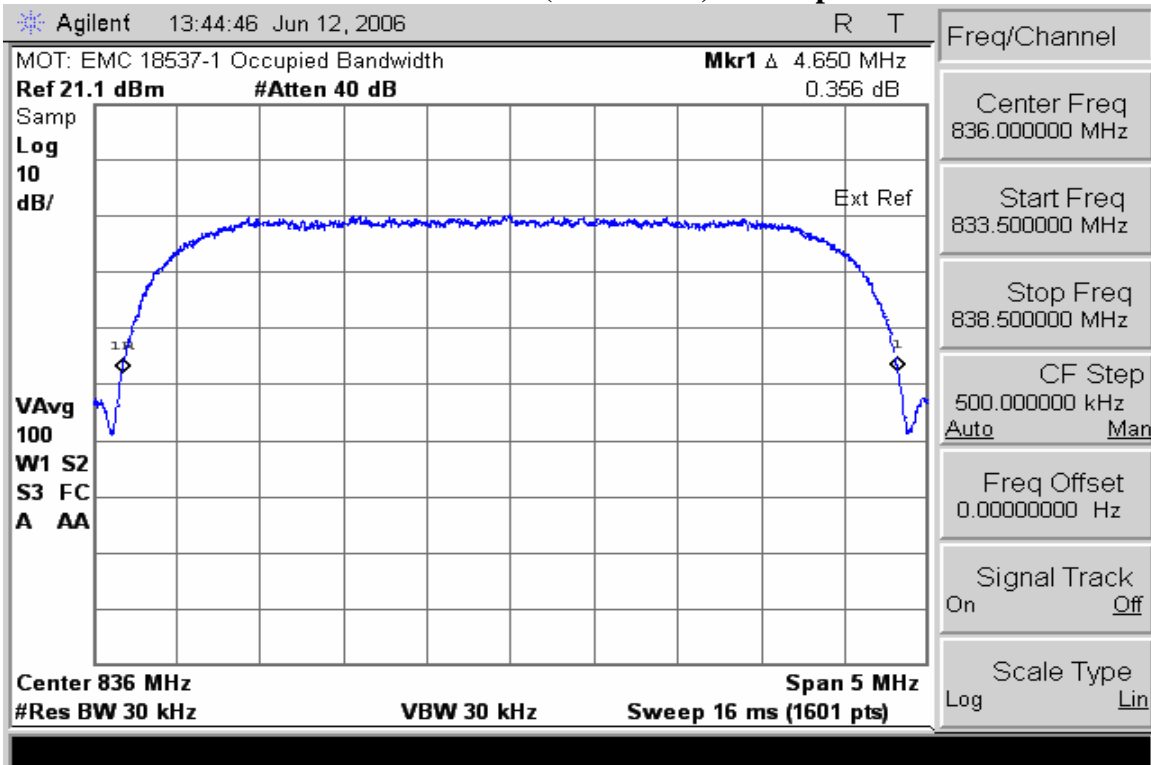

WCDMA 850 – Lower Band Edge – Channel 4132

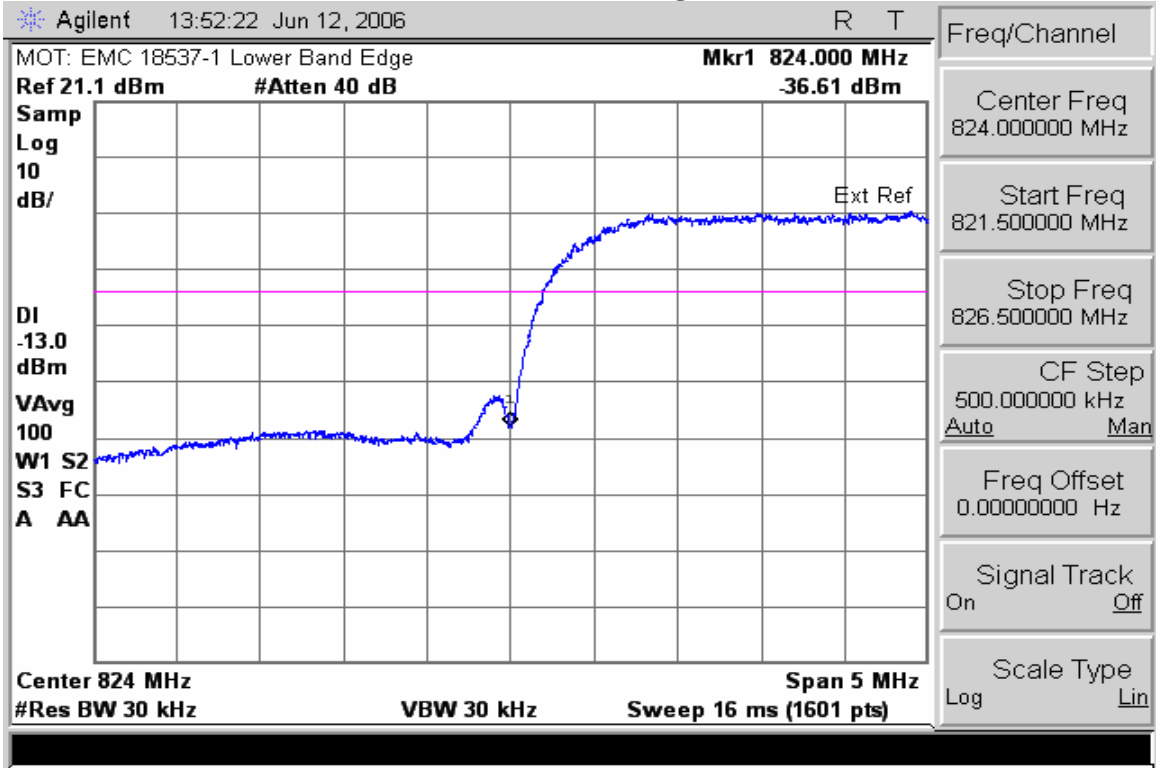

WCDMA 850 – Upper Band Edge – Channel 4233 (846.6 MHz)

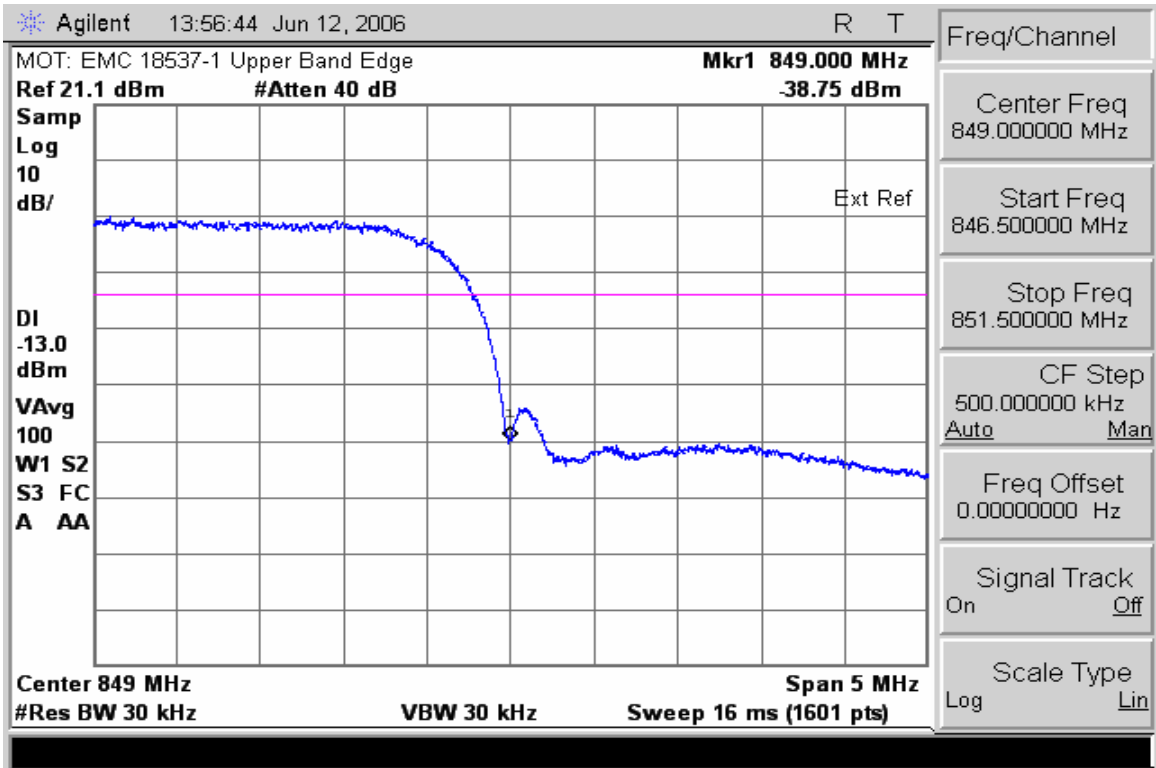

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

CFR47 Part 2.1051, 22.917

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results
Modulation: WCDMA 850

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-60.1
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

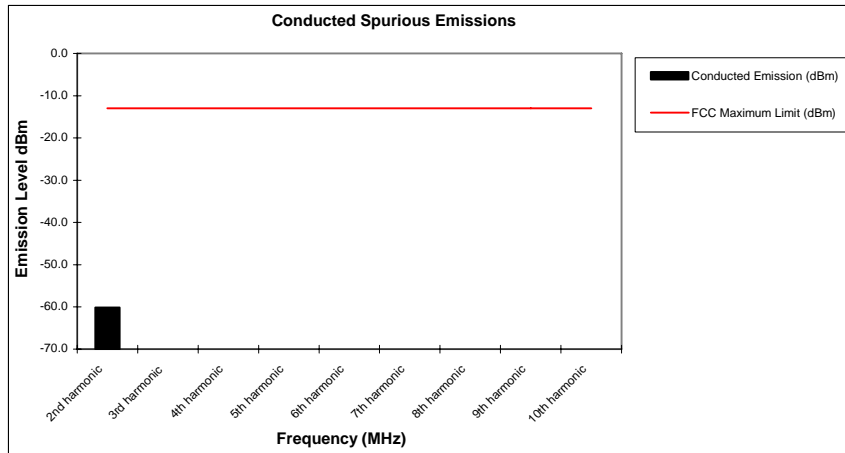

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	3 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Modulation: WCDMA 850

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

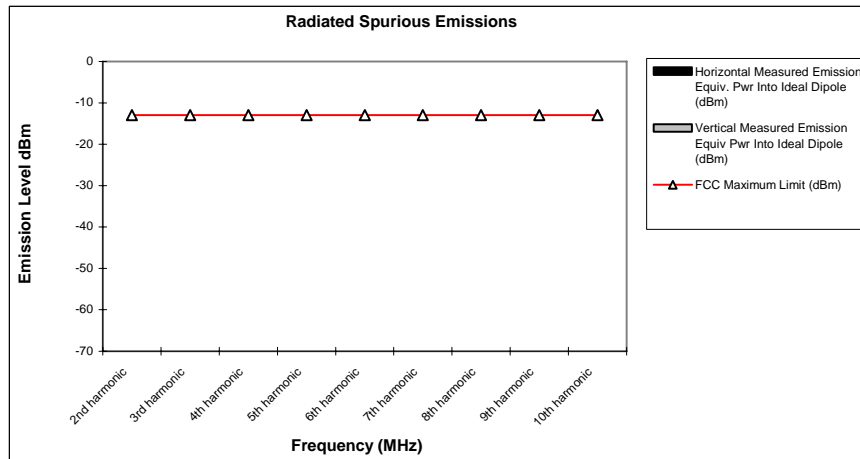

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FREQUENCY STABILITY

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30°C to $+60^{\circ}\text{C}$ and at intervals of 10°C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results
Modulation: GSM850

Frequency Stability

Mode: GSM 850 **Operating Frequency:** 836.6 MHz
Channel: 190 **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	26.00	0.031	100%	3.80
-20 C	22.00	0.026	100%	3.80
-10 C	29.00	0.035	100%	3.80
0 C	24.00	0.029	100%	3.80
10 C	22.00	0.026	100%	3.80
20 C	34.00	0.041	100%	3.80
30 C	35.28	0.042	100%	3.80
40 C	29.34	0.035	100%	3.80
50 C	34.20	0.041	100%	3.80
60 C	33.18	0.040	100%	3.80
20 C	75.00	0.090	Battery Endpoint	3.35

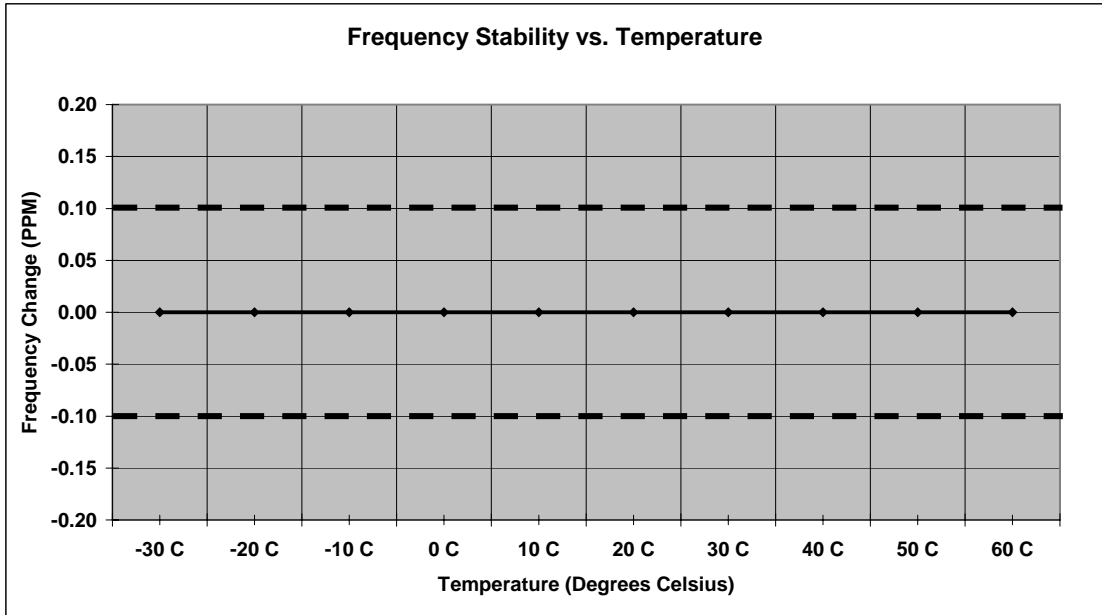

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS**Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) - Amplifier Gain (dB) + Antenna Correction Factor (1/m)


Measurement Results

Attached

Measurement Results
All Modulation Schemes

Receiver Radiated Spurious Emissions

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	*	*
2nd harmonic	54	*	*
3rd harmonic	54	*	*
4th harmonic	54	*	*
5th harmonic	54	*	*
6th harmonic	40	*	*
7th harmonic	40	*	*
8th harmonic	40	*	*
9th harmonic	40	*	*
10th harmonic	40	*	*

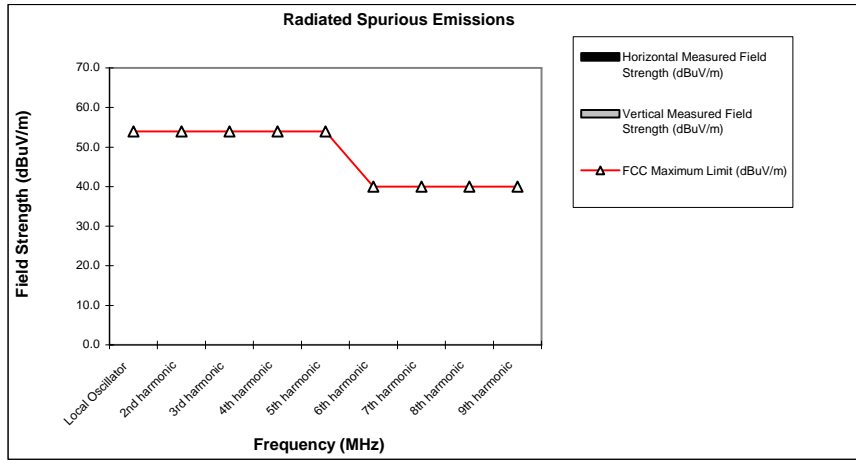

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

AC LINE CONDUCTED EMISSIONS

CFR 47 Part 15.207

Measurement Procedure


Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detector – Quasi Peak and Average

Measurement Results


See attached:

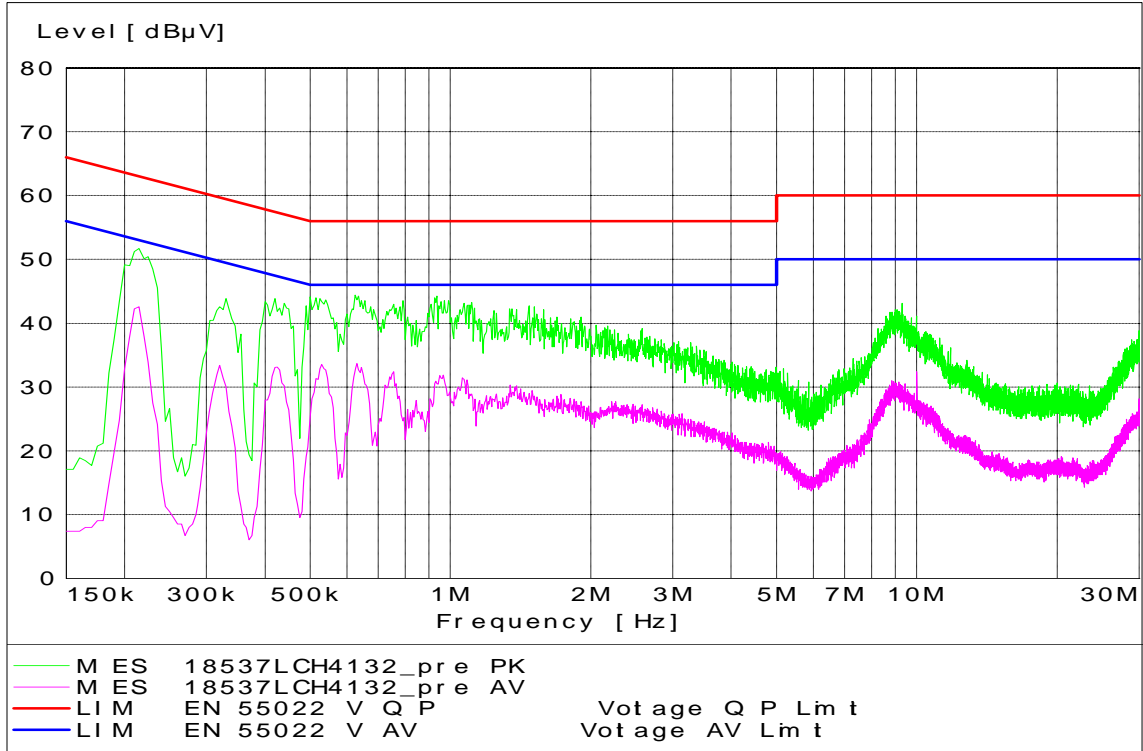


WCDMA850 Channel 4132 - Tx Mode - Line Coupling

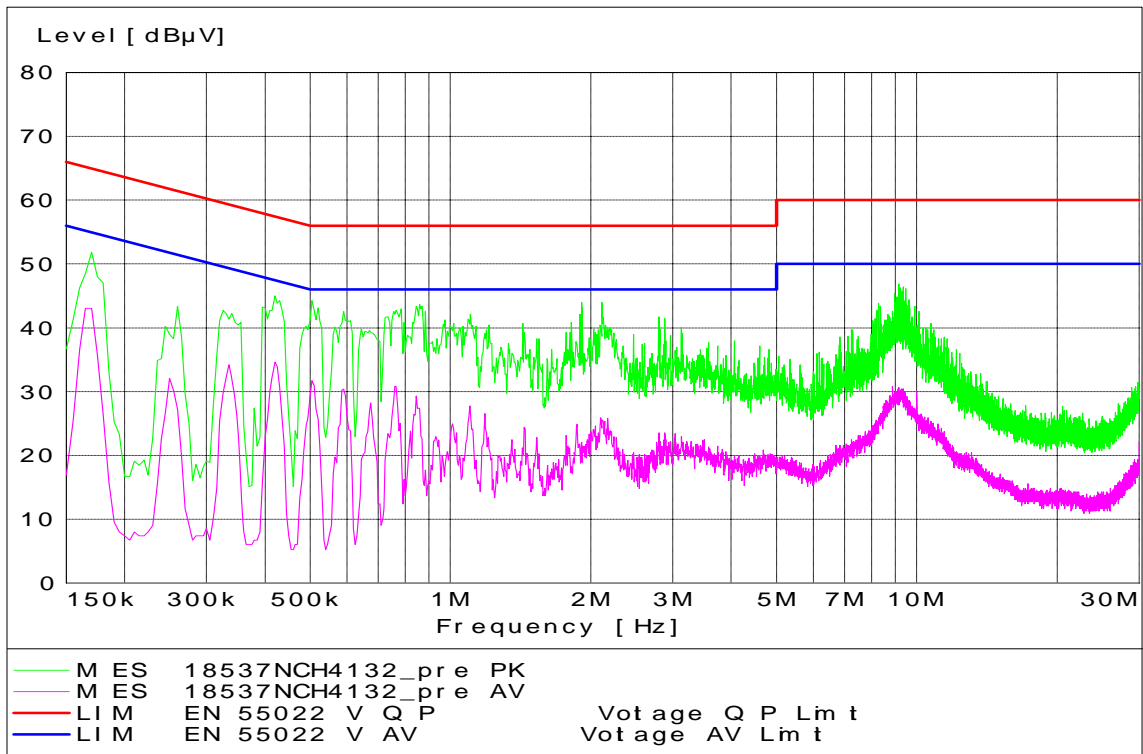


WCDMA850 Channel 4132 - Tx Mode - Neutral Coupling

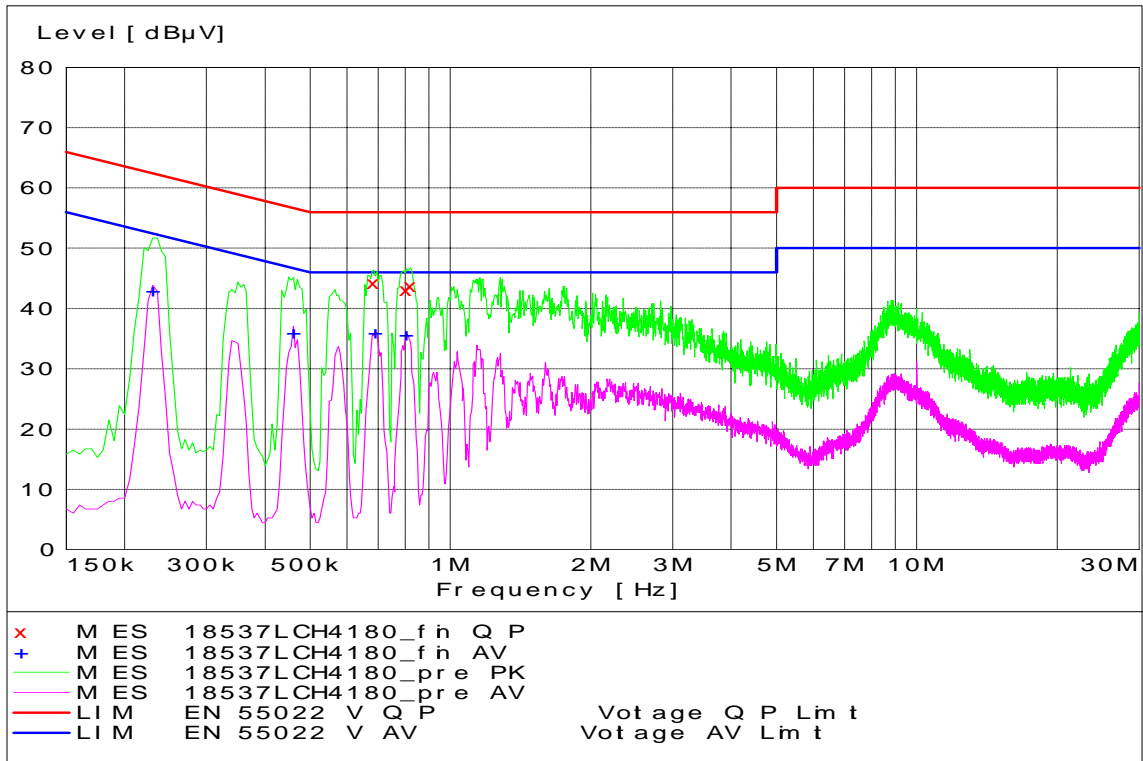


WCDMA850 Channel 4180 - Tx Mode - Line Coupling

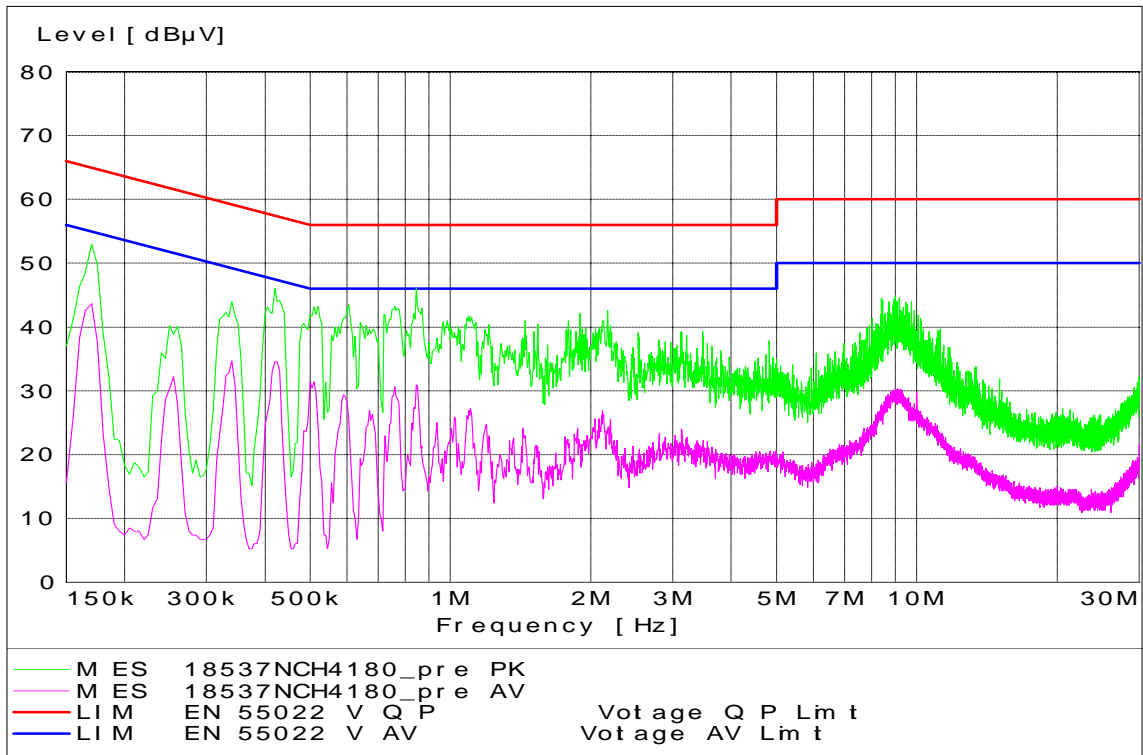

WCDMA850 Channel 4180 - Tx Mode - Neutral Coupling

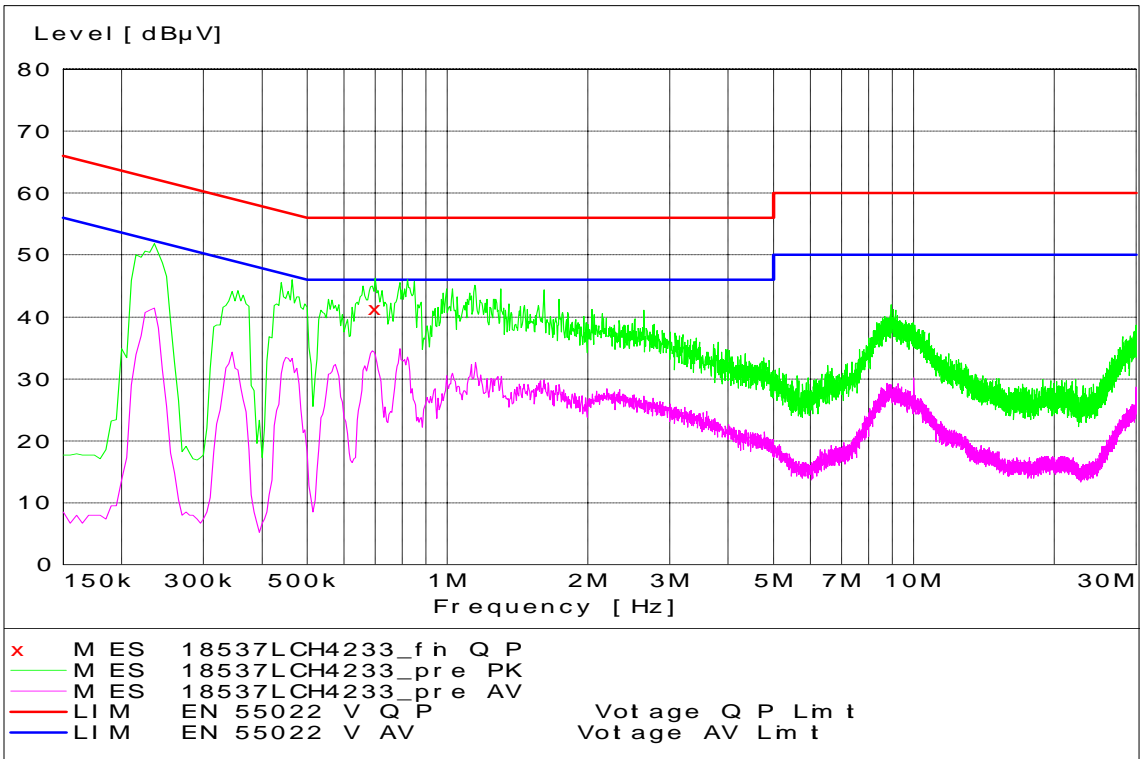

WCDMA850 Channel 4233 - Tx Mode - Line Coupling

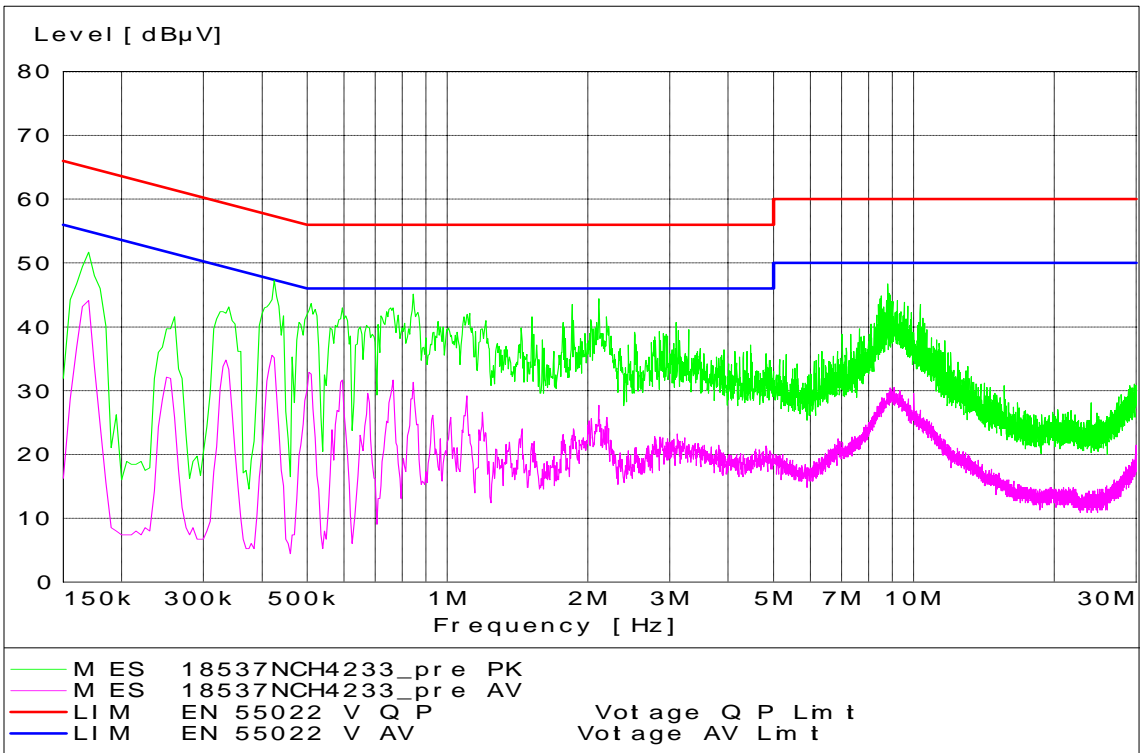

WCDMA850 Channel 4233 - Tx Mode - Neutral Coupling

End of Test Report