



MOTOROLA

Portable Cellular Phone SAR Test Report

Test Report #: 21201-1F
Date of Report: September-27-2007
Date of Test: Apr-04-2007 to Apr-15-2007
FCC ID #: **IHDT56HZ2**
Generic Name: **MQ5-4411A23**

Laboratory: Motorola Mobile Devices Business Product Safety & Compliance Laboratory
600 N. US Highway 45
Libertyville, Illinois 60048

Report Author: Katerina Royzen
RF Engineer

This laboratory is accredited to ISO/IEC 17025-1999 to perform the following tests:

Tests:
Electromagnetic Specific Absorption Rate

Procedures:
IEC 62209-1
RSS-102
IEEE 1528 - 2003
FCC OET Bulletin 65 (*including Supplement C*)
Australian Communications Authority Radio
Communications (Electromagnetic Radiation – Human
Exposure) Standard 2003
CENELEC EN 50360 (2001)
CENELEC EN 50361 (2001)
ARIB Std. T-56 (2002)

Accreditation:



On the following products or types of products:

Wireless Communications Devices (Examples): Two Way Radios; Portable Phones (including Cellular, Licensed Non-Broadcast and PCS); Low Frequency Readers; and Pagers

A2LA certificate #2518-02

Statement of Compliance:

Motorola declares under its sole responsibility that the portable cellular telephone model to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines (FCC 47 CFR §2.1093) as well as with CENELEC en50360:2001 and ANSI / IEEE C95.1. It also declares that the product was tested in accordance with CENELEC en50361:2001, IEEE 1528, as well as other appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

©Motorola, Inc. 2007

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Motorola encourages all feedback, both positive and negative, on this test report.

Table of Contents

1. Introduction	2
2. Description of the Device Under Test	3
2.1 Antenna description	3
2.2 Device description	3
3. Test Equipment Used	4
3.1 Dosimetric System	4
3.2 Additional Equipment	4
4. Electrical parameters of the tissue simulating liquid	5
5. System Accuracy Verification	6
6. Test Results	7
6.1 Head Adjacent Test Results	7
6.2 Push-to-Talk Position Test Results	11
6.2 Body Worn Test Results	12
References	16
Appendix 1: SAR distribution comparison for system accuracy verification	17
Appendix 2: SAR distribution plots for Phantom Head Adjacent Use	18
Appendix 3: SAR distribution plots for Push-To-Talk Use	19
Appendix 4: SAR distribution plots for Body Worn Configuration	20
Appendix 5: Probe Calibration Certificate	21
Appendix 6: Measurement Uncertainty Budget	22
Appendix 7: Photographs of the device under test	24
Appendix 8: Dipole Characterization Certificate	29

1. Introduction

The Motorola Mobile Devices Business Product Safety Laboratory has performed measurements of the maximum potential exposure to the user of the portable cellular phone covered by this test report. The Specific Absorption Rate (SAR) of this product was measured. The portable cellular phone was tested in accordance with [1], [4] and [5]. The SAR values measured for the portable cellular phone are below the maximum recommended levels of 1.6 W/kg in a 1 g average set in [3] and 2.0 W/kg in a 10 g average set in [2].

For ANSI / IEEE C95.1 (1 g), the final SAR reading for this phone is 0.36 W/kg for head adjacent use and 0.86 W/kg for body worn use. These measurements were performed using a Dasy4™ v4.7 system manufactured by Schmid & Partner Engineering AG (SPEAG), of Zurich Switzerland.

2. Description of the Device Under Test

2.1 Antenna description

Type	Internal	
Location	Bottom of Transceiver	
Dimensions	Length	40 mm
	Width	6 mm
Configuration	FJA	

2.2 Device description

Serial Number	355563010000147				
Mode(s) of Operation	GSM 850	GSM 900	GSM 1800	GSM 1900	Bluetooth
Modulation Mode(s)	GMSK	GMSK	GMSK	GMSK	GFSK
Maximum Output Power Setting	33.00 dBm	33.00 dBm	30.50 dBm	30.50 dBm	4.0 dBm
Duty Cycle	1:8	1:8	1:8	1:8	1:1
Transmitting Frequency Range(s)	824.2 - 848.8 MHz	880.2 - 914.8 MHz	1710.2 - 1784.8 MHz	1850.2 - 1909.8 MHz	2400.0 - 2483.5 MHz
Production Unit or Identical Prototype (47 CFR §2.908)	Identical Prototype				
Device Category	Portable				
RF Exposure Limits	General Population / Uncontrolled				

Mode(s) of Operation	GPRS 850				GPRS 900				GPRS 1800				GPRS 1900			
Modulation Mode(s)	GMSK				GMSK				GMSK				GMSK			
Maximum Output Power Setting	33.00 dBm	31.00 dBm	29.50 dBm	27.50 dBm	33.00 dBm	31.00 dBm	29.50 dBm	27.50 dBm	30.50 dBm	28.50 dBm	26.50 dBm	24.50 dBm	30.50 dBm	28.50 dBm	26.50 dBm	24.50 dBm
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				880.2 - 914.8 MHz				1710.2 - 1784.8 MHz				1850.2 - 1909.8 MHz			

Mode(s) of Operation	EDGE 850				EDGE 900				EDGE 1800				EDGE 1900			
Modulation Mode(s)	8PSK				8PSK				8PSK				8PSK			
Maximum Output Power Setting	27.50 dBm	26.50 dBm	24.50 dBm	22.50 dBm	27.50 dBm	26.50 dBm	24.50 dBm	22.50 dBm	26.50 dBm	25.50 dBm	23.50 dBm	21.50 dBm	26.50 dBm	25.50 dBm	23.50 dBm	21.50 dBm
Duty Cycle	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8	1:8	2:8	3:8	4:8
Transmitting Frequency Range(s)	824.2 - 848.8 MHz				880.2 - 914.8 MHz				1710.2 - 1784.8 MHz				1850.2 - 1909.8 MHz			

Note: Bolded entries indicate data mode of highest time-average power per band and data mode type.

3. Test Equipment Used

3.1 Dosimetric System

The Motorola Mobile Devices Business Product Safety & Compliance Laboratory utilizes a Dosimetric Assessment System (Dasy4™ v4.7) manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. All the SAR measurements are taken within a shielded enclosure. The overall 10 g RSS uncertainty of the measurement system is ±10.8% (K=1) with an expanded uncertainty of ±21.6% (K=2). The overall 1 g RSS uncertainty of the measurement system is ±11.1% (K=1) with an expanded uncertainty of ±22.2% (K=2). The measurement uncertainty budget is given in Appendix 6. Per IEEE 1528, this uncertainty budget is applicable to the SAR range of 0.4 W/kg to 10 W/kg.

The list of calibrated equipment used for the measurements is shown in the following table.

Description	Serial Number	Cal Due Date
DASY4™ DAE V1	650	Aug-22-2007
E-Field Probe ET3DV6R	1506	May-30-2007
Dipole Validation Kit, DV900V2	78	May-22-2007
S.A.M. Phantom used for 800/900 MHz	TP-1106	
Dipole Validation Kit, DV1800V2	281TR	
S.A.M. Phantom used for 1800/1900 MHz	TP-1235	

3.2 Additional Equipment

Description	Serial Number	Cal Due Date
Signal Generator HP8648C	3847A04822	Jun-30-2007
Power Meter E4419B	GB39510961	Jul-05-2007
Power Sensor #1 – E9301A	US39211008	Jun-28-2007
Power Sensor #2 – E9301A	US39211009	Jun-28-2007
Network Analyzer HP8753ES	US39172529	Sep-26-2007
Dielectric Probe Kit HP85070C	US99360070	

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with a HP85070 Dielectric Probe Kit. These values, along with the temperature of the simulated tissue are shown in the table below. The recommended limits for permittivity and conductivity are also shown. A mass density of $\rho = 1 \text{ g/cm}^3$ was entered into the system in all the cases. It can be seen that the measured parameters are within tolerance of the recommended limits specified in [1] and [5].

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	Temp (°C)
835	Head	Measured, Apr-04-2007	42.6	0.93	19.7
		Measured, Apr-09-2007	41.4	0.92	19.8
		Measured, Apr-14-2007	41.3	0.91	19.3
		Recommended Limits	41.5 ±5%	0.90 ±5%	18-25
	Body	Measured, Apr-13-2007	54.8	0.99	19.4
		Recommended Limits	55.2 ±5%	0.97 ±5%	18-25
900	Head	Measured, Apr-05-2007	41.7	0.99	19.1
		Measured, Apr-14-2007	40.6	0.97	19.2
		Recommended Limits	41.5 ±5%	0.97 ±5%	18-25
	Body	Measured, Apr-13-2007	54.1	1.05	19.4
		Recommended Limits	55.0 ±5%	1.05 ±5%	18-25
1750	Head	Measured, Apr-09-2007	39.3	1.31	19.2
		Measured, Apr-10-2007	41.7	1.32	19.8
		Measured, Apr-14-2007	40.5	1.34	19.6
		Recommended Limits	40.1 ±5%	1.35 ±5%	18-25
	Body	Measured, Apr-10-2007	51.1	1.42	20.0
		Recommended Limits	53.4 ±5%	1.49 ±5%	18-25
1880	Head	Measured, Apr-09-2007	38.6	1.46	19.5
		Measured, Apr-15-2007	41.0	1.44	19.3
		Recommended Limits	40.0 ±5%	1.40 ±5%	18-25
	Body	Measured, Apr-15-2007	52.2	1.59	19.3
		Recommended Limits	53.3 ±5%	1.52 ±5%	18-25

The list of ingredients and the percent composition used for the tissue simulates are indicated in the table below.

Ingredient	835 MHz / 900 MHz Head	835 MHz / 900 MHz Body	1800 MHz / 1900 MHz Head	1800 MHz / 1900 MHz Body	2450 MHz Head	2450 MHz Body
Sugar	57	44.9	--	--	--	--
DGBE	--	--	47	30.8	--	30
Diacetin	--	--	--	--	51	--
Water	40.45	53.06	52.62	68.8	48.75	70
Salt	1.45	0.94	0.38	0.4	0.15	--
HEC	1	1	--	--	--	--
Bact.	0.1	0.1	--	--	0.1	--

5. System Accuracy Verification

A system accuracy verification of the DASY4™ was performed using the measurement equipment listed in Section 3.1. The daily system accuracy verification occurs within the flat section of the SAM phantom.

A SAR measurement was performed to verify the measured SAR was within $\pm 10\%$ from the target SAR indicated in Section 8.3.7 Reference SAR Values in [5] or Appendix 7 for the 900 Mhz target reference SAR value. These tests were done at 900 MHz and 1800 MHz. These frequencies are within $\pm 10\%$ of the compliance test mid-band frequency as required in [1] and [5]. The test was conducted on the same days as the measurement of the DUT. Recommended limits for permittivity and conductivity, specified in [5], are shown in the table below. The obtained results from the system accuracy verification are also displayed in the table below. SAR values are normalized to 1 W forward power delivered to the dipole. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). The tissue stimulant depth was verified to be 15.0 cm \pm 0.5 cm. Z-axis scans showing the SAR penetration are also included in Appendix 1.

f (MHz)	Description	SAR (W/kg), 1 gram	Dielectric Parameters		Ambient Temp (°C)	Tissue Temp (°C)
			ϵ_r	σ (S/m)		
900	Measured, Apr-04-2007	11.175	41.8	0.99	20.8	20.2
	Measured, Apr-05-2007	11.375	41.7	0.99	20.4	20.1
	Measured, Apr-09-2007	11.025	40.7	0.97	20.8	20.0
	Measured, Apr-13-2007	11.125	41.0	0.98	21.0	20.4
	Measured, Apr-14-2007	10.85	40.6	0.97	20.5	20.4
	Recommended Limits	11.3	41.5 $\pm 5\%$	0.97 $\pm 5\%$	18-25	18-25
1800	Measured, Apr-09-2007	38.70	39.1	1.37	20.4	19.2
	Measured, Apr-10-2007	37.50	41.4	1.37	20.8	19.6
	Measured, Apr-14-2007	36.075	41.2	1.34	20.5	19.6
	Measured, Apr-15-2007	37.075	40.0	1.39	20.6	19.5
	Recommended Limits	37.5	40.0 $\pm 5\%$	1.4 $\pm 5\%$	18-25	18-25

The following probe conversion factors were used on the E-Field probe(s) used for the system accuracy verification measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1506	900	5.75	8 of 9
		1810	4.78	8 of 9

6. Test Results

The test sample was operated using an actual transmission through a base station simulator. The base station simulator was set up to the proper channel, transmitter power level and transmit mode of operation. The phone was tested in the configurations stipulated in [1], [4] and [5]. The phone was positioned into these configurations using the device holder supplied with the DASY4™ SAR measurement system. The measured dielectric constant of the material used for the device holder is less than 2.9 and the loss tangent is less than 0.02 (± 30%) at 850 MHz. The default settings for the “coarse” and “cube” scans were chosen and used for measurements. The grid spacing of the course scan was set to 15 or 10 cm as shown in the SAR plots included in Appendix 2 and 3. Please refer to the DASY manual for additional information on SAR scanning procedures and algorithms used.

The Cellular Phone model covered by this report has the following battery options:

Model SNN5810A - 1350 mAh Battery

Model SNN5808A - 920 mAh Battery

Model SNN5805A - 740 mAh Battery

The battery with the highest capacity is the Model SNN5810A. This battery was used to do most of the SAR testing. The phone was placed in the SAR measurement system with a fully charged battery. The configurations that resulted in the highest SAR values were tested using the other batteries listed above.

6.1 Head Adjacent Test Results

The SAR results shown in tables 1 through 8 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The left head and right head SAR contour distributions are similar. Because of this similarity, the cheek/touch and 15° tilt test conditions with the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 2. All other test conditions measured lower SAR values than those included in Appendix 2.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0 cm ± 0.5 cm.

The following probe conversion factors were used on the E-Field probe(s) used for head adjacent measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1506	900	5.75	8 of 9
		1810	4.78	8 of 9

Left Head Cheek Position								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz	Channel 128	32.96						
	Channel 190	33.03	19.8	0.016	0.214	0.21	0.33	0.33
	Channel 251	32.92						
1900 MHz	Channel 512	30.50						
	Channel 661	30.47	19.4	-0.112	0.117	0.12	0.186	0.19
	Channel 810	30.46						

Table 1: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Right Head Cheek Position								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz	Channel 128	32.96						
	Channel 190	33.03	19.7	-0.025	0.176	0.18	0.243	0.24
	Channel 251	32.92						
1900 MHz	Channel 512	30.50						
	Channel 661	30.47	19.4	0.287	0.139	0.14	0.226	0.23
	Channel 810	30.46						

Table 2: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

Noted Head Cheek Position with Battery SNN5808A								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Left Cheek</i>	Channel 128	32.96						
	Channel 190	33.03	19.8	0.020	0.226	0.23	0.357	0.36
	Channel 251	32.92						
1900 MHz <i>Right Cheek</i>	Channel 512	30.50						
	Channel 661	30.47	19.5	-0.0217	0.173	0.17	0.273	0.27
	Channel 810	30.46						

Table 3: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head Cheek Position with Battery SNN5805A</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Left Cheek</i>	Channel 128	32.96						
	Channel 190	33.03	19.7	-0.026	0.188	0.19	0.256	0.26
	Channel 251	32.92						
1900 MHz <i>Right Cheek</i>	Channel 512	30.50						
	Channel 661	30.47	19.5	0.041	0.18	0.18	0.295	0.30
	Channel 810	30.46						

Table 4: SAR measurement results at the highest possible output power, measured in a head cheek position against the ICNIRP and ANSI SAR Limit.

<i>Left Head 15° Tilt Position</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz	Channel 128	32.96						
	Channel 190	33.03	19.7	0.008	0.148	0.15	0.194	0.19
	Channel 251	32.92						
1900 MHz	Channel 512	30.50						
	Channel 661	30.47	19.4	-0.014	0.0361	0.04	0.06	0.06
	Channel 810	30.46						

Table 5: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

<i>Right Head 15° Tilt Position</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz	Channel 128	32.96						
	Channel 190	33.03	19.7	-0.036	0.164	0.17	0.218	0.22
	Channel 251	32.92						
1900 MHz	Channel 512	30.50						
	Channel 661	30.47	19.5	-0.048	0.0409	0.04	0.08	0.08
	Channel 810	30.46						

Table 6: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head 15° Tilt Position with Battery SNN5808A</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Right Tilt</i>	Channel 128	32.96						
	Channel 190	33.03	19.7	-0.003	0.161	0.16	0.214	0.21
	Channel 251	32.92						
1900 MHz <i>Right Tilt</i>	Channel 512	30.50						
	Channel 661	30.47	19.5	0.128	0.0503	0.05	0.0832	0.08
	Channel 810	30.46						

Table 7: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

<i>Noted Head 15° Tilt Position with Battery SNN5805A</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Right Tilt</i>	Channel 128	32.96						
	Channel 190	33.03	19.7	-0.014	0.161	0.16	0.212	0.21
	Channel 251	32.92						
1900 MHz <i>Right Tilt</i>	Channel 512	30.50						
	Channel 661	30.47	19.5	0.011	0.054	0.05	0.089	0.09
	Channel 810	30.46						

Table 8: SAR measurement results at the highest possible output power, measured in a head 15° Tilt position against the ICNIRP and ANSI SAR Limit.

6.2 Push-to-Talk/Dispatch Position Test Results

The SAR results shown in table 9 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output powers, the temperature of the simulated tissue after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

A full data set output of one test condition per band with the highest SAR values from the DASY™ measurement system is included as appendix 4. The test conditions included are indicated as bold numbers in the following tables. All other test conditions measured lower SAR values than those included.

The SAR measurements were performed using the SAM phantoms listed in section 3.1. Since the same phantoms and simulated tissue were used for the system accuracy verification and the device SAR measurements, the Z-axis scans included in Appendix 1 are applicable for verification of simulated tissue depth to be 15.0 cm ± 0.5 cm.

The test sample was operated in an over-the-air call in GPRS mode in the GSM 850, 900, 1800, and 1900 MHz bands. For the purposes of these tests the unit is commanded to the proper channel, transmitter power level and transmit mode of operation. To ensure worst-case SAR performance, the multi-slot GPRS class resulting in the highest time-average transmit power was utilized in each band. The radio was placed in the SAR measurement system with a fully charged battery. The radio was placed with the front of the device positioned at 2.5 cm from the flat portion of the SAM phantom, as per Supplement C 01-01 with flip open.

The following probe conversion factors were used on the E-Field probe(s) used for Push-To-Talk measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1506	900	5.75	8 of 9
		1810	4.78	8 of 9

Push-To-Talk Position with GPRS Mode, <i>Noted Multi-slot Class</i>								
f (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	10 g SAR value		1 g SAR value	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Class 11</i>	Channel 128							
	Channel 190	29.67	19.3	-0.268	0.241	0.26	0.326	0.35
	Channel 251							
1900 MHz <i>Class 10</i>	Channel 512							
	Channel 661	28.57	19.3	-0.084	0.115	0.12	0.187	0.19
	Channel 810							

Table 9: SAR measurement results at the highest possible output power, measured in a Push-To-Talk position against the ICNIRP and ANSI SAR Limit.

6.3 Body Worn Test Results

The SAR results shown in tables 10 through 16 are maximum SAR values averaged over 1 gram of phantom tissue, to demonstrate compliance to [3] and also over 10 grams of phantom tissue, to demonstrate compliance to the [6]. Also shown are the measured conducted output power levels, the temperature of the test facility during the test, the temperature of the tissue simulate after the test, the measured drift and the extrapolated SAR. The exact method of extrapolation is $New\ SAR = Old\ SAR * 10^{(-drift/10)}$. The SAR reported at the end of the measurement process by the DASY4™ measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process. This is the most conservative SAR because it corresponds to the average output power at the beginning of the SAR test. This extrapolation has been done because when the DUT is operating properly it may exhibit a slump in radiated power and SAR over time. This is verified by measuring the SAR drift after the test.

The test conditions that produced the highest SAR values in each band are indicated as bold numbers in the following tables and are included in Appendix 3. All other test conditions measured lower SAR values than those included in Appendix 3.

A “flat” phantom was for the body-worn tests. This “flat” phantom is made out of 1” thick natural High Density Polyethylene with a thickness at the bottom equal to 2.0 mm. It measures 52.7 cm(long) x 26.7 cm(wide) x 21.2 cm(tall). The measured dielectric constant of the material used is less than 2.3 and the loss tangent is less than 0.0046 all the way up to 2.184 GHz.

The tissue stimulant depth was verified to be 15.0 cm ± 0.5 cm. The same device holder described in section 6 was used for positioning the phone. The functional accessories were divided into two categories, the ones with metal components and the ones with non-metal components. For non-metallic component accessories’, testing was performed on the accessory that displayed the closest proximity to the flat phantom. Each metallic component accessory, if any, was checked for uniqueness of metal component so that each is tested with the device. If multiple accessories shared an identical metal component, only the accessory that dictates the closest spacing to the body was tested. In addition to accessory testing, the cellular phone was tested with the front and back of the phone facing the phantom. For voice mode operation, the phone was placed as a distance of 15 mm from the phantom. For data mode operation, the phone was placed as a distance of 25 mm from the phantom. The cellular phone was tested with a headset connected to the device for all body-worn SAR measurements.

There are no Body-Worn Accessories available for this phone.

The following probe conversion factors were used on the E-Field probe(s) used for the body worn measurements:

Description	Serial Number	f (MHz)	Conversion Factor	Cal Cert pg #
E-Field Probe ET3DV6R	1506	900	5.53	8 of 9
		1810	4.31	8 of 9

Body-Worn; Front of Phone 15 mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz	Channel 128	32.96						
	Channel 190	33.03	20.0	-0.049	0.335	0.34	0.479	0.48
	Channel 251	32.92						
1900 MHz	Channel 512	30.50						
	Channel 661	30.47	20.0	0.003	0.161	0.16	0.262	0.26
	Channel 810	30.46						

Table 10: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Back of Phone 15 mm from Phantom								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz	Channel 128	32.96						
	Channel 190	33.03	20.0	0.024	0.439	0.44	0.644	0.64
	Channel 251	32.92						
1900 MHz	Channel 512	30.50						
	Channel 661	30.47	19.4	-0.012	0.104	0.10	0.167	0.17
	Channel 810	30.46						

Table 11: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Noted Position of Phone 15 mm from Phantom with Bluetooth Mode Enabled								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Back</i>	Channel 128	32.96						
	Channel 190	33.03	19.4	-0.036	0.43	0.43	0.621	0.63
	Channel 251	32.92						
1900 MHz <i>Front</i>	Channel 512	30.50						
	Channel 661	30.47	19.4	-0.004	0.182	0.18	0.296	0.30
	Channel 810	30.46						

Table 12: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Noted Position of Phone 25 mm from Phantom with GPRS Mode, Noted Multi-slot Class								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Back, Class 11</i>	Channel 128							
	Channel 190	29.67	19.4	0.064	0.244	0.24	0.346	0.35
	Channel 251							
1900 MHz <i>Front, Class 10</i>	Channel 512							
	Channel 661	28.57	19.3	0.054	0.0838	0.08	0.136	0.14
	Channel 810							

Table 13: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Body-Worn; Noted Position of Phone 25 mm from Phantom with EDGE Mode Class 10								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Back</i>	Channel 128							
	Channel 190	26.46	19.4	0.013	0.0911	0.09	0.126	0.13
	Channel 251							
1900 MHz <i>Front</i>	Channel 512							
	Channel 661	26.47	19.3	-0.002	0.0431	0.04	0.0674	0.07
	Channel 810							

Table 14: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

Noted Body Worn Position with Battery SNN5808A								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Back 15mm</i>	Channel 128	32.96	19.4	0.045	0.499	0.50	0.748	0.75
	Channel 190	33.03	19.4	-0.048	0.535	0.54	0.812	0.82
	Channel 251	32.92	19.4	-0.084	0.534	0.54	0.804	0.82
1900 MHz <i>Front 15mm, w/ Bluetooth</i>	Channel 512	30.50						
	Channel 661	30.47	19.3	0.084	0.206	0.21	0.335	0.34
	Channel 810	30.46						

Table 15: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

<i>Noted Body Worn Position with Battery SNN5805A</i>								
<i>f</i> (MHz)	Description	Conducted Output Power (dBm)	Temp (°C)	Drift (dB)	<i>10 g SAR value</i>		<i>1 g SAR value</i>	
					Measured (W/kg)	Extrapolated (W/kg)	Measured (W/kg)	Extrapolated (W/kg)
850 MHz <i>Back 15mm</i>	Channel 128	32.96	19.4	-0.010	0.534	0.54	0.805	0.81
	Channel 190	33.03	19.4	-0.049	0.557	0.56	0.846	0.86
	Channel 251	32.92	19.4	-0.120	0.494	0.51	0.743	0.76
1900 MHz <i>Front 15mm, w/ Bluetooth</i>	Channel 512	30.50						
	Channel 661	30.47	19.3	0.115	0.185	0.19	0.3	0.30
	Channel 810	30.46						

Table 16: SAR measurement results at the highest possible output power, measured in a body-worn position against the ICNIRP and ANSI SAR Limit.

References

- [1] CENELEC, en50361:2001 “Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)”
- [2] CENELEC, en50360:2001 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)”.
- [3] ANSI / IEEE, C95.1 1999 Edition “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”
- [4] FCC OET Bulletin 65 Supplement C 01-01
- [5] IEEE 1528 2003 Edition “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”
- [6] ICNIRP Guidelines “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”

Appendix 1

SAR distribution comparison for the system accuracy verification

Date/Time: 4/4/2007 7:47:58 AM

Test Laboratory: Motorola - 040407 900Mhz GOOD -1.1%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 78

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 78; Input Power = 200 mW
Sim.Temp@meas = 20.2 °C; Sim.Temp@SPC = 20.2 °C; Room Temp @ SPC = 20.8 °C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.37 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.033 dB; Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.44 mW/g; Maximum value of SAR (measured) = 2.46 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.033 dB; Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.21 mW/g; SAR(10 g) = 1.41 mW/g; Maximum value of SAR (measured) = 2.39 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

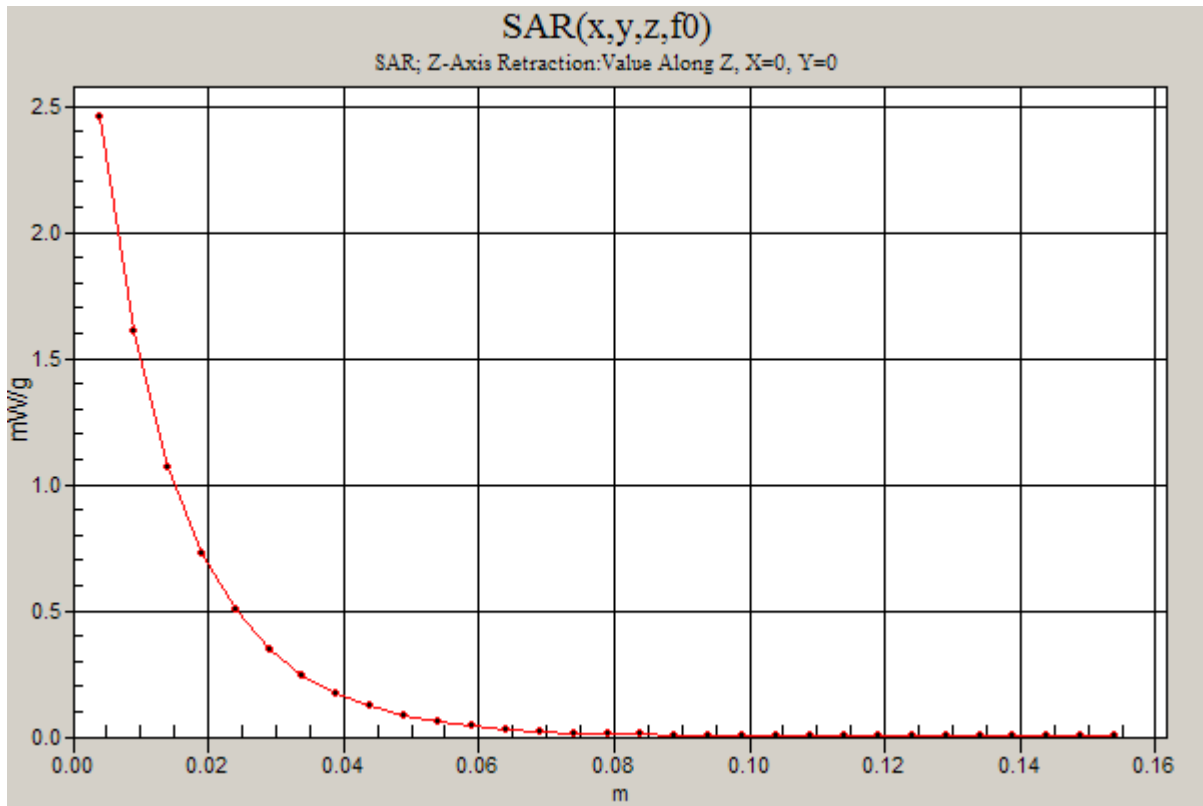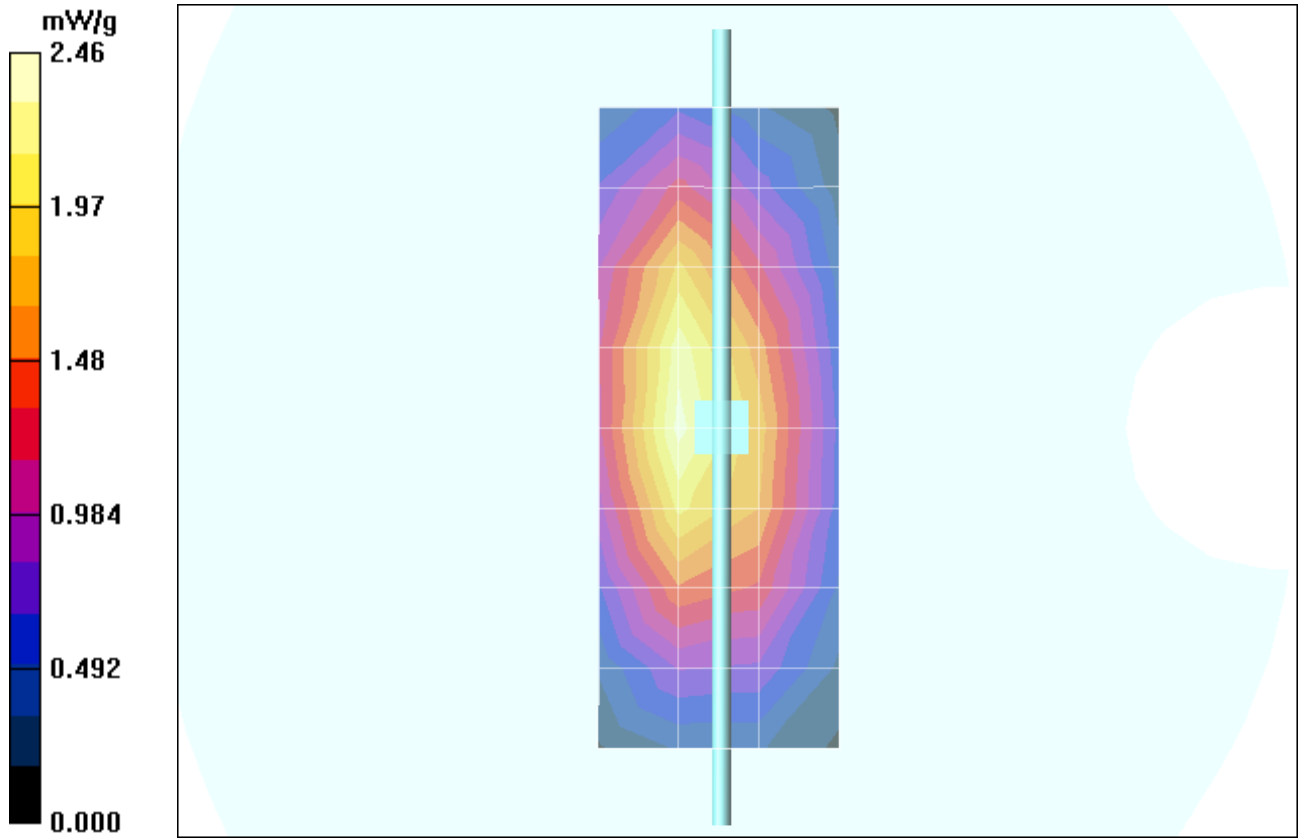

Date/Time: 4/5/2007 11:45:11 AM

Test Laboratory: Motorola - 040507 900Mhz GOOD .7%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 78

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 78; Input Power = 200 mW

Sim.Temp@meas = 20.1°C; Sim.Temp@SPC = 20.1°C; Room Temp @ SPC = 20.4°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.48 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.6 V/m; Power Drift = 0.046 dB; Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 2.29 mW/g; SAR(10 g) = 1.46 mW/g; Maximum value of SAR (measured) = 2.49 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.6 V/m; Power Drift = 0.046 dB; Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.44 mW/g; Maximum value of SAR (measured) = 2.47 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

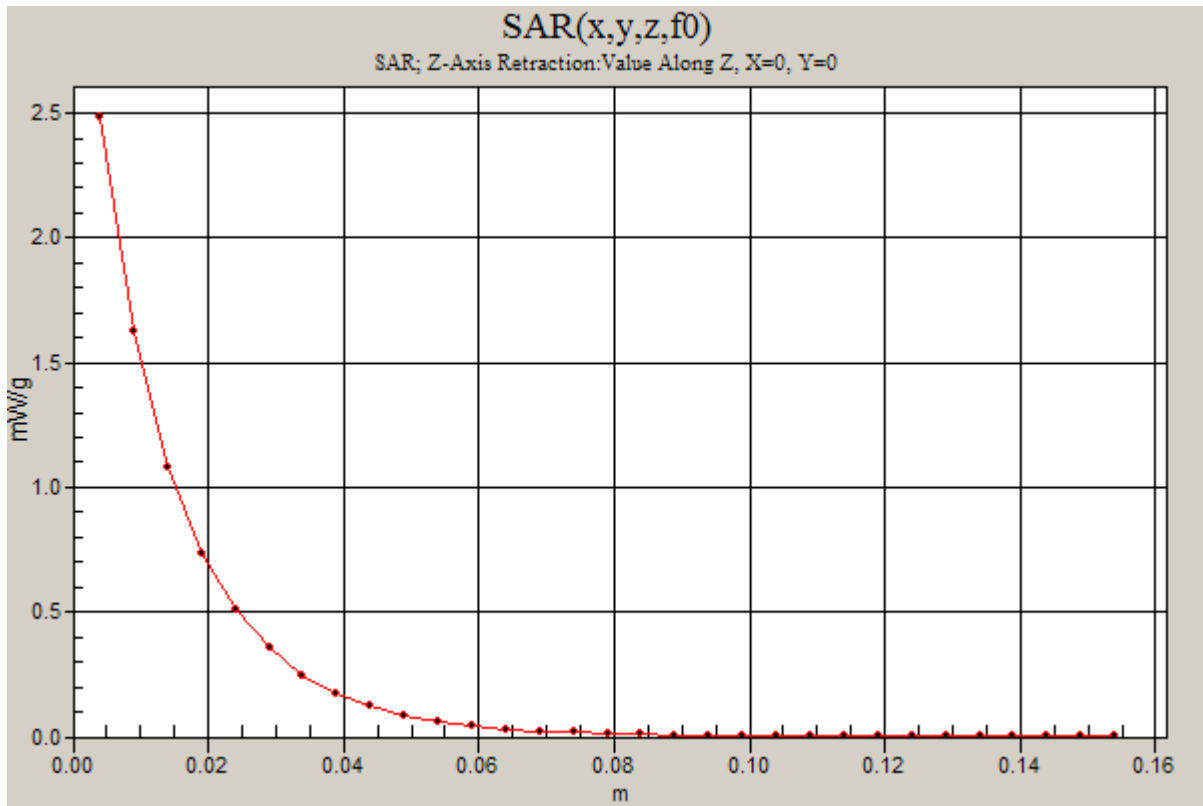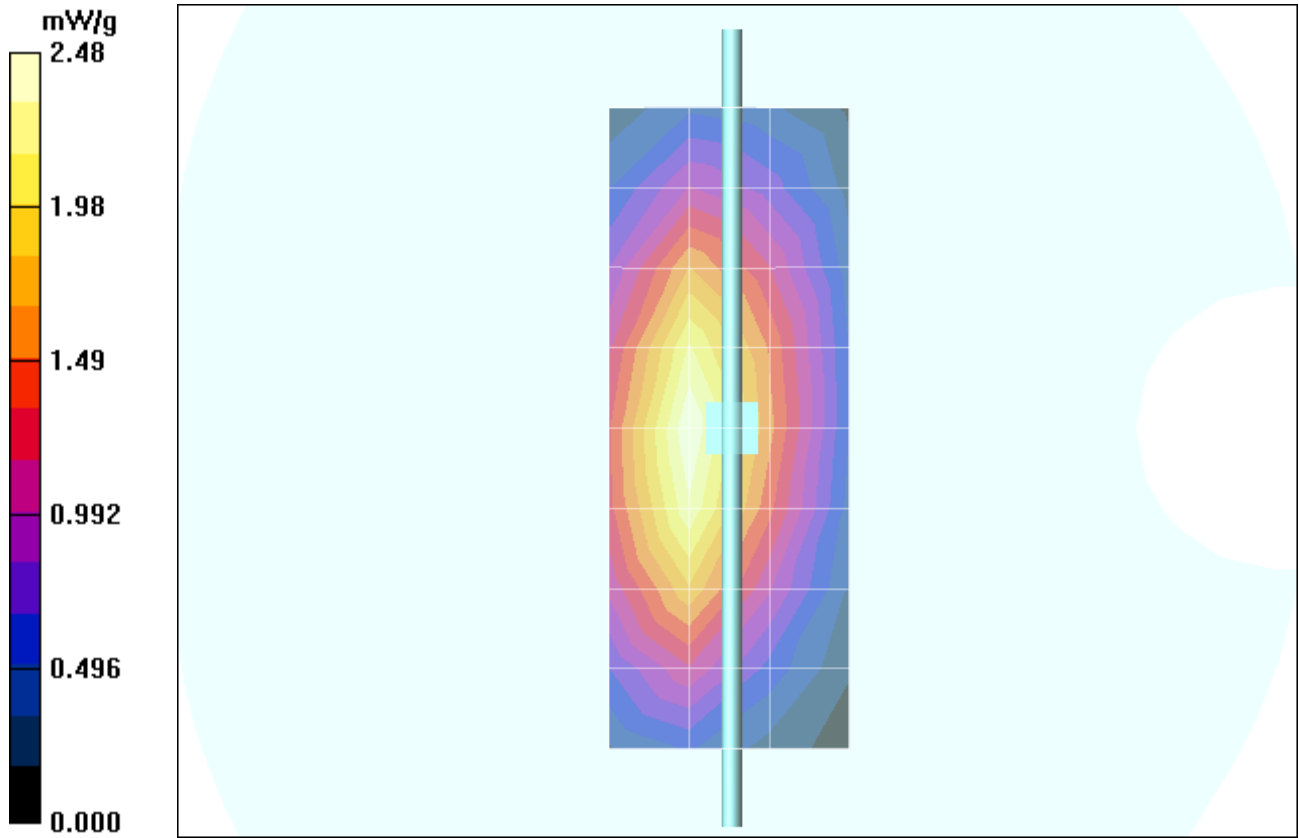

Date/Time: 4/9/2007 7:57:55 AM

Test Laboratory: Motorola - 040907 900Mhz GOOD-2.4%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 78

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 78; Input Power = 200 mW
Sim.Temp@meas = 20.0 °C; Sim.Temp@SPC = 20.0 °C; Room Temp @ SPC = 20.8 °C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.40 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.6 V/m; Power Drift = -0.055 dB; Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.41 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.6 V/m; Power Drift = -0.055 dB; Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.19 mW/g; SAR(10 g) = 1.4 mW/g; Maximum value of SAR (measured) = 2.37 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 2.42 mW/g

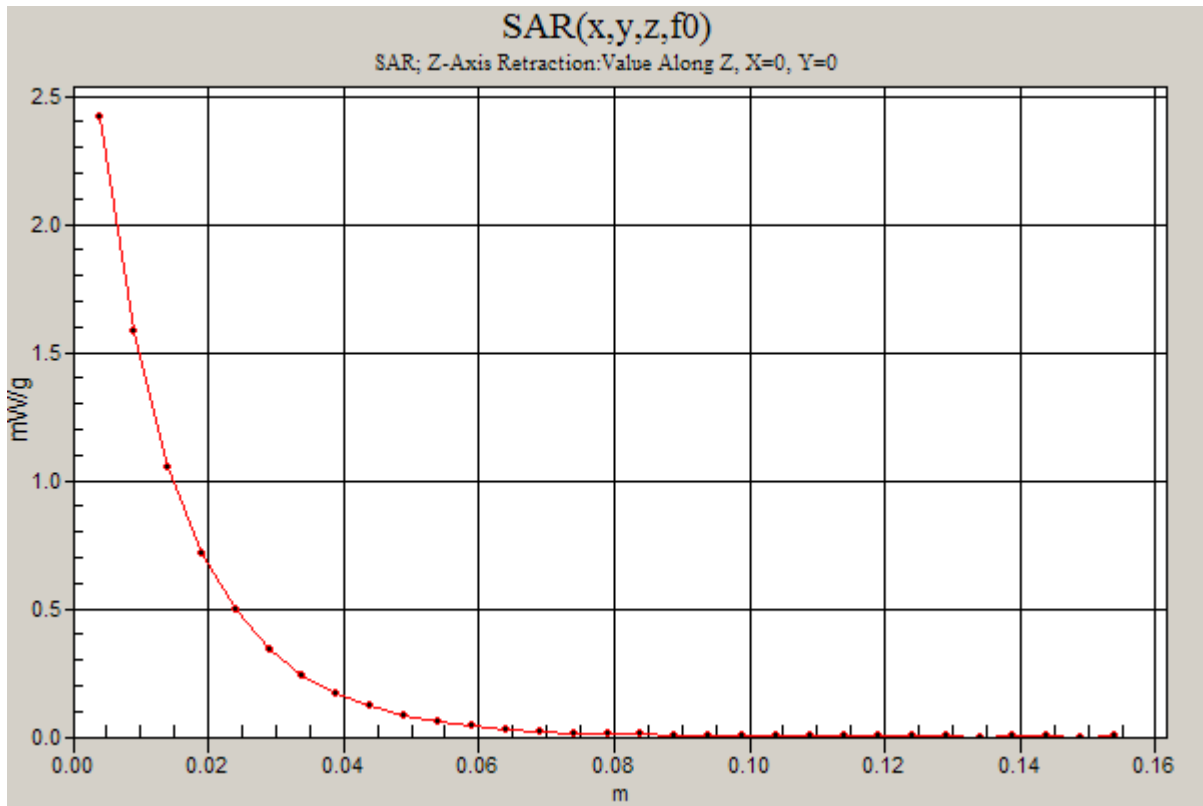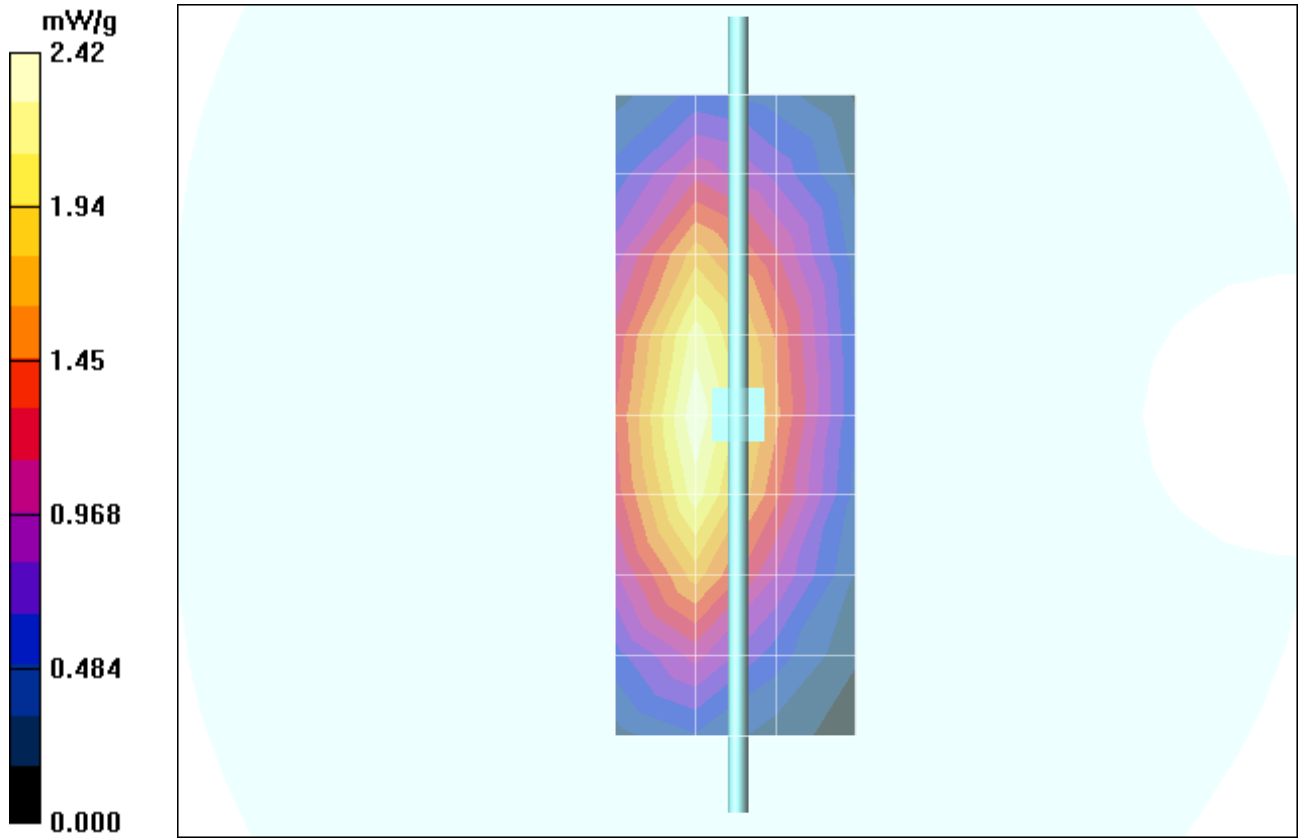

Date/Time: 4/13/2007 8:32:52 AM

Test Laboratory: Motorola - 041307 900Mhz GOOD-1.5%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 78

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 78; Input Power = 200 mW
Sim.Temp@meas = 20.4 °C; Sim.Temp@SPC = 20.4 °C; Room Temp @ SPC = 21.0 °C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 2.27 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = -0.018 dB; Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 2.24 mW/g; SAR(10 g) = 1.43 mW/g; Maximum value of SAR (measured) = 2.44 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = -0.018 dB; Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.21 mW/g; SAR(10 g) = 1.4 mW/g; Maximum value of SAR (measured) = 2.38 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm

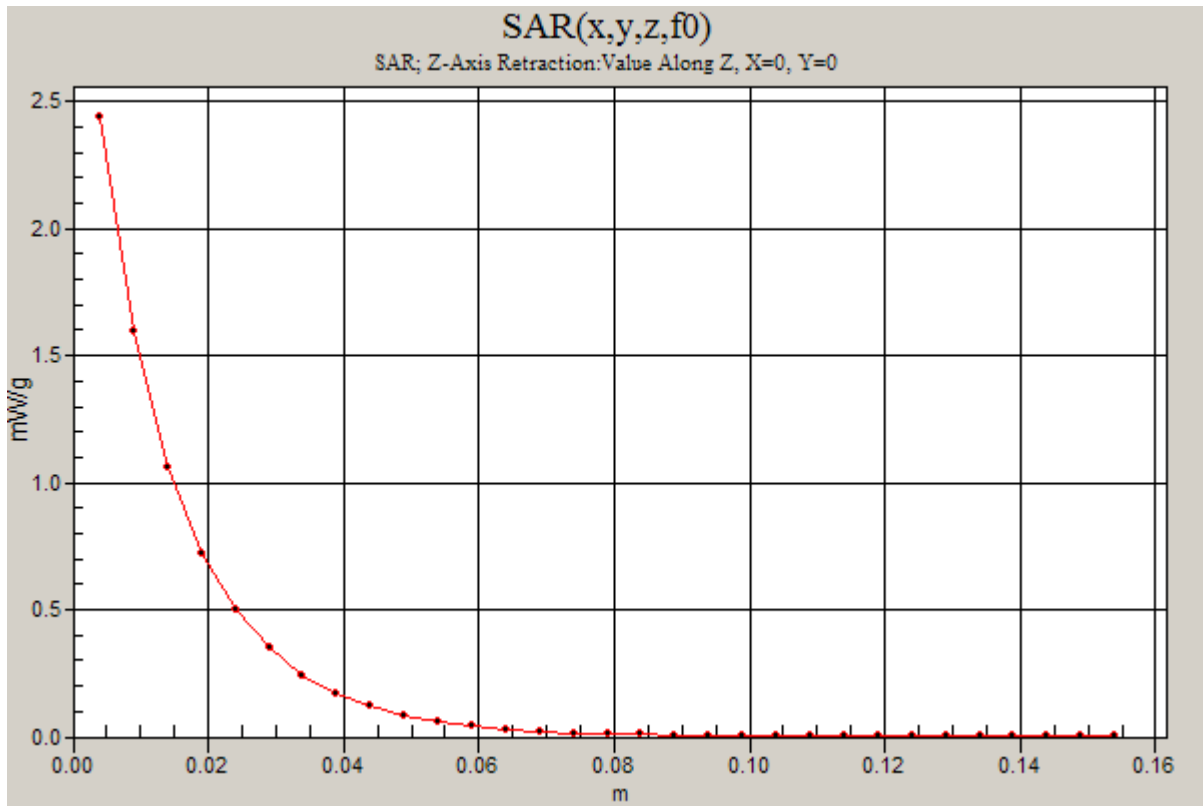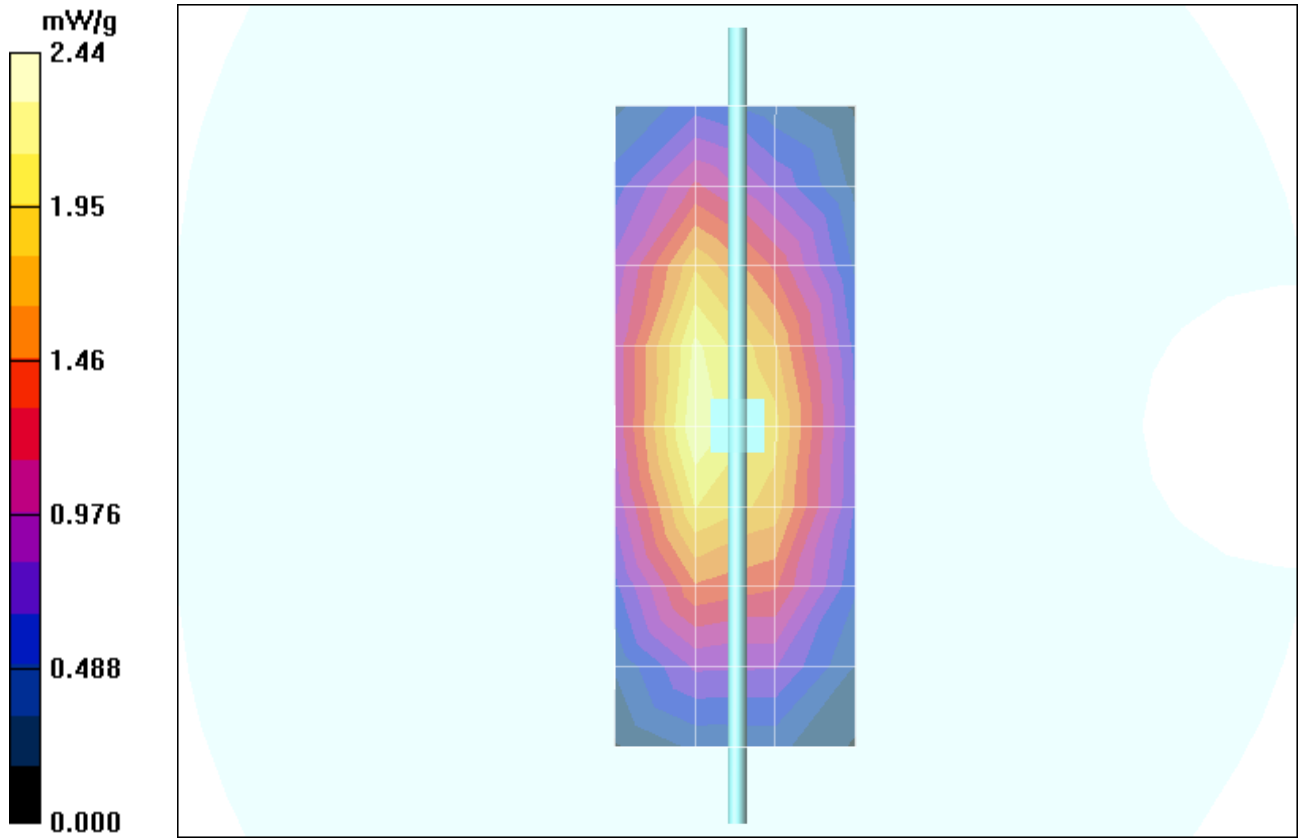

Date/Time: 4/14/2007 5:30:37 PM

Test Laboratory: Motorola - 041407 900Mhz GOOD-4%

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 78

Procedure Notes: 900 MHz System Performance Check; Dipole Sn# 78; Input Power = 200 mW

Sim.Temp@meas = 20.4°C; Sim.Temp@SPC = 20.4°C; Room Temp @ SPC = 20.5°C

Communication System: CW - Dipole; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 2.26 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.8 V/m; Power Drift = -0.061 dB; Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.21 mW/g; SAR(10 g) = 1.41 mW/g; Maximum value of SAR (measured) = 2.40 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.8 V/m; Power Drift = -0.061 dB; Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.13 mW/g; SAR(10 g) = 1.36 mW/g; Maximum value of SAR (measured) = 2.30 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$; Maximum value of SAR (measured) = 2.39 mW/g

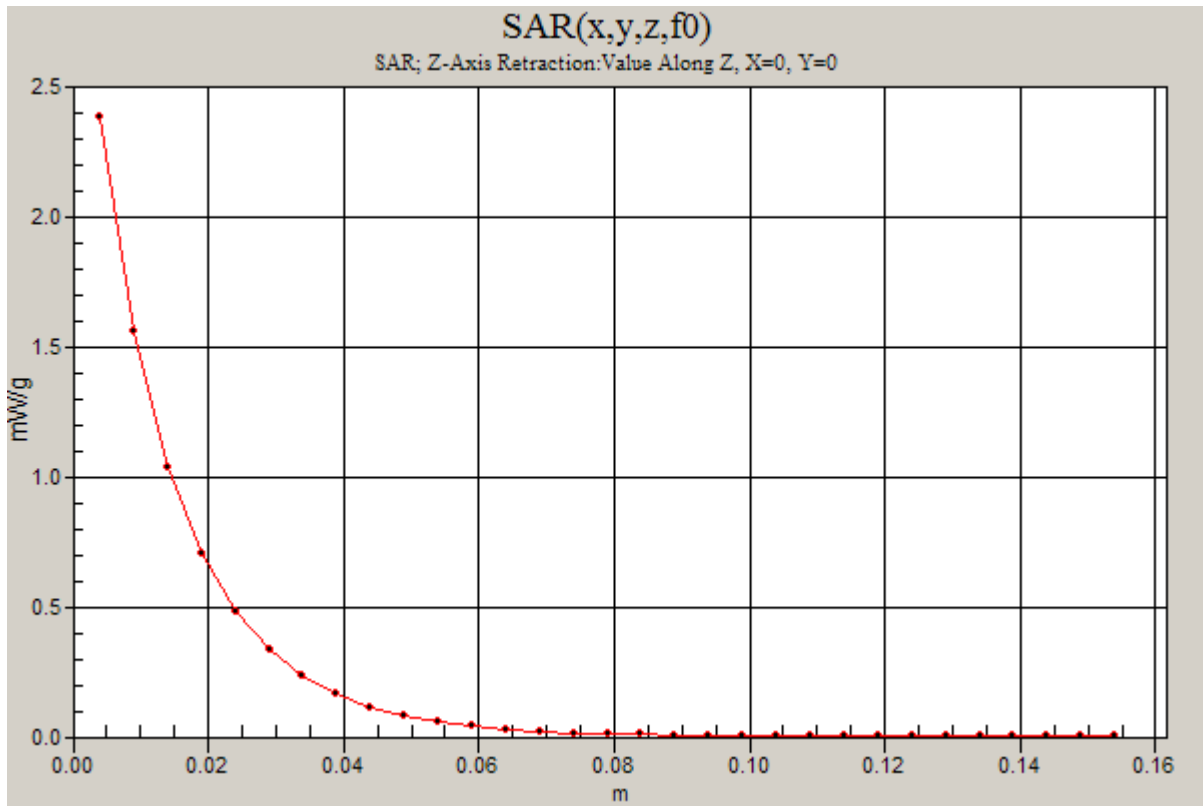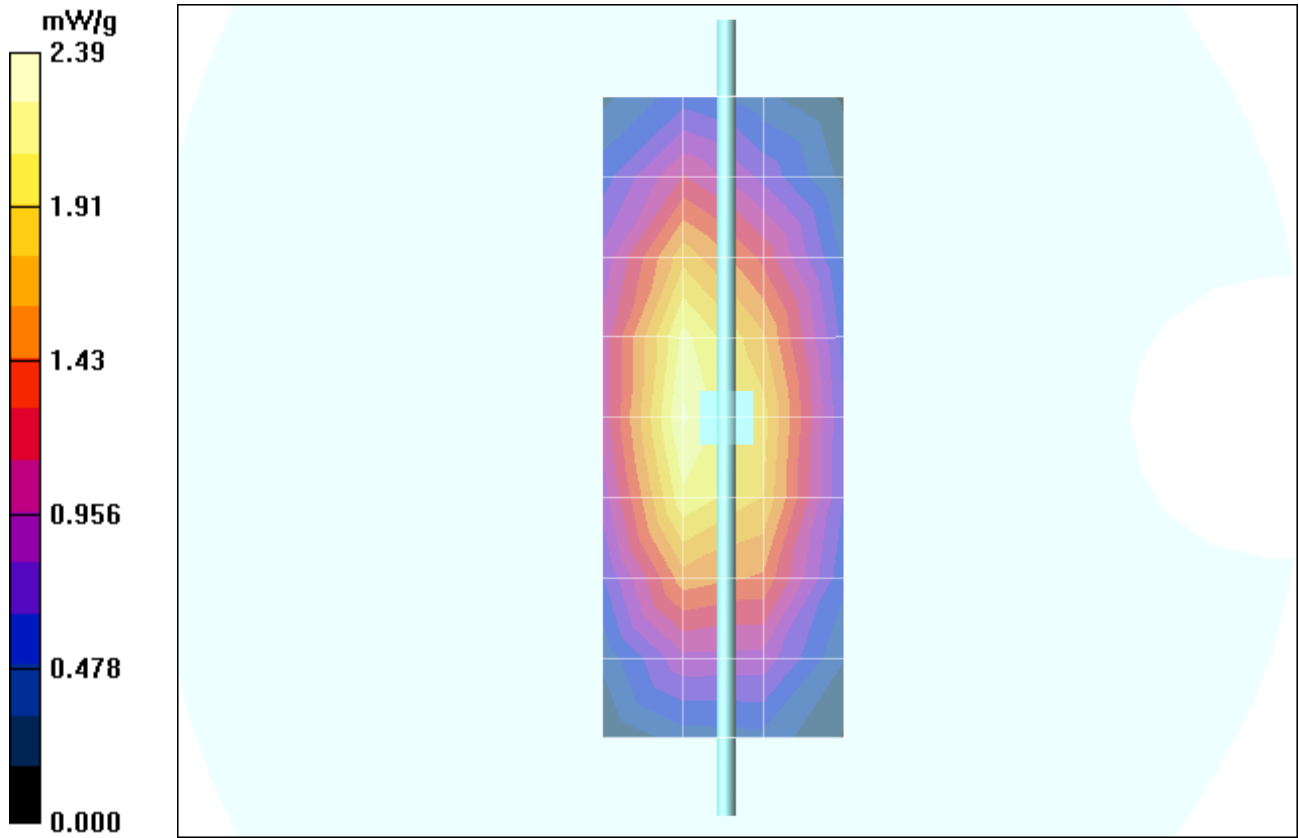

Date/Time: 4/9/2007 6:47:33 AM

Test Laboratory: Motorola - 040907 1800Mhz GOOD 1.6%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 281tr

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 281tr; Input Power = 200 mW
Sim.Temp@meas = 19.5 °C; Sim.Temp@SPC = 19.2 °C; Room Temp @ SPC = 20.4 °C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2 Sect 1, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (9x4x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 7.19 mW/g

Daily SPC Check/0-Degree 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 83.0 V/m; Power Drift = -0.040 dB; Peak SAR (extrapolated) = 13.7 W/kg

SAR(1 g) = 7.82 mW/g; SAR(10 g) = 4.16 mW/g; Maximum value of SAR (measured) = 8.83 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 83.0 V/m; Power Drift = -0.040 dB; Peak SAR (extrapolated) = 13.4 W/kg

SAR(1 g) = 7.66 mW/g; SAR(10 g) = 4.1 mW/g; Maximum value of SAR (measured) = 8.61 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$; Maximum value of SAR (measured) = 8.82 mW/g

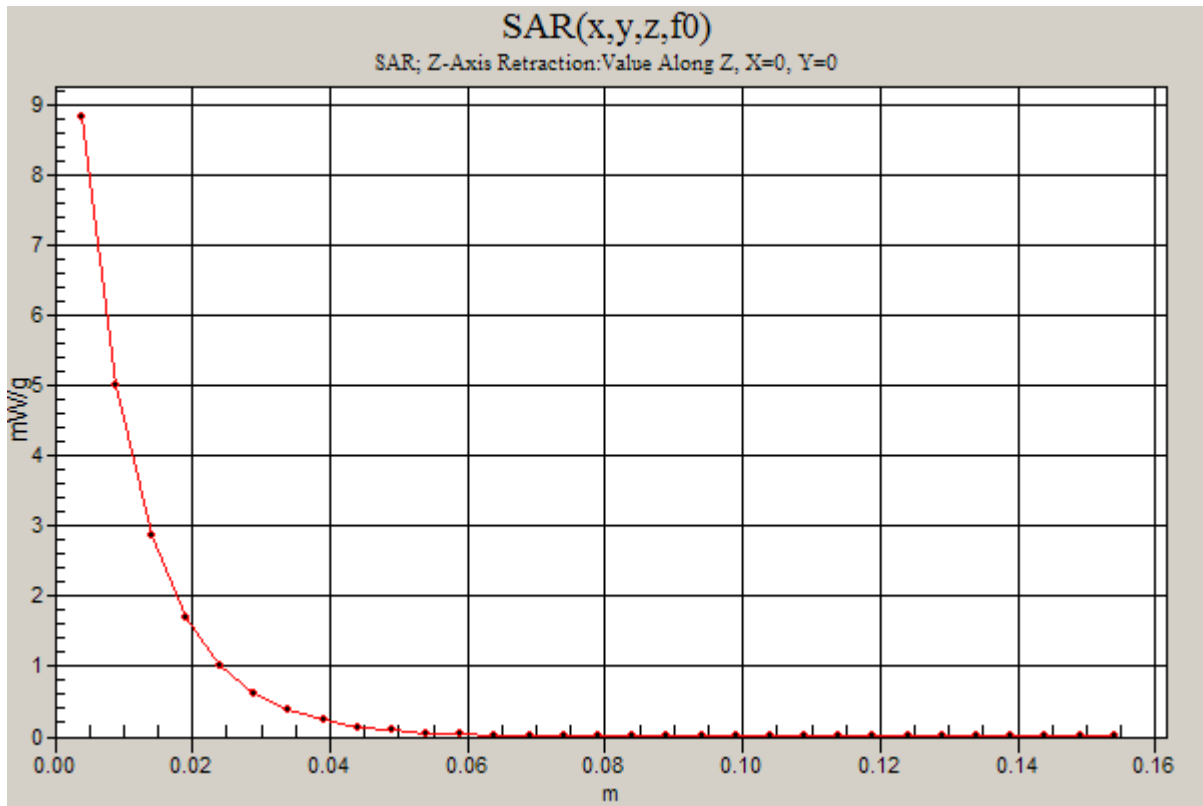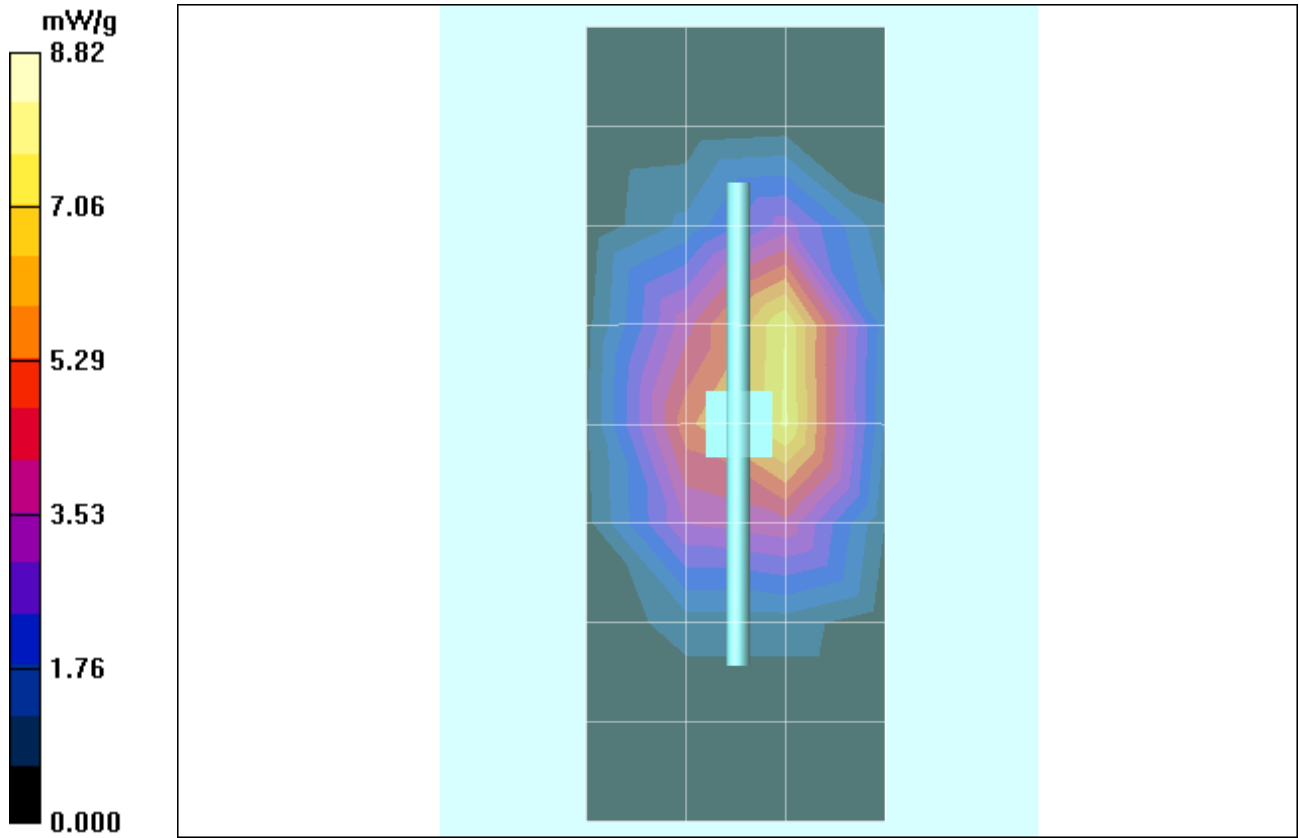

Date/Time: 4/10/2007 9:04:20 AM

Test Laboratory: Motorola - 041007 1800Mhz GOOD-1.6%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 281tr

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 281tr; Input Power = 200 mW
Sim.Temp@meas = 19.6°C; Sim.Temp@SPC = 19.6°C; Room Temp @ SPC = 20.8°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Channel Number: 8; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 7.25 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80.2 V/m; Power Drift = -0.038 dB; Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 7.54 mW/g; SAR(10 g) = 4.06 mW/g; Maximum value of SAR (measured) = 8.38 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80.2 V/m; Power Drift = -0.038 dB; Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 7.46 mW/g; SAR(10 g) = 4.02 mW/g; Maximum value of SAR (measured) = 8.34 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.41 mW/g

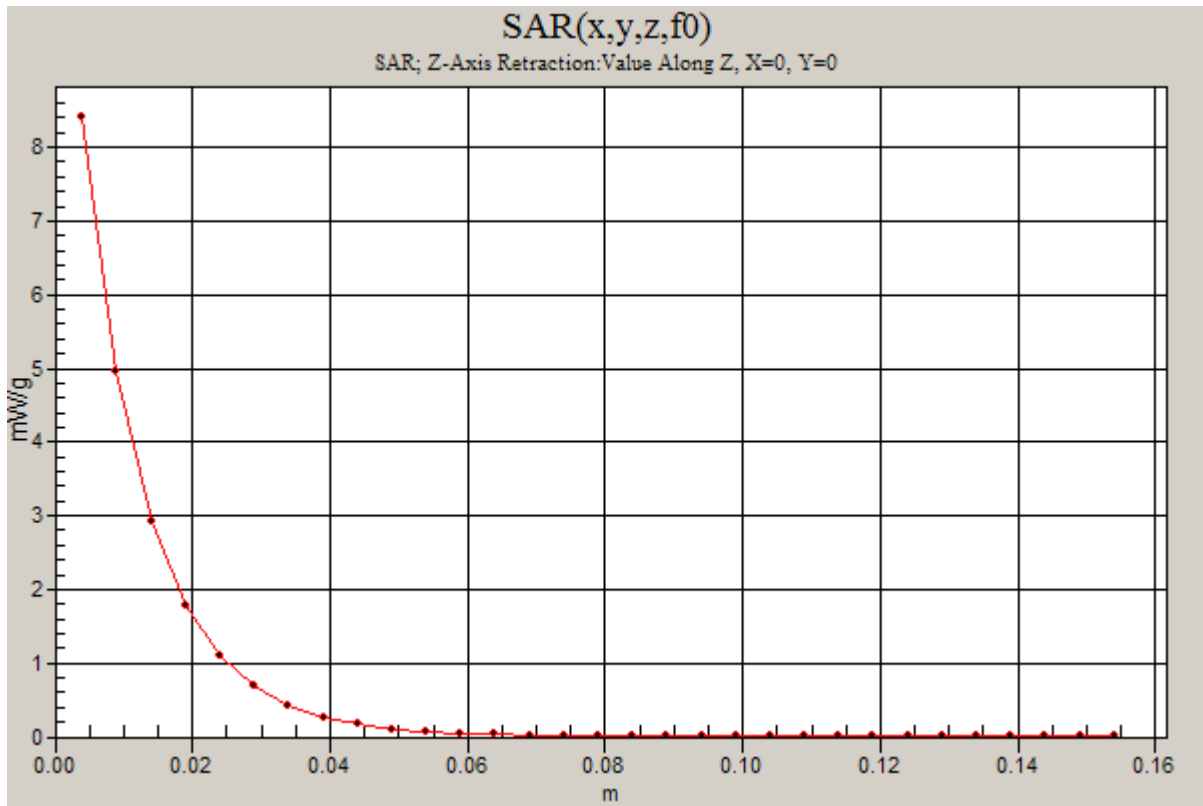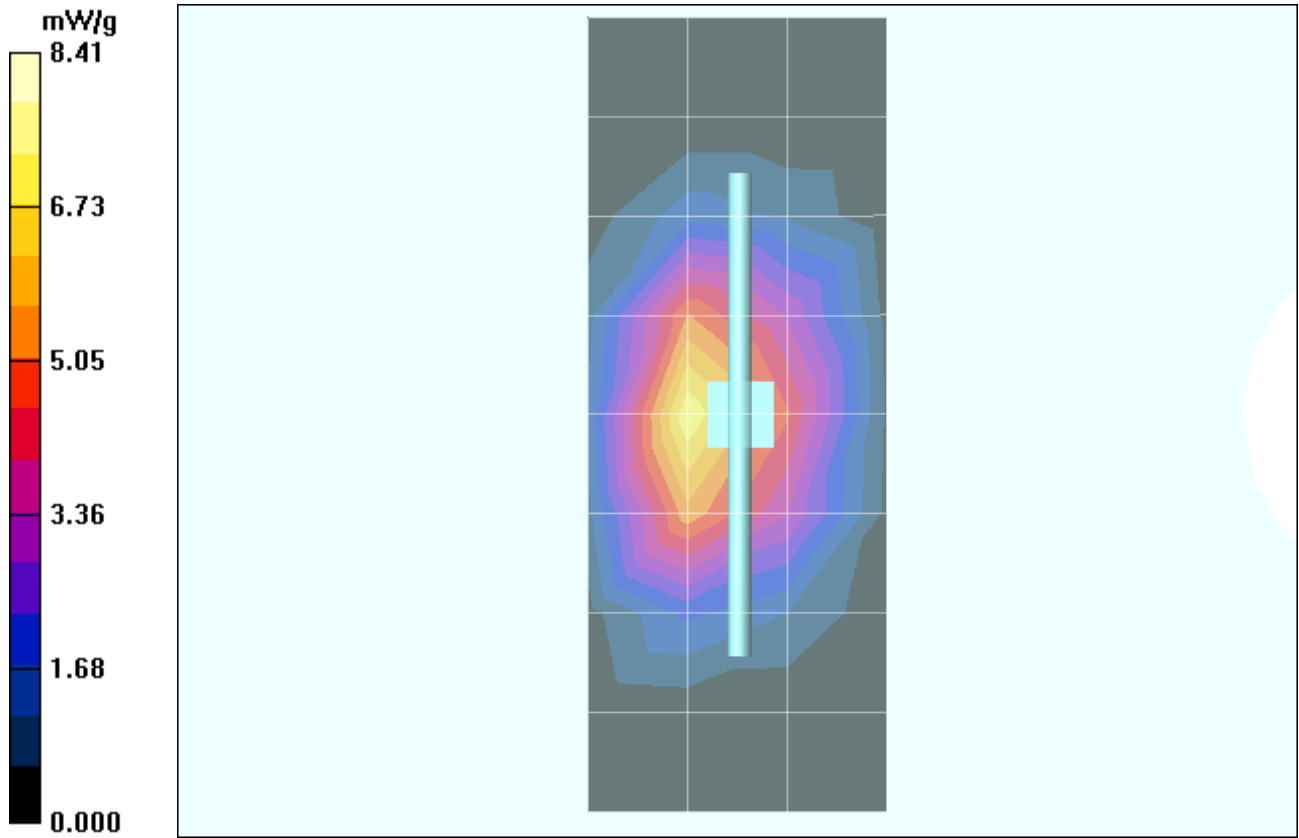

Date/Time: 4/14/2007 6:54:17 PM

Test Laboratory: Motorola - 041407 1800Mhz GOOD -5.3%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 281tr

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 281tr; Input Power = 200 mW

Sim.Temp@meas = 19.5°C; Sim.Temp@SPC = 19.6°C; Room Temp @ SPC = 20.5°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.34 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 6.51 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 82.8 V/m; Power Drift = -0.025 dB; Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 7.38 mW/g; SAR(10 g) = 3.93 mW/g; Maximum value of SAR (measured) = 8.32 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 82.8 V/m; Power Drift = -0.025 dB; Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 7.05 mW/g; SAR(10 g) = 3.76 mW/g; Maximum value of SAR (measured) = 7.87 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$; Maximum value of SAR (measured) = 8.24 mW/g

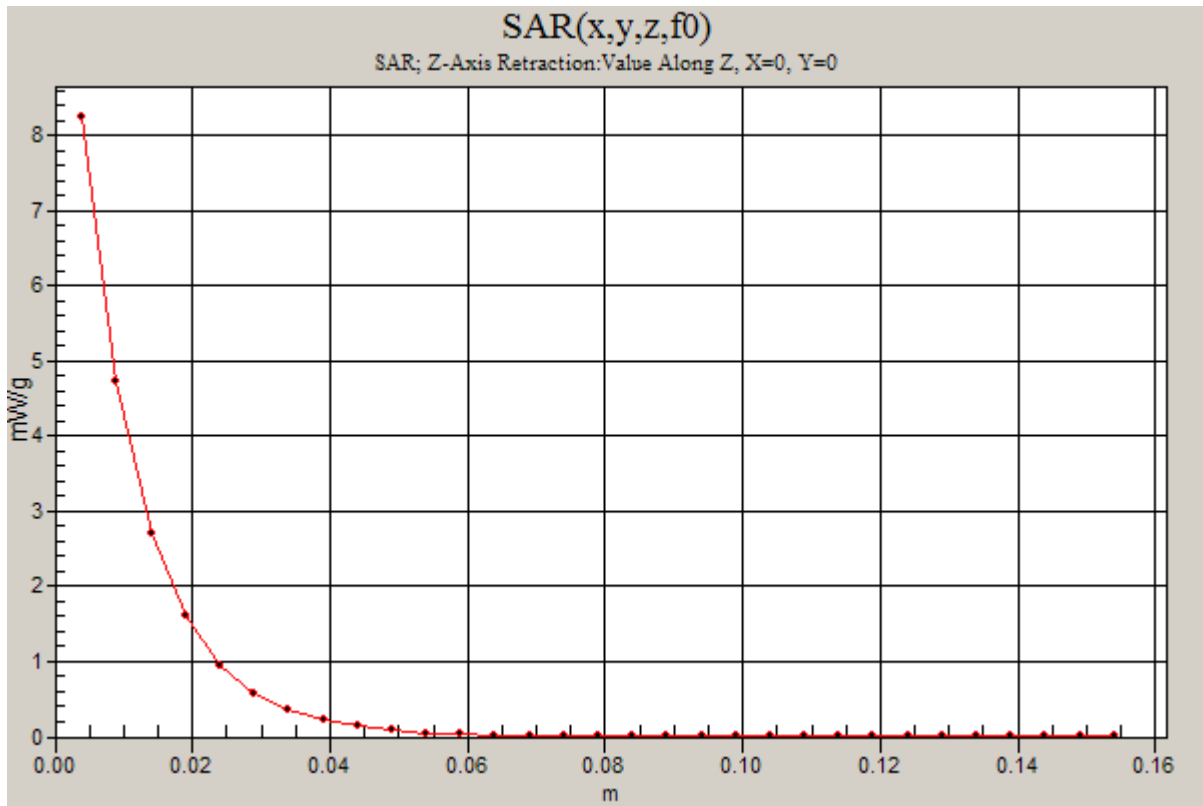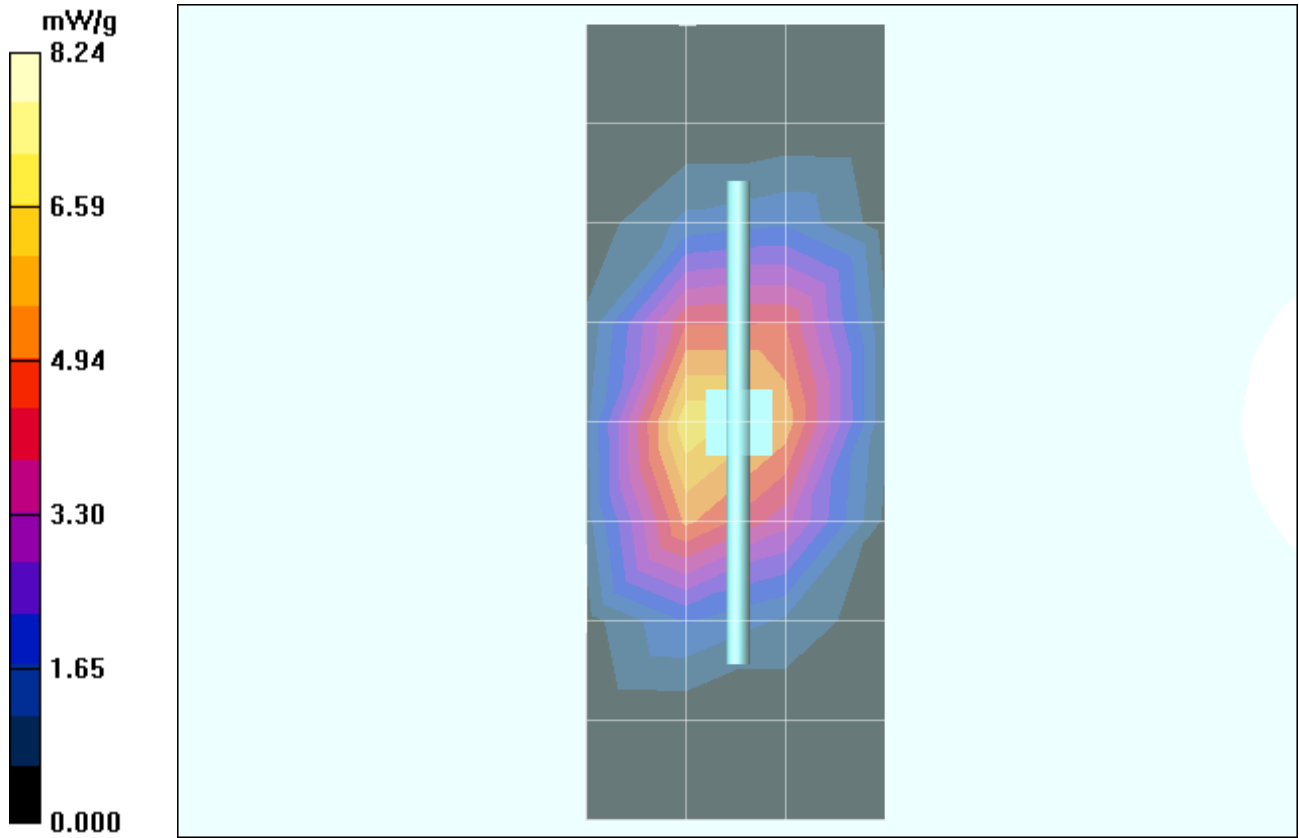

Date/Time: 4/15/2007 4:35:30 PM

Test Laboratory: Motorola - 041507 1800Mhz GOOD -2.7%

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 281tr

Procedure Notes: 1800 MHz System Performance Check; Dipole Sn# 281tr; Input Power = 200 mW

Sim.Temp@meas = 19.4°C; Sim.Temp@SPC = 19.5°C; Room Temp @ SPC = 20.6°C

Communication System: CW - Dipole; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: VALIDATION Only

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Daily SPC Check/Dipole Area Scan (4x9x1):

Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 6.22 mW/g

Daily SPC Check/0-Degree, 5x5x7 Cube (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.0 V/m; Power Drift = -0.033 dB; Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 7.53 mW/g; SAR(10 g) = 4 mW/g; Maximum value of SAR (measured) = 8.47 mW/g

Daily SPC Check/90-Degree 5x5x7 Cube (5x5x7)/Cube 0:



Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.0 V/m; Power Drift = -0.033 dB; Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 7.3 mW/g; SAR(10 g) = 3.87 mW/g; Maximum value of SAR (measured) = 8.10 mW/g

Daily SPC Check/Z-Axis Retraction (1x1x31):

Measurement grid: dx=20mm, dy=20mm, dz=5mm; Maximum value of SAR (measured) = 8.51 mW/g

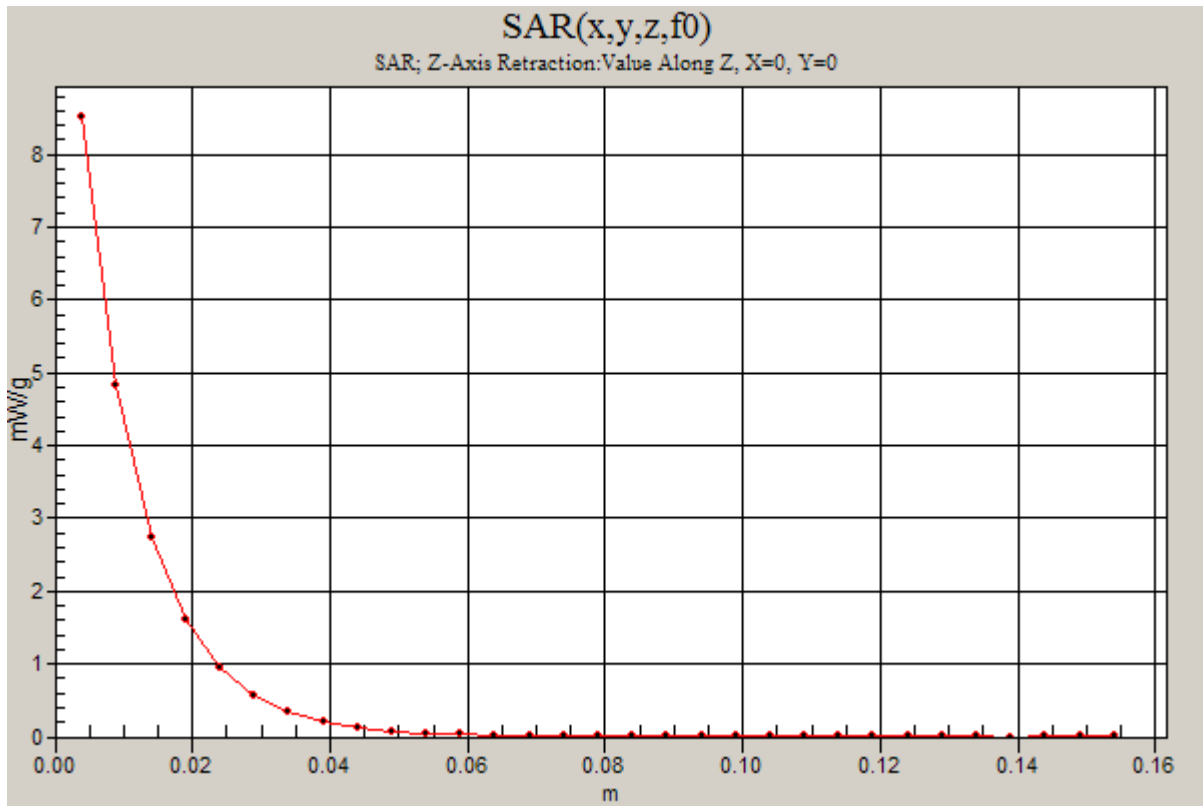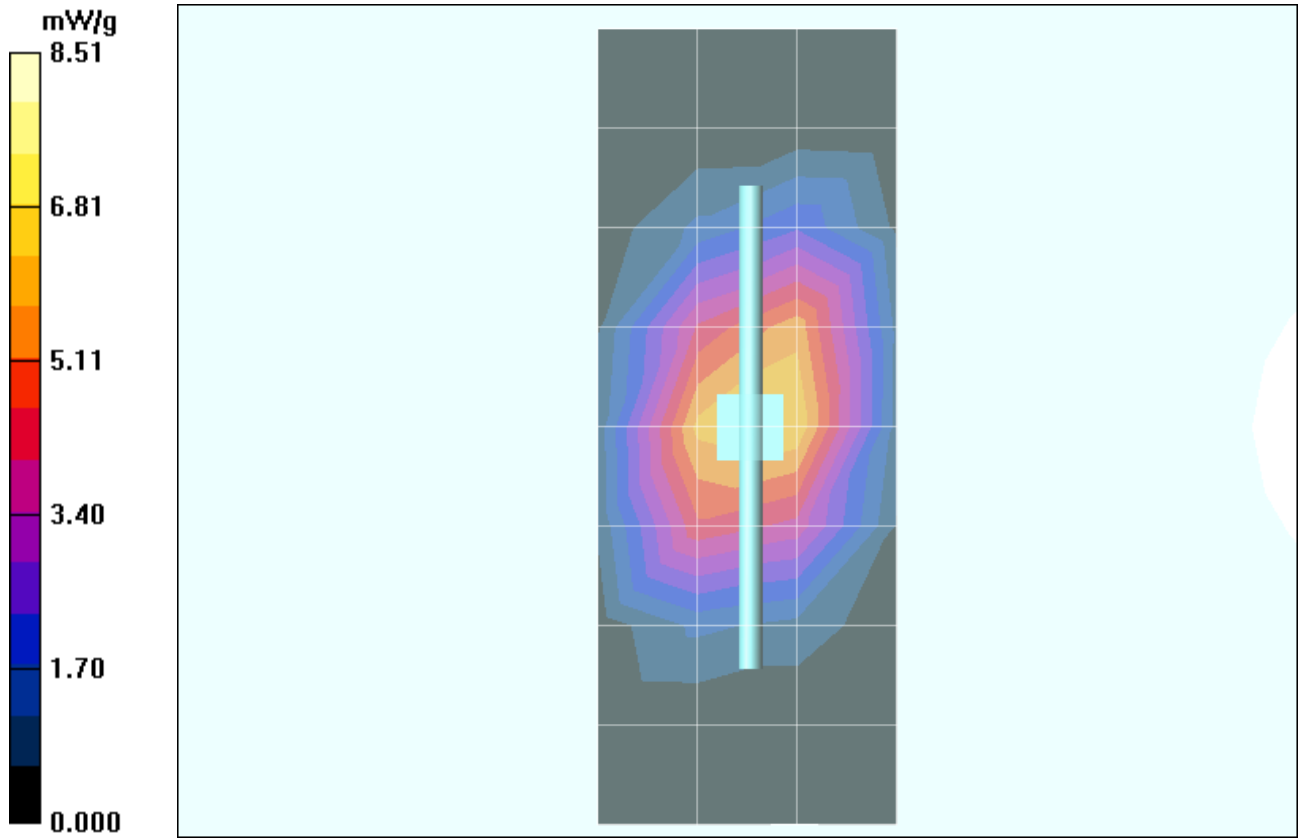

Appendix 2

SAR distribution plots for Phantom Head Adjacent Use

Date/Time: 4/9/2007 5:50:16 PM

Test Laboratory: Motorola - GSM 850 Cheek

Serial: 355563010000147

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5808A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R#_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.329 mW/g

Left Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.0 V/m; Power Drift = 0.020 dB; Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.226 mW/g; Maximum value of SAR (measured) = 0.410 mW/g

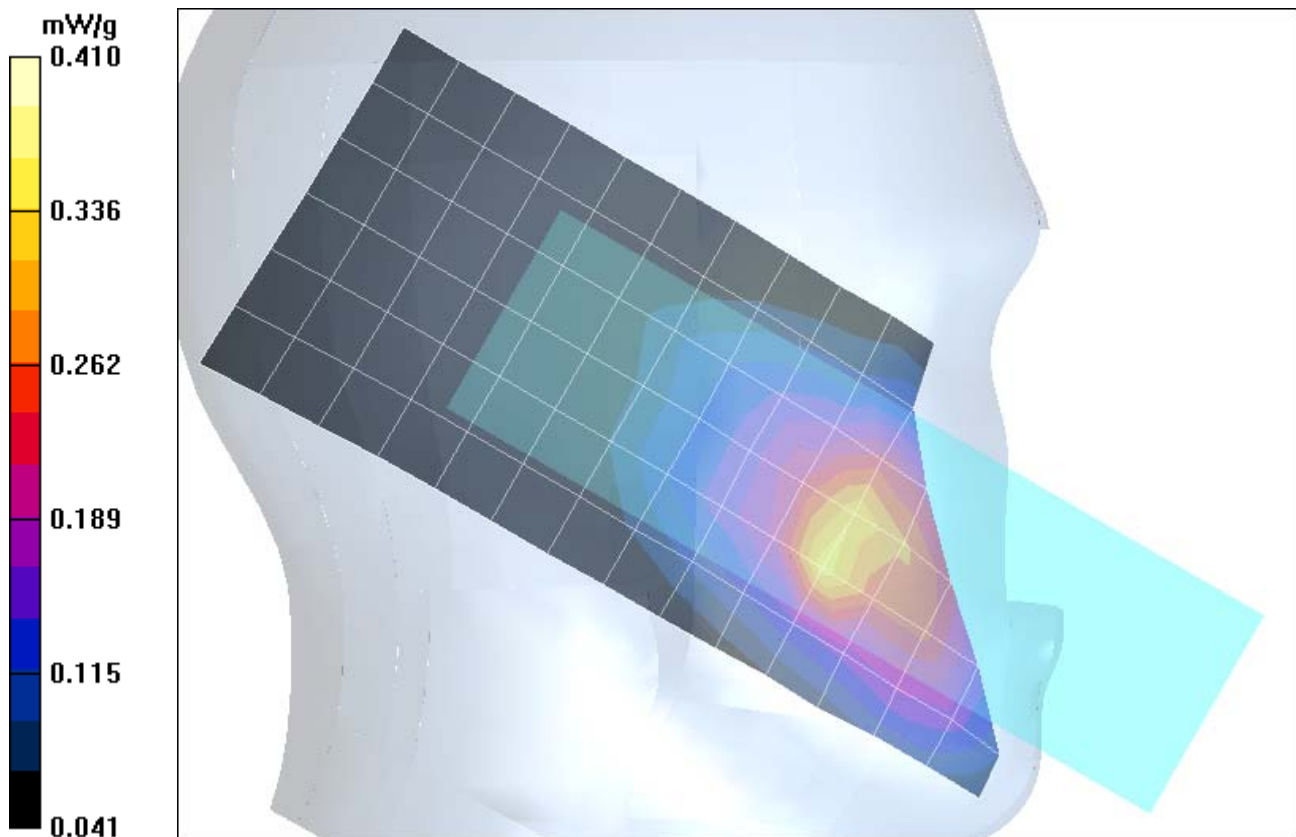

Date/Time: 4/9/2007 11:15:02 PM

Test Laboratory: Motorola - GSM 1900 Cheek

Serial: 355563010000147

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (cheek or rotated): Cheek

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Glycol Head; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R#_2 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.325 mW/g

Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.3 V/m; Power Drift = 0.041 dB; Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.180 mW/g; Maximum value of SAR (measured) = 0.318 mW/g

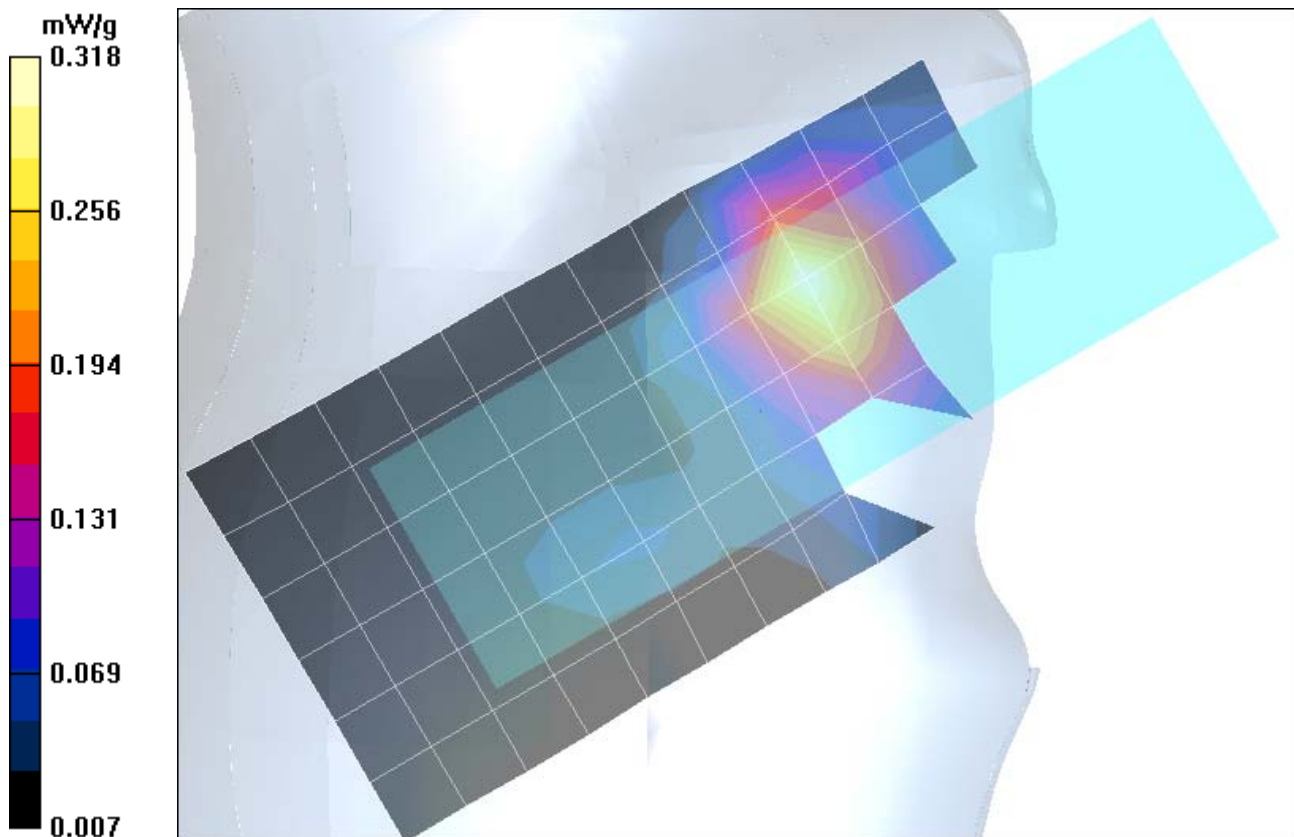

Date/Time: 4/4/2007 6:44:57 PM

Test Laboratory: Motorola - GSM 850 Tilt

Serial: 355563010000147

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5810A; DEVICE POSITION (check or rotated): Rotated

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Head; Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R#_2 Sugar SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (10mm) (10x25x1):


Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 0.229 mW/g

Right Head Template/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = -0.036 dB; Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.164 mW/g; Maximum value of SAR (measured) = 0.228 mW/g

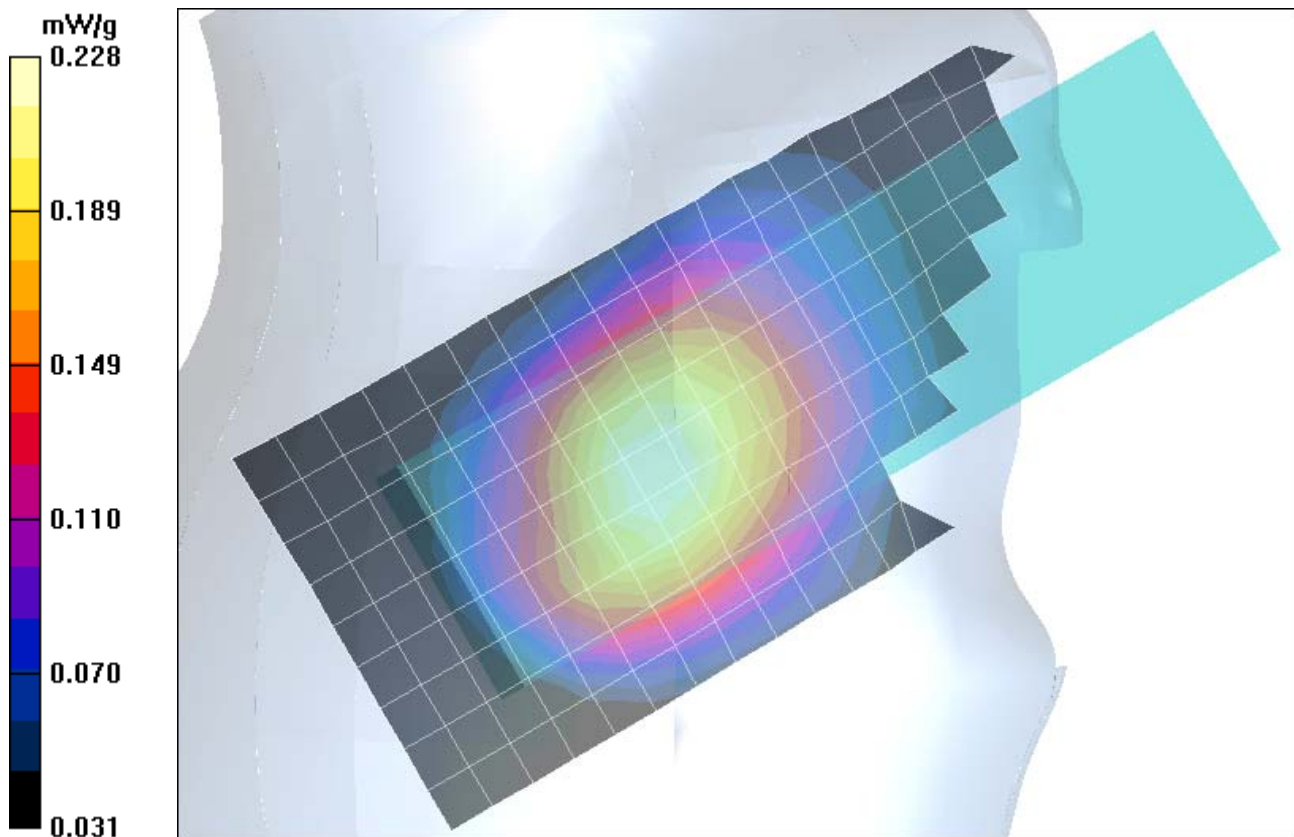

Date/Time: 4/9/2007 11:35:07 PM

Test Laboratory: Motorola - GSM 1900 Tilt

Serial: 355563010000147

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Accessory Model #: None

Battery Model #: SNN5805A; DEVICE POSITION (check or rotated): Tilted

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Glycol Head; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R#_2 Glycol SAM (extended range), Rev.1 (25-Mar-05); Type: SAM v4.0; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Head Template/Area Scan - Normal (15mm) (7x17x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.091 mW/g

Right Head Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.39 V/m; Power Drift = 0.011 dB; Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.054 mW/g; Maximum value of SAR (measured) = 0.094 mW/g

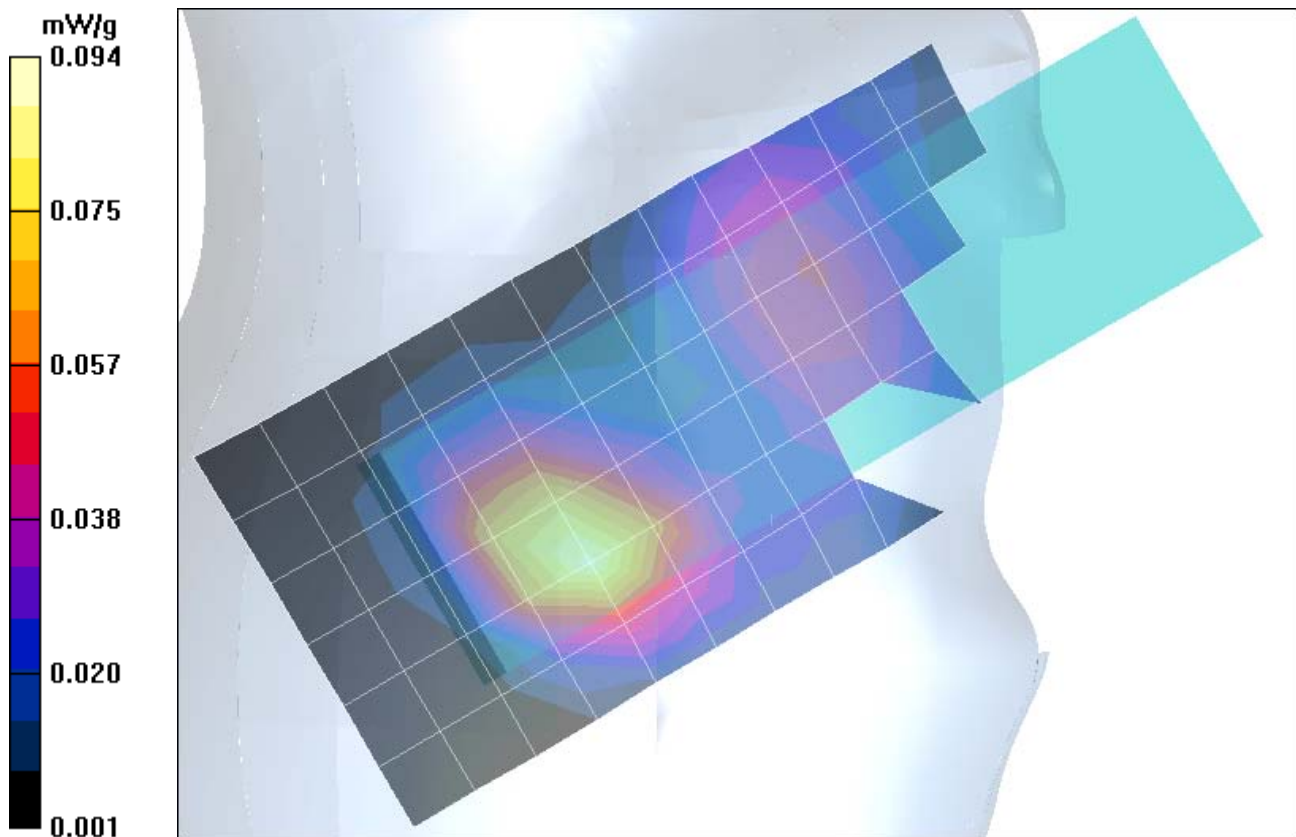

Appendix 3

SAR distribution plots for Push-To-Talk Use

Date/Time: 4/14/2007 8:29:14 PM

Test Laboratory: Motorola - GSM 850 PTT

Serial: 355563010000147

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Battery Model #: SNN5810A

Device Position: Push-to-Talk Position, Front of Phone 25mm From Flat Phantom

Communication System: GPRS 850 Cl. 11; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:2.67

Medium: Low Freq Head; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.75, 5.75, 5.75); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Sugar SAM; Type: SAM; Serial: TP-1106;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

SAM Phone Against Flat Section/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.347 mW/g

SAM Phone Against Flat Section/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.1 V/m; Power Drift = -0.268 dB; Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.241 mW/g; Maximum value of SAR (measured) = 0.345 mW/g

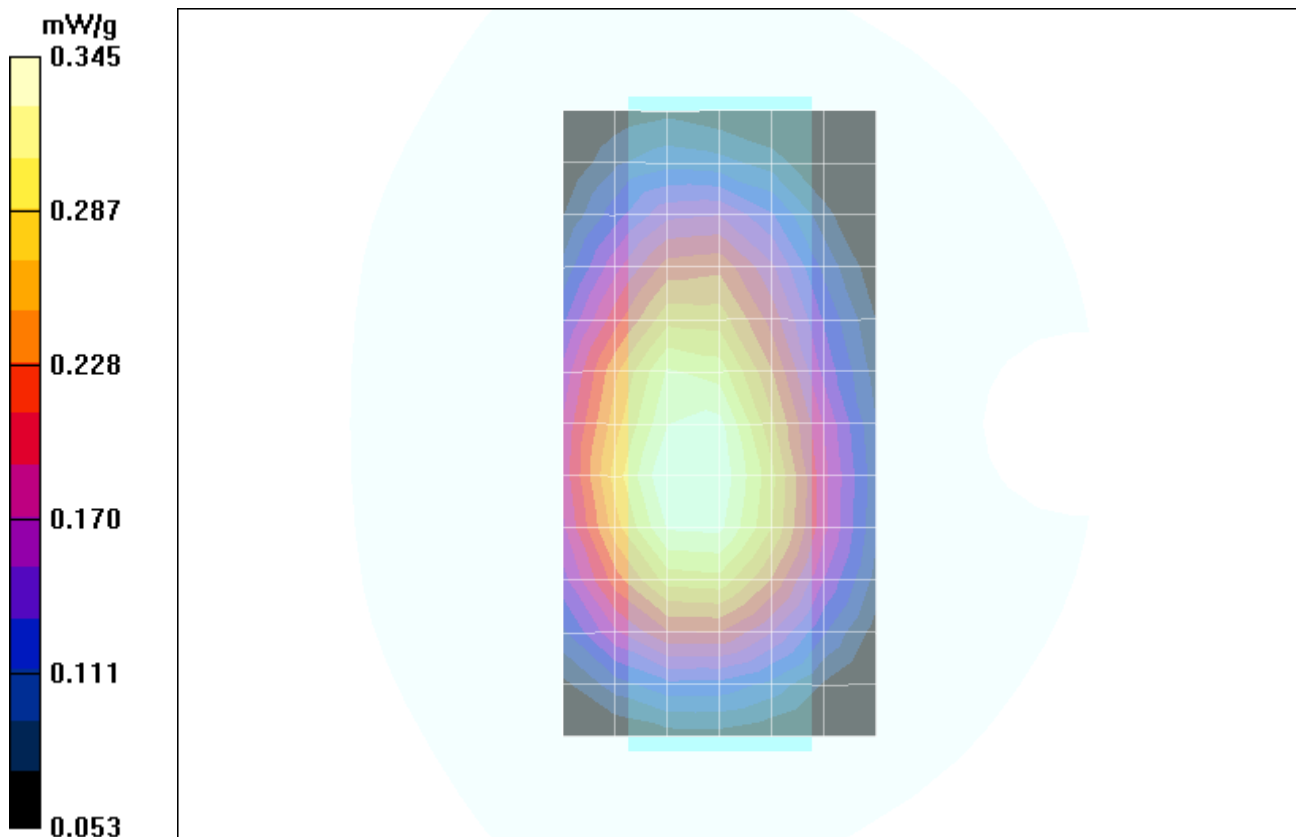

Date/Time: 4/15/2007 3:11:32 AM

Test Laboratory: Motorola - GSM 1900 PTT

Serial: 355563010000147

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Battery Model #: SNN5810A

Device Position: Push-To-Talk Position, Front of Phone 25mm From Flat Phantom

Communication System: GPRS 1900 CI 10; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:4

Medium: Glycol Head; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.78, 4.78, 4.78); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2: Glycol SAM; Type: SAM; Serial: TP-1235;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

SAM Phone Against Flat Section/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: dx=15mm, dy=15mm; Maximum value of SAR (measured) = 0.201 mW/g

SAM Phone Against Flat Section/5x5x7 Zoom Scan (<=3GHz) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.084 dB; Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.115 mW/g

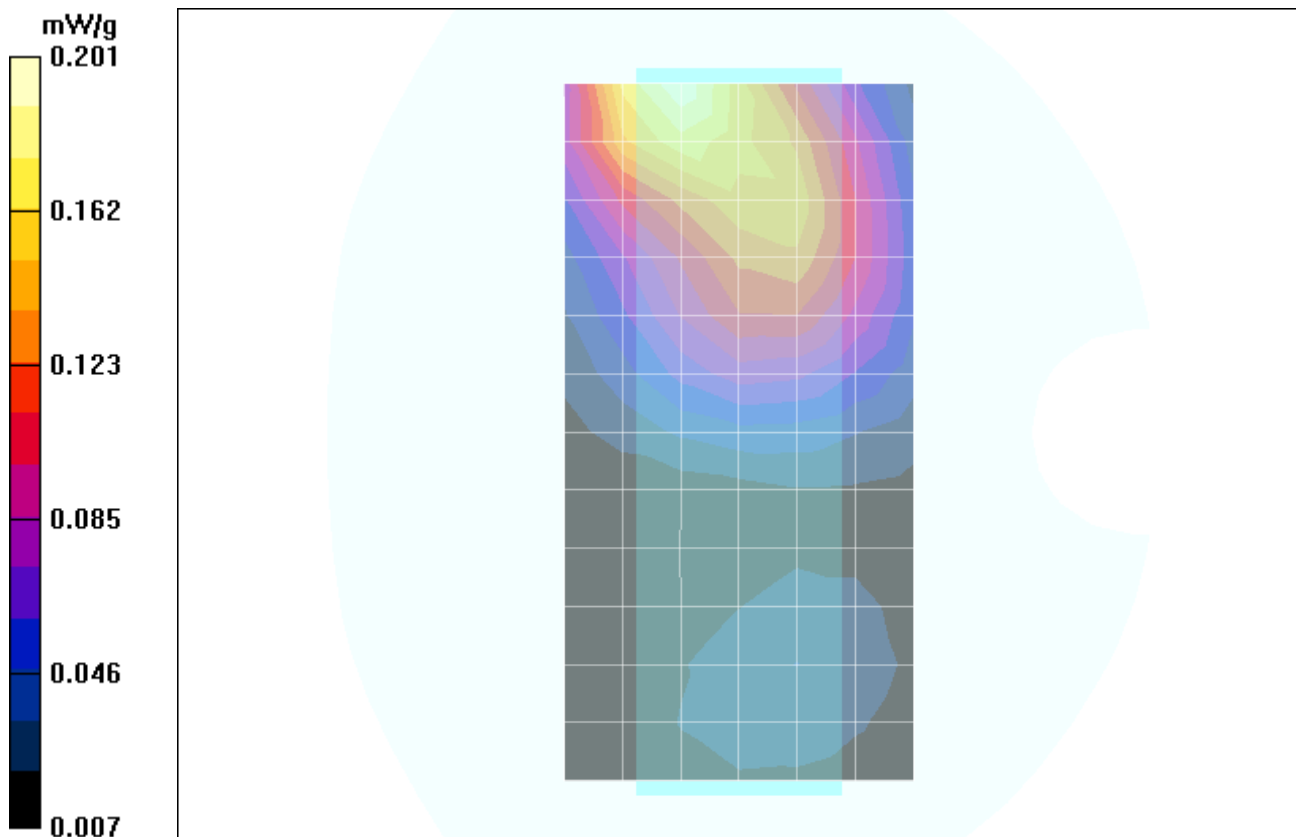

Appendix 4

SAR distribution plots for Body Worn Configuration

Date/Time: 4/13/2007 10:14:53 PM

Test Laboratory: Motorola - GSM 850 Body

Serial: 355563010000147

Procedure Notes: Pwr Step: 5; Antenna Position: Internal; Battery Model #: SNN5805A

Device Position: Body Worn, Back of Phone 15mm From Phantom

Communication System: GSM 850; Frequency: 836.6 MHz; Channel Number: 190; Duty Cycle: 1:8

Medium: Low Freq Body; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(5.53, 5.53, 5.53); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2 Section 2, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (15mm) (13x7x1):


Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$; Maximum value of SAR (measured) = 0.851 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.2 V/m; Power Drift = -0.049 dB; Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.557 mW/g; Maximum value of SAR (measured) = 0.925 mW/g

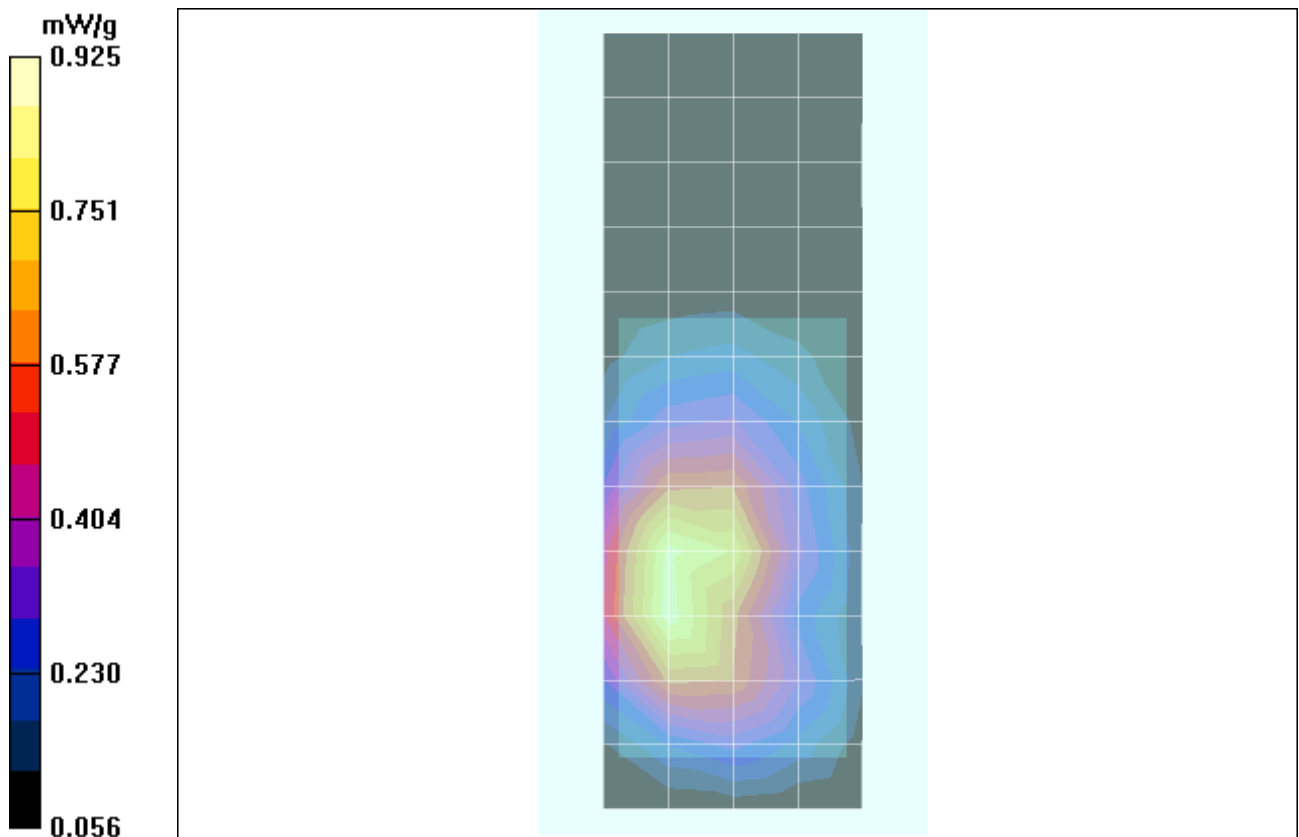

Date/Time: 4/15/2007 12:07:14 AM

Test Laboratory: Motorola - GSM 1900 Body

Serial: 355563010000147

Procedure Notes: Pwr Step: 0; Antenna Position: Internal; Battery Model #: SNN5808A

Device Position: Body Worn, Front of Phone 15mm From Phantom with Bluetooth Mode Enabled

Communication System: GSM 1900; Frequency: 1880 MHz; Channel Number: 661; Duty Cycle: 1:8

Medium: Glycol Body; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.59 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ET3DV6R - SN1506; ConvF(4.31, 4.31, 4.31); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn650; Calibrated: 8/22/2006
- Phantom: R2 Sect 1, Amy Twin, Rev2 (23-June-04); Type: Amy Twin Flat; Serial: n/a;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Amy Twin Phone Template/Area Scan - Normal Body (10mm) (19x10x1):


Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 0.352 mW/g

Amy Twin Phone Template/5x5x7 Zoom Scan ($\leq 3\text{GHz}$) (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.4 V/m; Power Drift = 0.084 dB; Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.206 mW/g; Maximum value of SAR (measured) = 0.363 mW/g

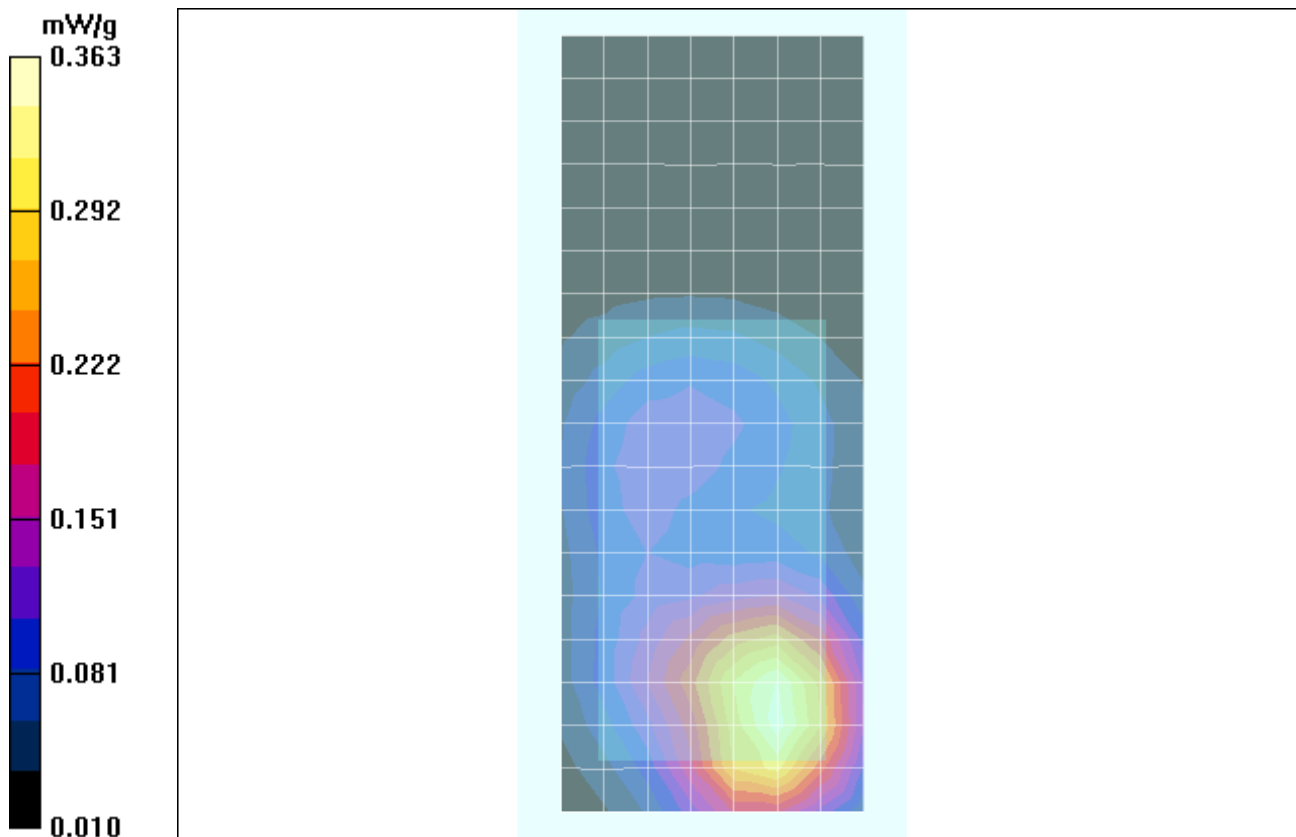

Appendix 5

Probe Calibration Certificate



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Motorola MDb**

Certificate No. **ET3-1506_May06**

CALIBRATION CERTIFICATE

Object **ET3DV6R - SN: 1506**

Calibration procedure(s) **QA CAL-01-v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 30, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	2-Feb-06 (SPEAG, No. DAE4-654_Feb06)	Feb-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: May 31, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6R

SN:1506


Manufactured:	October 24, 1999
Last calibrated:	May 26, 2005
Recalibrated:	May 30, 2006

Calibrated for DASYS Systems

(Note: non-compatible with DASYS2 system!)




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

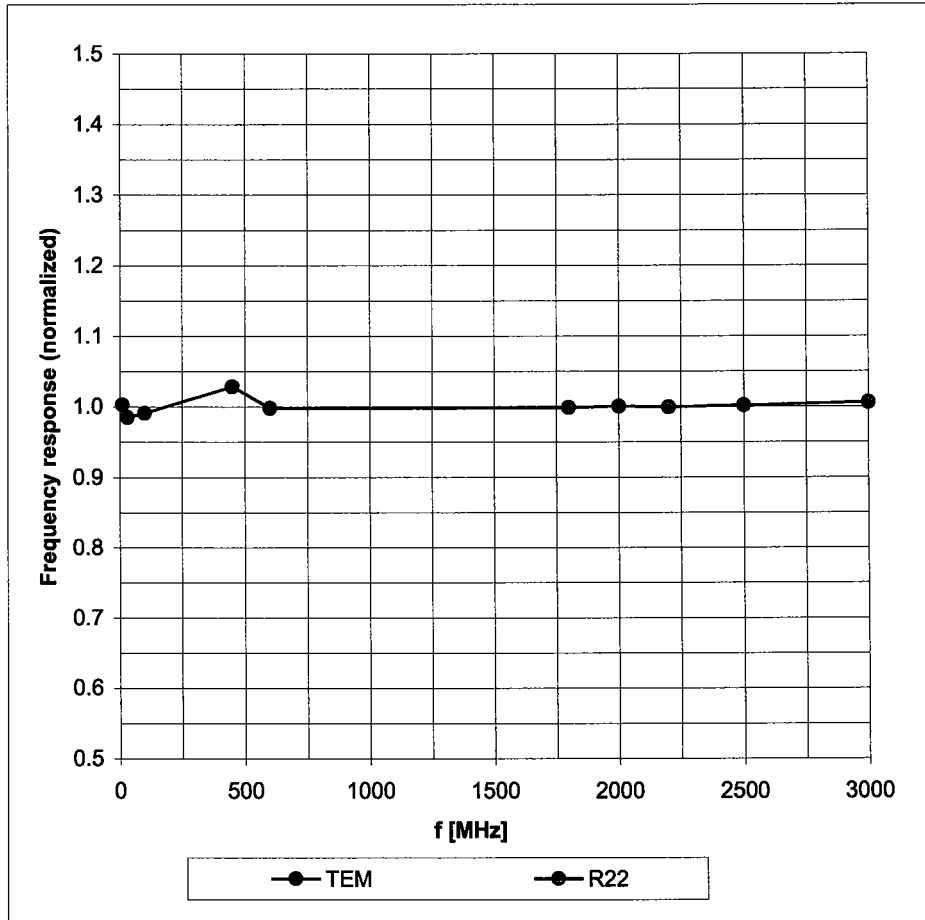


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

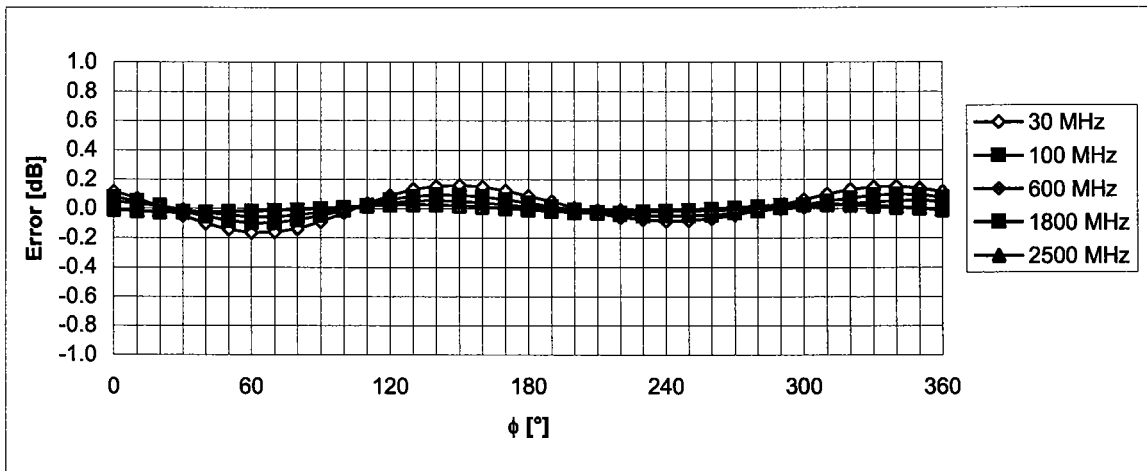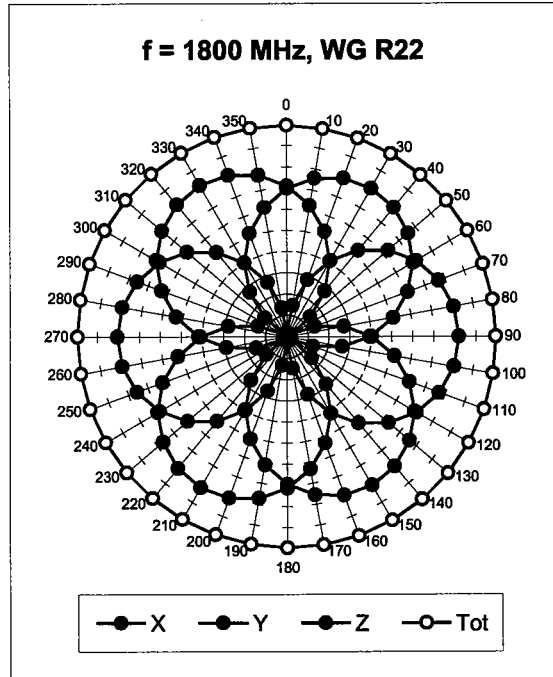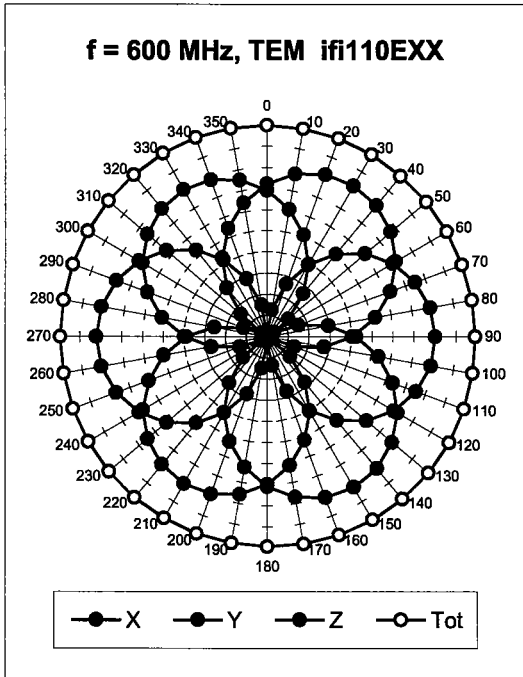



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (Waveguide R22, f = 1800 MHz)

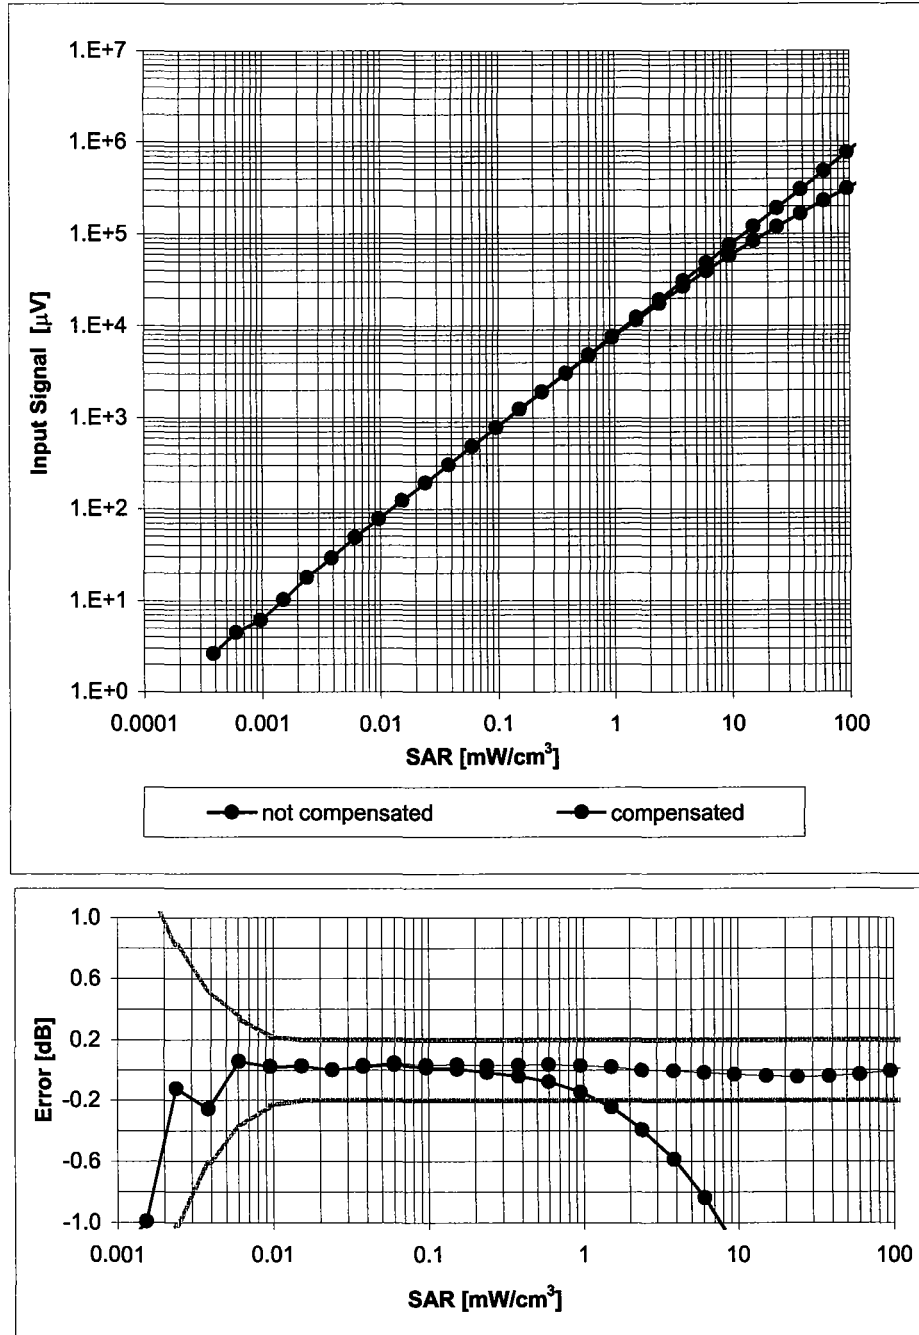

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

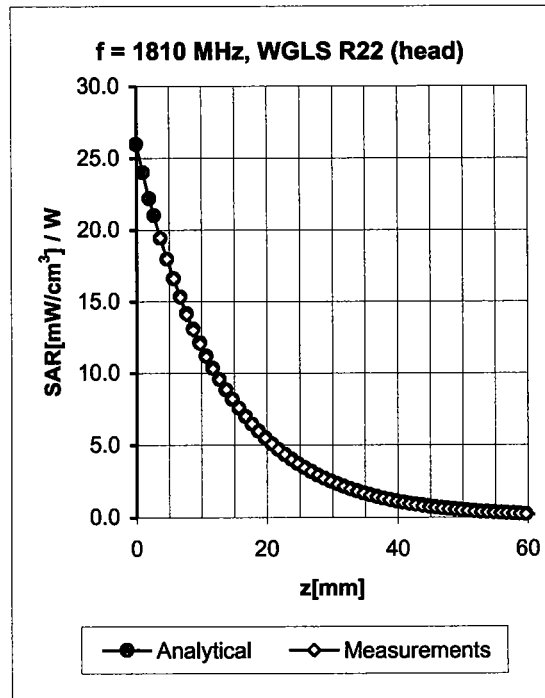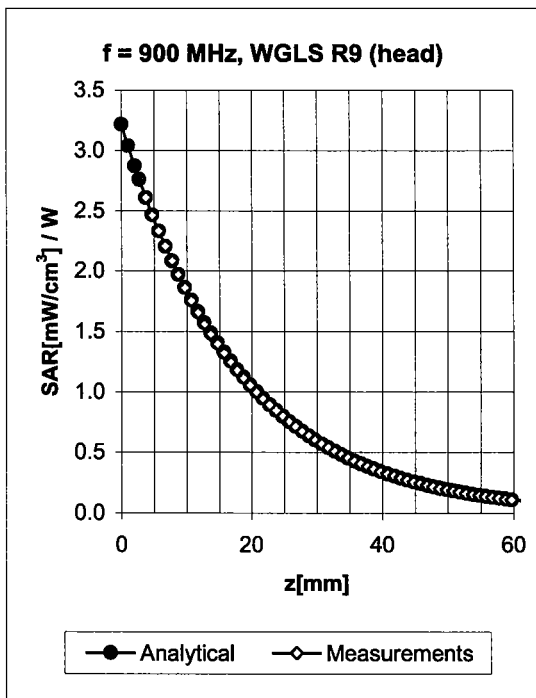


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.74	1.73	5.75 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.56	2.43	4.78 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.53	2.66	4.49 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.65	2.25	4.18 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.63	1.95	5.53 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.57	2.75	4.31 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.58	2.55	4.13 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.62	2.21	3.97 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

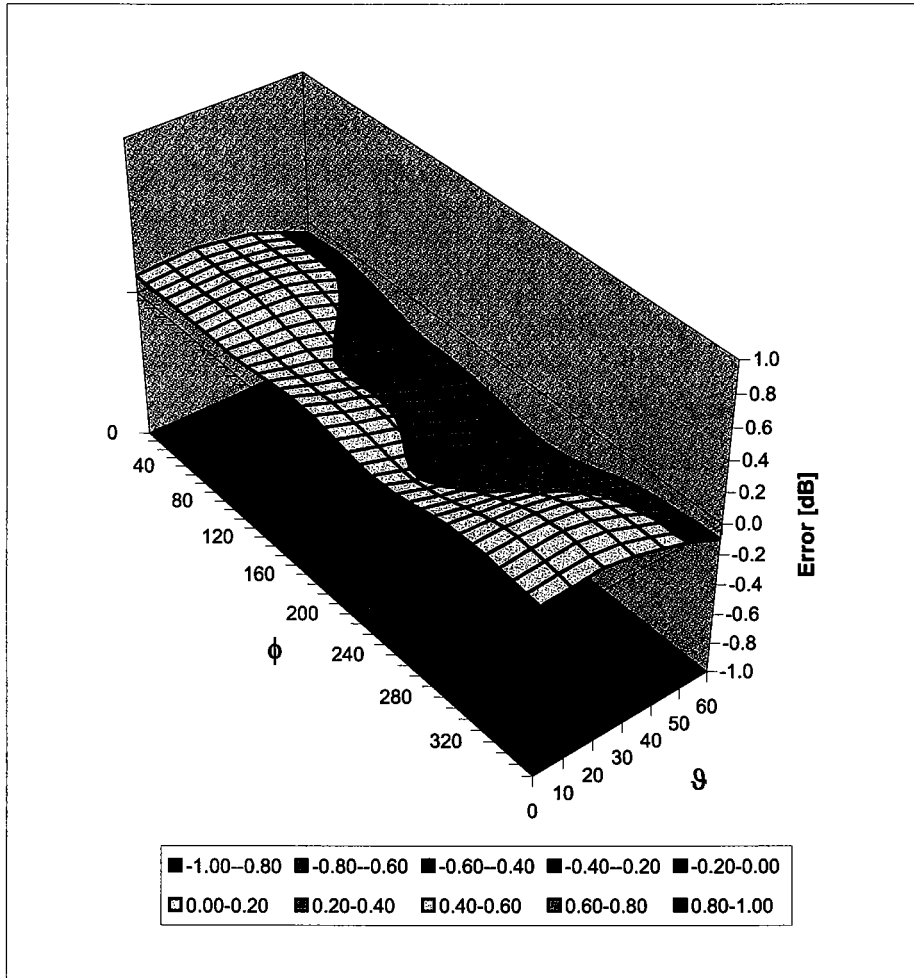

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

Appendix 6

Measurement Uncertainty Budget

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	<i>g</i>	$\frac{h = c \times f}{e}$	$\frac{i = c \times g}{e}$	<i>k</i>
Uncertainty Component	IEEE 1528 section	Tol. (\pm %)	Prob Dist	Div.	c_i (1 g)	c_i (10 g)	1 g u_i (\pm %)	10 g u_i (\pm %)	v_i
Measurement System									
Probe Calibration	E.2.1	5.9	N	1.00	1	1	5.9	5.9	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1.0	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	N	1.00	1	1	0.3	0.3	∞
Response Time	E.2.7	1.1	R	1.73	1	1	0.6	0.6	∞
Integration Time	E.2.8	1.1	R	1.73	1	1	0.6	0.6	∞
RF Ambient Conditions - Noise	E.6.1	3.0	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	0.0	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mech. Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning w.r.t Phantom	E.6.3	1.4	R	1.73	1	1	0.8	0.8	∞
Max. SAR Evaluation (ext., int., avg.)	E.5	3.4	R	1.73	1	1	2.0	2.0	∞
Test sample Related									
Test Sample Positioning	E.4.2	3.2	N	1.00	1	1	3.2	3.2	29
Device Holder Uncertainty	E.4.1	4.0	N	1.00	1	1	4.0	4.0	8
SAR drift	6.6.2	5.0	R	1.73	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4.0	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measurement)	E.3.3	3.3	N	1.00	0.64	0.43	2.1	1.4	∞
Liquid Permittivity (target)	E.3.2	5.0	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measurement)	E.3.3	1.9	N	1.00	0.6	0.49	1.1	0.9	∞
Combined Standard Uncertainty			RSS				11.1	10.8	411
Expanded Uncertainty (95% CONFIDENCE LEVEL)			$k=2$				22.2	21.6	

Appendix 7

Photographs of the device under test



Figure 1 – Front and Rear of Transceiver



Figure 2 – Front of Transceiver, Flip Open



Figure 3 – Transceiver against head, Cheek Touch position



Figure 4 – Transceiver against head, Cheek Touch position

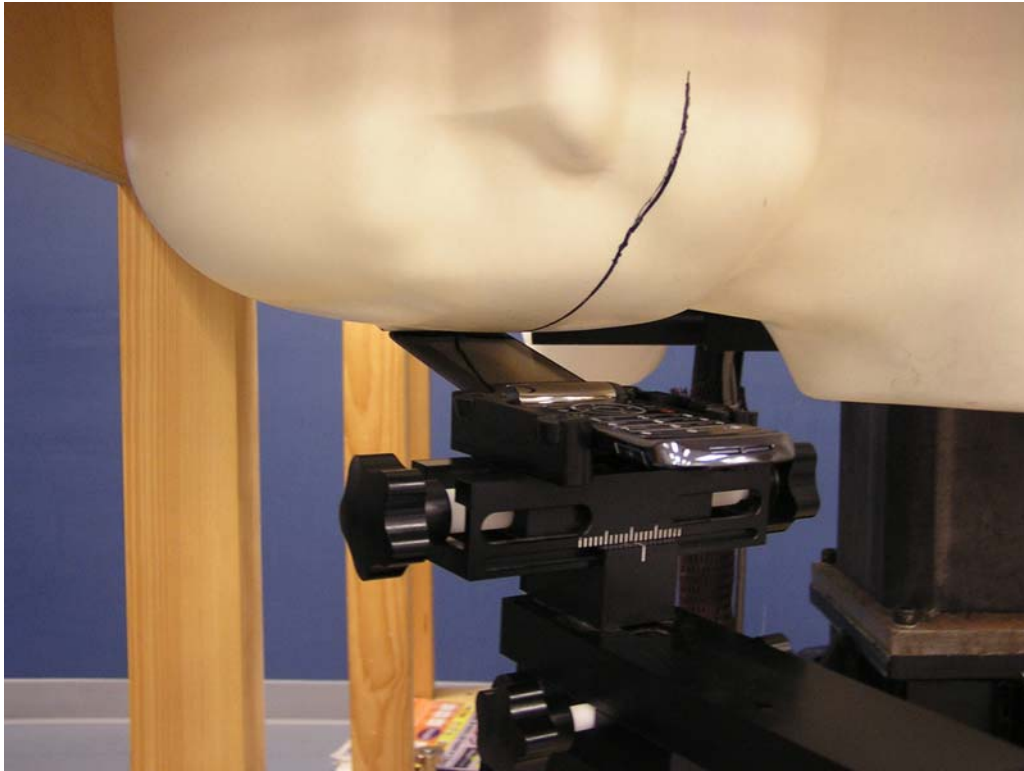


Figure 5 – Transceiver against head, 15° Tilt position



Figure 6 – Transceiver against head, 15° Tilt position



Figure 7 – Transceiver in Face Dispatch position, 25 mm from Phantom



Figure 8 – Transceiver against body, Back of Phone 15 mm from Phantom position

Appendix 8

Dipole Characterization Certificate

Certification of System Performance Check Targets

Based on WI-0396

-Historical Data-

900MHz	
IEEE1528 Target:	10.8 (W/kg)
Measurement Uncertainty (k=1):	9.0%
Measurement Period:	3-June-05 to 10-May-06
# of tests performed:	1571
Grand Average:	11.3 (W/kg)
% Delta (Average - IEEE1528 Target)	4.3%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject <u>Average</u> as new system performance check target?	ACCEPT
<u>Applies to Dipole SN's:</u> 55, 69, 77, 78, 79, 80, 91, 92, 93, 94, 95, 96, 97	


-New System Performance Check Targets- per WI-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
900MHz	11.3	41.5 ± 5%	0.97 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments:

Certification of System Performance Check Targets

Based on APP-0396

-Historical Data-

1800MHz	
IEEE1528 Target:	38.1 (W/kg)
Measurement Uncertainty (k=1):	9.0%
<i>Measurement Period:</i>	<i>3-June-05 to 10-May-06</i>
# of tests performed:	1483
Grand Average:	37.5 (W/kg)
% Delta (Average - IEEE1528 Target)	-1.5%
Is % Delta <= Expanded Measurement Uncertainty (k=2)?	Yes
Accept/Reject Average as new system performance check target?	<u>ACCEPT</u>
Applies to Dipole SN's: 246tr, 250tr, 251tr, 259tr, 263tr, 271tr, 272tr, 276tr, 277tr, 279tr, 280tr, 281tr, 283tr, 284tr, 2d128, 2d129	


-New System Performance Check Targets- per APP-0396

(based on analysis of historical data)

Frequency	SAR Target (W/kg)	Permittivity	Conductivity (S/m)
1800MHz	37.5	40.0 ± 5%	1.40 ± 5%

-Approvals-

Submitted by: Date:

Signed: 

Comments:

Approved by: Date:

Signed: 

Comments: